


Test Condition: NTNV, Test Mode: GSM, GPRS, EGPRS, Test Band: GSM900, DCS1800

Test Data


Clause 4.2.1 Transmitter-Frequency error and phase error

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	5	Frequency Error (Hz)	12.49	-88.02	88.02	PASS
GSM900	975	880.2	5	RMS Phase Error (Degree)	1.25	0	5	PASS
GSM900	975	880.2	5	Peak Phase Error (Degree)	6.23	0	20	PASS
GSM900	60	902	5	Frequency Error (Hz)	15.24	-90.2	90.2	PASS
GSM900	60	902	5	RMS Phase Error (Degree)	1.73	0	5	PASS
GSM900	60	902	5	Peak Phase Error (Degree)	10.80	0	20	PASS
GSM900	124	914.8	5	Frequency Error (Hz)	12.56	-91.48	91.48	PASS
GSM900	124	914.8	5	RMS Phase Error (Degree)	1.45	0	5	PASS
GSM900	124	914.8	5	Peak Phase Error (Degree)	8.33	0	20	PASS
DCS1800	512	1710.2	0	Frequency Error (Hz)	13.08	-171.02	171.02	PASS
DCS1800	512	1710.2	0	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	512	1710.2	0	Peak Phase Error (Degree)	2.02	0	20	PASS
DCS1800	700	1747.8	0	Frequency Error (Hz)	14.82	-174.78	174.78	PASS
DCS1800	700	1747.8	0	RMS Phase Error (Degree)	0.64	0	5	PASS
DCS1800	700	1747.8	0	Peak Phase Error (Degree)	2.04	0	20	PASS
DCS1800	885	1784.8	0	Frequency Error (Hz)	18.92	-178.48	178.48	PASS
DCS1800	885	1784.8	0	RMS Phase Error (Degree)	0.62	0	5	PASS
DCS1800	885	1784.8	0	Peak Phase Error (Degree)	2.09	0	20	PASS


GSM900 Channel=124 PCL=5.png

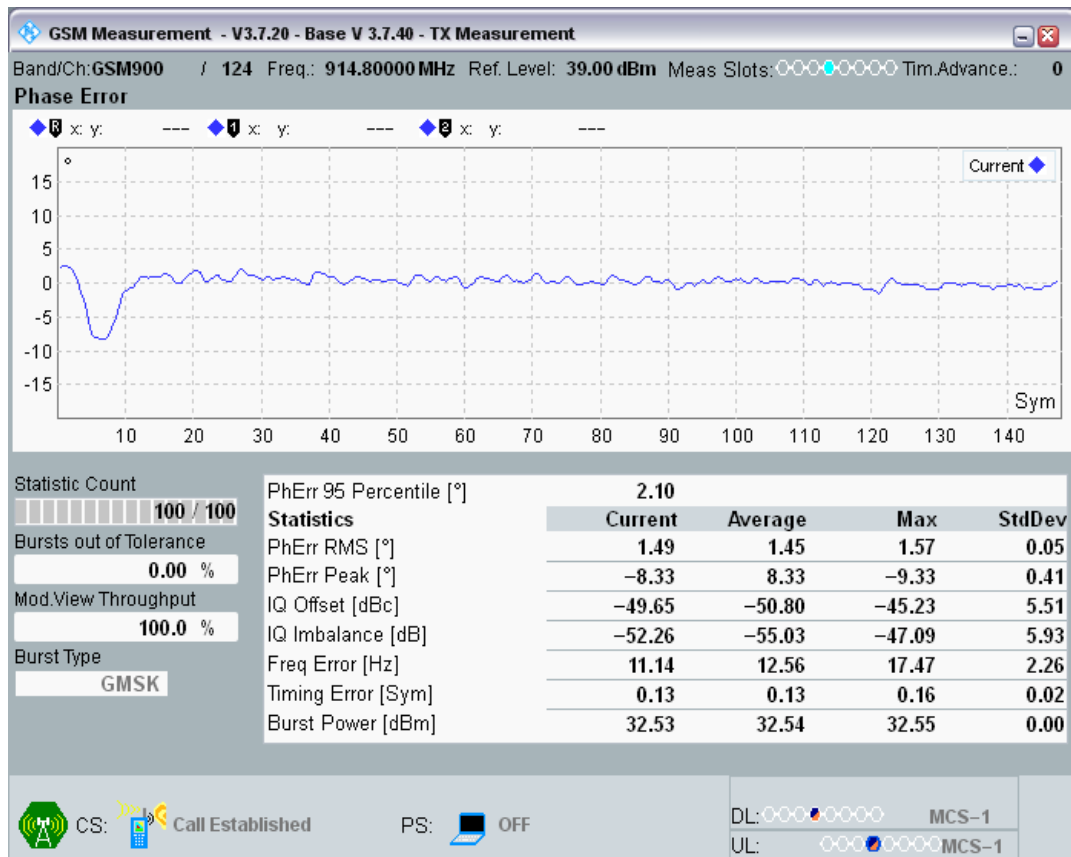


GSM900 Channel=60 PCL=5.png

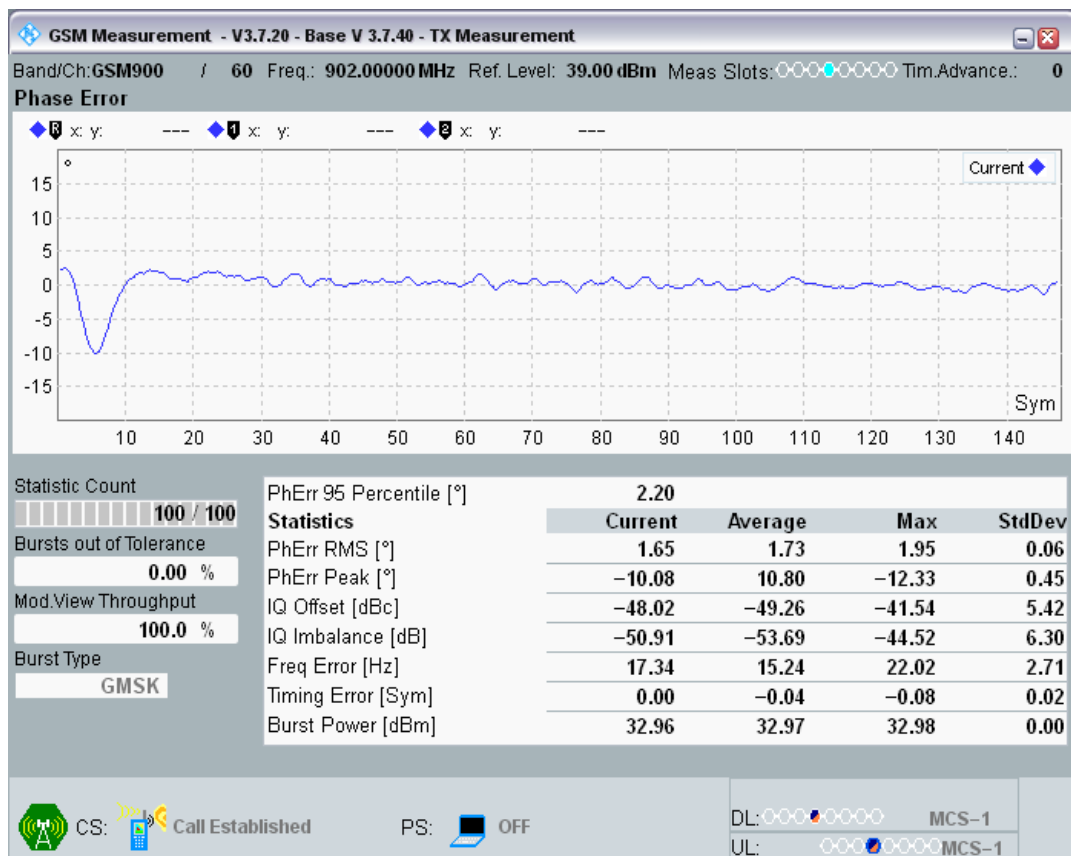


GSM900 Channel=975 PCL=5.png

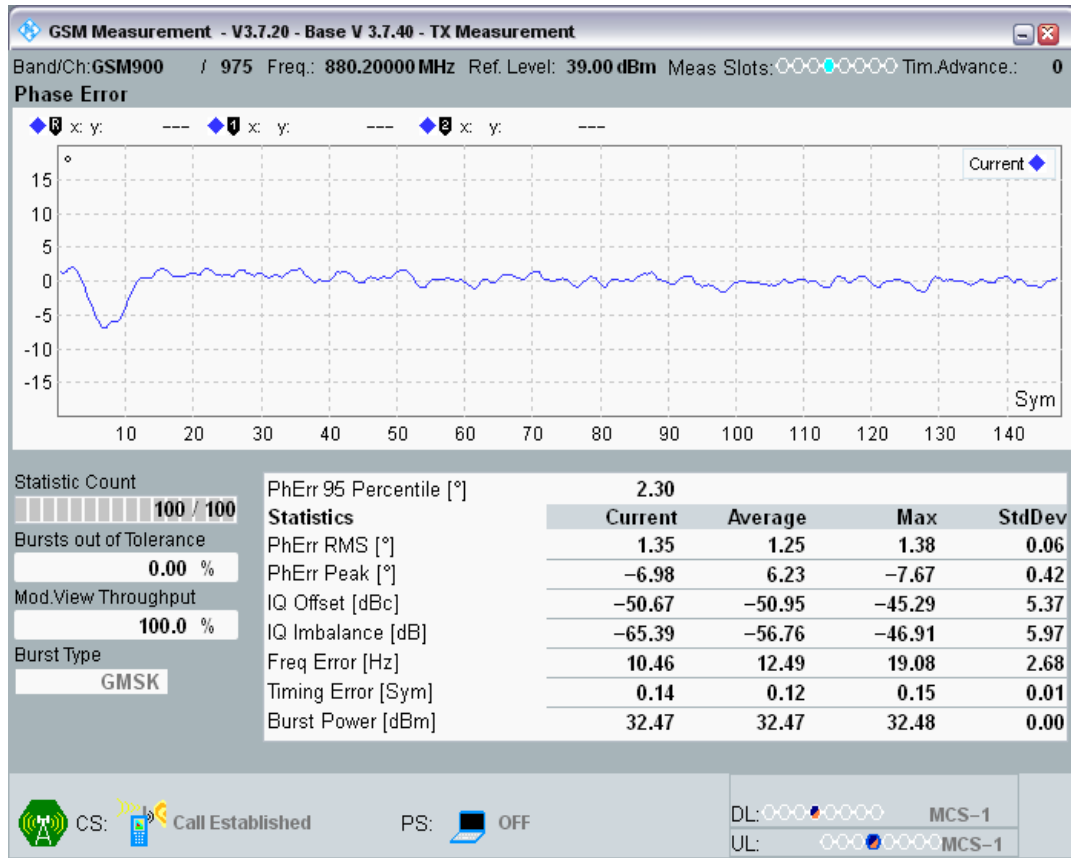


DCS1800 Channel=512 PCL=0.png

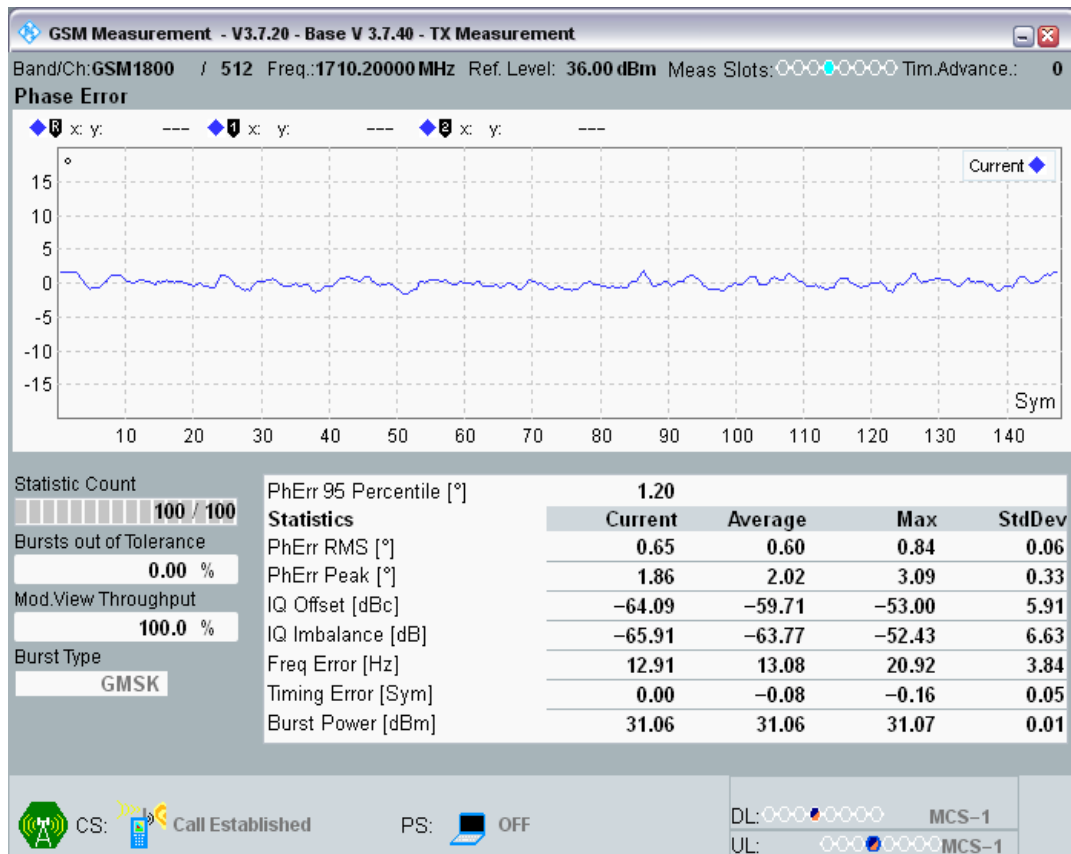

DCS1800 Channel=700 PCL=0.png

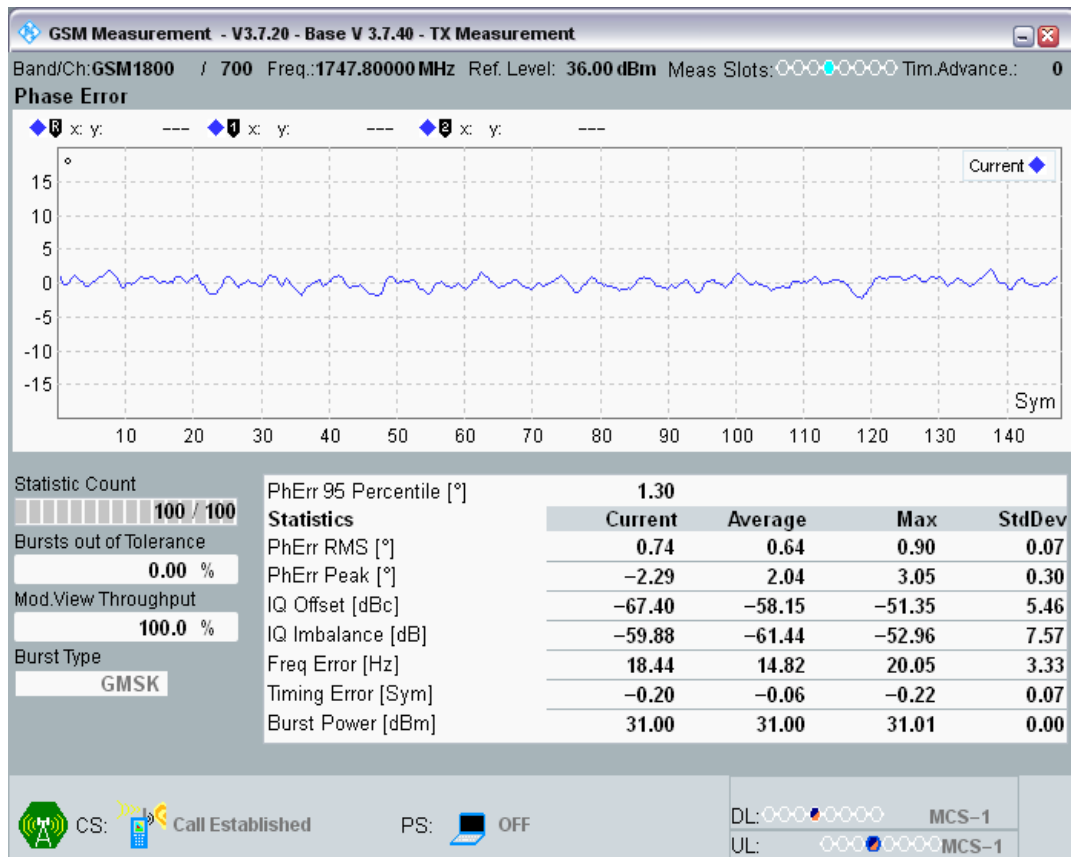


DCS1800 Channel=885 PCL=0.png

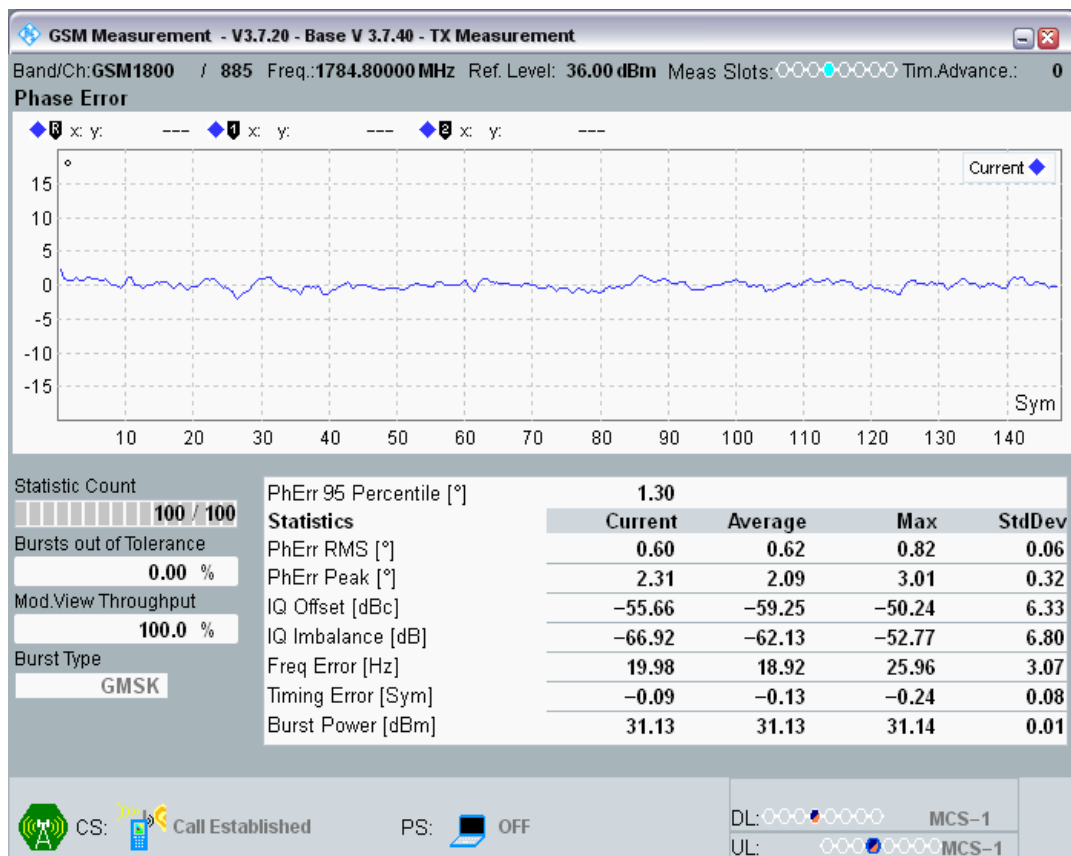

Clause 4.2.2 Transmitter-Frequency error under multi path and interference conditions

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	0	13.37	-400	400	PASS
DCS1800	RA130	700	1747.8	0	15.21	-400	400	PASS
DCS1800	RA130	885	1784.8	0	18.24	-400	400	PASS
DCS1800	HT100	512	1710.2	0	14.92	-350	350	PASS
DCS1800	HT100	700	1747.8	0	16.21	-350	350	PASS
DCS1800	HT100	885	1784.8	0	19.02	-350	350	PASS
DCS1800	TU50	512	1710.2	0	13.24	-260	260	PASS
DCS1800	TU50	700	1747.8	0	13.11	-260	260	PASS
DCS1800	TU50	885	1784.8	0	19.53	-260	260	PASS
DCS1800	TU1_5	512	1710.2	0	14.53	-320	320	PASS
DCS1800	TU1_5	700	1747.8	0	11.85	-320	320	PASS
DCS1800	TU1_5	885	1784.8	0	14.69	-320	320	PASS
GSM900	RA250	975	880.2	5	12.49	-300	300	PASS
GSM900	RA250	60	902	5	17.11	-300	300	PASS
GSM900	RA250	124	914.8	5	10.91	-300	300	PASS
GSM900	HT100	975	880.2	5	11.62	-180	180	PASS
GSM900	HT100	60	902	5	15.88	-180	180	PASS
GSM900	HT100	124	914.8	5	11.98	-180	180	PASS
GSM900	TU50	975	880.2	5	14.01	-160	160	PASS
GSM900	TU50	60	902	5	15.34	-160	160	PASS
GSM900	TU50	124	914.8	5	9.36	-160	160	PASS
GSM900	TU3	975	880.2	5	15.05	-230	230	PASS
GSM900	TU3	60	902	5	18.02	-230	230	PASS
GSM900	TU3	124	914.8	5	11.36	-230	230	PASS


DCS1800 Channel=512 PCL=0 HT100.png

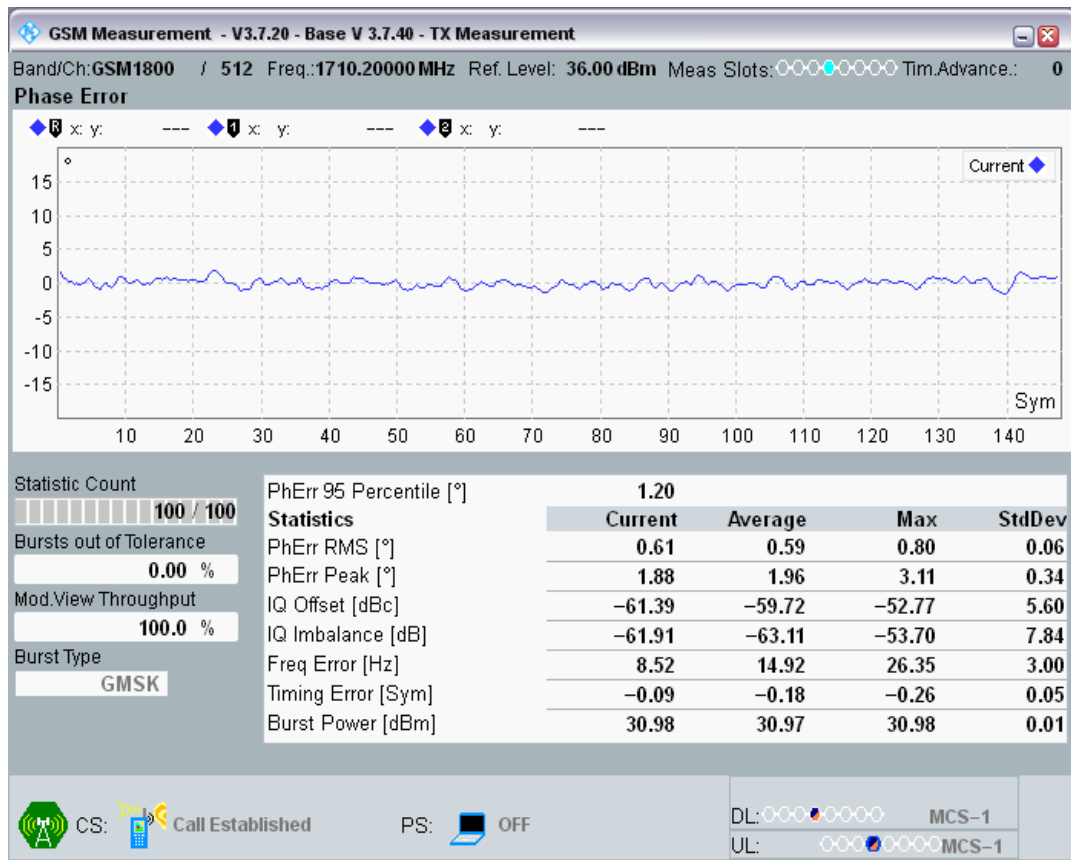


DCS1800 Channel=512 PCL=0 RA130.png




DCS1800 Channel=512 PCL=0 TU1_5.png

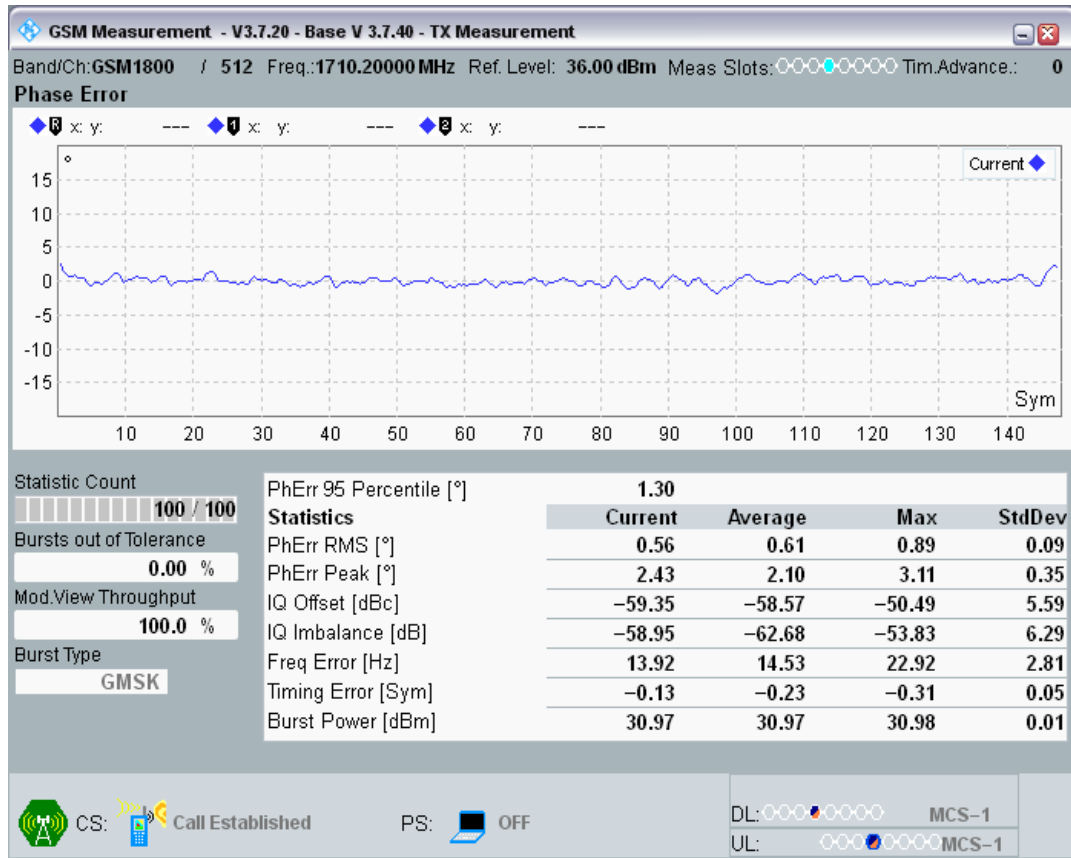


DCS1800 Channel=512 PCL=0 TU50.png

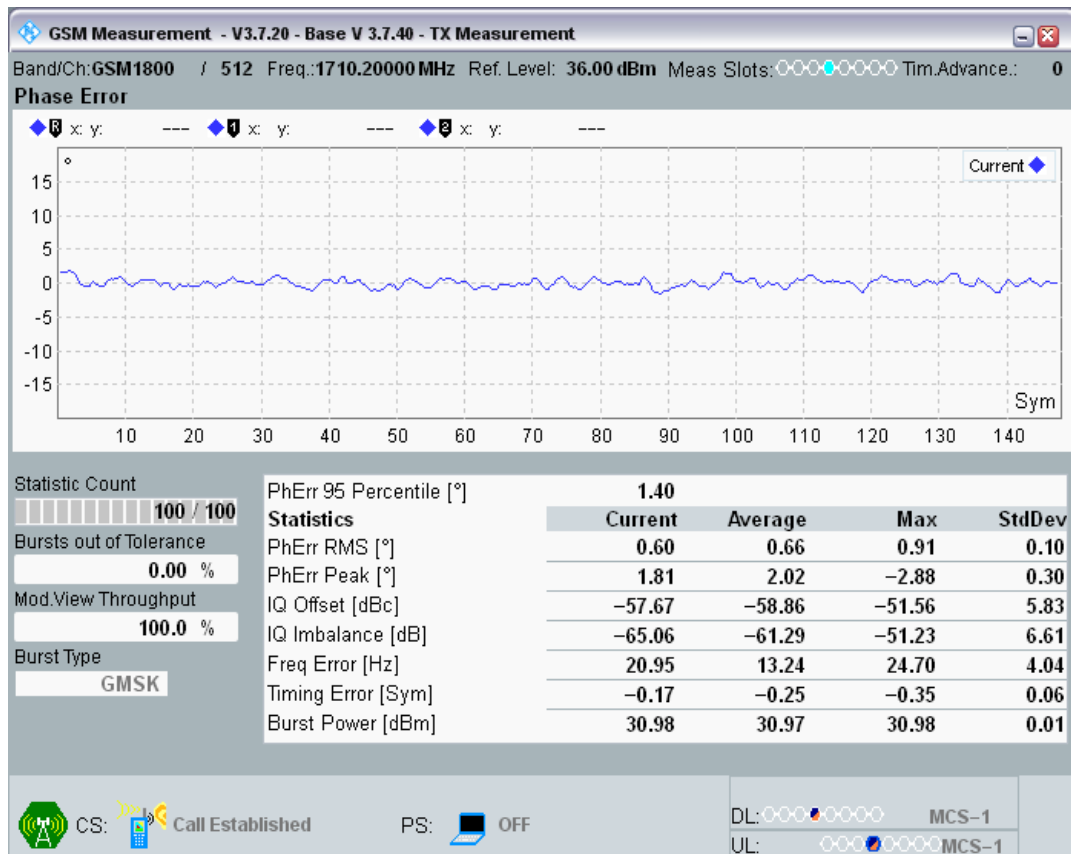


DCS1800 Channel=700 PCL=0 HT100.png

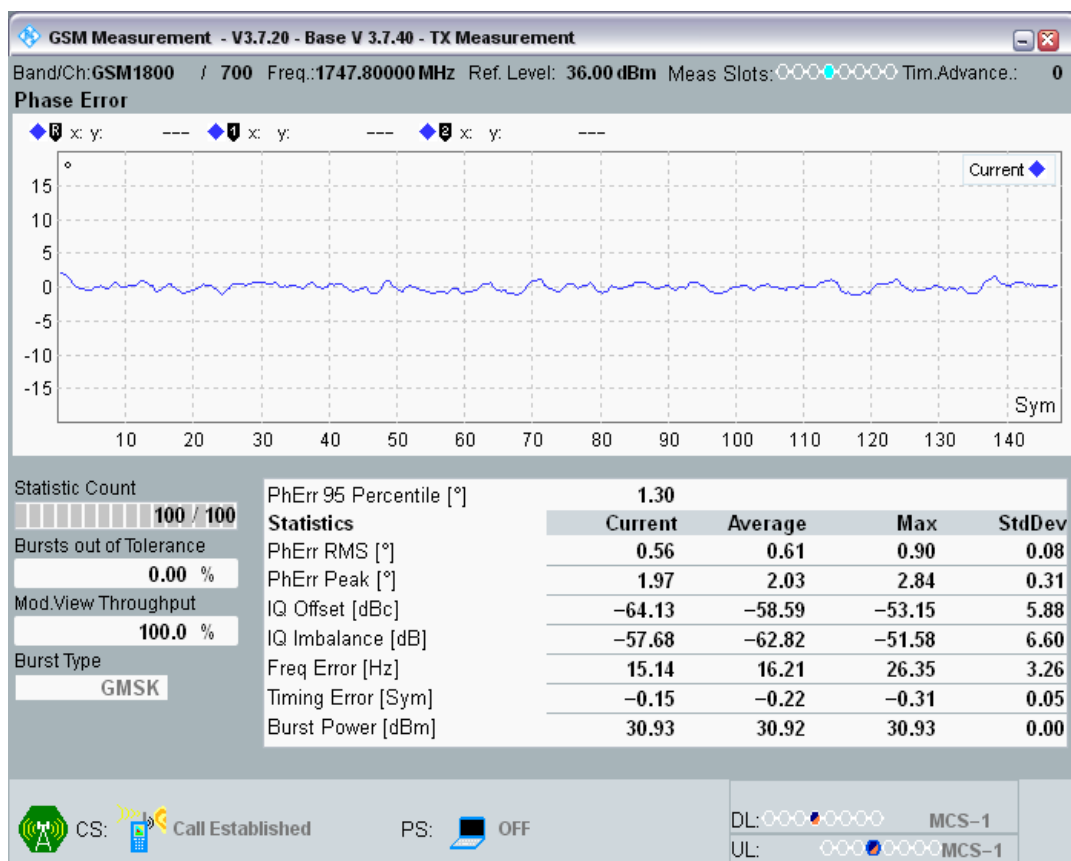


DCS1800 Channel=700 PCL=0 RA130.png

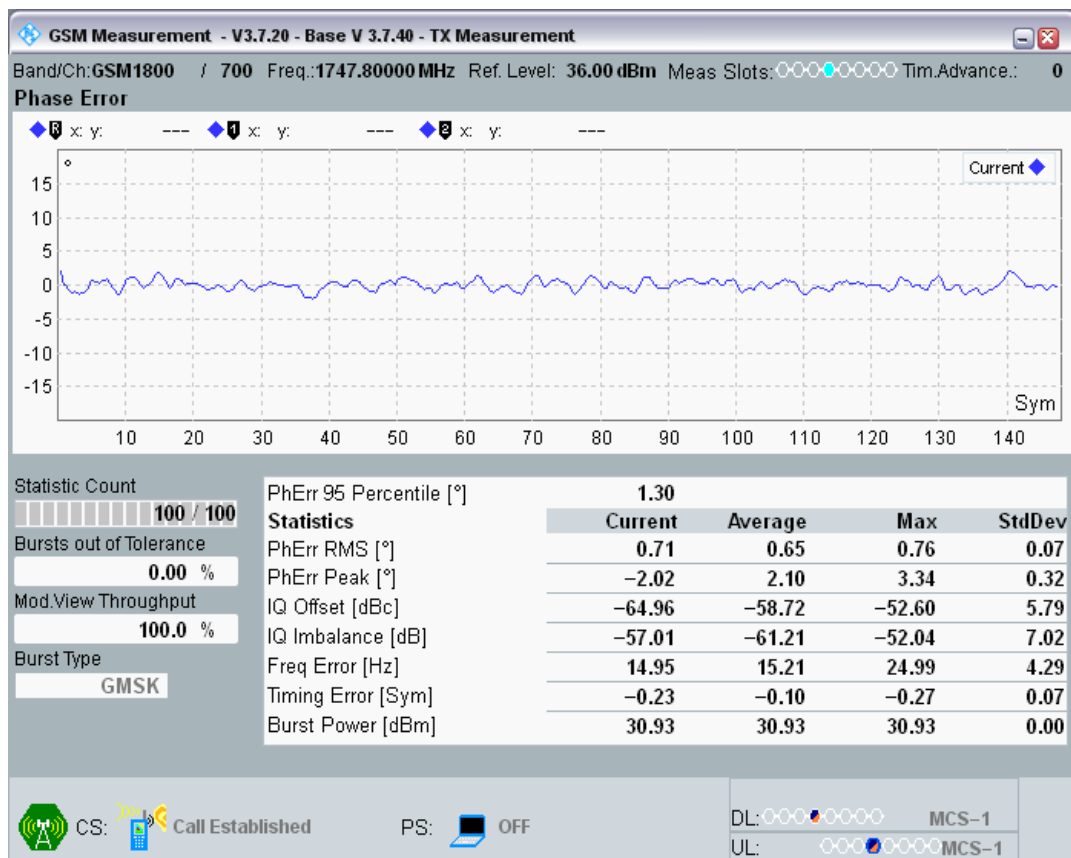


DCS1800 Channel=700 PCL=0 TU1_5.png

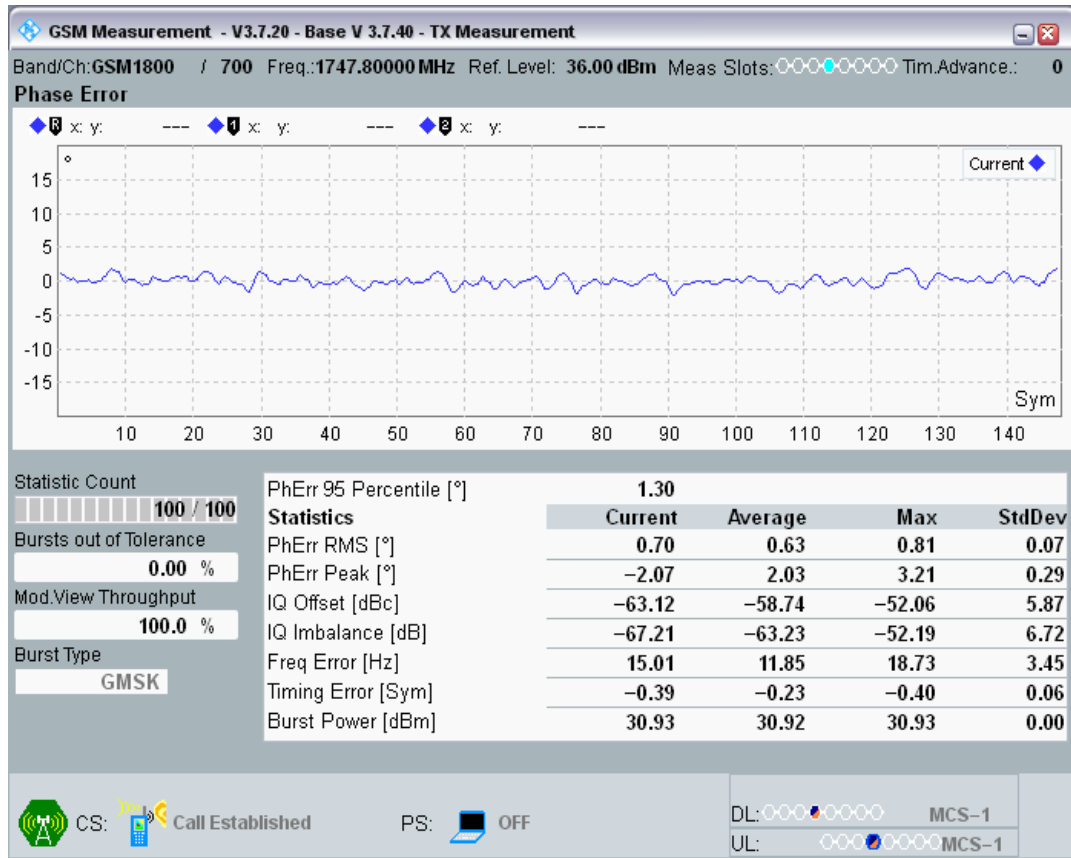

DCS1800 Channel=700 PCL=0 TU50.png

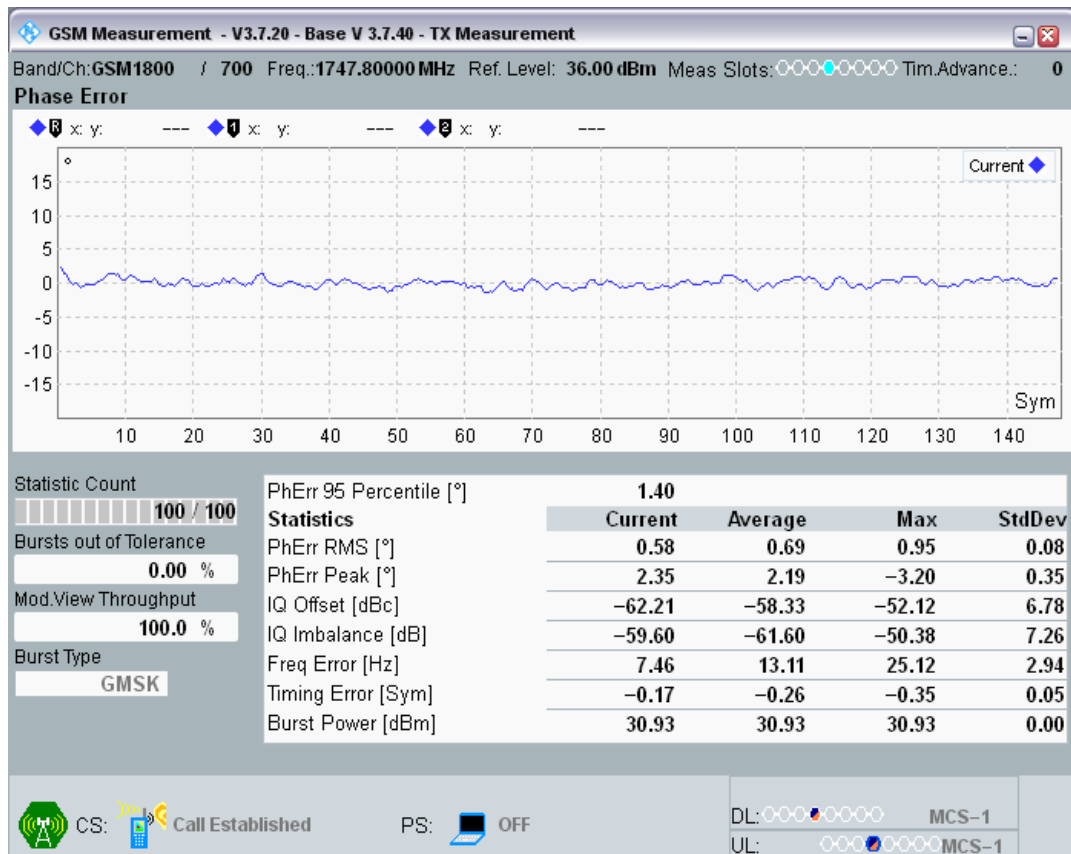


DCS1800 Channel=885 PCL=0 HT100.png

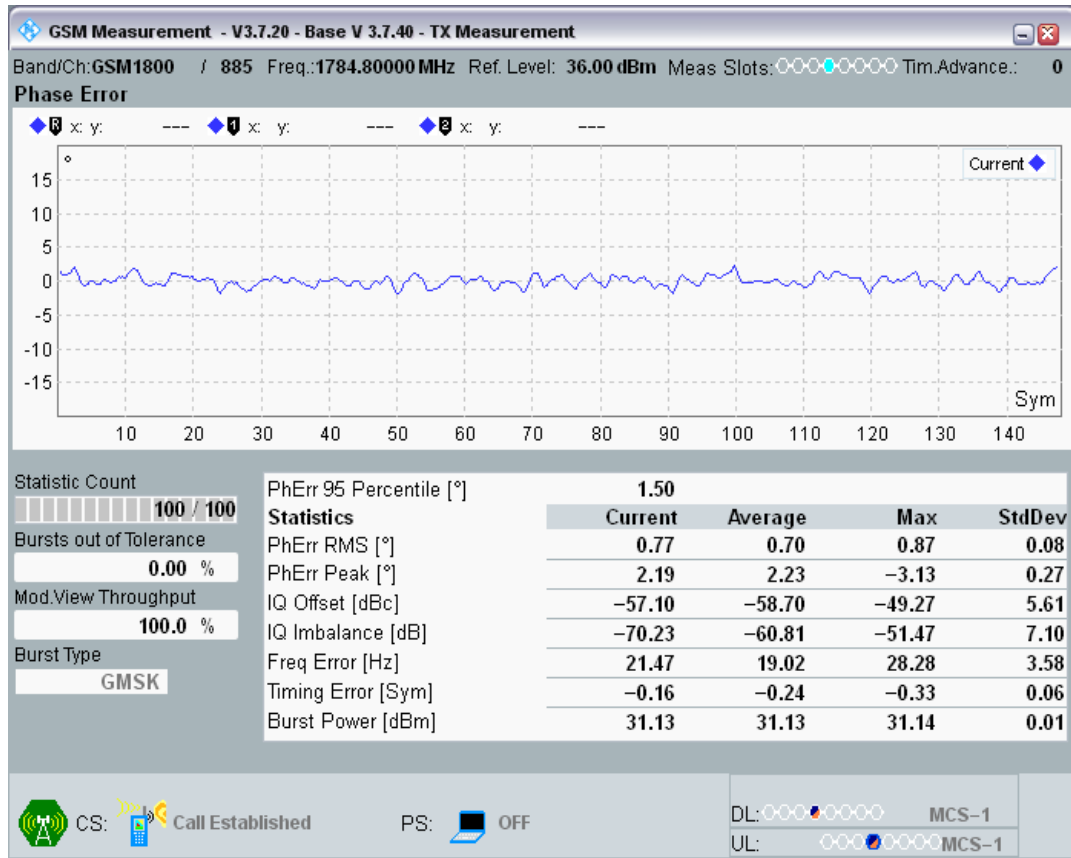

DCS1800 Channel=885 PCL=0 RA130.png




DCS1800 Channel=885 PCL=0 TU1_5.png

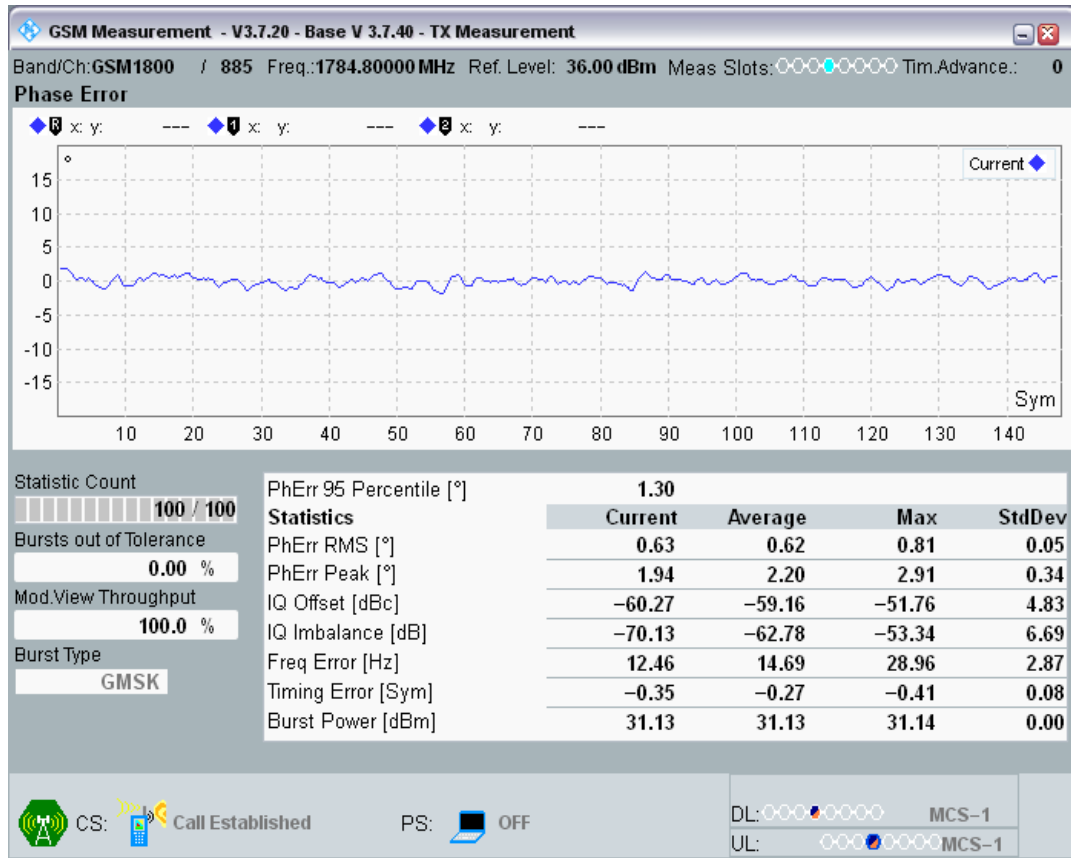


DCS1800 Channel=885 PCL=0 TU50.png




GSM900 Channel=124 PCL=5 HT100.png

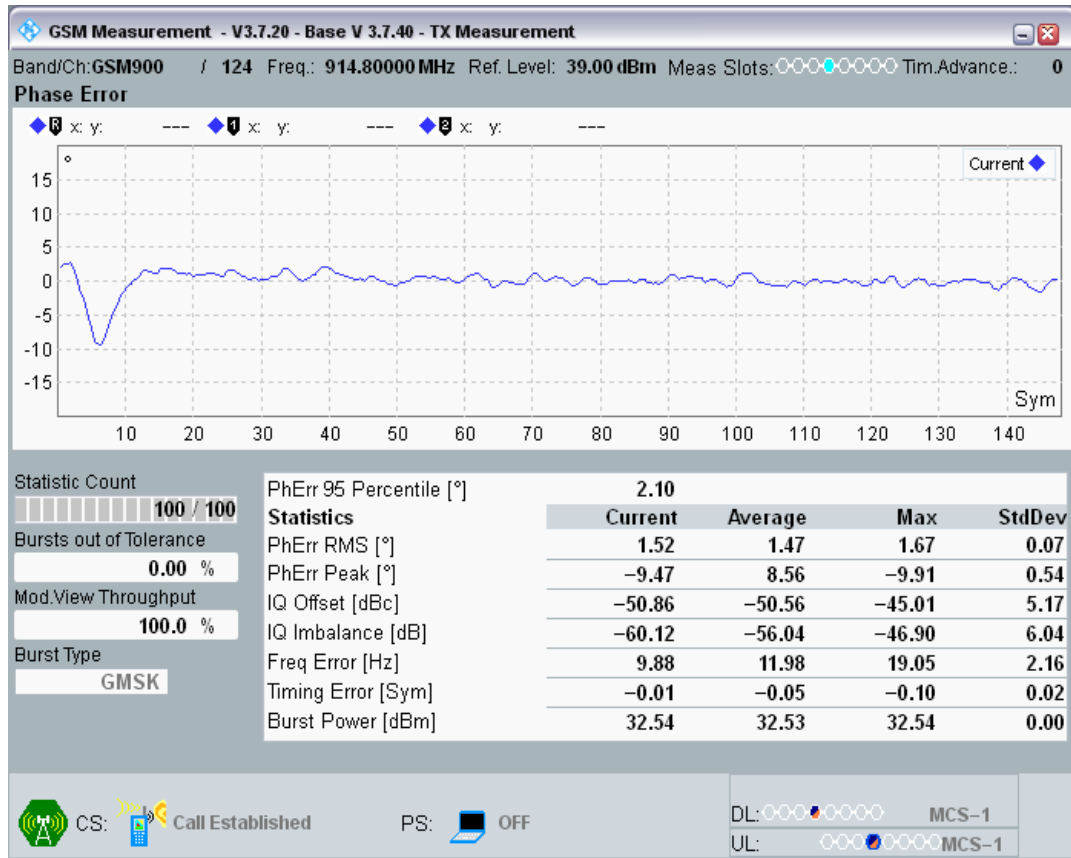


GSM900 Channel=124 PCL=5 RA250.png

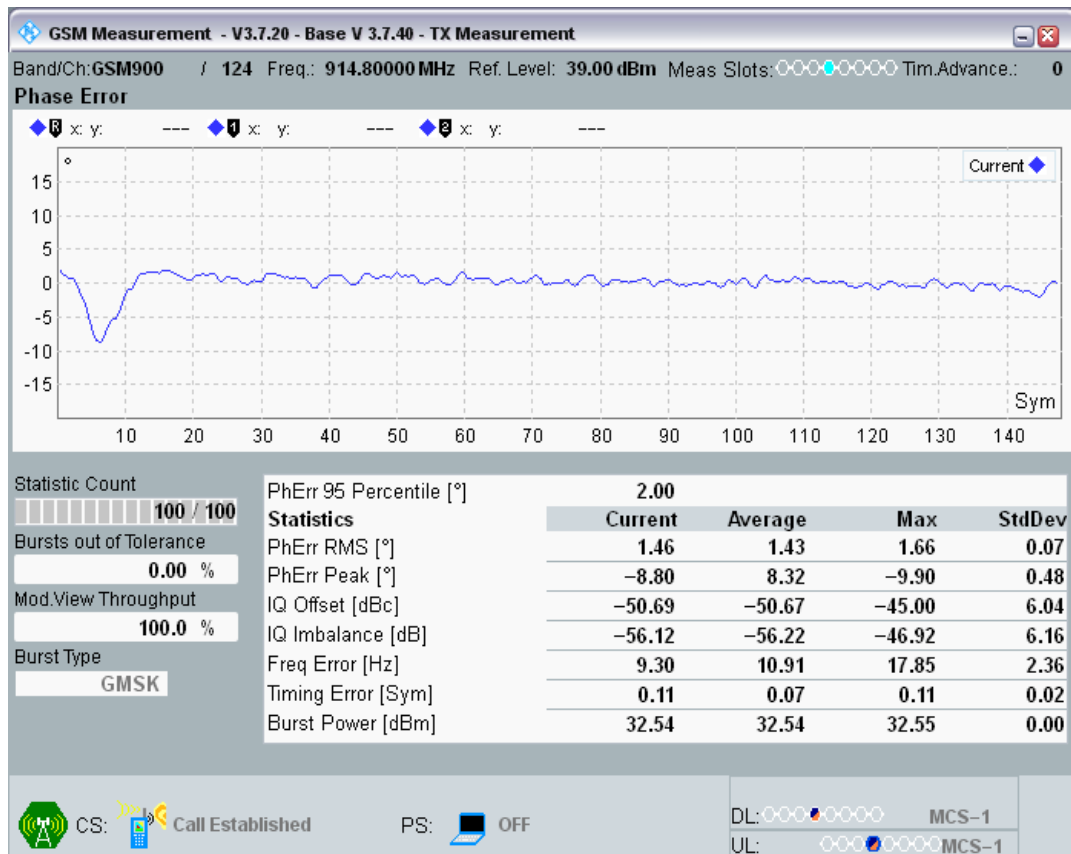


GSM900 Channel=124 PCL=5 TU3.png

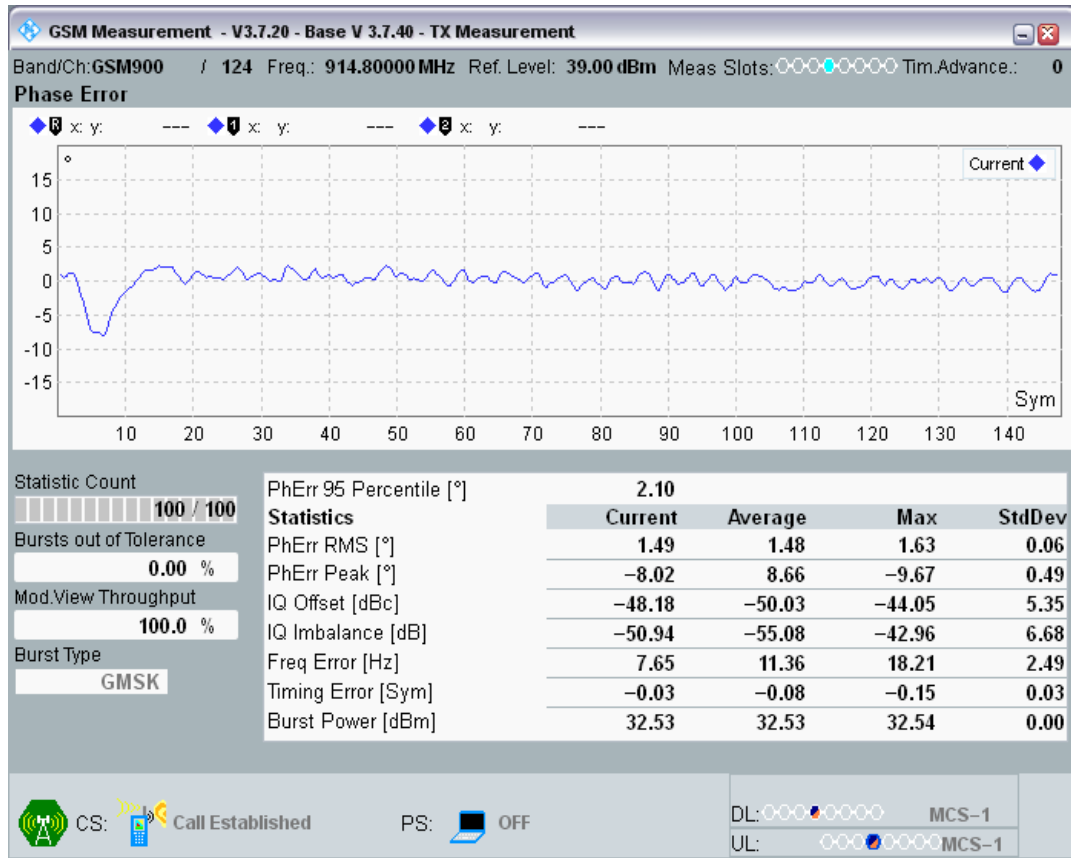


GSM900 Channel=124 PCL=5 TU50.png

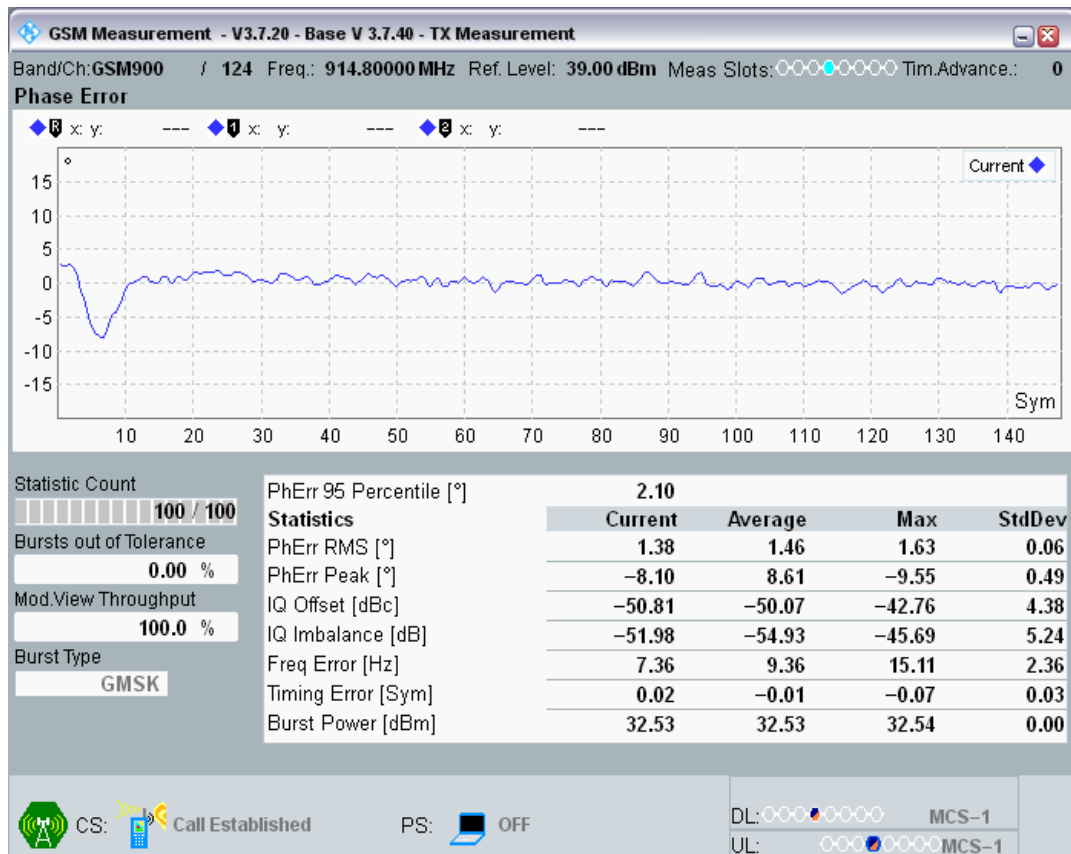


GSM900 Channel=60 PCL=5 HT100.png

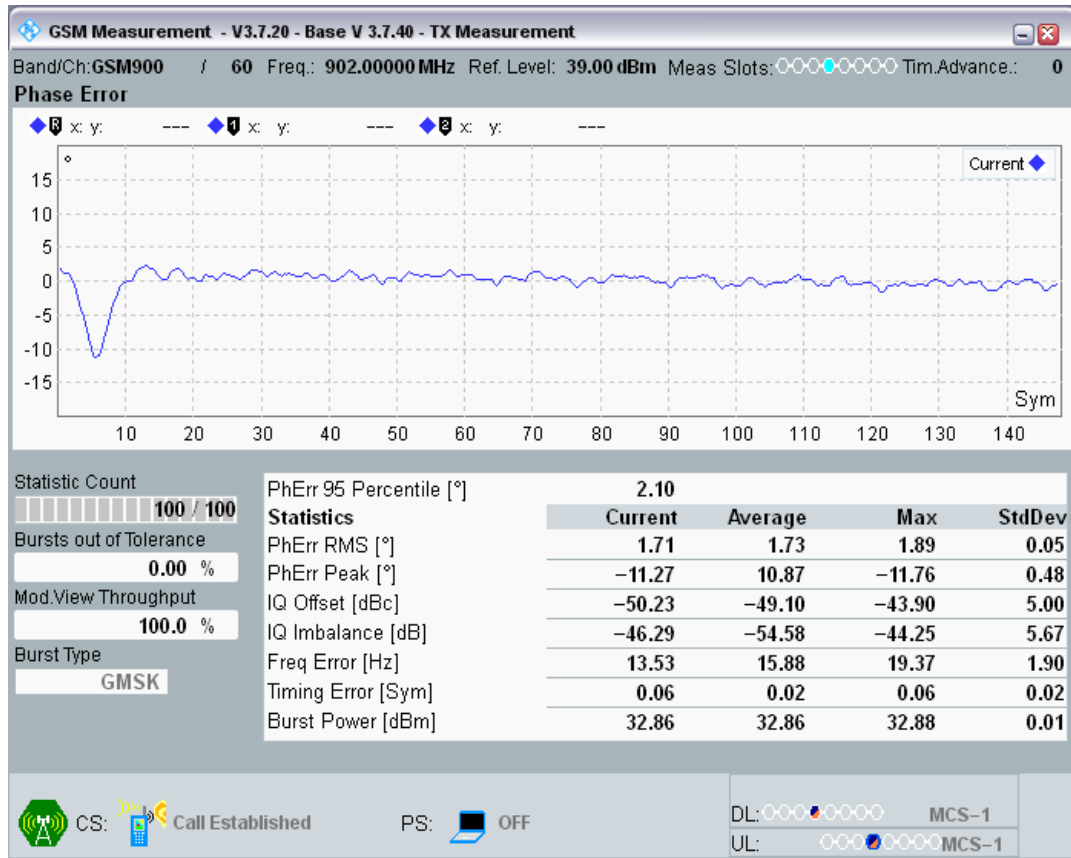


GSM900 Channel=60 PCL=5 RA250.png

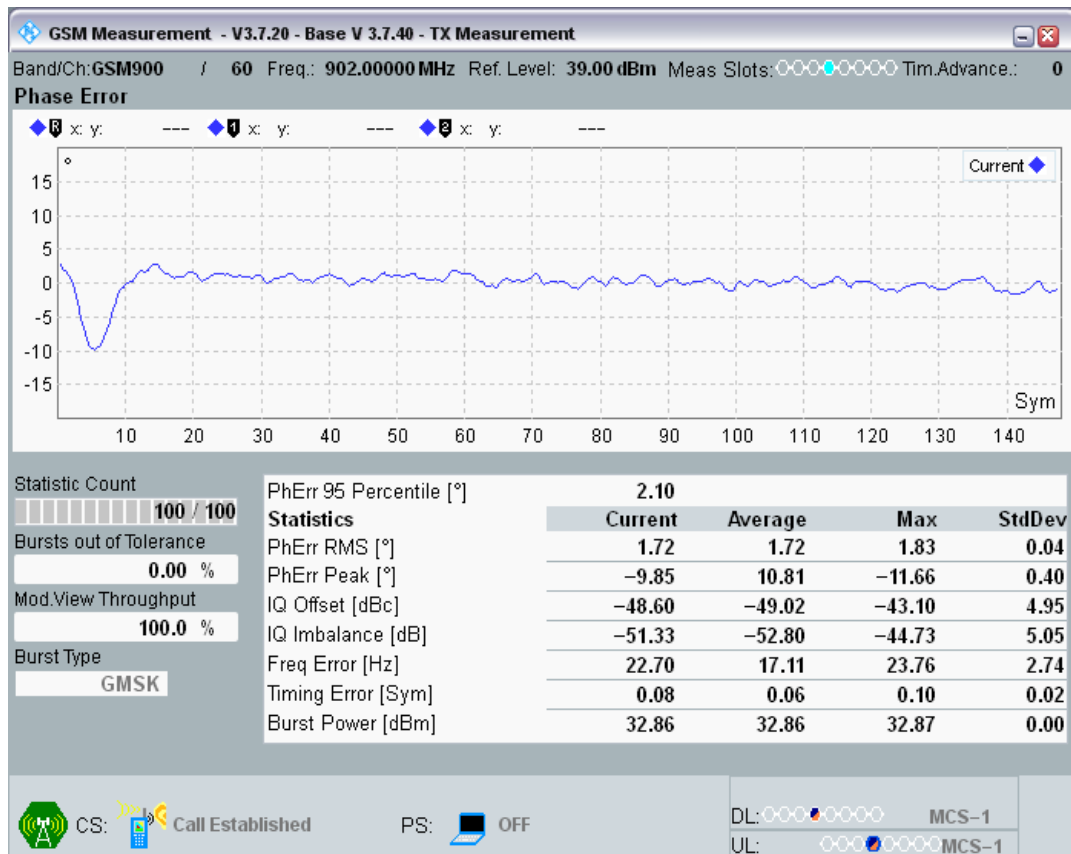


GSM900 Channel=60 PCL=5 TU3.png

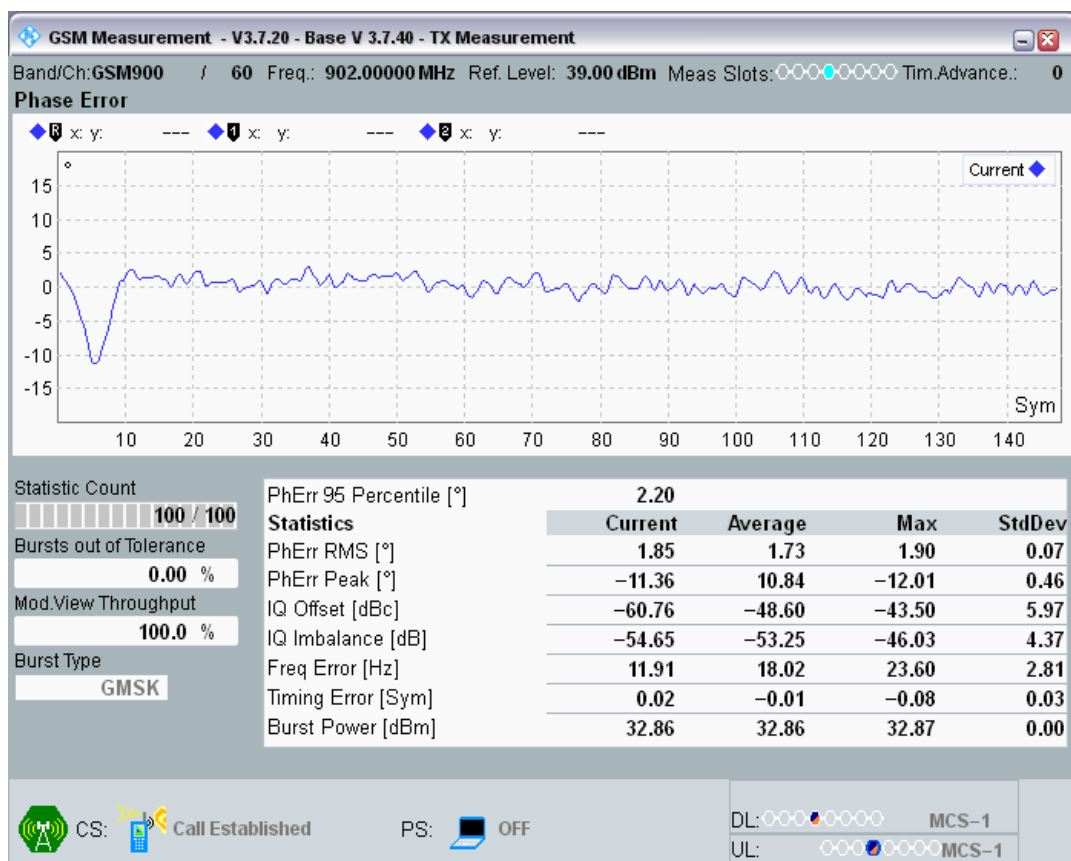


GSM900 Channel=60 PCL=5 TU50.png

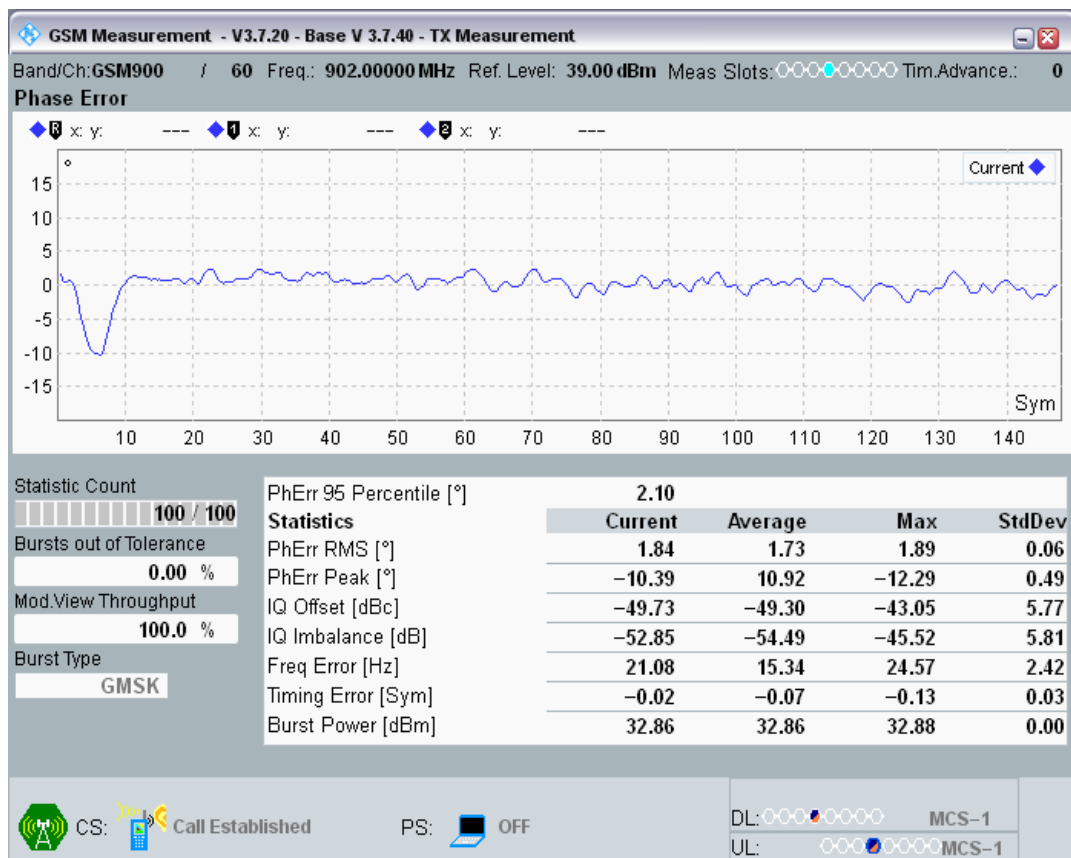


GSM900 Channel=975 PCL=5 HT100.png

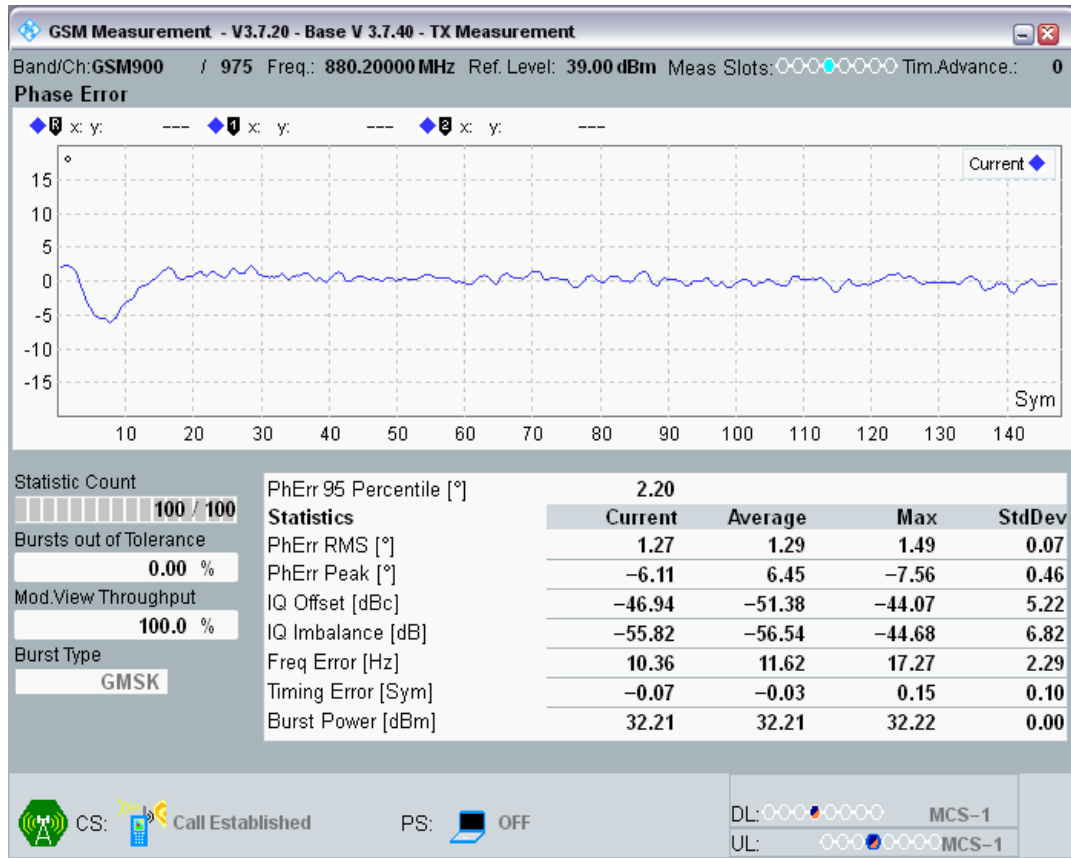


GSM900 Channel=975 PCL=5 RA250.png

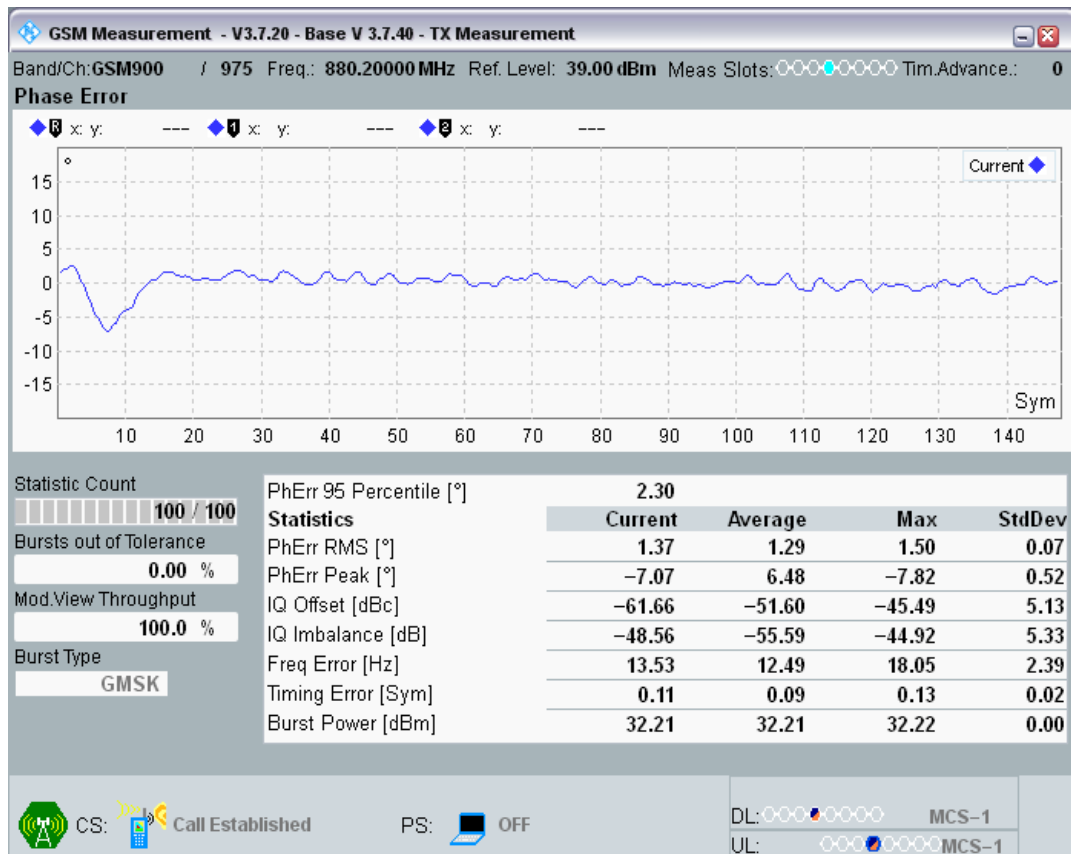

GSM900 Channel=975 PCL=5 TU3.png

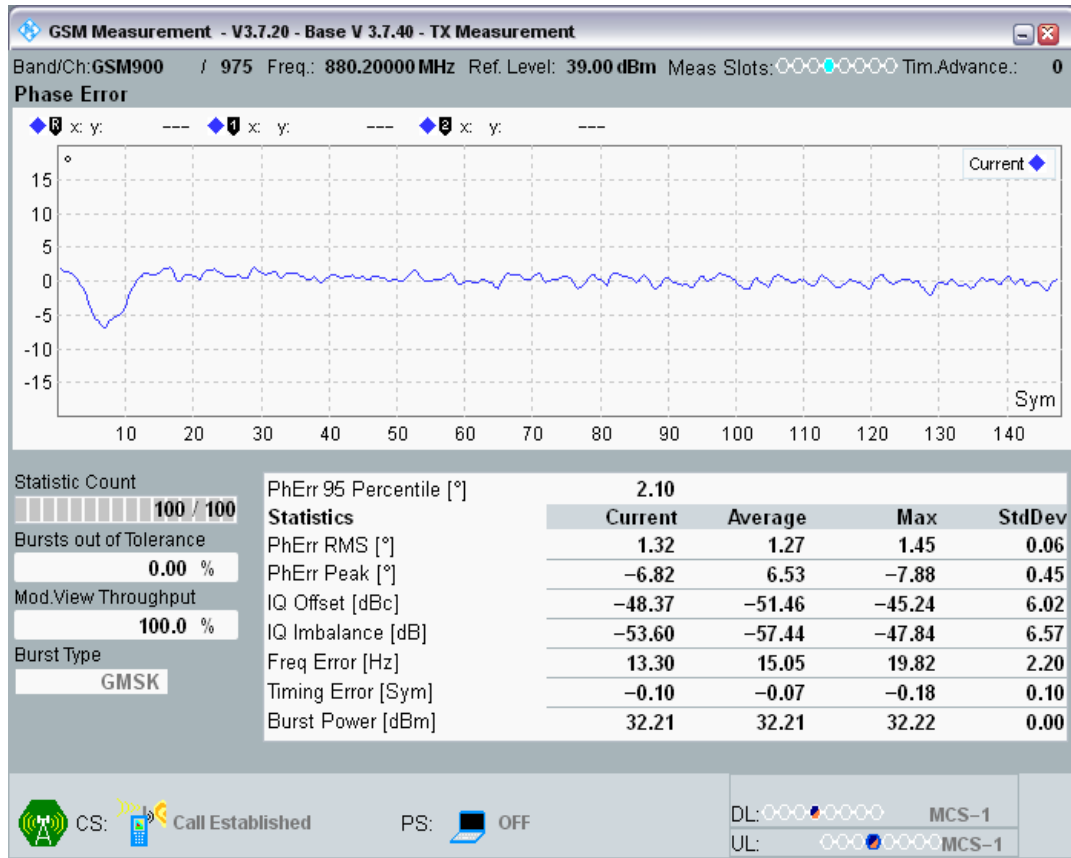

GSM900 Channel=975 PCL=5 TU50.png

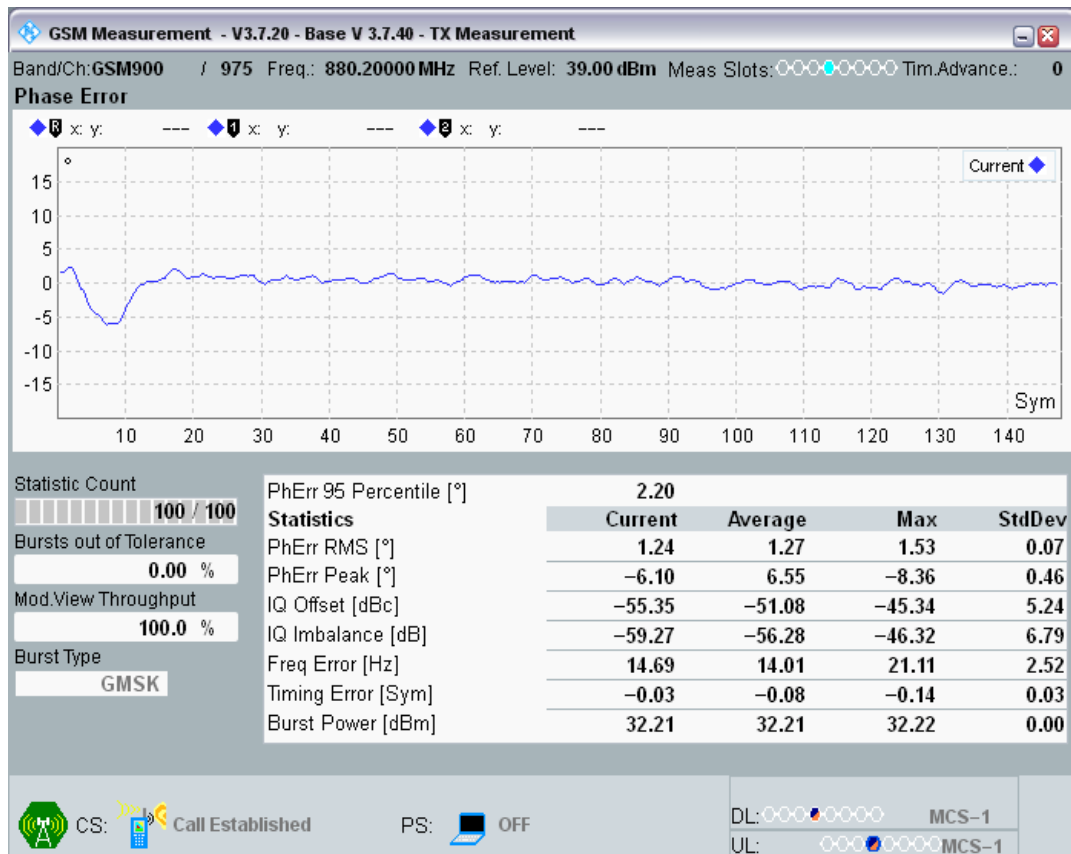

Clause 4.2.5 Transmitter output power and burst timing

Band	Channel	Frequency (MHz)	PCL	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
DCS1800	512	1710.2	0	Power	30.93597	28	32	PASS
DCS1800	512	1710.2	0	PvT	-	-	-	PASS
DCS1800	512	1710.2	1	Power	29.80356	25	31	PASS
DCS1800	512	1710.2	1	PvT	-	-	-	PASS
DCS1800	512	1710.2	2	Power	27.83334	23	29	PASS
DCS1800	512	1710.2	2	PvT	-	-	-	PASS
DCS1800	512	1710.2	3	Power	25.84207	21	27	PASS
DCS1800	512	1710.2	3	PvT	-	-	-	PASS
DCS1800	512	1710.2	4	Power	23.88257	19	25	PASS
DCS1800	512	1710.2	4	PvT	-	-	-	PASS
DCS1800	512	1710.2	5	Power	21.88937	17	23	PASS
DCS1800	512	1710.2	5	PvT	-	-	-	PASS
DCS1800	512	1710.2	6	Power	19.88132	15	21	PASS
DCS1800	512	1710.2	6	PvT	-	-	-	PASS
DCS1800	512	1710.2	7	Power	17.93051	13	19	PASS
DCS1800	512	1710.2	7	PvT	-	-	-	PASS
DCS1800	512	1710.2	8	Power	15.94974	11	17	PASS
DCS1800	512	1710.2	8	PvT	-	-	-	PASS
DCS1800	512	1710.2	9	Power	13.94174	8	16	PASS
DCS1800	512	1710.2	9	PvT	-	-	-	PASS
DCS1800	512	1710.2	10	Power	11.89508	6	14	PASS
DCS1800	512	1710.2	10	PvT	-	-	-	PASS
DCS1800	512	1710.2	11	Power	9.935577	4	12	PASS
DCS1800	512	1710.2	11	PvT	-	-	-	PASS
DCS1800	512	1710.2	12	Power	7.578247	2	10	PASS
DCS1800	512	1710.2	12	PvT	-	-	-	PASS
DCS1800	512	1710.2	13	Power	5.555542	0	8	PASS
DCS1800	512	1710.2	13	PvT	-	-	-	PASS
DCS1800	512	1710.2	14	Power	3.58905	-3	7	PASS
DCS1800	512	1710.2	14	PvT	-	-	-	PASS
DCS1800	512	1710.2	15	Power	1.437897	-5	5	PASS
DCS1800	512	1710.2	15	PvT	-	-	-	PASS
DCS1800	700	1747.8	0	Power	30.89081	28	32	PASS
DCS1800	700	1747.8	0	PvT	-	-	-	PASS
DCS1800	700	1747.8	1	Power	29.69662	25	31	PASS
DCS1800	700	1747.8	1	PvT	-	-	-	PASS
DCS1800	700	1747.8	2	Power	27.74747	23	29	PASS
DCS1800	700	1747.8	2	PvT	-	-	-	PASS
DCS1800	700	1747.8	3	Power	25.70184	21	27	PASS
DCS1800	700	1747.8	3	PvT	-	-	-	PASS
DCS1800	700	1747.8	4	Power	23.71008	19	25	PASS


DCS1800	700	1747.8	4	PvT	-	-	-	PASS
DCS1800	700	1747.8	5	Power	21.74835	17	23	PASS
DCS1800	700	1747.8	5	PvT	-	-	-	PASS
DCS1800	700	1747.8	6	Power	19.74118	15	21	PASS
DCS1800	700	1747.8	6	PvT	-	-	-	PASS
DCS1800	700	1747.8	7	Power	17.77298	13	19	PASS
DCS1800	700	1747.8	7	PvT	-	-	-	PASS
DCS1800	700	1747.8	8	Power	15.69336	11	17	PASS
DCS1800	700	1747.8	8	PvT	-	-	-	PASS
DCS1800	700	1747.8	9	Power	13.70236	8	16	PASS
DCS1800	700	1747.8	9	PvT	-	-	-	PASS
DCS1800	700	1747.8	10	Power	11.6008	6	14	PASS
DCS1800	700	1747.8	10	PvT	-	-	-	PASS
DCS1800	700	1747.8	11	Power	9.60434	4	12	PASS
DCS1800	700	1747.8	11	PvT	-	-	-	PASS
DCS1800	700	1747.8	12	Power	7.7005	2	10	PASS
DCS1800	700	1747.8	12	PvT	-	-	-	PASS
DCS1800	700	1747.8	13	Power	5.663574	0	8	PASS
DCS1800	700	1747.8	13	PvT	-	-	-	PASS
DCS1800	700	1747.8	14	Power	3.728943	-3	7	PASS
DCS1800	700	1747.8	14	PvT	-	-	-	PASS
DCS1800	700	1747.8	15	Power	1.562195	-5	5	PASS
DCS1800	700	1747.8	15	PvT	-	-	-	PASS
DCS1800	885	1784.8	0	Power	31.03366	28	32	PASS
DCS1800	885	1784.8	0	PvT	-	-	-	PASS
DCS1800	885	1784.8	1	Power	29.89749	25	31	PASS
DCS1800	885	1784.8	1	PvT	-	-	-	PASS
DCS1800	885	1784.8	2	Power	27.92404	23	29	PASS
DCS1800	885	1784.8	2	PvT	-	-	-	PASS
DCS1800	885	1784.8	3	Power	25.89929	21	27	PASS
DCS1800	885	1784.8	3	PvT	-	-	-	PASS
DCS1800	885	1784.8	4	Power	23.88867	19	25	PASS
DCS1800	885	1784.8	4	PvT	-	-	-	PASS
DCS1800	885	1784.8	5	Power	21.85809	17	23	PASS
DCS1800	885	1784.8	5	PvT	-	-	-	PASS
DCS1800	885	1784.8	6	Power	19.86398	15	21	PASS
DCS1800	885	1784.8	6	PvT	-	-	-	PASS
DCS1800	885	1784.8	7	Power	17.90765	13	19	PASS
DCS1800	885	1784.8	7	PvT	-	-	-	PASS
DCS1800	885	1784.8	8	Power	15.86719	11	17	PASS
DCS1800	885	1784.8	8	PvT	-	-	-	PASS
DCS1800	885	1784.8	9	Power	13.75311	8	16	PASS
DCS1800	885	1784.8	9	PvT	-	-	-	PASS

DCS1800	885	1784.8	10	Power	11.63455	6	14	PASS
DCS1800	885	1784.8	10	PvT	-	-	-	PASS
DCS1800	885	1784.8	11	Power	9.55661	4	12	PASS
DCS1800	885	1784.8	11	PvT	-	-	-	PASS
DCS1800	885	1784.8	12	Power	7.940796	2	10	PASS
DCS1800	885	1784.8	12	PvT	-	-	-	PASS
DCS1800	885	1784.8	13	Power	5.892944	0	8	PASS
DCS1800	885	1784.8	13	PvT	-	-	-	PASS
DCS1800	885	1784.8	14	Power	3.953094	-3	7	PASS
DCS1800	885	1784.8	14	PvT	-	-	-	PASS
DCS1800	885	1784.8	15	Power	1.763824	-5	5	PASS
DCS1800	885	1784.8	15	PvT	-	-	-	PASS
GSM900	975	880.2	5	Power	32.35553	31	35	PASS
GSM900	975	880.2	5	PvT	-	-	-	PASS
GSM900	975	880.2	6	Power	31.56909	28	34	PASS
GSM900	975	880.2	6	PvT	-	-	-	PASS
GSM900	975	880.2	7	Power	29.54489	26	32	PASS
GSM900	975	880.2	7	PvT	-	-	-	PASS
GSM900	975	880.2	8	Power	27.48782	24	30	PASS
GSM900	975	880.2	8	PvT	-	-	-	PASS
GSM900	975	880.2	9	Power	25.4057	22	28	PASS
GSM900	975	880.2	9	PvT	-	-	-	PASS
GSM900	975	880.2	10	Power	23.44244	20	26	PASS
GSM900	975	880.2	10	PvT	-	-	-	PASS
GSM900	975	880.2	11	Power	21.74387	18	24	PASS
GSM900	975	880.2	11	PvT	-	-	-	PASS
GSM900	975	880.2	12	Power	19.71222	16	22	PASS
GSM900	975	880.2	12	PvT	-	-	-	PASS
GSM900	975	880.2	13	Power	17.78098	14	20	PASS
GSM900	975	880.2	13	PvT	-	-	-	PASS
GSM900	975	880.2	14	Power	15.69897	12	18	PASS
GSM900	975	880.2	14	PvT	-	-	-	PASS
GSM900	975	880.2	15	Power	13.61658	10	16	PASS
GSM900	975	880.2	15	PvT	-	-	-	PASS
GSM900	975	880.2	16	Power	11.56845	6	16	PASS
GSM900	975	880.2	16	PvT	-	-	-	PASS
GSM900	975	880.2	17	Power	9.593048	4	14	PASS
GSM900	975	880.2	17	PvT	-	-	-	PASS
GSM900	975	880.2	18	Power	7.620972	2	12	PASS
GSM900	975	880.2	18	PvT	-	-	-	PASS
GSM900	975	880.2	19	Power	4.381409	0	10	PASS
GSM900	975	880.2	19	PvT	-	-	-	PASS
GSM900	60	902	5	Power	32.84576	31	35	PASS

GSM900	60	902	5	PvT	-	-	-	PASS
GSM900	60	902	6	Power	32.00562	28	34	PASS
GSM900	60	902	6	PvT	-	-	-	PASS
GSM900	60	902	7	Power	29.97089	26	32	PASS
GSM900	60	902	7	PvT	-	-	-	PASS
GSM900	60	902	8	Power	27.85883	24	30	PASS
GSM900	60	902	8	PvT	-	-	-	PASS
GSM900	60	902	9	Power	25.78119	22	28	PASS
GSM900	60	902	9	PvT	-	-	-	PASS
GSM900	60	902	10	Power	23.78479	20	26	PASS
GSM900	60	902	10	PvT	-	-	-	PASS
GSM900	60	902	11	Power	21.76602	18	24	PASS
GSM900	60	902	11	PvT	-	-	-	PASS
GSM900	60	902	12	Power	19.759	16	22	PASS
GSM900	60	902	12	PvT	-	-	-	PASS
GSM900	60	902	13	Power	17.78894	14	20	PASS
GSM900	60	902	13	PvT	-	-	-	PASS
GSM900	60	902	14	Power	15.73627	12	18	PASS
GSM900	60	902	14	PvT	-	-	-	PASS
GSM900	60	902	15	Power	13.63239	10	16	PASS
GSM900	60	902	15	PvT	-	-	-	PASS
GSM900	60	902	16	Power	11.58423	6	16	PASS
GSM900	60	902	16	PvT	-	-	-	PASS
GSM900	60	902	17	Power	9.58194	4	14	PASS
GSM900	60	902	17	PvT	-	-	-	PASS
GSM900	60	902	18	Power	7.627716	2	12	PASS
GSM900	60	902	18	PvT	-	-	-	PASS
GSM900	60	902	19	Power	4.381012	0	10	PASS
GSM900	60	902	19	PvT	-	-	-	PASS
GSM900	124	914.8	5	Power	32.42648	31	35	PASS
GSM900	124	914.8	5	PvT	-	-	-	PASS
GSM900	124	914.8	6	Power	31.59598	28	34	PASS
GSM900	124	914.8	6	PvT	-	-	-	PASS
GSM900	124	914.8	7	Power	29.56213	26	32	PASS
GSM900	124	914.8	7	PvT	-	-	-	PASS
GSM900	124	914.8	8	Power	27.45517	24	30	PASS
GSM900	124	914.8	8	PvT	-	-	-	PASS
GSM900	124	914.8	9	Power	25.41388	22	28	PASS
GSM900	124	914.8	9	PvT	-	-	-	PASS
GSM900	124	914.8	10	Power	23.4097	20	26	PASS
GSM900	124	914.8	10	PvT	-	-	-	PASS
GSM900	124	914.8	11	Power	21.73407	18	24	PASS
GSM900	124	914.8	11	PvT	-	-	-	PASS

GSM900	124	914.8	12	Power	19.7673	16	22	PASS
GSM900	124	914.8	12	PvT	-	-	-	PASS
GSM900	124	914.8	13	Power	17.80206	14	20	PASS
GSM900	124	914.8	13	PvT	-	-	-	PASS
GSM900	124	914.8	14	Power	15.75623	12	18	PASS
GSM900	124	914.8	14	PvT	-	-	-	PASS
GSM900	124	914.8	15	Power	13.70578	10	16	PASS
GSM900	124	914.8	15	PvT	-	-	-	PASS
GSM900	124	914.8	16	Power	11.62097	6	16	PASS
GSM900	124	914.8	16	PvT	-	-	-	PASS
GSM900	124	914.8	17	Power	9.613861	4	14	PASS
GSM900	124	914.8	17	PvT	-	-	-	PASS
GSM900	124	914.8	18	Power	7.611267	2	12	PASS
GSM900	124	914.8	18	PvT	-	-	-	PASS
GSM900	124	914.8	19	Power	4.357117	0	10	PASS
GSM900	124	914.8	19	PvT	-	-	-	PASS


DCS1800 Channel=512 PCL=0.png

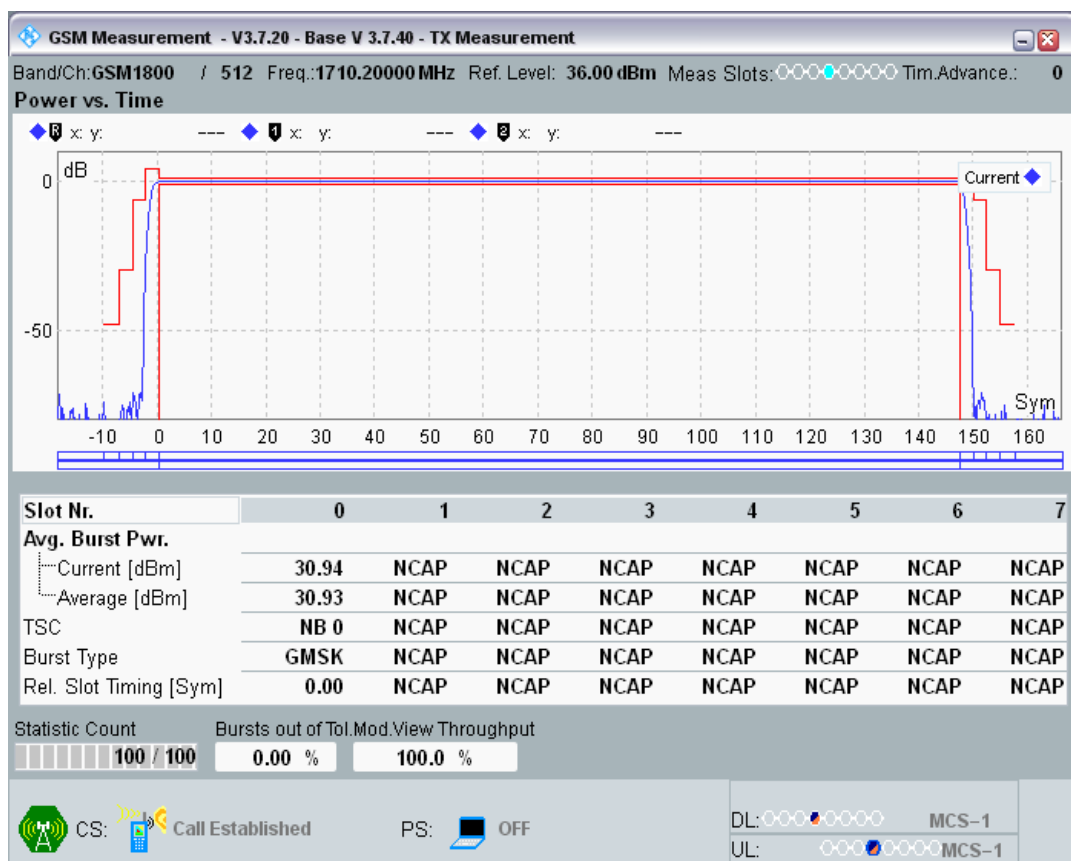


DCS1800 Channel=512 PCL=15.png




DCS1800 Channel=700 PCL=0.png

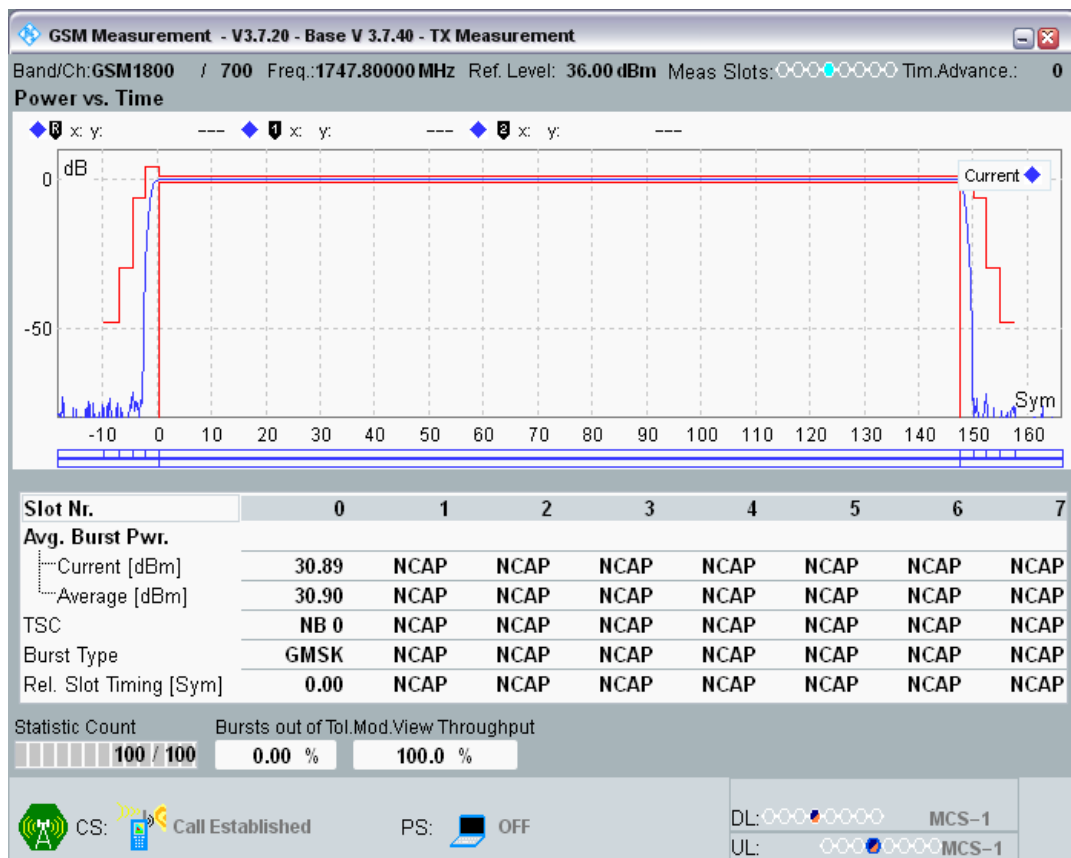

DCS1800 Channel=700 PCL=15.png

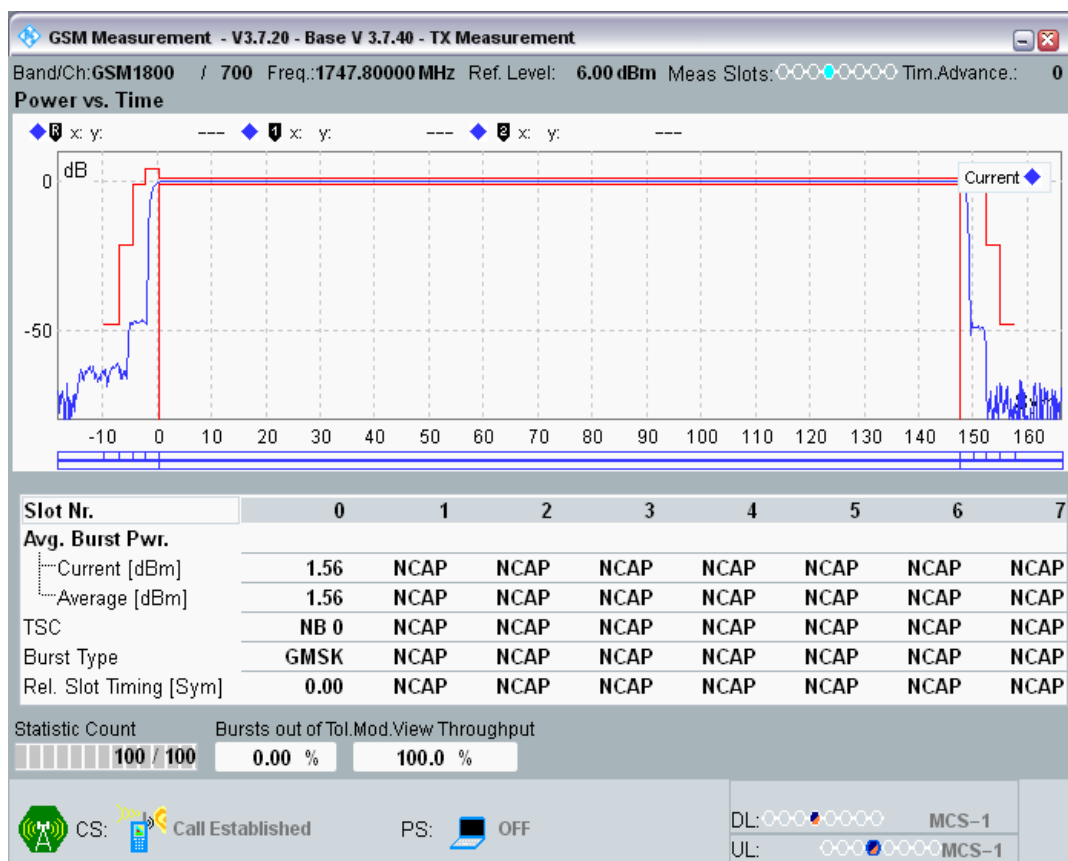


DCS1800 Channel=885 PCL=0.png

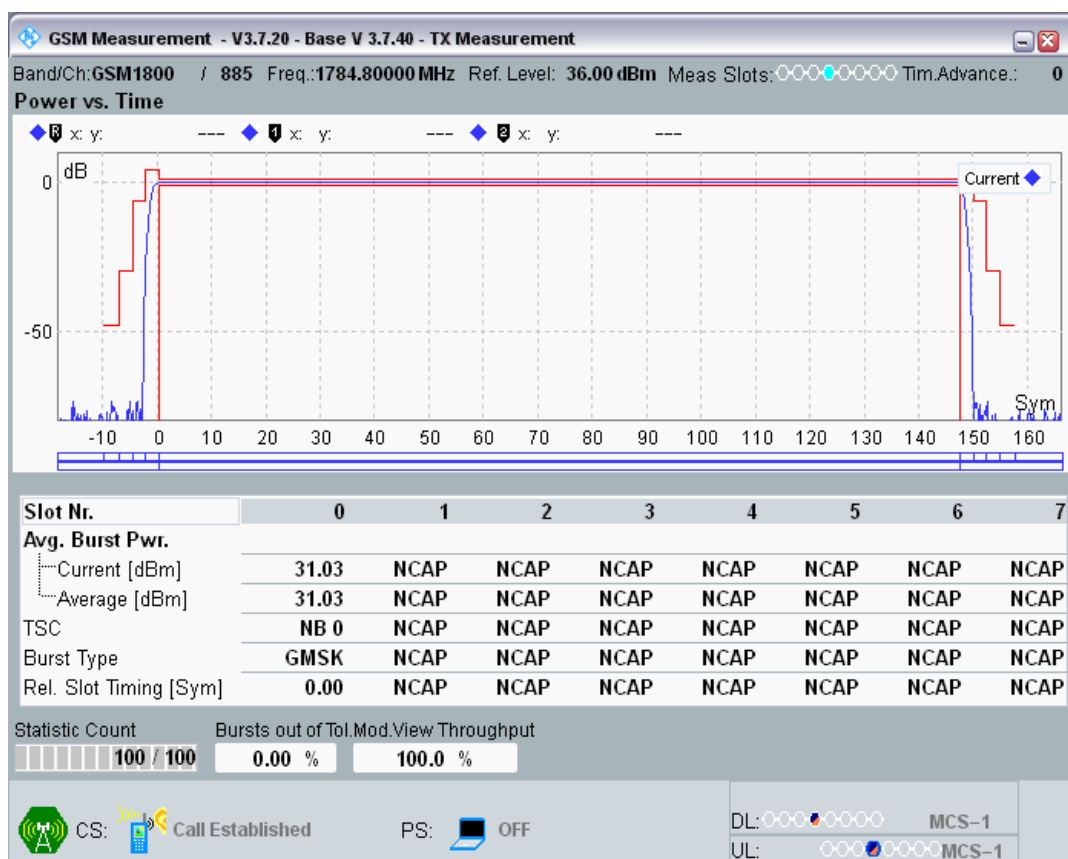

DCS1800 Channel=885 PCL=15.png



GSM900 Channel=124 PCL=19.png

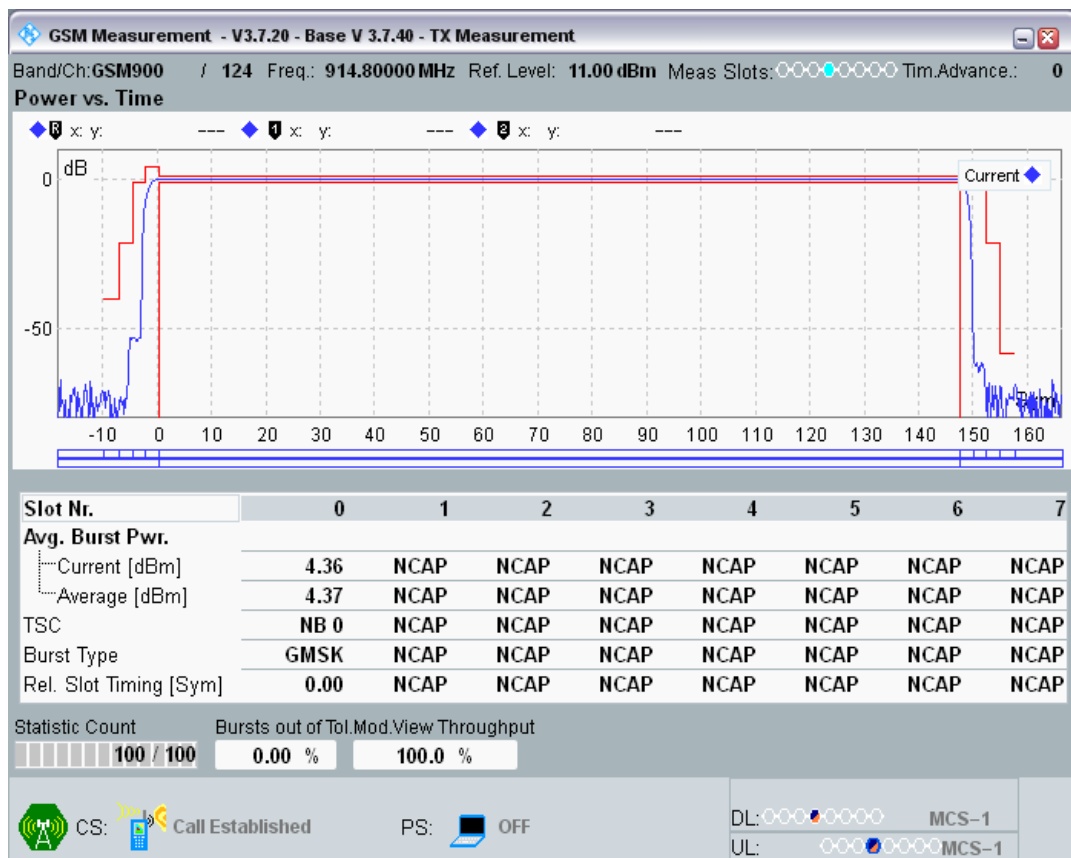

GSM900 Channel=124 PCL=5.png



GSM900 Channel=60 PCL=19.png




GSM900 Channel=60 PCL=5.png



GSM900 Channel=975 PCL=19.png



GSM900 Channel=975 PCL=5.png

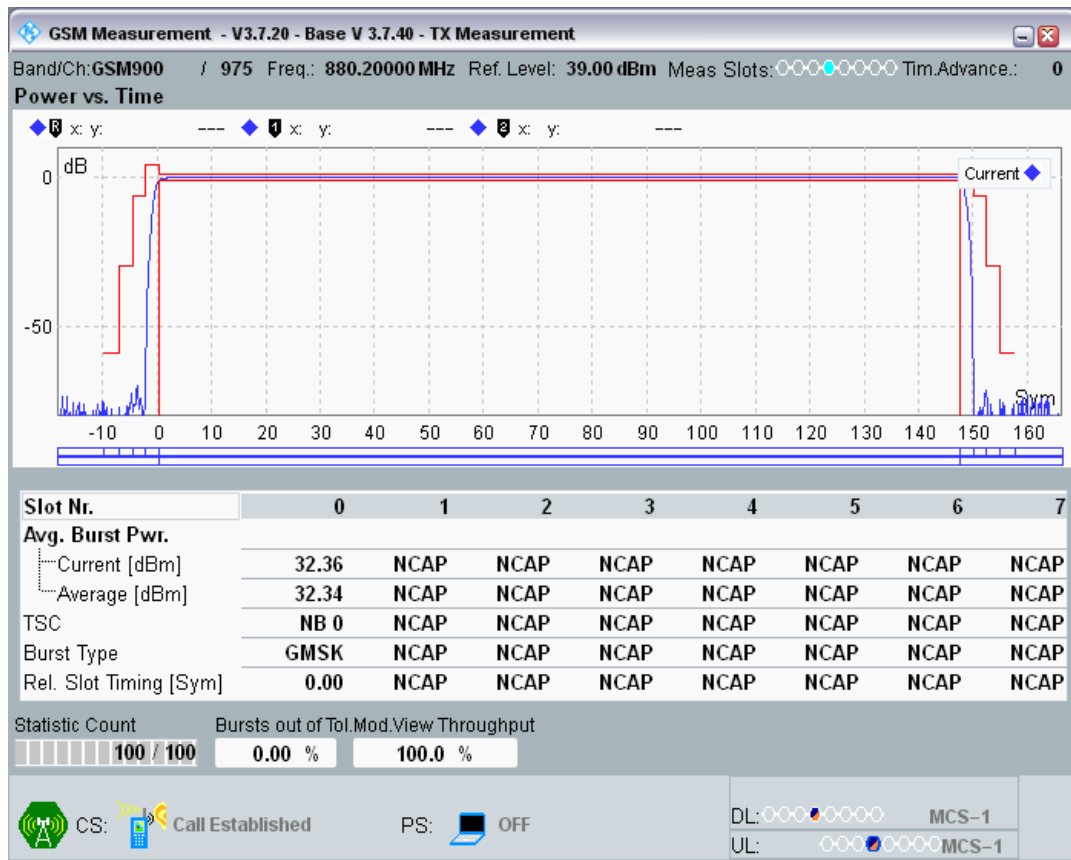

Clause 4.2.6 Transmitter-Modulation Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-80.81	-60	-57.94	-56	PASS
DCS1800	512	1710.2	0	-1600 KHz	-80.74	-60	-57.87	-56	PASS
DCS1800	512	1710.2	0	-1400 KHz	-79.64	-60	-56.77	-56	PASS
DCS1800	512	1710.2	0	-1200 KHz	-78.54	-60	-55.67	-56	PASS
DCS1800	512	1710.2	0	-1000 KHz	-76.59	-60	-53.71	-56	PASS
DCS1800	512	1710.2	0	-800 KHz	-75.72	-60	-52.85	-56	PASS
DCS1800	512	1710.2	0	-600 KHz	-73.72	-60	-50.85	-56	PASS
DCS1800	512	1710.2	0	-400 KHz	-68.48	-60	-45.61	-36	PASS
DCS1800	512	1710.2	0	-250 KHz	-40.93	-33	-18.06	-36	PASS

DCS1800	512	1710.2	0	-200 KHz	-36.65	-30	-13.78	-36	PASS
DCS1800	512	1710.2	0	-100 KHz	-8.39	0.5	14.48	-36	PASS
DCS1800	512	1710.2	0	100 KHz	-8.70	0.5	14.17	-36	PASS
DCS1800	512	1710.2	0	200 KHz	-36.41	-30	-13.54	-36	PASS
DCS1800	512	1710.2	0	250 KHz	-41.09	-33	-18.22	-36	PASS
DCS1800	512	1710.2	0	400 KHz	-68.08	-60	-45.21	-36	PASS
DCS1800	512	1710.2	0	600 KHz	-73.20	-60	-50.33	-56	PASS
DCS1800	512	1710.2	0	800 KHz	-74.88	-60	-52.01	-56	PASS
DCS1800	512	1710.2	0	1000 KHz	-75.69	-60	-52.82	-56	PASS
DCS1800	512	1710.2	0	1200 KHz	-77.96	-60	-55.09	-56	PASS
DCS1800	512	1710.2	0	1400 KHz	-79.37	-60	-56.50	-56	PASS
DCS1800	512	1710.2	0	1600 KHz	-80.44	-60	-57.57	-56	PASS
DCS1800	512	1710.2	0	1800 KHz	-80.94	-60	-58.07	-56	PASS
DCS1800	700	1747.8	0	-1800 KHz	-81.20	-60	-58.42	-56	PASS
DCS1800	700	1747.8	0	-1600 KHz	-80.53	-60	-57.74	-56	PASS
DCS1800	700	1747.8	0	-1400 KHz	-79.75	-60	-56.97	-56	PASS
DCS1800	700	1747.8	0	-1200 KHz	-78.32	-60	-55.54	-56	PASS
DCS1800	700	1747.8	0	-1000 KHz	-76.43	-60	-53.64	-56	PASS
DCS1800	700	1747.8	0	-800 KHz	-75.62	-60	-52.84	-56	PASS
DCS1800	700	1747.8	0	-600 KHz	-73.83	-60	-51.04	-56	PASS
DCS1800	700	1747.8	0	-400 KHz	-68.21	-60	-45.43	-36	PASS
DCS1800	700	1747.8	0	-250 KHz	-41.00	-33	-18.22	-36	PASS
DCS1800	700	1747.8	0	-200 KHz	-36.38	-30	-13.59	-36	PASS
DCS1800	700	1747.8	0	-100 KHz	-8.83	0.5	13.95	-36	PASS
DCS1800	700	1747.8	0	100 KHz	-8.48	0.5	14.30	-36	PASS


DCS1800	700	1747.8	0	200 KHz	-36.49	-30	-13.70	-36	PASS
DCS1800	700	1747.8	0	250 KHz	-41.06	-33	-18.28	-36	PASS
DCS1800	700	1747.8	0	400 KHz	-68.00	-60	-45.22	-36	PASS
DCS1800	700	1747.8	0	600 KHz	-73.37	-60	-50.58	-56	PASS
DCS1800	700	1747.8	0	800 KHz	-75.13	-60	-52.34	-56	PASS
DCS1800	700	1747.8	0	1000 KHz	-75.71	-60	-52.93	-56	PASS
DCS1800	700	1747.8	0	1200 KHz	-77.95	-60	-55.17	-56	PASS
DCS1800	700	1747.8	0	1400 KHz	-79.53	-60	-56.74	-56	PASS
DCS1800	700	1747.8	0	1600 KHz	-80.68	-60	-57.89	-56	PASS
DCS1800	700	1747.8	0	1800 KHz	-80.78	-60	-58.00	-56	PASS
DCS1800	885	1784.8	0	-1800 KHz	-81.01	-60	-58.06	-56	PASS
DCS1800	885	1784.8	0	-1600 KHz	-80.41	-60	-57.46	-56	PASS
DCS1800	885	1784.8	0	-1400 KHz	-79.78	-60	-56.83	-56	PASS
DCS1800	885	1784.8	0	-1200 KHz	-78.81	-60	-55.87	-56	PASS
DCS1800	885	1784.8	0	-1000 KHz	-76.87	-60	-53.92	-56	PASS
DCS1800	885	1784.8	0	-800 KHz	-75.50	-60	-52.55	-56	PASS
DCS1800	885	1784.8	0	-600 KHz	-73.56	-60	-50.62	-56	PASS
DCS1800	885	1784.8	0	-400 KHz	-68.14	-60	-45.20	-36	PASS
DCS1800	885	1784.8	0	-250 KHz	-41.29	-33	-18.34	-36	PASS
DCS1800	885	1784.8	0	-200 KHz	-36.32	-30	-13.37	-36	PASS
DCS1800	885	1784.8	0	-100 KHz	-8.44	0.5	14.51	-36	PASS
DCS1800	885	1784.8	0	100 KHz	-8.62	0.5	14.33	-36	PASS
DCS1800	885	1784.8	0	200 KHz	-36.32	-30	-13.38	-36	PASS
DCS1800	885	1784.8	0	250 KHz	-40.91	-33	-17.97	-36	PASS
DCS1800	885	1784.8	0	400 KHz	-68.13	-60	-45.18	-36	PASS
DCS1800	885	1784.8	0	600 KHz	-73.41	-60	-50.46	-56	PASS
DCS1800	885	1784.8	0	800 KHz	-75.07	-60	-52.12	-56	PASS

DCS1800	885	1784.8	0	1000 KHz	-75.78	-60	-52.83	-56	PASS
DCS1800	885	1784.8	0	1200 KHz	-78.20	-60	-55.25	-56	PASS
DCS1800	885	1784.8	0	1400 KHz	-79.57	-60	-56.62	-56	PASS
DCS1800	885	1784.8	0	1600 KHz	-80.54	-60	-57.59	-56	PASS
DCS1800	885	1784.8	0	1800 KHz	-81.02	-60	-58.07	-56	PASS
GSM900	975	880.2	5	-1800 KHz	-80.93	-60	-56.62	-51	PASS
GSM900	975	880.2	5	-1600 KHz	-81.10	-60	-56.80	-51	PASS
GSM900	975	880.2	5	-1400 KHz	-80.11	-60	-55.81	-51	PASS
GSM900	975	880.2	5	-1200 KHz	-78.54	-60	-54.23	-51	PASS
GSM900	975	880.2	5	-1000 KHz	-76.19	-60	-51.88	-51	PASS
GSM900	975	880.2	5	-800 KHz	-75.90	-60	-51.60	-51	PASS
GSM900	975	880.2	5	-600 KHz	-74.89	-60	-50.58	-51	PASS
GSM900	975	880.2	5	-400 KHz	-69.98	-60	-45.67	-36	PASS
GSM900	975	880.2	5	-250 KHz	-41.30	-33	-16.99	-36	PASS
GSM900	975	880.2	5	-200 KHz	-36.53	-30	-12.23	-36	PASS
GSM900	975	880.2	5	-100 KHz	-8.50	0.5	15.80	-36	PASS
GSM900	975	880.2	5	100 KHz	-8.69	0.5	15.62	-36	PASS
GSM900	975	880.2	5	200 KHz	-36.70	-30	-12.39	-36	PASS
GSM900	975	880.2	5	250 KHz	-41.06	-33	-16.76	-36	PASS
GSM900	975	880.2	5	400 KHz	-69.94	-60	-45.64	-36	PASS
GSM900	975	880.2	5	600 KHz	-74.41	-60	-50.11	-51	PASS
GSM900	975	880.2	5	800 KHz	-75.71	-60	-51.40	-51	PASS
GSM900	975	880.2	5	1000 KHz	-75.82	-60	-51.51	-51	PASS
GSM900	975	880.2	5	1200 KHz	-78.31	-60	-54.00	-51	PASS
GSM900	975	880.2	5	1400 KHz	-79.65	-60	-55.34	-51	PASS


				KHz					
GSM900	975	880.2	5	1600 KHz	-80.91	-60	-56.60	-51	PASS
GSM900	975	880.2	5	1800 KHz	-81.13	-60	-56.83	-51	PASS
GSM900	60	902	5	-1800 KHz	-81.87	-60	-56.97	-51	PASS
GSM900	60	902	5	-1600 KHz	-81.31	-60	-56.41	-51	PASS
GSM900	60	902	5	-1400 KHz	-80.25	-60	-55.36	-51	PASS
GSM900	60	902	5	-1200 KHz	-78.68	-60	-53.79	-51	PASS
GSM900	60	902	5	-1000 KHz	-76.05	-60	-51.16	-51	PASS
GSM900	60	902	5	-800 KHz	-75.74	-60	-50.84	-51	PASS
GSM900	60	902	5	-600 KHz	-74.76	-60	-49.86	-51	PASS
GSM900	60	902	5	-400 KHz	-70.15	-60	-45.25	-36	PASS
GSM900	60	902	5	-250 KHz	-41.17	-33	-16.27	-36	PASS
GSM900	60	902	5	-200 KHz	-36.44	-30	-11.54	-36	PASS
GSM900	60	902	5	-100 KHz	-8.47	0.5	16.43	-36	PASS
GSM900	60	902	5	100 KHz	-8.58	0.5	16.31	-36	PASS
GSM900	60	902	5	200 KHz	-36.74	-30	-11.84	-36	PASS
GSM900	60	902	5	250 KHz	-40.71	-33	-15.82	-36	PASS
GSM900	60	902	5	400 KHz	-69.44	-60	-44.54	-36	PASS
GSM900	60	902	5	600 KHz	-73.73	-60	-48.83	-51	PASS
GSM900	60	902	5	800 KHz	-74.95	-60	-50.05	-51	PASS
GSM900	60	902	5	1000 KHz	-75.51	-60	-50.61	-51	PASS
GSM900	60	902	5	1200 KHz	-78.39	-60	-53.50	-51	PASS
GSM900	60	902	5	1400 KHz	-80.23	-60	-55.33	-51	PASS
GSM900	60	902	5	1600 KHz	-81.21	-60	-56.31	-51	PASS
GSM900	60	902	5	1800 KHz	-81.74	-60	-56.85	-51	PASS

GSM900	124	914.8	5	-1800 KHz	-80.28	-60	-55.86	-51	PASS
GSM900	124	914.8	5	-1600 KHz	-81.66	-60	-57.24	-51	PASS
GSM900	124	914.8	5	-1400 KHz	-80.48	-60	-56.06	-51	PASS
GSM900	124	914.8	5	-1200 KHz	-78.75	-60	-54.33	-51	PASS
GSM900	124	914.8	5	-1000 KHz	-76.18	-60	-51.76	-51	PASS
GSM900	124	914.8	5	-800 KHz	-76.03	-60	-51.61	-51	PASS
GSM900	124	914.8	5	-600 KHz	-74.91	-60	-50.49	-51	PASS
GSM900	124	914.8	5	-400 KHz	-69.96	-60	-45.54	-36	PASS
GSM900	124	914.8	5	-250 KHz	-41.03	-33	-16.61	-36	PASS
GSM900	124	914.8	5	-200 KHz	-36.32	-30	-11.90	-36	PASS
GSM900	124	914.8	5	-100 KHz	-8.65	0.5	15.77	-36	PASS
GSM900	124	914.8	5	100 KHz	-8.42	0.5	16.00	-36	PASS
GSM900	124	914.8	5	200 KHz	-36.54	-30	-12.12	-36	PASS
GSM900	124	914.8	5	250 KHz	-40.71	-33	-16.29	-36	PASS
GSM900	124	914.8	5	400 KHz	-69.82	-60	-45.40	-36	PASS
GSM900	124	914.8	5	600 KHz	-74.27	-60	-49.84	-51	PASS
GSM900	124	914.8	5	800 KHz	-75.48	-60	-51.06	-51	PASS
GSM900	124	914.8	5	1000 KHz	-76.09	-60	-51.67	-51	PASS
GSM900	124	914.8	5	1200 KHz	-78.71	-60	-54.29	-51	PASS
GSM900	124	914.8	5	1400 KHz	-79.79	-60	-55.37	-51	PASS
GSM900	124	914.8	5	1600 KHz	-81.51	-60	-57.09	-51	PASS
GSM900	124	914.8	5	1800 KHz	-80.56	-60	-56.14	-51	PASS


DCS1800 Channel=512 PCL=0.png

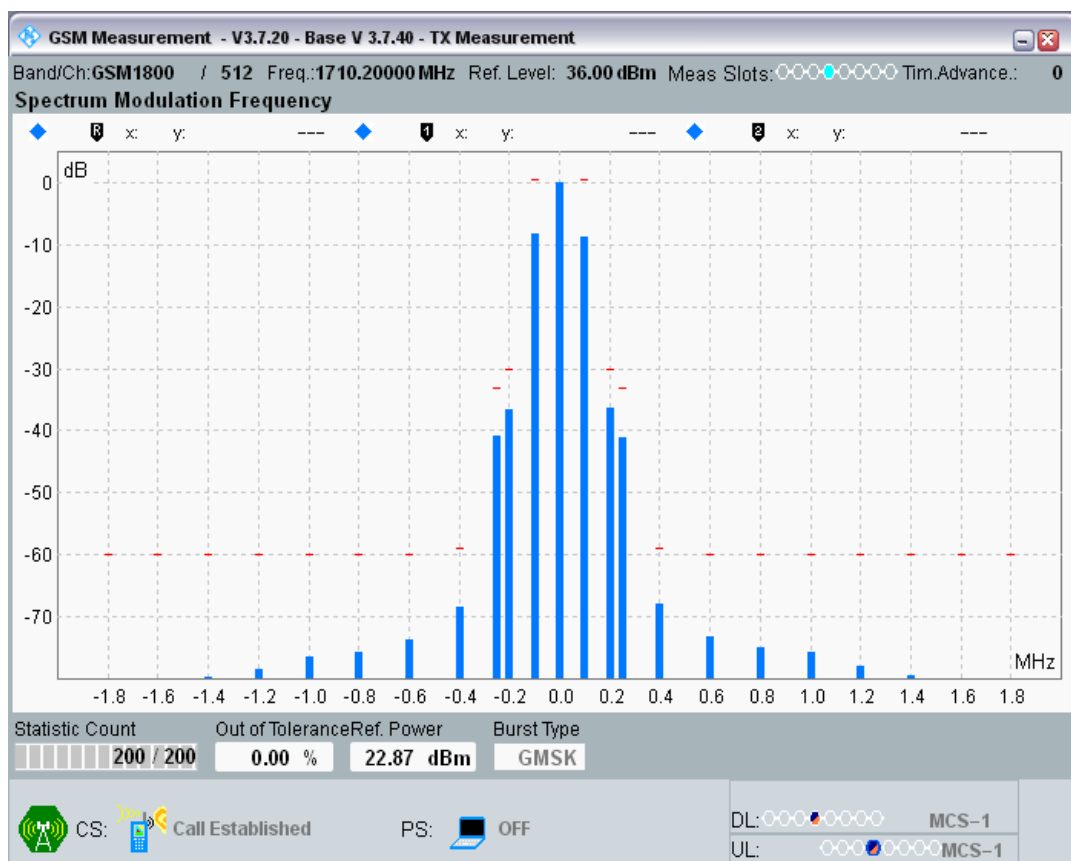


DCS1800 Channel=700 PCL=0.png

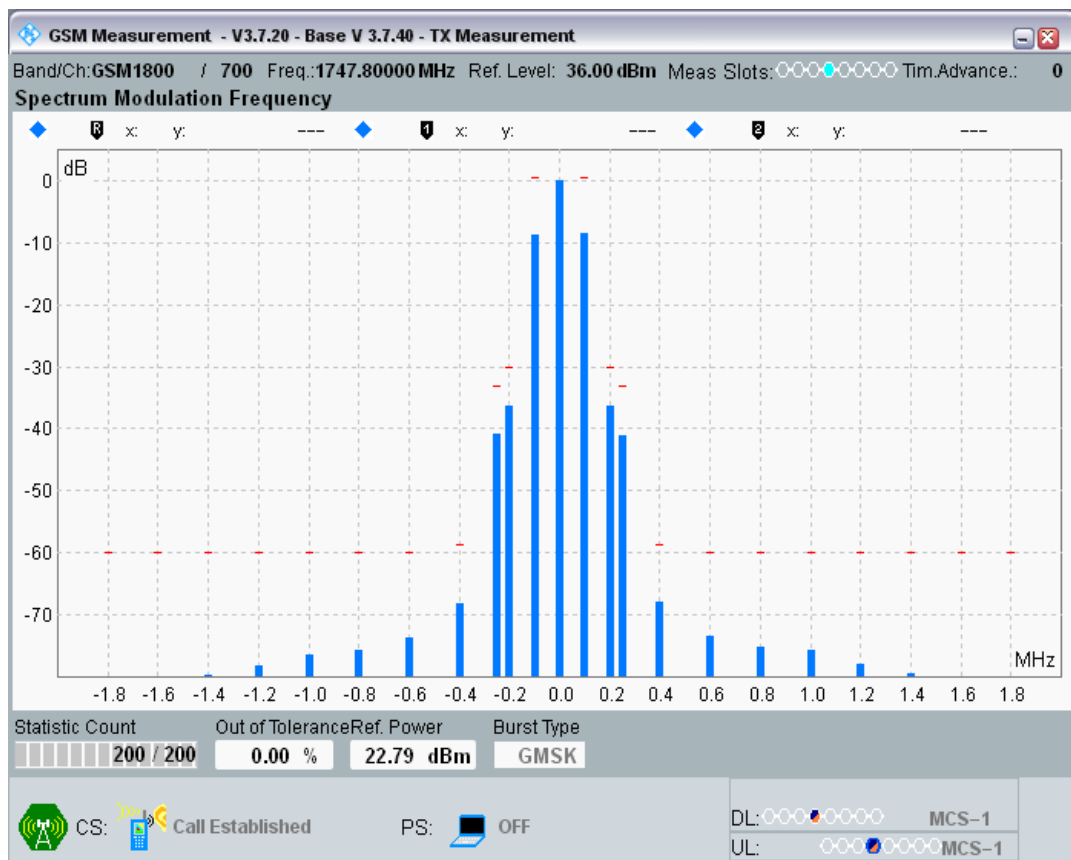


DCS1800 Channel=885 PCL=0.png

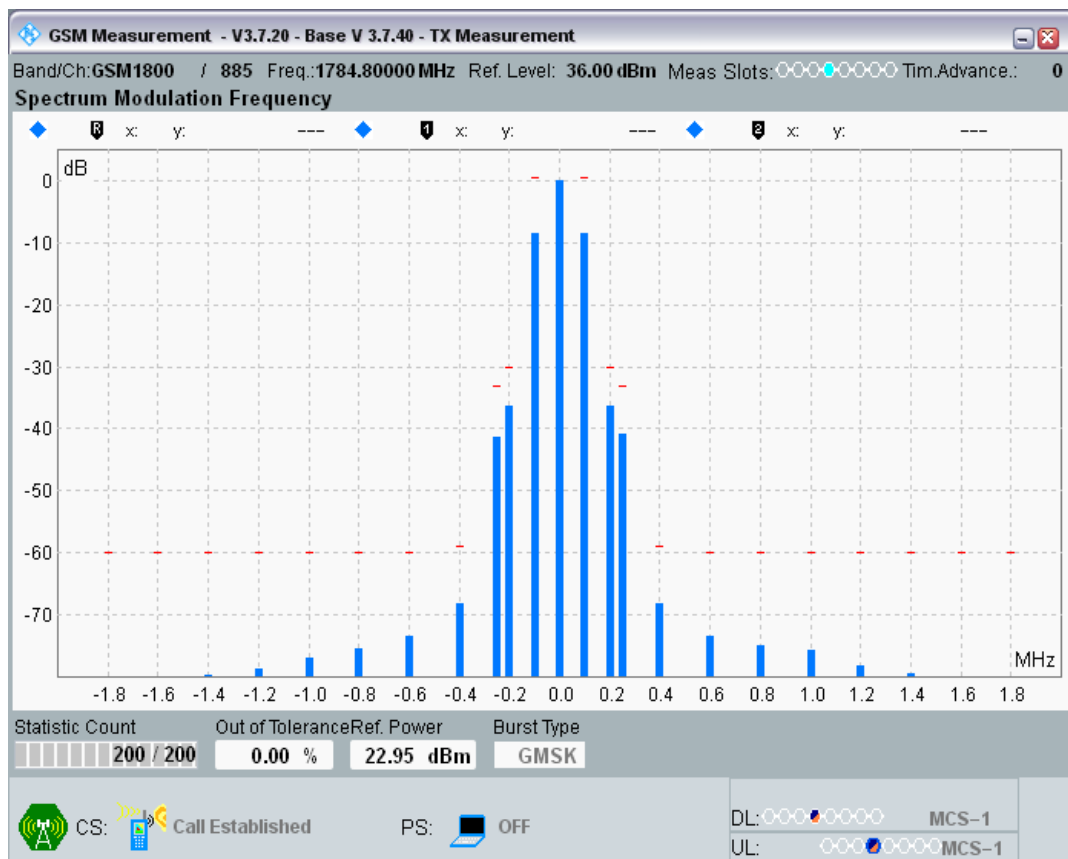


GSM900 Channel=124 PCL=5.png

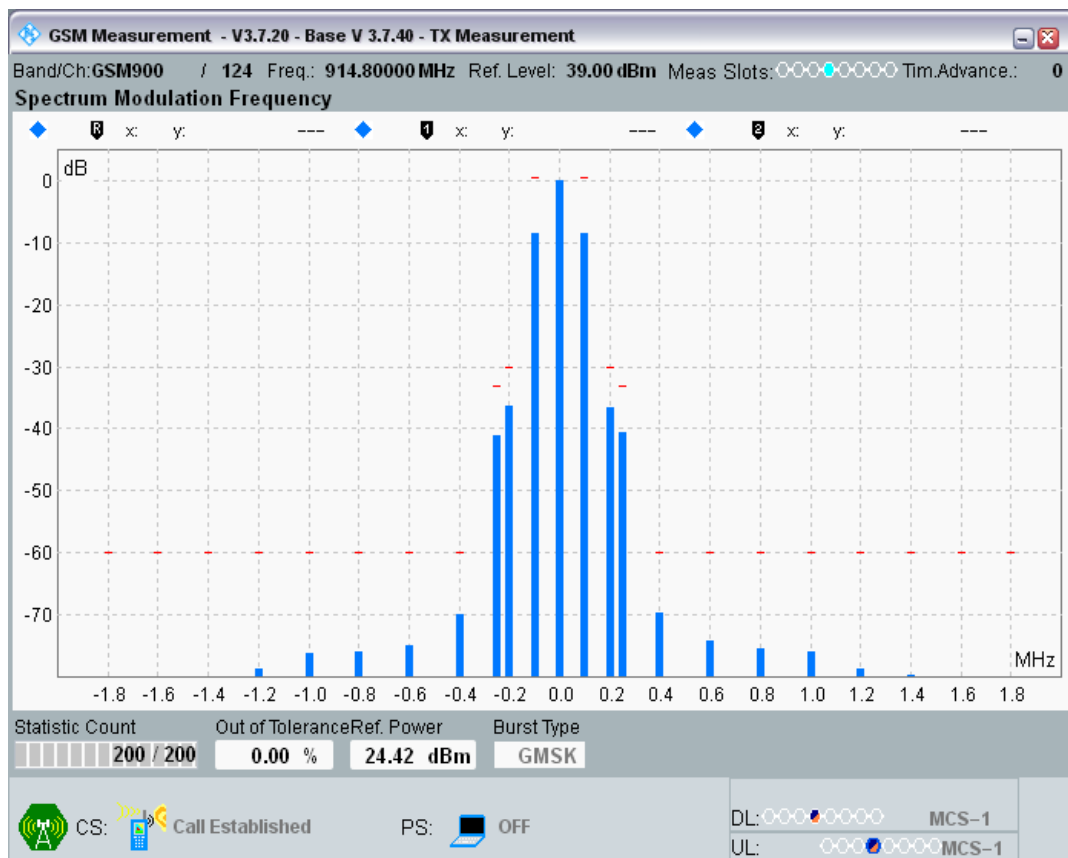

GSM900 Channel=60 PCL=5.png

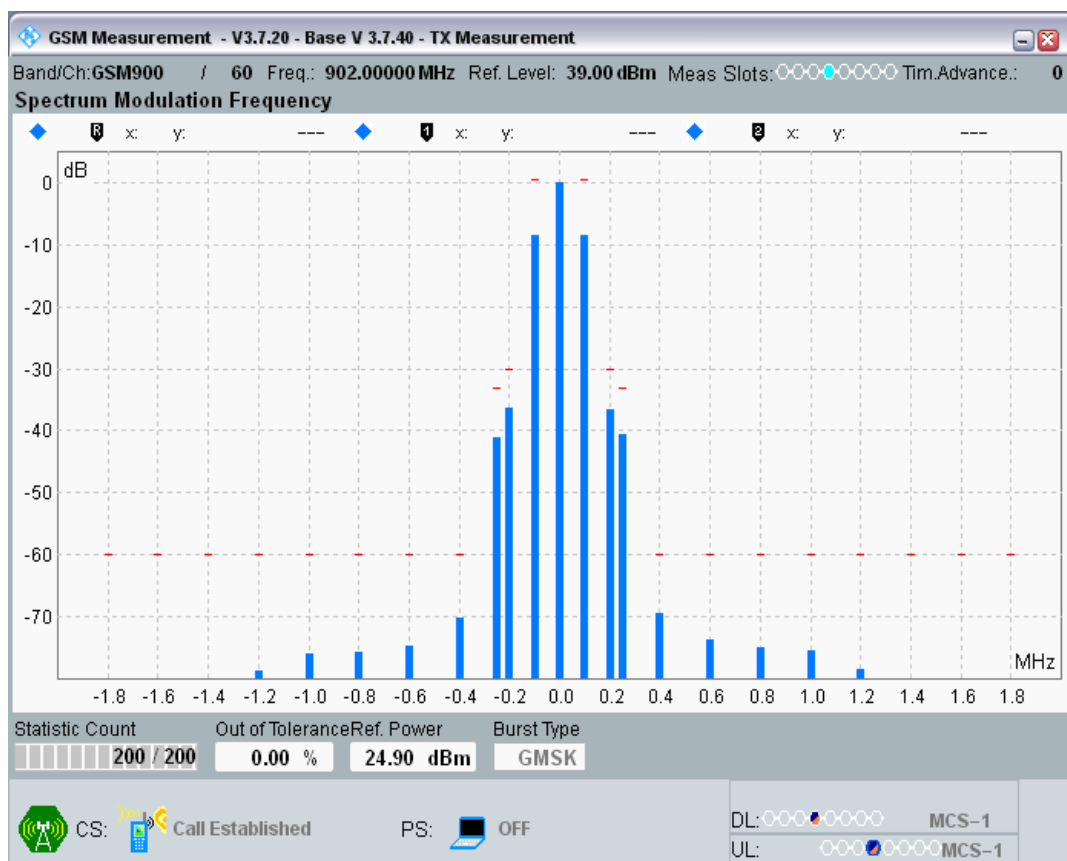

GSM900 Channel=975 PCL=5.png

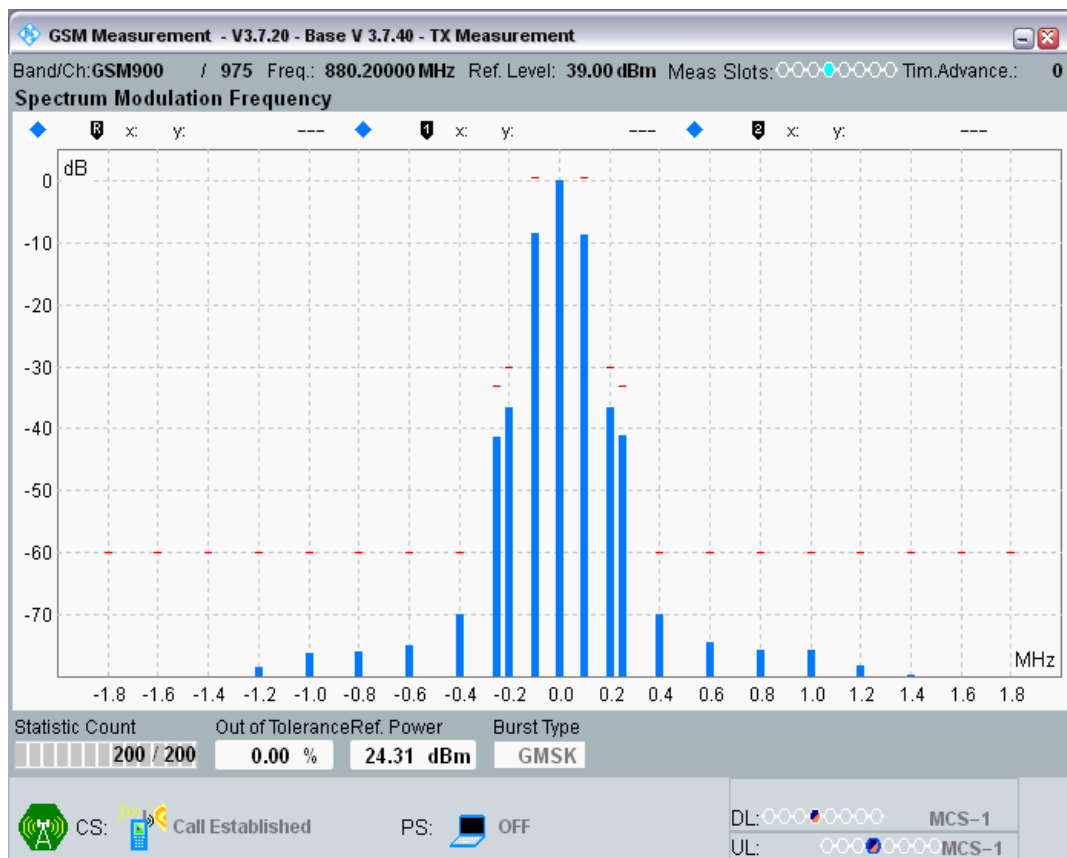


Clause 4.2.6 Transmitter-Switching Spectrum


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-44.74	-27	PASS
DCS1800	512	1710.2	0	-1200 KHz	-40.66	-24	PASS
DCS1800	512	1710.2	0	-600 KHz	-35.93	-24	PASS
DCS1800	512	1710.2	0	-400 KHz	-30.98	-22	PASS
DCS1800	512	1710.2	0	400 KHz	-30.12	-22	PASS
DCS1800	512	1710.2	0	600 KHz	-34.19	-24	PASS
DCS1800	512	1710.2	0	1200 KHz	-39.12	-24	PASS
DCS1800	512	1710.2	0	1800 KHz	-42.39	-27	PASS
DCS1800	700	1747.8	0	-1800 KHz	-44.39	-27	PASS
DCS1800	700	1747.8	0	-1200 KHz	-41.12	-24	PASS
DCS1800	700	1747.8	0	-600 KHz	-36.17	-24	PASS
DCS1800	700	1747.8	0	-400 KHz	-29.90	-22	PASS
DCS1800	700	1747.8	0	400 KHz	-29.01	-22	PASS
DCS1800	700	1747.8	0	600 KHz	-34.33	-24	PASS
DCS1800	700	1747.8	0	1200 KHz	-39.33	-24	PASS
DCS1800	700	1747.8	0	1800 KHz	-42.96	-27	PASS
DCS1800	885	1784.8	0	-1800 KHz	-42.03	-27	PASS
DCS1800	885	1784.8	0	-1200 KHz	-41.44	-24	PASS
DCS1800	885	1784.8	0	-600 KHz	-36.22	-24	PASS
DCS1800	885	1784.8	0	-400 KHz	-31.05	-22	PASS
DCS1800	885	1784.8	0	400 KHz	-28.52	-22	PASS
DCS1800	885	1784.8	0	600 KHz	-34.21	-24	PASS
DCS1800	885	1784.8	0	1200 KHz	-40.24	-24	PASS
DCS1800	885	1784.8	0	1800 KHz	-43.17	-27	PASS
GSM900	975	880.2	5	-1800 KHz	-42.39	-24	PASS
GSM900	975	880.2	5	-1200 KHz	-38.97	-21	PASS
GSM900	975	880.2	5	-600 KHz	-34.18	-21	PASS
GSM900	975	880.2	5	-400 KHz	-31.62	-19	PASS
GSM900	975	880.2	5	400 KHz	-30.19	-19	PASS
GSM900	975	880.2	5	600 KHz	-33.07	-21	PASS
GSM900	975	880.2	5	1200 KHz	-39.06	-21	PASS
GSM900	975	880.2	5	1800 KHz	-41.64	-24	PASS
GSM900	60	902	5	-1800 KHz	-41.47	-24	PASS
GSM900	60	902	5	-1200 KHz	-38.61	-21	PASS
GSM900	60	902	5	-600 KHz	-33.59	-21	PASS
GSM900	60	902	5	-400 KHz	-31.50	-19	PASS
GSM900	60	902	5	400 KHz	-28.91	-19	PASS
GSM900	60	902	5	600 KHz	-33.16	-21	PASS
GSM900	60	902	5	1200 KHz	-38.37	-21	PASS
GSM900	60	902	5	1800 KHz	-41.26	-24	PASS
GSM900	124	914.8	5	-1800 KHz	-41.79	-24	PASS

GSM900	124	914.8	5	-1200 KHz	-38.73	-21	PASS
GSM900	124	914.8	5	-600 KHz	-34.23	-21	PASS
GSM900	124	914.8	5	-400 KHz	-31.42	-19	PASS
GSM900	124	914.8	5	400 KHz	-30.33	-19	PASS
GSM900	124	914.8	5	600 KHz	-33.32	-21	PASS
GSM900	124	914.8	5	1200 KHz	-38.36	-21	PASS
GSM900	124	914.8	5	1800 KHz	-42.18	-24	PASS


DCS1800 Channel=512 PCL=0.png

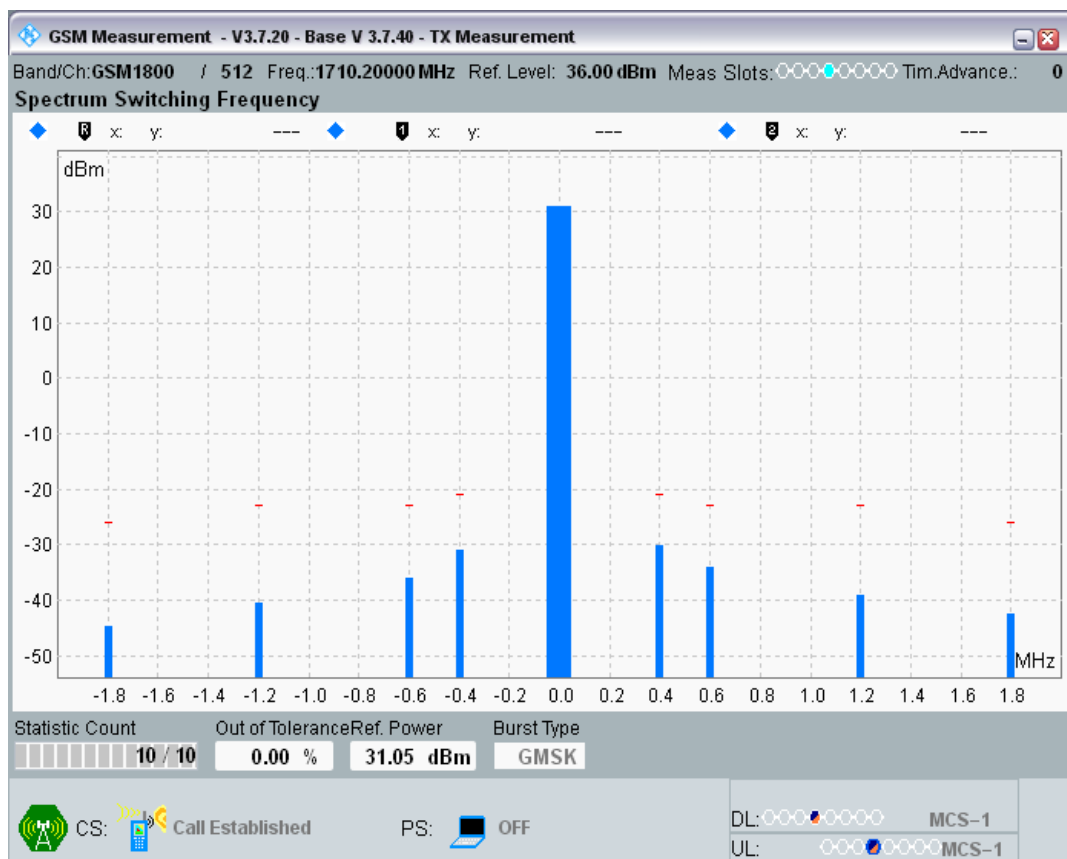


DCS1800 Channel=700 PCL=0.png

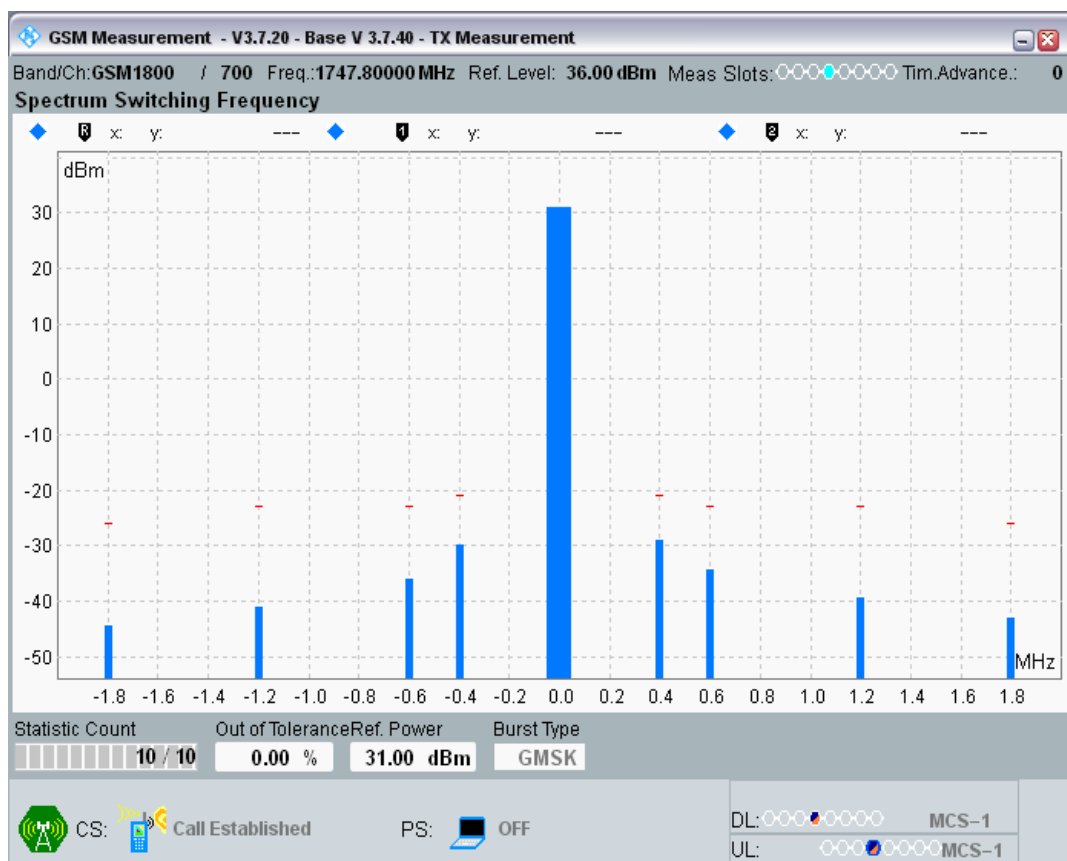


DCS1800 Channel=885 PCL=0.png

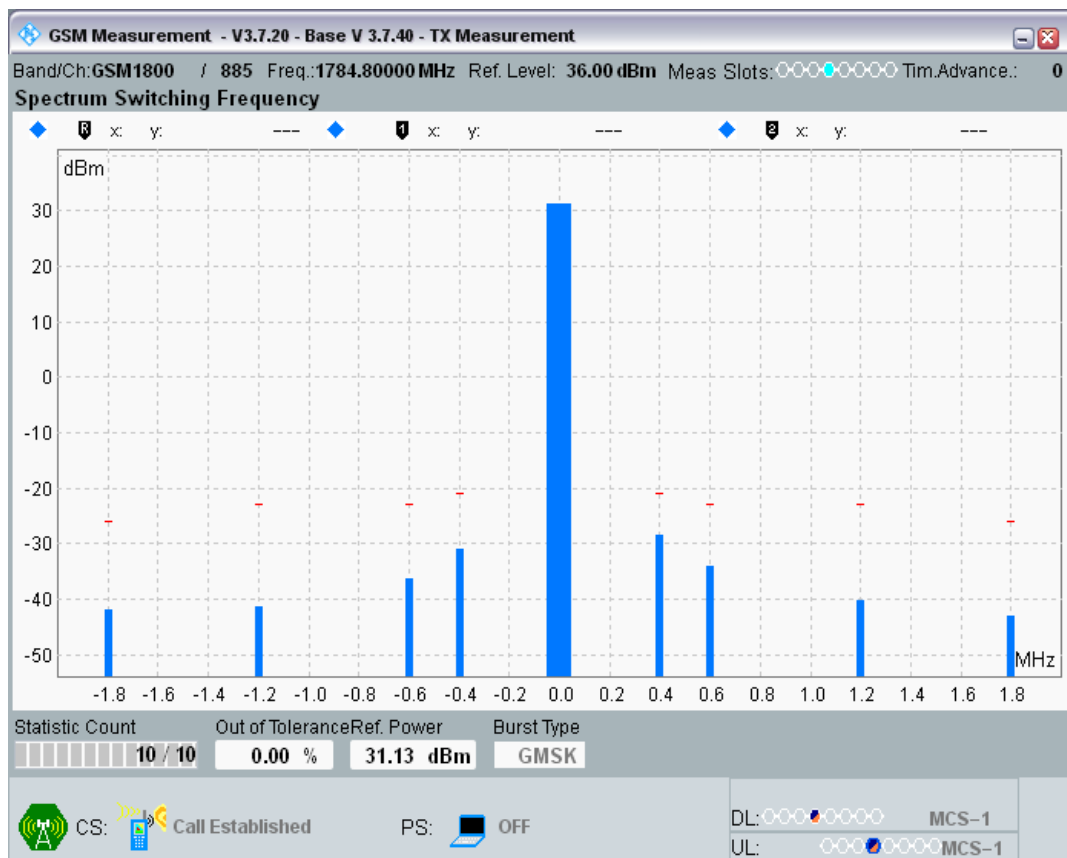

GSM900 Channel=124 PCL=5.png

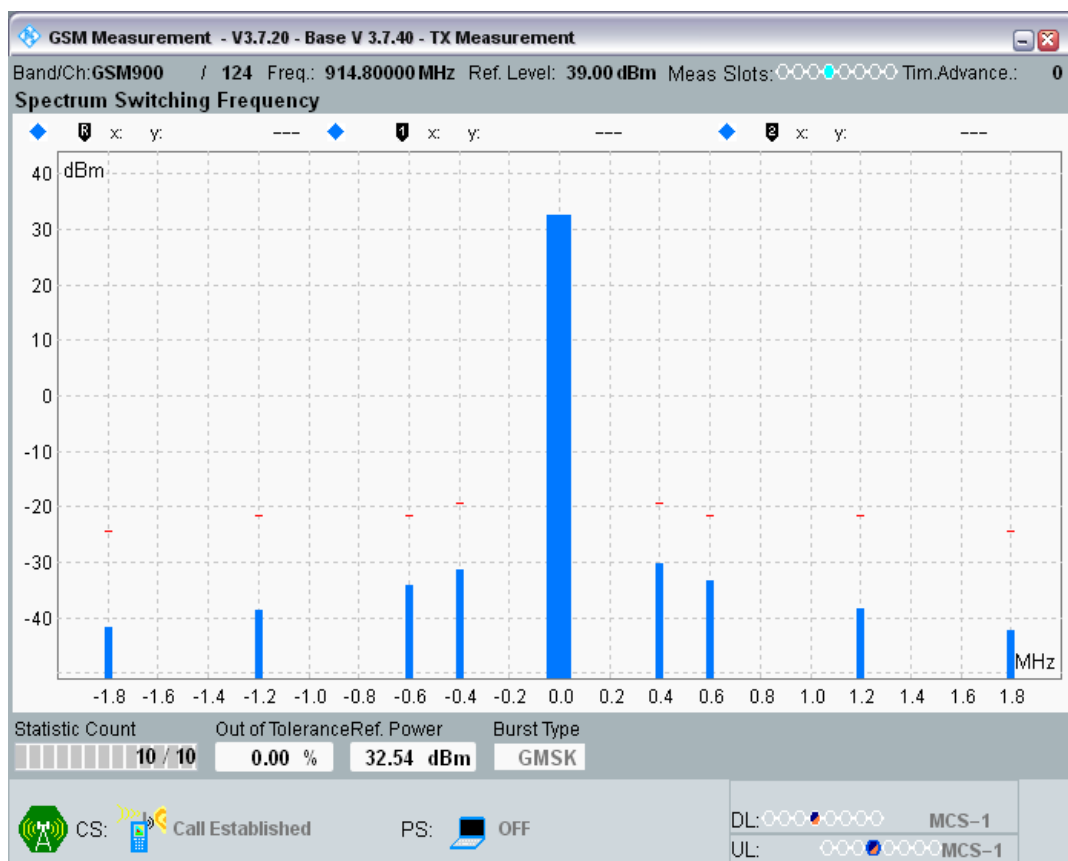

GSM900 Channel=60 PCL=5.png

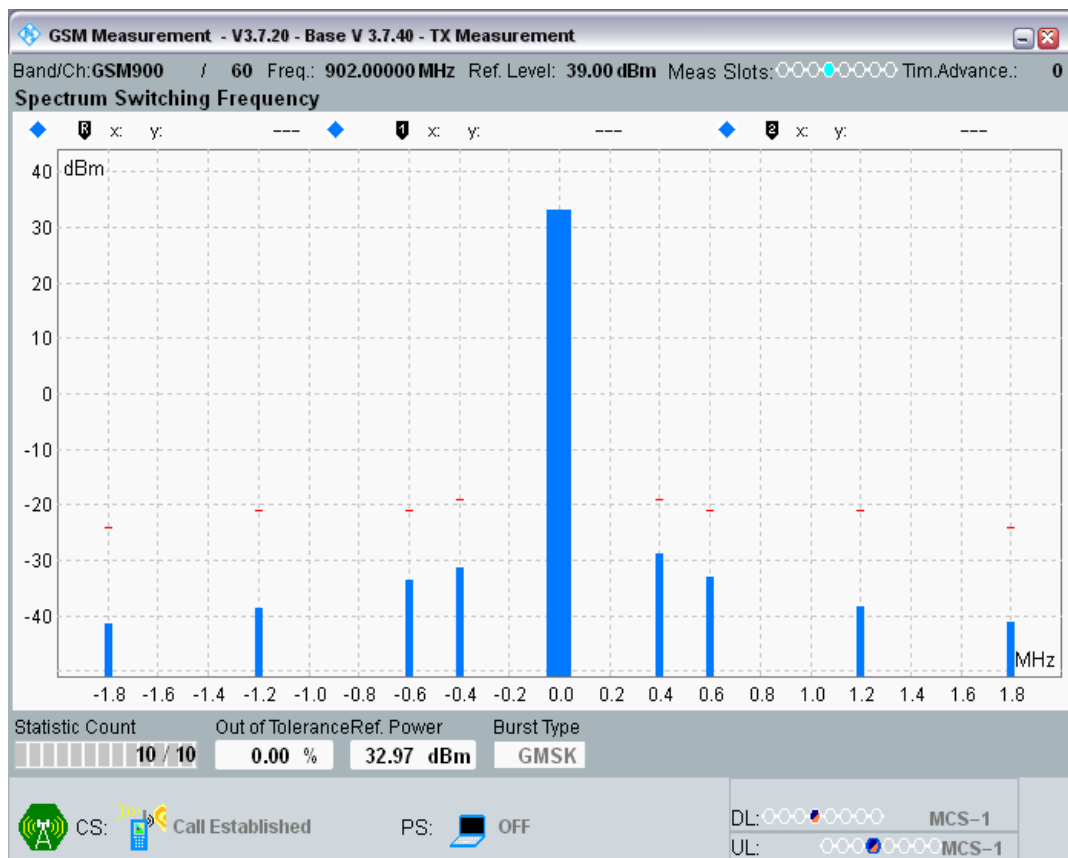

GSM900 Channel=975 PCL=5.png




Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur (MHz)	Freq	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.14		-78.70	-36	PASS
DCS1800	700	1747.8	0	50MHz - 500MHz	100	391.1		-81.24	-36	PASS
DCS1800	700	1747.8	0	500MHz - 1000MHz	3000	867		-64.47	-36	PASS
DCS1800	700	1747.8	0	1000MHz - 1680MHz	3000	1667.76		-45.89	-30	PASS
DCS1800	700	1747.8	0	1680MHz - 1690MHz	1000	1683.5		-48.56	-30	PASS
DCS1800	700	1747.8	0	1690MHz - 1700MHz	300	1693.25		-58.14	-30	PASS
DCS1800	700	1747.8	0	1700MHz - 1710MHz	100	1709.22		-76.03	-30	PASS
DCS1800	700	1747.8	0	1785MHz - 1795MHz	100	1791.45		-75.74	-30	PASS
DCS1800	700	1747.8	0	1795MHz - 1805MHz	300	1796.45		-71.62	-30	PASS
DCS1800	700	1747.8	0	1800MHz - 4000MHz	3000	3496.2		-43.64	-30	PASS

DCS1800	700	1747.8	0	4000MHz - 12750MHz	3000	5242.283951	-46.52	-30	PASS
DCS1800	700	1747.8	0	1710MHz - 1741.8MHz	100	1741.5456	-45.75	-30	PASS
DCS1800	700	1747.8	0	1741.8MHz - 1746MHz	30	1745.8236	-46.42	-30	PASS
DCS1800	700	1747.8	0	1749.6MHz - 1753.8MHz	30	1750.5912	-47.04	-30	PASS
DCS1800	700	1747.8	0	1753.8MHz - 1785MHz	100	1753.9872	-44.57	-30	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11	-92.69	-36	PASS
GSM900	60	902	5	50MHz - 500MHz	100	373.8	-82.17	-36	PASS
GSM900	60	902	5	500MHz - 850MHz	3000	832.15	-50.03	-36	PASS
GSM900	60	902	5	850MHz - 860MHz	1000	857.47	-56.17	-36	PASS
GSM900	60	902	5	860MHz - 870MHz	300	861.35	-64.98	-30	PASS
GSM900	60	902	5	870MHz - 880MHz	100	872.03	-77.87	-36	PASS
GSM900	60	902	5	915MHz - 925MHz	100	921.53	-90.42	-36	PASS
GSM900	60	902	5	960MHz - 1000MHz	3000	964.4	-49.54	-36	PASS
GSM900	60	902	5	1000MHz - 2000MHz	3000	1804	-59.05	-30	PASS
GSM900	60	902	5	2000MHz - 12750MHz	3000	2705.065587	-44.44	-30	PASS
GSM900	60	902	5	880MHz - 896MHz	100	886.88	-54.59	-36	PASS
GSM900	60	902	5	896MHz - 900.2MHz	30	899.801	-44.55	-36	PASS
GSM900	60	902	5	903.8MHz - 908MHz	30	904.2074	-45.29	-36	PASS
GSM900	60	902	5	908MHz - 915MHz	100	914.615	-53.70	-36	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

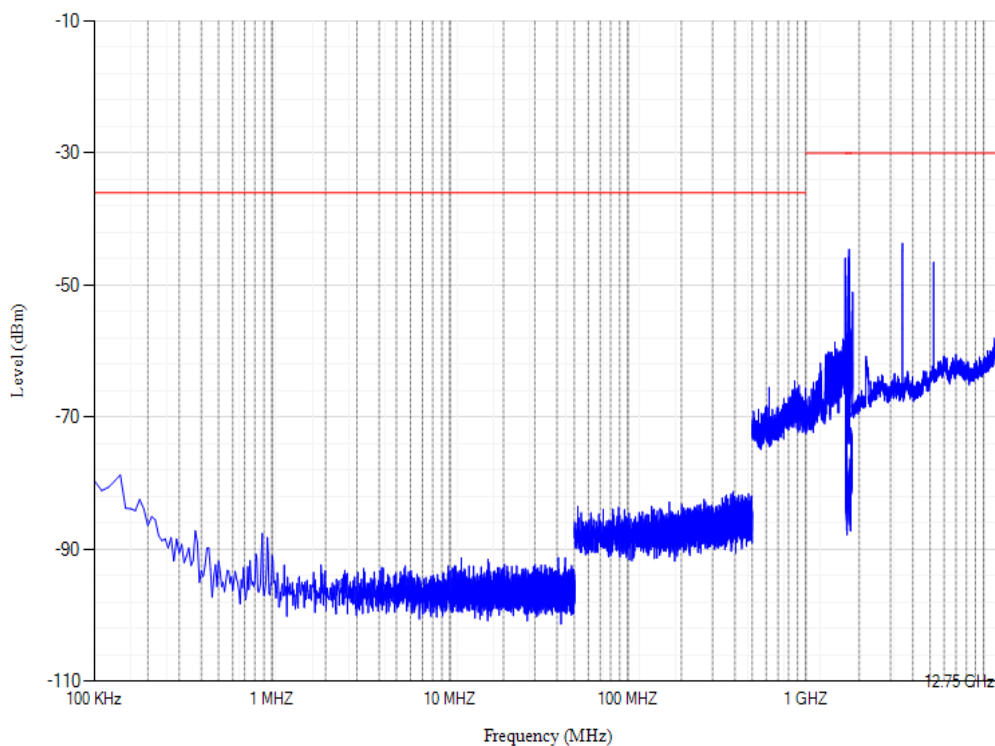

GSM900 Channel=60 PCL=5.png

Conducted spurious emissions

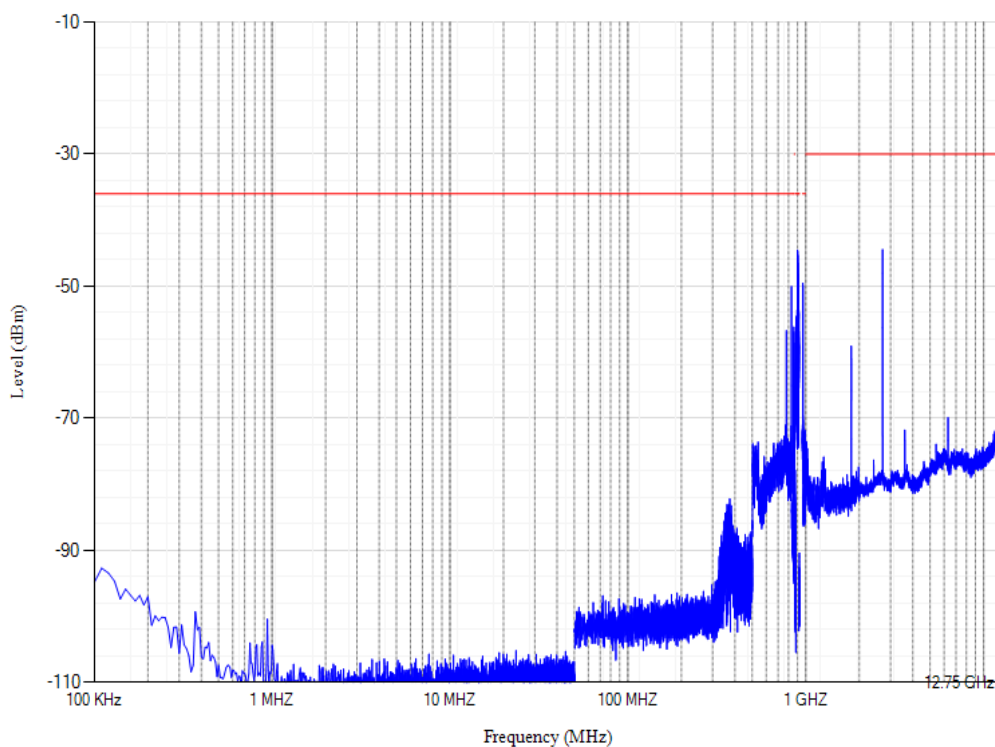


Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.12	-76.34	-57	PASS
DCS1800	700	1747.8	0	50MHz - 880MHz	100	874.9	-77.34	-57	PASS
DCS1800	700	1747.8	0	880MHz - 915MHz	100	882.415	-77.14	-59	PASS
DCS1800	700	1747.8	0	915MHz - 1000MHz	100	947.81	-78.90	-57	PASS
DCS1800	700	1747.8	0	1000MHz - 1710MHz	100	1401.8	-76.07	-47	PASS
DCS1800	700	1747.8	0	1710MHz - 1785MHz	100	1771.425	-76.07	-53	PASS
DCS1800	700	1747.8	0	1785MHz - 12750MHz	100	12523.0245	-68.65	-47	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.13	-79.92	-57	PASS
GSM900	60	902	5	50MHz - 880MHz	100	833.1	-70.62	-57	PASS
GSM900	60	902	5	880MHz - 915MHz	100	888.505	-79.57	-59	PASS
GSM900	60	902	5	915MHz - 1000MHz	100	987.335	-80.87	-57	PASS
GSM900	60	902	5	1000MHz - 1710MHz	100	1618.2	-77.84	-47	PASS
GSM900	60	902	5	1710MHz - 1785MHz	100	1733.475	-77.25	-53	PASS
GSM900	60	902	5	1785MHz - 12750MHz	100	12261.23513	-69.97	-47	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

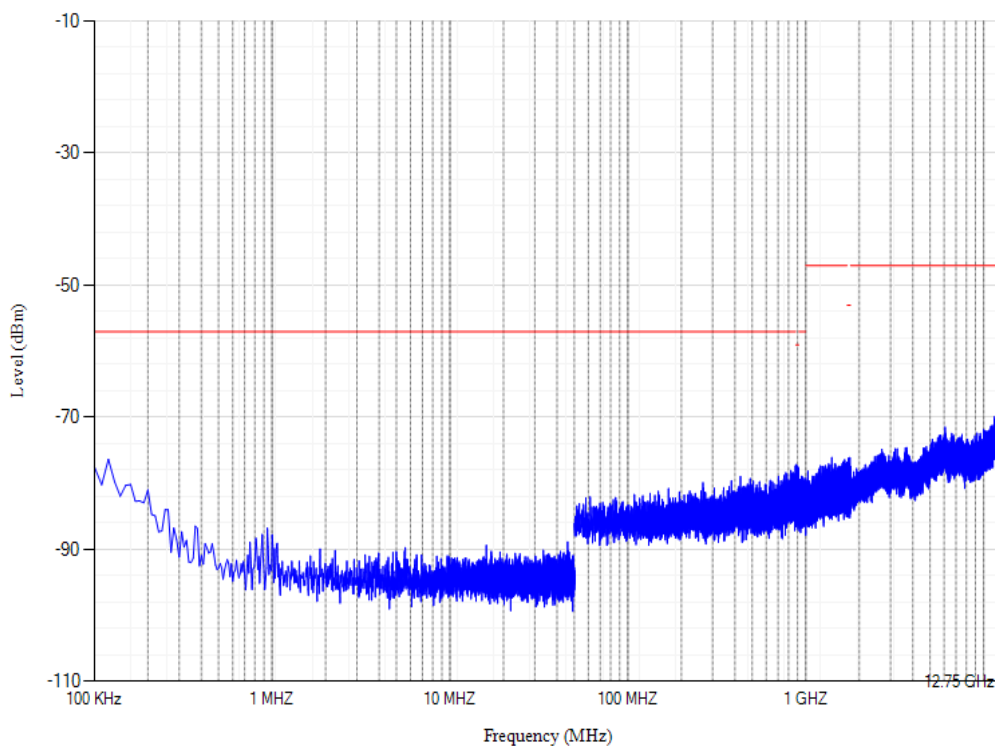

GSM900 Channel=60 PCL=5.png

Conducted spurious emissions

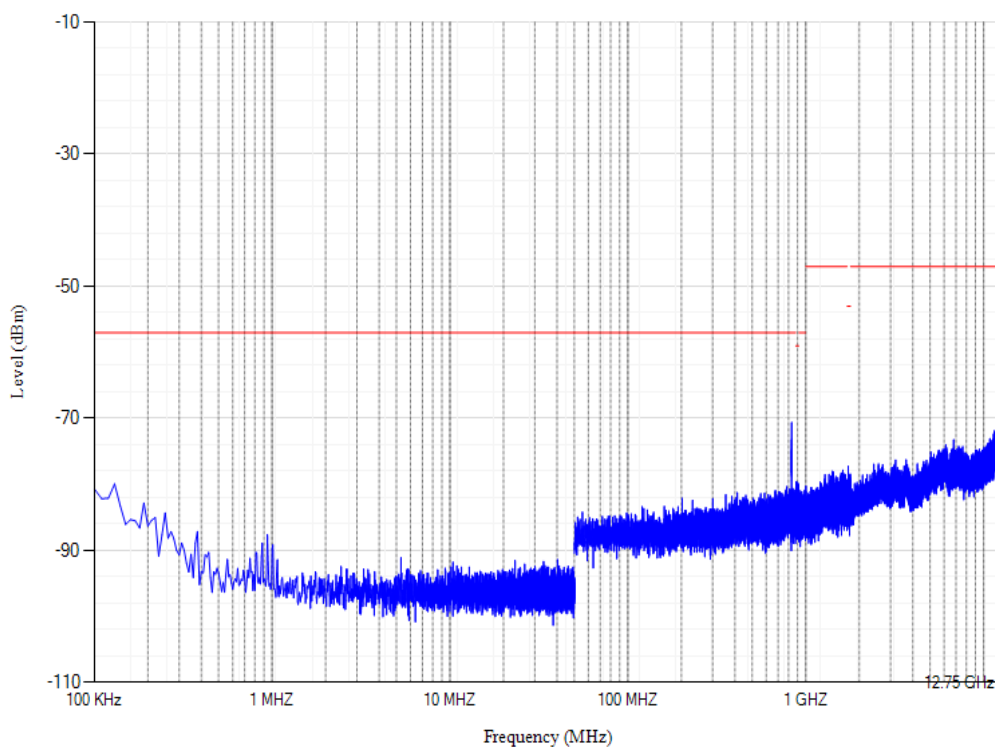

Clause 4.2.32 Intermodulation rejection - speech channels

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BER (%)	Limit (%)	Verdict
DCS1800	512	1710.2	1805.2	1804.4	-49	1803.6	-49	0.00	2.439	PASS
DCS1800	512	1710.2	1805.2	1806	-49	1806.8	-49	0.00	2.439	PASS
DCS1800	700	1747.8	1842.8	1842	-49	1841.2	-49	0.00	2.439	PASS
DCS1800	700	1747.8	1842.8	1843.6	-49	1844.4	-49	0.00	2.439	PASS
DCS1800	885	1784.8	1879.8	1879	-49	1878.2	-49	0.00	2.439	PASS
DCS1800	885	1784.8	1879.8	1880.6	-49	1881.4	-49	0.00	2.439	PASS
GSM900	975	880.2	915.2	914.4	-49	913.6	-50	0.00	2.439	PASS
GSM900	975	880.2	915.2	916	-49	916.8	-50	0.00	2.439	PASS
GSM900	60	902	947	946.2	-49	945.4	-50	0.00	2.439	PASS
GSM900	60	902	947	947.8	-49	948.6	-50	0.00	2.439	PASS
GSM900	124	914.8	959.8	959	-49	958.2	-50	0.00	2.439	PASS
GSM900	124	914.8	959.8	960.6	-49	961.4	-50	0.00	2.439	PASS

Clause 4.2.35 AM suppression - speech channels

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Interfer Freq (MHz)	Interfer Level (dBm)	BER (%)	Limit (%)	Verdict
DCS1800	512	1710.2	1805.2	1811.2	-31	0.00	2.439	PASS
DCS1800	700	1747.8	1842.8	1848.8	-31	0.00	2.439	PASS
DCS1800	885	1784.8	1879.8	1885.8	-31	0.00	2.439	PASS
GSM900	975	880.2	915.2	921.2	-31	0.00	2.439	PASS
GSM900	60	902	947	953	-31	0.00	2.439	PASS
GSM900	124	914.8	959.8	965.8	-31	0.00	2.439	PASS

Clause 4.2.38 Adjacent channel rejection - speech channels (TCH)

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Adjacent Channel	Interfer Freq (MHz)	Interfer Level (dBm)	Meas Type	Result (%)	Limit (%)	Verdict
DCS1800	700	1747.8	1842.8	Adj -1	1842.6	-89	ClassII_RBBER	0.00	8.333	PASS
DCS1800	700	1747.8	1842.8	Adj +1	1843	-89	ClassII_RBBER	0.00	8.333	PASS
DCS1800	700	1747.8	1842.8	Adj -2	1842.4	-57	ClassII_RBBER	0.00	8.333	PASS
DCS1800	700	1747.8	1842.8	Adj +2	1843.2	-57	ClassII_RBBER	0.00	8.333	PASS
GSM900	60	902	947	Adj -1	946.8	-89	ClassII_RBBER	1.39	9.167	PASS
GSM900	60	902	947	Adj +1	947.2	-89	ClassII_RBBER	1.58	9.167	PASS
GSM900	60	902	947	Adj -2	946.6	-57	ClassII_RBBER	0.03	9.167	PASS
GSM900	60	902	947	Adj +2	947.4	-57	ClassII_RBBER	0.00	9.167	PASS

Clause 4.2.42 Reference sensitivity - TCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Meas Type	Ref Sensitivity Level (dBm)	BER (%)	Limit (%)	Verdict
------	---------	--------------------	--------------------	-------------	-----------	-----------------------------	---------	-----------	---------

GSM900	975	880.2	880.2	Static	ClassII_RBER	-102	0.00	2.439	PASS
GSM900	60	902	902	Static	ClassII_RBER	-102	0.00	2.439	PASS
GSM900	124	914.8	914.8	Static	ClassII_RBER	-102	0.00	2.439	PASS
DCS1800	512	1710.2	1710.2	Static	ClassII_RBER	-102	0.00	2.439	PASS
DCS1800	700	1747.8	1747.8	Static	ClassII_RBER	-102	0.00	2.439	PASS
DCS1800	885	1784.8	1784.8	Static	ClassII_RBER	-102	0.00	2.439	PASS


Clause 4.2.43 Reference sensitivity - FACCH

Band	Channel	Propagation	UL Frequency (MHz)	DL Frequency (MHz)	Ref Sensitivity Level (dBm)	FER (%)	Limit (%)	Verdict
GSM900	975	TUhigh	880.2	915.2	-102	0.00	8.961	PASS
GSM900	60	TUhigh	902	947	-102	0.00	8.961	PASS
GSM900	124	TUhigh	914.8	959.8	-102	0.00	8.961	PASS
DCS1800	512	TUhigh	1710.2	1805.2	-102	0.00	8.961	PASS
DCS1800	700	TUhigh	1747.8	1842.8	-102	0.00	8.961	PASS
DCS1800	885	TUhigh	1784.8	1879.8	-102	0.00	8.961	PASS


Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	3;3;3;3	Frequency Error (Hz)	7.07	-88.02	88.02	PASS
GSM900	975	880.2	3;3;3;3	RMS Phase Error (Degree)	0.46	0	5	PASS
GSM900	975	880.2	3;3;3;3	Peak Phase Error (Degree)	1.34	0	20	PASS
GSM900	60	902	3;3;3;3	Frequency Error (Hz)	7.81	-90.2	90.2	PASS
GSM900	60	902	3;3;3;3	RMS Phase Error (Degree)	0.46	0	5	PASS
GSM900	60	902	3;3;3;3	Peak Phase Error (Degree)	1.36	0	20	PASS
GSM900	124	914.8	3;3;3;3	Frequency Error (Hz)	5.55	-91.48	91.48	PASS
GSM900	124	914.8	3;3;3;3	RMS Phase Error (Degree)	0.47	0	5	PASS
GSM900	124	914.8	3;3;3;3	Peak Phase Error (Degree)	1.38	0	20	PASS
DCS1800	512	1710.2	3;3;3;3	Frequency Error (Hz)	14.30	-171.02	171.02	PASS
DCS1800	512	1710.2	3;3;3;3	RMS Phase Error (Degree)	0.66	0	5	PASS
DCS1800	512	1710.2	3;3;3;3	Peak Phase Error (Degree)	2.49	0	20	PASS
DCS1800	700	1747.8	3;3;3;3	Frequency Error (Hz)	16.40	-174.78	174.78	PASS
DCS1800	700	1747.8	3;3;3;3	RMS Phase Error (Degree)	0.64	0	5	PASS
DCS1800	700	1747.8	3;3;3;3	Peak Phase Error (Degree)	2.05	0	20	PASS
DCS1800	885	1784.8	3;3;3;3	Frequency Error (Hz)	13.95	-178.48	178.48	PASS
DCS1800	885	1784.8	3;3;3;3	RMS Phase Error (Degree)	0.64	0	5	PASS
DCS1800	885	1784.8	3;3;3;3	Peak Phase Error (Degree)	2.20	0	20	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

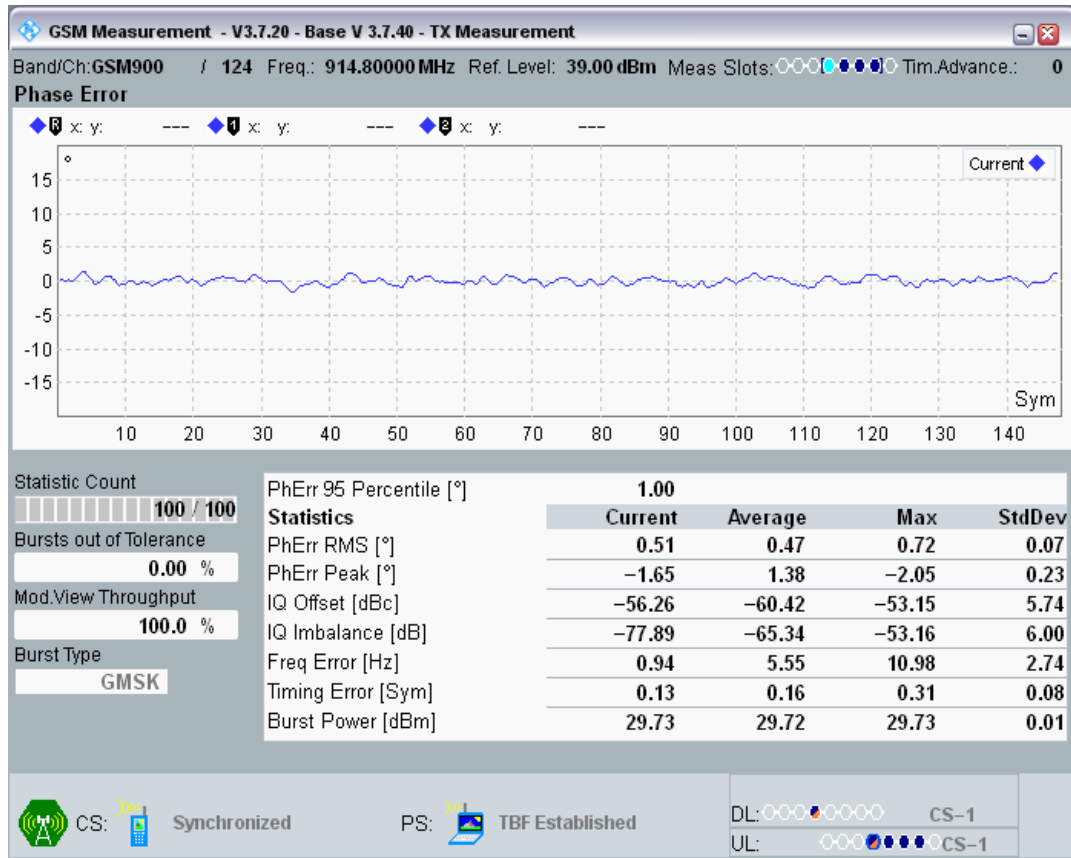


GSM900 Channel=60 Gamma=3;3;3;3.png

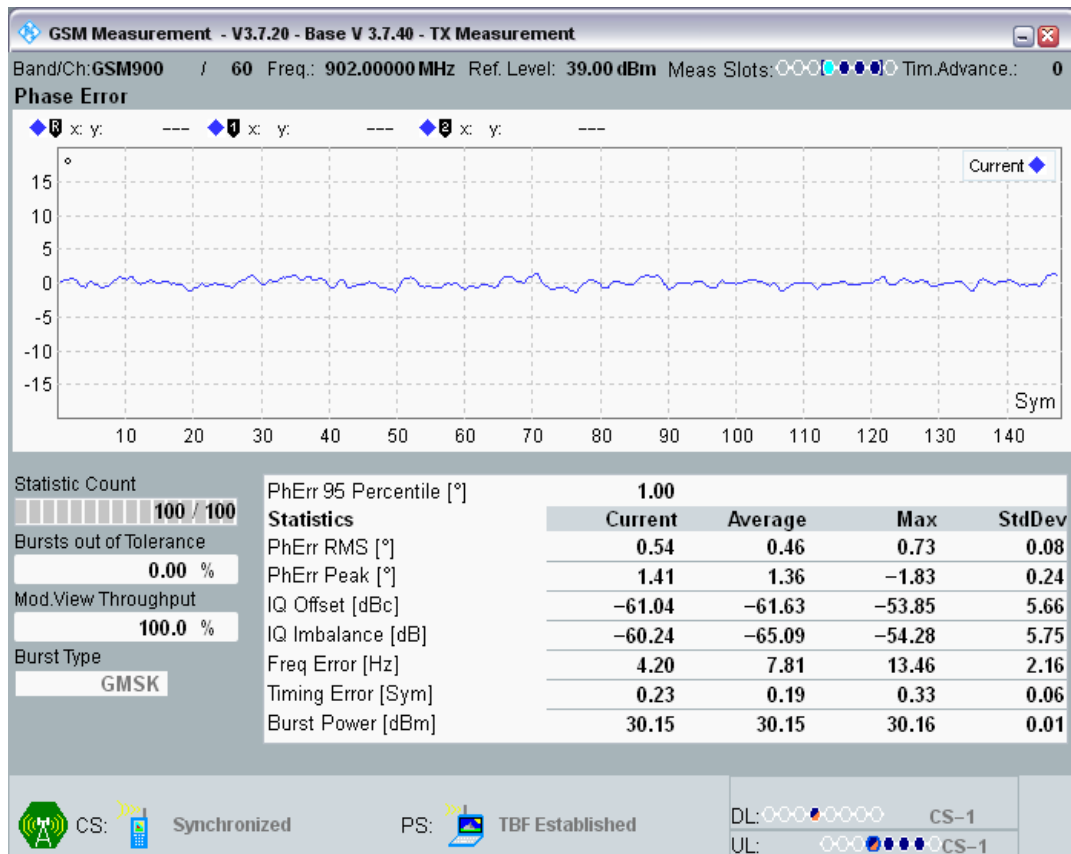


GSM900 Channel=975 Gamma=3;3;3;3.png

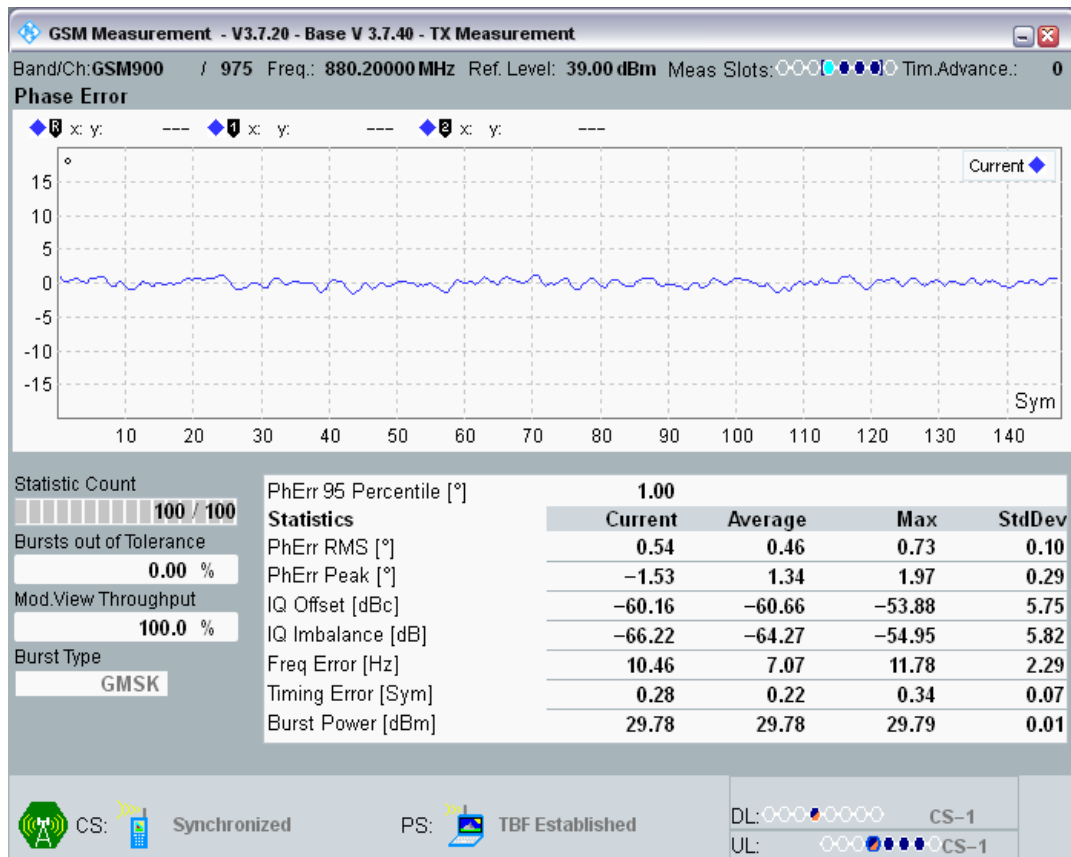


DCS1800 Channel=512 Gamma=3;3;3;3.png

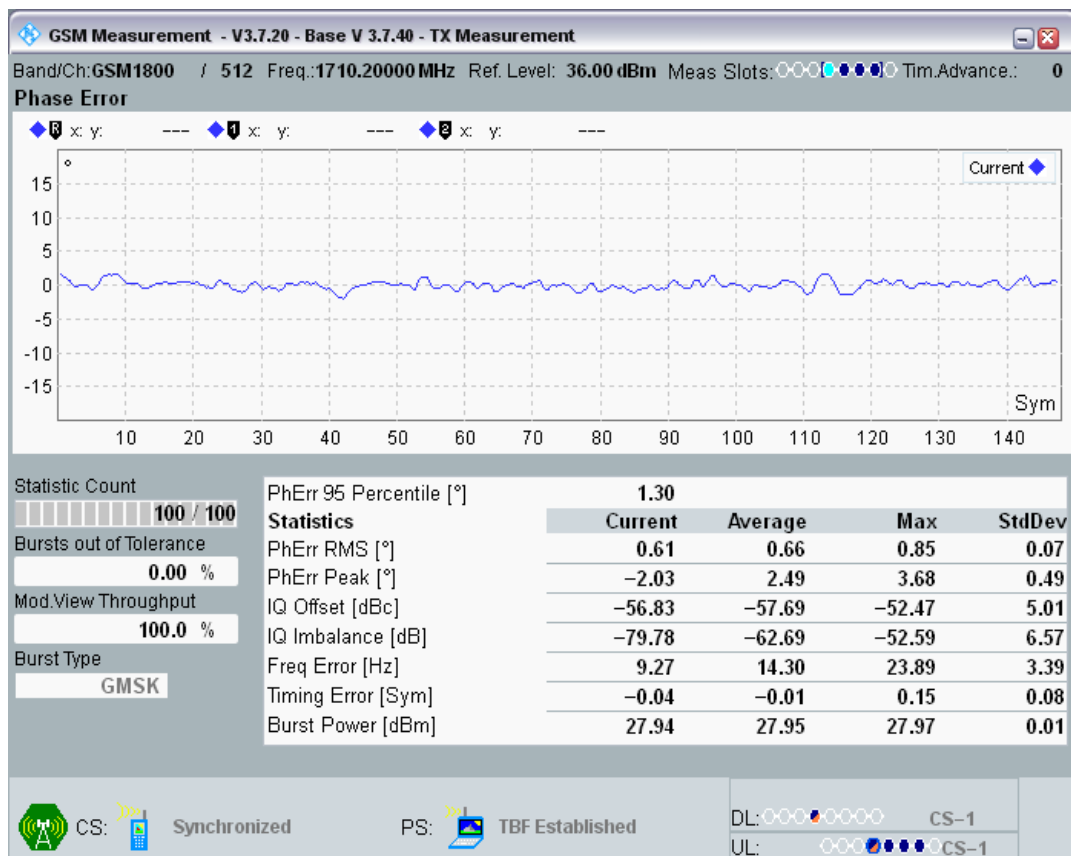

DCS1800 Channel=700 Gamma=3;3;3;3.png

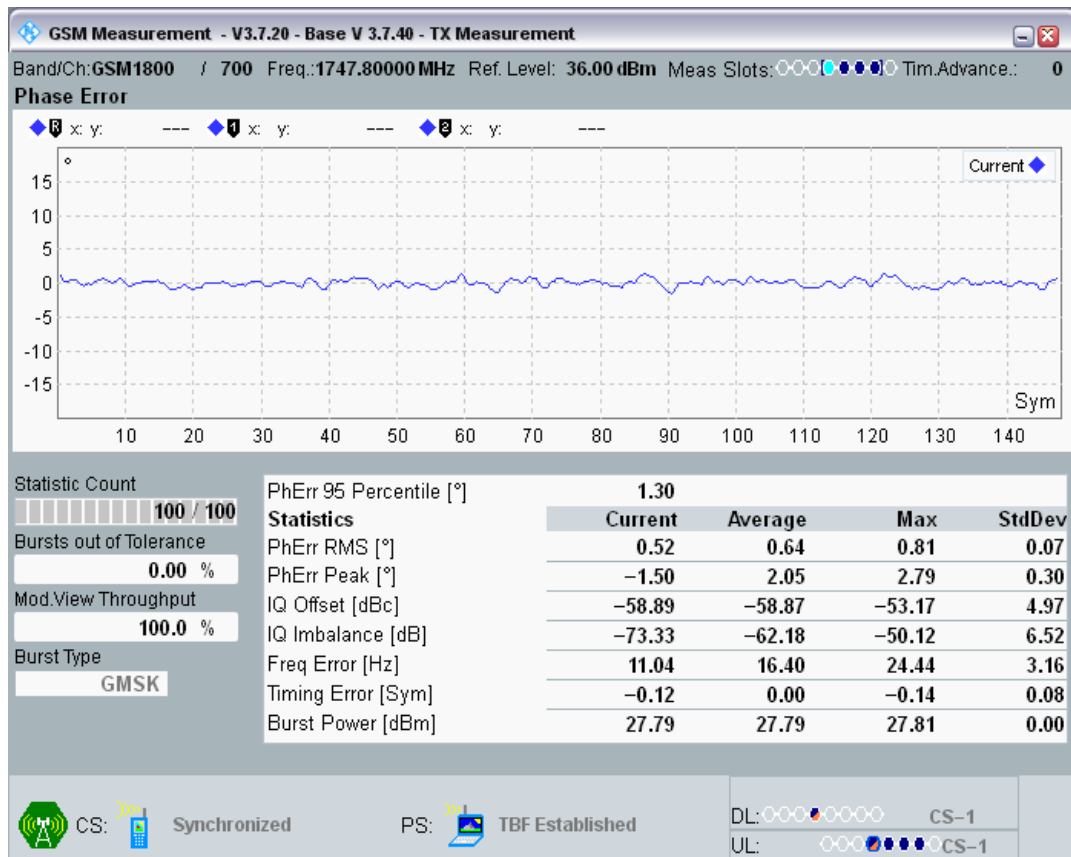

DCS1800 Channel=885 Gamma=3;3;3;3.png

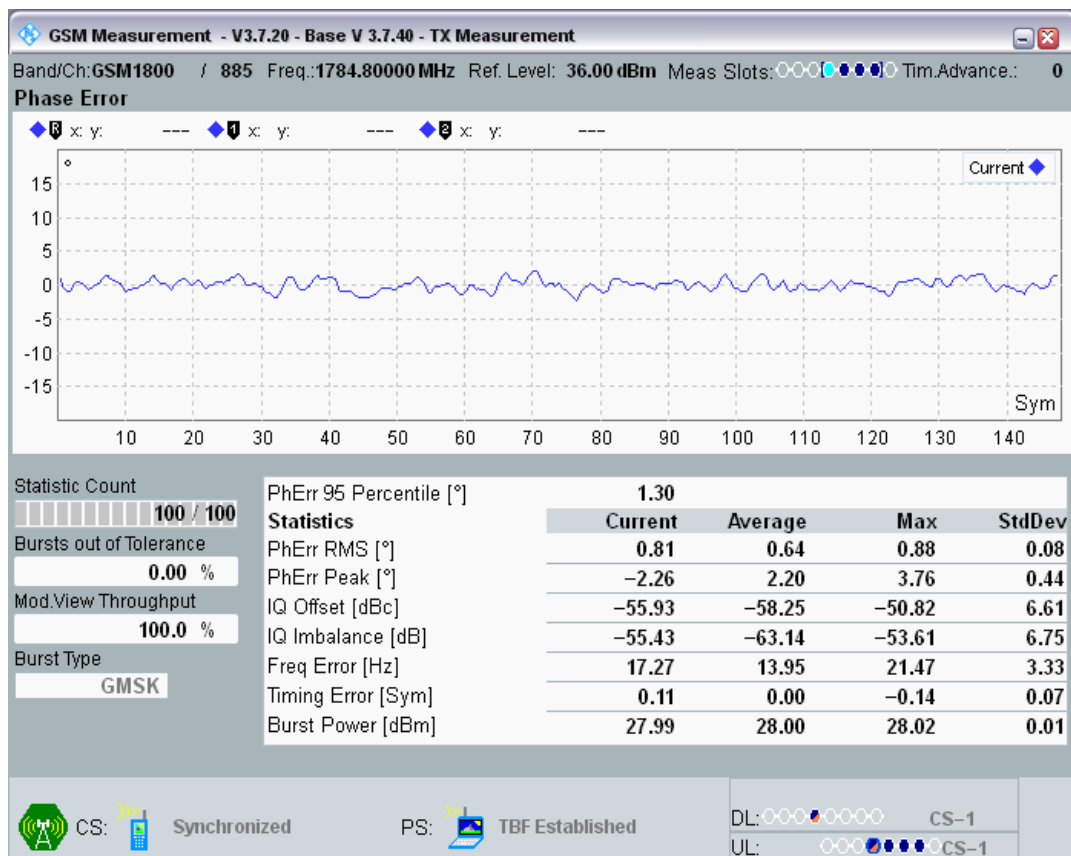

Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	PvT	-	-	-	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot1	29.64948	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot2	29.69073	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot3	29.69312	25	32	PASS
GSM900	975	880.2	3;3;3;3	Power @ slot4	29.70242	25	32	PASS
GSM900	975	880.2	4;4;4;4	PvT	-	-	-	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot1	29.66138	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot2	29.69498	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot3	29.70969	24	33	PASS
GSM900	975	880.2	4;4;4;4	Power @ slot4	29.7204	24	33	PASS
GSM900	975	880.2	5;5;5;5	PvT	-	-	-	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot1	29.60376	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot2	29.63489	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot3	29.65405	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot4	29.65662	24	32	PASS
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	27.55142	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	27.57465	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	27.58038	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	27.58191	24	30	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	25.49585	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	25.50748	22	28	PASS

				slot2				
GSM900	975	880.2	7;7;7;7	Power @ slot3	25.51816	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	25.50964	22	28	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	23.49237	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	23.47925	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	23.49036	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	23.49316	20	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	21.80331	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	21.78561	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	21.79013	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	21.78778	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	19.76846	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	19.76291	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	19.76193	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	19.76663	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	17.83328	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	17.79782	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	17.80774	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	17.79483	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @	15.75784	12	18	PASS

				slot1				
GSM900	975	880.2	12;12;12;12	Power @ slot2	15.74017	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot3	15.7605	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot4	15.74545	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	13.63525	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	13.70166	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	13.71091	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot4	13.70389	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot1	11.6156	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot2	11.6033	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot3	11.60693	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot4	11.61002	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	9.607483	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	9.690186	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	9.681152	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	9.686401	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	7.651886	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	7.644257	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	7.648773	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	7.632263	2	12	PASS

GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	4.447388	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot2	4.427917	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	4.421997	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	4.433197	0	10	PASS
GSM900	60	902	3;3;3;3	PvT	-	-	-	PASS
GSM900	60	902	3;3;3;3	Power @ slot1	30.04581	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot2	30.056	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot3	30.08609	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot4	30.08524	25	32	PASS
GSM900	60	902	4;4;4;4	PvT	-	-	-	PASS
GSM900	60	902	4;4;4;4	Power @ slot1	30.03232	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot2	30.06589	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot3	30.07251	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot4	30.08273	24	33	PASS
GSM900	60	902	5;5;5;5	PvT	-	-	-	PASS
GSM900	60	902	5;5;5;5	Power @ slot1	29.99579	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot2	30.02121	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot3	30.03781	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot4	30.05243	24	32	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	27.93475	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	27.96893	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	27.96994	24	30	PASS

GSM900	60	902	6;6;6;6	Power @ slot4	27.98846	24	30	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	25.8432	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	25.8793	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	25.88635	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	25.88354	22	28	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	23.84726	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	23.85809	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	23.85907	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	23.85922	20	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	21.79285	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	21.79483	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	21.78833	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	21.8024	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power @ slot1	19.77664	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot2	19.76102	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot3	19.76575	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot4	19.76187	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power @ slot1	17.83209	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot2	17.80234	14	20	PASS

GSM900	60	902	11;11;11;11	Power @ slot3	17.8013	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot4	17.78973	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power @ slot1	15.74802	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot2	15.73581	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot3	15.73624	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot4	15.74298	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power @ slot1	13.66098	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot2	13.70901	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot3	13.71045	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot4	13.70639	10	16	PASS
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	11.64203	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	11.62967	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	11.62436	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot4	11.62076	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	9.645935	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	9.711365	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	9.719635	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	9.708496	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	7.654205	2	12	PASS

GSM900	60	902	16;16;16;16	Power @ slot2	7.660248	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot3	7.65448	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	7.661957	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	4.395813	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	4.393738	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	4.396545	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	4.387695	0	10	PASS
GSM900	124	914.8	3;3;3;3	PvT	-	-	-	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot1	29.60999	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot2	29.63364	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot3	29.62885	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot4	29.63922	25	32	PASS
GSM900	124	914.8	4;4;4;4	PvT	-	-	-	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot1	29.61423	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot2	29.63785	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot3	29.64417	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot4	29.66684	24	33	PASS
GSM900	124	914.8	5;5;5;5	PvT	-	-	-	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot1	29.59692	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot2	29.6095	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot3	29.62735	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot4	29.64084	24	32	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS

GSM900	124	914.8	6;6;6;6	Power slot1 @	27.53519	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power slot2 @	27.55219	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power slot3 @	27.57773	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power slot4 @	27.58057	24	30	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power slot1 @	25.44308	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power slot2 @	25.44763	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power slot3 @	25.45578	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power slot4 @	25.46738	22	28	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power slot1 @	23.4325	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot2 @	23.43787	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot3 @	23.43372	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot4 @	23.42615	20	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power slot1 @	21.78119	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power slot2 @	21.77505	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power slot3 @	21.76392	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power slot4 @	21.79001	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power slot1 @	19.78342	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power slot2 @	19.76917	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power slot3 @	19.77417	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power slot4 @	19.77328	16	22	PASS

				slot4				
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	17.84387	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	17.82596	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	17.79709	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	17.82419	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	15.78143	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	15.75177	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	15.76086	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	15.74823	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	13.74026	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	13.79251	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	13.79706	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	13.79745	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	11.65524	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	11.62784	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	11.63449	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	11.63989	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	9.651886	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	9.730865	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	9.734344	4	14	PASS

				slot3				
GSM900	124	914.8	15;15;15;15	Power @ slot4	9.741638	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	7.656342	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	7.662842	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	7.661102	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	7.652405	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	4.408417	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	4.401794	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	4.405365	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	4.411133	0	10	PASS
DCS1800	512	1710.2	3;3;3;3	PvT	-	-	-	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot1	27.78793	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot2	27.75351	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot3	27.73776	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot4	27.71735	22	29	PASS
DCS1800	512	1710.2	4;4;4;4	PvT	-	-	-	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot1	27.75244	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot2	27.72824	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot3	27.69098	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot4	27.69189	21	30	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	27.73007	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	27.68161	21	29	PASS

				slot2				
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	27.66647	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	27.66135	21	29	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	25.73029	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	25.68222	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	25.65466	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	25.6554	21	27	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	23.80267	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	23.75644	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	23.73468	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot4	23.72418	19	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	21.81961	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	21.77142	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	21.74121	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	21.72455	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	19.79462	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	19.72891	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	19.71387	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	19.70322	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @	17.80887	13	19	PASS

				slot1				
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	17.77078	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	17.75864	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	17.74683	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	15.87506	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	15.82715	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	15.78842	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	15.7941	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	13.80753	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	13.77847	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot3	13.76593	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	13.7464	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	11.77811	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	11.74814	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	11.71136	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	11.71765	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	9.814087	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	9.783905	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	9.776947	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	9.754761	4	12	PASS

DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	7.477631	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot2	7.452209	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot3	7.430695	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot4	7.43454	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT	-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot1	5.452942	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot2	5.432892	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	5.399261	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	5.402374	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	3.478119	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot2	3.463043	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot3	3.452972	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	3.442383	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	1.364105	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	1.331818	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	1.318604	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot4	1.32132	-5	5	PASS
DCS1800	700	1747.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot1	27.69321	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot2	27.6535	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot3	27.62027	22	29	PASS

DCS1800	700	1747.8	3;3;3;3	Power @ slot4	27.61609	22	29	PASS
DCS1800	700	1747.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot1	27.67975	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot2	27.62619	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot3	27.6149	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot4	27.61267	21	30	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	27.65079	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	27.59152	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	27.58694	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	27.59201	21	29	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot1	25.62704	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	25.5744	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	25.56674	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	25.56247	21	27	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	23.6272	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	23.59174	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	23.57889	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	23.56339	19	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	21.6691	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot2	21.63776	17	23	PASS

DCS1800	700	1747.8	8;8;8;8	Power @ slot3	21.61227	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	21.58374	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	19.64859	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	19.60355	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	19.57416	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	19.57852	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	17.655	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	17.61621	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	17.59116	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	17.59302	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	15.58942	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	15.5658	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	15.53595	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	15.54102	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	13.58386	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	13.61581	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	13.61151	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	13.59735	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	11.49219	6	14	PASS

DCS1800	700	1747.8	13;13;13;13	Power @ slot2	11.46039	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	11.44949	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	11.43695	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	9.49408	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	9.553986	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	9.539459	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	9.535461	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	7.603363	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	7.571289	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot3	7.562317	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	7.563507	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	5.580109	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	5.542816	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	5.51886	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	5.510681	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	3.647888	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	3.615082	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	3.611847	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	3.59726	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS

DCS1800	700	1747.8	18;18;18;18	Power @ slot1	1.465546	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	1.453857	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	1.438873	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	1.436707	-5	5	PASS
DCS1800	885	1784.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot1	27.89899	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot2	27.86182	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot3	27.84125	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot4	27.82291	22	29	PASS
DCS1800	885	1784.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot1	27.86227	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot2	27.8396	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot3	27.81619	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot4	27.80978	21	30	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	27.8497	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	27.82861	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	27.80203	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	27.79031	21	29	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	25.83154	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	25.8143	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	25.78308	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	25.78848	21	27	PASS

				slot4				
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	23.81189	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	23.7771	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	23.75549	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	23.74066	19	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	21.81552	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	21.78659	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	21.78275	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.76761	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	19.78424	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.76657	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	19.74936	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	19.74191	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	17.82404	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	17.79187	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	17.75443	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	17.75598	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	15.75943	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	15.71259	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.73444	11	17	PASS

				slot3				
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	15.68954	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	13.68179	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	13.72549	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	13.69989	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	13.6994	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	11.51126	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	11.48022	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	11.47256	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	11.4538	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	9.486908	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	9.541901	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	9.519989	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	9.520325	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	7.85788	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	7.839417	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	7.819031	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	7.814178	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	5.781738	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @	5.76178	0	8	PASS

				slot2				
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	5.742126	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	5.744049	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	3.851501	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	3.813477	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot3	3.832886	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot4	3.796631	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot1	1.688568	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot2	1.680603	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot3	1.658478	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot4	1.648651	-5	5	PASS


GSM900 Channel=124 Gamma=17;17;17;17.png



GSM900 Channel=124 Gamma=3;3;3;3.png



GSM900 Channel=60 Gamma=17;17;17;17.png

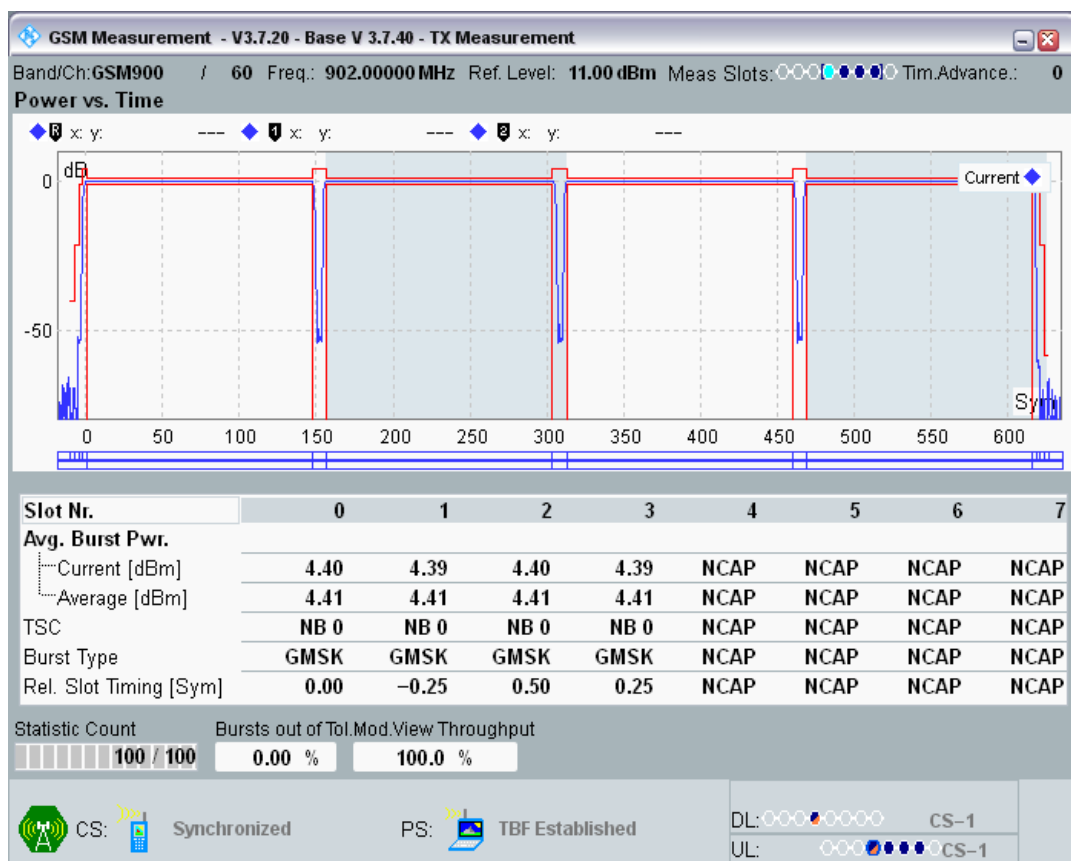


GSM900 Channel=60 Gamma=3;3;3;3.png




GSM900 Channel=975 Gamma=17;17;17;17.png



GSM900 Channel=975 Gamma=3;3;3;3.png

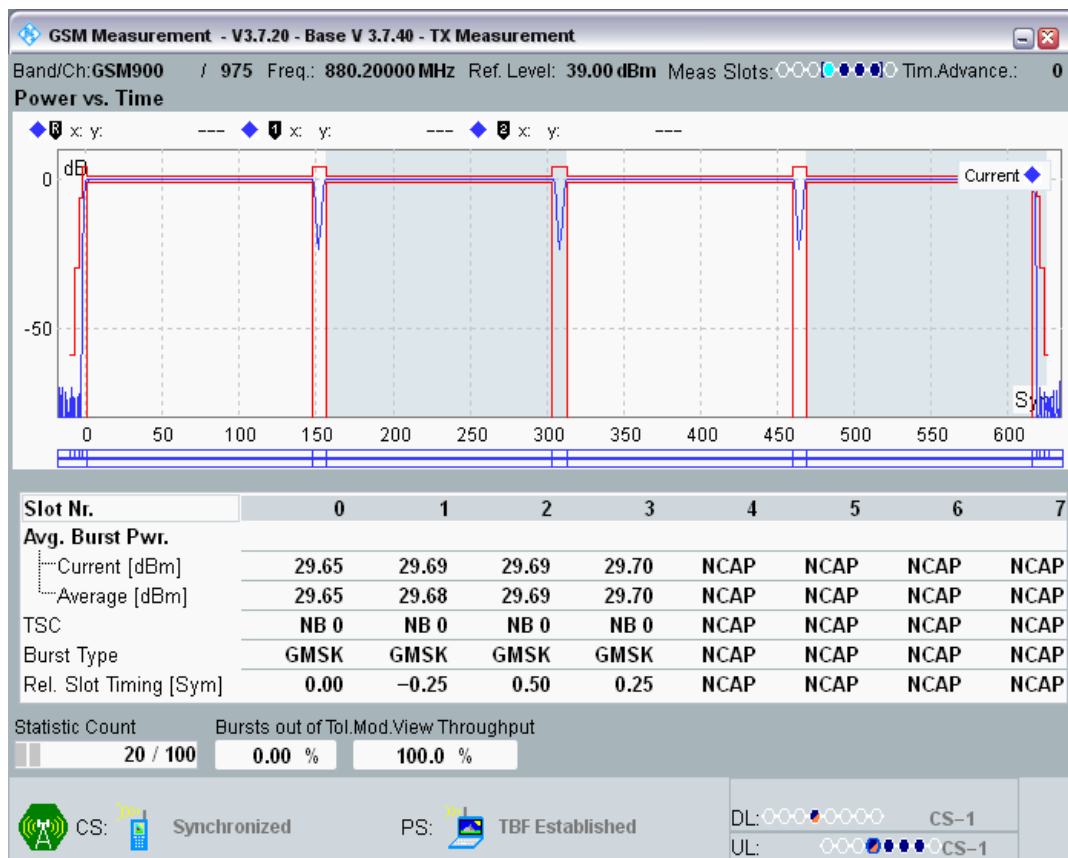

DCS1800 Channel=512 Gamma=18;18;18;18.png

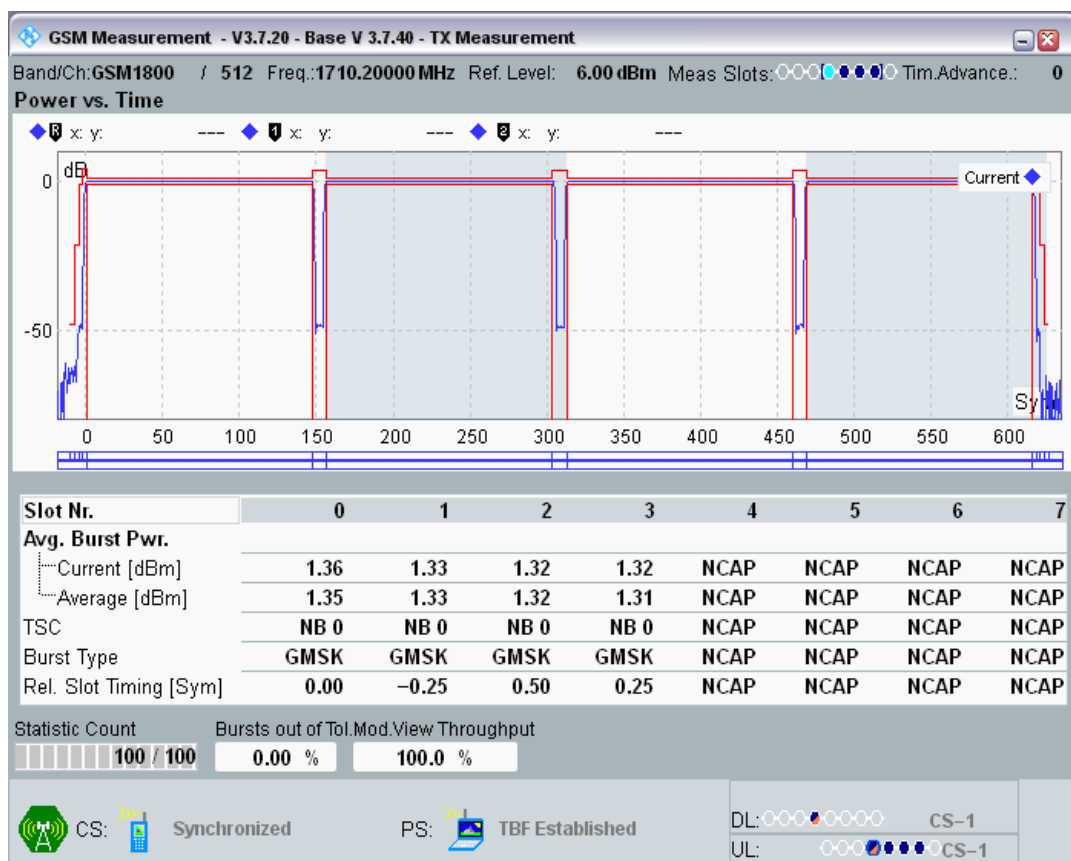

DCS1800 Channel=512 Gamma=3;3;3;3.png



DCS1800 Channel=700 Gamma=18;18;18;18.png



DCS1800 Channel=700 Gamma=3;3;3;3.png



DCS1800 Channel=885 Gamma=18;18;18;18.png



DCS1800 Channel=885 Gamma=3;3;3;3.png



Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-78.96	-60	-57.29	-51	PASS
GSM900	975	880.2	3;3;3;3	-1600 KHz	-79.57	-60	-57.90	-51	PASS
GSM900	975	880.2	3;3;3;3	-1400 KHz	-78.93	-60	-57.26	-51	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-78.27	-60	-56.60	-51	PASS
GSM900	975	880.2	3;3;3;3	-1000 KHz	-76.30	-60	-54.63	-51	PASS
GSM900	975	880.2	3;3;3;3	-800 KHz	-75.89	-60	-54.22	-51	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-74.25	-60	-52.58	-51	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-69.82	-60	-48.15	-36	PASS
GSM900	975	880.2	3;3;3;3	-250 KHz	-40.77	-33	-19.10	-36	PASS
GSM900	975	880.2	3;3;3;3	-200 KHz	-36.60	-30	-14.93	-36	PASS
GSM900	975	880.2	3;3;3;3	-100 KHz	-8.63	0.5	13.04	-36	PASS
GSM900	975	880.2	3;3;3;3	100 KHz	-8.56	0.5	13.11	-36	PASS
GSM900	975	880.2	3;3;3;3	200 KHz	-36.56	-30	-14.89	-36	PASS
GSM900	975	880.2	3;3;3;3	250 KHz	-40.87	-33	-19.20	-36	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-69.80	-60	-48.13	-36	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-74.53	-60	-52.86	-51	PASS
GSM900	975	880.2	3;3;3;3	800 KHz	-75.90	-60	-54.23	-51	PASS
GSM900	975	880.2	3;3;3;3	1000 KHz	-76.78	-60	-55.11	-51	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-77.90	-60	-56.23	-51	PASS
GSM900	975	880.2	3;3;3;3	1400 KHz	-78.60	-60	-56.93	-51	PASS
GSM900	975	880.2	3;3;3;3	1600 KHz	-79.85	-60	-58.18	-51	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-79.33	-60	-57.66	-51	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-80.11	-60	-58.05	-51	PASS

GSM900	60	902	3;3;3;3	-1600 KHz	-80.26	-60	-58.20	-51	PASS
GSM900	60	902	3;3;3;3	-1400 KHz	-79.17	-60	-57.11	-51	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-78.26	-60	-56.19	-51	PASS
GSM900	60	902	3;3;3;3	-1000 KHz	-76.88	-60	-54.82	-51	PASS
GSM900	60	902	3;3;3;3	-800 KHz	-75.89	-60	-53.82	-51	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-75.00	-60	-52.93	-51	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-70.04	-60	-47.98	-36	PASS
GSM900	60	902	3;3;3;3	-250 KHz	-41.02	-33	-18.96	-36	PASS
GSM900	60	902	3;3;3;3	-200 KHz	-36.50	-30	-14.44	-36	PASS
GSM900	60	902	3;3;3;3	-100 KHz	-8.62	0.5	13.45	-36	PASS
GSM900	60	902	3;3;3;3	100 KHz	-8.32	0.5	13.74	-36	PASS
GSM900	60	902	3;3;3;3	200 KHz	-36.59	-30	-14.53	-36	PASS
GSM900	60	902	3;3;3;3	250 KHz	-40.87	-33	-18.81	-36	PASS
GSM900	60	902	3;3;3;3	400 KHz	-70.26	-60	-48.19	-36	PASS
GSM900	60	902	3;3;3;3	600 KHz	-75.03	-60	-52.97	-51	PASS
GSM900	60	902	3;3;3;3	800 KHz	-76.28	-60	-54.22	-51	PASS
GSM900	60	902	3;3;3;3	1000 KHz	-77.17	-60	-55.10	-51	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-78.03	-60	-55.97	-51	PASS
GSM900	60	902	3;3;3;3	1400 KHz	-78.68	-60	-56.62	-51	PASS
GSM900	60	902	3;3;3;3	1600 KHz	-80.01	-60	-57.94	-51	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-80.37	-60	-58.31	-51	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-78.69	-60	-57.26	-51	PASS
GSM900	124	914.8	3;3;3;3	-1600 KHz	-79.73	-60	-58.29	-51	PASS
GSM900	124	914.8	3;3;3;3	-1400 KHz	-78.68	-60	-57.25	-51	PASS
GSM900	124	914.8	3;3;3;3	-1200	-78.06	-60	-56.63	-51	PASS


				KHz					
GSM900	124	914.8	3;3;3;3	-1000 KHz	-76.39	-60	-54.96	-51	PASS
GSM900	124	914.8	3;3;3;3	-800 KHz	-75.95	-60	-54.52	-51	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-75.05	-60	-53.62	-51	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-69.70	-60	-48.26	-36	PASS
GSM900	124	914.8	3;3;3;3	-250 KHz	-40.77	-33	-19.33	-36	PASS
GSM900	124	914.8	3;3;3;3	-200 KHz	-36.30	-30	-14.87	-36	PASS
GSM900	124	914.8	3;3;3;3	-100 KHz	-8.40	0.5	13.03	-36	PASS
GSM900	124	914.8	3;3;3;3	100 KHz	-8.40	0.5	13.04	-36	PASS
GSM900	124	914.8	3;3;3;3	200 KHz	-36.37	-30	-14.94	-36	PASS
GSM900	124	914.8	3;3;3;3	250 KHz	-40.62	-33	-19.18	-36	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-69.95	-60	-48.52	-36	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-75.10	-60	-53.67	-51	PASS
GSM900	124	914.8	3;3;3;3	800 KHz	-76.12	-60	-54.68	-51	PASS
GSM900	124	914.8	3;3;3;3	1000 KHz	-76.60	-60	-55.17	-51	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-78.09	-60	-56.66	-51	PASS
GSM900	124	914.8	3;3;3;3	1400 KHz	-78.35	-60	-56.92	-51	PASS
GSM900	124	914.8	3;3;3;3	1600 KHz	-80.08	-60	-58.65	-51	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-78.92	-60	-57.49	-51	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-80.09	-60	-60.14	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1600 KHz	-79.74	-60	-59.78	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1400 KHz	-78.89	-60	-58.93	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-77.69	-60	-57.74	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1000 KHz	-76.15	-60	-56.19	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-800 KHz	-74.99	-60	-55.03	-56	PASS

DCS1800	512	1710.2	3;3;3;3	-600 KHz	-73.40	-60	-53.44	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-68.31	-60	-48.36	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-250 KHz	-40.89	-33	-20.93	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-200 KHz	-36.62	-30	-16.66	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-100 KHz	-8.86	0.5	11.10	-36	PASS
DCS1800	512	1710.2	3;3;3;3	100 KHz	-8.53	0.5	11.43	-36	PASS
DCS1800	512	1710.2	3;3;3;3	200 KHz	-36.67	-30	-16.72	-36	PASS
DCS1800	512	1710.2	3;3;3;3	250 KHz	-40.84	-33	-20.89	-36	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-68.43	-60	-48.47	-36	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-73.43	-60	-53.47	-56	PASS
DCS1800	512	1710.2	3;3;3;3	800 KHz	-75.17	-60	-55.21	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1000 KHz	-76.11	-60	-56.15	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-77.96	-60	-58.00	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1400 KHz	-78.42	-60	-58.46	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1600 KHz	-79.79	-60	-59.84	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-80.05	-60	-60.10	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-79.70	-60	-60.05	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1600 KHz	-79.62	-60	-59.97	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1400 KHz	-78.28	-60	-58.63	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-77.39	-60	-57.74	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1000 KHz	-75.91	-60	-56.26	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-800 KHz	-74.82	-60	-55.18	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-73.32	-60	-53.68	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-67.87	-60	-48.22	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-250	-40.58	-33	-20.93	-36	PASS


				KHz					
DCS1800	700	1747.8	3;3;3;3	-200 KHz	-36.59	-30	-16.95	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-100 KHz	-8.65	0.5	10.99	-36	PASS
DCS1800	700	1747.8	3;3;3;3	100 KHz	-8.68	0.5	10.97	-36	PASS
DCS1800	700	1747.8	3;3;3;3	200 KHz	-36.22	-30	-16.58	-36	PASS
DCS1800	700	1747.8	3;3;3;3	250 KHz	-40.97	-33	-21.33	-36	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-68.18	-60	-48.54	-36	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-73.33	-60	-53.68	-56	PASS
DCS1800	700	1747.8	3;3;3;3	800 KHz	-75.03	-60	-55.38	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1000 KHz	-75.98	-60	-56.34	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-77.47	-60	-57.82	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1400 KHz	-78.04	-60	-58.40	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1600 KHz	-79.47	-60	-59.83	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-79.84	-60	-60.19	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-79.97	-60	-59.96	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1600 KHz	-79.87	-60	-59.86	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1400 KHz	-78.99	-60	-58.98	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-78.04	-60	-58.03	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1000 KHz	-75.97	-60	-55.97	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-800 KHz	-74.91	-60	-54.90	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-73.18	-60	-53.17	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-68.29	-60	-48.28	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-250 KHz	-41.32	-33	-21.31	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-200 KHz	-36.61	-30	-16.60	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-100 KHz	-8.95	0.5	11.06	-36	PASS

DCS1800	885	1784.8	3;3;3;3	100 KHz	-8.55	0.5	11.46	-36	PASS
DCS1800	885	1784.8	3;3;3;3	200 KHz	-36.84	-30	-16.83	-36	PASS
DCS1800	885	1784.8	3;3;3;3	250 KHz	-40.91	-33	-20.91	-36	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-68.04	-60	-48.03	-36	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-73.08	-60	-53.07	-56	PASS
DCS1800	885	1784.8	3;3;3;3	800 KHz	-75.37	-60	-55.36	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1000 KHz	-76.37	-60	-56.36	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-77.82	-60	-57.81	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1400 KHz	-78.85	-60	-58.84	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1600 KHz	-79.62	-60	-59.61	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-80.16	-60	-60.15	-56	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

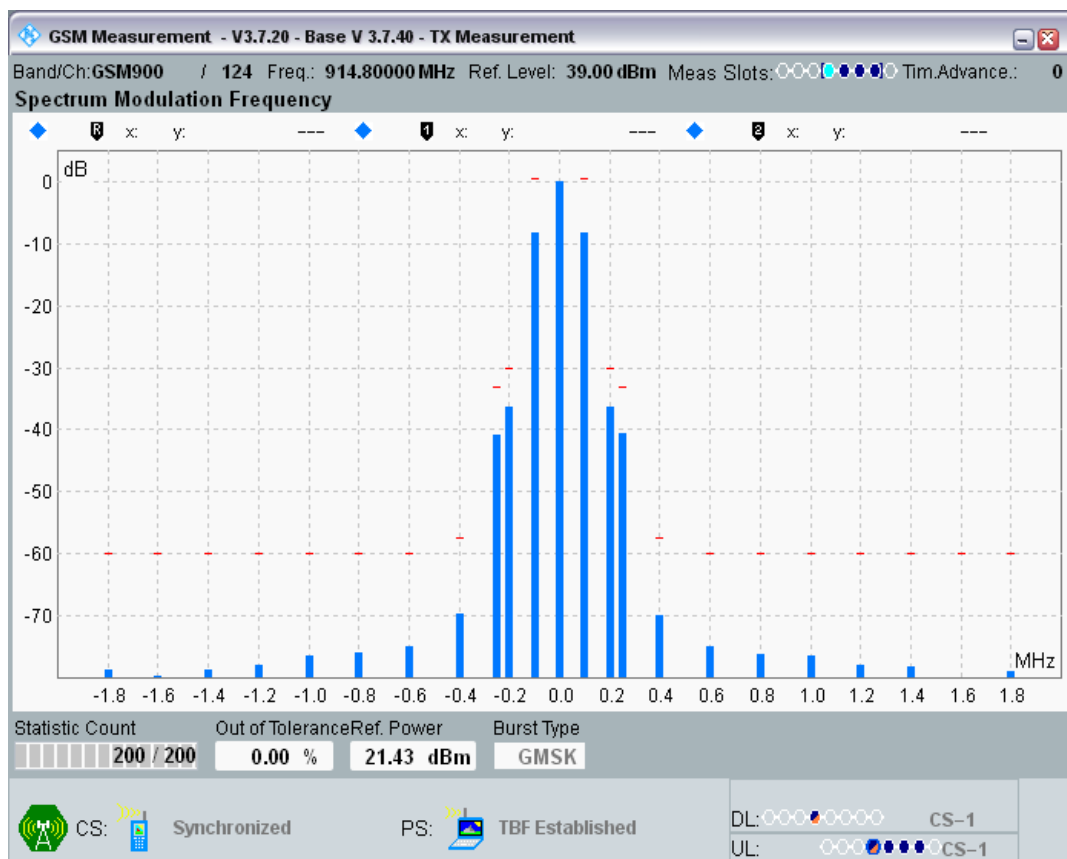


GSM900 Channel=60 Gamma=3;3;3;3.png

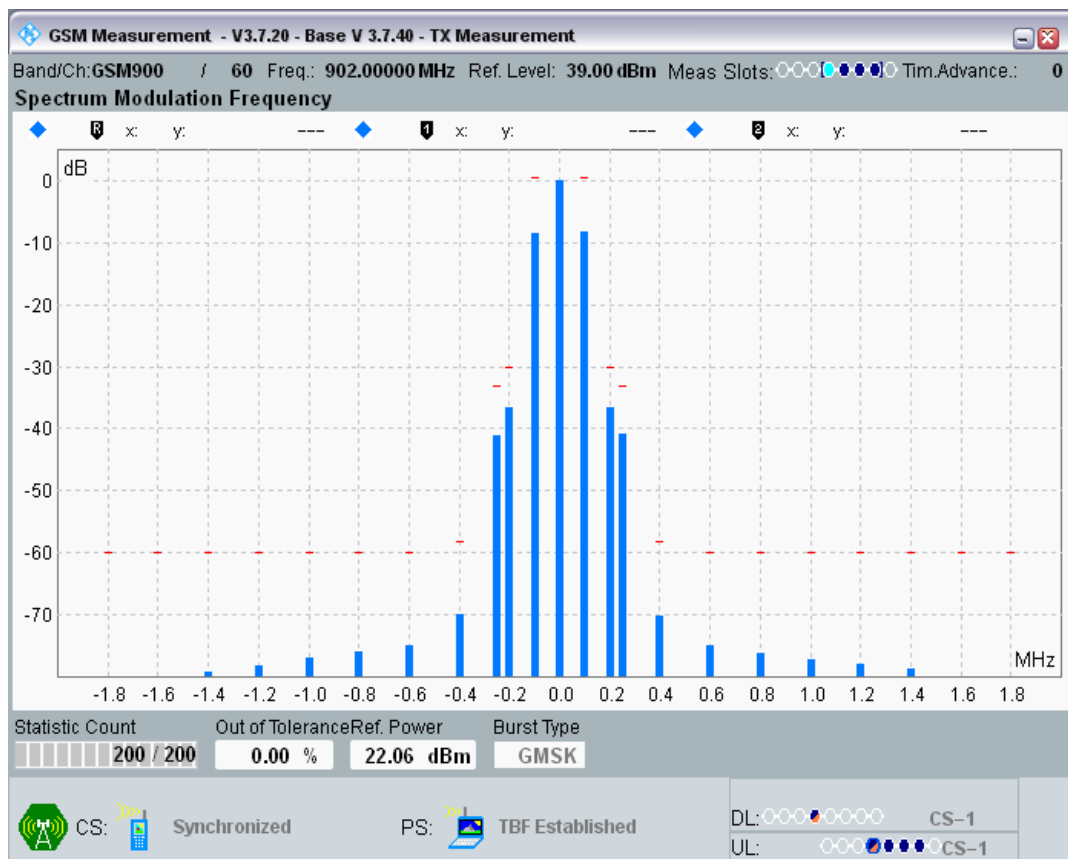


GSM900 Channel=975 Gamma=3;3;3;3.png

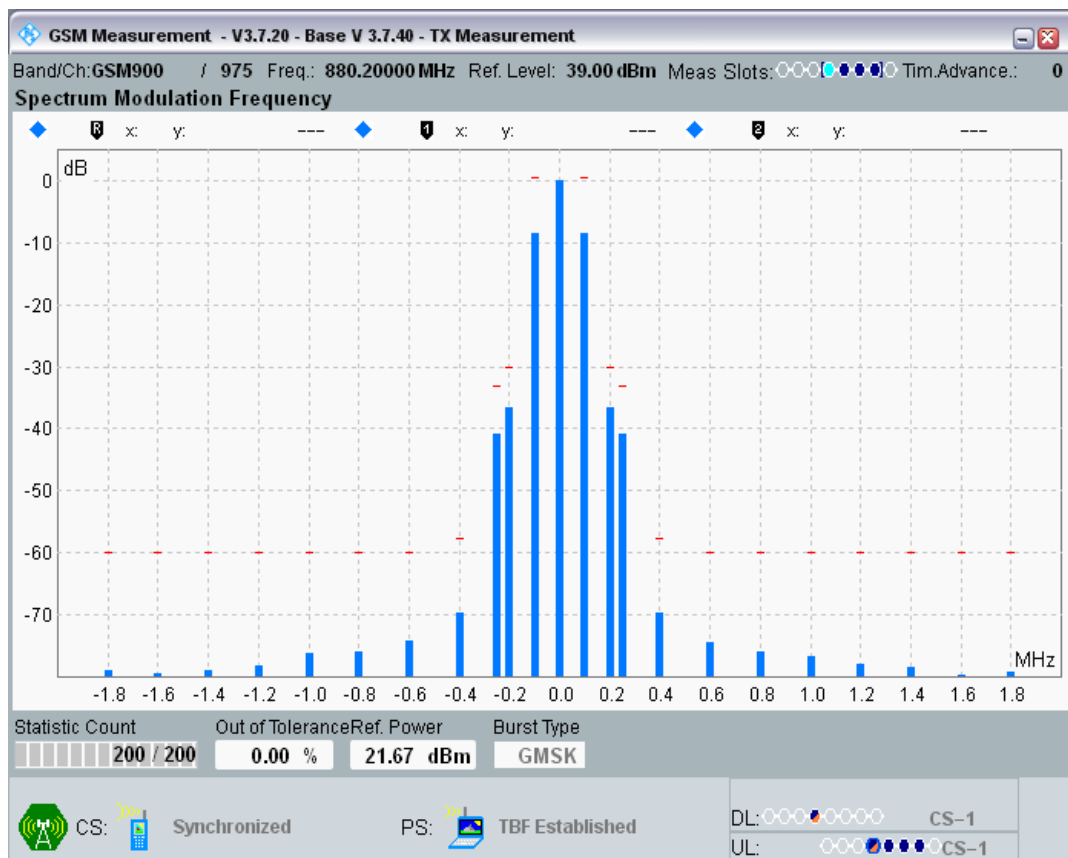


DCS1800 Channel=512 Gamma=3;3;3;3.png

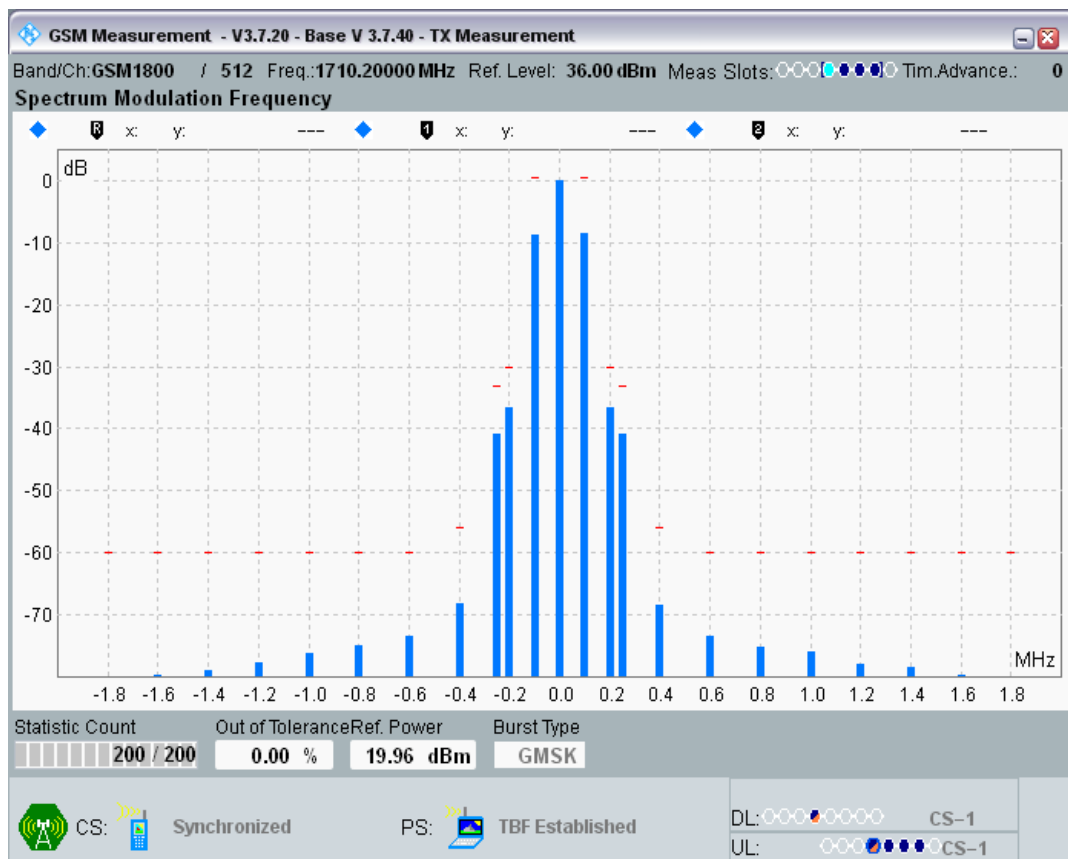

DCS1800 Channel=700 Gamma=3;3;3;3.png

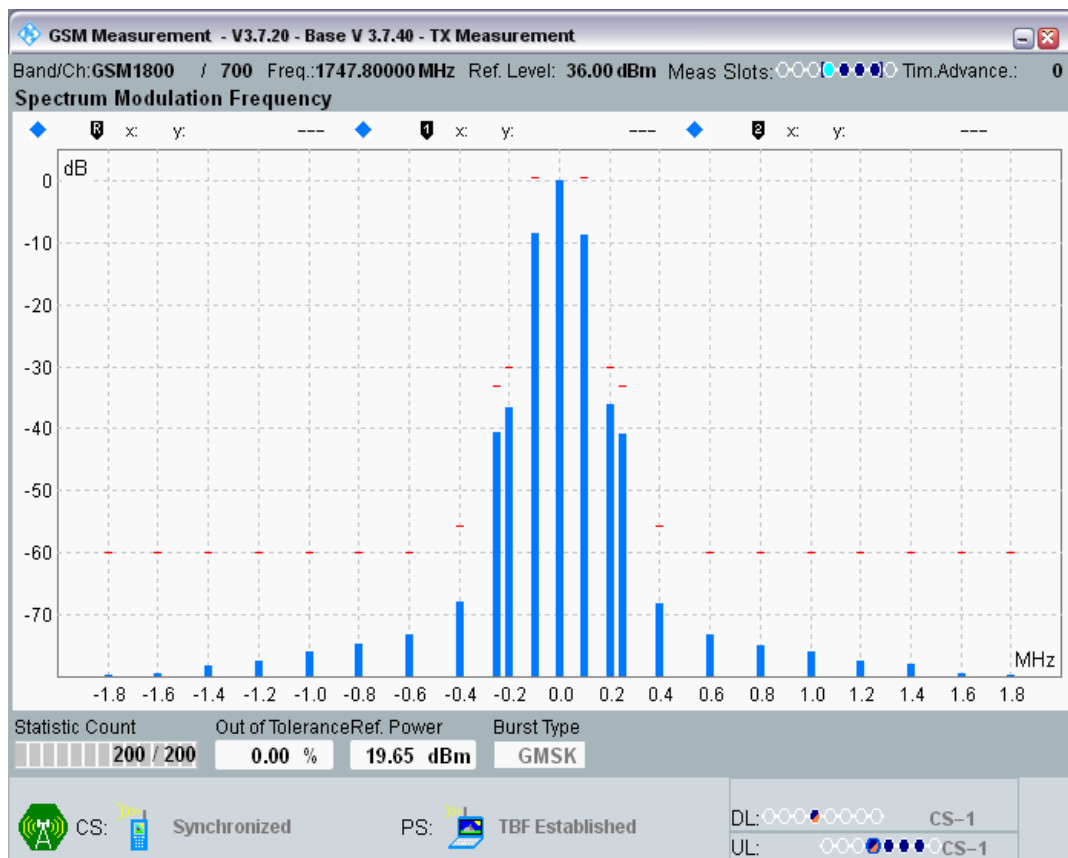

DCS1800 Channel=885 Gamma=3;3;3;3.png

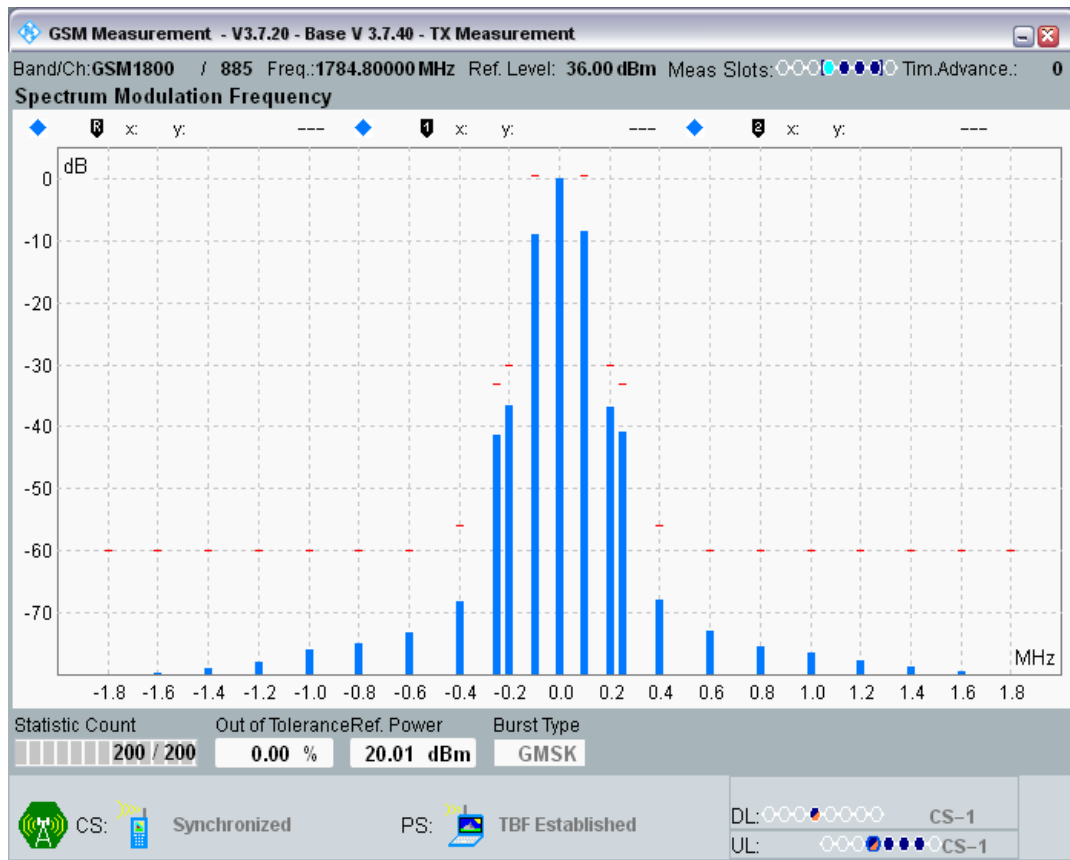


Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-38.53	-24	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-34.95	-21	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-30.13	-21	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-26.21	-19	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-24.88	-19	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-28.85	-21	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-34.16	-21	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-37.99	-24	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-38.55	-24	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-35.05	-21	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-29.27	-21	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-26.08	-19	PASS
GSM900	60	902	3;3;3;3	400 KHz	-24.76	-19	PASS
GSM900	60	902	3;3;3;3	600 KHz	-28.24	-21	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-34.65	-21	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-37.80	-24	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-38.70	-24	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-34.95	-21	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-30.02	-21	PASS

GSM900	124	914.8	3;3;3;3	-400 KHz	-26.02	-19	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-25.18	-19	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-28.72	-21	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-34.62	-21	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-36.82	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-48.25	-27	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-45.45	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-39.41	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-34.24	-22	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-33.64	-22	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-38.22	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-45.41	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-47.82	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-48.14	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-45.63	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-40.20	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-34.55	-22	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-33.42	-22	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-36.84	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-45.72	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-46.43	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-48.29	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-45.37	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-39.47	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-34.51	-22	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-32.63	-22	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-37.88	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-44.47	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-46.75	-27	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

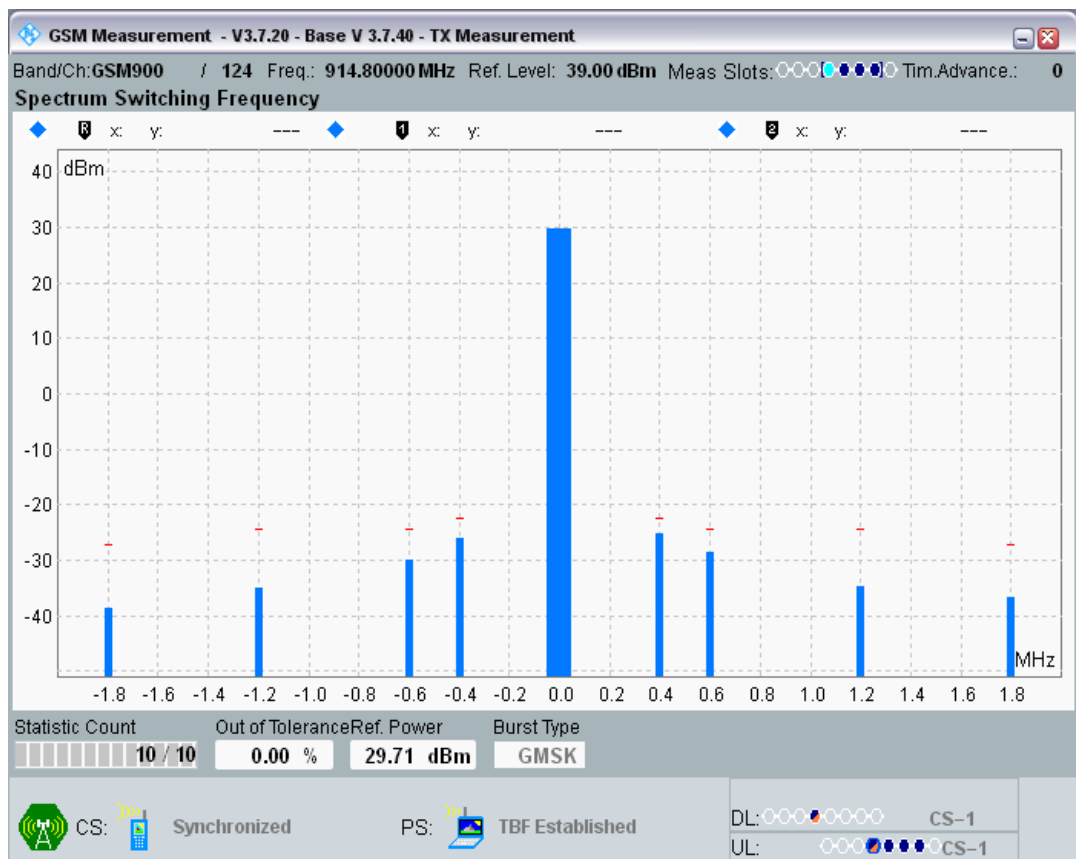


GSM900 Channel=60 Gamma=3;3;3;3.png

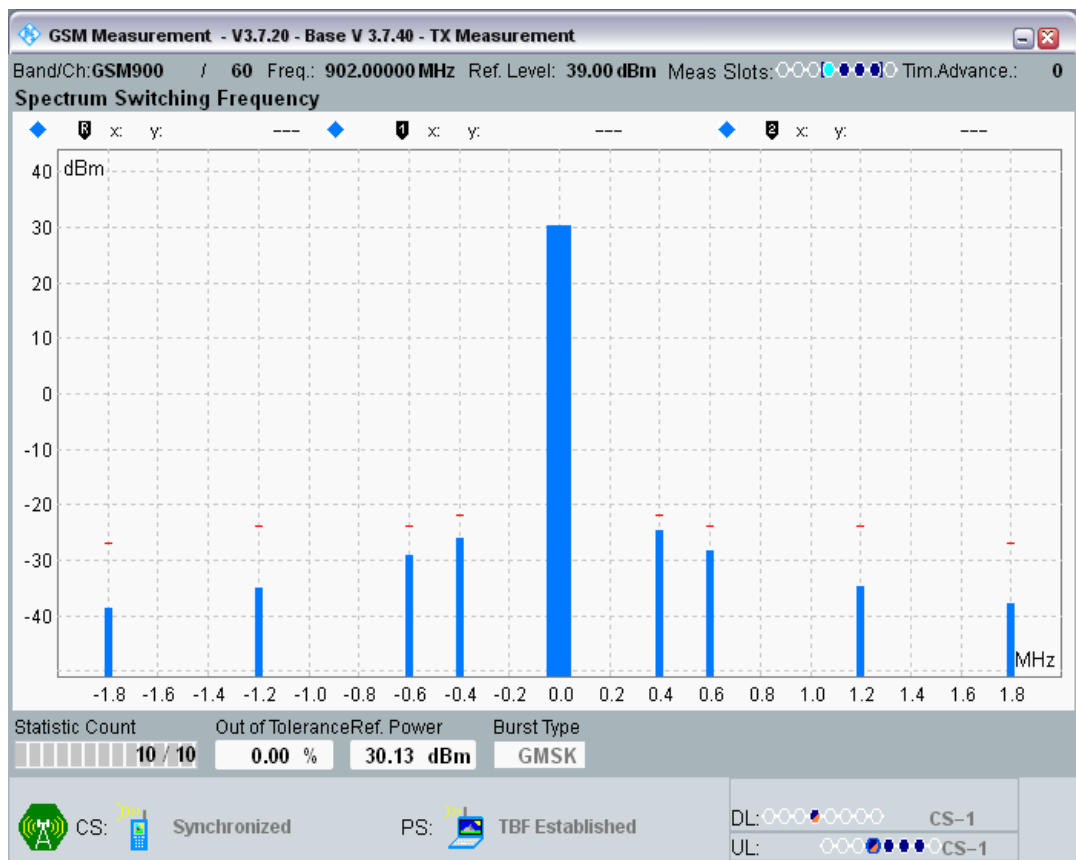


GSM900 Channel=975 Gamma=3;3;3;3.png

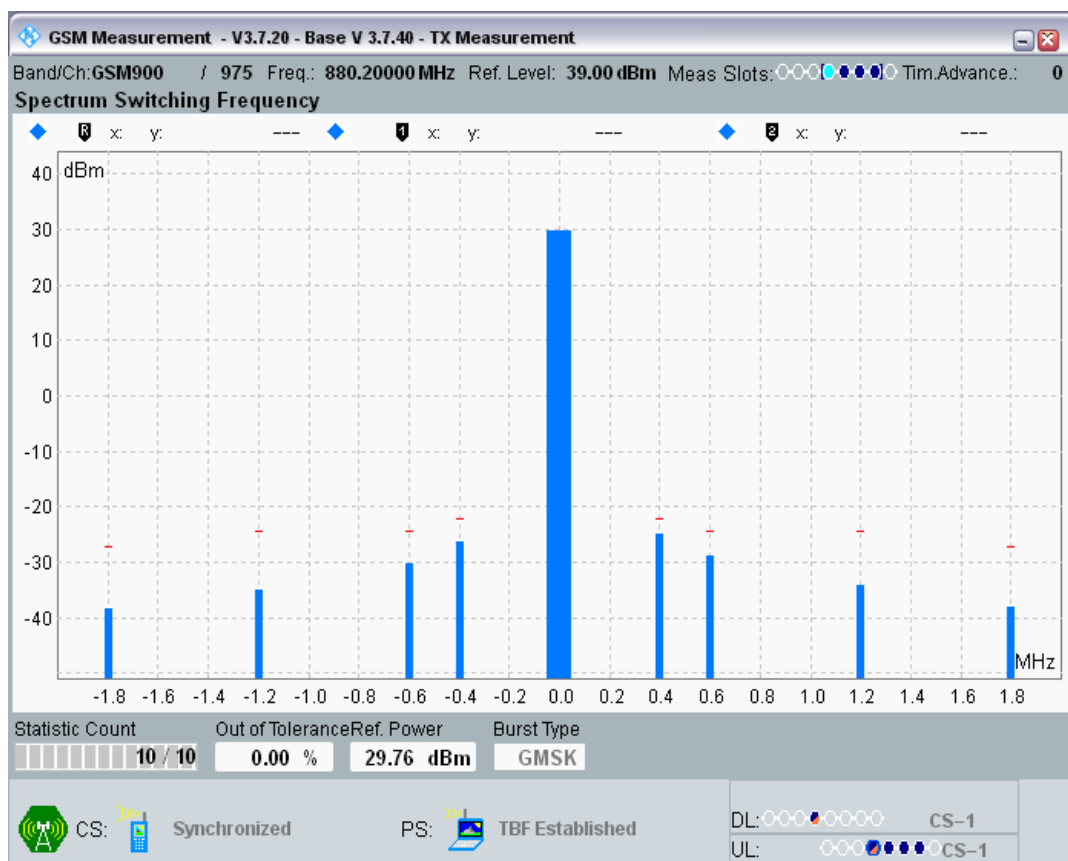


DCS1800 Channel=512 Gamma=3;3;3;3.png

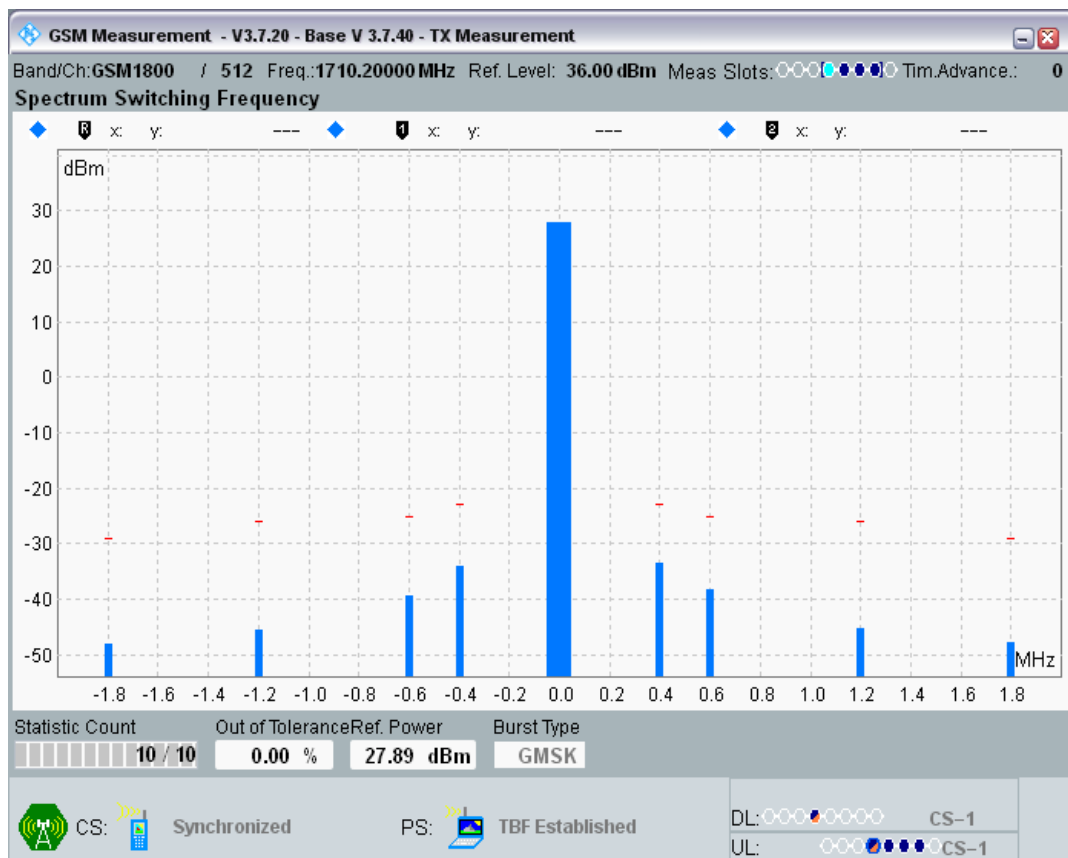

DCS1800 Channel=700 Gamma=3;3;3;3.png

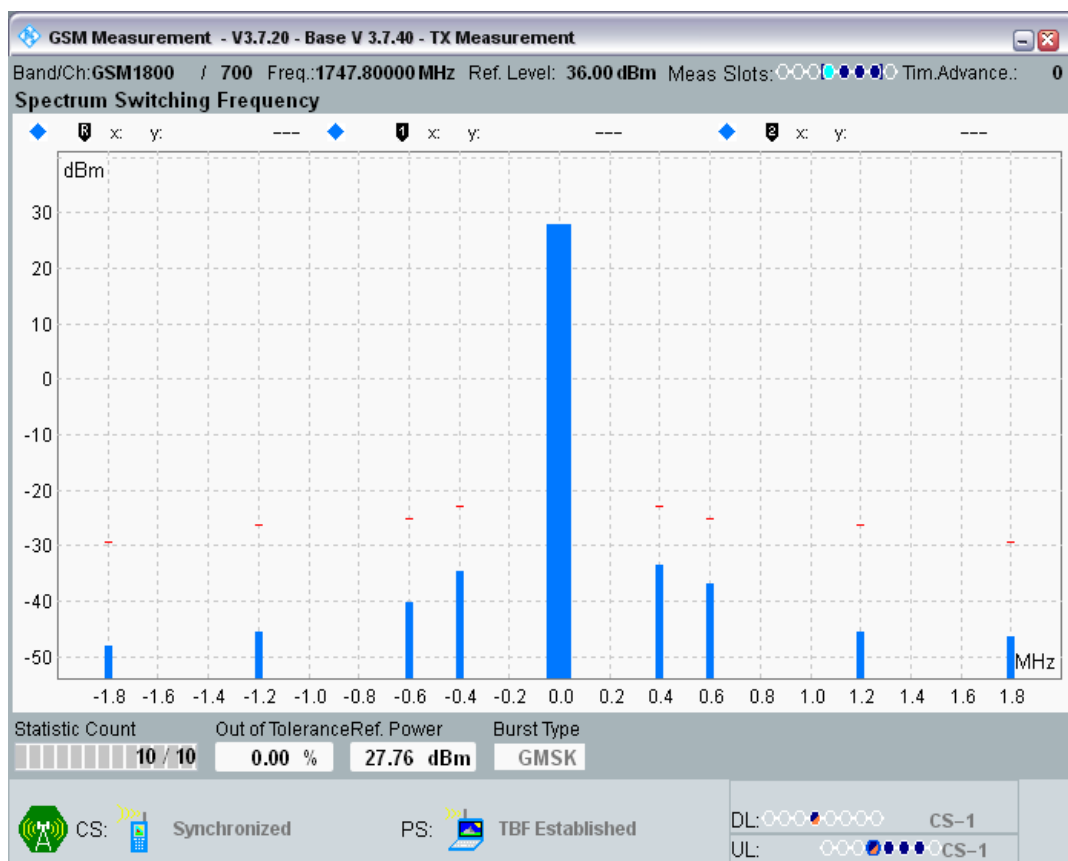

DCS1800 Channel=885 Gamma=3;3;3;3.png

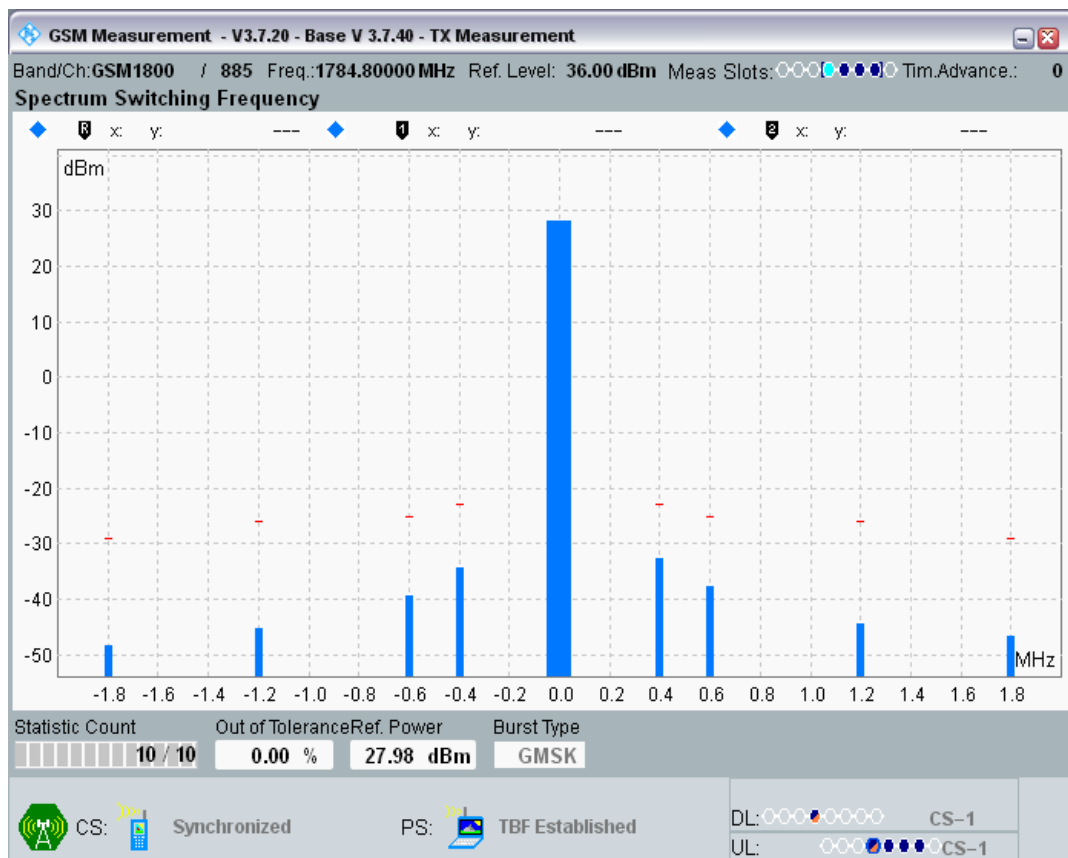

Clause 4.2.44 Minimum Input level for Reference Performance - GPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	PDTCH CS-1	-104	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH CS-2	-104	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH CS-3	-104	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH CS-4	-101	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-1	-104	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-2	-104	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-3	-104	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH CS-4	-101	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-1	-104	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-2	-104	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-3	-104	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH CS-4	-101	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-1	-104	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-2	-104	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-3	-104	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH CS-4	-101	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-1	-104	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-2	-104	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-3	-104	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH CS-4	-101	0.00	10	PASS

DCS1800	885	1784.8	1879.8	Static	PDTCH CS-1	-104	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH CS-2	-104	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH CS-3	-104	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH CS-4	-101	0.00	10	PASS

Clause 4.2.44 Minimum Input level for Reference Performance - GPRS USF


Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	USF CS-1	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF CS-2	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF CS-3	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF CS-4	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-1	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-2	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-3	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF CS-4	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-1	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-2	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-3	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF CS-4	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-1	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-2	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-3	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF CS-4	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-1	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-2	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-3	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF CS-4	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-1	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-2	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-3	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF CS-4	-104	0.00	1	PASS

Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration


Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	6;6;6;6	Frequency Error (Hz)	11.91	-88.02	88.02	PASS
GSM900	975	880.2	6;6;6;6	RMS EVM (%)	1.06	0	9	PASS
GSM900	975	880.2	6;6;6;6	Peak EVM (%)	2.84	0	30	PASS
GSM900	60	902	6;6;6;6	Frequency Error (Hz)	13.62	-90.2	90.2	PASS

GSM900	60	902	6;6;6;6	RMS EVM (%)	1.10	0	9	PASS
GSM900	60	902	6;6;6;6	Peak EVM (%)	2.96	0	30	PASS
GSM900	124	914.8	6;6;6;6	Frequency Error (Hz)	11.75	-91.48	91.48	PASS
GSM900	124	914.8	6;6;6;6	RMS EVM (%)	1.11	0	9	PASS
GSM900	124	914.8	6;6;6;6	Peak EVM (%)	3.03	0	30	PASS
DCS1800	512	1710.2	5;5;5;5	Frequency Error (Hz)	19.69	-171.02	171.02	PASS
DCS1800	512	1710.2	5;5;5;5	RMS EVM (%)	1.34	0	9	PASS
DCS1800	512	1710.2	5;5;5;5	Peak EVM (%)	4.01	0	30	PASS
DCS1800	700	1747.8	5;5;5;5	Frequency Error (Hz)	18.11	-174.78	174.78	PASS
DCS1800	700	1747.8	5;5;5;5	RMS EVM (%)	1.46	0	9	PASS
DCS1800	700	1747.8	5;5;5;5	Peak EVM (%)	4.41	0	30	PASS
DCS1800	885	1784.8	5;5;5;5	Frequency Error (Hz)	18.44	-178.48	178.48	PASS
DCS1800	885	1784.8	5;5;5;5	RMS EVM (%)	1.50	0	9	PASS
DCS1800	885	1784.8	5;5;5;5	Peak EVM (%)	4.50	0	30	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

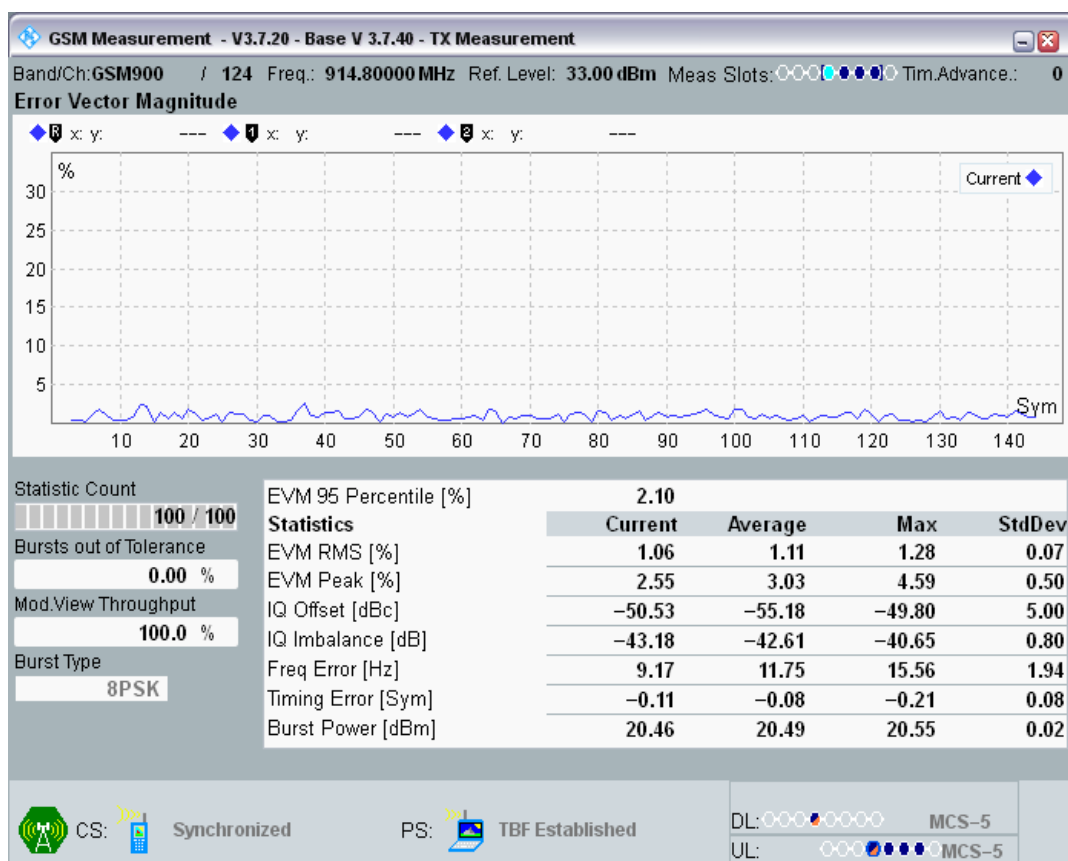


GSM900 Channel=60 Gamma=6;6;6;6.png

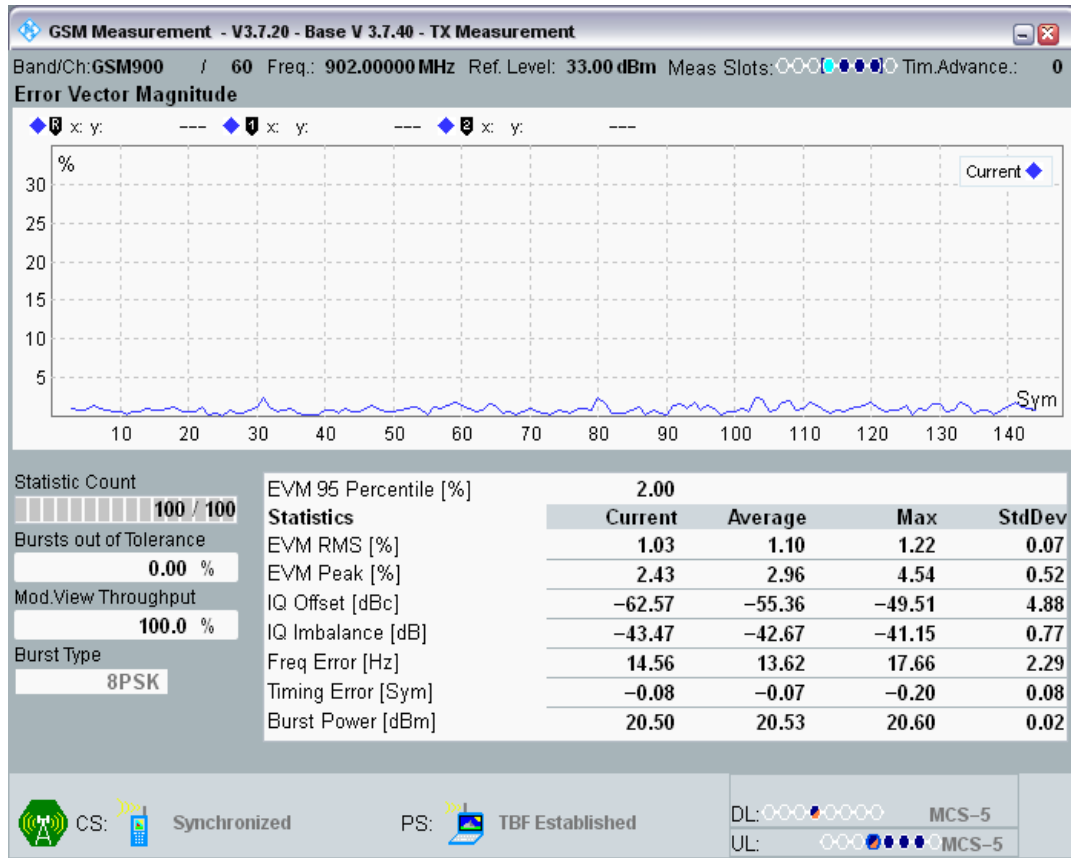


GSM900 Channel=975 Gamma=6;6;6;6.png

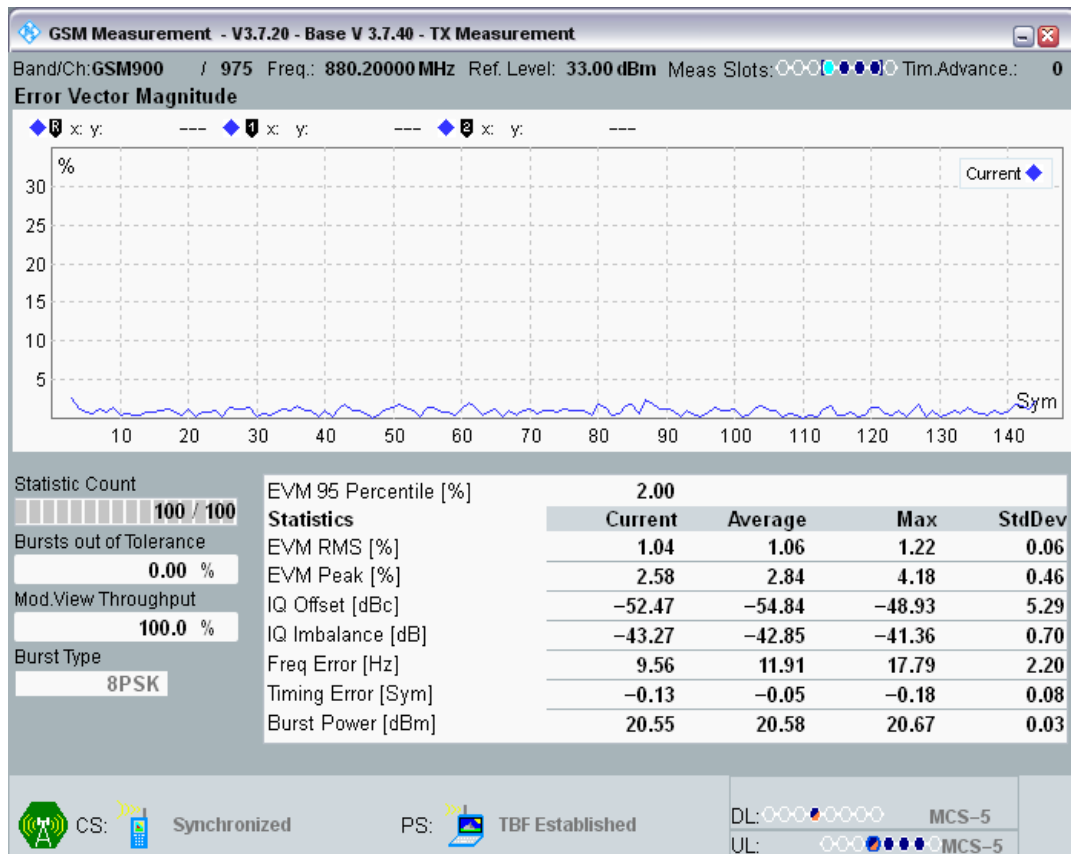


DCS1800 Channel=512 Gamma=5;5;5;5.png

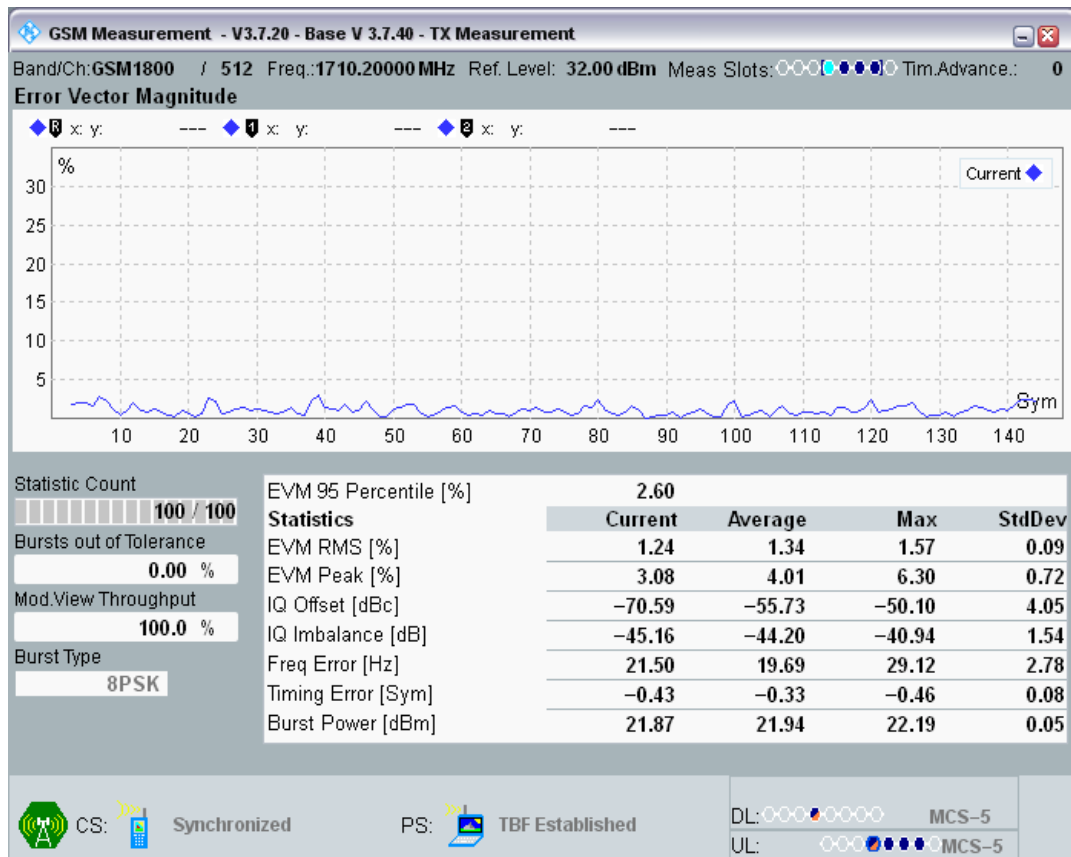

DCS1800 Channel=700 Gamma=5;5;5;5.png

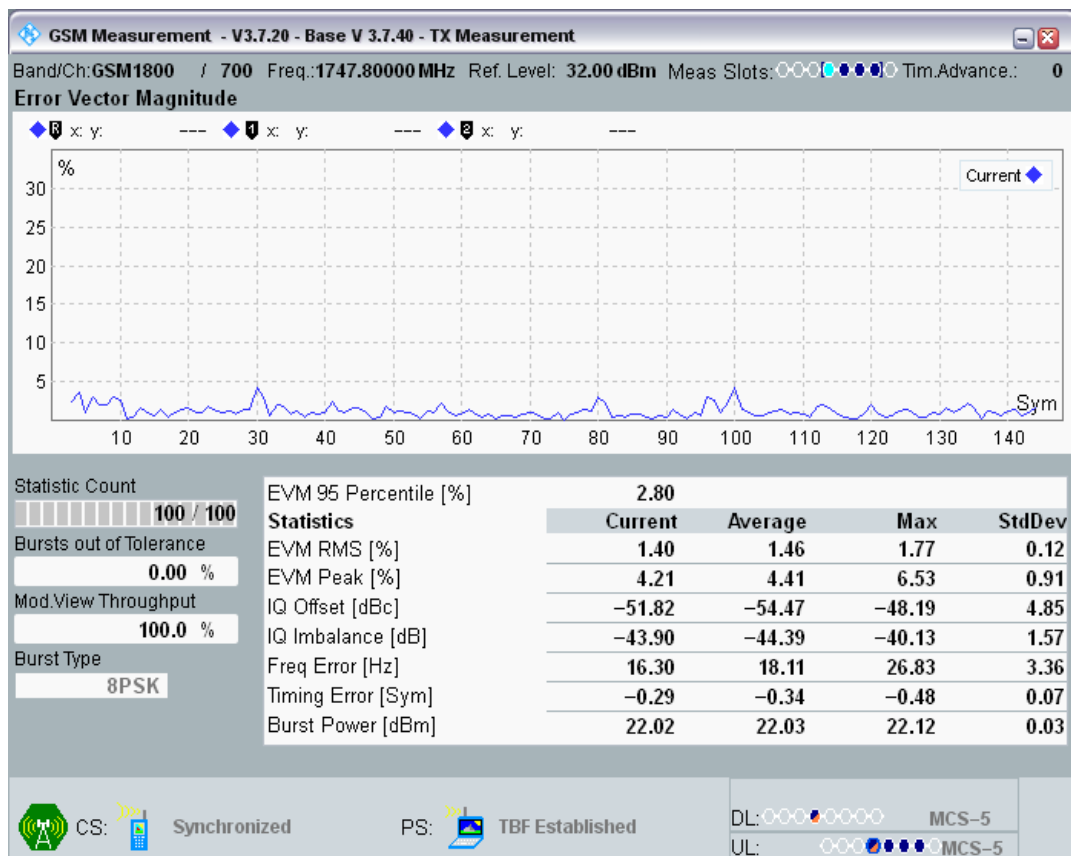

DCS1800 Channel=885 Gamma=5;5;5;5.png

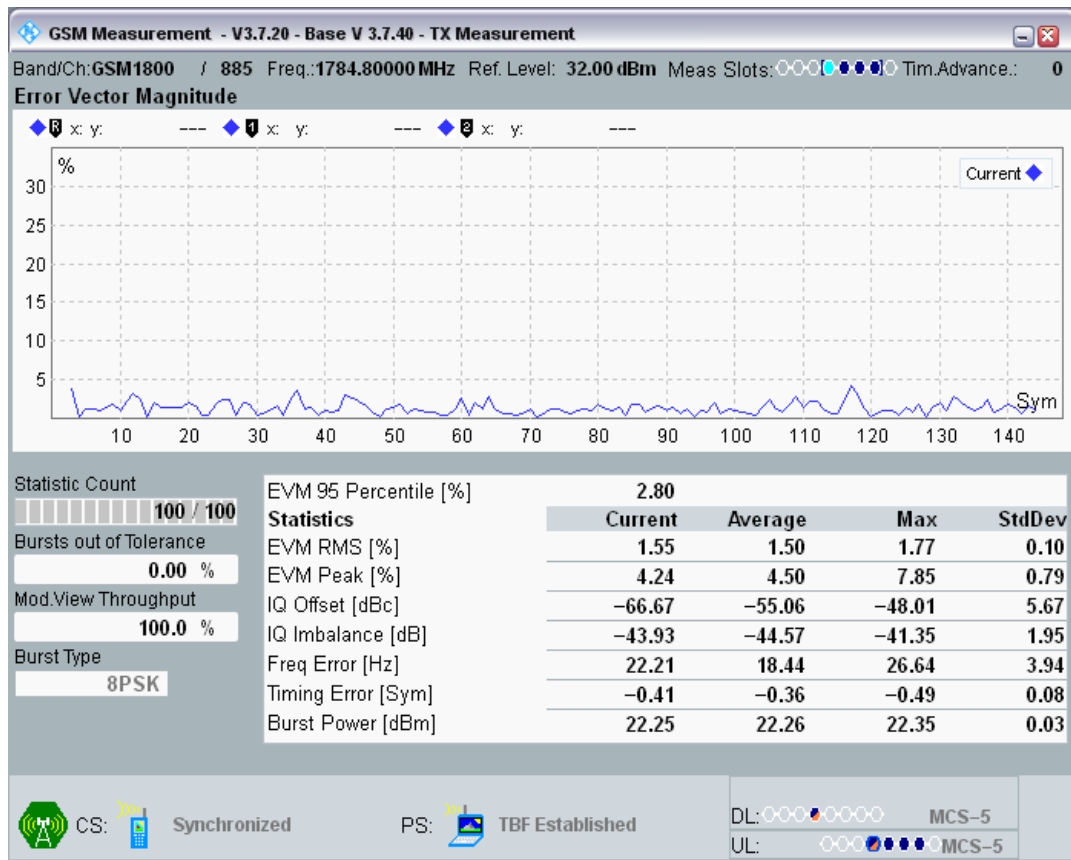


Clause 4.2.27 Frequency error under multipath and interference conditions in EGPRS Configuration


Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
GSM900	RA250	975	880.2	6;6;6;6	10.53	-300	300	PASS
GSM900	RA250	60	902	6;6;6;6	11.49	-300	300	PASS
GSM900	RA250	124	914.8	6;6;6;6	10.69	-300	300	PASS
GSM900	HT100	975	880.2	6;6;6;6	10.04	-180	180	PASS
GSM900	HT100	60	902	6;6;6;6	11.75	-180	180	PASS
GSM900	HT100	124	914.8	6;6;6;6	9.72	-180	180	PASS
GSM900	TU50	975	880.2	6;6;6;6	10.36	-160	160	PASS
GSM900	TU50	60	902	6;6;6;6	11.11	-160	160	PASS
GSM900	TU50	124	914.8	6;6;6;6	10.33	-160	160	PASS
GSM900	TU3	975	880.2	6;6;6;6	8.91	-230	230	PASS
GSM900	TU3	60	902	6;6;6;6	9.36	-230	230	PASS
GSM900	TU3	124	914.8	6;6;6;6	8.88	-230	230	PASS
DCS1800	RA130	512	1710.2	5;5;5;5	19.34	-400	400	PASS
DCS1800	RA130	700	1747.8	5;5;5;5	18.05	-400	400	PASS
DCS1800	RA130	885	1784.8	5;5;5;5	19.11	-400	400	PASS
DCS1800	HT100	512	1710.2	5;5;5;5	17.27	-350	350	PASS
DCS1800	HT100	700	1747.8	5;5;5;5	18.05	-350	350	PASS
DCS1800	HT100	885	1784.8	5;5;5;5	18.18	-350	350	PASS

DCS1800	TU50	512	1710.2	5;5;5;5	16.21	-260	260	PASS
DCS1800	TU50	700	1747.8	5;5;5;5	15.21	-260	260	PASS
DCS1800	TU50	885	1784.8	5;5;5;5	17.69	-260	260	PASS
DCS1800	TU1_5	512	1710.2	5;5;5;5	17.37	-320	320	PASS
DCS1800	TU1_5	700	1747.8	5;5;5;5	15.59	-320	320	PASS
DCS1800	TU1_5	885	1784.8	5;5;5;5	18.47	-320	320	PASS


GSM900 Channel=124 Gamma=6;6;6;6 HT100.png

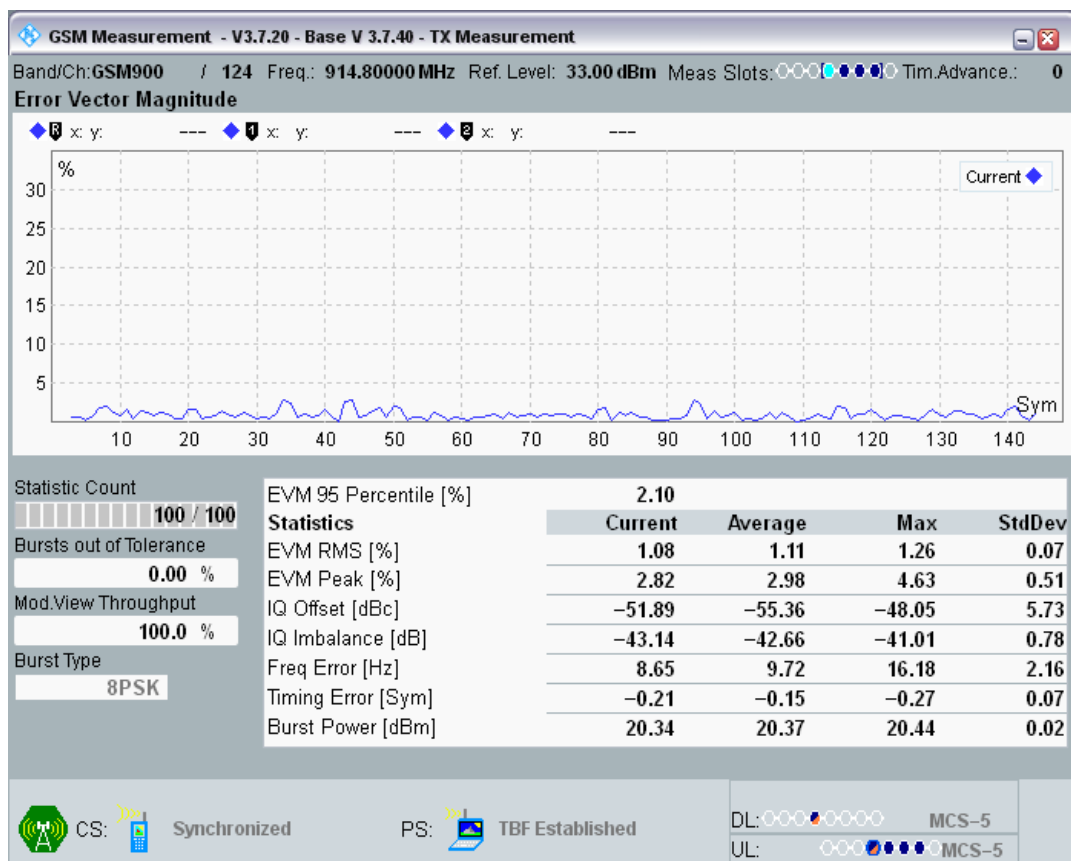


GSM900 Channel=124 Gamma=6;6;6;6 RA250.png

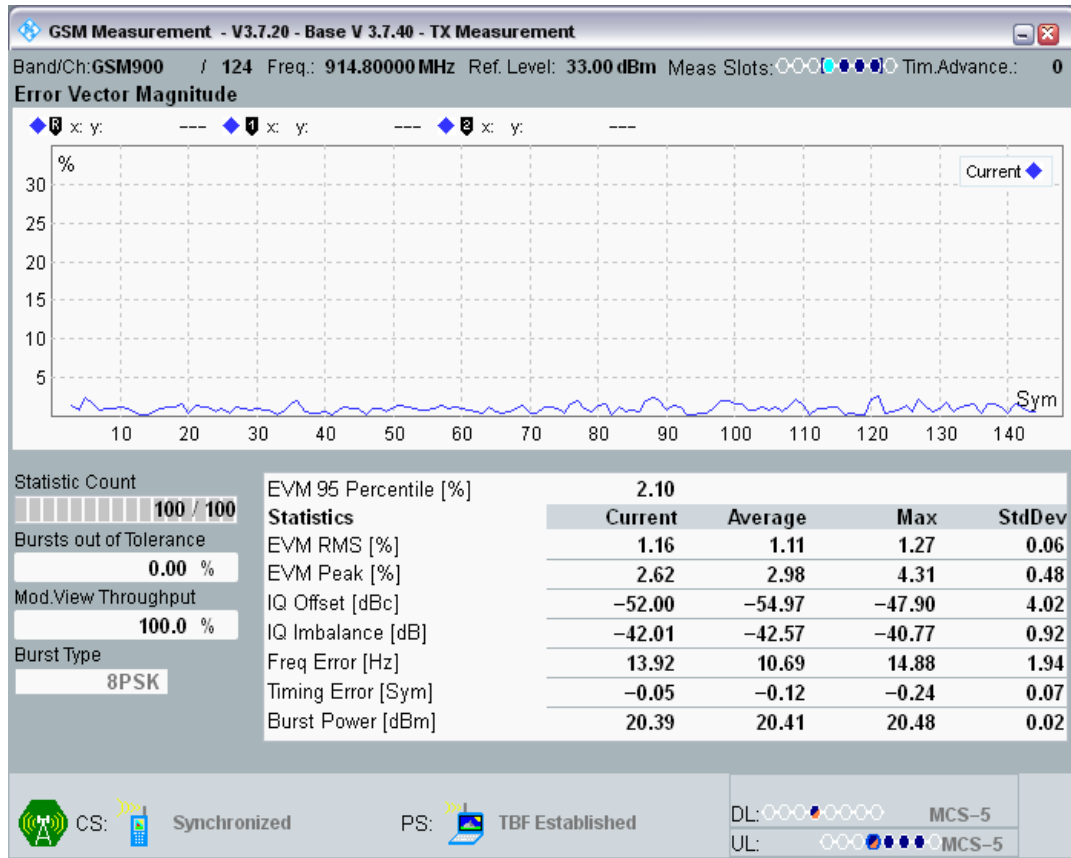


GSM900 Channel=124 Gamma=6;6;6;6 TU3.png

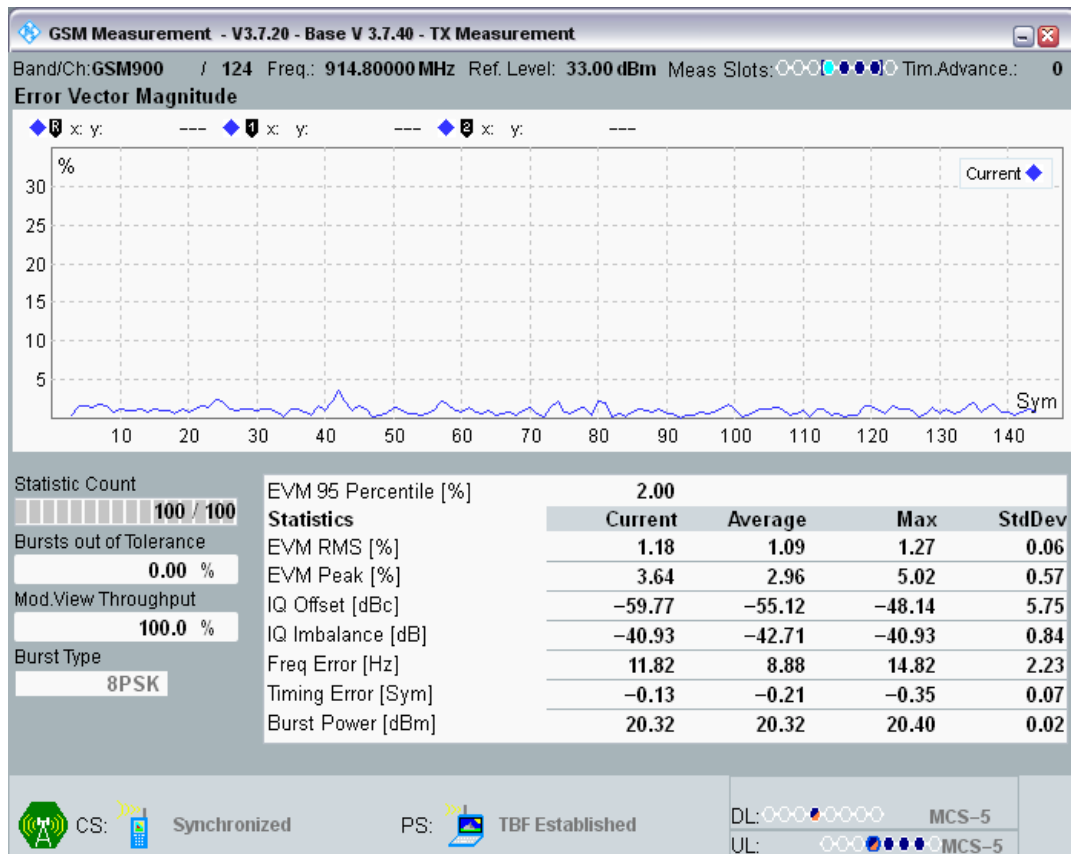


GSM900 Channel=124 Gamma=6;6;6;6 TU50.png

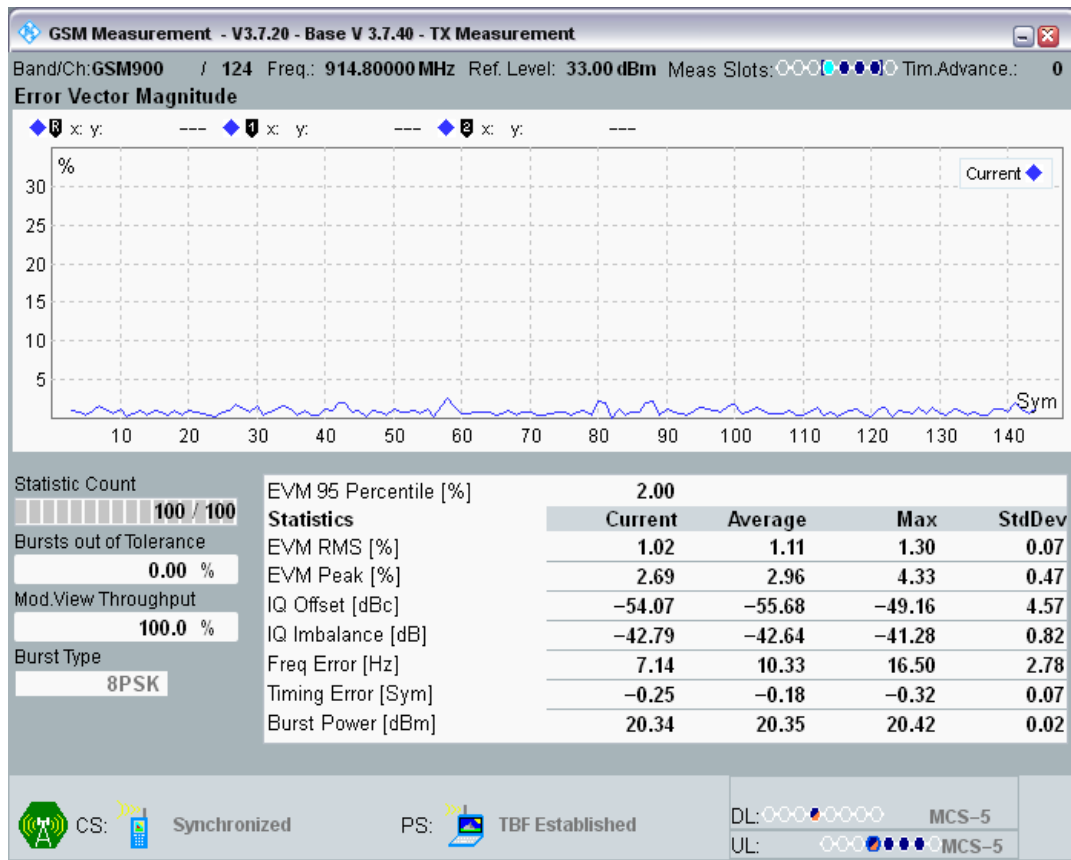


GSM900 Channel=60 Gamma=6;6;6;6 HT100.png

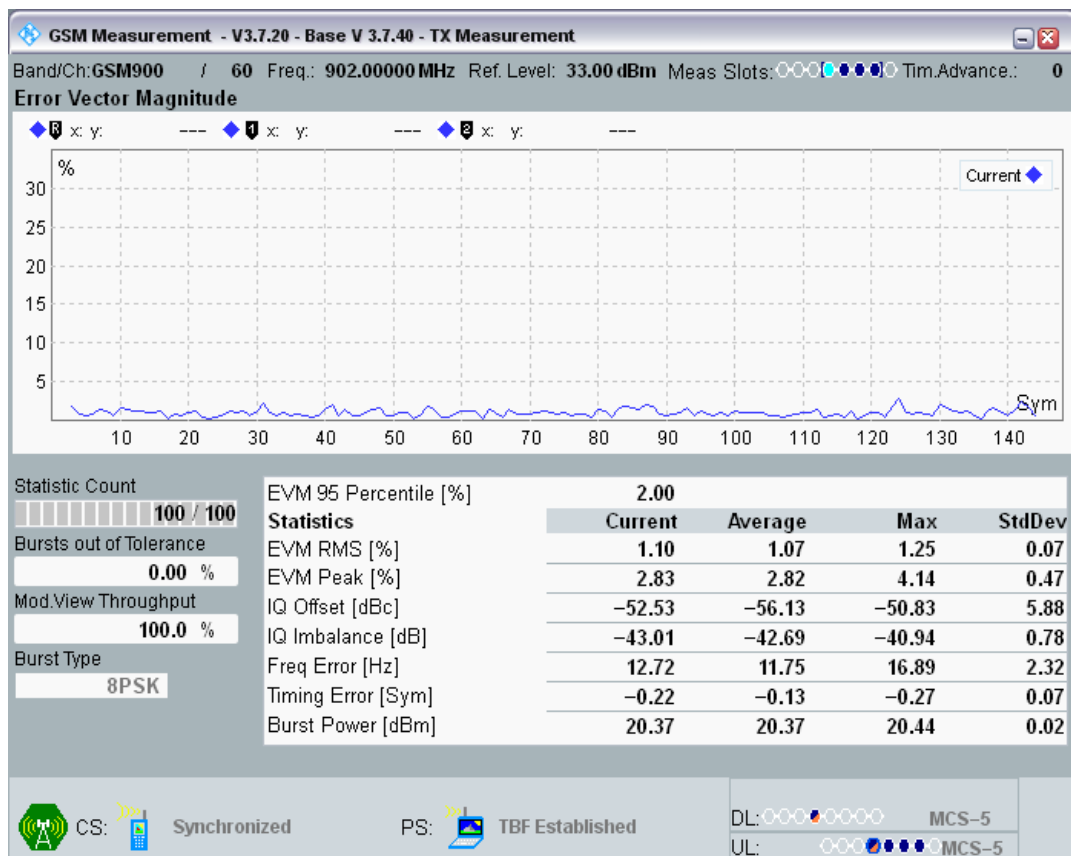


GSM900 Channel=60 Gamma=6;6;6;6 RA250.png

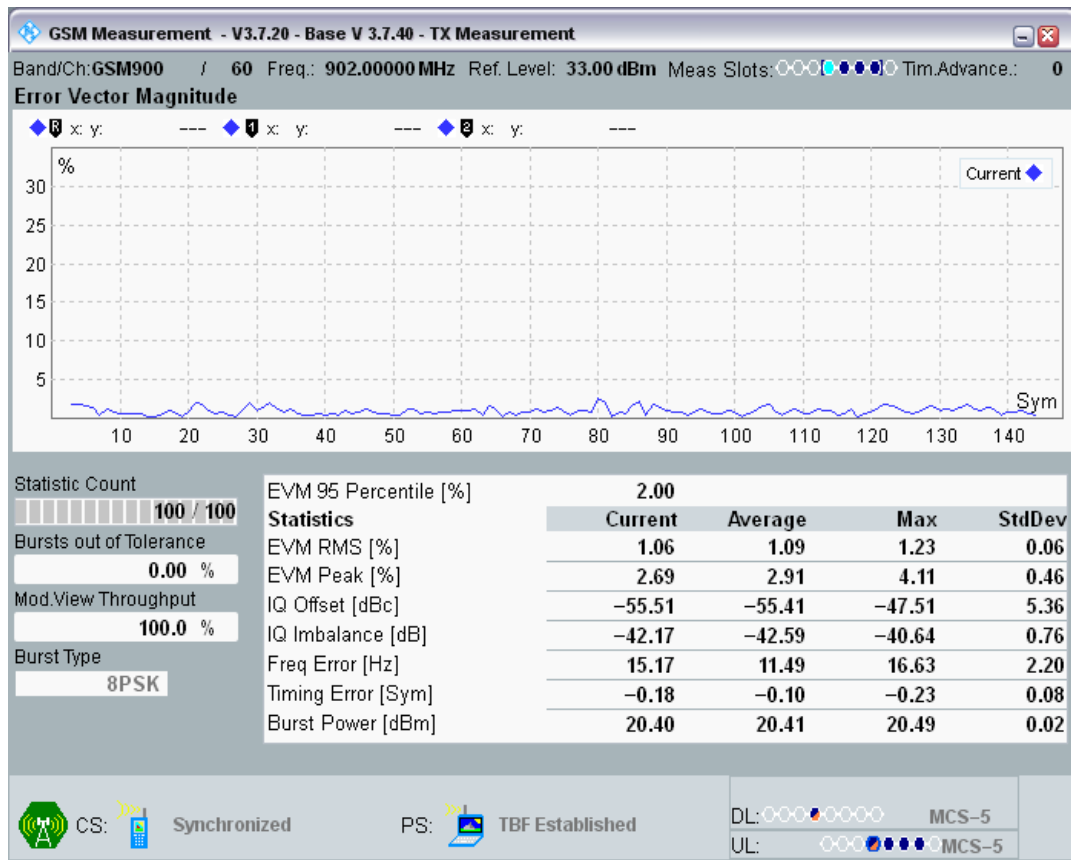


GSM900 Channel=60 Gamma=6;6;6;6 TU3.png

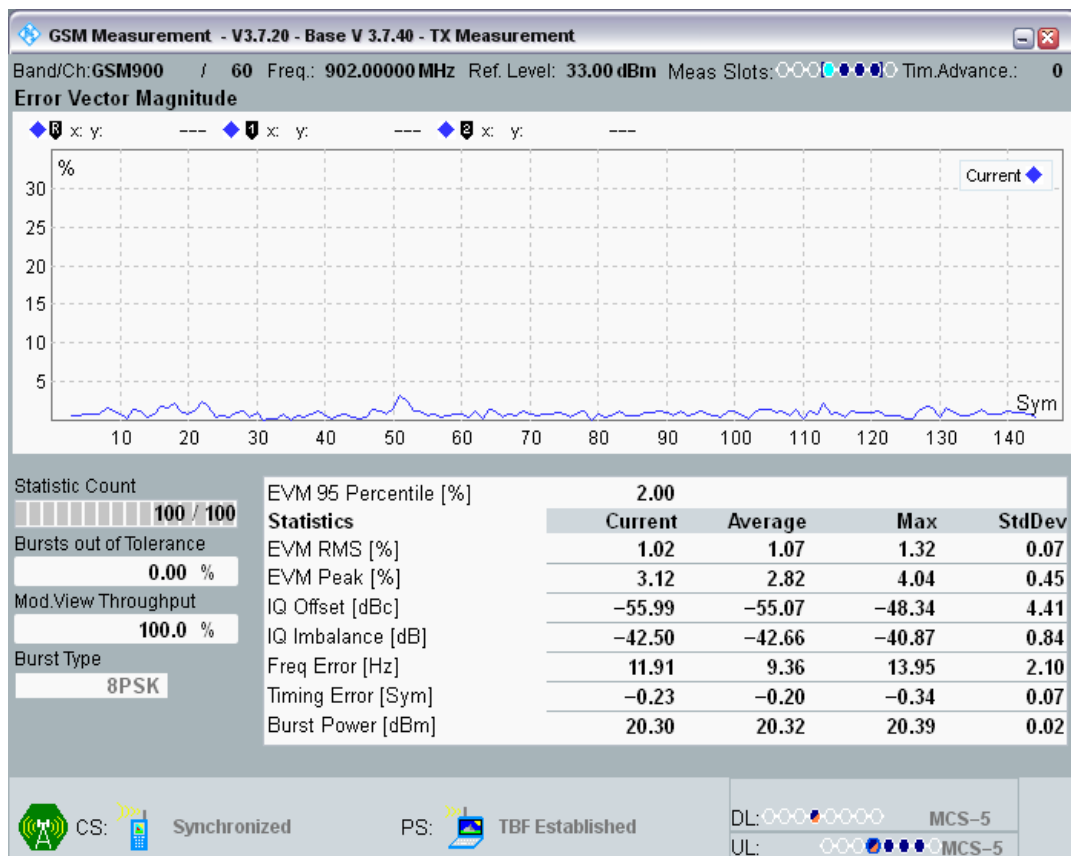


GSM900 Channel=60 Gamma=6;6;6 TU50.png

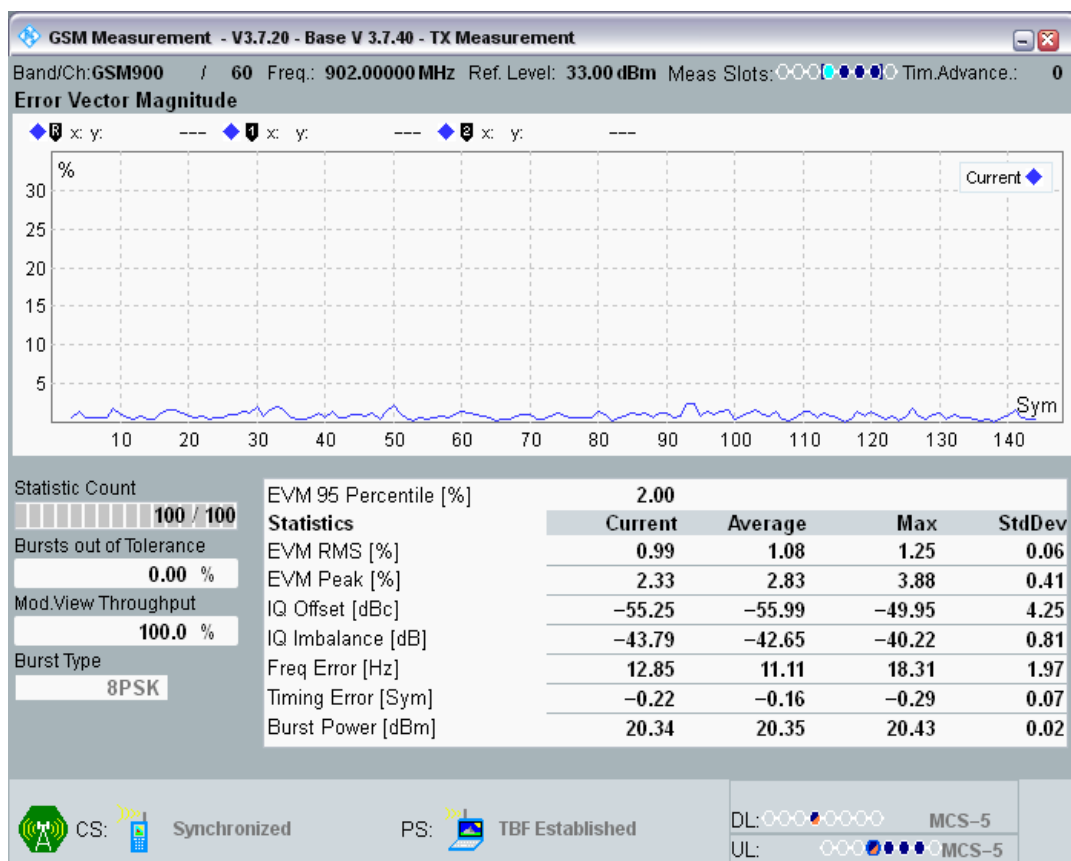


GSM900 Channel=975 Gamma=6;6;6 HT100.png

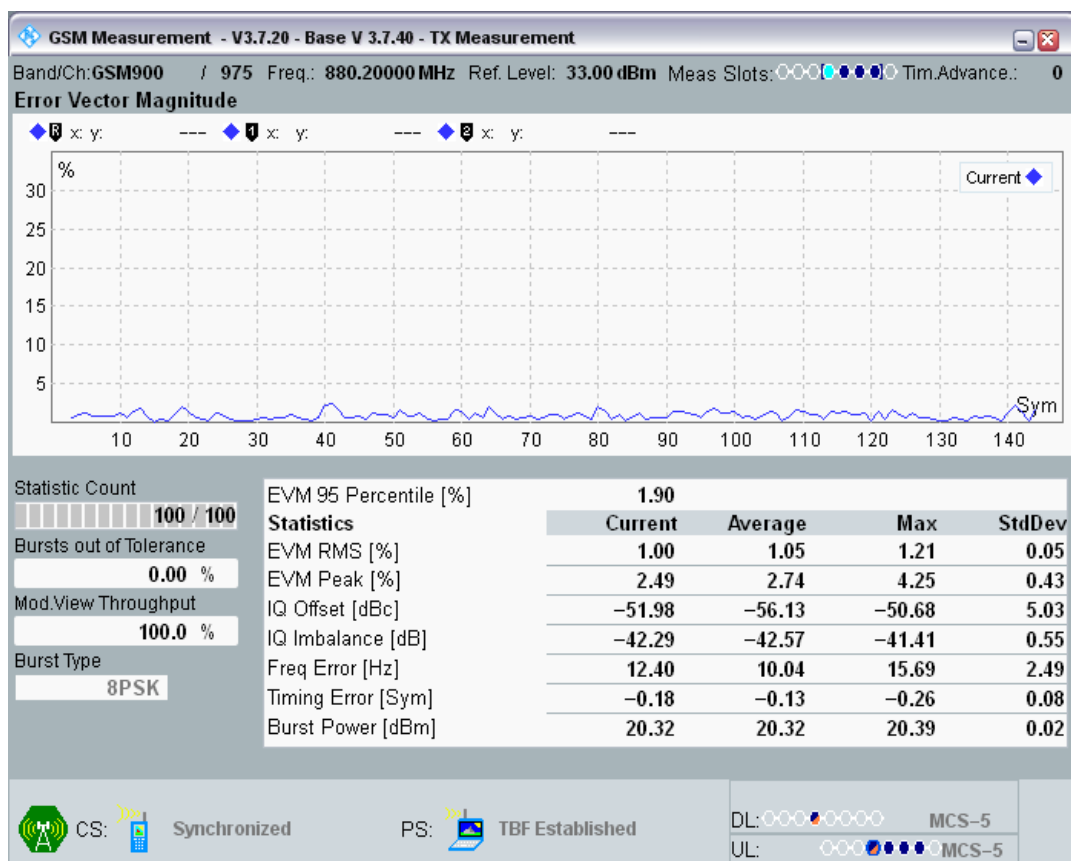


GSM900 Channel=975 Gamma=6;6;6 RA250.png

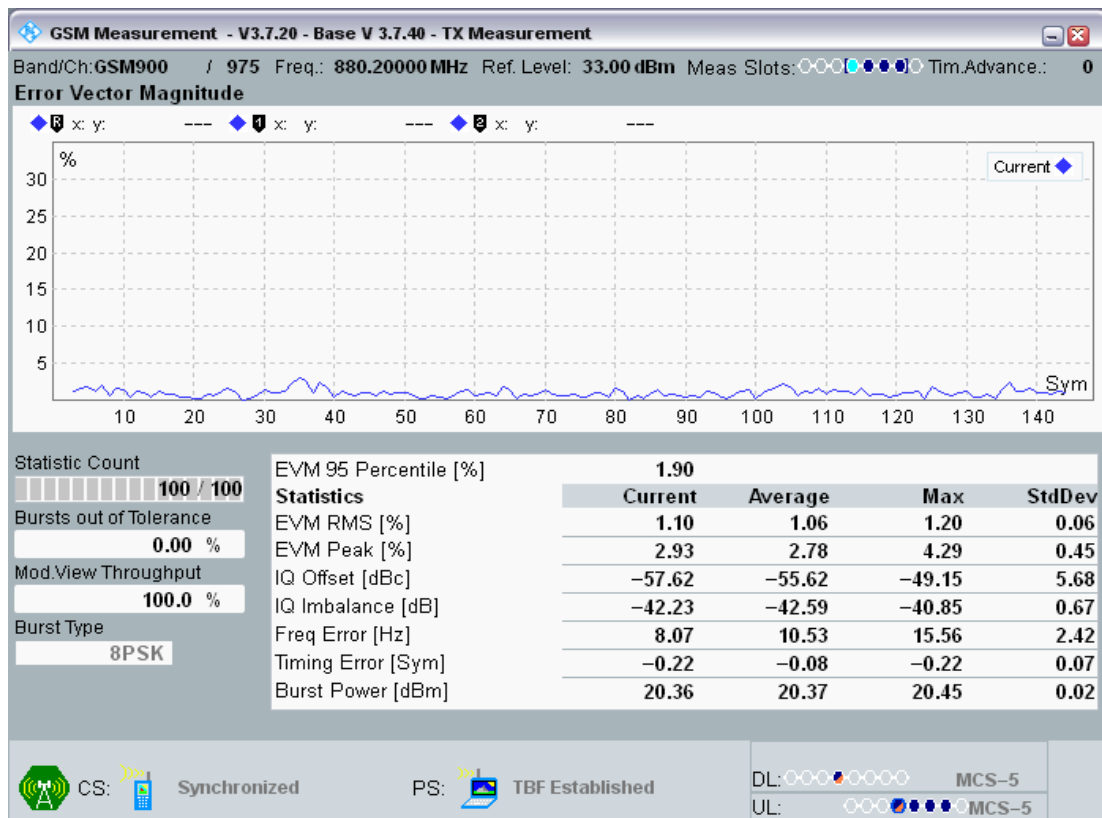


GSM900 Channel=975 Gamma=6;6;6 TU3.png

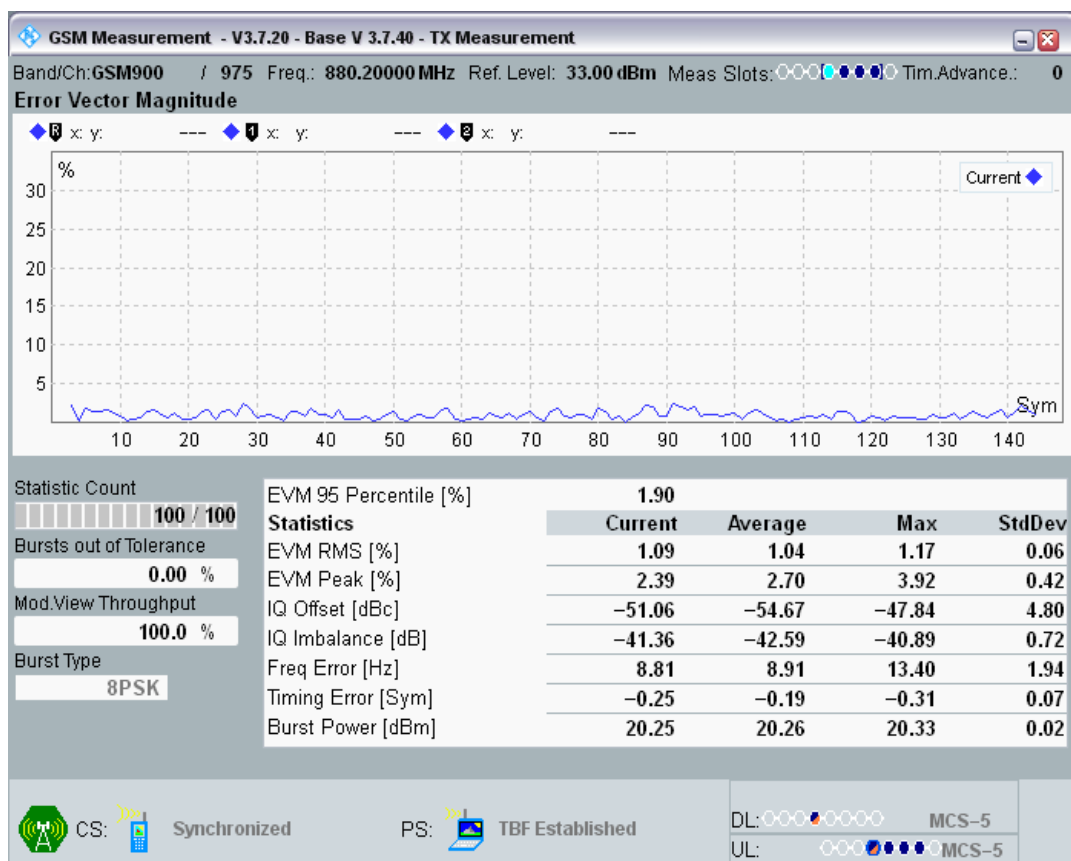


GSM900 Channel=975 Gamma=6;6;6;6 TU50.png

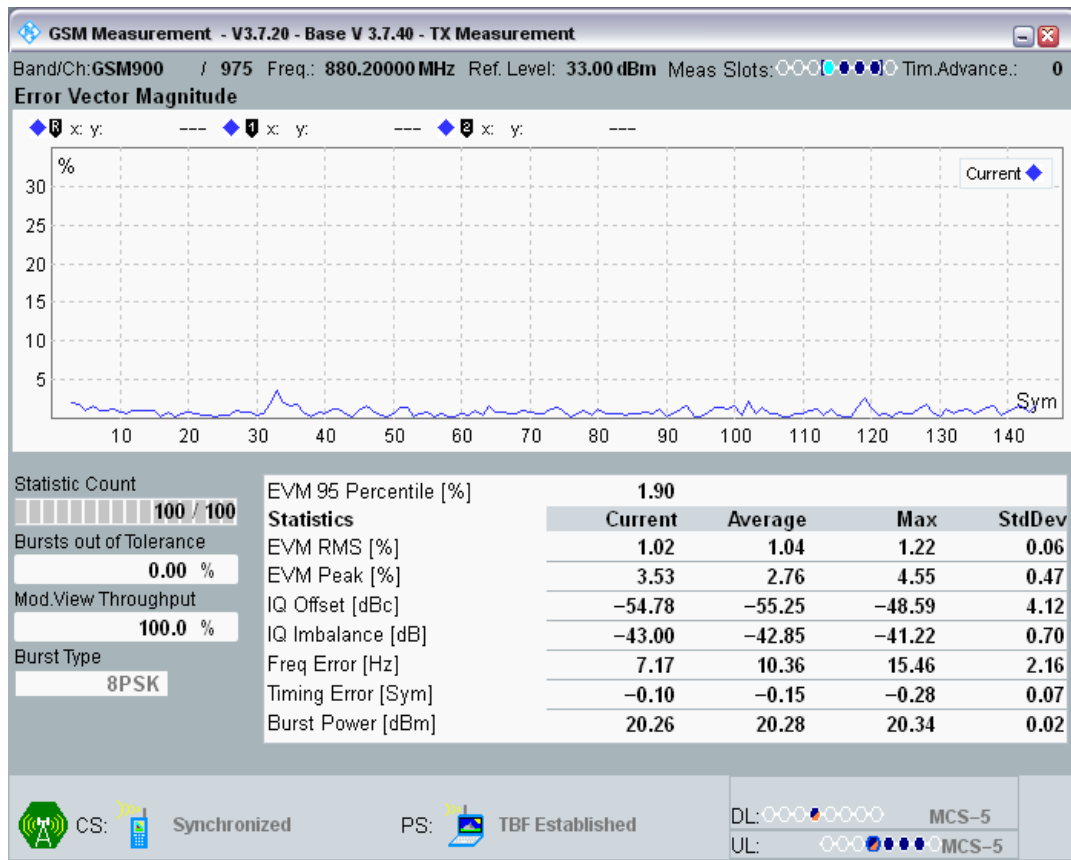


DCS1800 Channel=512 Gamma=5;5;5;5 HT100.png

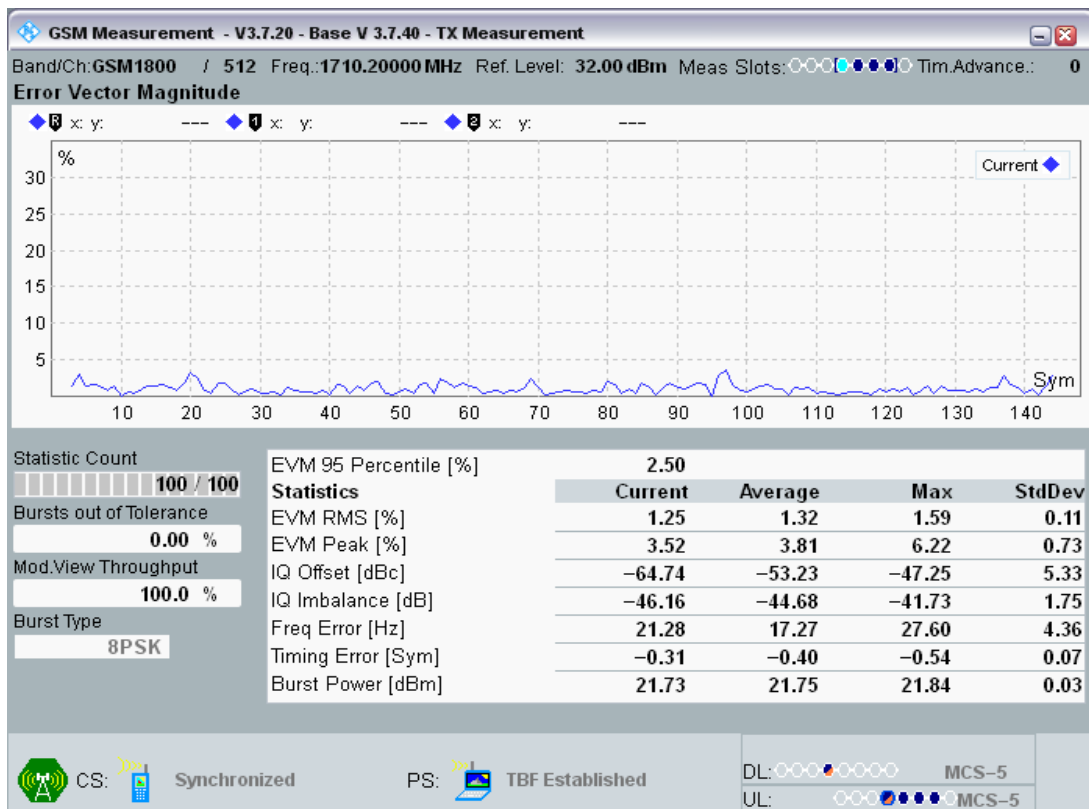


DCS1800 Channel=512 Gamma=5;5;5;5 RA130.png

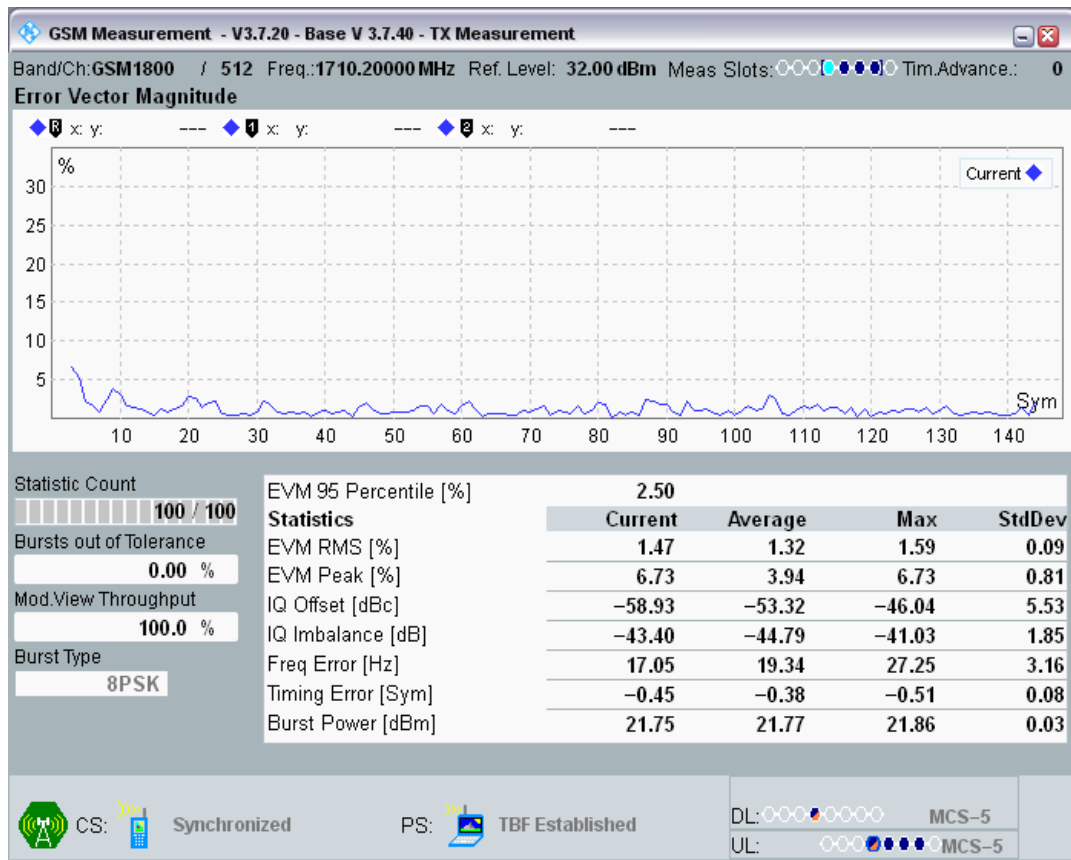


DCS1800 Channel=512 Gamma=5;5;5;5 TU1_5.png

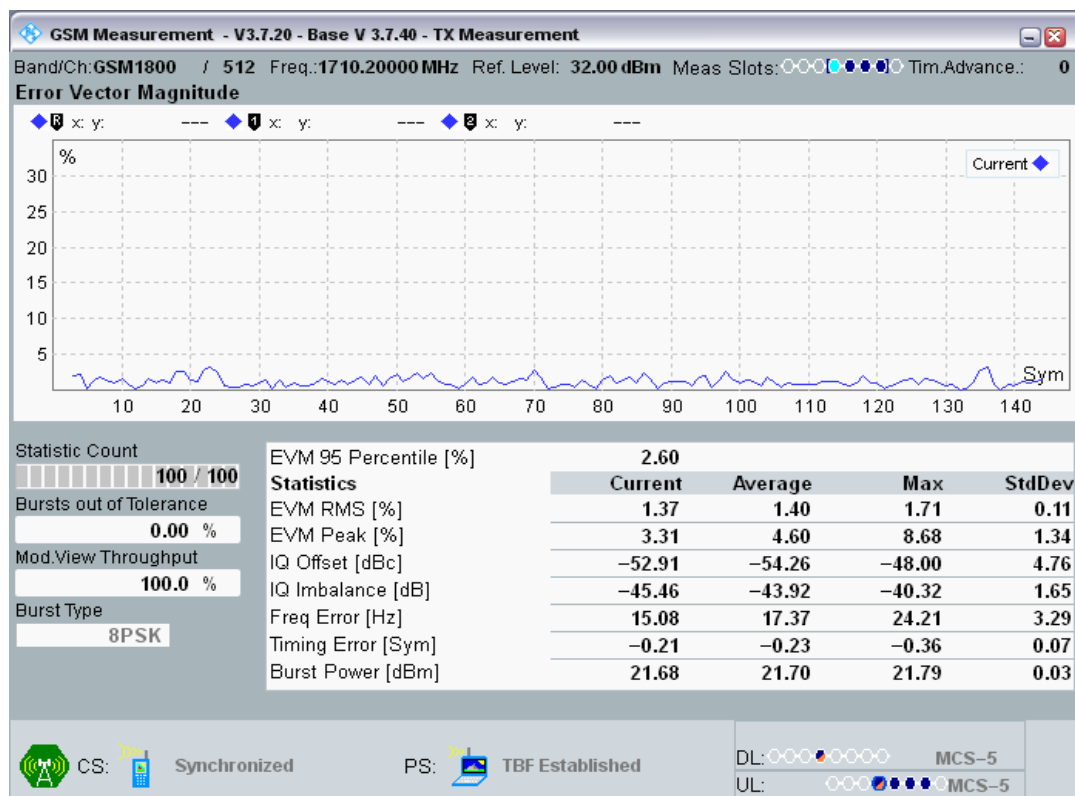


DCS1800 Channel=512 Gamma=5;5;5;5 TU50.png

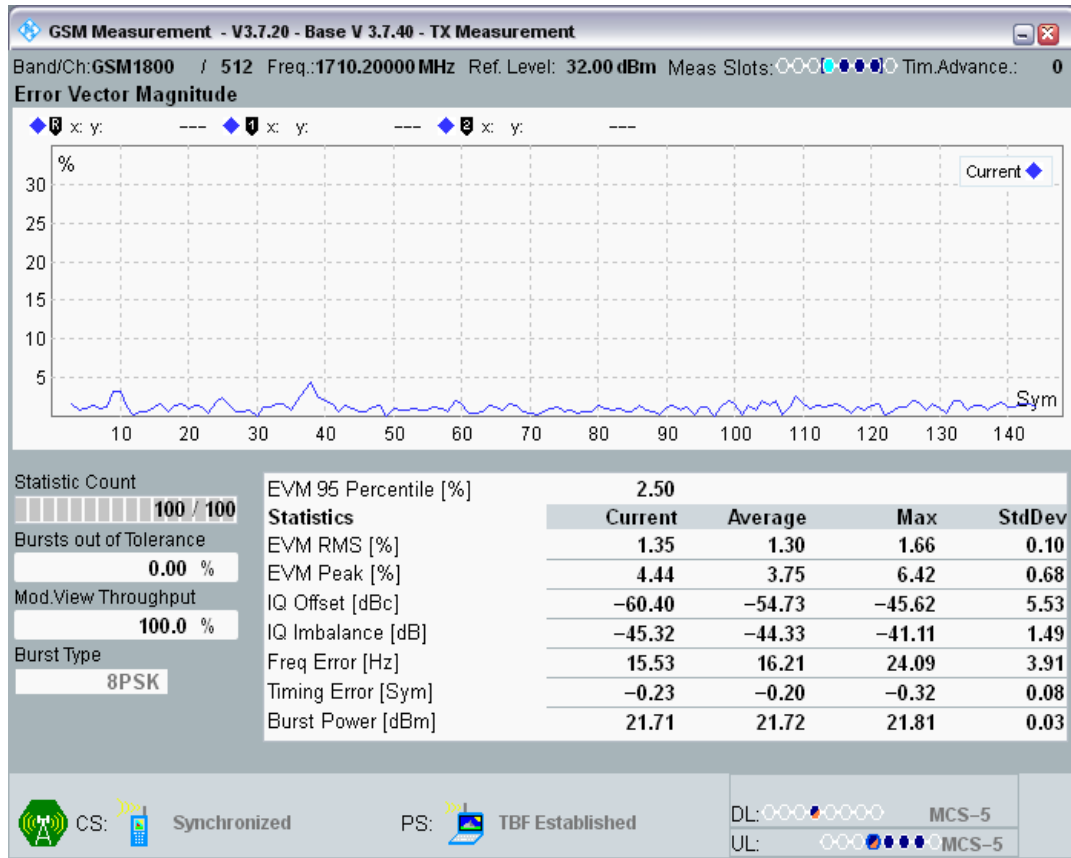


DCS1800 Channel=700 Gamma=5;5;5;5 HT100.png

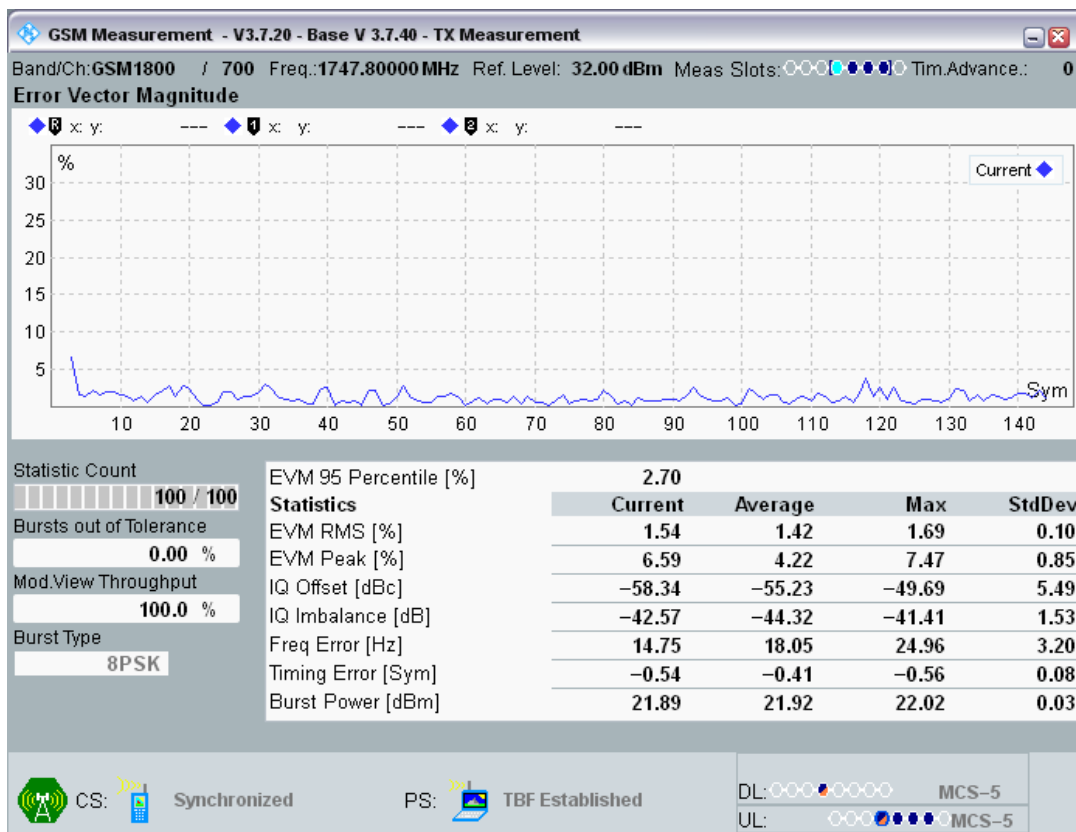


DCS1800 Channel=700 Gamma=5;5;5;5 RA130.png

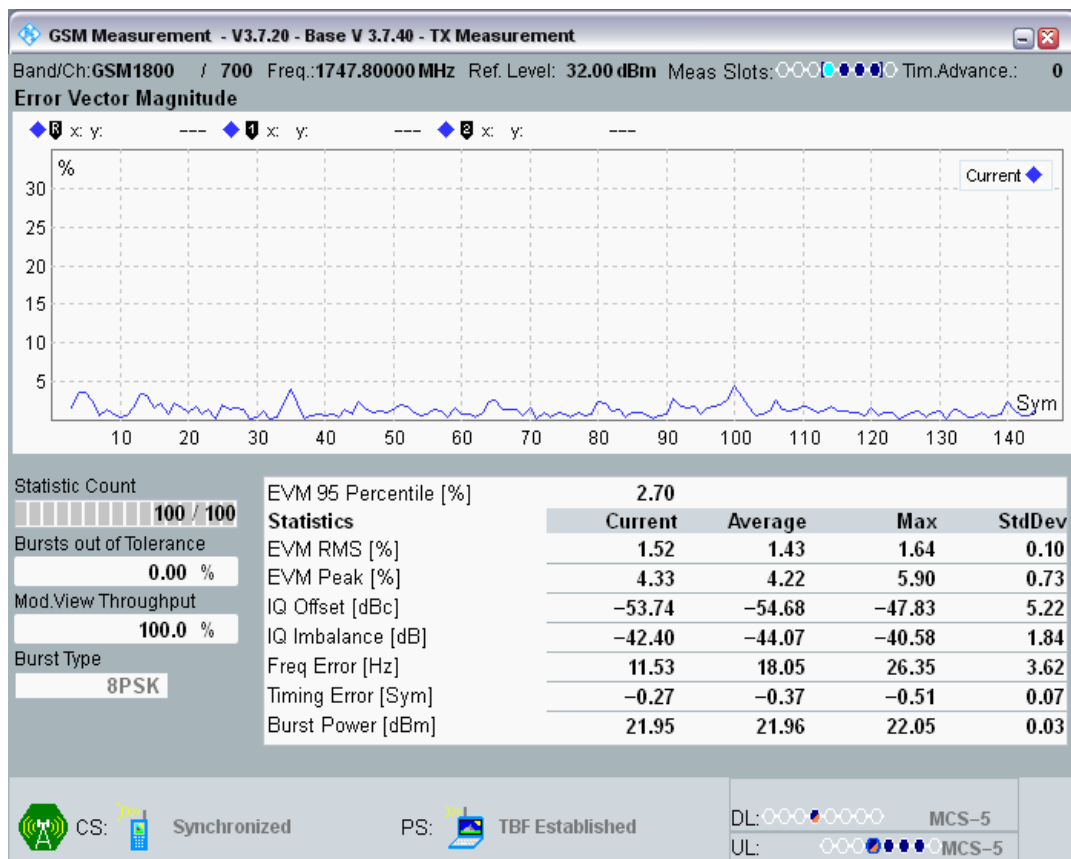


DCS1800 Channel=700 Gamma=5;5;5;5 TU1_5.png

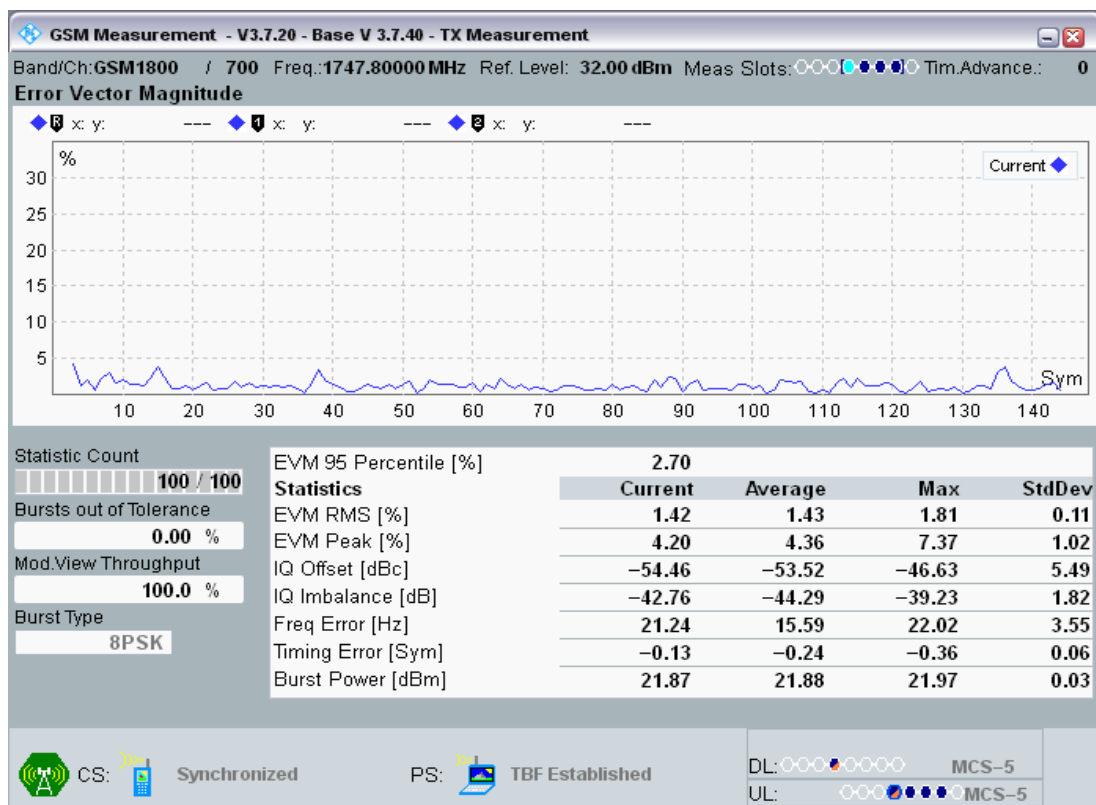


DCS1800 Channel=700 Gamma=5;5;5;5 TU50.png

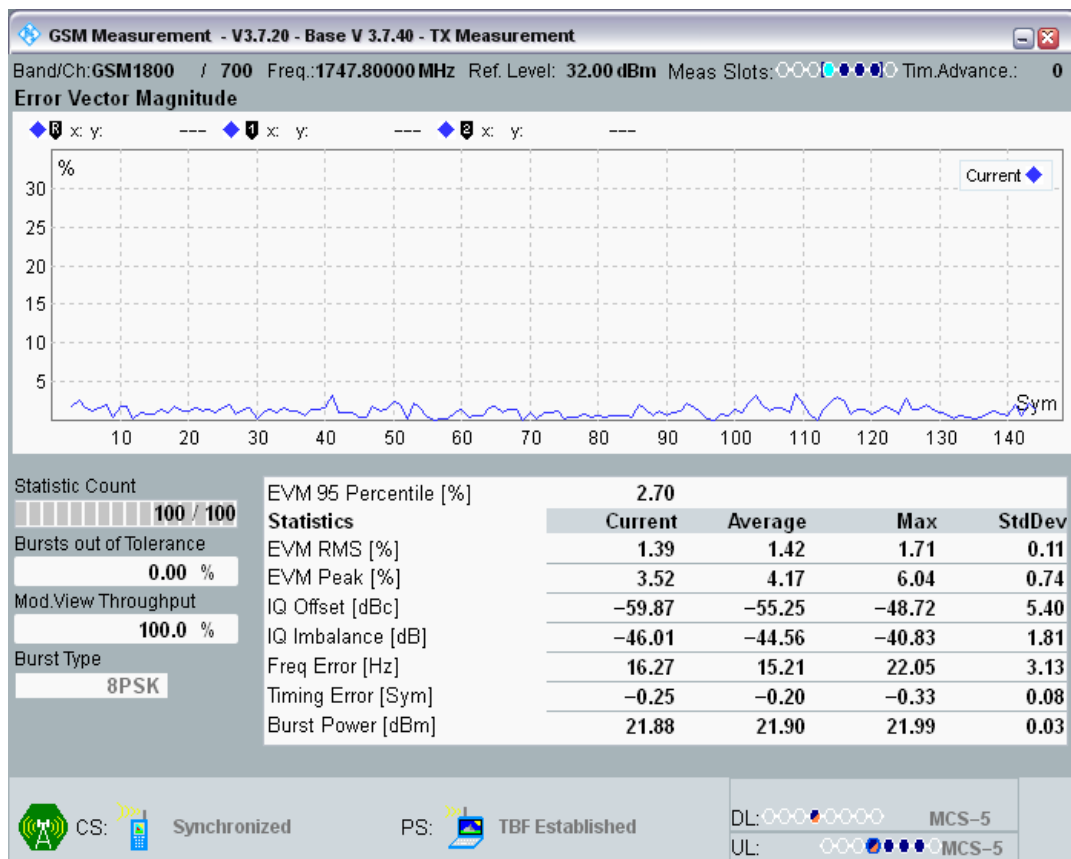


DCS1800 Channel=885 Gamma=5;5;5;5 HT100.png

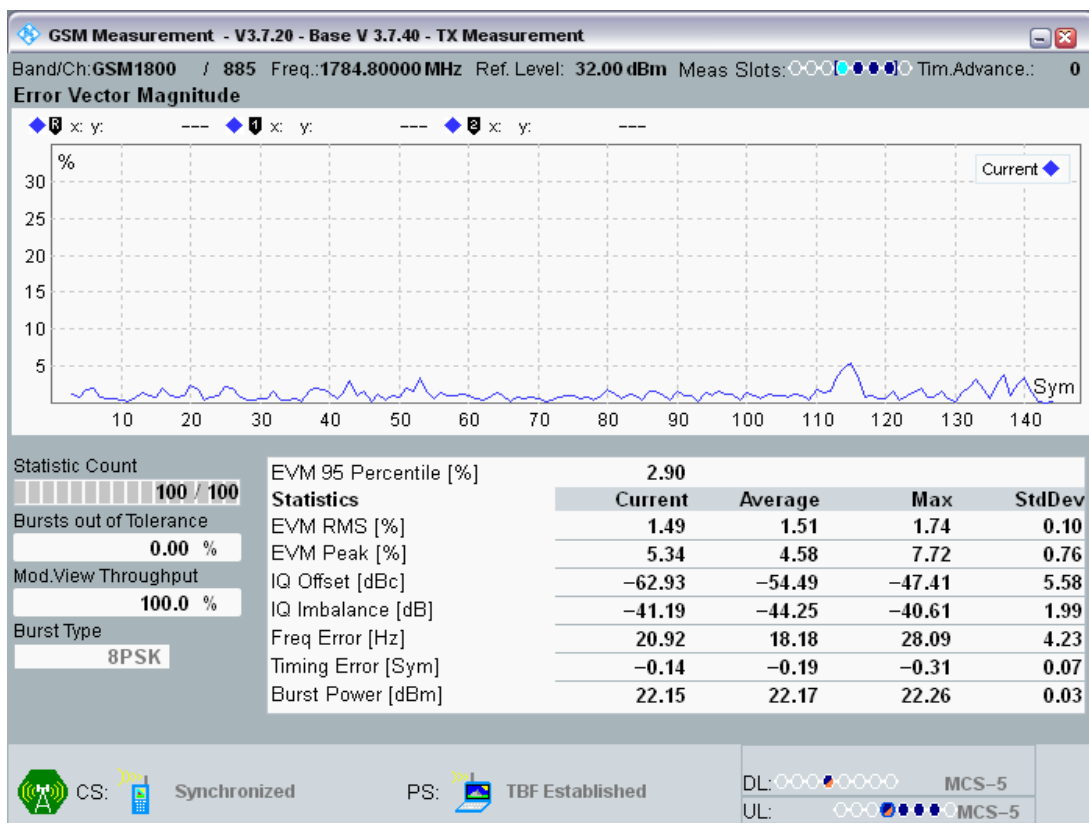


DCS1800 Channel=885 Gamma=5;5;5;5 RA130.png

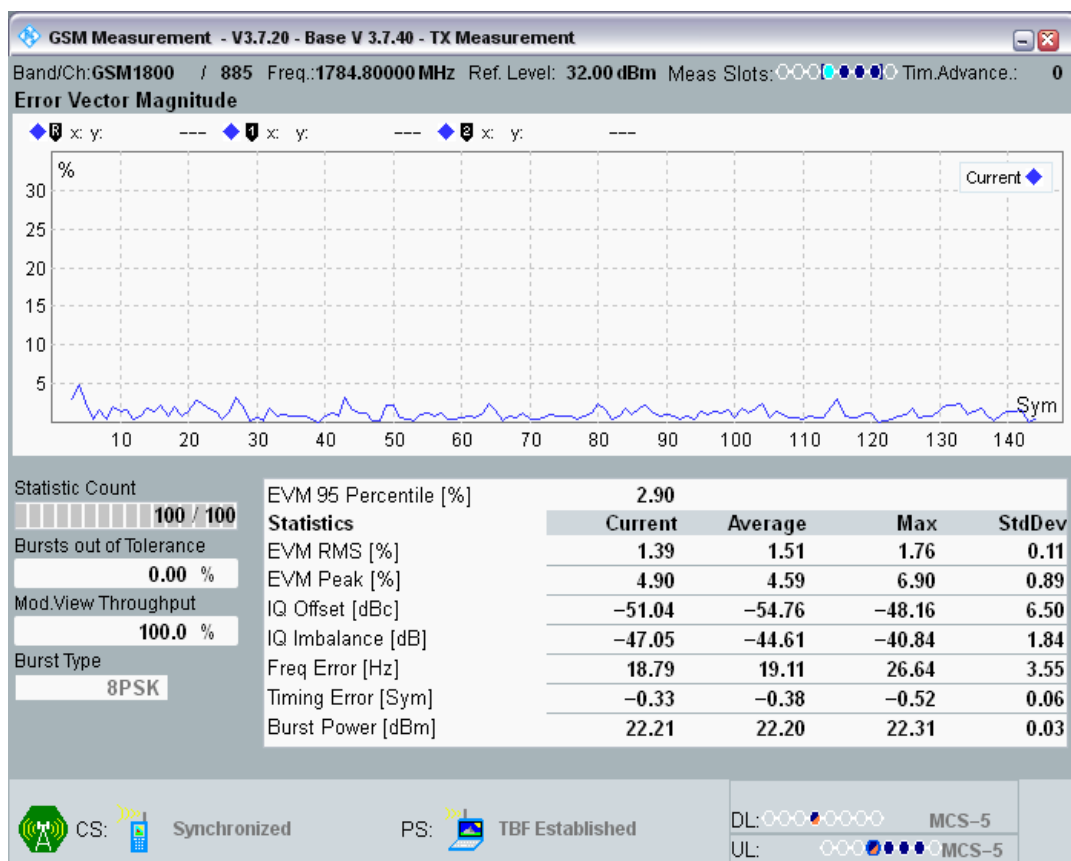

DCS1800 Channel=885 Gamma=5;5;5;5 TU1_5.png

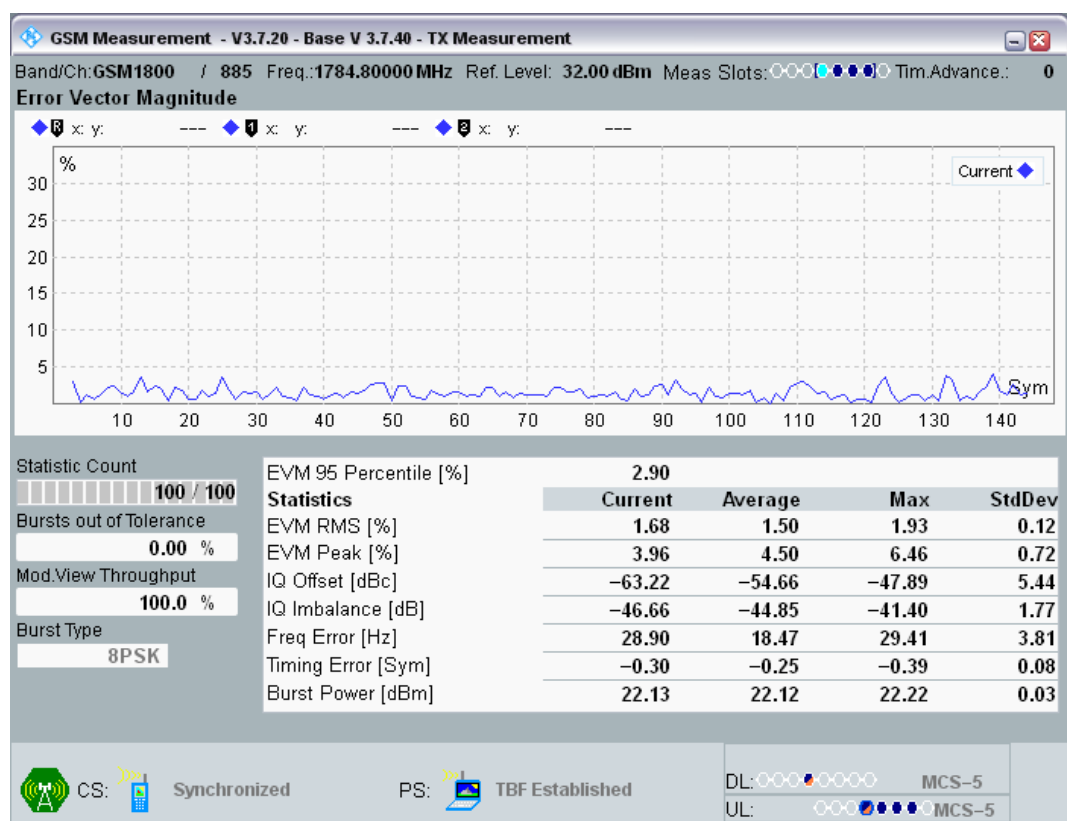

DCS1800 Channel=885 Gamma=5;5;5;5 TU50.png

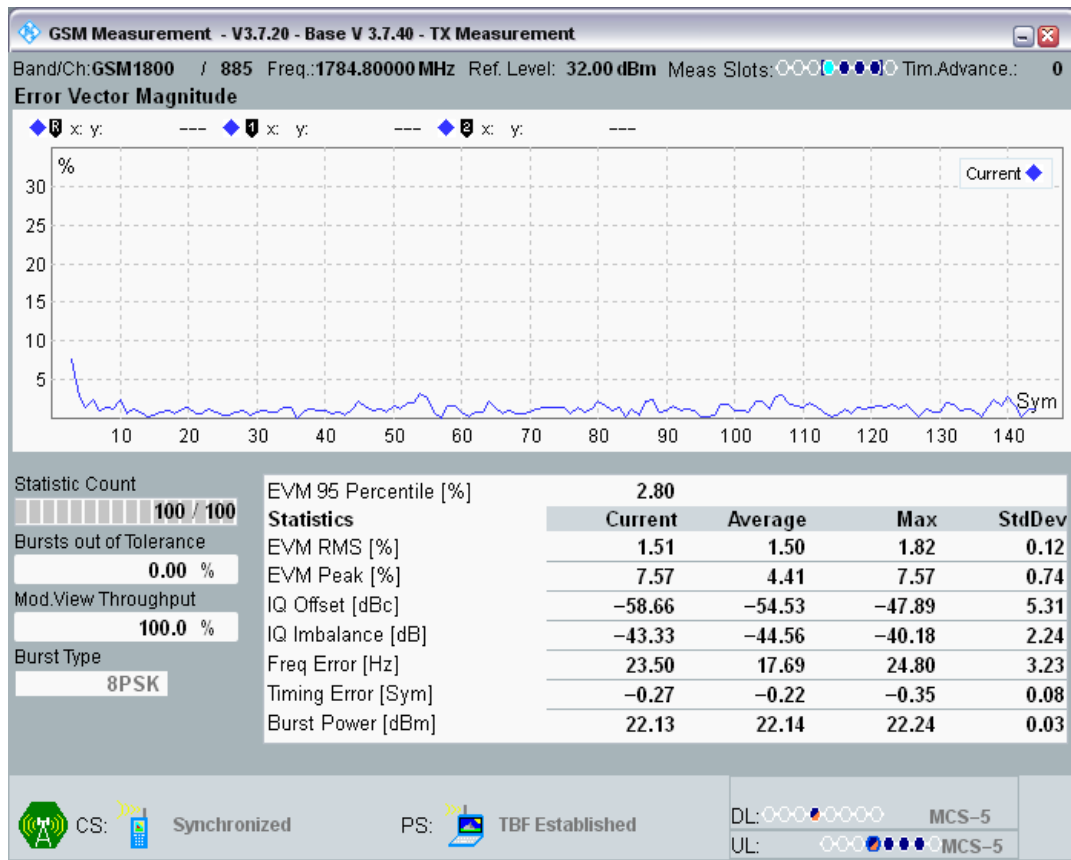

Clause 4.2.28 EGPRS Transmitter output power

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low (dBm)	Limit high (dBm)	Limit	Verdict
GSM900	975	880.2	6;6;6;6	PvT	-	-	-		PASS
GSM900	975	880.2	6;6;6;6	Pow er @ slot1	20.28595	18	27		PASS
GSM900	975	880.2	6;6;6;6	Pow er @ slot2	20.63181	18	27		PASS
GSM900	975	880.2	6;6;6;6	Pow er @ slot3	20.1174	18	27		PASS
GSM900	975	880.2	6;6;6;6	Pow er @ slot4	19.63889	18	27		PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-		PASS
GSM900	975	880.2	7;7;7;7	Pow er @ slot1	22.80048	18	27		PASS
GSM900	975	880.2	7;7;7;7	Pow er @ slot2	22.21619	18	27		PASS
GSM900	975	880.2	7;7;7;7	Pow er @ slot3	22.00443	18	27		PASS
GSM900	975	880.2	7;7;7;7	Pow er @ slot4	22.35635	18	27		PASS

GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	21.92096	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	22.14221	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	22.44058	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	22.31079	18	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	20.89337	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	20.64059	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	20.4418	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	20.26675	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	18.56699	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	18.61502	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	18.52408	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	18.51758	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	16.86041	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	16.83728	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	16.61362	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	16.76804	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	14.17535	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	14.77588	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @	14.66995	12	18	PASS

				slot3				
GSM900	975	880.2	12;12;12;12	Power @ slot4	14.80872	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	12.58789	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	12.97635	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	12.55823	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot4	13.10992	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot1	10.60645	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot2	10.93674	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot3	10.37515	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot4	10.50607	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	8.907867	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	8.103271	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	8.546692	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	8.838989	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	6.585449	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	6.68399	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	6.692596	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	6.694214	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	4.736969	0	10	PASS

GSM900	975	880.2	17;17;17;17	Power @ slot2	5.359558	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	4.265717	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	4.419556	0	10	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	20.37848	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	20.49756	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	20.05273	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	20.65366	18	27	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	22.45258	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	22.30746	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	22.46811	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	22.51459	18	27	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	22.54486	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	22.50403	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	23.08975	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	22.74841	18	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	20.47491	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	20.47769	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	20.37402	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	20.483	18	24	PASS

GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power @ slot1	18.44958	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot2	18.1347	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot3	18.43622	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot4	17.98047	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power @ slot1	16.94333	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot2	16.71497	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot3	16.94031	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot4	16.77936	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power @ slot1	14.7475	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot2	14.2645	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot3	15.10193	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot4	15.01529	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power @ slot1	12.63257	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot2	13.02737	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot3	12.87222	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot4	12.89478	10	16	PASS
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	10.93799	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	11.00385	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	10.73584	6	16	PASS

				slot3				
GSM900	60	902	14;14;14;14	Power @ slot4	10.7175	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	8.743622	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	9.001801	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	9.162384	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	8.921417	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	6.818665	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot2	6.890106	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot3	6.934357	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	6.979706	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	4.656342	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	4.781555	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	4.950745	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	4.531799	0	10	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	20.02866	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	20.41962	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot3	20.16937	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	20.41238	18	27	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	22.63348	18	27	PASS

GSM900	124	914.8	7;7;7;7	Power slot2 @	22.18417	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power slot3 @	21.97214	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power slot4 @	22.62466	18	27	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power slot1 @	22.53983	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot2 @	22.61386	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot3 @	22.71393	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power slot4 @	22.72147	18	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power slot1 @	20.74869	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power slot2 @	20.33325	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power slot3 @	20.43149	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power slot4 @	20.55344	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power slot1 @	18.85684	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power slot2 @	18.67001	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power slot3 @	18.45029	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power slot4 @	18.59521	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power slot1 @	16.96973	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power slot2 @	16.8183	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power slot3 @	16.85687	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power slot4 @	17.19495	14	20	PASS

GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	14.83014	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	14.81744	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	14.99213	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	14.7377	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	12.54968	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	12.89774	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	12.72604	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	13.14047	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	11.08203	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	10.62756	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	10.92575	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	10.6915	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	8.318054	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	8.550781	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	8.627441	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	9.163055	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	6.789215	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	6.843536	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @	6.755707	2	12	PASS

				slot3				
GSM900	124	914.8	16;16;16;16	Power @ slot4	6.439178	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	5.082336	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	4.503387	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	4.738922	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	4.788483	0	10	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	21.91965	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	21.40591	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	21.42349	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	21.94598	16	26	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	21.82629	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	21.50299	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	21.65985	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	21.08514	17	26	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	22.00867	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	21.7352	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	21.63977	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot4	21.79184	17	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	20.84698	17	23	PASS

DCS1800	512	1710.2	8;8;8;8	Power @ slot2	20.84348	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	20.68311	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	21.11349	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	18.75287	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	18.44559	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	18.80554	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	18.95157	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	16.82938	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	16.67569	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	16.68088	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	16.63193	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	14.66092	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	14.45114	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	14.63846	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	14.21292	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	13.00409	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	12.66818	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot3	12.92786	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	12.45901	8	16	PASS

DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	11.26474	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	11.47937	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	10.94431	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	10.75421	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	8.45639	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	8.831421	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	8.392395	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	8.995056	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	7.060791	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot2	6.446289	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot3	6.989655	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot4	6.360992	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT	-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot1	4.755371	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot2	4.879517	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	4.915833	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	4.696625	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	3.133881	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot2	2.703949	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @	3.002655	-3	7	PASS

				slot3				
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	2.971741	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	0.7559814	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	0.754303	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	0.6419373	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot4	1.012817	-5	5	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	21.77631	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	22.19882	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	21.6445	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	21.44373	16	26	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot1	21.79117	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	22.06015	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	21.77899	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	21.85678	17	26	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	21.82623	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	21.82663	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	21.77921	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	21.72708	17	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	21.17874	17	23	PASS

DCS1800	700	1747.8	8;8;8;8	Power @ slot2	20.71338	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot3	20.41049	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	20.79459	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	19.05969	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	18.97745	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	19.06934	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	18.56476	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	17.10287	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	16.92316	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	16.99435	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	17.22318	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	15.03979	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	14.98923	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	15.12354	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	14.88834	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	13.01294	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	12.96375	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	13.68124	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	13.19238	8	16	PASS

DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	11.76224	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	11.37482	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.95908	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	11.06165	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	9.072052	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.825928	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	8.976135	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	9.078003	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	7.141785	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	6.837677	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot3	7.047974	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	7.131195	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	4.99234	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	4.972107	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	4.96637	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	5.374176	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	2.949066	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	2.909302	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @	2.66272	-3	7	PASS


				slot3				
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	2.908905	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.6964722	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	1.13385	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.6684875	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	1.209839	-5	5	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	22.11975	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	22.18042	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	22.02011	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	22.03394	16	26	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	22.32056	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	22.19284	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	21.96292	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	22.0177	17	26	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	21.92456	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	21.72638	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	22.23172	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	22.21518	17	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	20.82169	17	23	PASS

DCS1800	885	1784.8	8;8;8;8	Power @ slot2	20.99704	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	21.26089	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.04596	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	19.45215	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	18.8707	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	19.29037	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	18.82578	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	17.52502	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	17.32889	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	16.92871	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	17.03235	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	15.504	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	15.27823	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.2699	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	15.28992	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	13.47812	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	13.6145	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	13.06387	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	13.27603	8	16	PASS


DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	11.15436	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	11.20621	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	11.26962	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	10.45041	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	8.956116	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	9.764374	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	8.727814	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	8.900696	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	7.497437	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	7.140259	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	7.258636	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	6.938446	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	4.96582	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	5.393402	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	4.997955	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	4.924194	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	3.115631	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	3.083038	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @	3.381195	-3	7	PASS

				slot3				
DCS1800	885	1784.8	17;17;17;17	Power @	3.110809	-3	7	PASS
				slot4				
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @	1.220947	-5	5	PASS
				slot1				
DCS1800	885	1784.8	18;18;18;18	Power @	1.350739	-5	5	PASS
				slot2				
DCS1800	885	1784.8	18;18;18;18	Power @	1.041382	-5	5	PASS
				slot3				
DCS1800	885	1784.8	18;18;18;18	Power @	0.6109619	-5	5	PASS
				slot4				


GSM900 Channel=124 Gamma=17;17;17;17.png

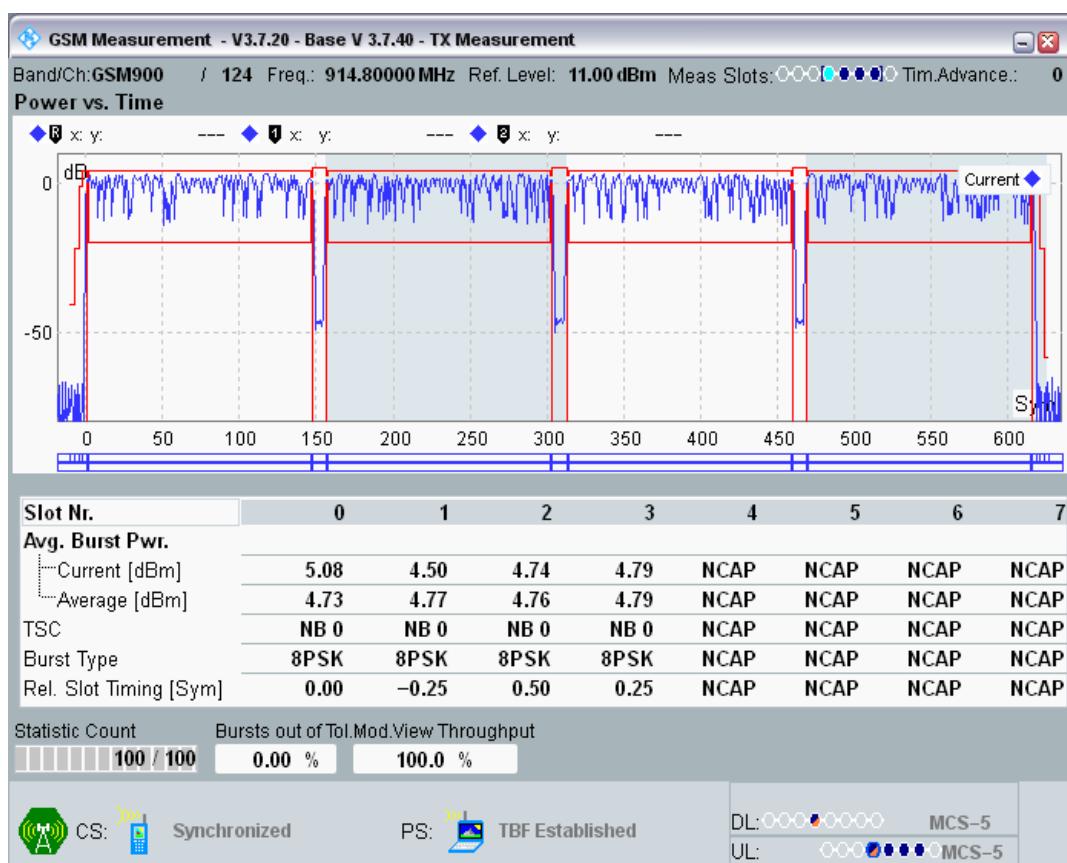

GSM900 Channel=124 Gamma=6;6;6;6.png

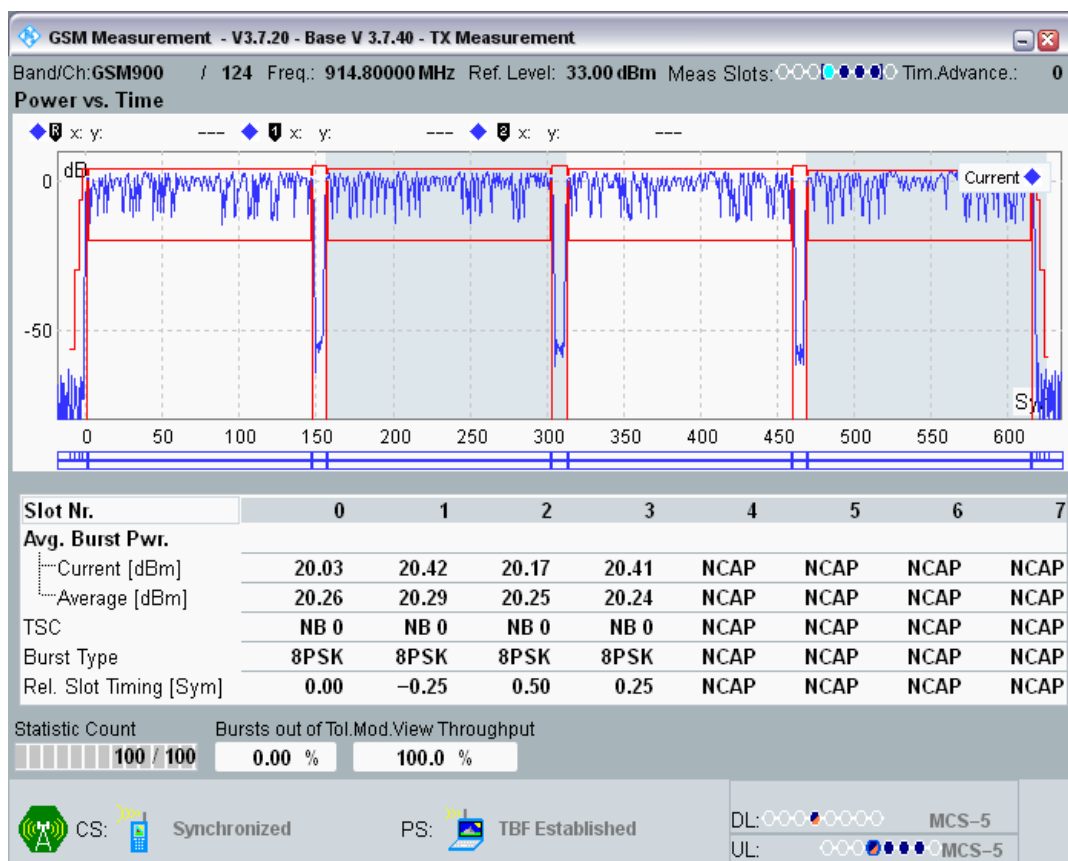

GSM900 Channel=60 Gamma=17;17;17;17.png

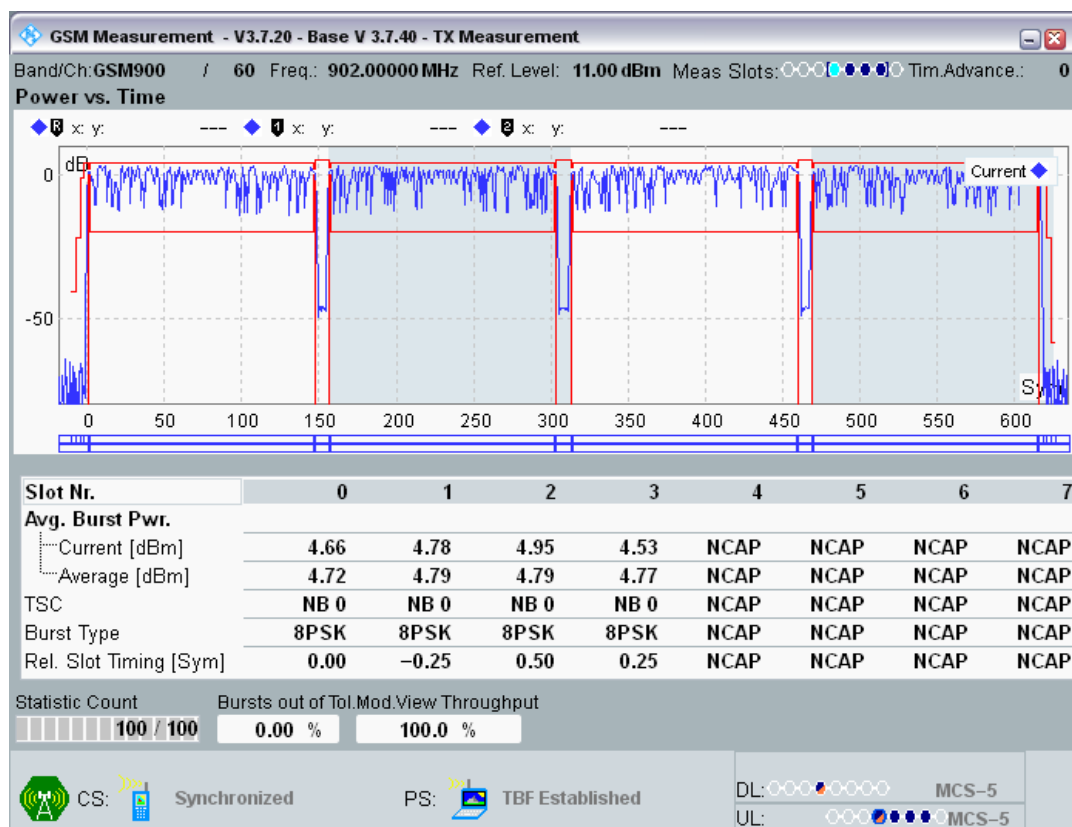


GSM900 Channel=60 Gamma=6;6;6;6.png




GSM900 Channel=975 Gamma=17;17;17;17.png




GSM900 Channel=975 Gamma=6;6;6;6.png

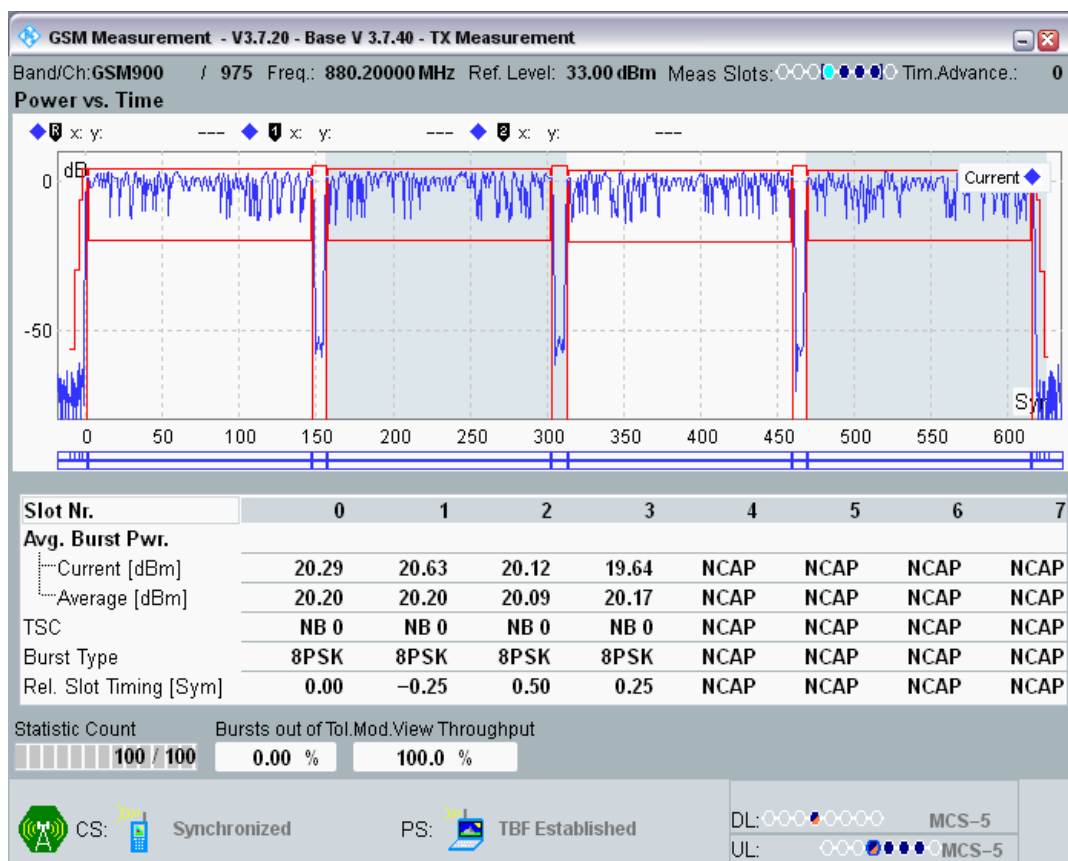


DCS1800 Channel=512 Gamma=18;18;18;18.png

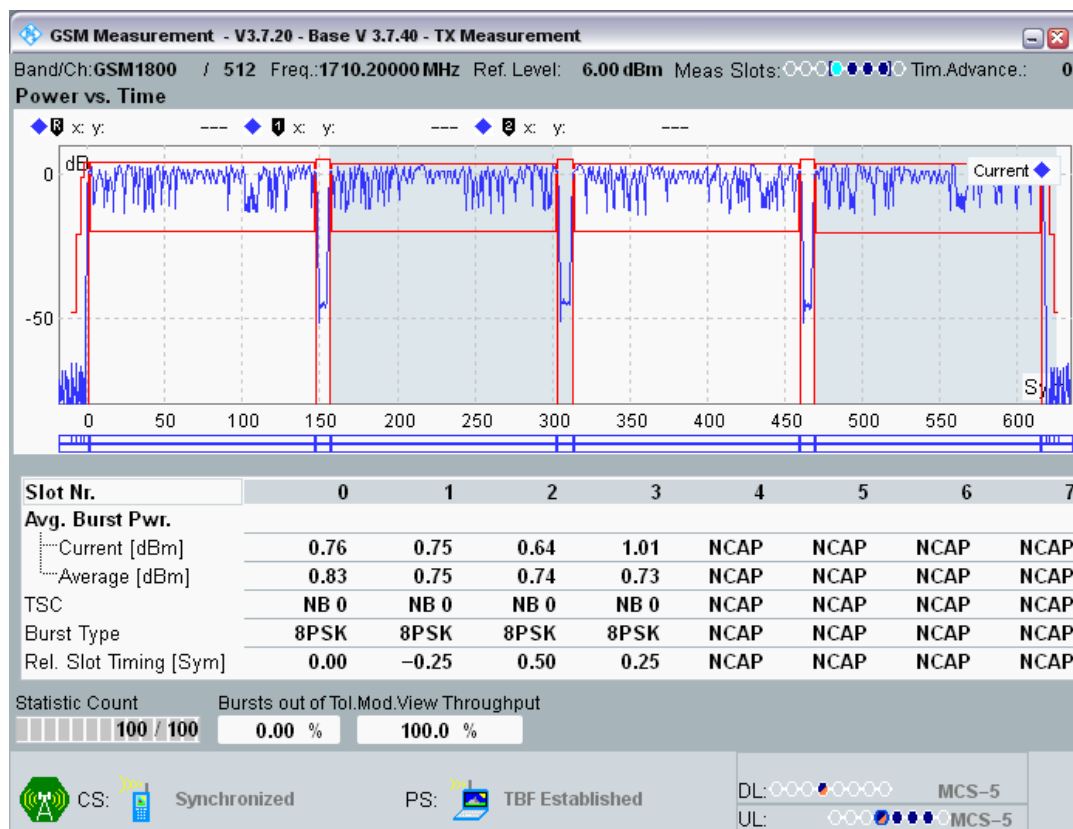


DCS1800 Channel=512 Gamma=5;5;5;5.png

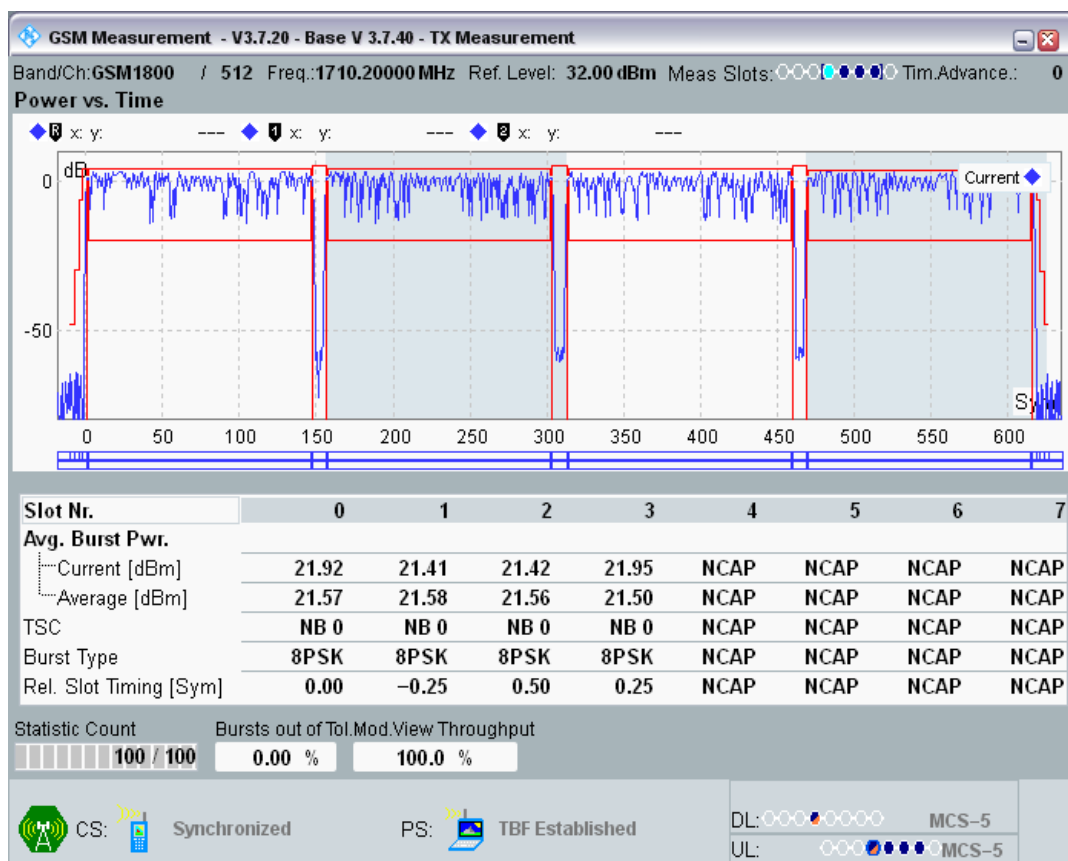


DCS1800 Channel=700 Gamma=18;18;18;18.png

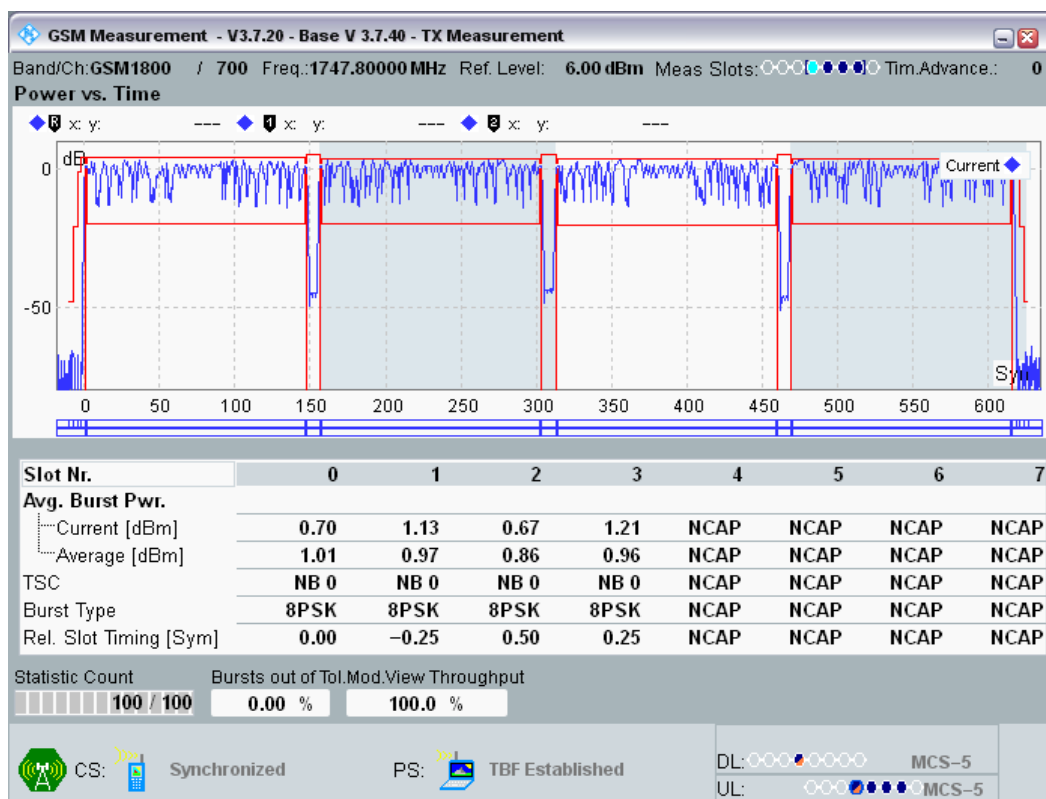


DCS1800 Channel=700 Gamma=5;5;5;5.png

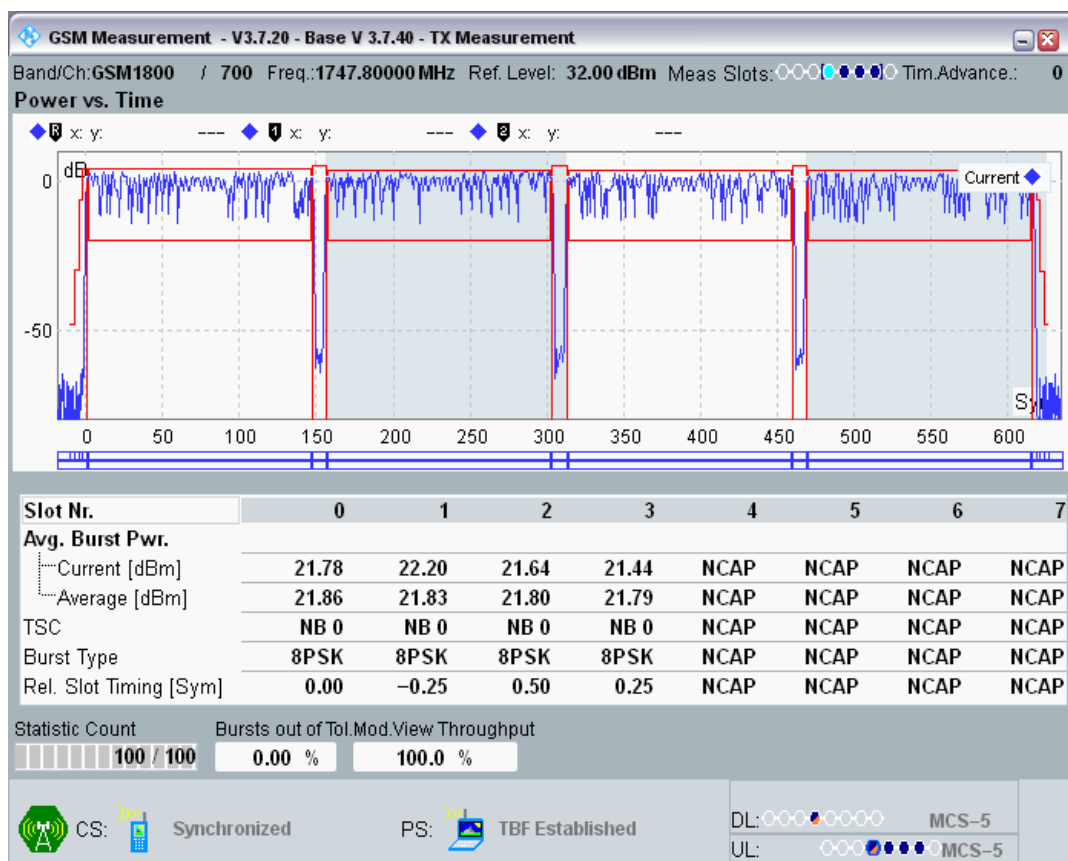

DCS1800 Channel=885 Gamma=18;18;18;18.png

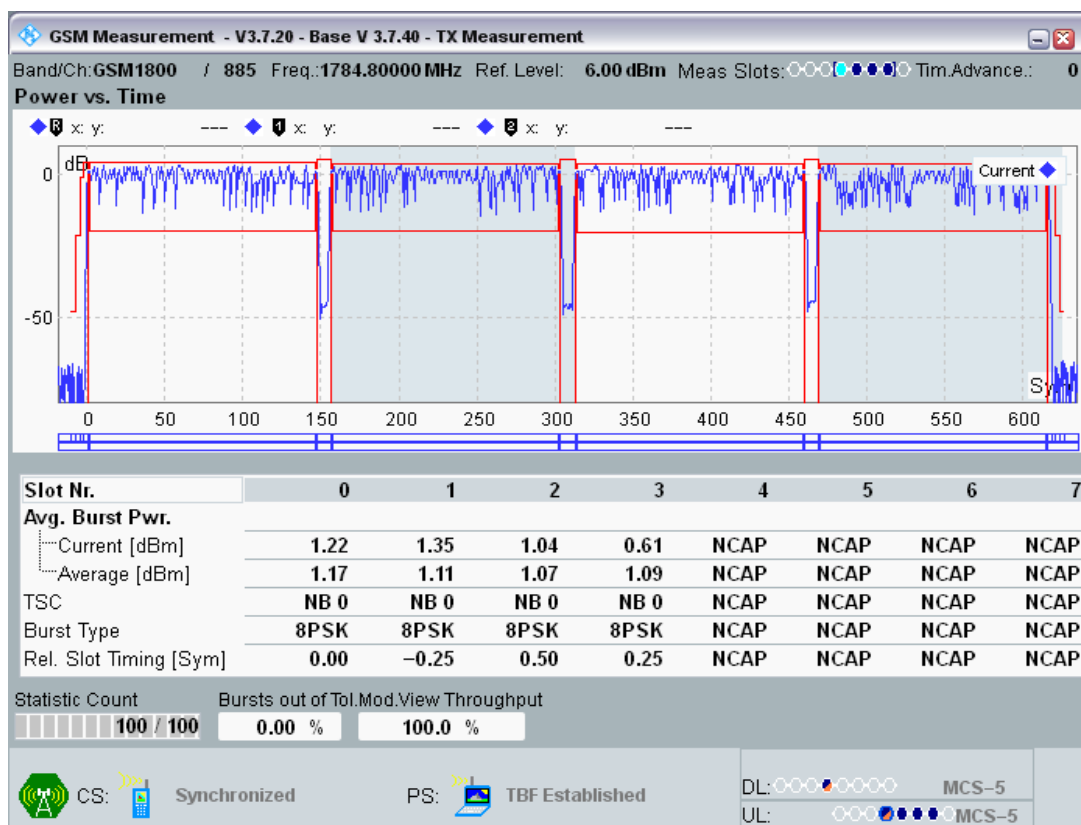

DCS1800 Channel=885 Gamma=5;5;5;5.png

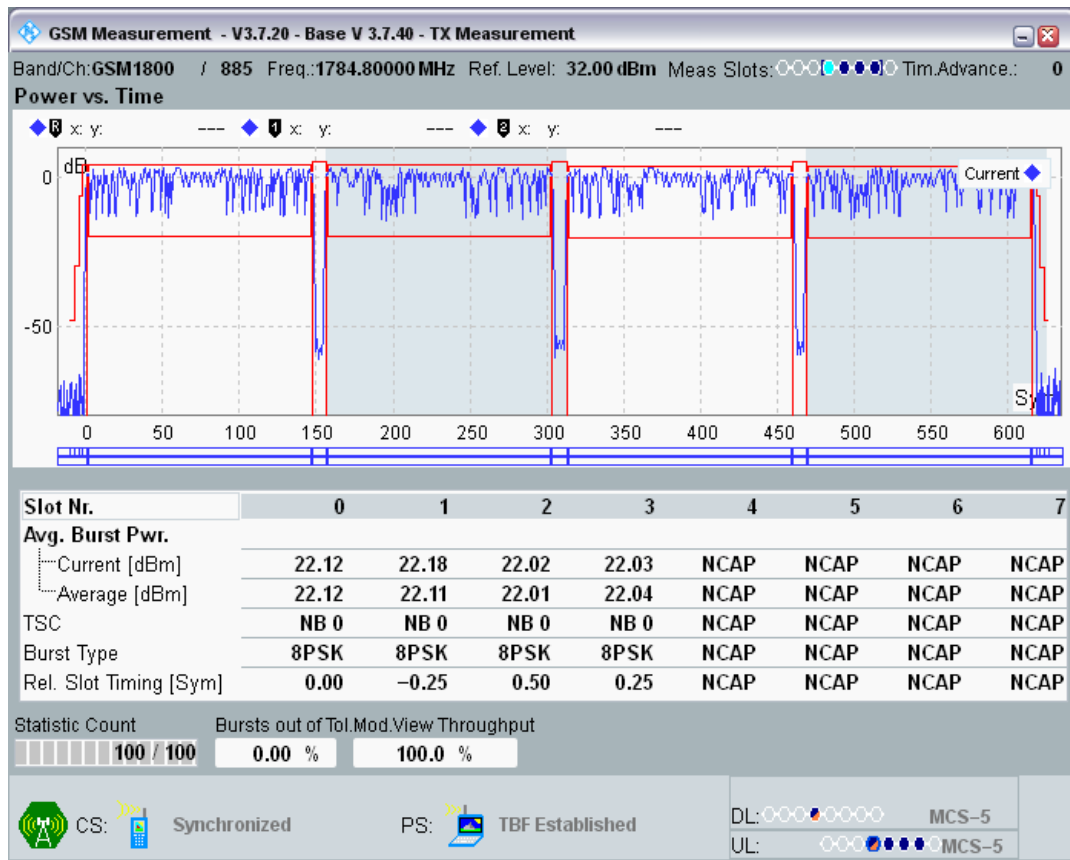

Clause 4.2.29 Modulation Spectrum in EGPRS configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-74.42	-60	-62.34	-51	PASS
GSM900	975	880.2	6;6;6;6	-1600 KHz	-73.89	-60	-61.81	-51	PASS
GSM900	975	880.2	6;6;6;6	-1400 KHz	-73.25	-60	-61.18	-51	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-72.75	-60	-60.68	-51	PASS
GSM900	975	880.2	6;6;6;6	-1000 KHz	-72.13	-60	-60.05	-51	PASS
GSM900	975	880.2	6;6;6;6	-800 KHz	-71.39	-60	-59.31	-51	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-70.37	-60	-58.30	-51	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-68.43	-60	-56.36	-36	PASS
GSM900	975	880.2	6;6;6;6	-250 KHz	-42.01	-33	-29.94	-36	PASS

GSM900	975	880.2	6;6;6;6	-200 KHz	-38.65	-30	-26.58	-36	PASS
GSM900	975	880.2	6;6;6;6	-100 KHz	-8.21	0.5	3.87	-36	PASS
GSM900	975	880.2	6;6;6;6	100 KHz	-8.13	0.5	3.95	-36	PASS
GSM900	975	880.2	6;6;6;6	200 KHz	-38.64	-30	-26.57	-36	PASS
GSM900	975	880.2	6;6;6;6	250 KHz	-41.95	-33	-29.87	-36	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-68.30	-60	-56.23	-36	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-70.15	-60	-58.08	-51	PASS
GSM900	975	880.2	6;6;6;6	800 KHz	-71.35	-60	-59.27	-51	PASS
GSM900	975	880.2	6;6;6;6	1000 KHz	-72.27	-60	-60.20	-51	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-72.73	-60	-60.66	-51	PASS
GSM900	975	880.2	6;6;6;6	1400 KHz	-73.51	-60	-61.44	-51	PASS
GSM900	975	880.2	6;6;6;6	1600 KHz	-73.82	-60	-61.75	-51	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-74.36	-60	-62.29	-51	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-74.10	-60	-62.32	-51	PASS
GSM900	60	902	6;6;6;6	-1600 KHz	-73.60	-60	-61.81	-51	PASS
GSM900	60	902	6;6;6;6	-1400 KHz	-73.02	-60	-61.24	-51	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-72.48	-60	-60.69	-51	PASS
GSM900	60	902	6;6;6;6	-1000 KHz	-71.44	-60	-59.66	-51	PASS
GSM900	60	902	6;6;6;6	-800 KHz	-71.10	-60	-59.32	-51	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-69.90	-60	-58.12	-51	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-68.06	-60	-56.28	-36	PASS
GSM900	60	902	6;6;6;6	-250 KHz	-41.69	-33	-29.90	-36	PASS
GSM900	60	902	6;6;6;6	-200 KHz	-38.13	-30	-26.34	-36	PASS
GSM900	60	902	6;6;6;6	-100 KHz	-7.77	0.5	4.01	-36	PASS


GSM900	60	902	6;6;6;6	100 KHz	-7.81	0.5	3.97	-36	PASS
GSM900	60	902	6;6;6;6	200 KHz	-38.21	-30	-26.43	-36	PASS
GSM900	60	902	6;6;6;6	250 KHz	-41.63	-33	-29.84	-36	PASS
GSM900	60	902	6;6;6;6	400 KHz	-67.92	-60	-56.13	-36	PASS
GSM900	60	902	6;6;6;6	600 KHz	-70.11	-60	-58.33	-51	PASS
GSM900	60	902	6;6;6;6	800 KHz	-71.12	-60	-59.34	-51	PASS
GSM900	60	902	6;6;6;6	1000 KHz	-71.97	-60	-60.18	-51	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-72.33	-60	-60.54	-51	PASS
GSM900	60	902	6;6;6;6	1400 KHz	-73.06	-60	-61.28	-51	PASS
GSM900	60	902	6;6;6;6	1600 KHz	-73.71	-60	-61.93	-51	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-74.06	-60	-62.28	-51	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-73.91	-60	-61.96	-51	PASS
GSM900	124	914.8	6;6;6;6	-1600 KHz	-73.92	-60	-61.96	-51	PASS
GSM900	124	914.8	6;6;6;6	-1400 KHz	-73.17	-60	-61.21	-51	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-72.92	-60	-60.97	-51	PASS
GSM900	124	914.8	6;6;6;6	-1000 KHz	-71.89	-60	-59.93	-51	PASS
GSM900	124	914.8	6;6;6;6	-800 KHz	-71.17	-60	-59.22	-51	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-70.56	-60	-58.61	-51	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-67.90	-60	-55.94	-36	PASS
GSM900	124	914.8	6;6;6;6	-250 KHz	-41.91	-33	-29.95	-36	PASS
GSM900	124	914.8	6;6;6;6	-200 KHz	-38.32	-30	-26.37	-36	PASS
GSM900	124	914.8	6;6;6;6	-100 KHz	-7.88	0.5	4.07	-36	PASS
GSM900	124	914.8	6;6;6;6	100 KHz	-7.95	0.5	4.00	-36	PASS
GSM900	124	914.8	6;6;6;6	200 KHz	-38.43	-30	-26.47	-36	PASS
GSM900	124	914.8	6;6;6;6	250 KHz	-41.86	-33	-29.90	-36	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-67.84	-60	-55.89	-36	PASS

GSM900	124	914.8	6;6;6;6	600 KHz	-70.27	-60	-58.31	-51	PASS
GSM900	124	914.8	6;6;6;6	800 KHz	-71.62	-60	-59.67	-51	PASS
GSM900	124	914.8	6;6;6;6	1000 KHz	-72.37	-60	-60.42	-51	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-73.03	-60	-61.08	-51	PASS
GSM900	124	914.8	6;6;6;6	1400 KHz	-73.34	-60	-61.39	-51	PASS
GSM900	124	914.8	6;6;6;6	1600 KHz	-74.33	-60	-62.38	-51	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-74.19	-60	-62.23	-51	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-75.39	-60	-61.77	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1600 KHz	-74.76	-60	-61.14	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1400 KHz	-74.01	-60	-60.40	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-72.76	-60	-59.14	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1000 KHz	-71.78	-60	-58.16	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-800 KHz	-70.76	-60	-57.15	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-69.77	-60	-56.15	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-66.80	-60	-53.18	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-250 KHz	-41.47	-33	-27.85	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-200 KHz	-38.37	-30	-24.76	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-100 KHz	-8.09	0.5	5.52	-36	PASS
DCS1800	512	1710.2	5;5;5;5	100 KHz	-8.36	0.5	5.25	-36	PASS
DCS1800	512	1710.2	5;5;5;5	200 KHz	-38.33	-30	-24.72	-36	PASS
DCS1800	512	1710.2	5;5;5;5	250 KHz	-42.02	-33	-28.41	-36	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-66.48	-60	-52.87	-36	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-69.65	-60	-56.04	-56	PASS
DCS1800	512	1710.2	5;5;5;5	800 KHz	-71.12	-60	-57.51	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1000 KHz	-71.73	-60	-58.12	-56	PASS


DCS1800	512	1710.2	5;5;5;5	1200 KHz	-73.04	-60	-59.42	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1400 KHz	-73.85	-60	-60.23	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1600 KHz	-75.07	-60	-61.46	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-75.75	-60	-62.14	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-75.52	-60	-62.20	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1600 KHz	-74.94	-60	-61.62	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1400 KHz	-74.30	-60	-60.98	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-73.32	-60	-60.01	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1000 KHz	-72.30	-60	-58.98	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-800 KHz	-71.40	-60	-58.09	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-70.29	-60	-56.98	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-66.82	-60	-53.50	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-250 KHz	-41.56	-33	-28.24	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-200 KHz	-37.79	-30	-24.48	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-100 KHz	-7.70	0.5	5.62	-36	PASS
DCS1800	700	1747.8	5;5;5;5	100 KHz	-7.62	0.5	5.70	-36	PASS
DCS1800	700	1747.8	5;5;5;5	200 KHz	-37.83	-30	-24.51	-36	PASS
DCS1800	700	1747.8	5;5;5;5	250 KHz	-41.44	-33	-28.12	-36	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-66.69	-60	-53.37	-36	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-70.42	-60	-57.10	-56	PASS
DCS1800	700	1747.8	5;5;5;5	800 KHz	-71.63	-60	-58.31	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1000 KHz	-72.71	-60	-59.39	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-73.38	-60	-60.06	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1400 KHz	-74.27	-60	-60.95	-56	PASS

DCS1800	700	1747.8	5;5;5;5	1600 KHz	-75.05	-60	-61.73	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-75.54	-60	-62.22	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-75.81	-60	-62.18	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1600 KHz	-75.13	-60	-61.50	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1400 KHz	-74.23	-60	-60.60	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-73.23	-60	-59.60	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1000 KHz	-72.38	-60	-58.75	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-800 KHz	-71.52	-60	-57.89	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-70.27	-60	-56.64	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-66.85	-60	-53.22	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-250 KHz	-41.22	-33	-27.59	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-200 KHz	-37.70	-30	-24.07	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-100 KHz	-7.51	0.5	6.12	-36	PASS
DCS1800	885	1784.8	5;5;5;5	100 KHz	-7.88	0.5	5.75	-36	PASS
DCS1800	885	1784.8	5;5;5;5	200 KHz	-37.89	-30	-24.26	-36	PASS
DCS1800	885	1784.8	5;5;5;5	250 KHz	-41.20	-33	-27.57	-36	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-66.80	-60	-53.16	-36	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-70.11	-60	-56.48	-56	PASS
DCS1800	885	1784.8	5;5;5;5	800 KHz	-71.84	-60	-58.21	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1000 KHz	-72.58	-60	-58.94	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-73.62	-60	-59.98	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1400 KHz	-74.41	-60	-60.78	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1600 KHz	-75.20	-60	-61.57	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-75.86	-60	-62.22	-56	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

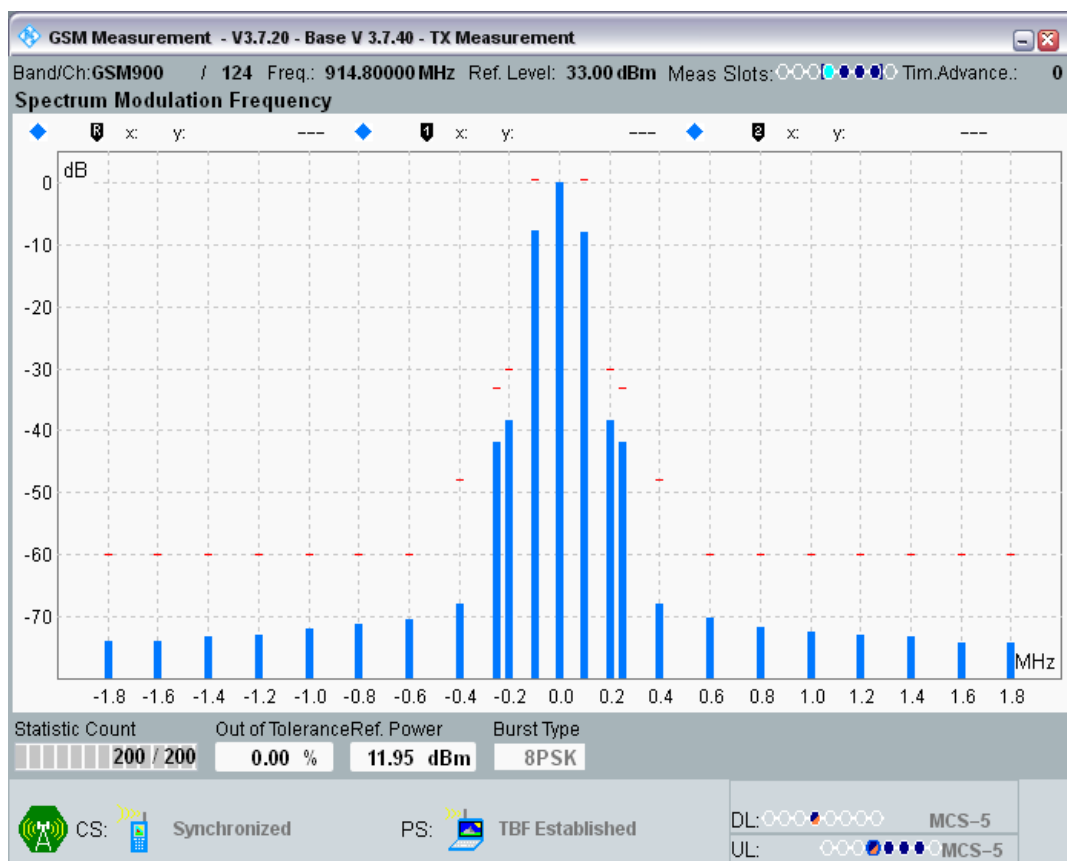


GSM900 Channel=60 Gamma=6;6;6;6.png

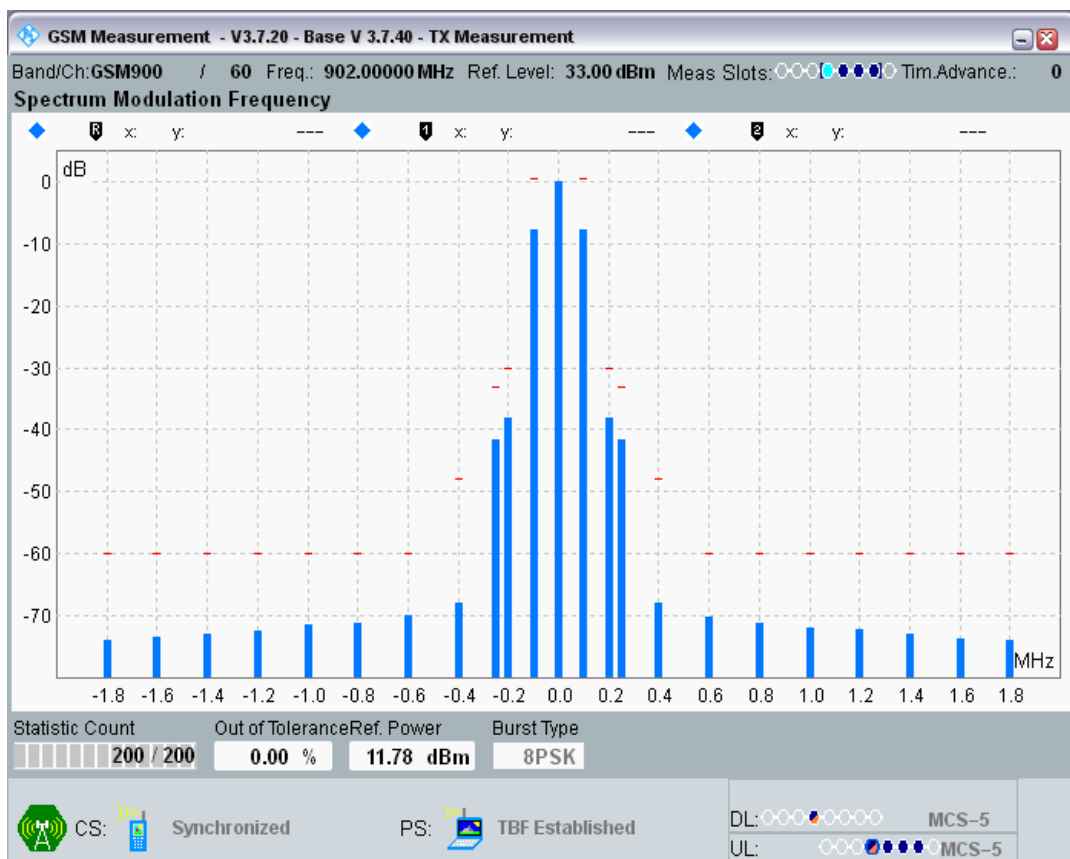


GSM900 Channel=975 Gamma=6;6;6.png

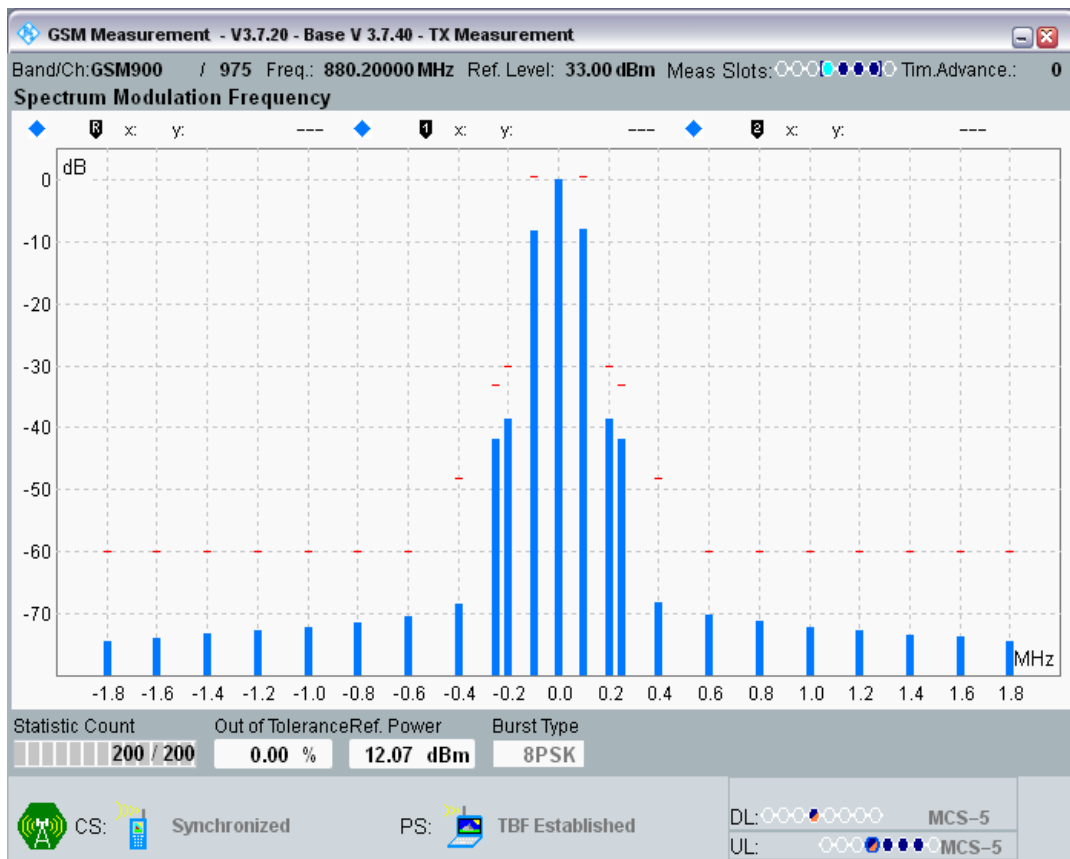


DCS1800 Channel=512 Gamma=5;5;5;5.png

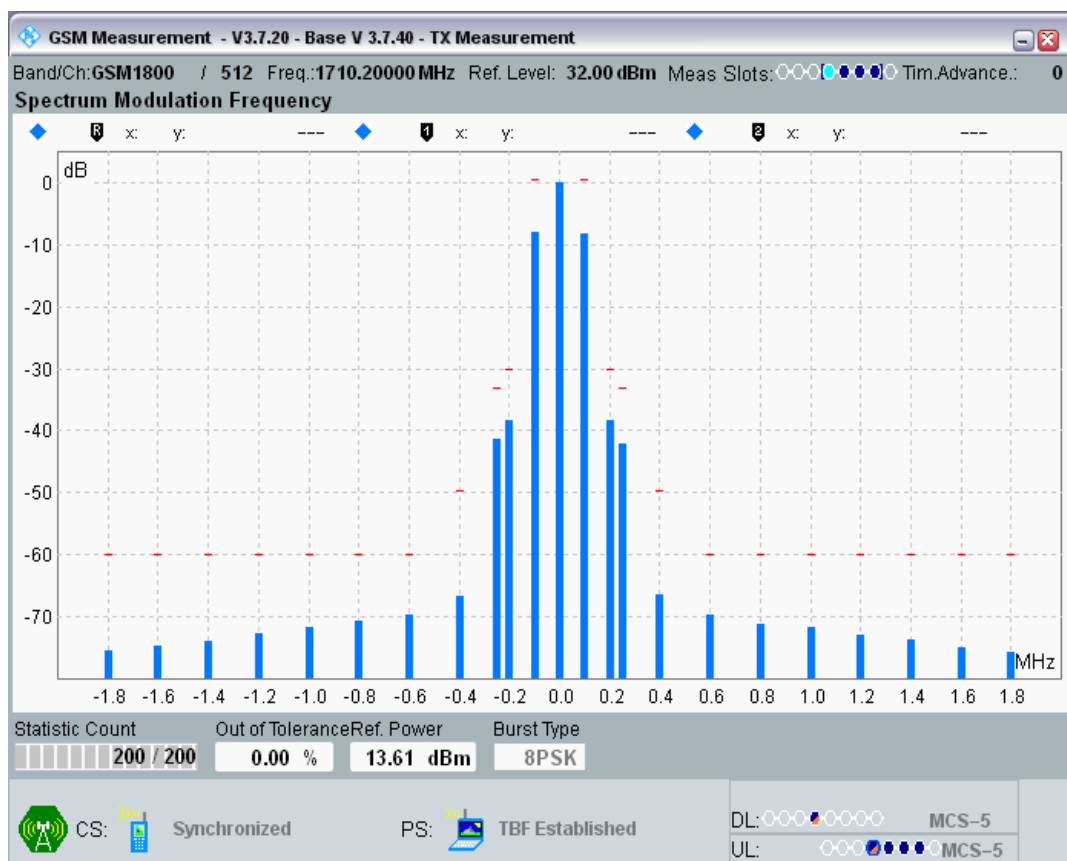

DCS1800 Channel=700 Gamma=5;5;5;5.png

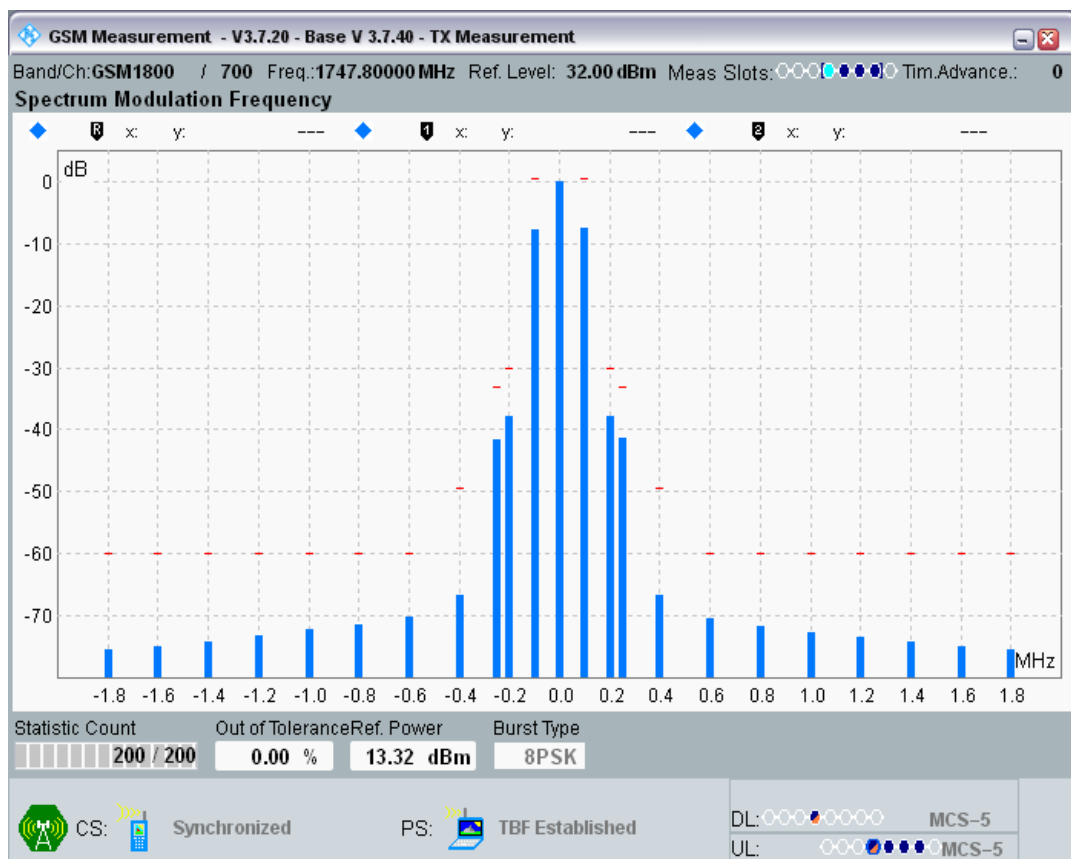

DCS1800 Channel=885 Gamma=5;5;5;5.png

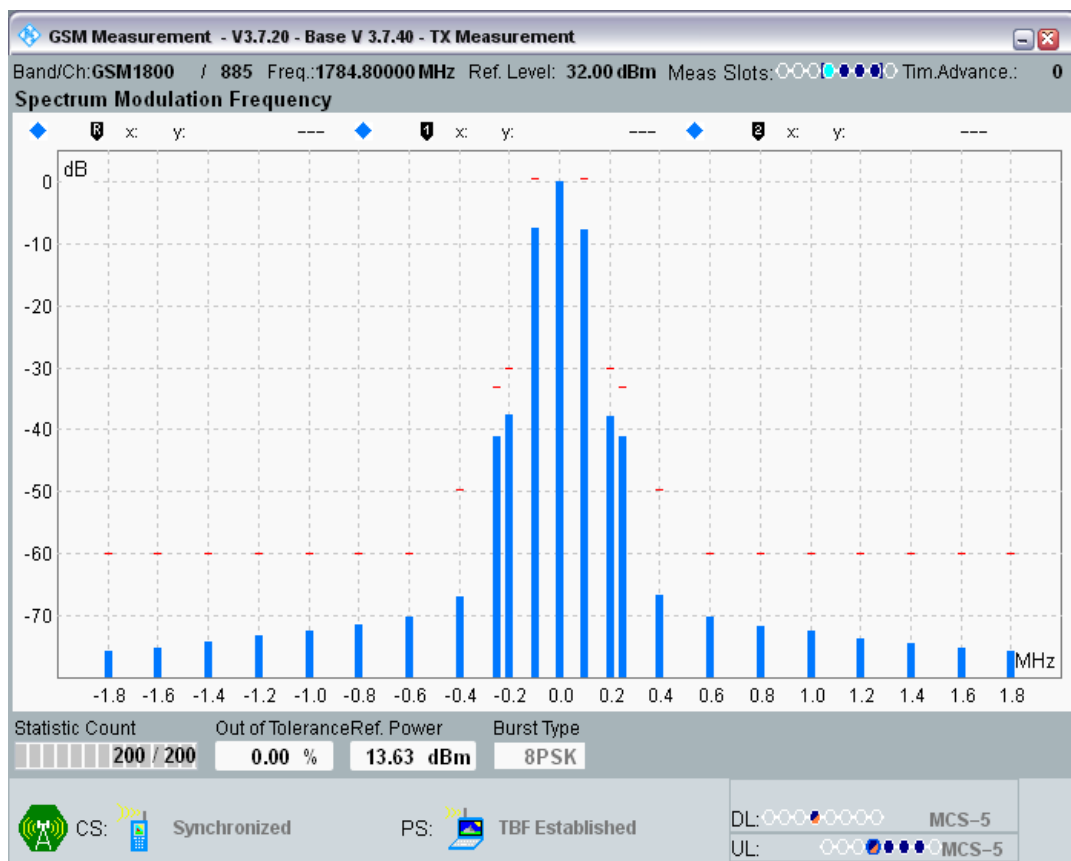


Clause 4.2.29 Switching Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-50.84	-24	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-48.76	-21	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-46.86	-21	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-44.75	-19	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-42.86	-19	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-47.07	-21	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-49.19	-21	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-49.91	-24	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-49.69	-24	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-48.55	-21	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-46.08	-21	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-44.92	-19	PASS
GSM900	60	902	6;6;6;6	400 KHz	-42.55	-19	PASS
GSM900	60	902	6;6;6;6	600 KHz	-46.04	-21	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-48.10	-21	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-50.45	-24	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-49.42	-24	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-49.35	-21	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-46.12	-21	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-44.24	-19	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-42.94	-19	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-46.91	-21	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-49.37	-21	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-50.38	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-50.69	-27	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-47.95	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-44.34	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-42.05	-22	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-39.66	-22	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-43.15	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-47.92	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-49.45	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-49.60	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-48.25	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-45.58	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-42.12	-22	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-42.17	-22	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-44.28	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-47.76	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-49.26	-27	PASS

DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-49.64	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-48.70	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-44.15	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-41.47	-22	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-41.65	-22	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-44.80	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-47.75	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-50.09	-27	PASS


GSM900 Channel=124 Gamma=6;6;6.png

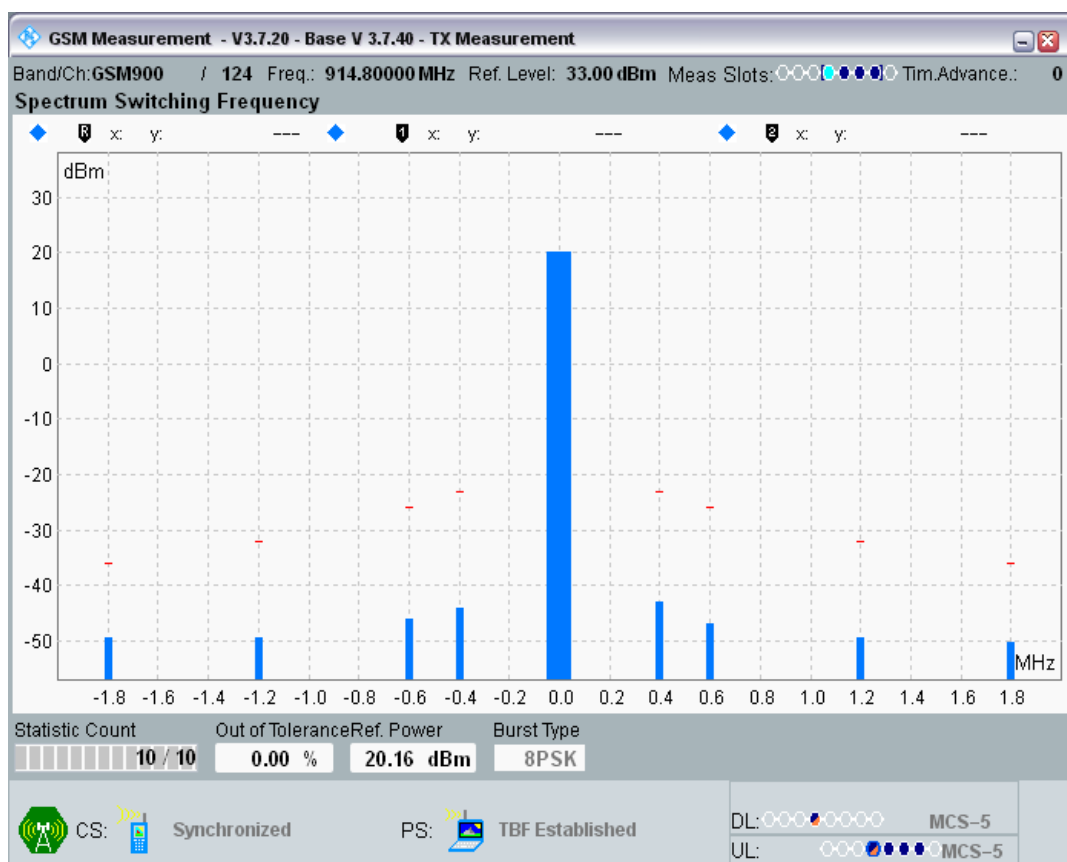


GSM900 Channel=60 Gamma=6;6;6;6.png

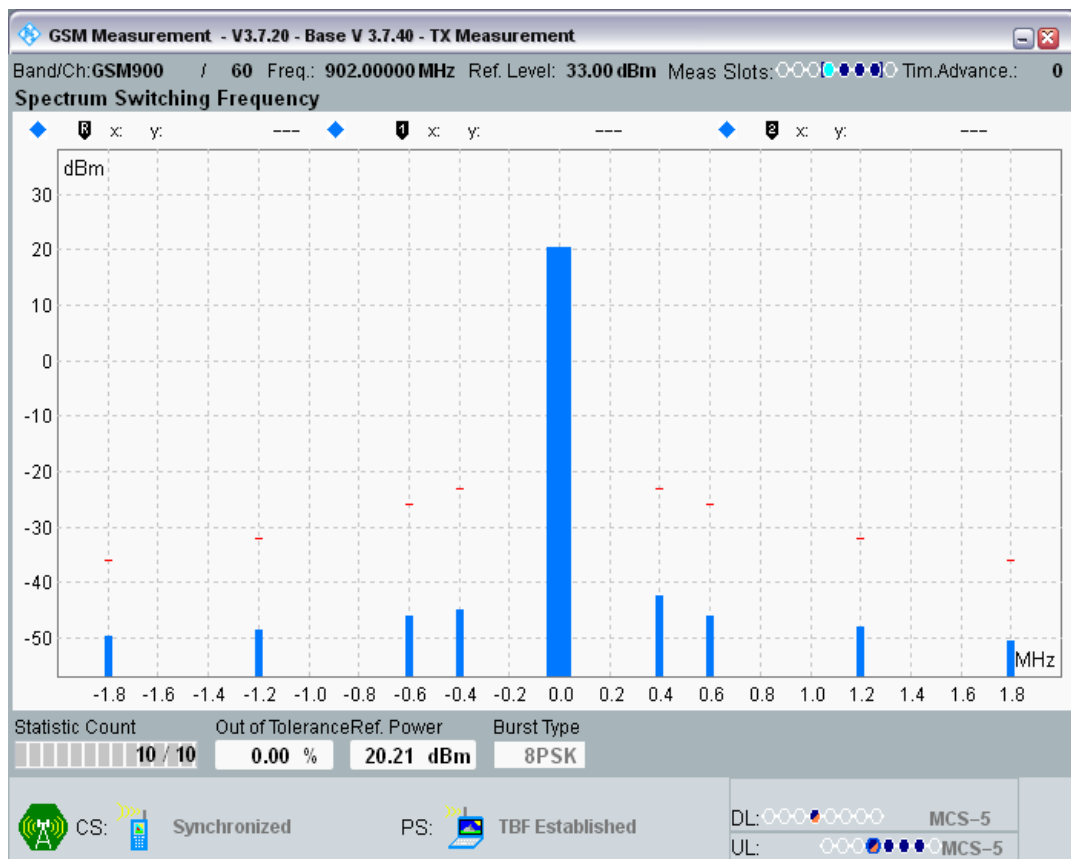


GSM900 Channel=975 Gamma=6;6;6;6.png

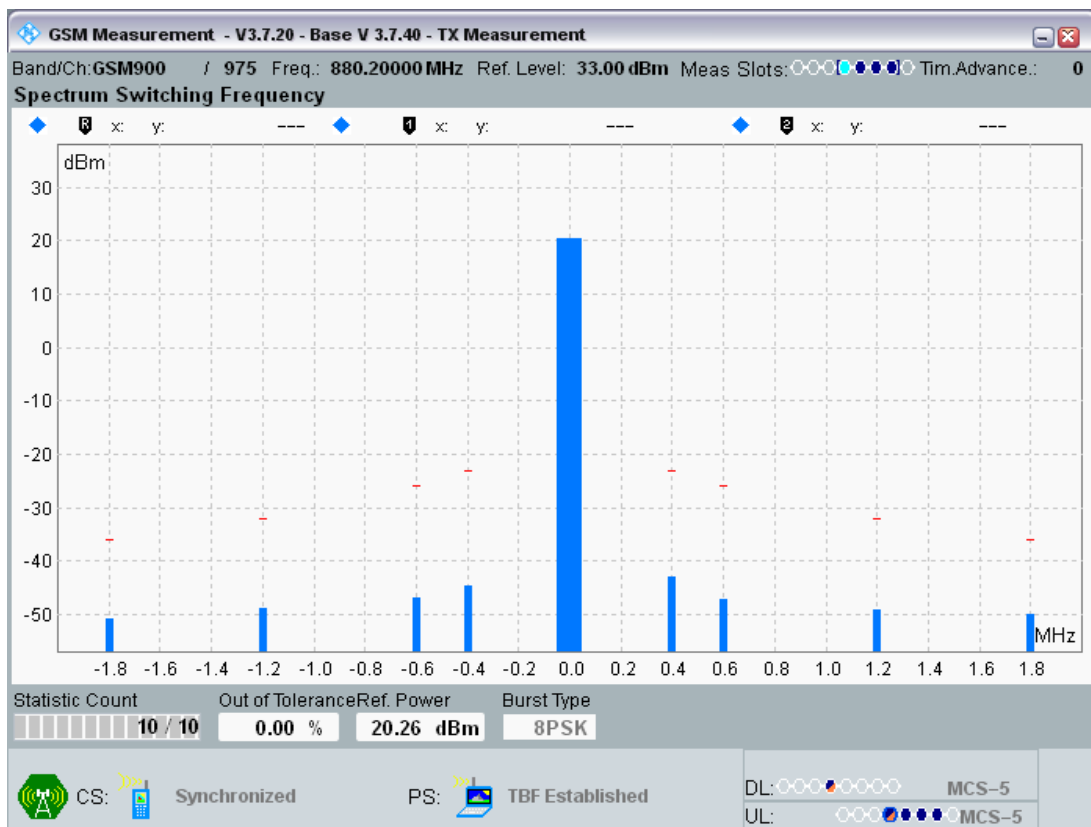


DCS1800 Channel=512 Gamma=5;5;5;5.png

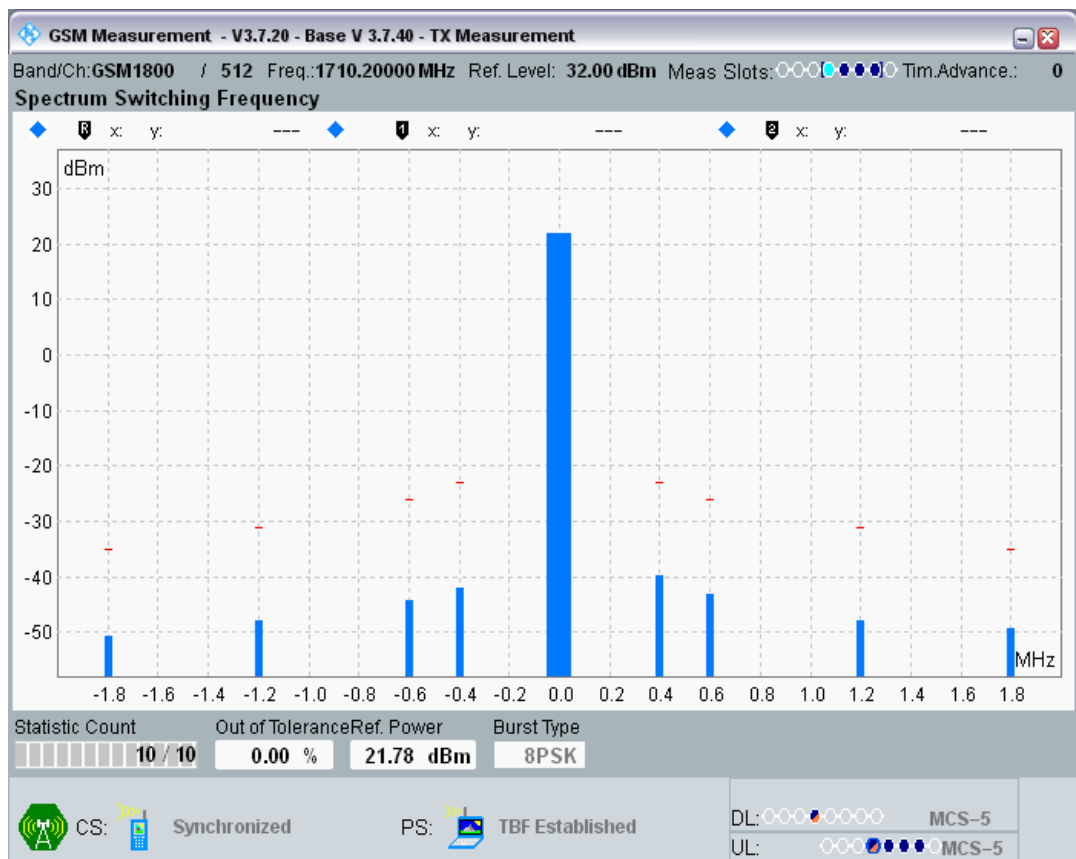

DCS1800 Channel=700 Gamma=5;5;5;5.png

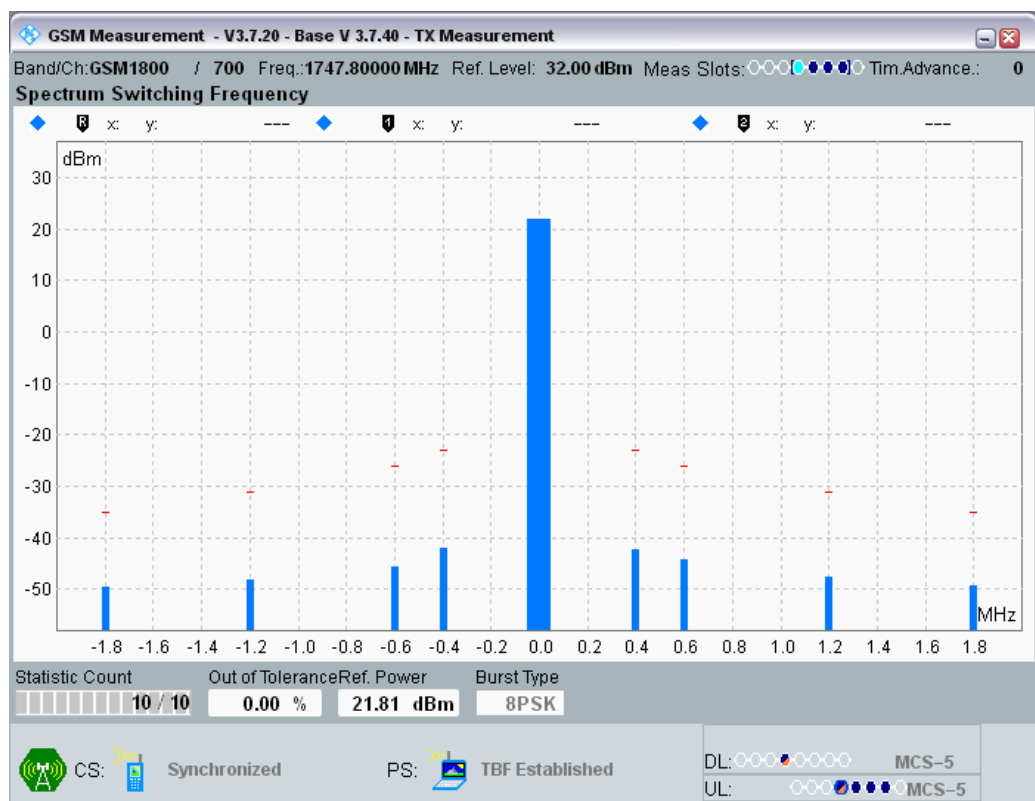

DCS1800 Channel=885 Gamma=5;5;5;5.png

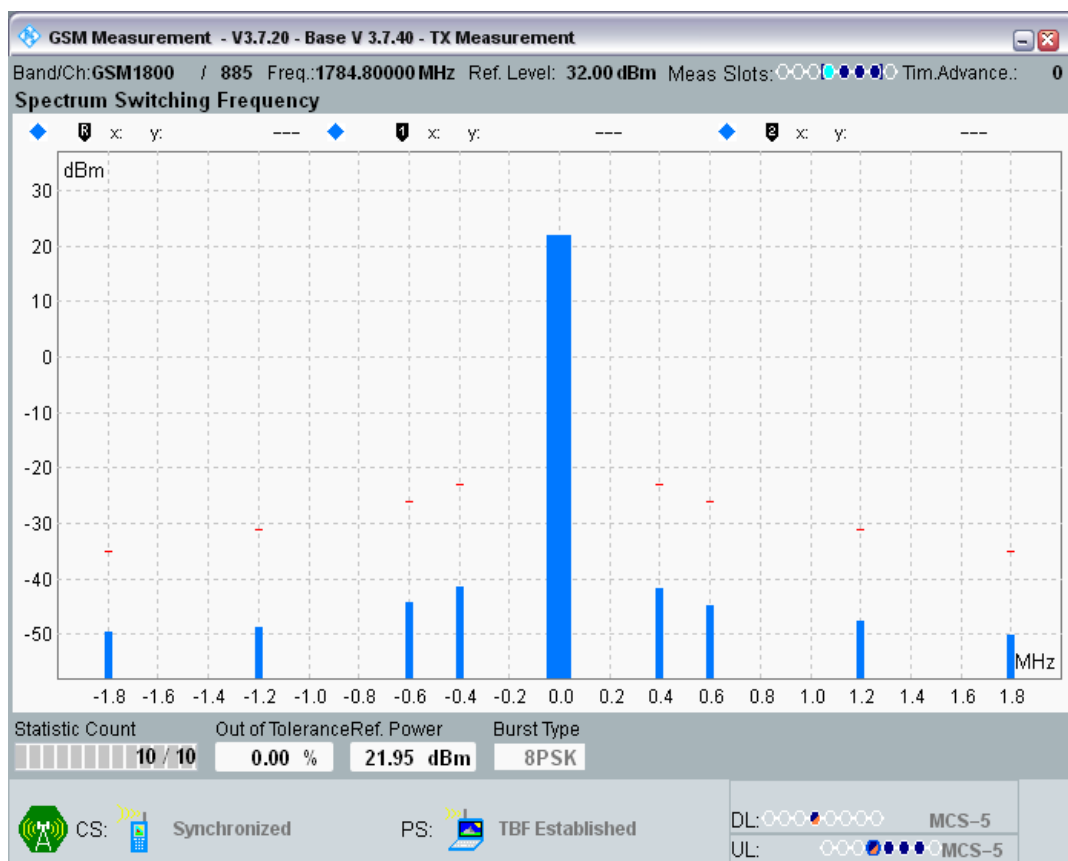

Clause 4.2.34 Intermodulation rejection - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	PDTCH MCS-1	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-1	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-2	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-2	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-3	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-3	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-4	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-4	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH	914.4	-49	913.6	-50	0.00	10	PASS

				MCS-5							
GSM900	975	880.2	915.2	PDTCH MCS-5	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-6	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-6	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-7	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-7	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-8	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-8	916	-49	916.8	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-9	914.4	-49	913.6	-50	0.00	10	PASS
GSM900	975	880.2	915.2	PDTCH MCS-9	916	-49	916.8	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-1	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-1	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-2	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-2	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-3	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-3	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-4	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-4	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-5	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-5	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-6	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH	947.8	-49	948.6	-50	0.00	10	PASS

				MCS-6							
GSM900	60	902	947	PDTCH MCS-7	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-7	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-8	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-8	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-9	946.2	-49	945.4	-50	0.00	10	PASS
GSM900	60	902	947	PDTCH MCS-9	947.8	-49	948.6	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-1	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-1	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-2	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-2	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-3	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-3	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-4	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-4	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-5	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-5	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-6	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-6	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-7	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-7	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	10	PASS

				MCS-8							
GSM900	124	914.8	959.8	PDTCH MCS-8	960.6	-49	961.4	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-9	959	-49	958.2	-50	0.00	10	PASS
GSM900	124	914.8	959.8	PDTCH MCS-9	960.6	-49	961.4	-50	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-1	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-1	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-2	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-2	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-3	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-3	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-4	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-4	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-5	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-5	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-6	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-6	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-7	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-7	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-8	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-8	1806	-49	1806.8	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH MCS-9	1804.4	-49	1803.6	-49	0.00	10	PASS
DCS1800	512	1710.2	1805.2	PDTCH	1806	-49	1806.8	-49	0.00	10	PASS

				MCS-9							
DCS1800	700	1747.8	1842.8	PDTCH MCS-1	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-1	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-2	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-2	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-3	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-3	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-4	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-4	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-5	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-5	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-6	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-6	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-7	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-7	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-8	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-8	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-9	1842	-49	1841.2	-49	0.00	10	PASS
DCS1800	700	1747.8	1842.8	PDTCH MCS-9	1843.6	-49	1844.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-1	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-1	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-49	0.00	10	PASS

				MCS-2							
DCS1800	885	1784.8	1879.8	PDTCH MCS-2	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-3	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-3	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-4	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-4	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-5	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-5	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-6	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-6	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-7	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-7	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-8	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-8	1880.6	-49	1881.4	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-9	1879	-49	1878.2	-49	0.00	10	PASS
DCS1800	885	1784.8	1879.8	PDTCH MCS-9	1880.6	-49	1881.4	-49	0.00	10	PASS

Clause 4.2.34 Intermodulation rejection - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	USF MCS-1	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-1	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-2	914.4	-49	913.6	-50	0.00	1	PASS

GSM900	975	880.2	915.2	USF MCS-2	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-3	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-3	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-4	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-4	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-5	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-5	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-6	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-6	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-7	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-7	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-8	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-8	916	-49	916.8	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-9	914.4	-49	913.6	-50	0.00	1	PASS
GSM900	975	880.2	915.2	USF MCS-9	916	-49	916.8	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-1	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-1	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-2	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-2	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-3	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-3	947.8	-49	948.6	-50	0.00	1	PASS

GSM900	60	902	947	USF MCS-4	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-4	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-5	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-5	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-6	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-6	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-7	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-7	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-8	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-8	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-9	946.2	-49	945.4	-50	0.00	1	PASS
GSM900	60	902	947	USF MCS-9	947.8	-49	948.6	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-1	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-1	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-2	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-2	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-3	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-3	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-4	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-4	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-5	959	-49	958.2	-50	0.00	1	PASS

GSM900	124	914.8	959.8	USF MCS-5	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-6	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-6	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-7	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-7	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-8	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-8	960.6	-49	961.4	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-9	959	-49	958.2	-50	0.00	1	PASS
GSM900	124	914.8	959.8	USF MCS-9	960.6	-49	961.4	-50	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-1	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-1	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-2	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-2	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-3	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-3	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-4	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-4	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-5	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-5	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-6	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-6	1806	-49	1806.8	-49	0.00	1	PASS

DCS1800	512	1710.2	1805.2	USF MCS-7	1804.4	-49	1803.6	-49	99.99	1	FAIL
DCS1800	512	1710.2	1805.2	USF MCS-7	1806	-49	1806.8	-49	99.99	1	FAIL
DCS1800	512	1710.2	1805.2	USF MCS-8	1804.4	-49	1803.6	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-8	1806	-49	1806.8	-49	0.00	1	PASS
DCS1800	512	1710.2	1805.2	USF MCS-9	1804.4	-49	1803.6	-49	99.99	1	FAIL
DCS1800	512	1710.2	1805.2	USF MCS-9	1806	-49	1806.8	-49	99.99	1	FAIL
DCS1800	700	1747.8	1842.8	USF MCS-1	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-1	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-2	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-2	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-3	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-3	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-4	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-4	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-5	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-5	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-6	1842	-49	1841.2	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-6	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-7	1842	-49	1841.2	-49	99.99	1	FAIL
DCS1800	700	1747.8	1842.8	USF MCS-7	1843.6	-49	1844.4	-49	99.99	1	FAIL
DCS1800	700	1747.8	1842.8	USF MCS-8	1842	-49	1841.2	-49	0.00	1	PASS

DCS1800	700	1747.8	1842.8	USF MCS-8	1843.6	-49	1844.4	-49	0.00	1	PASS
DCS1800	700	1747.8	1842.8	USF MCS-9	1842	-49	1841.2	-49	99.99	1	FAIL
DCS1800	700	1747.8	1842.8	USF MCS-9	1843.6	-49	1844.4	-49	99.99	1	FAIL
DCS1800	885	1784.8	1879.8	USF MCS-1	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-1	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-2	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-2	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-3	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-3	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-4	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-4	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-5	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-5	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-6	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-6	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-7	1879	-49	1878.2	-49	99.99	1	FAIL
DCS1800	885	1784.8	1879.8	USF MCS-7	1880.6	-49	1881.4	-49	99.99	1	FAIL
DCS1800	885	1784.8	1879.8	USF MCS-8	1879	-49	1878.2	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-8	1880.6	-49	1881.4	-49	0.00	1	PASS
DCS1800	885	1784.8	1879.8	USF MCS-9	1879	-49	1878.2	-49	99.99	1	FAIL
DCS1800	885	1784.8	1879.8	USF MCS-9	1880.6	-49	1881.4	-49	99.99	1	FAIL

Clause 4.2.40 Adjacent channel rejection - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	915	-96.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	915.4	-96.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	914.8	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	915.6	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	915	-97.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	915.4	-97.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	914.8	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	915.6	-63.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	915	-99.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	915.4	-99.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	914.8	-65.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	915.6	-65.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	915	-102	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	915.4	-102	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	914.8	-67	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	915.6	-67	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	915	-92	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	915.4	-92	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	914.8	-57.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH	915.6	-57.5	0.00	10	PASS

					MCS-9					
GSM900	60	902	947	Static	PDTCH MCS-5	946.8	-96.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	947.2	-96.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	946.6	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	947.4	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	946.8	-97.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	947.2	-97.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	946.6	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	947.4	-63.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	946.8	-99.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	947.2	-99.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	946.6	-65.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	947.4	-65.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	946.8	-102	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	947.2	-102	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	946.6	-67	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	947.4	-67	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	946.8	-92	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	947.2	-92	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	946.6	-57.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	947.4	-57.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH	959.6	-96.5	0.00	10	PASS

					MCS-5					
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	960	-96.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	959.4	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	960.2	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	959.6	-97.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	960	-97.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	959.4	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	960.2	-63.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	959.6	-99.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	960	-99.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	959.4	-65.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	960.2	-65.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	959.6	-102	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	960	-102	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	959.4	-67	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	960.2	-67	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	959.6	-92	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	960	-92	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	959.4	-57.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	960.2	-57.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1805	-96.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH	1805.4	-96.5	0.00	10	PASS

					MCS-5					
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1804.8	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	1805.6	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1805	-97.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1805.4	-97.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1804.8	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	1805.6	-63.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1805	-99.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1805.4	-99.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1804.8	-65.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	1805.6	-65.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1805	-102	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1805.4	-102	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1804.8	-67	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	1805.6	-67	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1805	-92	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1805.4	-92	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1804.8	-57.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	1805.6	-57.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1842.6	-96.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1843	-96.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH	1842.4	-63.5	0.00	10	PASS

					MCS-5					
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	1843.2	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1842.6	-97.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1843	-97.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1842.4	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	1843.2	-63.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1842.6	-99.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1843	-99.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1842.4	-65.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	1843.2	-65.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1842.6	-102	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1843	-102	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1842.4	-67	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	1843.2	-67	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1842.6	-92	8.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1843	-92	2.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1842.4	-57.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	1843.2	-57.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1879.6	-96.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1880	-96.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	1879.4	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH	1880.2	-63.5	0.00	10	PASS

					MCS-5					
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1879.6	-97.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1880	-97.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1879.4	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	1880.2	-63.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1879.6	-99.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1880	-99.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1879.4	-65.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	1880.2	-65.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1879.6	-102	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1880	-102	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1879.4	-67	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	1880.2	-67	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1879.6	-92	1.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1880	-92	4.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1879.4	-57.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	1880.2	-57.5	0.00	10	PASS

Clause 4.2.40 Adjacent channel rejection - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	USF MCS-4	915	-100	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	915.4	-100	0.00	1	PASS

GSM900	975	880.2	915.2	Static	USF MCS-4	914.8	-68	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	915.6	-68	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	946.8	-100	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	947.2	-100	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	946.6	-68	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-4	947.4	-68	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	959.6	-100	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	960	-100	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	959.4	-68	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	960.2	-68	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1805	-100	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1805.4	-100	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1804.8	-68	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	1805.6	-68	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1842.6	-100	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1843	-100	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1842.4	-68	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	1843.2	-68	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1879.6	-100	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1880	-100	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1879.4	-68	0.00	1	PASS

DCS1800	885	1784.8	1879.8	Static	USF MCS-4	1880.2	-68	0.00	1	PASS
---------	-----	--------	--------	--------	--------------	--------	-----	------	---	------

Clause 4.2.45 Minimum Input level for Reference Performance - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	PDTCH MCS-5	-98	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-6	-96	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-7	-93	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
GSM900	975	880.2	915.2	Static	PDTCH MCS-9	-86	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-5	-98	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-6	-96	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-7	-93	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
GSM900	60	902	947	Static	PDTCH MCS-9	-86	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-5	-98	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-6	-96	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-7	-93	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
GSM900	124	914.8	959.8	Static	PDTCH MCS-9	-86	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-5	-98	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-6	-96	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-7	-93	0.00	10	PASS

DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
DCS1800	512	1710.2	1805.2	Static	PDTCH MCS-9	-86	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-5	-98	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-6	-96	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-7	-93	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
DCS1800	700	1747.8	1842.8	Static	PDTCH MCS-9	-86	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-5	-98	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-6	-96	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-7	-93	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-8	-90.5	0.00	10	PASS
DCS1800	885	1784.8	1879.8	Static	PDTCH MCS-9	-86	0.00	10	PASS

Clause 4.2.45 Minimum Input level for Reference Performance - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Propagation	Code Scheme	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GSM900	975	880.2	915.2	Static	USF MCS-1	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-2	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-3	-104	0.00	1	PASS
GSM900	975	880.2	915.2	Static	USF MCS-4	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-1	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-2	-104	0.00	1	PASS
GSM900	60	902	947	Static	USF MCS-3	-104	0.00	1	PASS

GSM900	60	902	947	Static	USF MCS-4	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-1	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-2	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-3	-104	0.00	1	PASS
GSM900	124	914.8	959.8	Static	USF MCS-4	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-1	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-2	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-3	-104	0.00	1	PASS
DCS1800	512	1710.2	1805.2	Static	USF MCS-4	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-1	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-2	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-3	-104	0.00	1	PASS
DCS1800	700	1747.8	1842.8	Static	USF MCS-4	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-1	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-2	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-3	-104	0.00	1	PASS
DCS1800	885	1784.8	1879.8	Static	USF MCS-4	-104	0.00	1	PASS