


Test Condition: LTUV, Test Mode: GSM, GPRS, EGPRS, Test Band: GSM900, DCS1800

Test Data


Clause 4.2.1 Transmitter-Frequency error and phase error

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	5	Frequency Error (Hz)	13.85	-88.02	88.02	PASS
GSM900	975	880.2	5	RMS Phase Error (Degree)	1.27	0	5	PASS
GSM900	975	880.2	5	Peak Phase Error (Degree)	6.44	0	20	PASS
GSM900	60	902	5	Frequency Error (Hz)	18.34	-90.2	90.2	PASS
GSM900	60	902	5	RMS Phase Error (Degree)	1.66	0	5	PASS
GSM900	60	902	5	Peak Phase Error (Degree)	9.98	0	20	PASS
GSM900	124	914.8	5	Frequency Error (Hz)	10.91	-91.48	91.48	PASS
GSM900	124	914.8	5	RMS Phase Error (Degree)	1.47	0	5	PASS
GSM900	124	914.8	5	Peak Phase Error (Degree)	8.58	0	20	PASS
DCS1800	512	1710.2	0	Frequency Error (Hz)	12.91	-171.02	171.02	PASS
DCS1800	512	1710.2	0	RMS Phase Error (Degree)	0.67	0	5	PASS
DCS1800	512	1710.2	0	Peak Phase Error (Degree)	2.33	0	20	PASS
DCS1800	700	1747.8	0	Frequency Error (Hz)	13.46	-174.78	174.78	PASS
DCS1800	700	1747.8	0	RMS Phase Error (Degree)	0.62	0	5	PASS
DCS1800	700	1747.8	0	Peak Phase Error (Degree)	2.09	0	20	PASS
DCS1800	885	1784.8	0	Frequency Error (Hz)	19.82	-178.48	178.48	PASS
DCS1800	885	1784.8	0	RMS Phase Error (Degree)	0.69	0	5	PASS
DCS1800	885	1784.8	0	Peak Phase Error (Degree)	2.58	0	20	PASS


GSM900 Channel=124 PCL=5.png

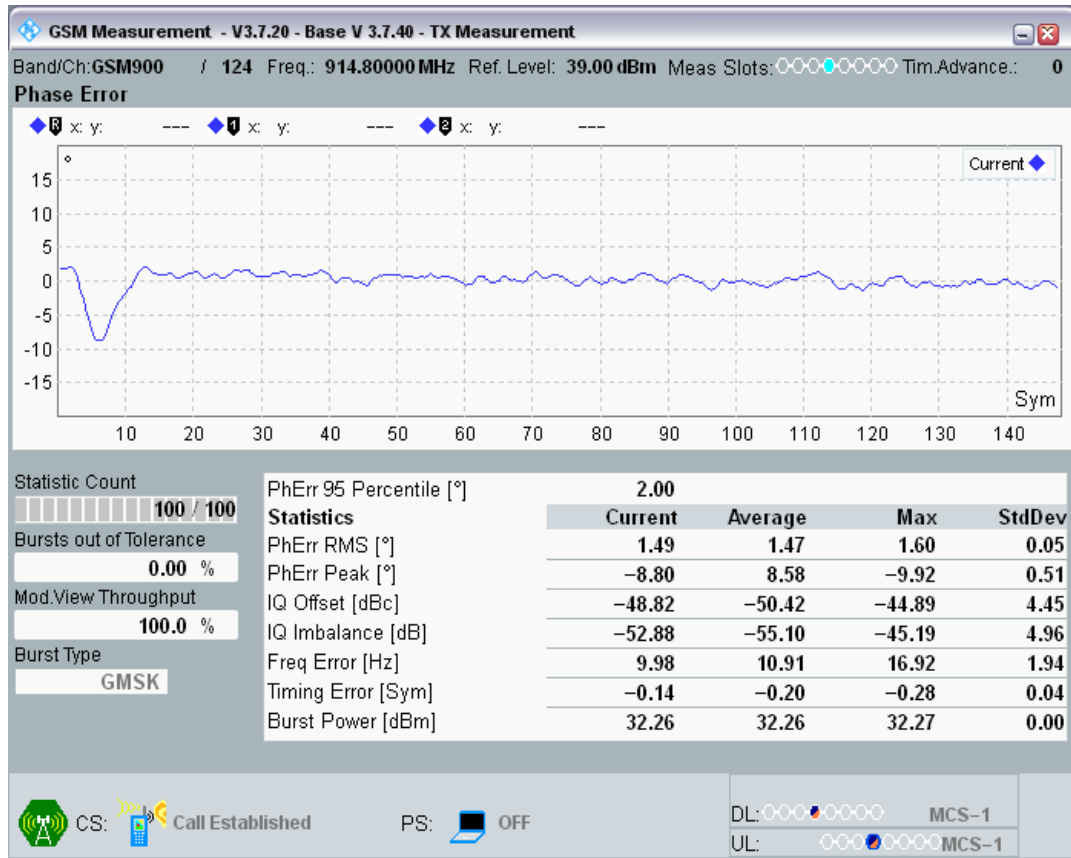

GSM900 Channel=60 PCL=5.png

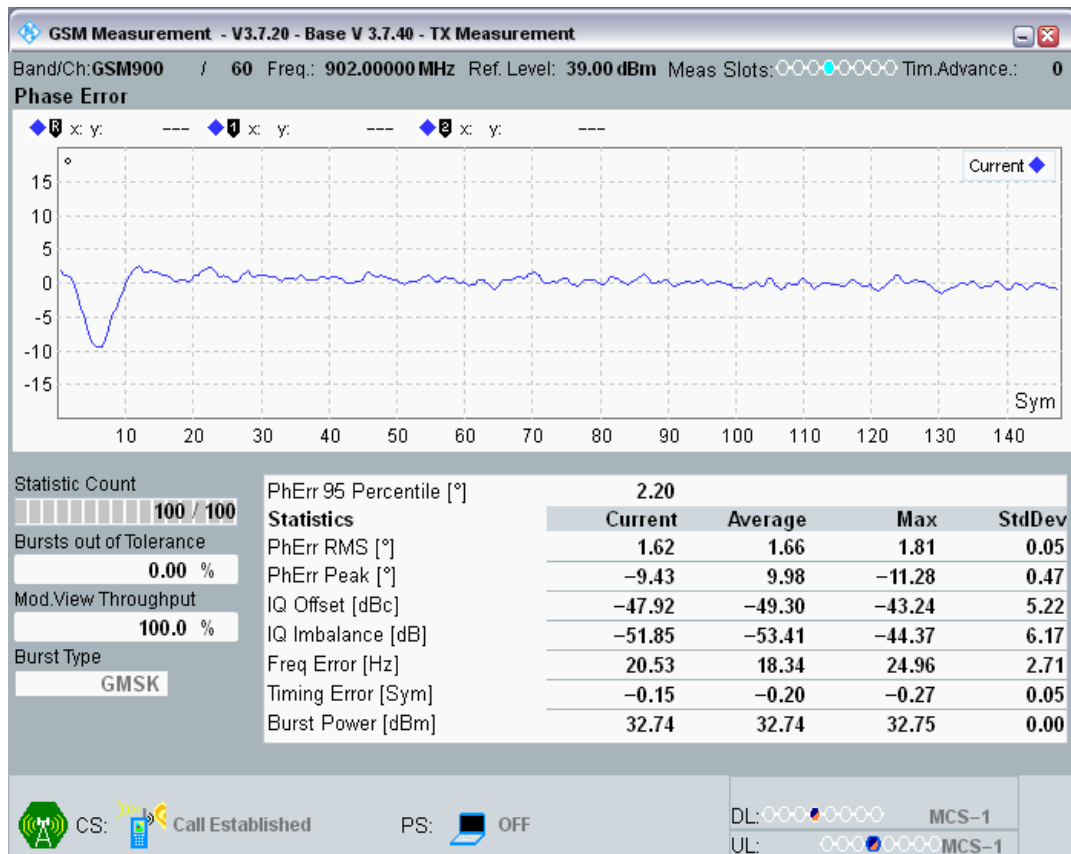


GSM900 Channel=975 PCL=5.png

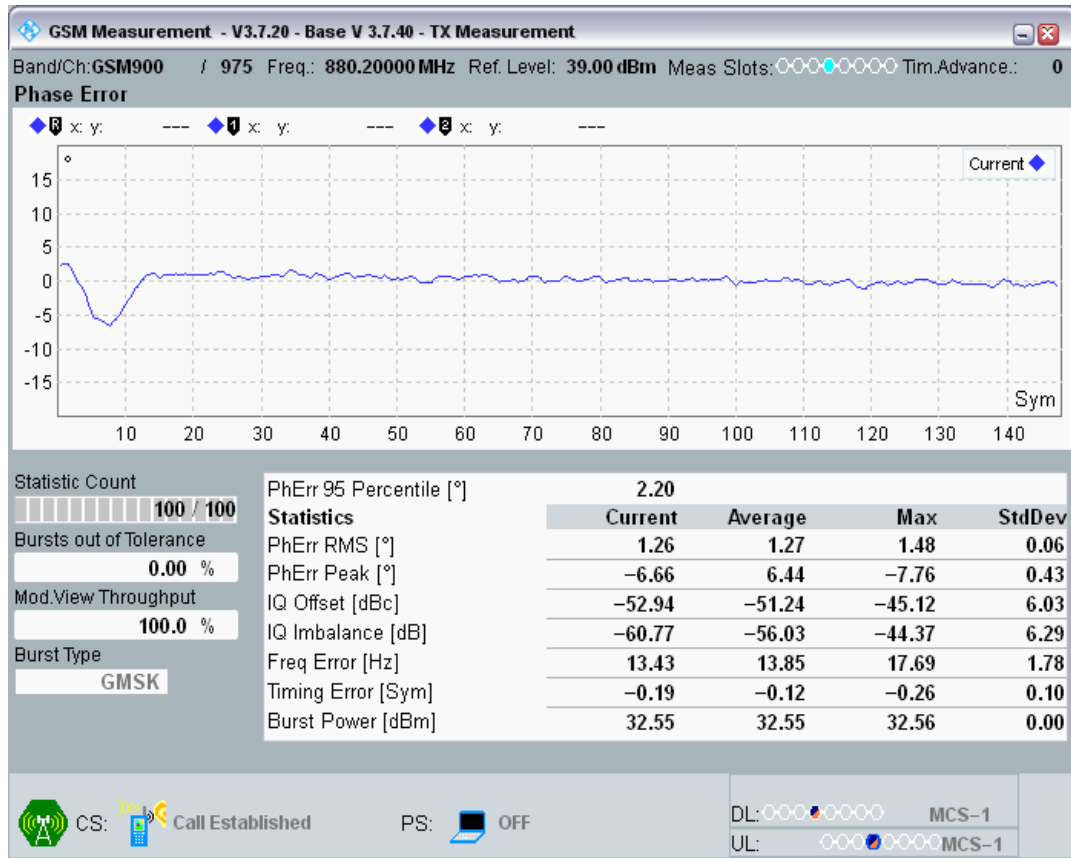


DCS1800 Channel=512 PCL=0.png



DCS1800 Channel=700 PCL=0.png

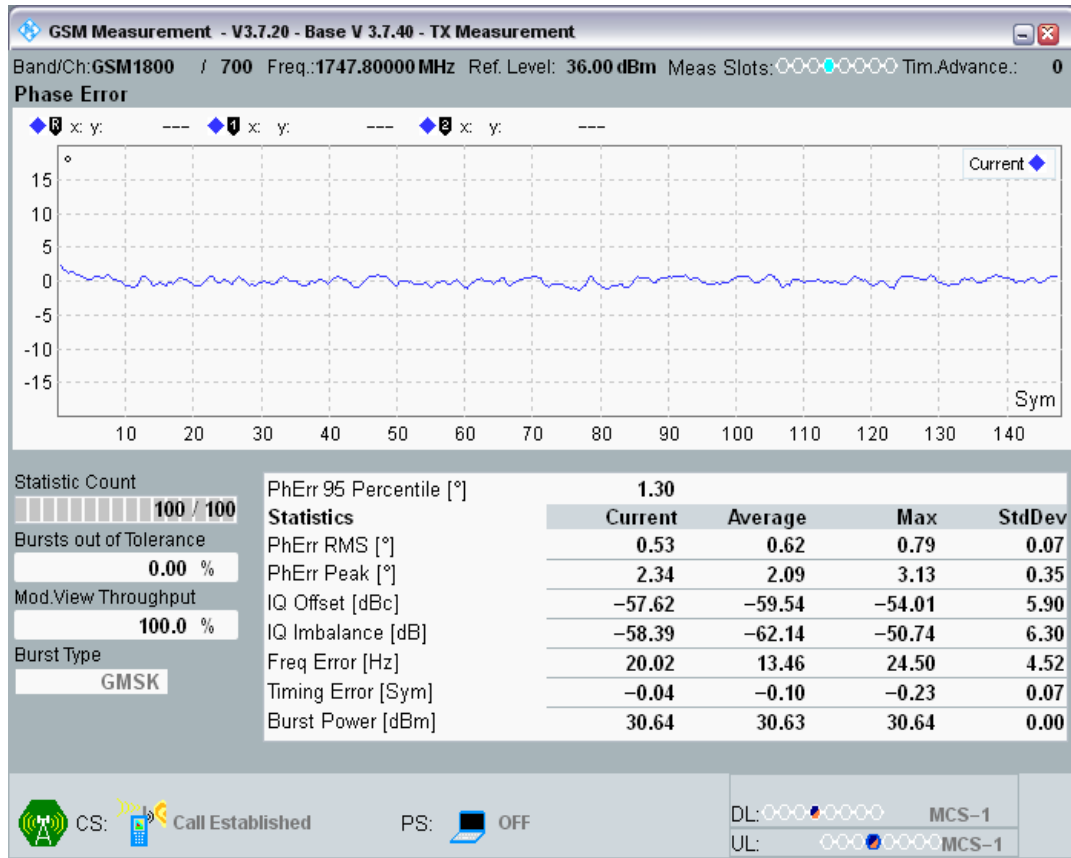


DCS1800 Channel=885 PCL=0.png

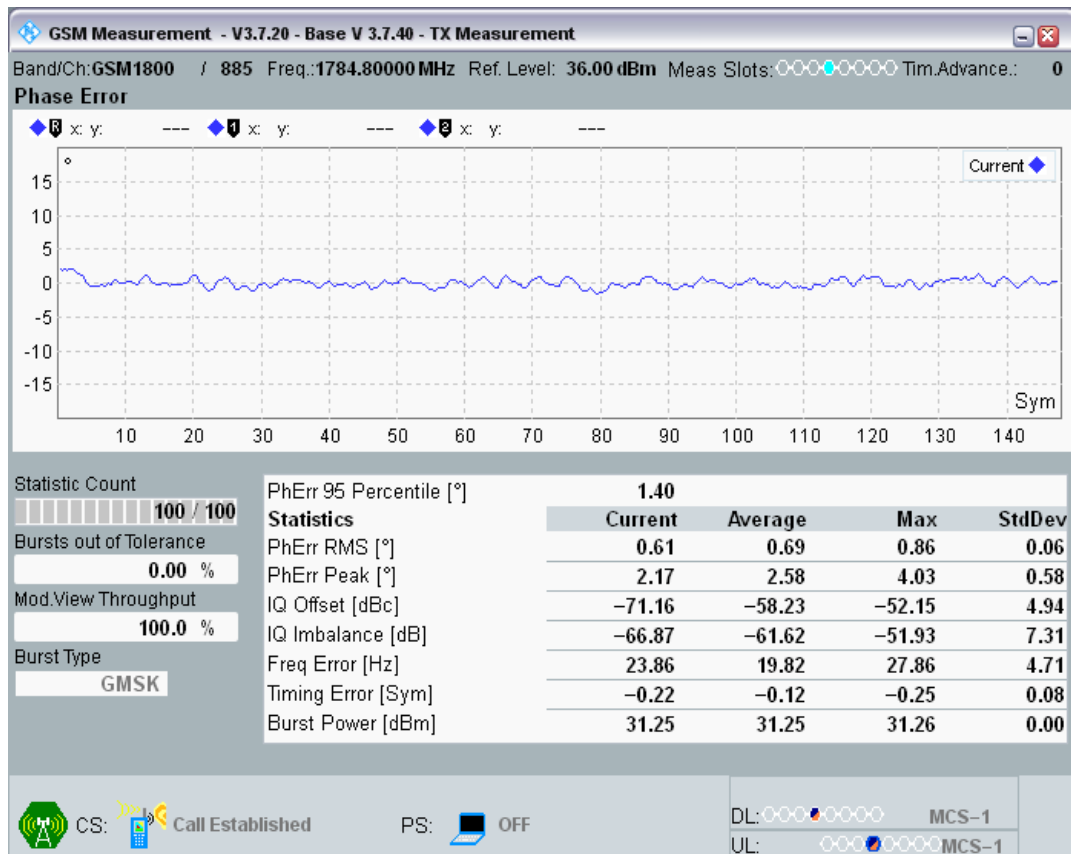


Clause 4.2.2 Transmitter-Frequency error under multi path and interference conditions

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	0	11.40	-400	400	PASS
DCS1800	RA130	700	1747.8	0	8.62	-400	400	PASS
DCS1800	RA130	885	1784.8	0	18.05	-400	400	PASS
DCS1800	HT100	512	1710.2	0	14.56	-350	350	PASS
DCS1800	HT100	700	1747.8	0	11.59	-350	350	PASS
DCS1800	HT100	885	1784.8	0	16.34	-350	350	PASS
DCS1800	TU50	512	1710.2	0	12.11	-260	260	PASS
DCS1800	TU50	700	1747.8	0	12.20	-260	260	PASS
DCS1800	TU50	885	1784.8	0	16.92	-260	260	PASS
DCS1800	TU1_5	512	1710.2	0	10.59	-320	320	PASS
DCS1800	TU1_5	700	1747.8	0	13.59	-320	320	PASS
DCS1800	TU1_5	885	1784.8	0	16.37	-320	320	PASS
GSM900	RA250	975	880.2	5	14.72	-300	300	PASS
GSM900	RA250	60	902	5	15.98	-300	300	PASS
GSM900	RA250	124	914.8	5	8.46	-300	300	PASS
GSM900	HT100	975	880.2	5	13.53	-180	180	PASS
GSM900	HT100	60	902	5	15.76	-180	180	PASS
GSM900	HT100	124	914.8	5	16.59	-180	180	PASS
GSM900	TU50	975	880.2	5	14.27	-160	160	PASS
GSM900	TU50	60	902	5	14.40	-160	160	PASS
GSM900	TU50	124	914.8	5	12.53	-160	160	PASS
GSM900	TU3	975	880.2	5	10.85	-230	230	PASS
GSM900	TU3	60	902	5	19.31	-230	230	PASS
GSM900	TU3	124	914.8	5	13.01	-230	230	PASS


DCS1800 Channel=512 PCL=0 HT100.png

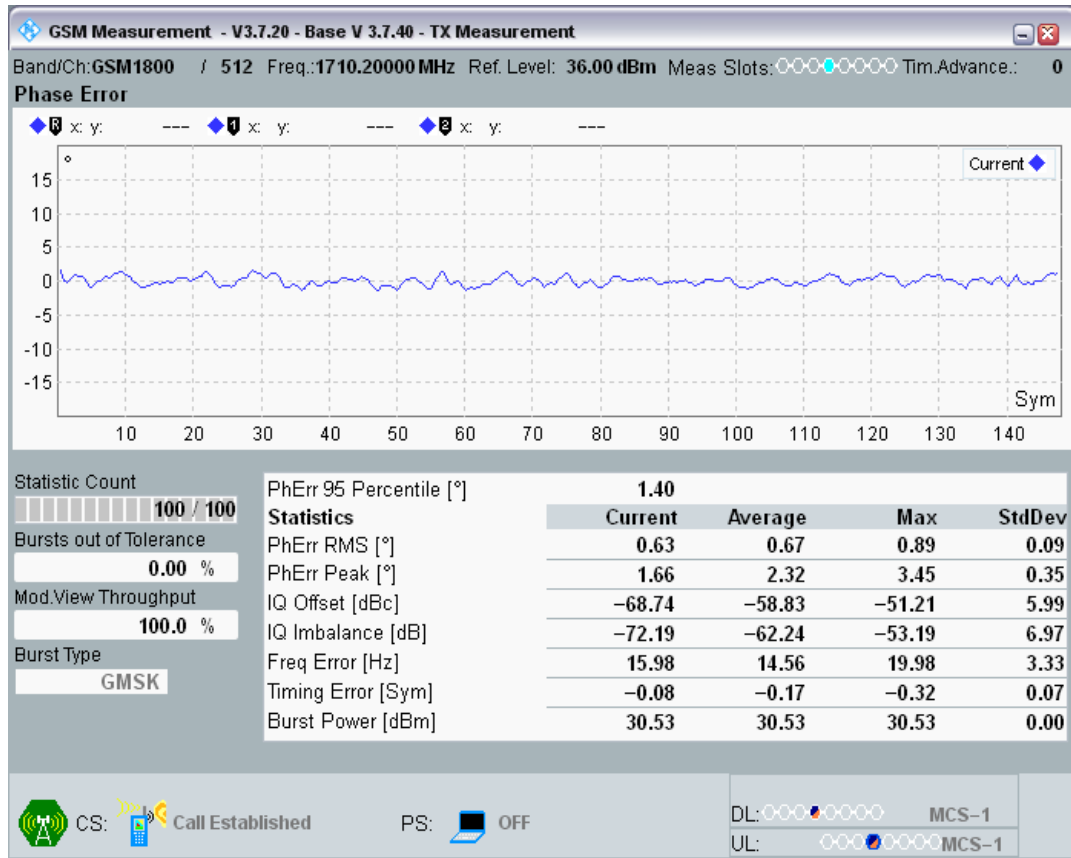


DCS1800 Channel=512 PCL=0 RA130.png

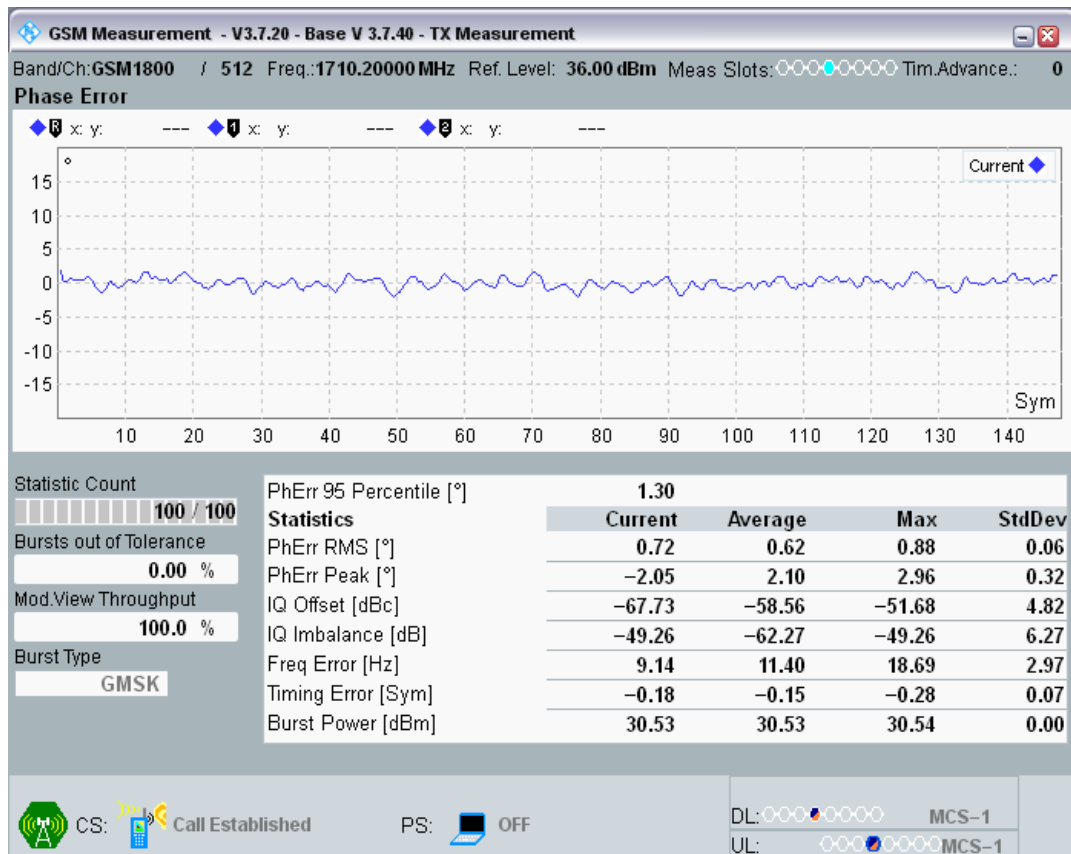


DCS1800 Channel=512 PCL=0 TU1_5.png

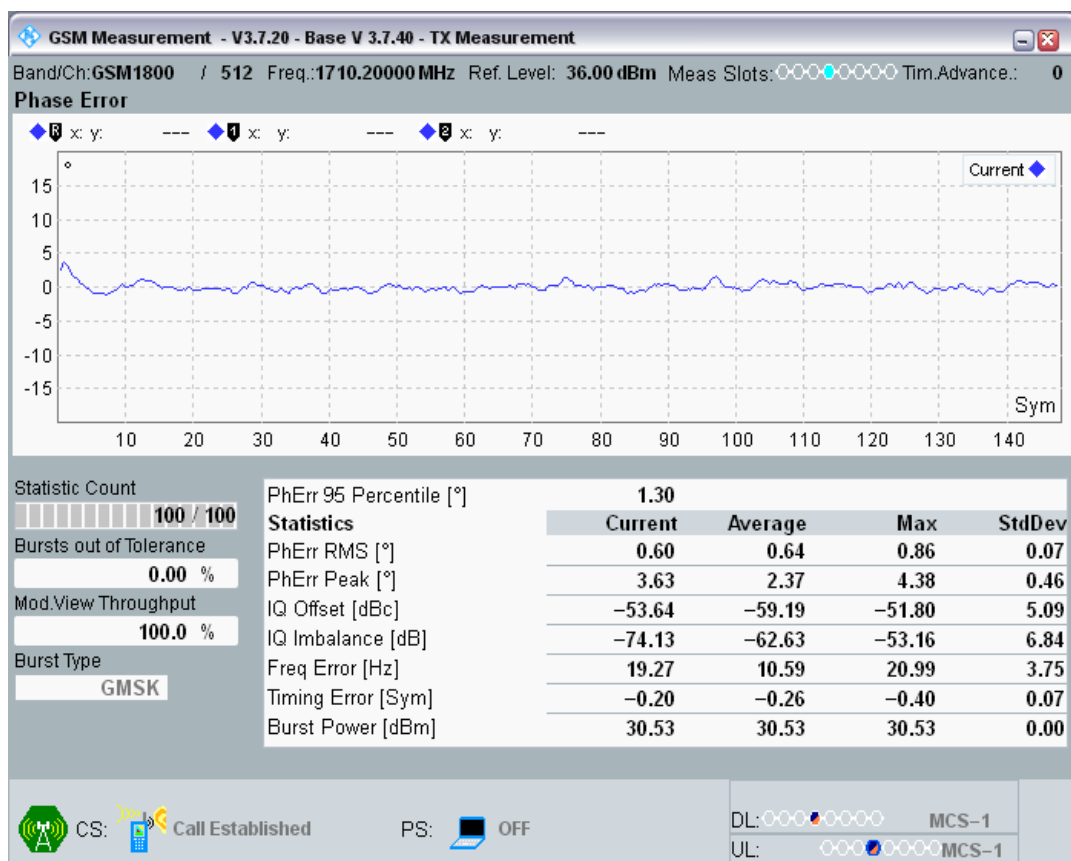


DCS1800 Channel=512 PCL=0 TU50.png

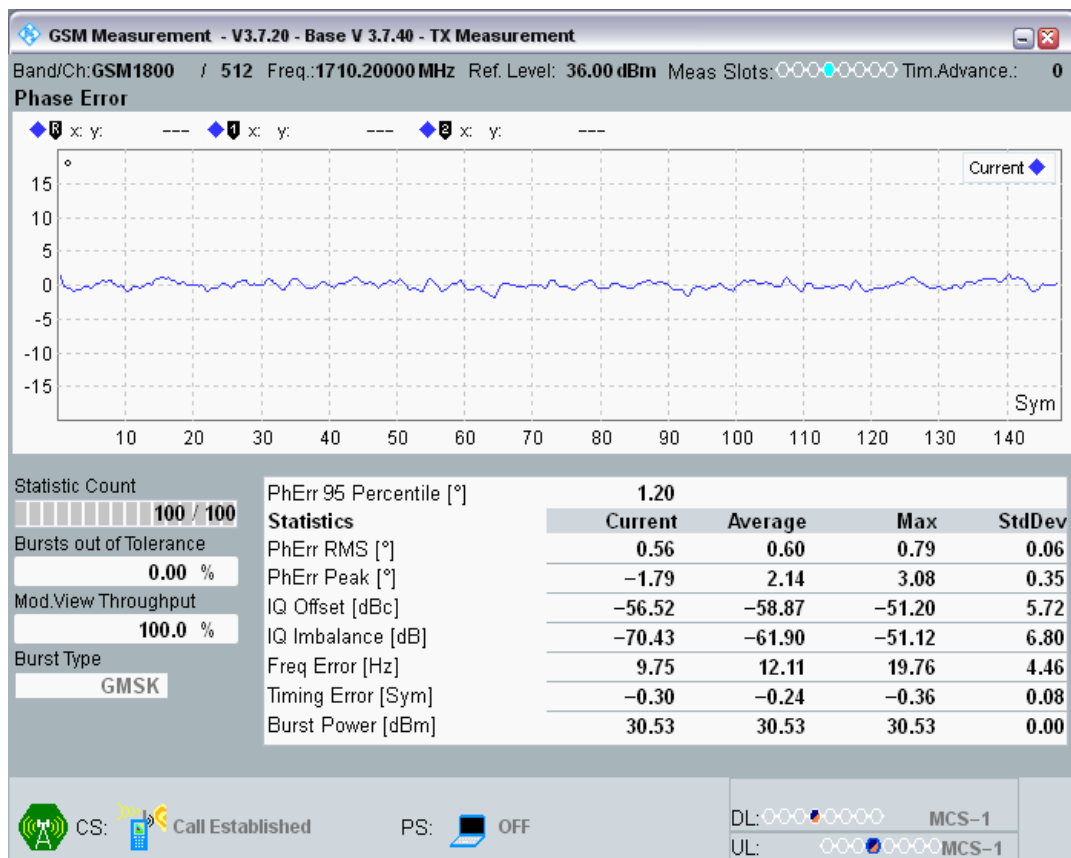


DCS1800 Channel=700 PCL=0 HT100.png

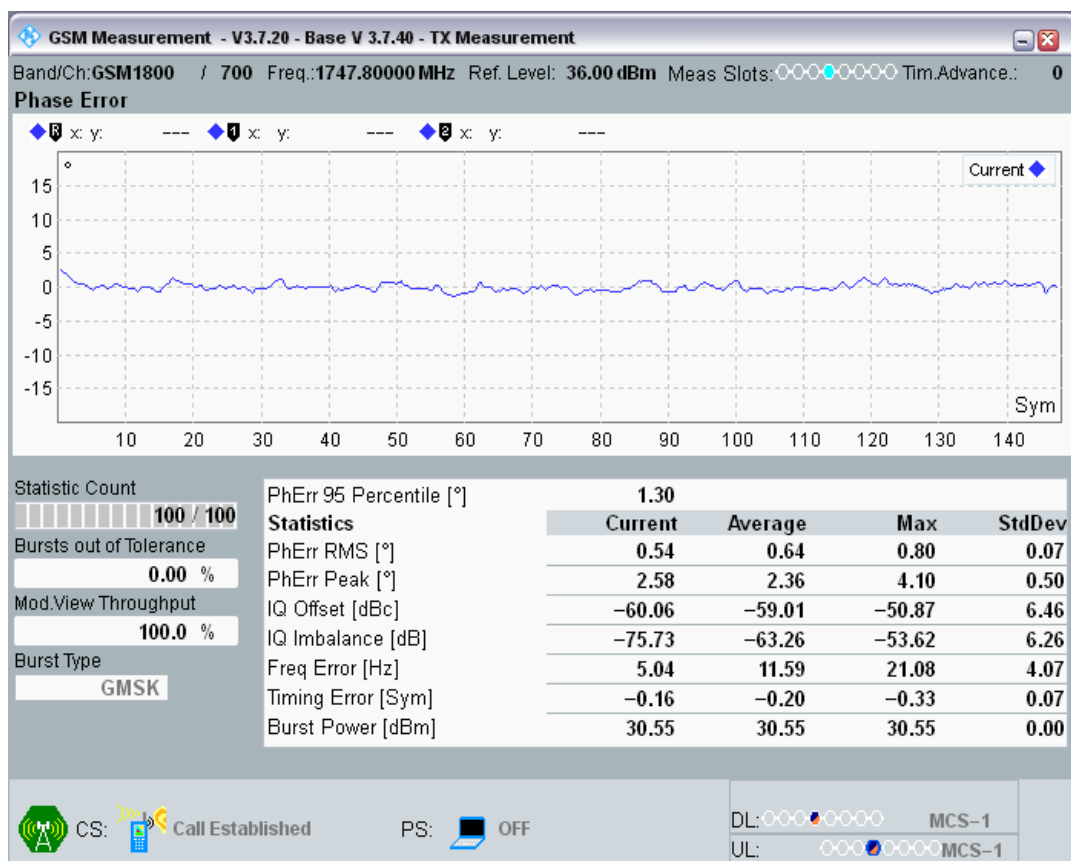

DCS1800 Channel=700 PCL=0 RA130.png

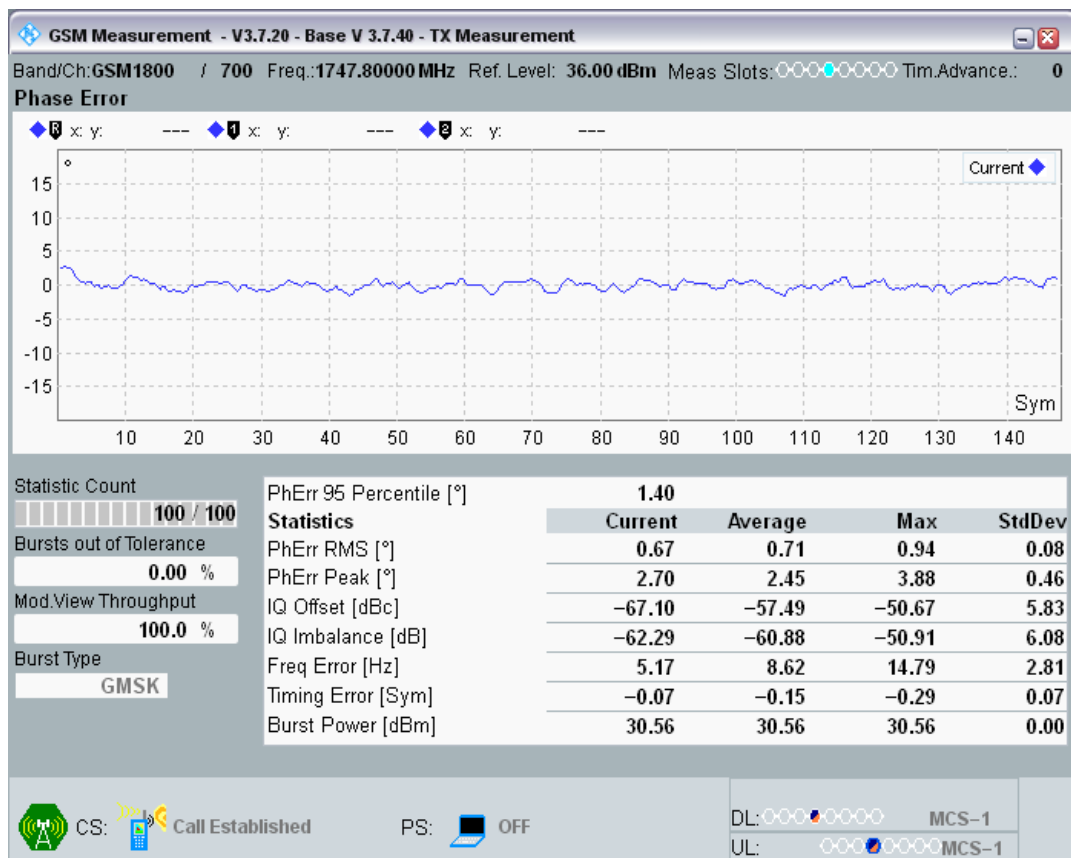


DCS1800 Channel=700 PCL=0 TU1_5.png

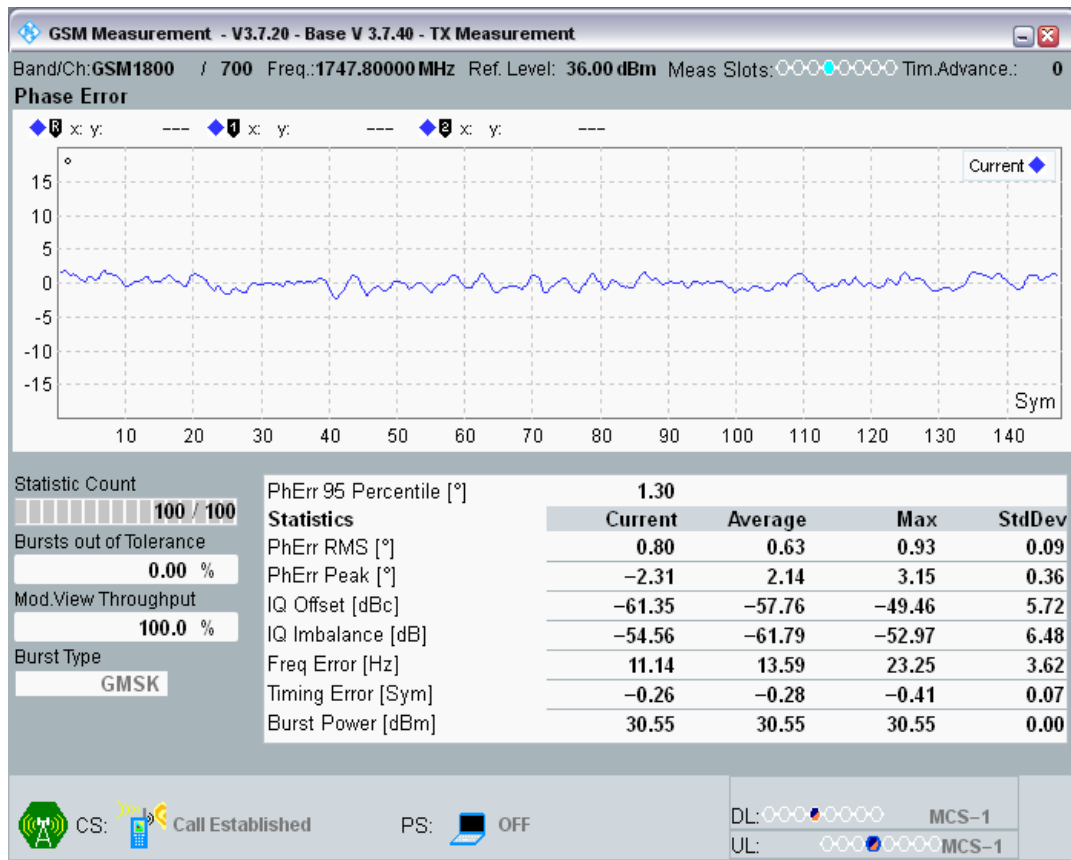


DCS1800 Channel=700 PCL=0 TU50.png




DCS1800 Channel=885 PCL=0 HT100.png

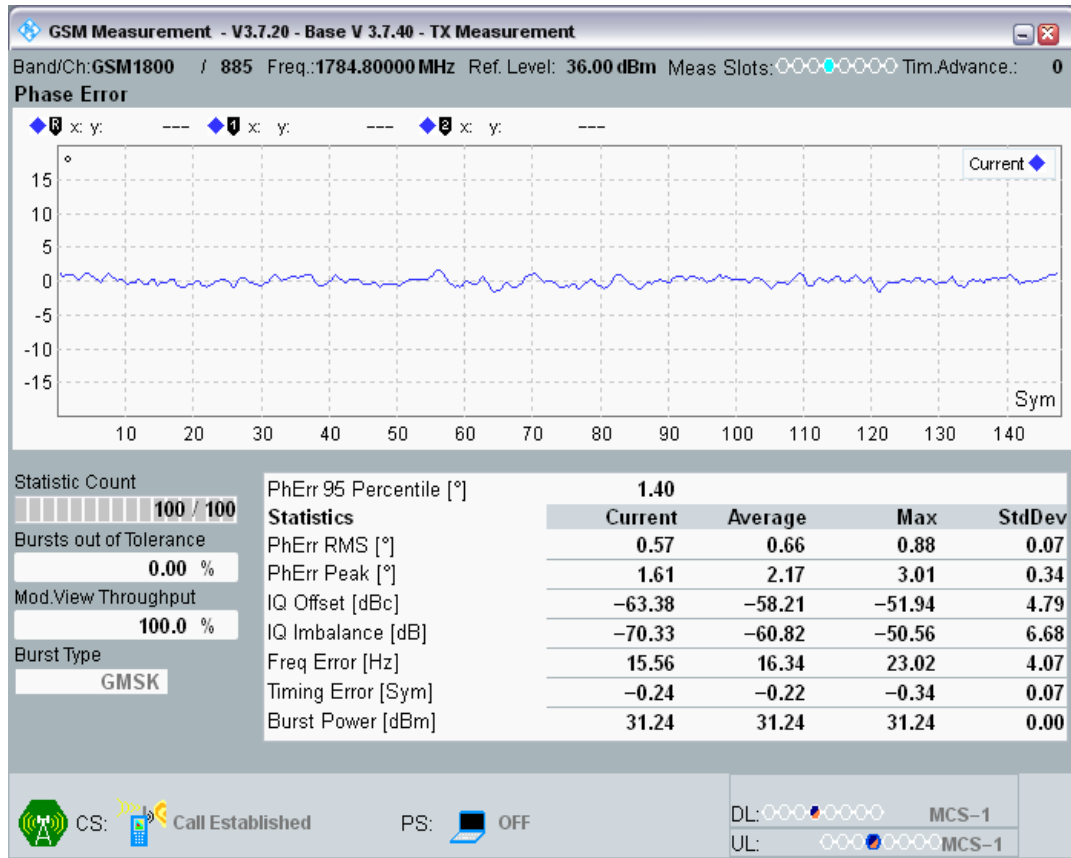


DCS1800 Channel=885 PCL=0 RA130.png

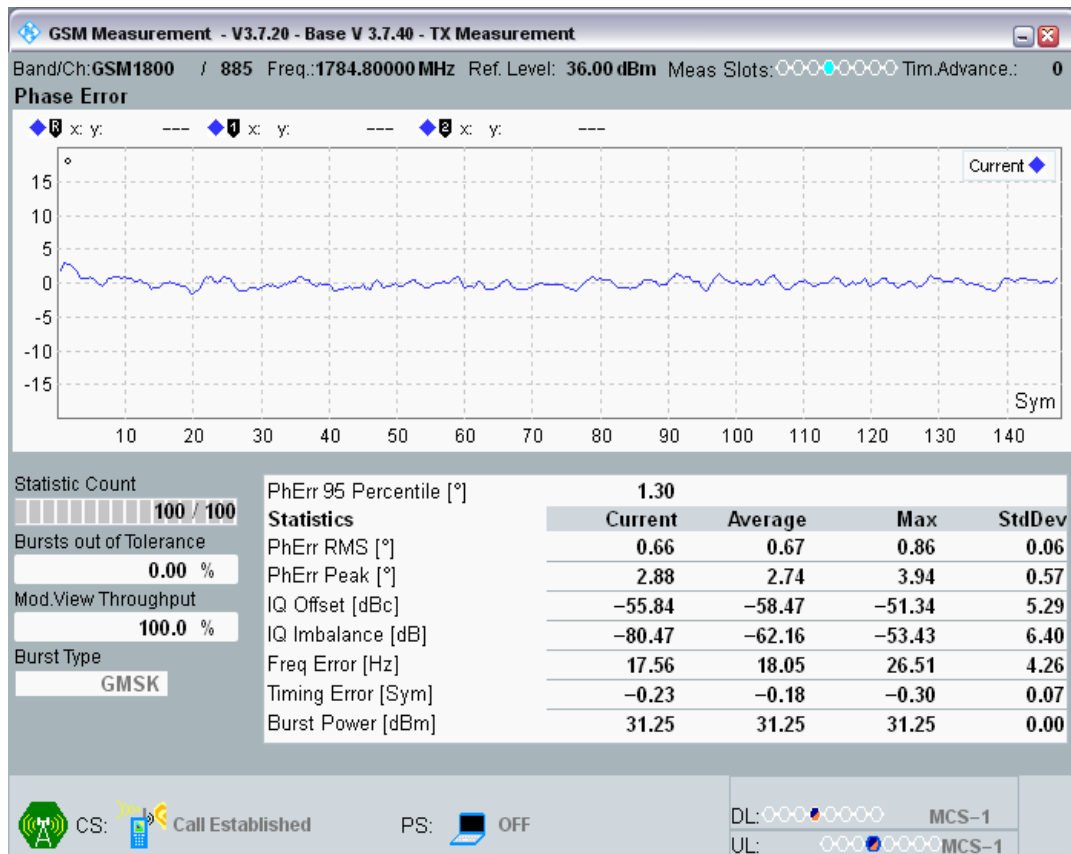


DCS1800 Channel=885 PCL=0 TU1_5.png

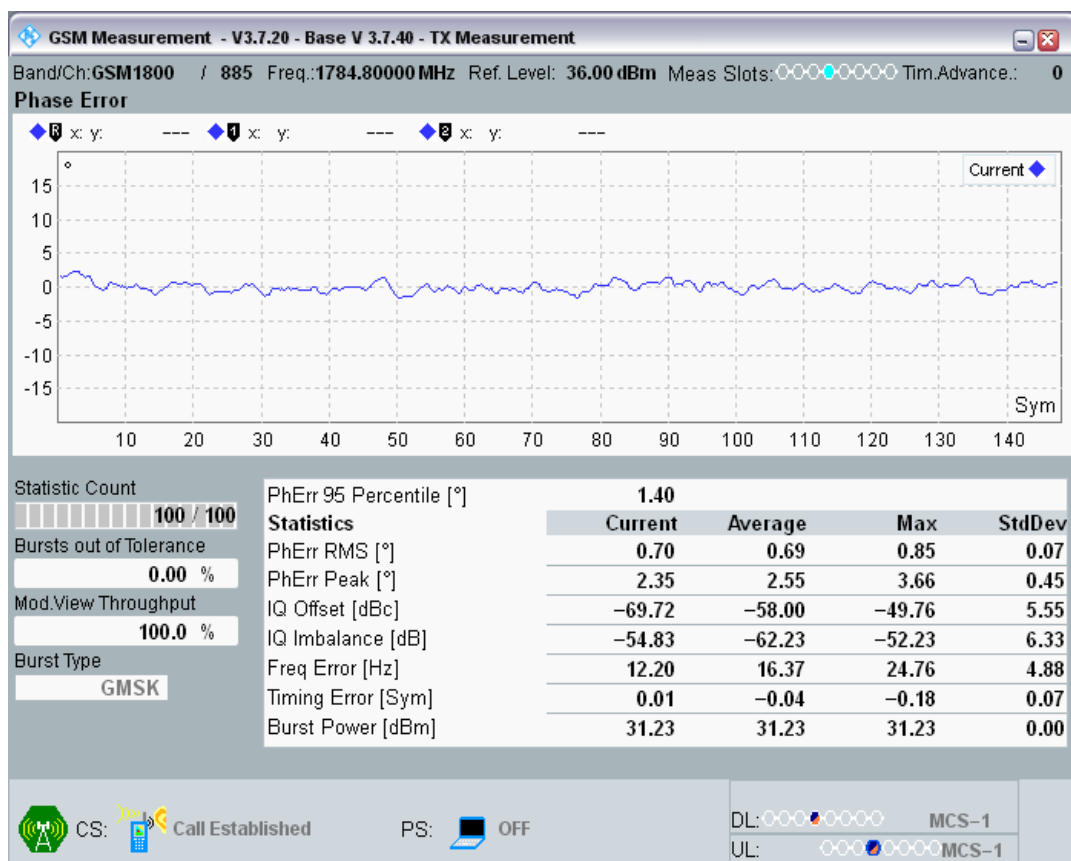


DCS1800 Channel=885 PCL=0 TU50.png

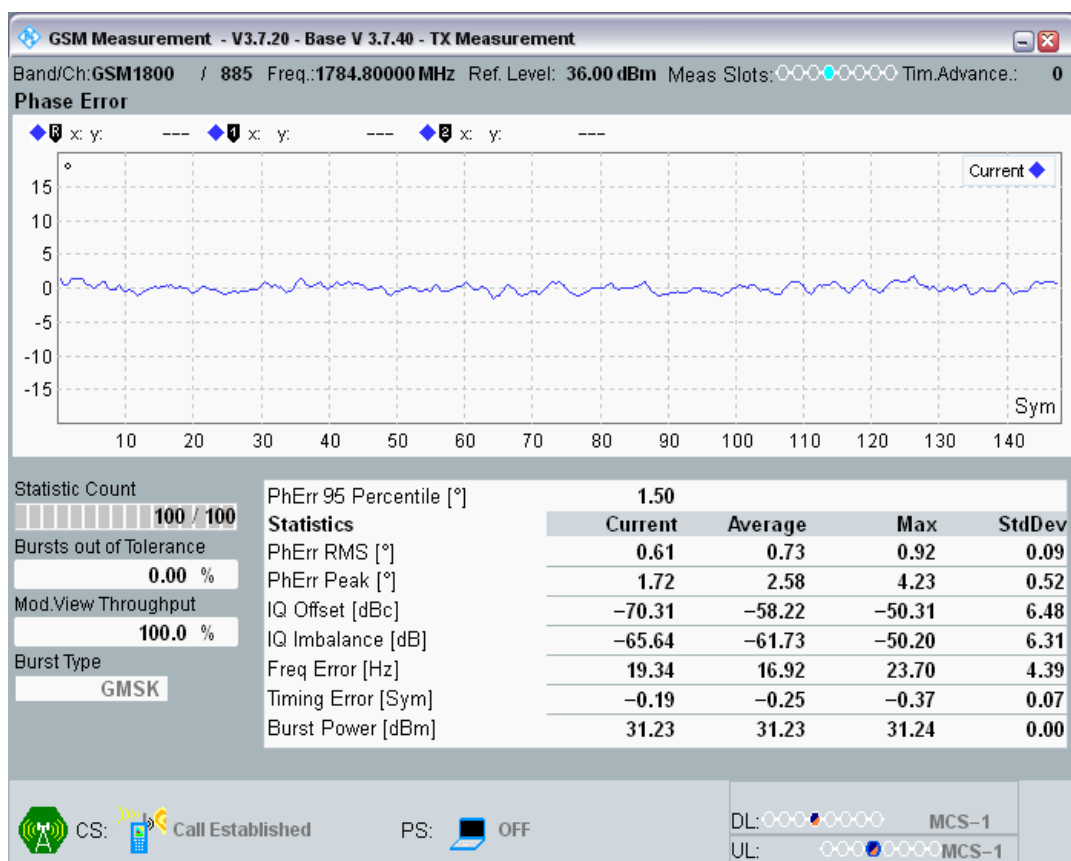


GSM900 Channel=124 PCL=5 HT100.png

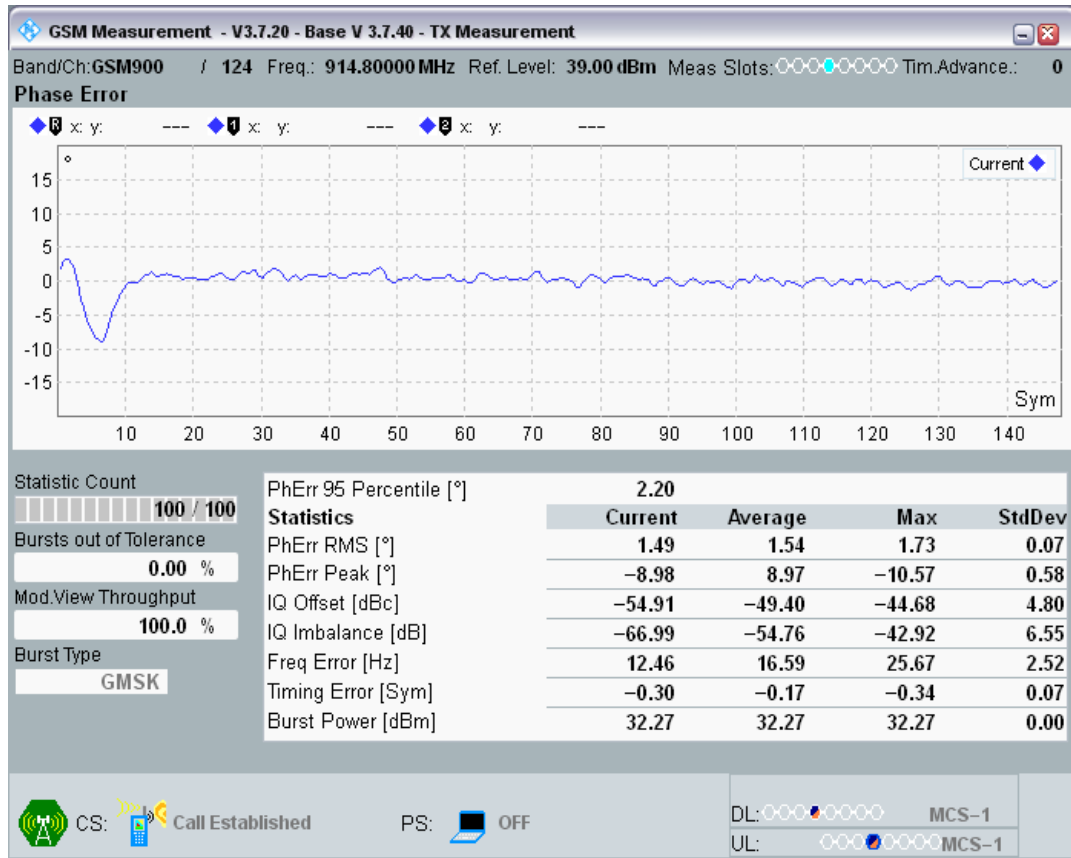


GSM900 Channel=124 PCL=5 RA250.png

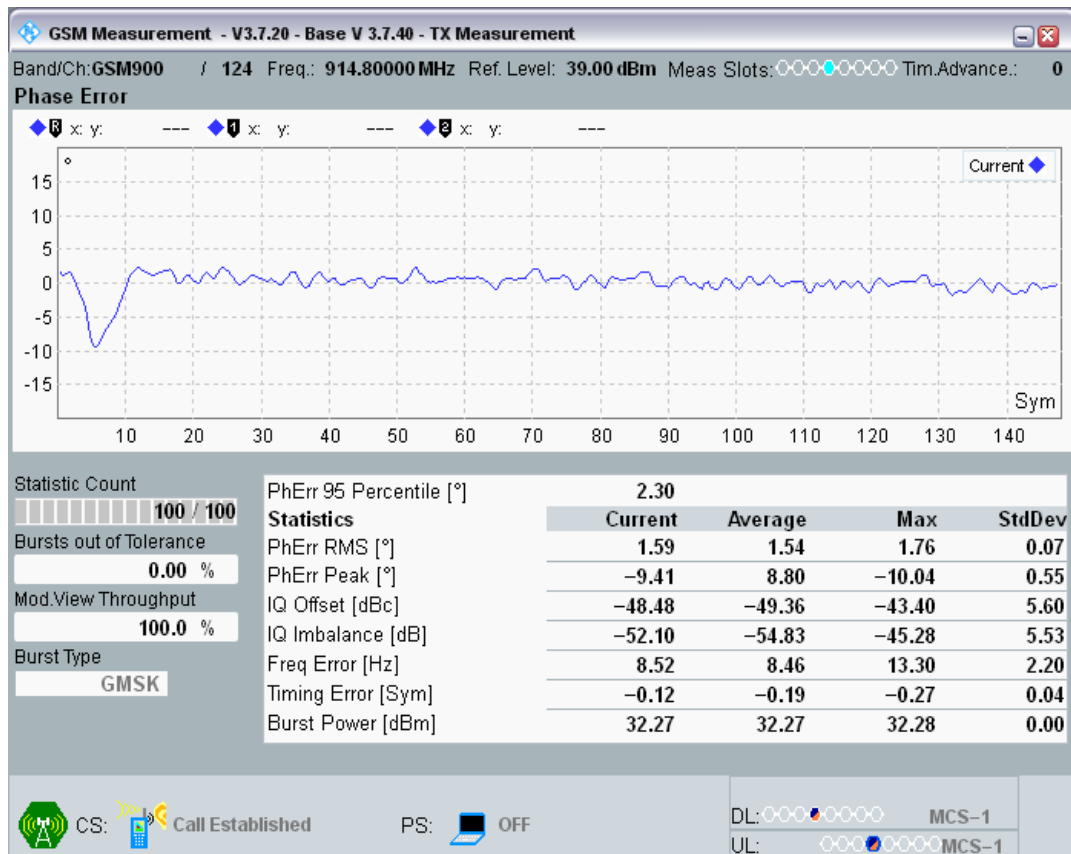


GSM900 Channel=124 PCL=5 TU3.png

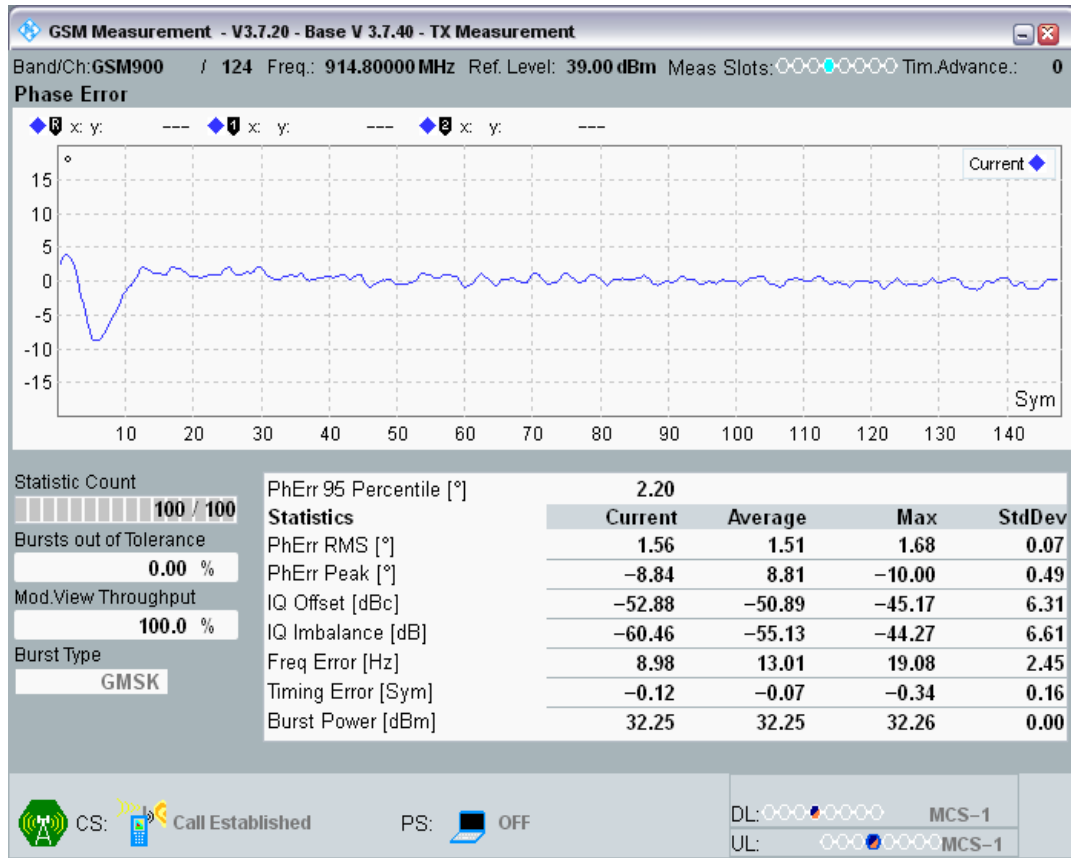


GSM900 Channel=124 PCL=5 TU50.png

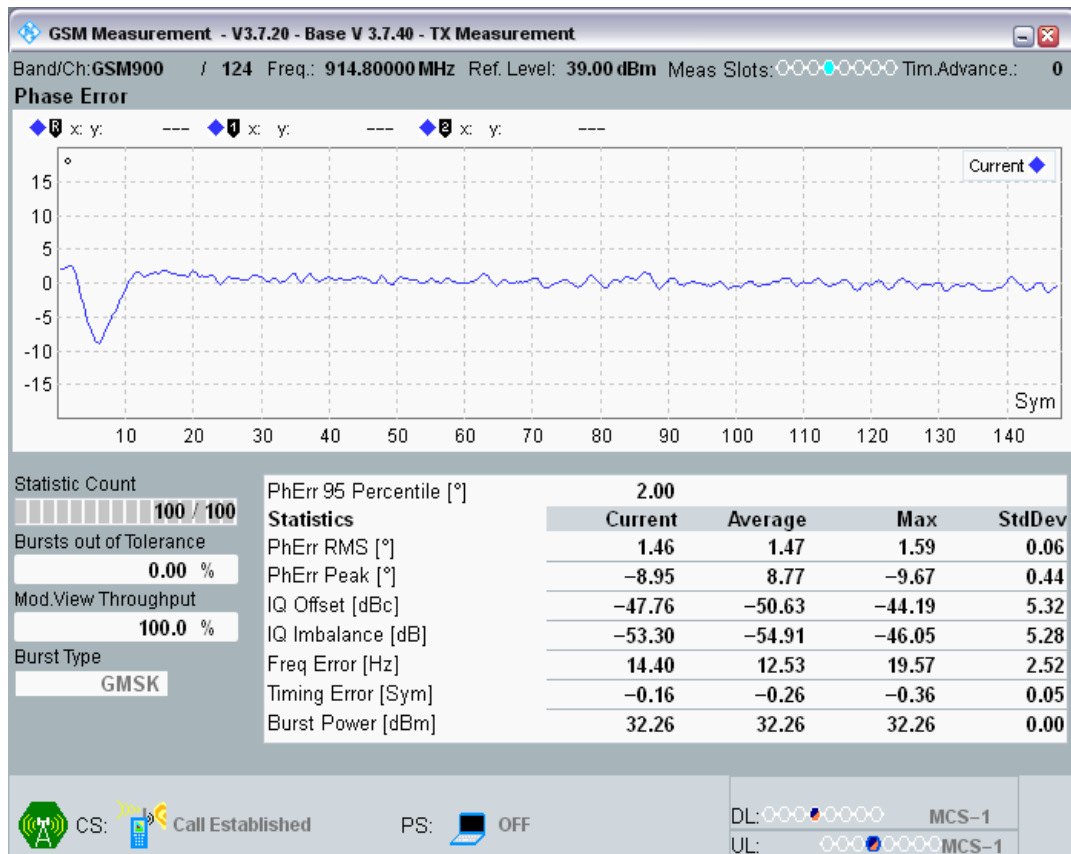


GSM900 Channel=60 PCL=5 HT100.png

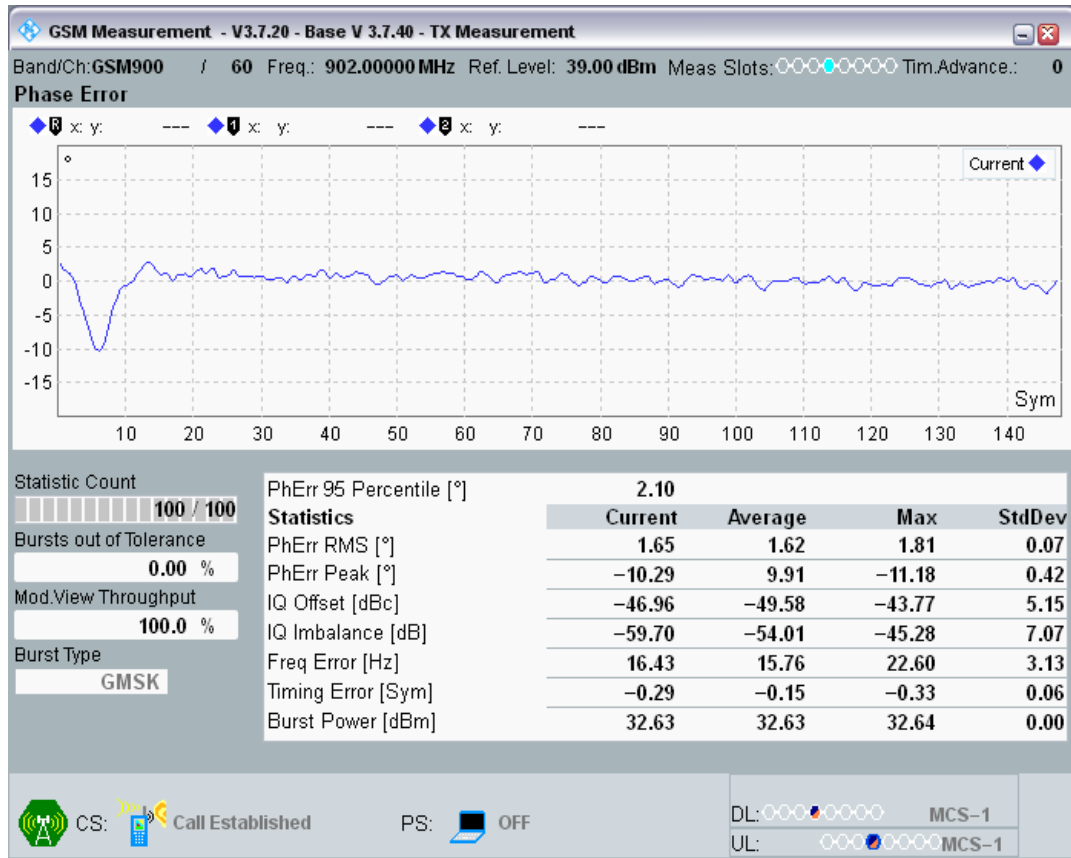


GSM900 Channel=60 PCL=5 RA250.png

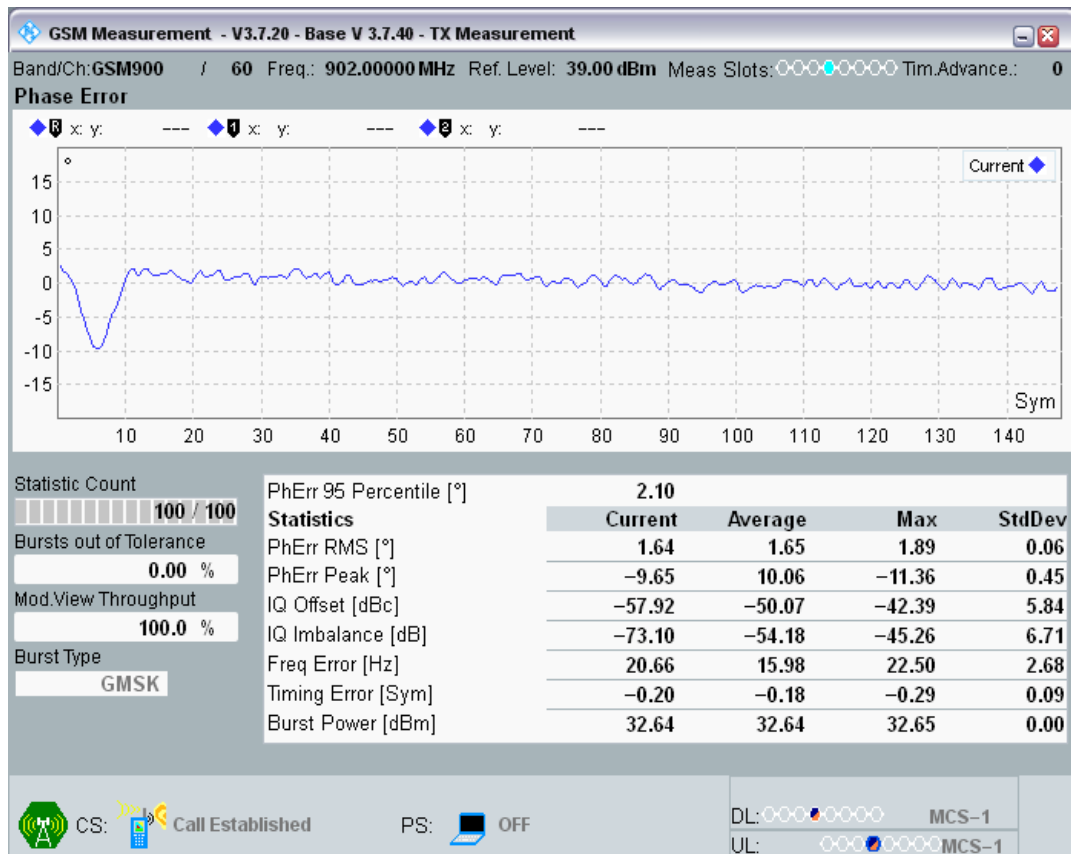


GSM900 Channel=60 PCL=5 TU3.png

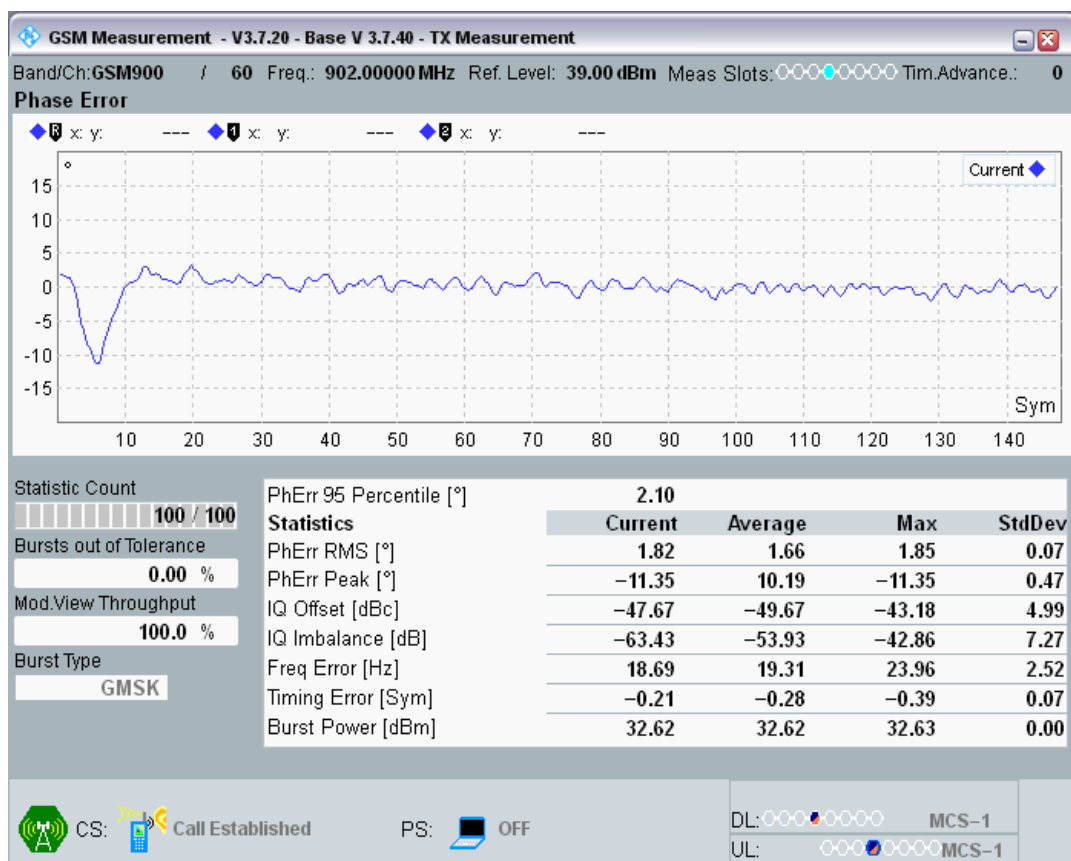


GSM900 Channel=60 PCL=5 TU50.png

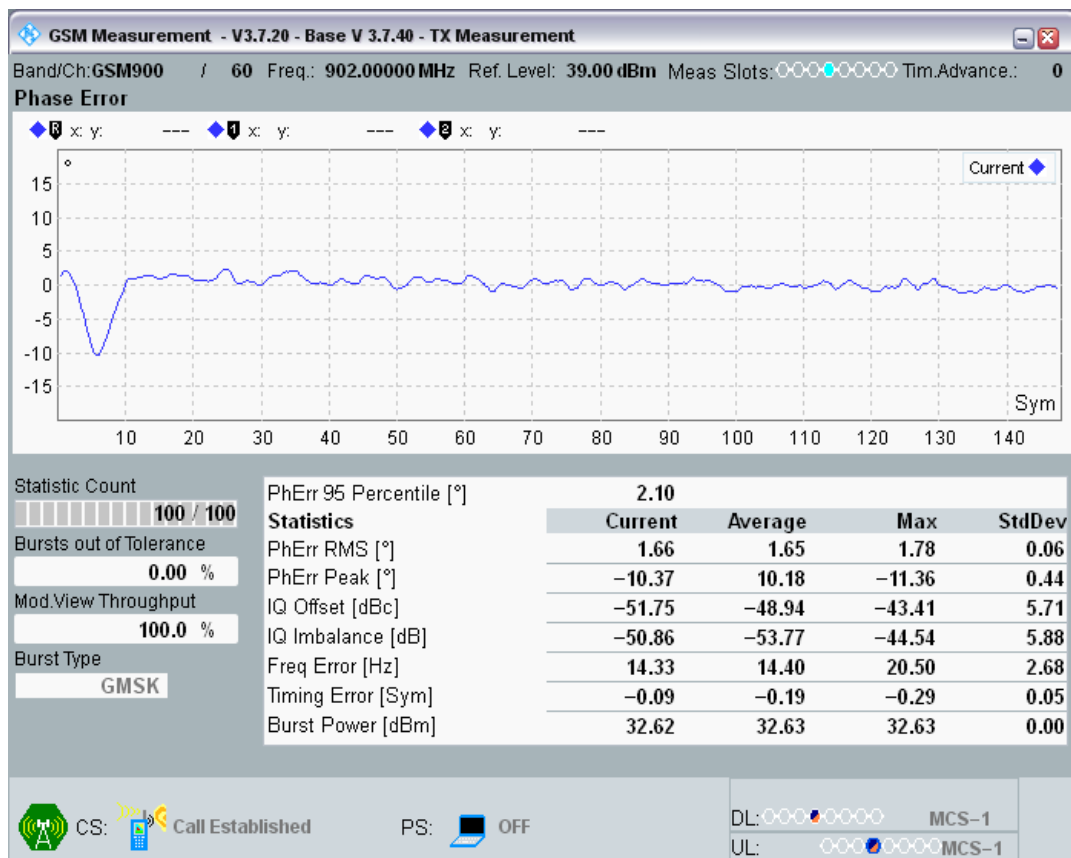


GSM900 Channel=975 PCL=5 HT100.png

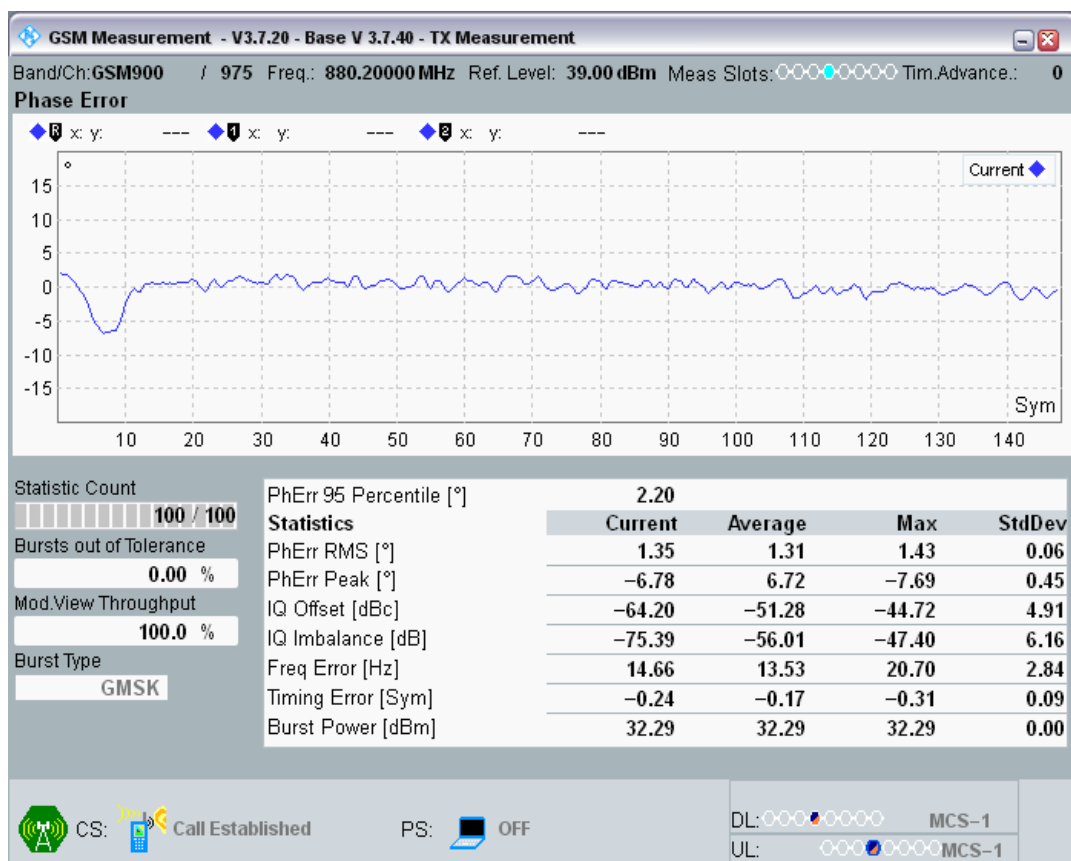

GSM900 Channel=975 PCL=5 RA250.png

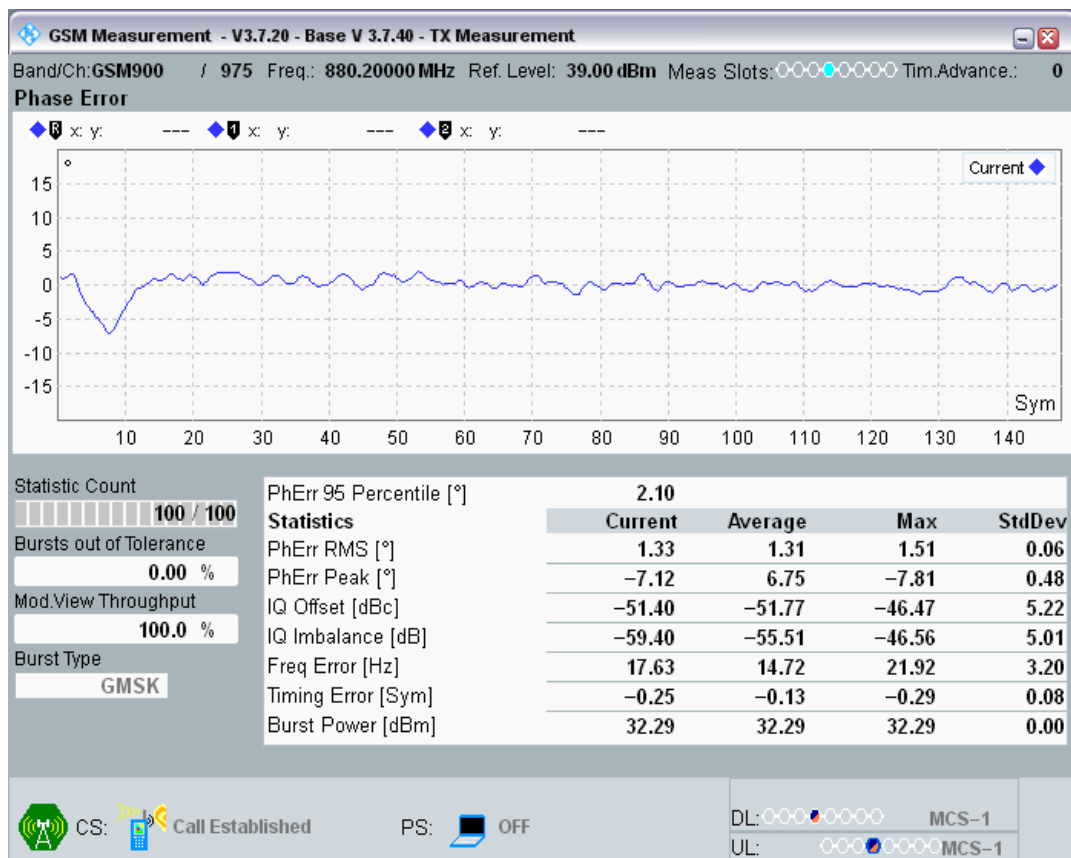

GSM900 Channel=975 PCL=5 TU3.png

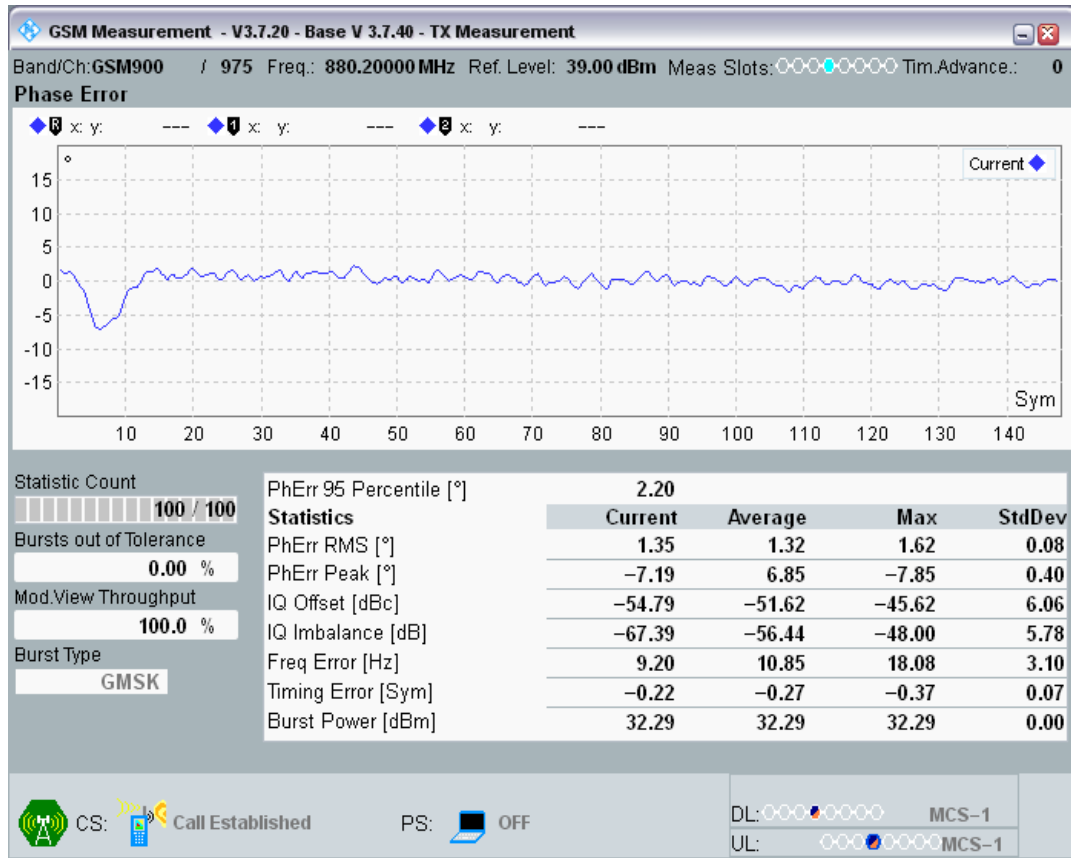

GSM900 Channel=975 PCL=5 TU50.png



Clause 4.2.5 Transmitter output power and burst timing

Band	Channel	Frequency (MHz)	PCL	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
DCS1800	512	1710.2	0	Power	30.47253	28	32	PASS
DCS1800	512	1710.2	0	PvT	-	-	-	PASS
DCS1800	512	1710.2	1	Power	29.2663	25	31	PASS
DCS1800	512	1710.2	1	PvT	-	-	-	PASS
DCS1800	512	1710.2	2	Power	27.31754	23	29	PASS
DCS1800	512	1710.2	2	PvT	-	-	-	PASS
DCS1800	512	1710.2	3	Power	25.29312	21	27	PASS
DCS1800	512	1710.2	3	PvT	-	-	-	PASS
DCS1800	512	1710.2	4	Power	23.36807	19	25	PASS
DCS1800	512	1710.2	4	PvT	-	-	-	PASS
DCS1800	512	1710.2	5	Power	21.38361	17	23	PASS
DCS1800	512	1710.2	5	PvT	-	-	-	PASS
DCS1800	512	1710.2	6	Power	19.33774	15	21	PASS
DCS1800	512	1710.2	6	PvT	-	-	-	PASS
DCS1800	512	1710.2	7	Power	17.38016	13	19	PASS
DCS1800	512	1710.2	7	PvT	-	-	-	PASS
DCS1800	512	1710.2	8	Power	15.38983	11	17	PASS
DCS1800	512	1710.2	8	PvT	-	-	-	PASS
DCS1800	512	1710.2	9	Power	13.3732	8	16	PASS
DCS1800	512	1710.2	9	PvT	-	-	-	PASS
DCS1800	512	1710.2	10	Power	11.27704	6	14	PASS
DCS1800	512	1710.2	10	PvT	-	-	-	PASS
DCS1800	512	1710.2	11	Power	9.332184	4	12	PASS
DCS1800	512	1710.2	11	PvT	-	-	-	PASS
DCS1800	512	1710.2	12	Power	7.004913	2	10	PASS
DCS1800	512	1710.2	12	PvT	-	-	-	PASS
DCS1800	512	1710.2	13	Power	4.934021	0	8	PASS
DCS1800	512	1710.2	13	PvT	-	-	-	PASS
DCS1800	512	1710.2	14	Power	2.981232	-3	7	PASS
DCS1800	512	1710.2	14	PvT	-	-	-	PASS
DCS1800	512	1710.2	15	Power	0.8358459	-5	5	PASS
DCS1800	512	1710.2	15	PvT	-	-	-	PASS
DCS1800	700	1747.8	0	Power	30.53308	28	32	PASS
DCS1800	700	1747.8	0	PvT	-	-	-	PASS
DCS1800	700	1747.8	1	Power	29.31827	25	31	PASS
DCS1800	700	1747.8	1	PvT	-	-	-	PASS
DCS1800	700	1747.8	2	Power	27.31671	23	29	PASS
DCS1800	700	1747.8	2	PvT	-	-	-	PASS
DCS1800	700	1747.8	3	Power	25.27432	21	27	PASS
DCS1800	700	1747.8	3	PvT	-	-	-	PASS
DCS1800	700	1747.8	4	Power	23.27353	19	25	PASS


DCS1800	700	1747.8	4	PvT	-	-	-	PASS
DCS1800	700	1747.8	5	Power	21.31036	17	23	PASS
DCS1800	700	1747.8	5	PvT	-	-	-	PASS
DCS1800	700	1747.8	6	Power	19.29681	15	21	PASS
DCS1800	700	1747.8	6	PvT	-	-	-	PASS
DCS1800	700	1747.8	7	Power	17.30634	13	19	PASS
DCS1800	700	1747.8	7	PvT	-	-	-	PASS
DCS1800	700	1747.8	8	Power	15.24707	11	17	PASS
DCS1800	700	1747.8	8	PvT	-	-	-	PASS
DCS1800	700	1747.8	9	Power	13.20105	8	16	PASS
DCS1800	700	1747.8	9	PvT	-	-	-	PASS
DCS1800	700	1747.8	10	Power	11.09473	6	14	PASS
DCS1800	700	1747.8	10	PvT	-	-	-	PASS
DCS1800	700	1747.8	11	Power	9.032104	4	12	PASS
DCS1800	700	1747.8	11	PvT	-	-	-	PASS
DCS1800	700	1747.8	12	Power	7.189209	2	10	PASS
DCS1800	700	1747.8	12	PvT	-	-	-	PASS
DCS1800	700	1747.8	13	Power	5.148041	0	8	PASS
DCS1800	700	1747.8	13	PvT	-	-	-	PASS
DCS1800	700	1747.8	14	Power	3.204163	-3	7	PASS
DCS1800	700	1747.8	14	PvT	-	-	-	PASS
DCS1800	700	1747.8	15	Power	1.034424	-5	5	PASS
DCS1800	700	1747.8	15	PvT	-	-	-	PASS
DCS1800	885	1784.8	0	Power	31.11398	28	32	PASS
DCS1800	885	1784.8	0	PvT	-	-	-	PASS
DCS1800	885	1784.8	1	Power	29.96255	25	31	PASS
DCS1800	885	1784.8	1	PvT	-	-	-	PASS
DCS1800	885	1784.8	2	Power	27.97275	23	29	PASS
DCS1800	885	1784.8	2	PvT	-	-	-	PASS
DCS1800	885	1784.8	3	Power	25.95154	21	27	PASS
DCS1800	885	1784.8	3	PvT	-	-	-	PASS
DCS1800	885	1784.8	4	Power	23.92398	19	25	PASS
DCS1800	885	1784.8	4	PvT	-	-	-	PASS
DCS1800	885	1784.8	5	Power	21.89526	17	23	PASS
DCS1800	885	1784.8	5	PvT	-	-	-	PASS
DCS1800	885	1784.8	6	Power	19.91379	15	21	PASS
DCS1800	885	1784.8	6	PvT	-	-	-	PASS
DCS1800	885	1784.8	7	Power	17.9054	13	19	PASS
DCS1800	885	1784.8	7	PvT	-	-	-	PASS
DCS1800	885	1784.8	8	Power	15.85931	11	17	PASS
DCS1800	885	1784.8	8	PvT	-	-	-	PASS
DCS1800	885	1784.8	9	Power	13.77051	8	16	PASS
DCS1800	885	1784.8	9	PvT	-	-	-	PASS

DCS1800	885	1784.8	10	Power	11.59259	6	14	PASS
DCS1800	885	1784.8	10	PvT	-	-	-	PASS
DCS1800	885	1784.8	11	Power	9.540924	4	12	PASS
DCS1800	885	1784.8	11	PvT	-	-	-	PASS
DCS1800	885	1784.8	12	Power	7.921722	2	10	PASS
DCS1800	885	1784.8	12	PvT	-	-	-	PASS
DCS1800	885	1784.8	13	Power	5.822601	0	8	PASS
DCS1800	885	1784.8	13	PvT	-	-	-	PASS
DCS1800	885	1784.8	14	Power	3.896667	-3	7	PASS
DCS1800	885	1784.8	14	PvT	-	-	-	PASS
DCS1800	885	1784.8	15	Power	1.743713	-5	5	PASS
DCS1800	885	1784.8	15	PvT	-	-	-	PASS
GSM900	975	880.2	5	Power	32.41187	31	35	PASS
GSM900	975	880.2	5	PvT	-	-	-	PASS
GSM900	975	880.2	6	Power	31.70053	28	34	PASS
GSM900	975	880.2	6	PvT	-	-	-	PASS
GSM900	975	880.2	7	Power	29.67865	26	32	PASS
GSM900	975	880.2	7	PvT	-	-	-	PASS
GSM900	975	880.2	8	Power	27.65436	24	30	PASS
GSM900	975	880.2	8	PvT	-	-	-	PASS
GSM900	975	880.2	9	Power	25.61932	22	28	PASS
GSM900	975	880.2	9	PvT	-	-	-	PASS
GSM900	975	880.2	10	Power	23.63315	20	26	PASS
GSM900	975	880.2	10	PvT	-	-	-	PASS
GSM900	975	880.2	11	Power	21.95291	18	24	PASS
GSM900	975	880.2	11	PvT	-	-	-	PASS
GSM900	975	880.2	12	Power	19.93591	16	22	PASS
GSM900	975	880.2	12	PvT	-	-	-	PASS
GSM900	975	880.2	13	Power	17.98886	14	20	PASS
GSM900	975	880.2	13	PvT	-	-	-	PASS
GSM900	975	880.2	14	Power	15.96216	12	18	PASS
GSM900	975	880.2	14	PvT	-	-	-	PASS
GSM900	975	880.2	15	Power	13.82751	10	16	PASS
GSM900	975	880.2	15	PvT	-	-	-	PASS
GSM900	975	880.2	16	Power	11.81174	6	16	PASS
GSM900	975	880.2	16	PvT	-	-	-	PASS
GSM900	975	880.2	17	Power	9.799591	4	14	PASS
GSM900	975	880.2	17	PvT	-	-	-	PASS
GSM900	975	880.2	18	Power	7.836334	2	12	PASS
GSM900	975	880.2	18	PvT	-	-	-	PASS
GSM900	975	880.2	19	Power	4.625824	0	10	PASS
GSM900	975	880.2	19	PvT	-	-	-	PASS
GSM900	60	902	5	Power	32.62726	31	35	PASS

GSM900	60	902	5	PvT	-	-	-	PASS
GSM900	60	902	6	Power	31.84729	28	34	PASS
GSM900	60	902	6	PvT	-	-	-	PASS
GSM900	60	902	7	Power	29.8378	26	32	PASS
GSM900	60	902	7	PvT	-	-	-	PASS
GSM900	60	902	8	Power	27.78036	24	30	PASS
GSM900	60	902	8	PvT	-	-	-	PASS
GSM900	60	902	9	Power	25.73932	22	28	PASS
GSM900	60	902	9	PvT	-	-	-	PASS
GSM900	60	902	10	Power	23.74844	20	26	PASS
GSM900	60	902	10	PvT	-	-	-	PASS
GSM900	60	902	11	Power	21.6933	18	24	PASS
GSM900	60	902	11	PvT	-	-	-	PASS
GSM900	60	902	12	Power	19.68103	16	22	PASS
GSM900	60	902	12	PvT	-	-	-	PASS
GSM900	60	902	13	Power	17.7048	14	20	PASS
GSM900	60	902	13	PvT	-	-	-	PASS
GSM900	60	902	14	Power	15.64621	12	18	PASS
GSM900	60	902	14	PvT	-	-	-	PASS
GSM900	60	902	15	Power	13.54376	10	16	PASS
GSM900	60	902	15	PvT	-	-	-	PASS
GSM900	60	902	16	Power	11.50757	6	16	PASS
GSM900	60	902	16	PvT	-	-	-	PASS
GSM900	60	902	17	Power	9.510834	4	14	PASS
GSM900	60	902	17	PvT	-	-	-	PASS
GSM900	60	902	18	Power	7.560974	2	12	PASS
GSM900	60	902	18	PvT	-	-	-	PASS
GSM900	60	902	19	Power	4.295074	0	10	PASS
GSM900	60	902	19	PvT	-	-	-	PASS
GSM900	124	914.8	5	Power	32.13312	31	35	PASS
GSM900	124	914.8	5	PvT	-	-	-	PASS
GSM900	124	914.8	6	Power	31.36441	28	34	PASS
GSM900	124	914.8	6	PvT	-	-	-	PASS
GSM900	124	914.8	7	Power	29.41422	26	32	PASS
GSM900	124	914.8	7	PvT	-	-	-	PASS
GSM900	124	914.8	8	Power	27.3139	24	30	PASS
GSM900	124	914.8	8	PvT	-	-	-	PASS
GSM900	124	914.8	9	Power	25.29895	22	28	PASS
GSM900	124	914.8	9	PvT	-	-	-	PASS
GSM900	124	914.8	10	Power	23.30862	20	26	PASS
GSM900	124	914.8	10	PvT	-	-	-	PASS
GSM900	124	914.8	11	Power	21.67041	18	24	PASS
GSM900	124	914.8	11	PvT	-	-	-	PASS

GSM900	124	914.8	12	Power	19.67371	16	22	PASS
GSM900	124	914.8	12	PvT	-	-	-	PASS
GSM900	124	914.8	13	Power	17.71027	14	20	PASS
GSM900	124	914.8	13	PvT	-	-	-	PASS
GSM900	124	914.8	14	Power	15.65302	12	18	PASS
GSM900	124	914.8	14	PvT	-	-	-	PASS
GSM900	124	914.8	15	Power	13.65082	10	16	PASS
GSM900	124	914.8	15	PvT	-	-	-	PASS
GSM900	124	914.8	16	Power	11.56909	6	16	PASS
GSM900	124	914.8	16	PvT	-	-	-	PASS
GSM900	124	914.8	17	Power	9.562775	4	14	PASS
GSM900	124	914.8	17	PvT	-	-	-	PASS
GSM900	124	914.8	18	Power	7.566895	2	12	PASS
GSM900	124	914.8	18	PvT	-	-	-	PASS
GSM900	124	914.8	19	Power	4.33606	0	10	PASS
GSM900	124	914.8	19	PvT	-	-	-	PASS

DCS1800 Channel=512 PCL=0.png

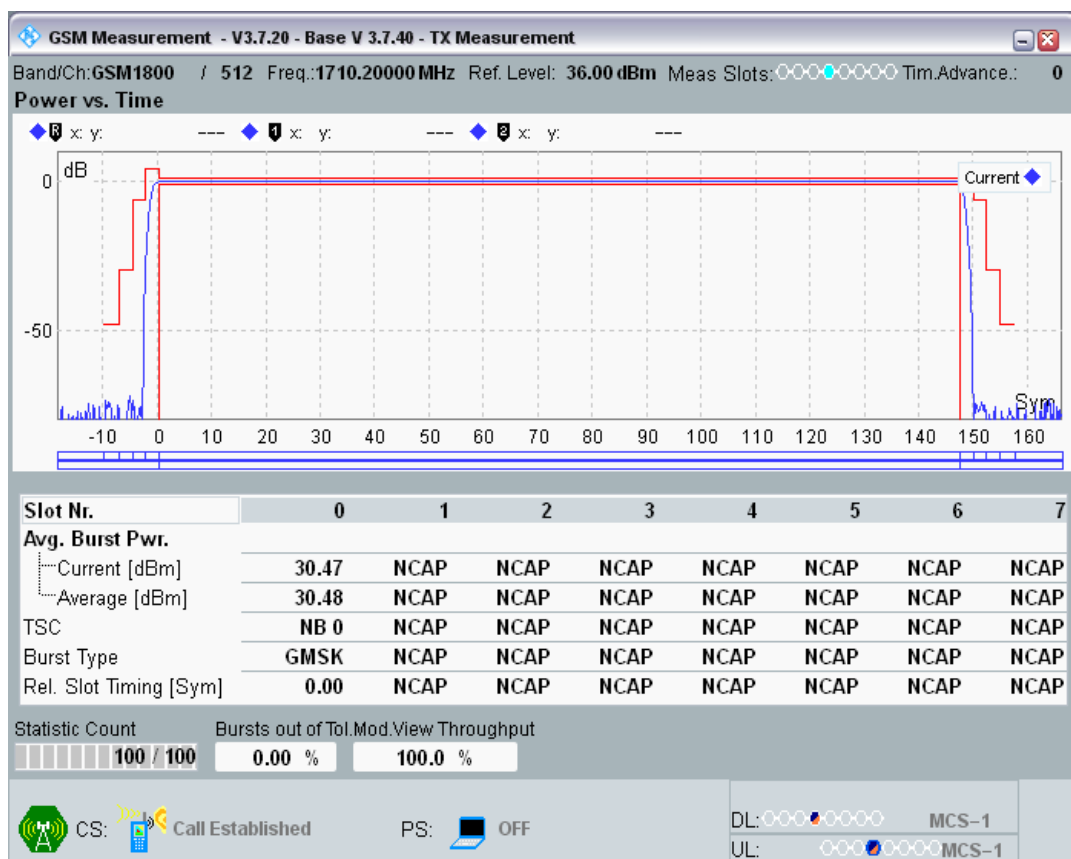

DCS1800 Channel=512 PCL=15.png




DCS1800 Channel=700 PCL=0.png



DCS1800 Channel=700 PCL=15.png



DCS1800 Channel=885 PCL=0.png

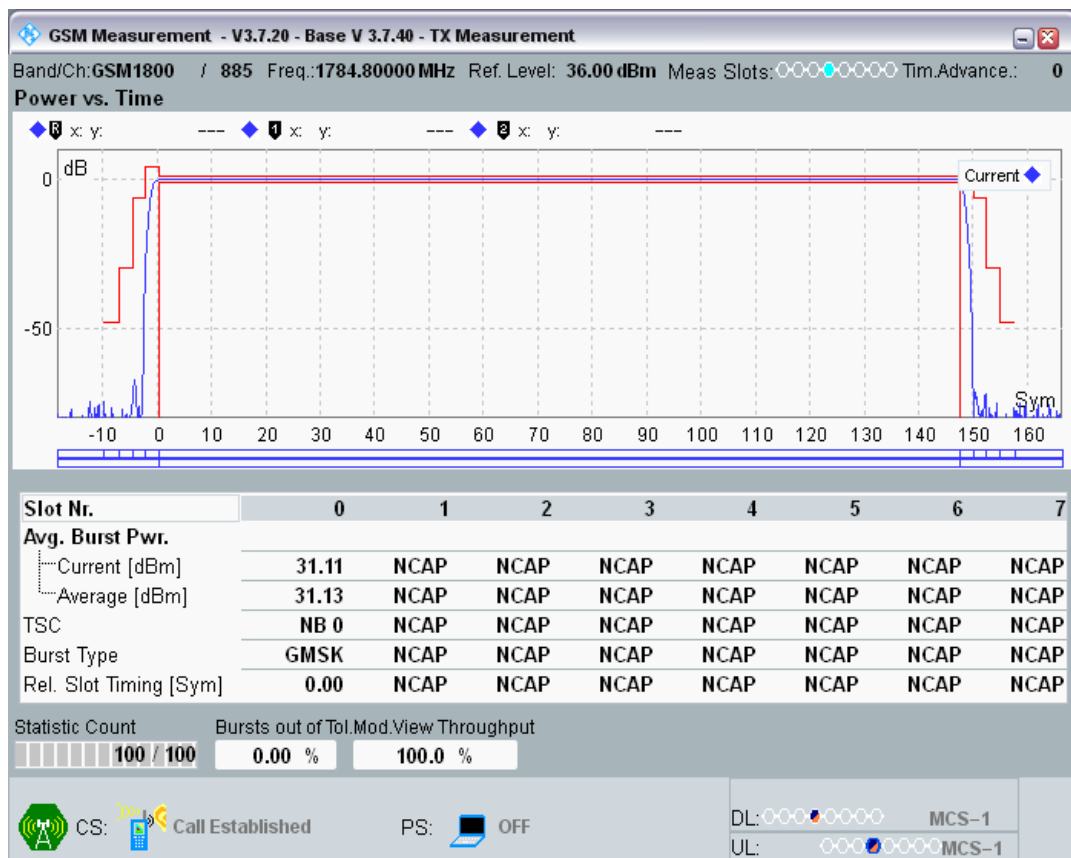

DCS1800 Channel=885 PCL=15.png



GSM900 Channel=124 PCL=19.png




GSM900 Channel=124 PCL=5.png




GSM900 Channel=60 PCL=19.png




GSM900 Channel=60 PCL=5.png

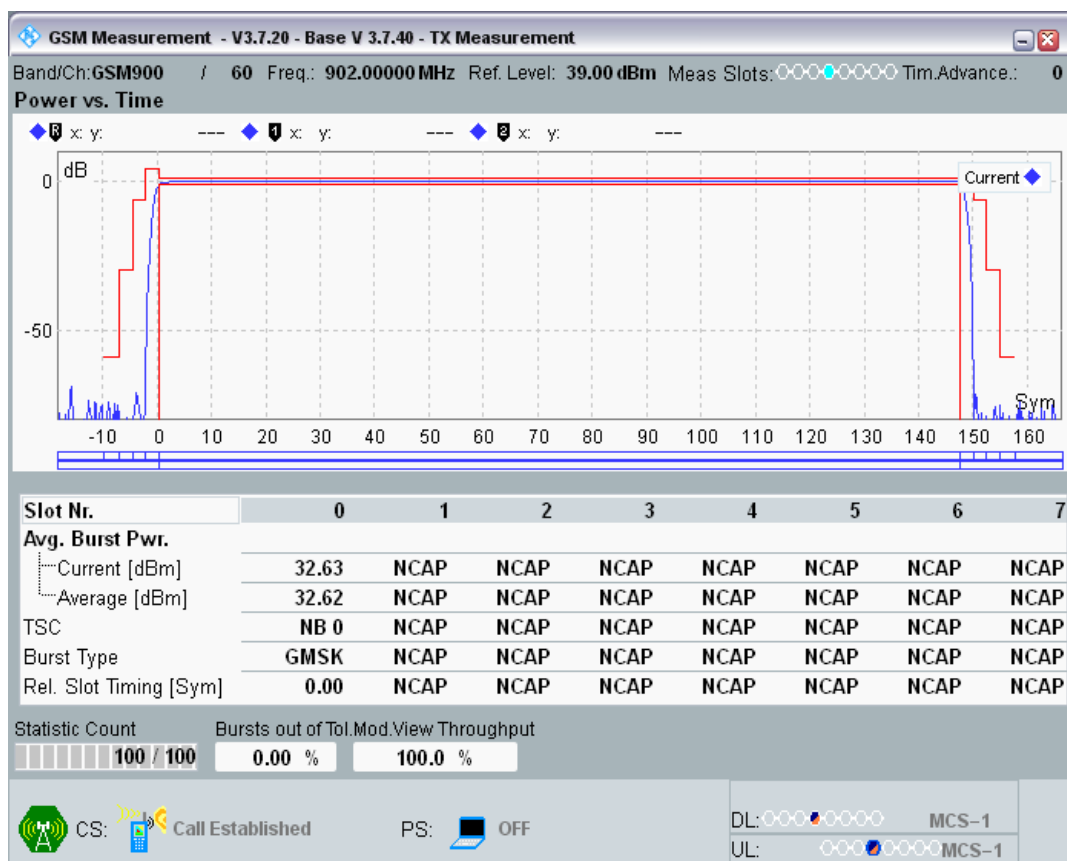

GSM900 Channel=975 PCL=19.png

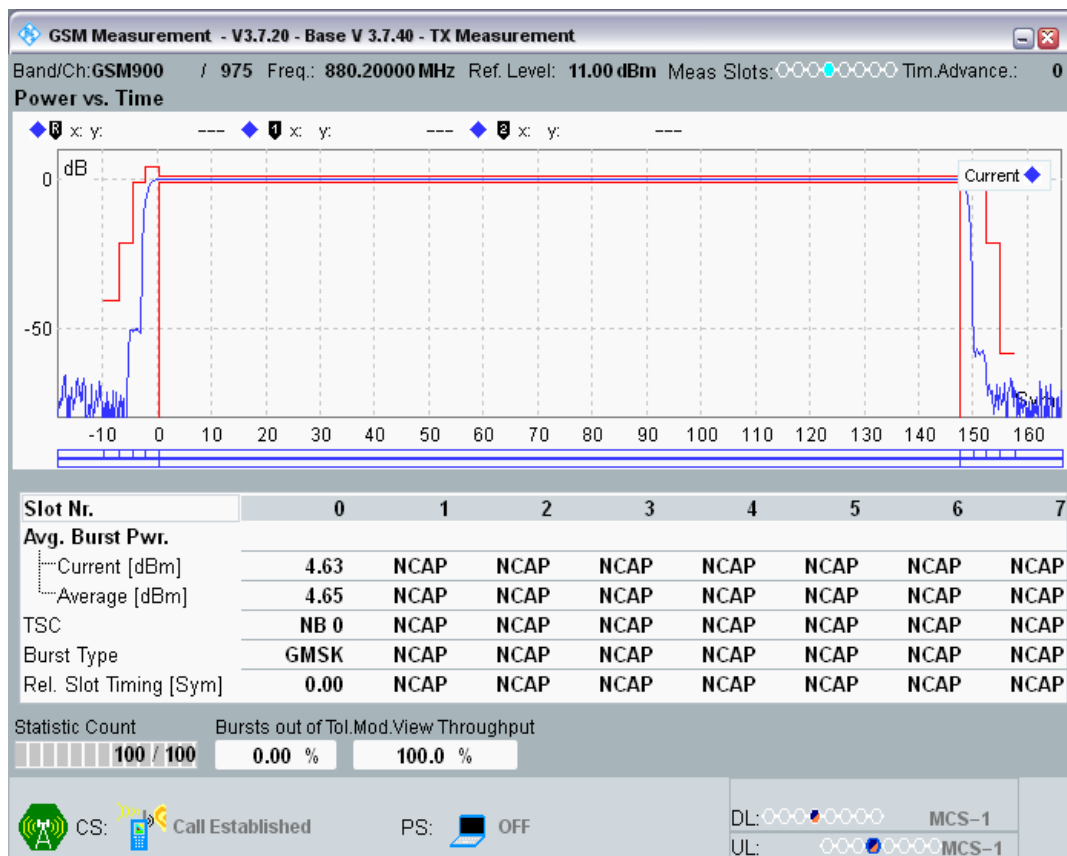

GSM900 Channel=975 PCL=5.png

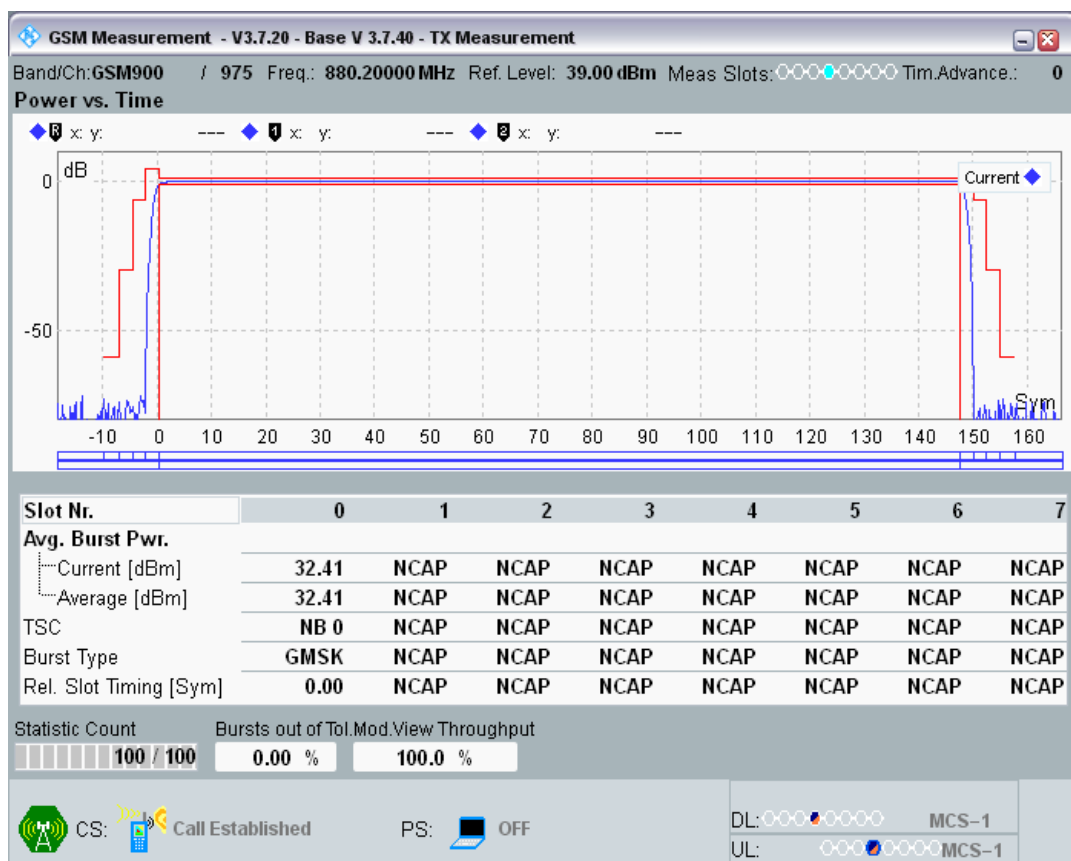

Clause 4.2.6 Transmitter-Modulation Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-80.71	-60	-58.21	-56	PASS
DCS1800	512	1710.2	0	-1600 KHz	-80.70	-60	-58.21	-56	PASS
DCS1800	512	1710.2	0	-1400 KHz	-79.72	-60	-57.23	-56	PASS
DCS1800	512	1710.2	0	-1200 KHz	-78.47	-60	-55.97	-56	PASS
DCS1800	512	1710.2	0	-1000 KHz	-76.51	-60	-54.02	-56	PASS
DCS1800	512	1710.2	0	-800 KHz	-75.65	-60	-53.15	-56	PASS
DCS1800	512	1710.2	0	-600 KHz	-73.74	-60	-51.24	-56	PASS
DCS1800	512	1710.2	0	-400 KHz	-68.31	-60	-45.81	-36	PASS
DCS1800	512	1710.2	0	-250 KHz	-41.13	-33	-18.63	-36	PASS

DCS1800	512	1710.2	0	-200 KHz	-36.47	-30	-13.98	-36	PASS
DCS1800	512	1710.2	0	-100 KHz	-8.49	0.5	14.00	-36	PASS
DCS1800	512	1710.2	0	100 KHz	-8.70	0.5	13.79	-36	PASS
DCS1800	512	1710.2	0	200 KHz	-36.50	-30	-14.01	-36	PASS
DCS1800	512	1710.2	0	250 KHz	-41.04	-33	-18.55	-36	PASS
DCS1800	512	1710.2	0	400 KHz	-68.36	-60	-45.87	-36	PASS
DCS1800	512	1710.2	0	600 KHz	-73.50	-60	-51.00	-56	PASS
DCS1800	512	1710.2	0	800 KHz	-75.37	-60	-52.88	-56	PASS
DCS1800	512	1710.2	0	1000 KHz	-75.98	-60	-53.48	-56	PASS
DCS1800	512	1710.2	0	1200 KHz	-77.90	-60	-55.40	-56	PASS
DCS1800	512	1710.2	0	1400 KHz	-79.34	-60	-56.85	-56	PASS
DCS1800	512	1710.2	0	1600 KHz	-80.44	-60	-57.94	-56	PASS
DCS1800	512	1710.2	0	1800 KHz	-80.86	-60	-58.36	-56	PASS
DCS1800	700	1747.8	0	-1800 KHz	-80.88	-60	-58.37	-56	PASS
DCS1800	700	1747.8	0	-1600 KHz	-80.51	-60	-58.00	-56	PASS
DCS1800	700	1747.8	0	-1400 KHz	-79.72	-60	-57.21	-56	PASS
DCS1800	700	1747.8	0	-1200 KHz	-78.22	-60	-55.71	-56	PASS
DCS1800	700	1747.8	0	-1000 KHz	-76.63	-60	-54.11	-56	PASS
DCS1800	700	1747.8	0	-800 KHz	-76.24	-60	-53.73	-56	PASS
DCS1800	700	1747.8	0	-600 KHz	-73.83	-60	-51.32	-56	PASS
DCS1800	700	1747.8	0	-400 KHz	-68.61	-60	-46.10	-36	PASS
DCS1800	700	1747.8	0	-250 KHz	-41.13	-33	-18.62	-36	PASS
DCS1800	700	1747.8	0	-200 KHz	-36.39	-30	-13.87	-36	PASS
DCS1800	700	1747.8	0	-100 KHz	-8.60	0.5	13.91	-36	PASS
DCS1800	700	1747.8	0	100 KHz	-8.67	0.5	13.85	-36	PASS


DCS1800	700	1747.8	0	200 KHz	-36.38	-30	-13.86	-36	PASS
DCS1800	700	1747.8	0	250 KHz	-40.96	-33	-18.45	-36	PASS
DCS1800	700	1747.8	0	400 KHz	-68.53	-60	-46.01	-36	PASS
DCS1800	700	1747.8	0	600 KHz	-73.62	-60	-51.11	-56	PASS
DCS1800	700	1747.8	0	800 KHz	-75.55	-60	-53.03	-56	PASS
DCS1800	700	1747.8	0	1000 KHz	-76.24	-60	-53.72	-56	PASS
DCS1800	700	1747.8	0	1200 KHz	-78.21	-60	-55.69	-56	PASS
DCS1800	700	1747.8	0	1400 KHz	-79.69	-60	-57.17	-56	PASS
DCS1800	700	1747.8	0	1600 KHz	-80.71	-60	-58.20	-56	PASS
DCS1800	700	1747.8	0	1800 KHz	-81.16	-60	-58.65	-56	PASS
DCS1800	885	1784.8	0	-1800 KHz	-81.19	-60	-58.13	-56	PASS
DCS1800	885	1784.8	0	-1600 KHz	-80.83	-60	-57.77	-56	PASS
DCS1800	885	1784.8	0	-1400 KHz	-79.70	-60	-56.64	-56	PASS
DCS1800	885	1784.8	0	-1200 KHz	-78.50	-60	-55.44	-56	PASS
DCS1800	885	1784.8	0	-1000 KHz	-76.59	-60	-53.53	-56	PASS
DCS1800	885	1784.8	0	-800 KHz	-75.86	-60	-52.80	-56	PASS
DCS1800	885	1784.8	0	-600 KHz	-73.66	-60	-50.60	-56	PASS
DCS1800	885	1784.8	0	-400 KHz	-68.06	-60	-45.00	-36	PASS
DCS1800	885	1784.8	0	-250 KHz	-41.03	-33	-17.97	-36	PASS
DCS1800	885	1784.8	0	-200 KHz	-36.48	-30	-13.41	-36	PASS
DCS1800	885	1784.8	0	-100 KHz	-8.64	0.5	14.42	-36	PASS
DCS1800	885	1784.8	0	100 KHz	-8.49	0.5	14.58	-36	PASS
DCS1800	885	1784.8	0	200 KHz	-36.53	-30	-13.47	-36	PASS
DCS1800	885	1784.8	0	250 KHz	-41.00	-33	-17.93	-36	PASS
DCS1800	885	1784.8	0	400 KHz	-67.79	-60	-44.73	-36	PASS
DCS1800	885	1784.8	0	600 KHz	-73.51	-60	-50.44	-56	PASS
DCS1800	885	1784.8	0	800 KHz	-75.34	-60	-52.28	-56	PASS

DCS1800	885	1784.8	0	1000 KHz	-76.13	-60	-53.07	-56	PASS
DCS1800	885	1784.8	0	1200 KHz	-77.89	-60	-54.83	-56	PASS
DCS1800	885	1784.8	0	1400 KHz	-79.33	-60	-56.27	-56	PASS
DCS1800	885	1784.8	0	1600 KHz	-80.77	-60	-57.71	-56	PASS
DCS1800	885	1784.8	0	1800 KHz	-81.11	-60	-58.05	-56	PASS
GSM900	975	880.2	5	-1800 KHz	-81.23	-60	-56.70	-51	PASS
GSM900	975	880.2	5	-1600 KHz	-81.43	-60	-56.90	-51	PASS
GSM900	975	880.2	5	-1400 KHz	-80.22	-60	-55.69	-51	PASS
GSM900	975	880.2	5	-1200 KHz	-78.73	-60	-54.19	-51	PASS
GSM900	975	880.2	5	-1000 KHz	-76.56	-60	-52.03	-51	PASS
GSM900	975	880.2	5	-800 KHz	-76.87	-60	-52.33	-51	PASS
GSM900	975	880.2	5	-600 KHz	-75.40	-60	-50.87	-51	PASS
GSM900	975	880.2	5	-400 KHz	-70.57	-60	-46.04	-36	PASS
GSM900	975	880.2	5	-250 KHz	-41.19	-33	-16.66	-36	PASS
GSM900	975	880.2	5	-200 KHz	-36.65	-30	-12.11	-36	PASS
GSM900	975	880.2	5	-100 KHz	-8.85	0.5	15.68	-36	PASS
GSM900	975	880.2	5	100 KHz	-8.57	0.5	15.96	-36	PASS
GSM900	975	880.2	5	200 KHz	-36.95	-30	-12.42	-36	PASS
GSM900	975	880.2	5	250 KHz	-40.91	-33	-16.37	-36	PASS
GSM900	975	880.2	5	400 KHz	-70.34	-60	-45.81	-36	PASS
GSM900	975	880.2	5	600 KHz	-75.47	-60	-50.94	-51	PASS
GSM900	975	880.2	5	800 KHz	-76.53	-60	-51.99	-51	PASS
GSM900	975	880.2	5	1000 KHz	-76.22	-60	-51.68	-51	PASS
GSM900	975	880.2	5	1200 KHz	-78.35	-60	-53.81	-51	PASS
GSM900	975	880.2	5	1400 KHz	-79.94	-60	-55.40	-51	PASS


				KHz					
GSM900	975	880.2	5	1600 KHz	-81.44	-60	-56.90	-51	PASS
GSM900	975	880.2	5	1800 KHz	-81.27	-60	-56.73	-51	PASS
GSM900	60	902	5	-1800 KHz	-81.77	-60	-57.00	-51	PASS
GSM900	60	902	5	-1600 KHz	-81.66	-60	-56.89	-51	PASS
GSM900	60	902	5	-1400 KHz	-80.38	-60	-55.61	-51	PASS
GSM900	60	902	5	-1200 KHz	-78.80	-60	-54.03	-51	PASS
GSM900	60	902	5	-1000 KHz	-76.31	-60	-51.54	-51	PASS
GSM900	60	902	5	-800 KHz	-76.44	-60	-51.67	-51	PASS
GSM900	60	902	5	-600 KHz	-75.50	-60	-50.73	-51	PASS
GSM900	60	902	5	-400 KHz	-70.52	-60	-45.75	-36	PASS
GSM900	60	902	5	-250 KHz	-41.16	-33	-16.39	-36	PASS
GSM900	60	902	5	-200 KHz	-36.79	-30	-12.02	-36	PASS
GSM900	60	902	5	-100 KHz	-8.59	0.5	16.18	-36	PASS
GSM900	60	902	5	100 KHz	-8.66	0.5	16.11	-36	PASS
GSM900	60	902	5	200 KHz	-36.72	-30	-11.95	-36	PASS
GSM900	60	902	5	250 KHz	-40.79	-33	-16.02	-36	PASS
GSM900	60	902	5	400 KHz	-70.05	-60	-45.28	-36	PASS
GSM900	60	902	5	600 KHz	-75.20	-60	-50.43	-51	PASS
GSM900	60	902	5	800 KHz	-76.01	-60	-51.24	-51	PASS
GSM900	60	902	5	1000 KHz	-76.31	-60	-51.54	-51	PASS
GSM900	60	902	5	1200 KHz	-78.34	-60	-53.57	-51	PASS
GSM900	60	902	5	1400 KHz	-79.85	-60	-55.08	-51	PASS
GSM900	60	902	5	1600 KHz	-81.87	-60	-57.10	-51	PASS
GSM900	60	902	5	1800 KHz	-81.93	-60	-57.16	-51	PASS

GSM900	124	914.8	5	-1800 KHz	-80.24	-60	-56.21	-51	PASS
GSM900	124	914.8	5	-1600 KHz	-81.25	-60	-57.22	-51	PASS
GSM900	124	914.8	5	-1400 KHz	-80.27	-60	-56.24	-51	PASS
GSM900	124	914.8	5	-1200 KHz	-78.29	-60	-54.27	-51	PASS
GSM900	124	914.8	5	-1000 KHz	-76.32	-60	-52.29	-51	PASS
GSM900	124	914.8	5	-800 KHz	-76.72	-60	-52.70	-51	PASS
GSM900	124	914.8	5	-600 KHz	-75.63	-60	-51.60	-51	PASS
GSM900	124	914.8	5	-400 KHz	-70.59	-60	-46.57	-36	PASS
GSM900	124	914.8	5	-250 KHz	-40.86	-33	-16.83	-36	PASS
GSM900	124	914.8	5	-200 KHz	-36.42	-30	-12.39	-36	PASS
GSM900	124	914.8	5	-100 KHz	-8.37	0.5	15.65	-36	PASS
GSM900	124	914.8	5	100 KHz	-8.67	0.5	15.36	-36	PASS
GSM900	124	914.8	5	200 KHz	-36.46	-30	-12.43	-36	PASS
GSM900	124	914.8	5	250 KHz	-41.12	-33	-17.09	-36	PASS
GSM900	124	914.8	5	400 KHz	-70.06	-60	-46.04	-36	PASS
GSM900	124	914.8	5	600 KHz	-75.41	-60	-51.39	-51	PASS
GSM900	124	914.8	5	800 KHz	-76.43	-60	-52.40	-51	PASS
GSM900	124	914.8	5	1000 KHz	-75.87	-60	-51.84	-51	PASS
GSM900	124	914.8	5	1200 KHz	-78.62	-60	-54.59	-51	PASS
GSM900	124	914.8	5	1400 KHz	-79.88	-60	-55.85	-51	PASS
GSM900	124	914.8	5	1600 KHz	-81.32	-60	-57.29	-51	PASS
GSM900	124	914.8	5	1800 KHz	-80.18	-60	-56.16	-51	PASS


DCS1800 Channel=512 PCL=0.png

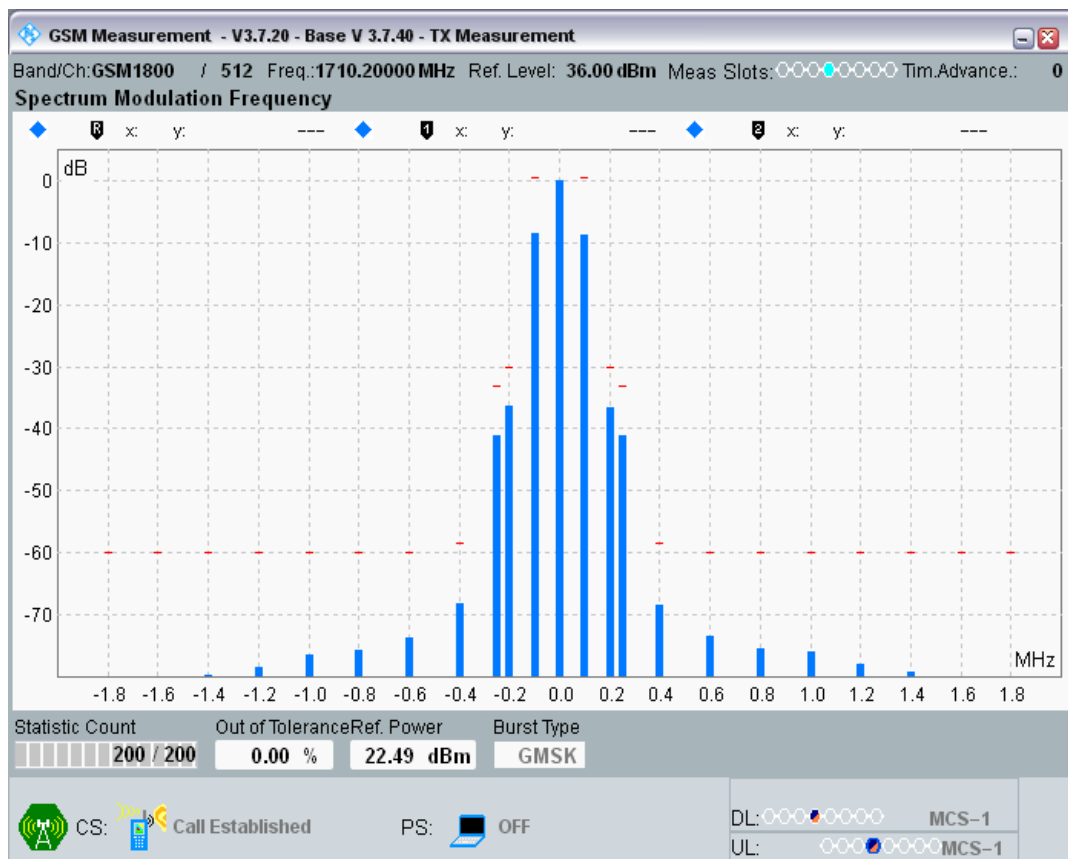


DCS1800 Channel=700 PCL=0.png

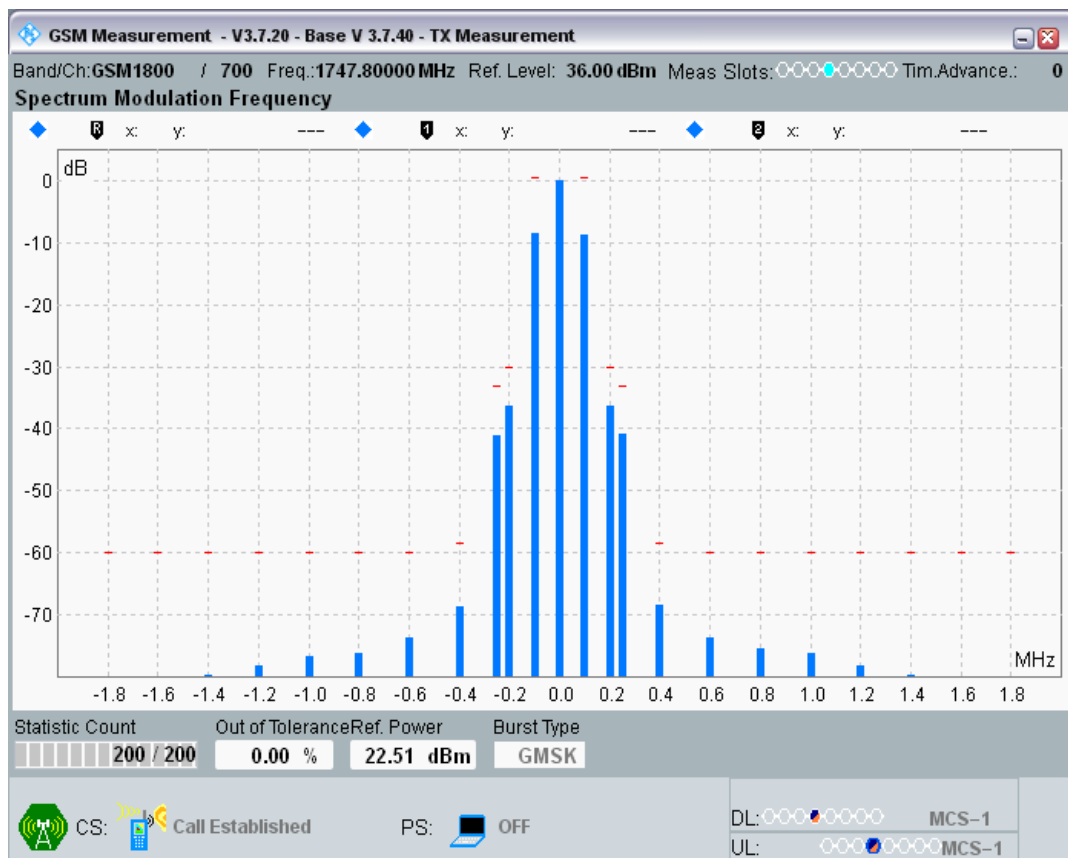


DCS1800 Channel=885 PCL=0.png

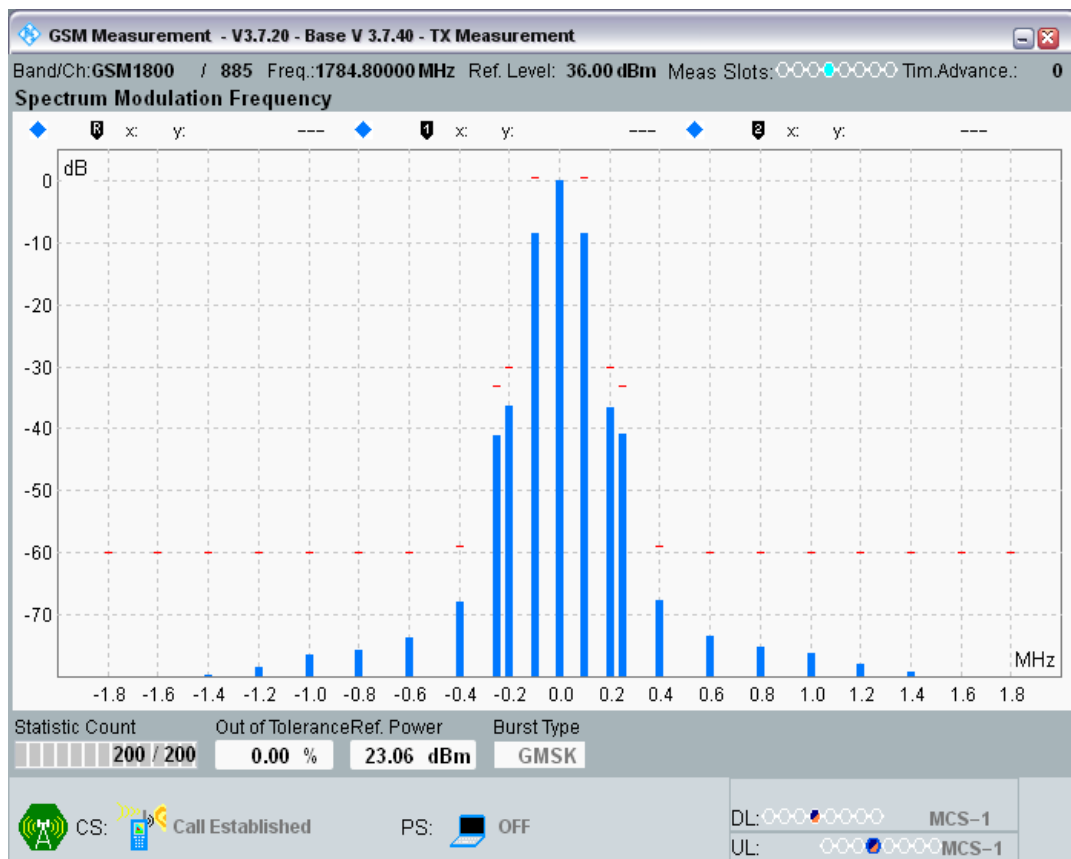


GSM900 Channel=124 PCL=5.png

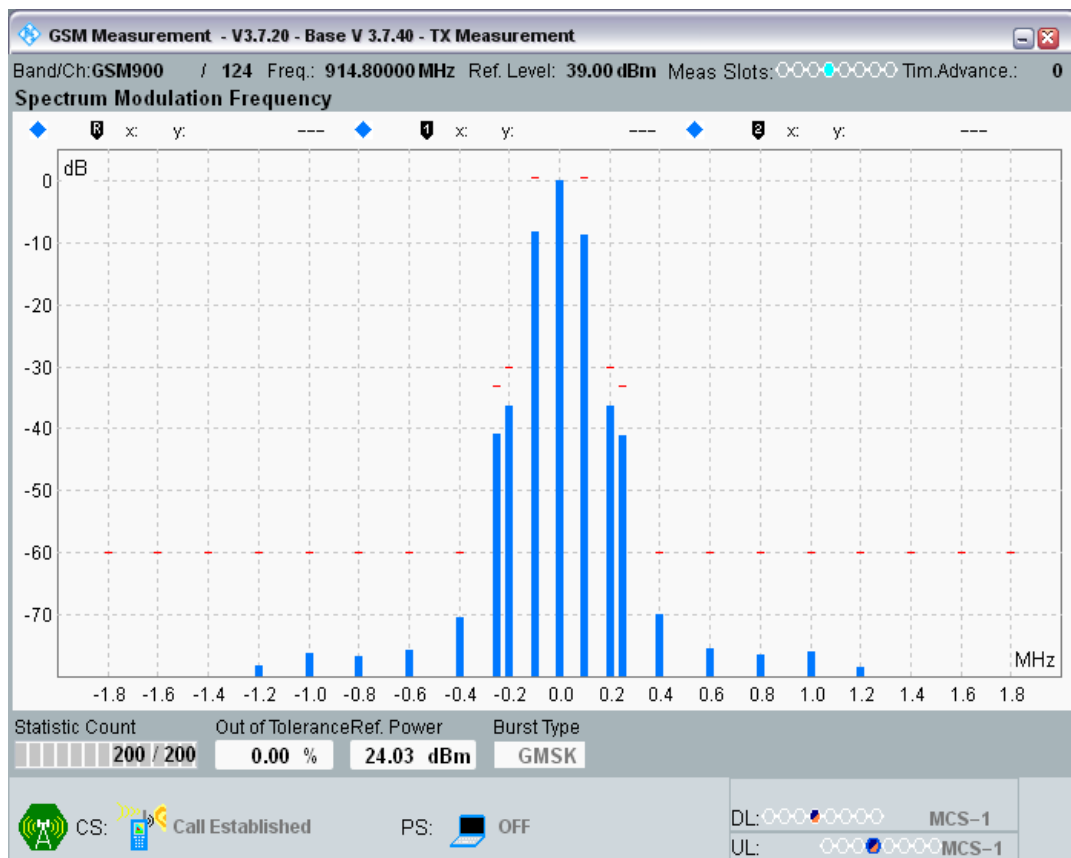

GSM900 Channel=60 PCL=5.png

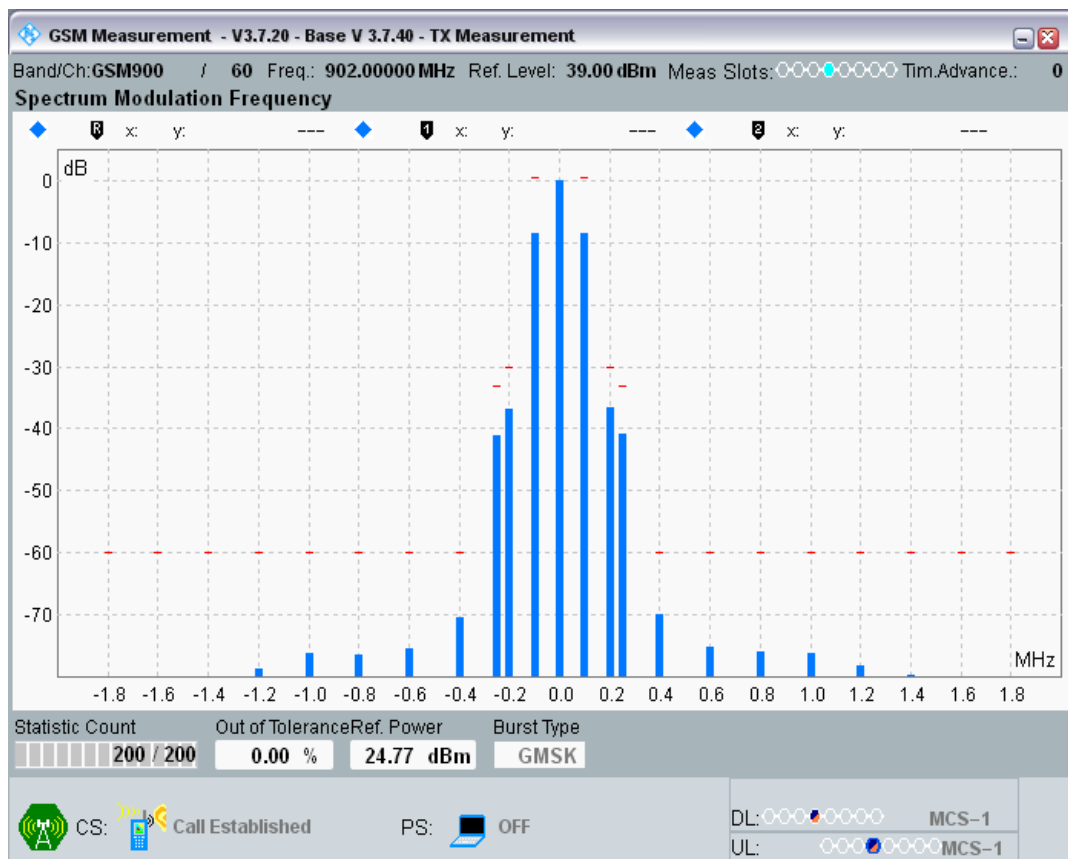

GSM900 Channel=975 PCL=5.png

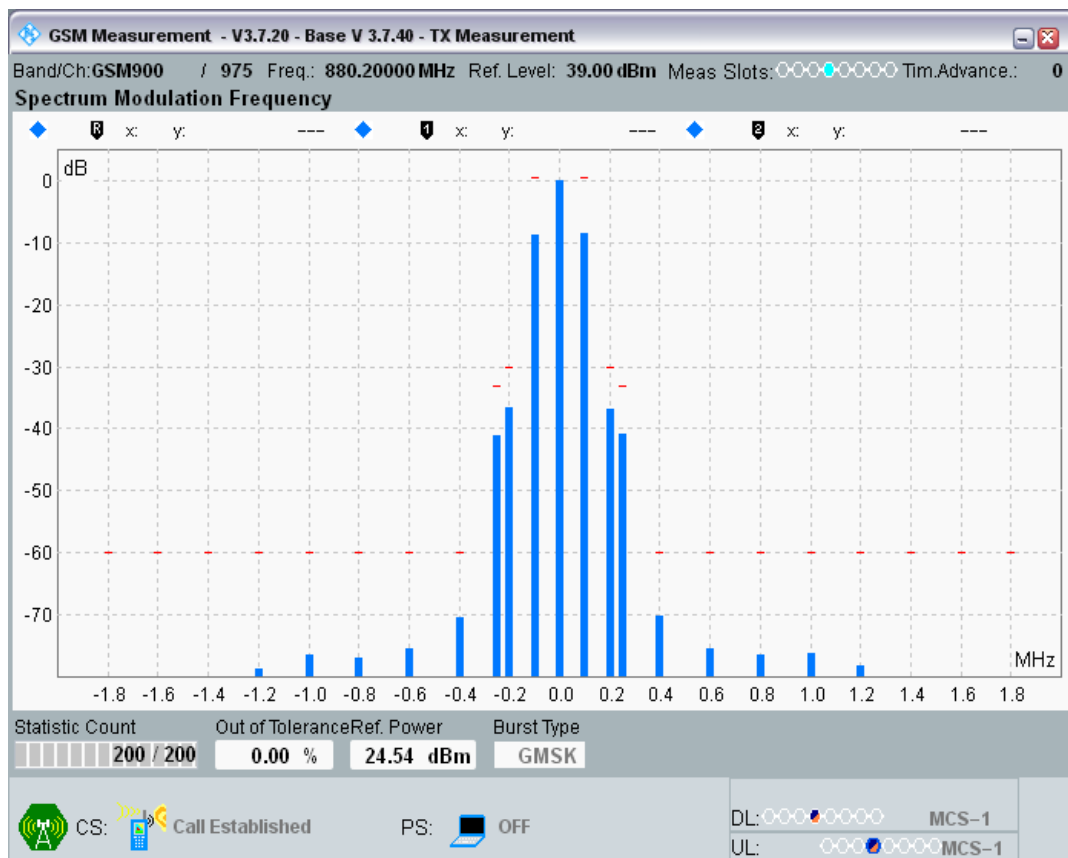


Clause 4.2.6 Transmitter-Switching Spectrum


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-44.25	-27	PASS
DCS1800	512	1710.2	0	-1200 KHz	-42.41	-24	PASS
DCS1800	512	1710.2	0	-600 KHz	-35.75	-24	PASS
DCS1800	512	1710.2	0	-400 KHz	-31.95	-22	PASS
DCS1800	512	1710.2	0	400 KHz	-30.71	-22	PASS
DCS1800	512	1710.2	0	600 KHz	-35.36	-24	PASS
DCS1800	512	1710.2	0	1200 KHz	-40.87	-24	PASS
DCS1800	512	1710.2	0	1800 KHz	-43.39	-27	PASS
DCS1800	700	1747.8	0	-1800 KHz	-44.73	-27	PASS
DCS1800	700	1747.8	0	-1200 KHz	-40.85	-24	PASS
DCS1800	700	1747.8	0	-600 KHz	-36.18	-24	PASS
DCS1800	700	1747.8	0	-400 KHz	-29.50	-22	PASS
DCS1800	700	1747.8	0	400 KHz	-28.69	-22	PASS
DCS1800	700	1747.8	0	600 KHz	-34.24	-24	PASS
DCS1800	700	1747.8	0	1200 KHz	-39.95	-24	PASS
DCS1800	700	1747.8	0	1800 KHz	-43.14	-27	PASS
DCS1800	885	1784.8	0	-1800 KHz	-43.42	-27	PASS
DCS1800	885	1784.8	0	-1200 KHz	-40.98	-24	PASS
DCS1800	885	1784.8	0	-600 KHz	-35.84	-24	PASS
DCS1800	885	1784.8	0	-400 KHz	-30.90	-22	PASS
DCS1800	885	1784.8	0	400 KHz	-29.44	-22	PASS
DCS1800	885	1784.8	0	600 KHz	-34.47	-24	PASS
DCS1800	885	1784.8	0	1200 KHz	-40.26	-24	PASS
DCS1800	885	1784.8	0	1800 KHz	-40.20	-27	PASS
GSM900	975	880.2	5	-1800 KHz	-41.69	-24	PASS
GSM900	975	880.2	5	-1200 KHz	-39.11	-21	PASS
GSM900	975	880.2	5	-600 KHz	-34.27	-21	PASS
GSM900	975	880.2	5	-400 KHz	-31.79	-19	PASS
GSM900	975	880.2	5	400 KHz	-29.56	-19	PASS
GSM900	975	880.2	5	600 KHz	-33.05	-21	PASS
GSM900	975	880.2	5	1200 KHz	-37.68	-21	PASS
GSM900	975	880.2	5	1800 KHz	-41.63	-24	PASS
GSM900	60	902	5	-1800 KHz	-41.20	-24	PASS
GSM900	60	902	5	-1200 KHz	-38.81	-21	PASS
GSM900	60	902	5	-600 KHz	-33.67	-21	PASS
GSM900	60	902	5	-400 KHz	-31.38	-19	PASS
GSM900	60	902	5	400 KHz	-29.82	-19	PASS
GSM900	60	902	5	600 KHz	-33.08	-21	PASS
GSM900	60	902	5	1200 KHz	-38.60	-21	PASS
GSM900	60	902	5	1800 KHz	-41.88	-24	PASS
GSM900	124	914.8	5	-1800 KHz	-41.77	-24	PASS

GSM900	124	914.8	5	-1200 KHz	-39.93	-21	PASS
GSM900	124	914.8	5	-600 KHz	-33.34	-21	PASS
GSM900	124	914.8	5	-400 KHz	-31.83	-19	PASS
GSM900	124	914.8	5	400 KHz	-29.91	-19	PASS
GSM900	124	914.8	5	600 KHz	-33.52	-21	PASS
GSM900	124	914.8	5	1200 KHz	-39.08	-21	PASS
GSM900	124	914.8	5	1800 KHz	-42.18	-24	PASS


DCS1800 Channel=512 PCL=0.png

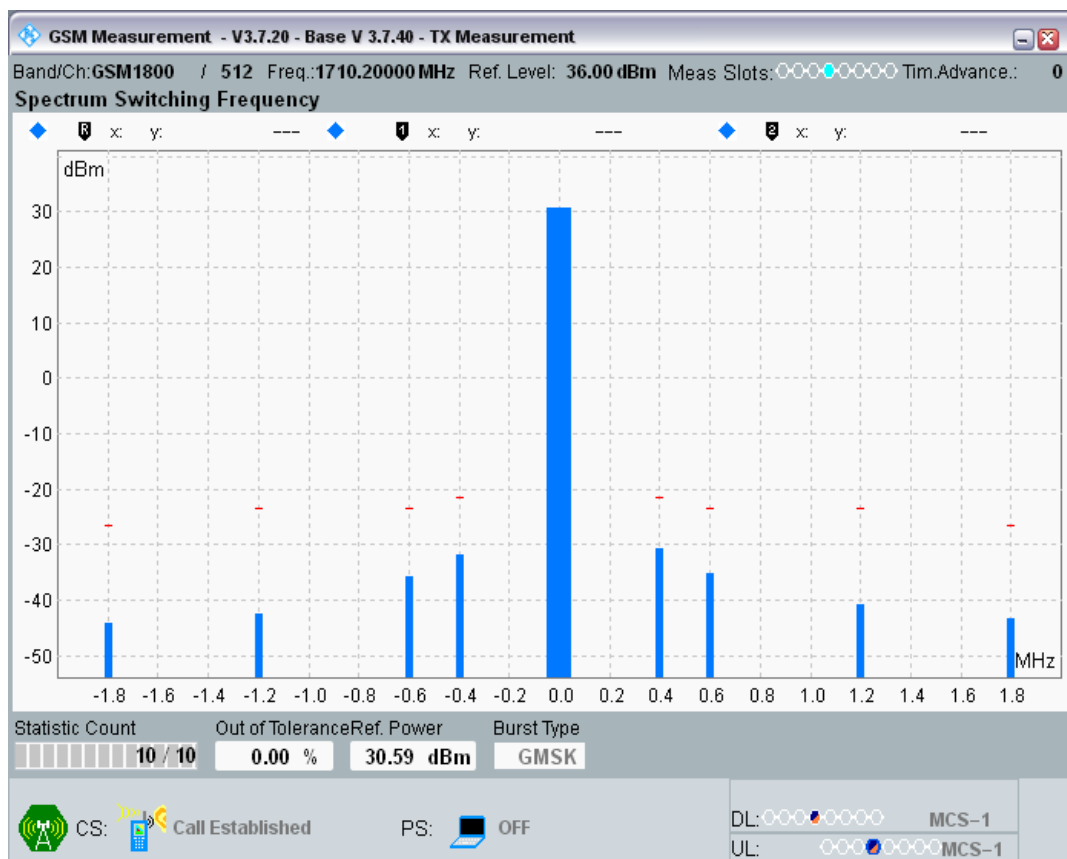


DCS1800 Channel=700 PCL=0.png

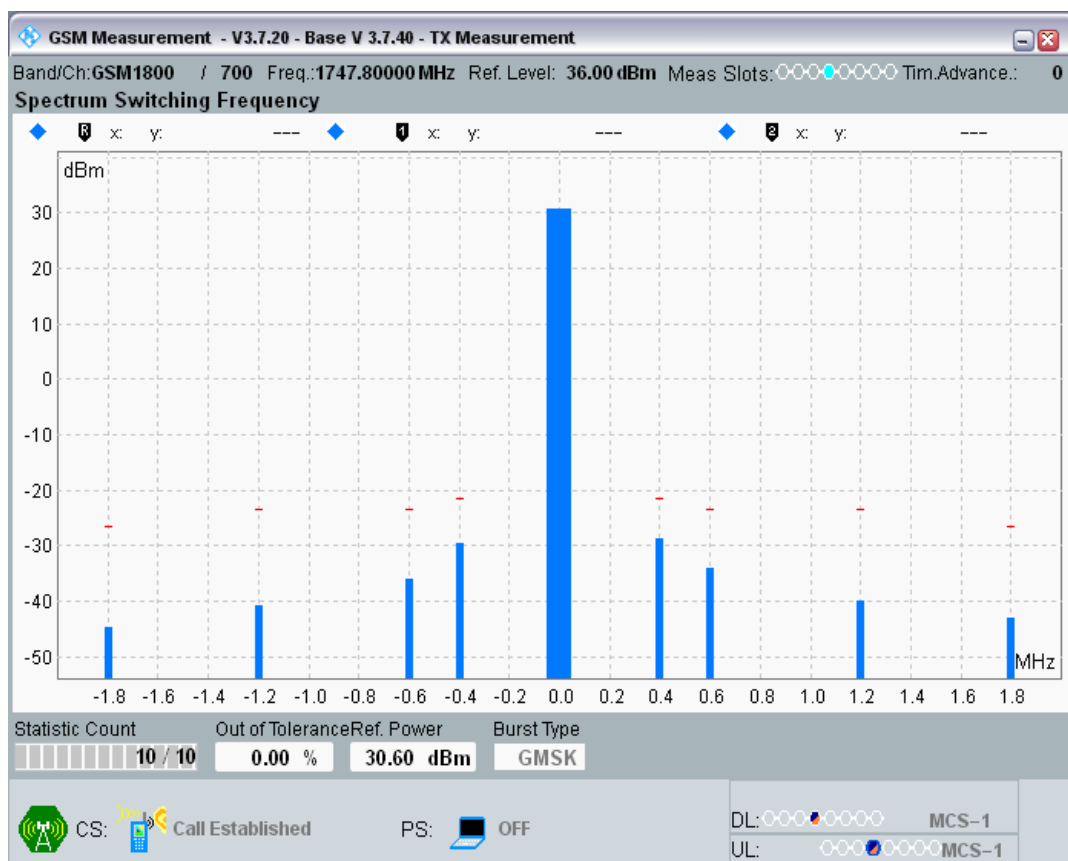


DCS1800 Channel=885 PCL=0.png

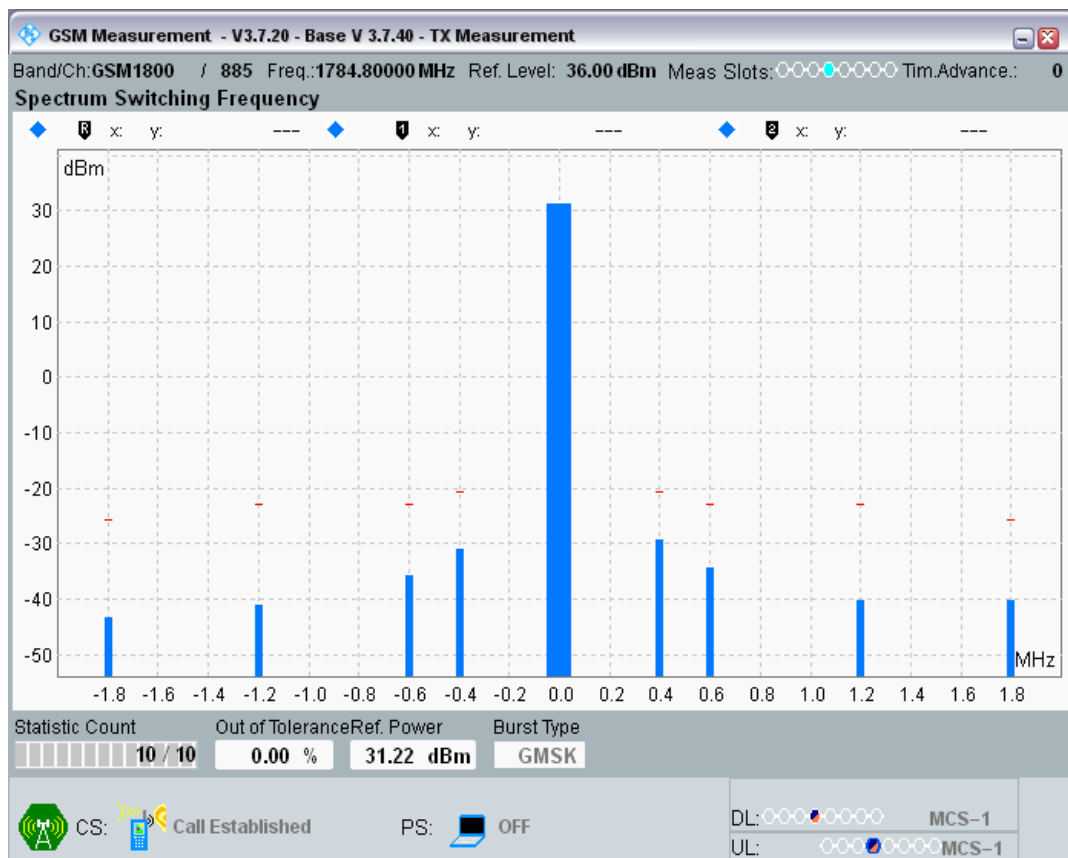


GSM900 Channel=124 PCL=5.png

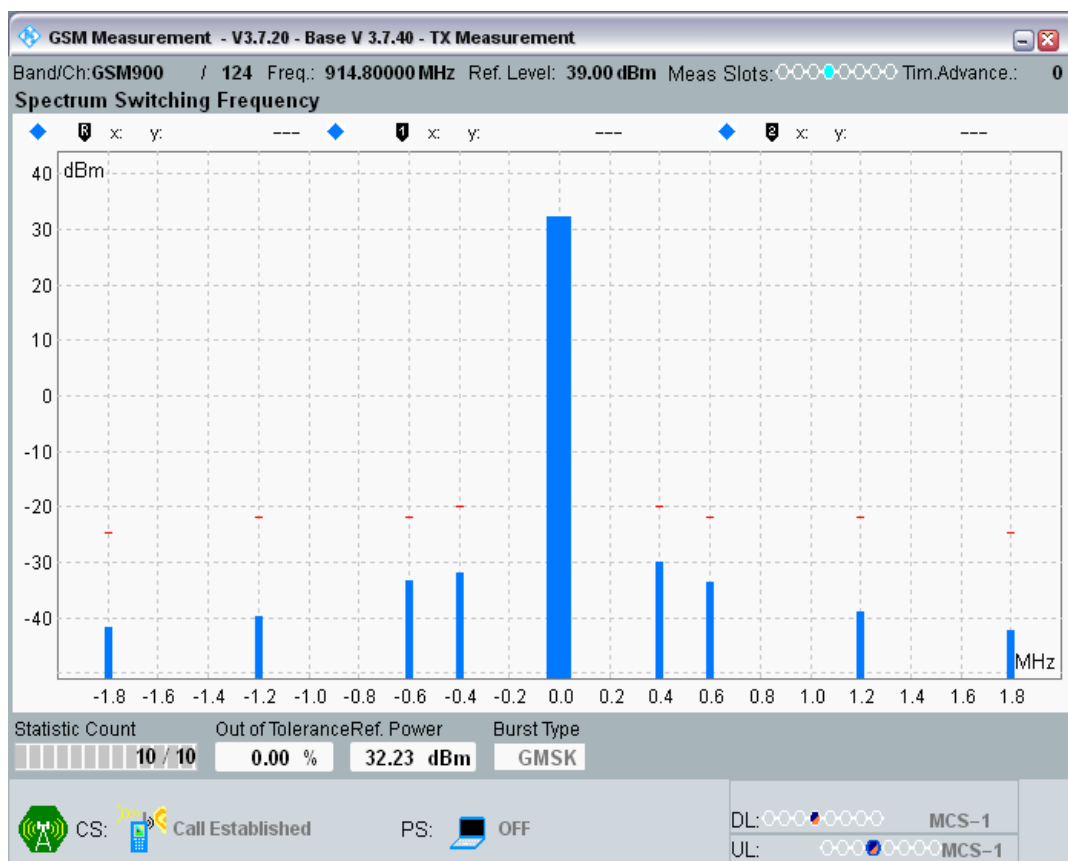

GSM900 Channel=60 PCL=5.png

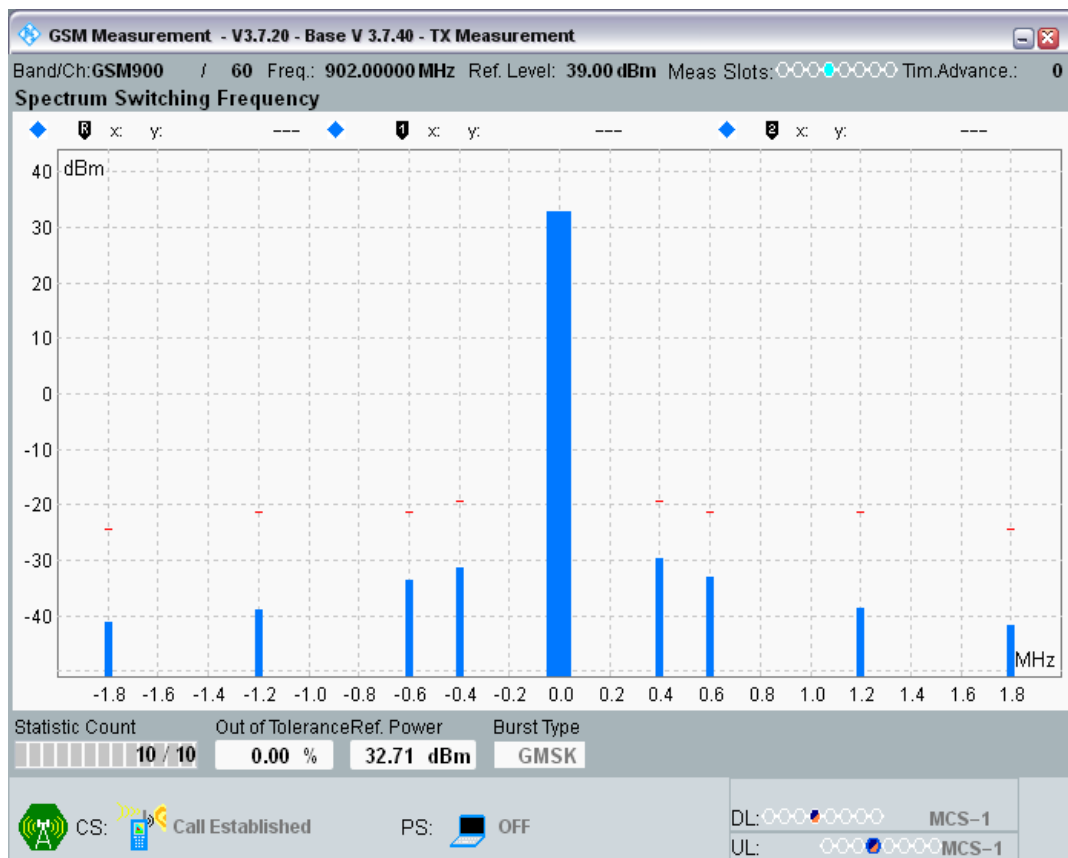

GSM900 Channel=975 PCL=5.png

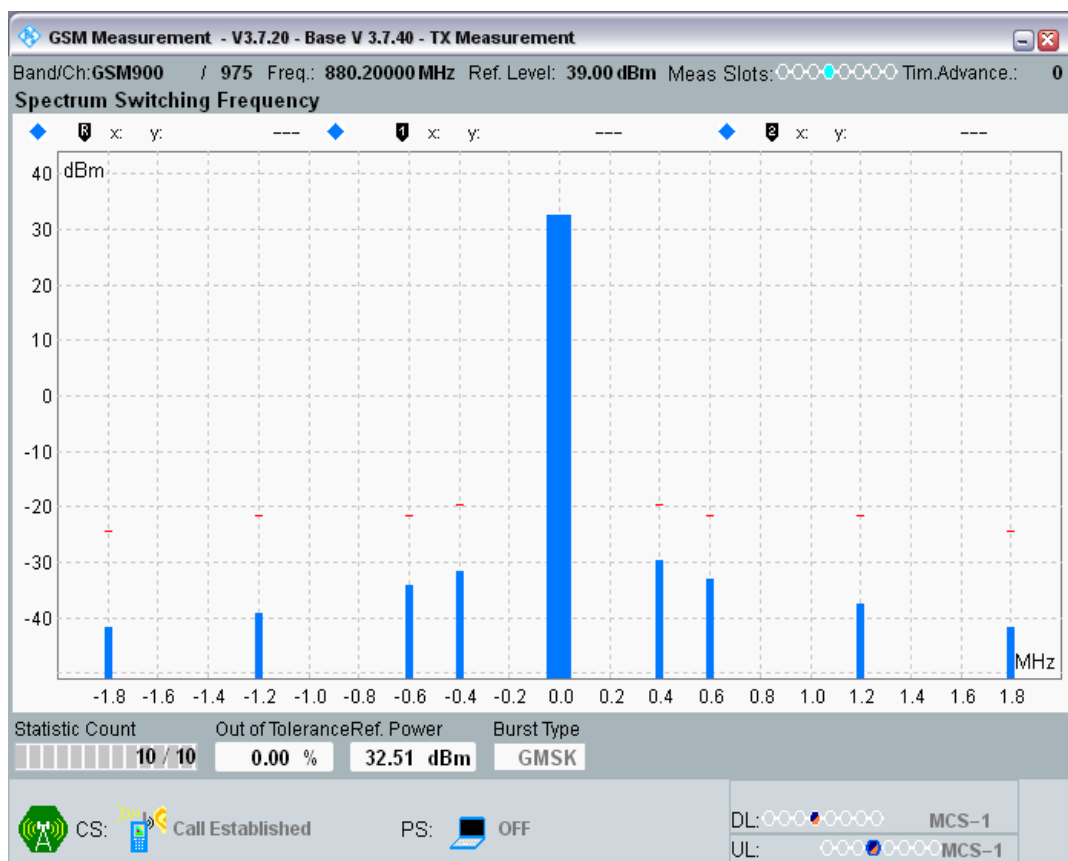


Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur (MHz)	Freq	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.11		-80.04	-36	PASS
DCS1800	700	1747.8	0	50MHz - 500MHz	100	477.3		-80.13	-36	PASS
DCS1800	700	1747.8	0	500MHz - 1000MHz	3000	814.5		-65.29	-36	PASS
DCS1800	700	1747.8	0	1000MHz - 1680MHz	3000	1534.48		-57.80	-30	PASS
DCS1800	700	1747.8	0	1680MHz - 1690MHz	1000	1686.83		-55.48	-30	PASS
DCS1800	700	1747.8	0	1690MHz - 1700MHz	300	1694.88		-64.65	-30	PASS
DCS1800	700	1747.8	0	1700MHz - 1710MHz	100	1709.11		-76.65	-30	PASS
DCS1800	700	1747.8	0	1785MHz - 1795MHz	100	1786.43		-76.08	-30	PASS
DCS1800	700	1747.8	0	1795MHz - 1805MHz	300	1799.06		-70.89	-30	PASS
DCS1800	700	1747.8	0	1800MHz - 4000MHz	3000	3496.2		-41.75	-30	PASS

DCS1800	700	1747.8	0	4000MHz - 12750MHz	3000	5242.283951	-46.22	-30	PASS
DCS1800	700	1747.8	0	1710MHz - 1741.8MHz	100	1741.6092	-45.72	-30	PASS
DCS1800	700	1747.8	0	1741.8MHz - 1746MHz	30	1744.5384	-49.57	-30	PASS
DCS1800	700	1747.8	0	1749.6MHz - 1753.8MHz	30	1749.6714	-44.99	-30	PASS
DCS1800	700	1747.8	0	1753.8MHz - 1785MHz	100	1753.956	-44.18	-30	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.12	-94.21	-36	PASS
GSM900	60	902	5	50MHz - 500MHz	100	354.4	-80.48	-36	PASS
GSM900	60	902	5	500MHz - 850MHz	3000	530.8	-73.15	-36	PASS
GSM900	60	902	5	850MHz - 860MHz	1000	854.96	-59.54	-36	PASS
GSM900	60	902	5	860MHz - 870MHz	300	860.83	-68.99	-30	PASS
GSM900	60	902	5	870MHz - 880MHz	100	871.62	-84.54	-36	PASS
GSM900	60	902	5	915MHz - 925MHz	100	918.41	-89.98	-36	PASS
GSM900	60	902	5	960MHz - 1000MHz	3000	980.16	-54.64	-36	PASS
GSM900	60	902	5	1000MHz - 2000MHz	3000	1803	-62.37	-30	PASS
GSM900	60	902	5	2000MHz - 12750MHz	3000	2705.065587	-45.11	-30	PASS
GSM900	60	902	5	880MHz - 896MHz	100	880.336	-59.49	-36	PASS
GSM900	60	902	5	896MHz - 900.2MHz	30	899.6582	-45.63	-36	PASS
GSM900	60	902	5	903.8MHz - 908MHz	30	903.8042	-44.52	-36	PASS
GSM900	60	902	5	908MHz - 915MHz	100	912.361	-51.72	-36	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

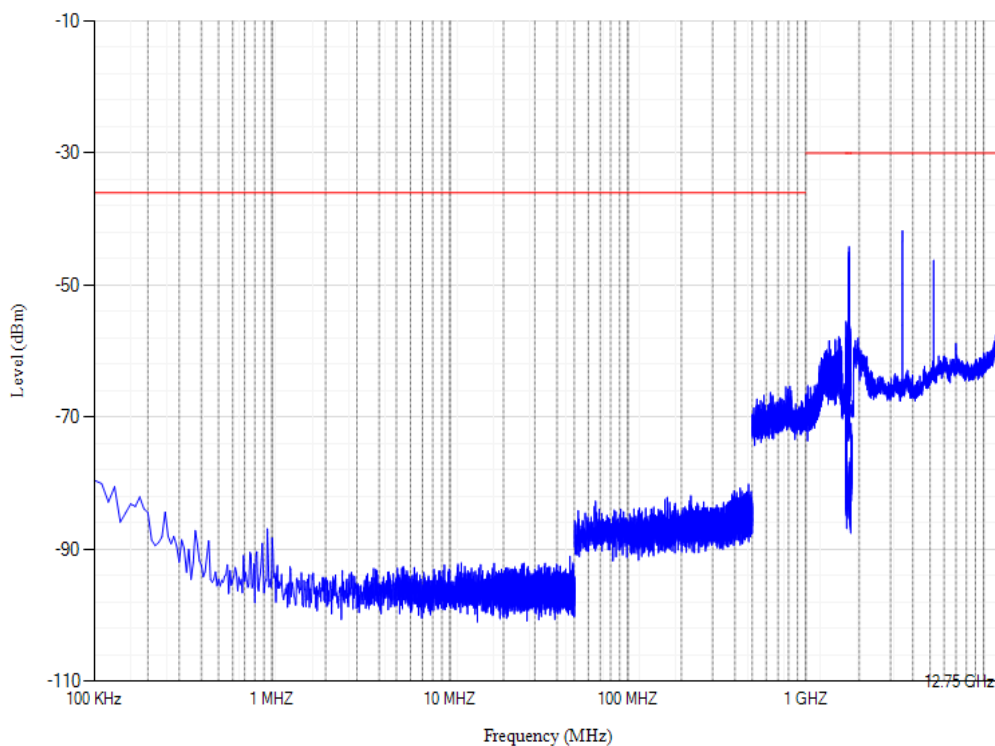

GSM900 Channel=60 PCL=5.png

Conducted spurious emissions

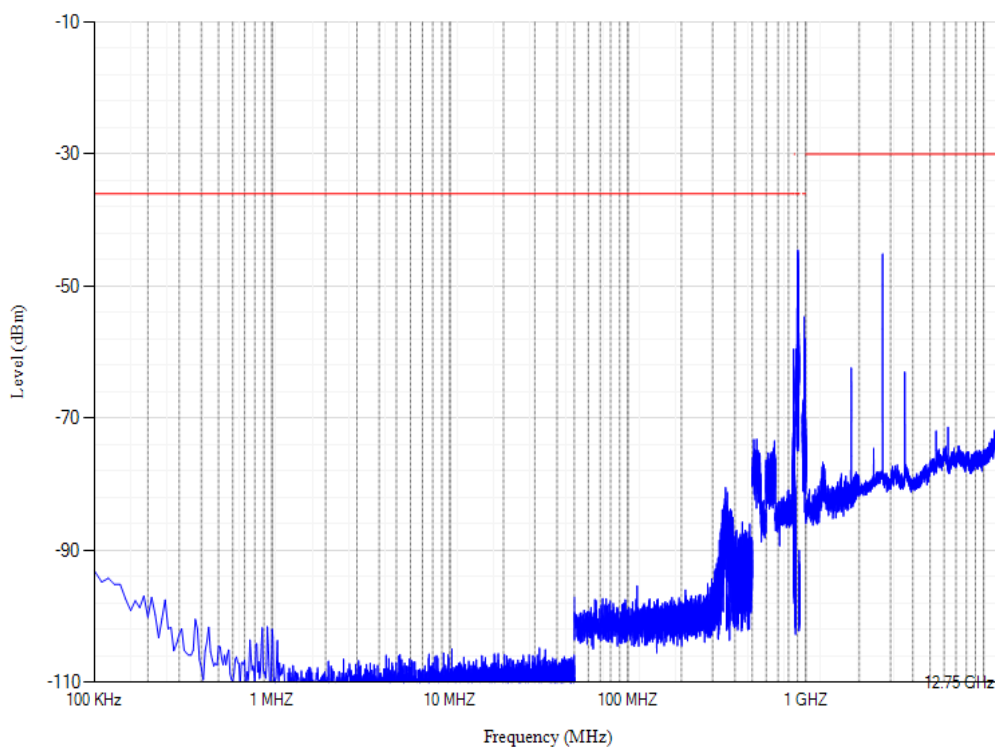


Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.11	-77.79	-57	PASS
DCS1800	700	1747.8	0	50MHz - 880MHz	100	790.4	-77.24	-57	PASS
DCS1800	700	1747.8	0	880MHz - 915MHz	100	910.38	-77.89	-59	PASS
DCS1800	700	1747.8	0	915MHz - 1000MHz	100	937.525	-78.35	-57	PASS
DCS1800	700	1747.8	0	1000MHz - 1710MHz	100	1656.3	-75.64	-47	PASS
DCS1800	700	1747.8	0	1710MHz - 1785MHz	100	1777.875	-75.61	-53	PASS
DCS1800	700	1747.8	0	1785MHz - 12750MHz	100	12524.121	-67.94	-47	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11	-78.16	-57	PASS
GSM900	60	902	5	50MHz - 880MHz	100	825.9	-80.05	-57	PASS
GSM900	60	902	5	880MHz - 915MHz	100	910.135	-78.52	-59	PASS
GSM900	60	902	5	915MHz - 1000MHz	100	955.545	-79.57	-57	PASS
GSM900	60	902	5	1000MHz - 1710MHz	100	1578.6	-76.56	-47	PASS
GSM900	60	902	5	1710MHz - 1785MHz	100	1785	-77.22	-53	PASS
GSM900	60	902	5	1785MHz - 12750MHz	100	12538.92375	-69.43	-47	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

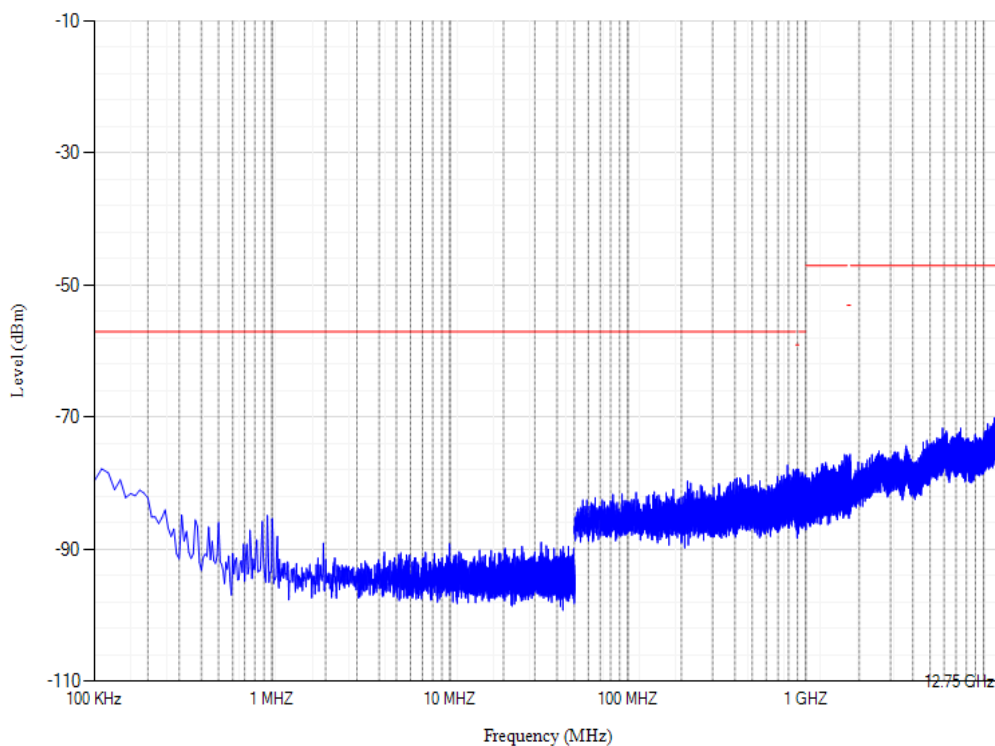

GSM900 Channel=60 PCL=5.png


Conducted spurious emissions

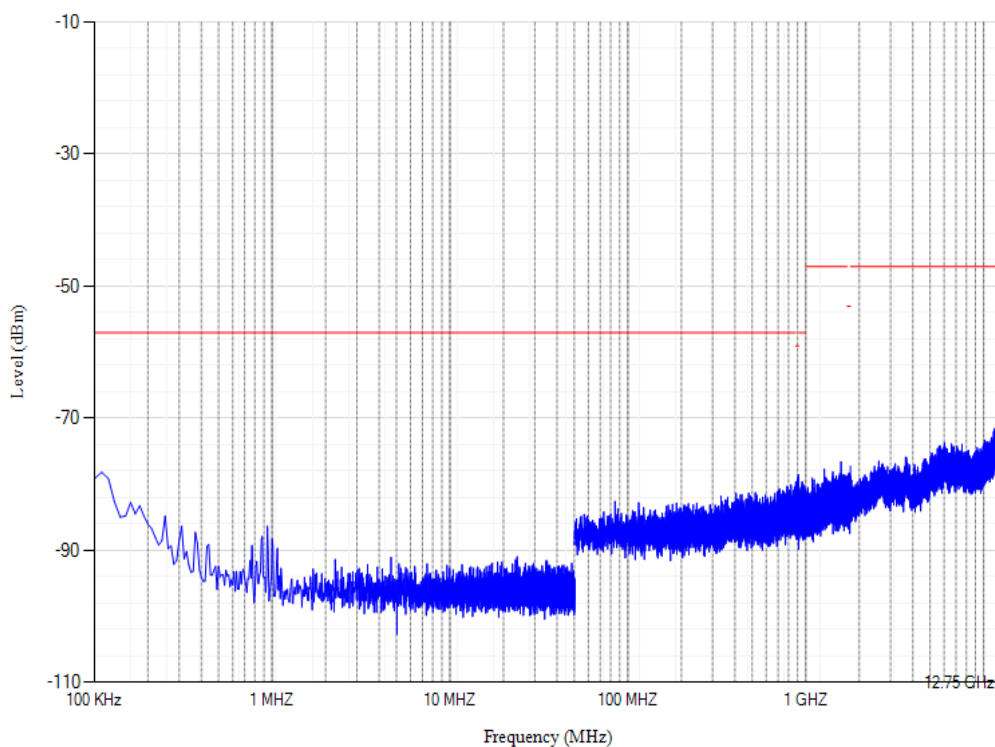


Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	3;3;3;3	Frequency Error (Hz)	8.56	-88.02	88.02	PASS
GSM900	975	880.2	3;3;3;3	RMS Phase Error (Degree)	0.47	0	5	PASS
GSM900	975	880.2	3;3;3;3	Peak Phase Error (Degree)	1.42	0	20	PASS
GSM900	60	902	3;3;3;3	Frequency Error (Hz)	8.68	-90.2	90.2	PASS
GSM900	60	902	3;3;3;3	RMS Phase Error (Degree)	0.49	0	5	PASS
GSM900	60	902	3;3;3;3	Peak Phase Error (Degree)	1.52	0	20	PASS
GSM900	124	914.8	3;3;3;3	Frequency Error (Hz)	7.62	-91.48	91.48	PASS
GSM900	124	914.8	3;3;3;3	RMS Phase Error (Degree)	0.52	0	5	PASS
GSM900	124	914.8	3;3;3;3	Peak Phase Error (Degree)	1.52	0	20	PASS
DCS1800	512	1710.2	3;3;3;3	Frequency Error (Hz)	17.37	-171.02	171.02	PASS
DCS1800	512	1710.2	3;3;3;3	RMS Phase Error (Degree)	0.65	0	5	PASS
DCS1800	512	1710.2	3;3;3;3	Peak Phase Error (Degree)	2.58	0	20	PASS
DCS1800	700	1747.8	3;3;3;3	Frequency Error (Hz)	14.92	-174.78	174.78	PASS
DCS1800	700	1747.8	3;3;3;3	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	700	1747.8	3;3;3;3	Peak Phase Error (Degree)	2.06	0	20	PASS
DCS1800	885	1784.8	3;3;3;3	Frequency Error (Hz)	16.69	-178.48	178.48	PASS
DCS1800	885	1784.8	3;3;3;3	RMS Phase Error (Degree)	0.60	0	5	PASS
DCS1800	885	1784.8	3;3;3;3	Peak Phase Error (Degree)	2.12	0	20	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

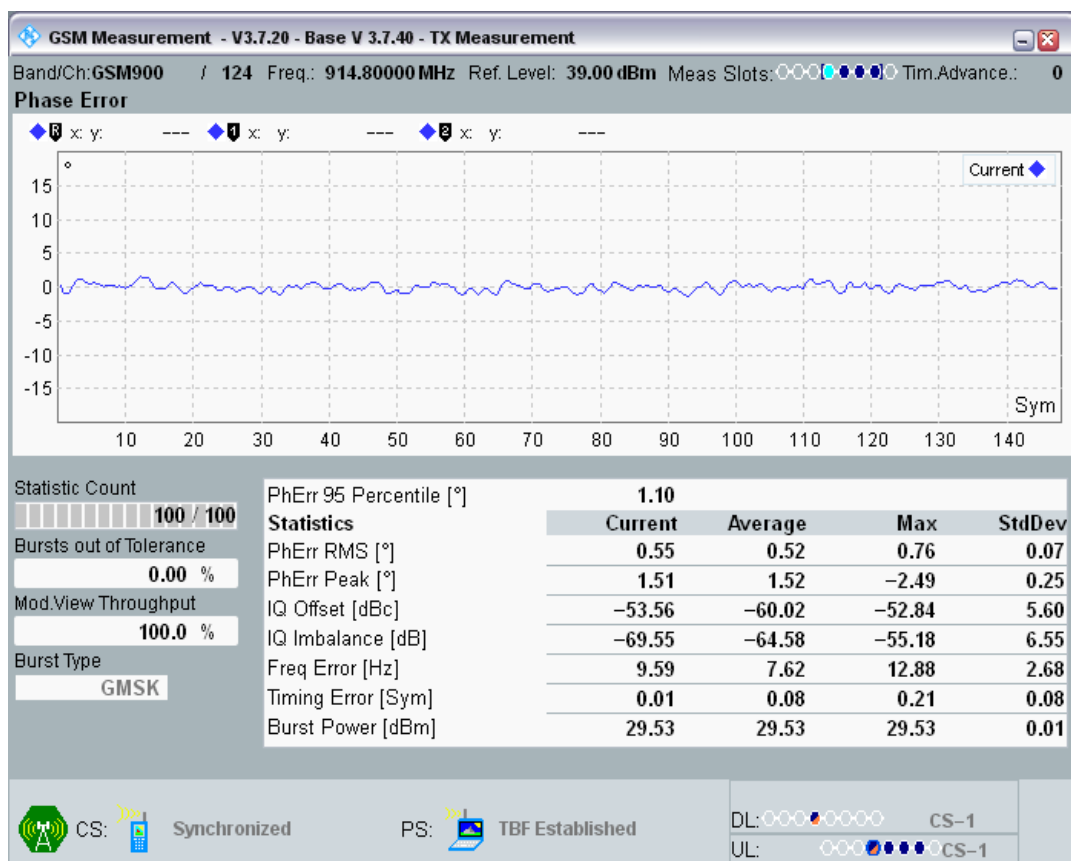


GSM900 Channel=60 Gamma=3;3;3;3.png

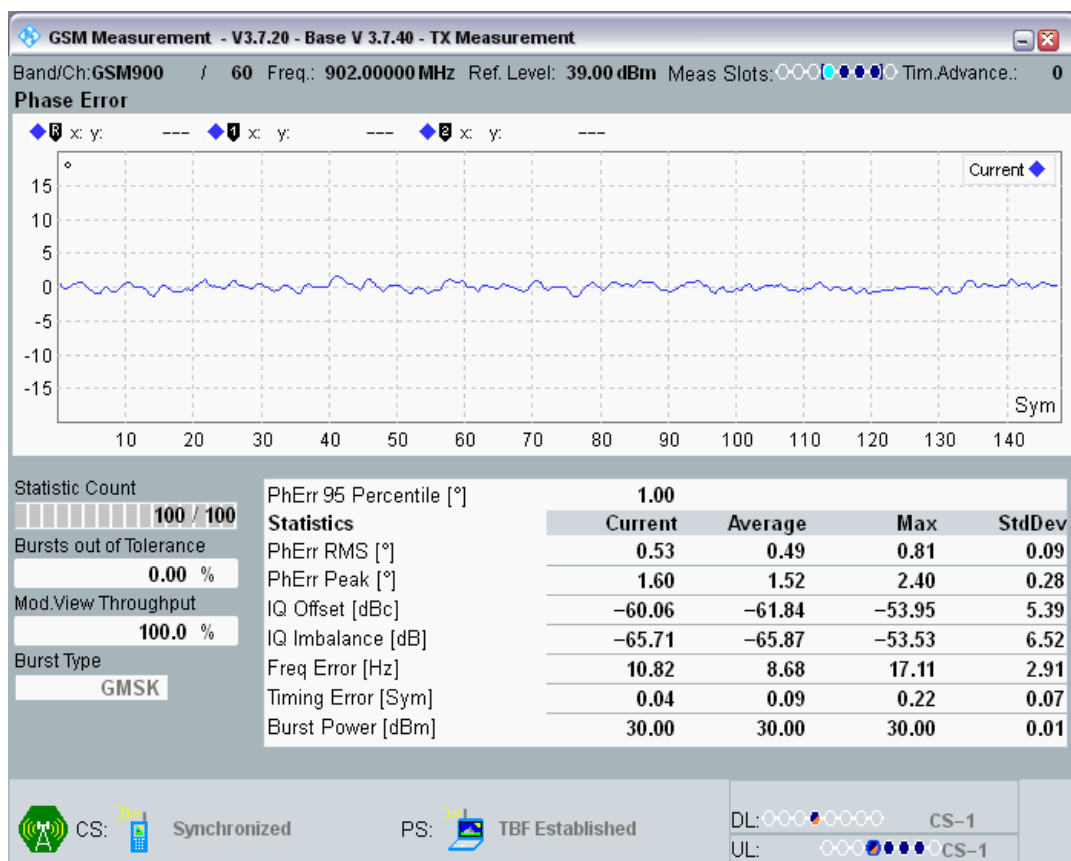


GSM900 Channel=975 Gamma=3;3;3;3.png

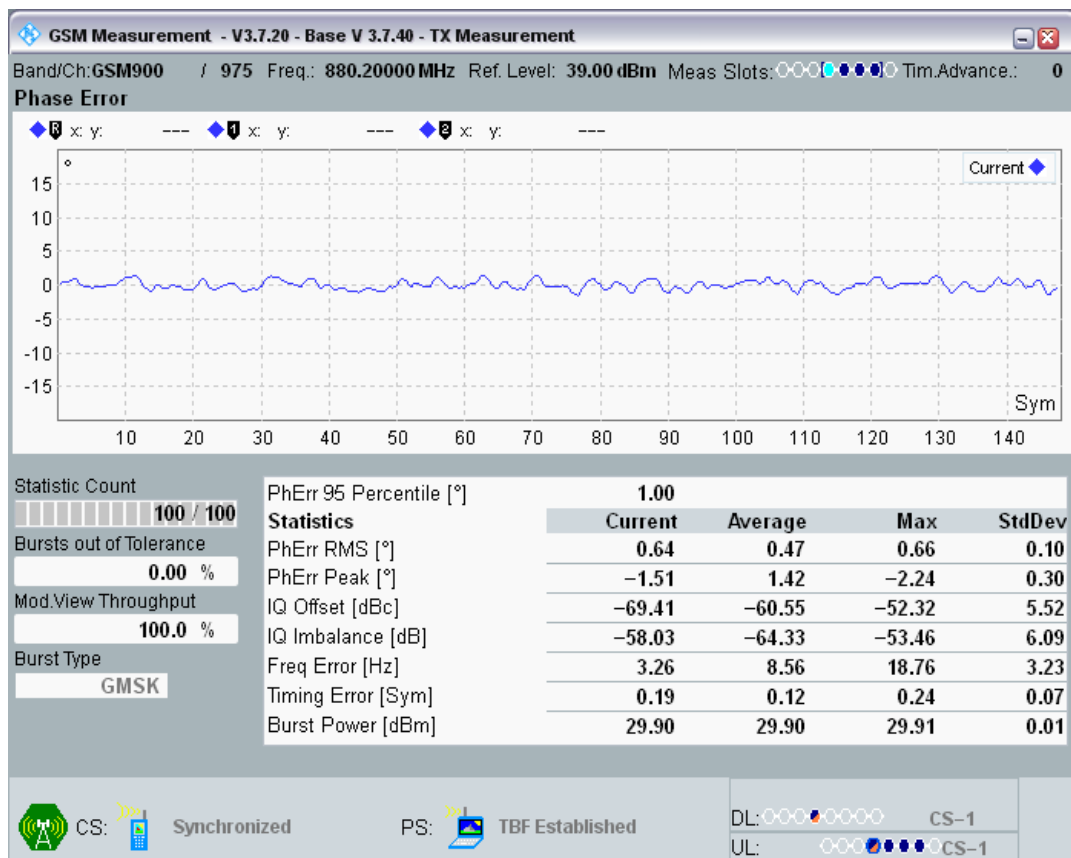


DCS1800 Channel=512 Gamma=3;3;3;3.png

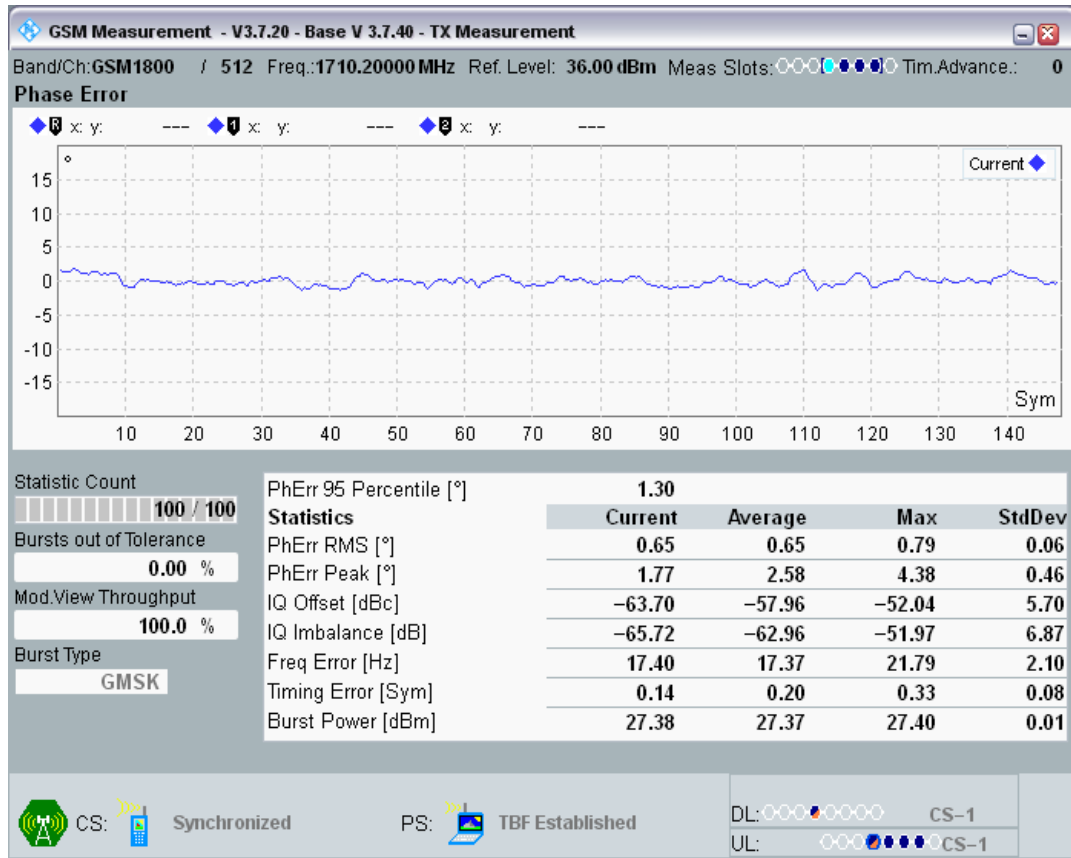

DCS1800 Channel=700 Gamma=3;3;3;3.png

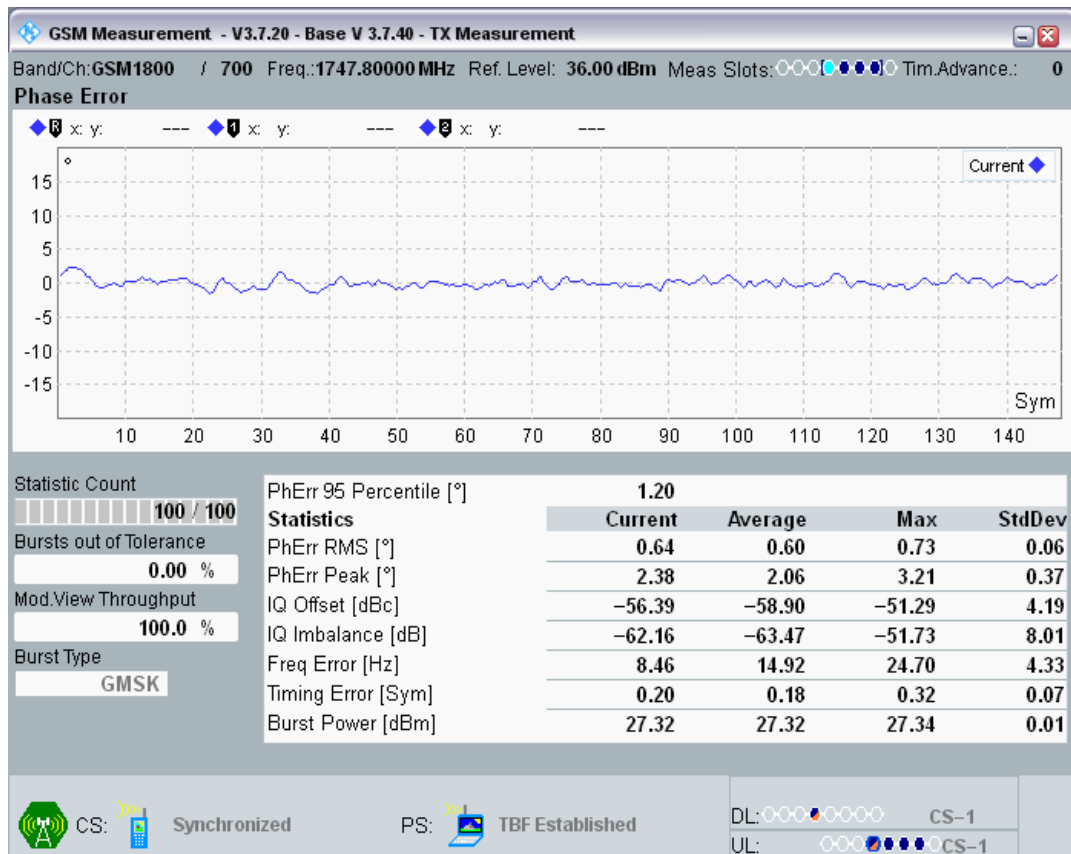

DCS1800 Channel=885 Gamma=3;3;3;3.png

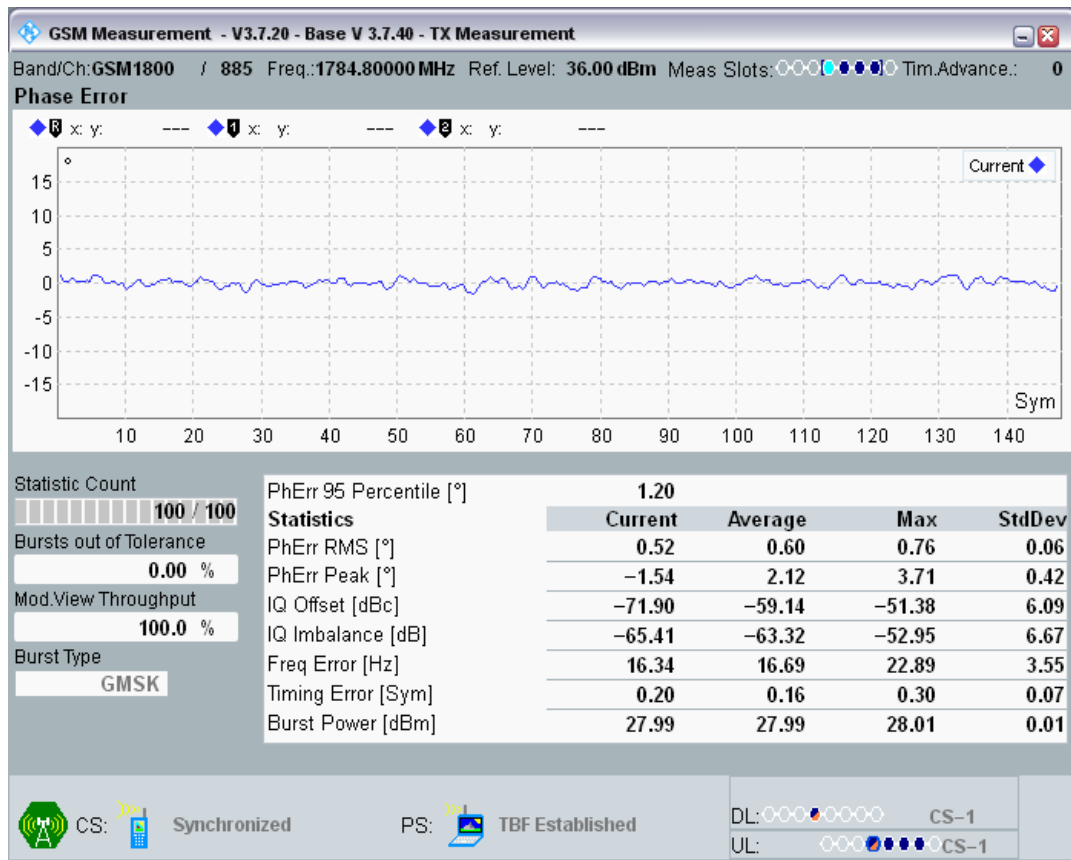

Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low (dBm)	Limit high (dBm)	Limit	Verdict
GSM900	975	880.2	3;3;3;3	PvT	-	-	-		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot1	29.77185	25	32		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot2	29.7995	25	32		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot3	29.82529	25	32		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot4	29.84064	25	32		PASS
GSM900	975	880.2	4;4;4;4	PvT	-	-	-		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot1	29.78207	24	33		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot2	29.80786	24	33		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot3	29.83884	24	33		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot4	29.84189	24	33		PASS

GSM900	975	880.2	5;5;5;5	PvT	-	-	-	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot1	29.73938	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot2	29.77176	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot3	29.78323	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot4	29.79919	24	32	PASS
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	27.68747	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	27.7016	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	27.73224	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	27.742	24	30	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	25.65546	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	25.64706	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	25.6832	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	25.66669	22	28	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	23.64111	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	23.66125	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	23.64648	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	23.64404	20	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	21.93991	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	21.9248	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	21.93753	18	24	PASS

GSM900	975	880.2	9;9;9;9	Power @ slot4	21.94492	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	19.92184	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	19.93277	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	19.91788	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	19.92432	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	17.99548	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	17.96655	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	17.97275	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	17.96664	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	15.9361	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	15.92776	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot3	15.91113	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot4	15.9259	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	13.83749	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	13.88776	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	13.88806	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot4	13.89542	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot1	11.82166	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot2	11.81079	6	16	PASS

GSM900	975	880.2	14;14;14;14	Power @ slot3	11.80429	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot4	11.80161	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	9.825745	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	9.910126	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	9.912231	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	9.911255	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	7.862946	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	7.866577	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	7.866669	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	7.865936	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	4.650696	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot2	4.653961	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	4.652283	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	4.649384	0	10	PASS
GSM900	60	902	3;3;3;3	PvT	-	-	-	PASS
GSM900	60	902	3;3;3;3	Power @ slot1	29.86954	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot2	29.90494	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot3	29.91428	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot4	29.92603	25	32	PASS
GSM900	60	902	4;4;4;4	PvT	-	-	-	PASS
GSM900	60	902	4;4;4;4	Power @ slot1	29.86673	24	33	PASS

GSM900	60	902	4;4;4;4	Power @ slot2	29.89001	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot3	29.90866	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot4	29.91415	24	33	PASS
GSM900	60	902	5;5;5;5	PvT	-	-	-	PASS
GSM900	60	902	5;5;5;5	Power @ slot1	29.87564	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot2	29.89178	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot3	29.91559	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot4	29.93024	24	32	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	27.7948	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	27.83646	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	27.8551	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	27.84872	24	30	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	25.75549	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	25.75977	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	25.76785	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	25.75604	22	28	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	23.74457	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	23.73502	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	23.73645	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	23.73572	20	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS

GSM900	60	902	9;9;9;9	Power slot1 @	21.69513	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot2 @	21.67465	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot3 @	21.66223	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot4 @	21.66617	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power slot1 @	19.66025	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot2 @	19.64957	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot3 @	19.65674	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot4 @	19.6441	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power slot1 @	17.70117	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot2 @	17.69055	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot3 @	17.68539	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot4 @	17.70181	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power slot1 @	15.65607	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot2 @	15.64395	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot3 @	15.63953	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot4 @	15.6413	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power slot1 @	13.54544	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot2 @	13.59979	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot3 @	13.5993	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot4 @	13.59406	10	16	PASS

				slot4				
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	11.51807	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	11.50894	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	11.51578	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot4	11.49478	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	9.523651	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	9.618622	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	9.602509	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	9.591797	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	7.554779	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot2	7.560913	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot3	7.537903	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	7.524719	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	4.281433	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	4.291382	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	4.293304	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	4.285706	0	10	PASS
GSM900	124	914.8	3;3;3;3	PvT	-	-	-	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot1	29.42761	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @ slot2	29.46188	25	32	PASS
GSM900	124	914.8	3;3;3;3	Power @	29.46417	25	32	PASS

				slot3				
GSM900	124	914.8	3;3;3;3	Power @ slot4	29.48083	25	32	PASS
GSM900	124	914.8	4;4;4;4	PvT	-	-	-	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot1	29.38699	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot2	29.41782	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot3	29.43341	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot4	29.44641	24	33	PASS
GSM900	124	914.8	5;5;5;5	PvT	-	-	-	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot1	29.37677	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot2	29.41531	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot3	29.43588	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot4	29.44034	24	32	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	27.36288	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	27.3924	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot3	27.39728	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	27.39584	24	30	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	25.29739	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	25.30746	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	25.30353	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	25.29758	22	28	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	23.27747	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @	23.28119	20	26	PASS

				slot2				
GSM900	124	914.8	8;8;8;8	Power @ slot3	23.29407	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	23.30042	20	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	21.63324	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	21.63901	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	21.62939	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	21.64258	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	19.64334	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	19.63574	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	19.63037	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	19.62488	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	17.68512	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	17.69022	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	17.68066	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	17.67642	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	15.64359	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	15.62842	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	15.63498	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	15.62735	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @	13.60919	10	16	PASS

				slot1				
GSM900	124	914.8	13;13;13;13	Power @ slot2	13.68936	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	13.66867	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	13.67865	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	11.52896	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	11.52814	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	11.5202	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	11.5235	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	9.548492	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	9.615997	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	9.644012	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	9.636353	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	7.580353	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	7.582611	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	7.588104	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	7.575592	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	4.337402	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	4.312836	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	4.326233	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	4.327332	0	10	PASS

DCS1800	512	1710.2	3;3;3;3	PvT	-	-	-	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot1	27.21365	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot2	27.16223	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot3	27.13354	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot4	27.12933	22	29	PASS
DCS1800	512	1710.2	4;4;4;4	PvT	-	-	-	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot1	27.18777	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot2	27.13766	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot3	27.12225	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot4	27.11203	21	30	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	27.15311	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	27.12277	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	27.09012	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	27.06772	21	29	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	25.14255	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	25.10745	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	25.08087	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	25.07761	21	27	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	23.23038	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	23.18857	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	23.15845	19	25	PASS

DCS1800	512	1710.2	7;7;7;7	Power @ slot4	23.15396	19	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	21.25412	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	21.20279	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	21.1756	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	21.17206	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	19.18851	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	19.14893	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	19.10733	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	19.1004	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	17.19983	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	17.16849	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	17.13281	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	17.12436	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	15.20914	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	15.15411	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	15.13931	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	15.13223	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	13.18933	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	13.14105	8	16	PASS

DCS1800	512	1710.2	12;12;12;12	Power @ slot3	13.11783	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	13.11685	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	11.11746	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	11.07138	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	11.04715	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	11.04211	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	9.132904	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	9.108673	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	9.095947	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	9.095093	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	6.787811	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot2	6.770752	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot3	6.760498	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot4	6.756989	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT	-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot1	4.751526	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot2	4.730774	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	4.723785	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	4.69696	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	2.82016	-3	7	PASS

DCS1800	512	1710.2	17;17;17;17	Power @ slot2	2.773773	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot3	2.764648	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	2.76416	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	0.6374207	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	0.6086121	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	0.5908203	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot4	0.5928955	-5	5	PASS
DCS1800	700	1747.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot1	27.22531	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot2	27.16534	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot3	27.16278	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot4	27.1528	22	29	PASS
DCS1800	700	1747.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot1	27.19949	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot2	27.16733	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot3	27.1228	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot4	27.12866	21	30	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	27.17593	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	27.12326	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	27.11368	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	27.10202	21	29	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS

DCS1800	700	1747.8	6;6;6;6	Power @ slot1	25.13593	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	25.10385	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	25.09384	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	25.07449	21	27	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	23.19693	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	23.12714	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	23.09958	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	23.09103	19	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	21.19589	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot2	21.15265	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot3	21.12772	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	21.12695	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	19.17993	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	19.1434	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	19.1254	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	19.09512	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	17.17661	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	17.12457	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	17.12112	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	17.08508	13	19	PASS

				slot4				
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	15.10046	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	15.05658	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	15.02744	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	15.02606	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	13.05325	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	13.08972	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	13.07901	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	13.05844	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.96194	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	10.91559	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.90298	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	10.88971	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	8.935242	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.984009	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	8.977905	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	8.950623	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	7.045074	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	7.010834	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @	7.0112	2	10	PASS

				slot3				
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	6.982239	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	4.966736	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	4.945313	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	4.936951	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	4.931854	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	3.049042	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	3.017944	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	2.999146	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	3.003143	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.8801575	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	0.8470154	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.8410645	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.8372192	-5	5	PASS
DCS1800	885	1784.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot1	27.90353	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot2	27.85699	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot3	27.85483	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot4	27.83005	22	29	PASS
DCS1800	885	1784.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot1	27.85565	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @	27.81168	21	30	PASS


				slot2				
DCS1800	885	1784.8	4;4;4;4	Power @ slot3	27.80173	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot4	27.78806	21	30	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	27.83664	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	27.79065	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	27.77942	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	27.77328	21	29	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	25.84116	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	25.78192	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	25.7691	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	25.77194	21	27	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	23.84467	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	23.79449	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	23.76932	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	23.75528	19	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	21.81097	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	21.74246	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	21.74915	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.74701	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @	19.79895	15	21	PASS

				slot1				
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.77426	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	19.73886	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	19.73065	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	17.79004	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	17.76456	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	17.74426	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	17.71542	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	15.72562	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	15.68713	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.65524	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	15.67484	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	13.62762	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	13.67801	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	13.66541	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	13.66058	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	11.43814	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	11.41272	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	11.38934	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	11.37308	6	14	PASS


DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	9.365692	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	9.434998	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	9.442688	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	9.42572	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	7.765564	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	7.717316	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	7.71228	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	7.712555	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	5.662567	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	5.641296	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	5.644897	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	5.640503	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	3.725281	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	3.713501	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot3	3.694458	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot4	3.670502	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot1	1.572388	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot2	1.557037	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot3	1.54657	-5	5	PASS

DCS1800	885	1784.8	18;18;18;18	Power @ slot4	1.531586	-5	5	PASS
---------	-----	--------	-------------	---------------	----------	----	---	------

GSM900 Channel=124 Gamma=17;17;17;17.png

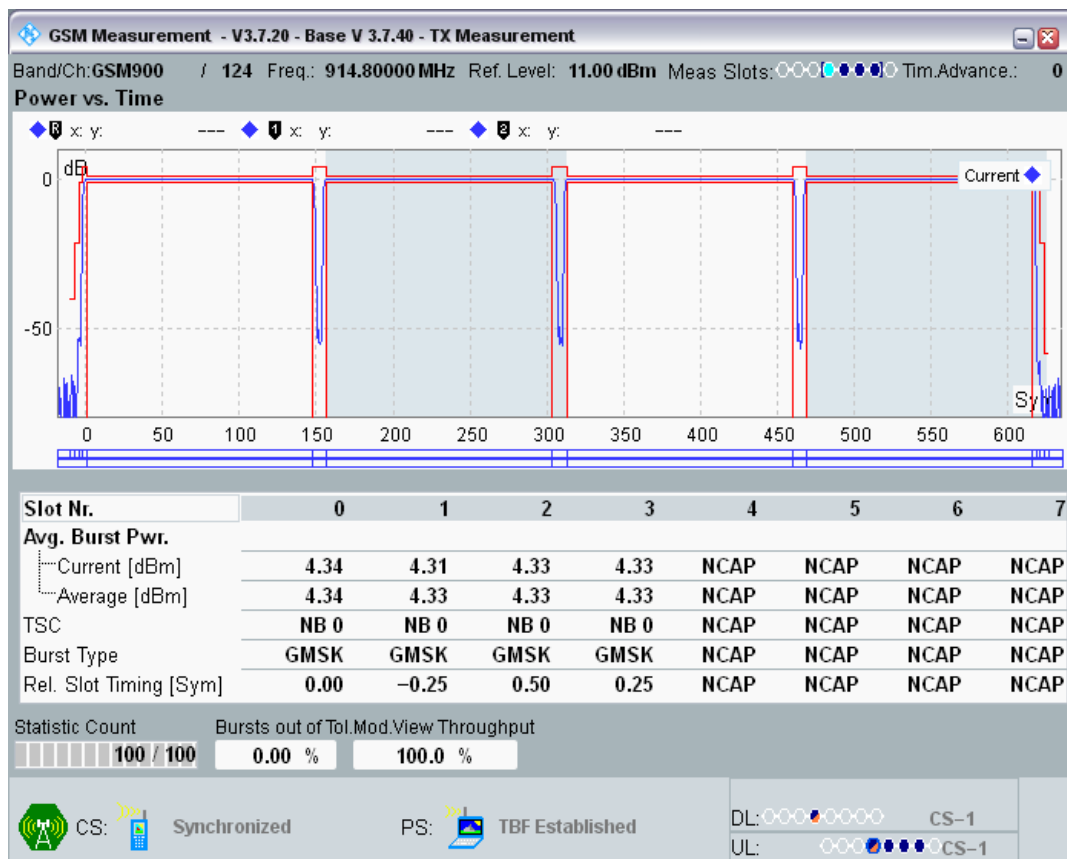


GSM900 Channel=124 Gamma=3;3;3;3.png

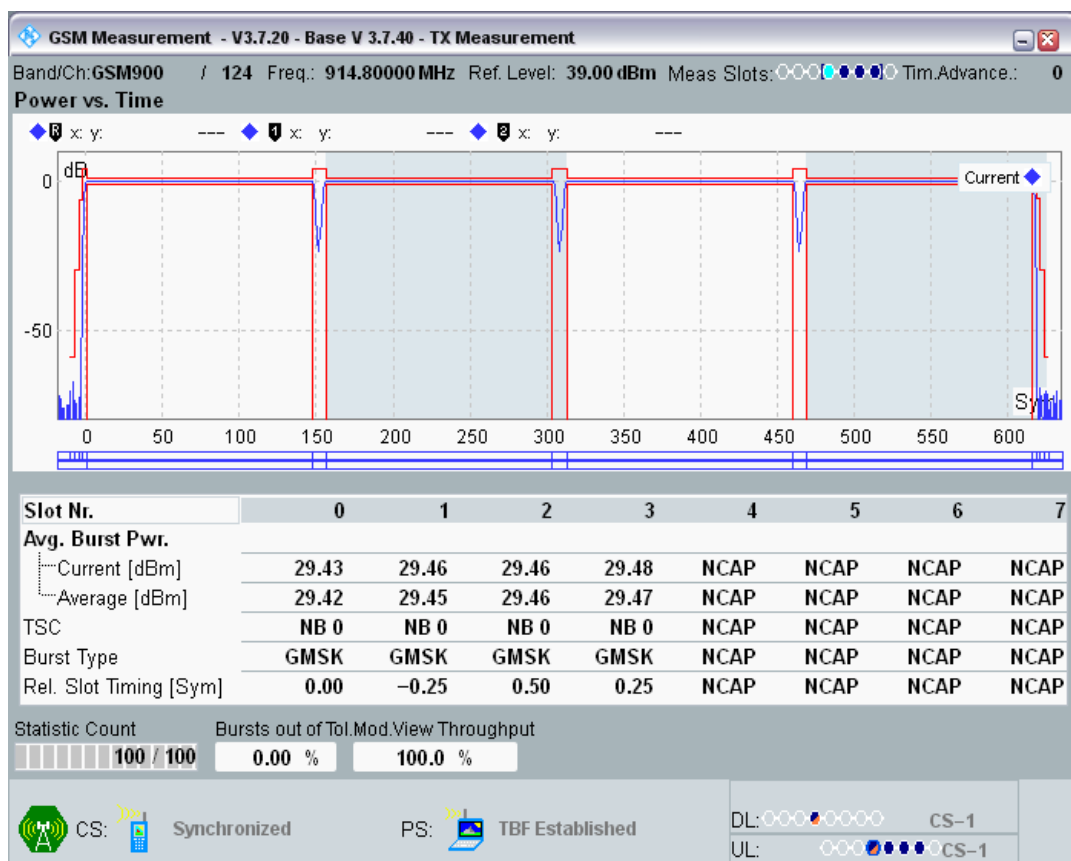


GSM900 Channel=60 Gamma=17;17;17;17.png




GSM900 Channel=60 Gamma=3;3;3;3.png

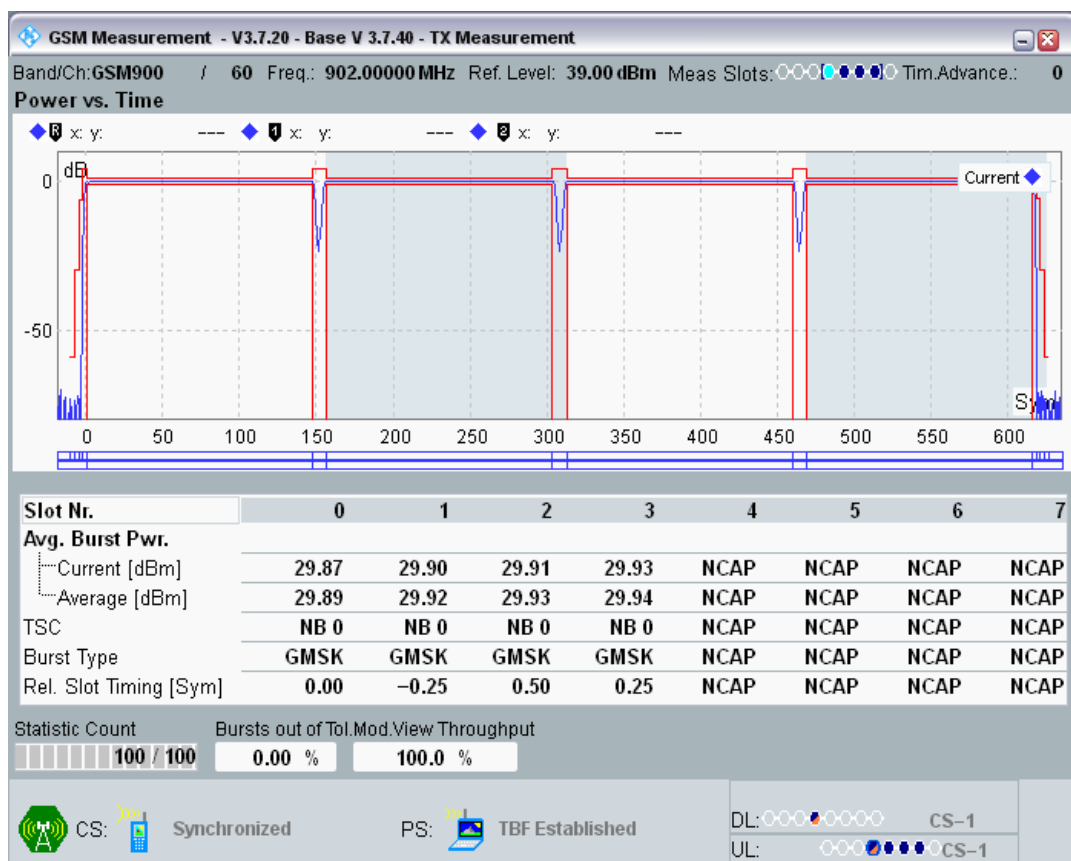


GSM900 Channel=975 Gamma=17;17;17;17.png

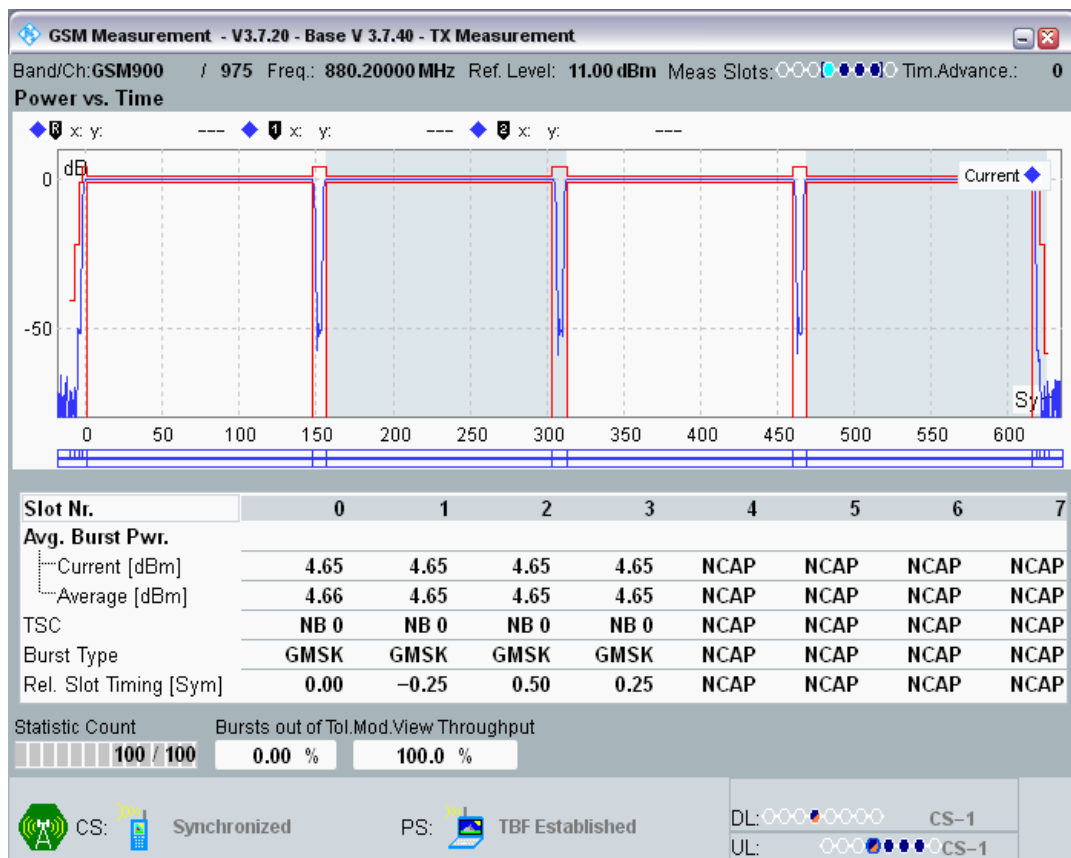


GSM900 Channel=975 Gamma=3;3;3.png

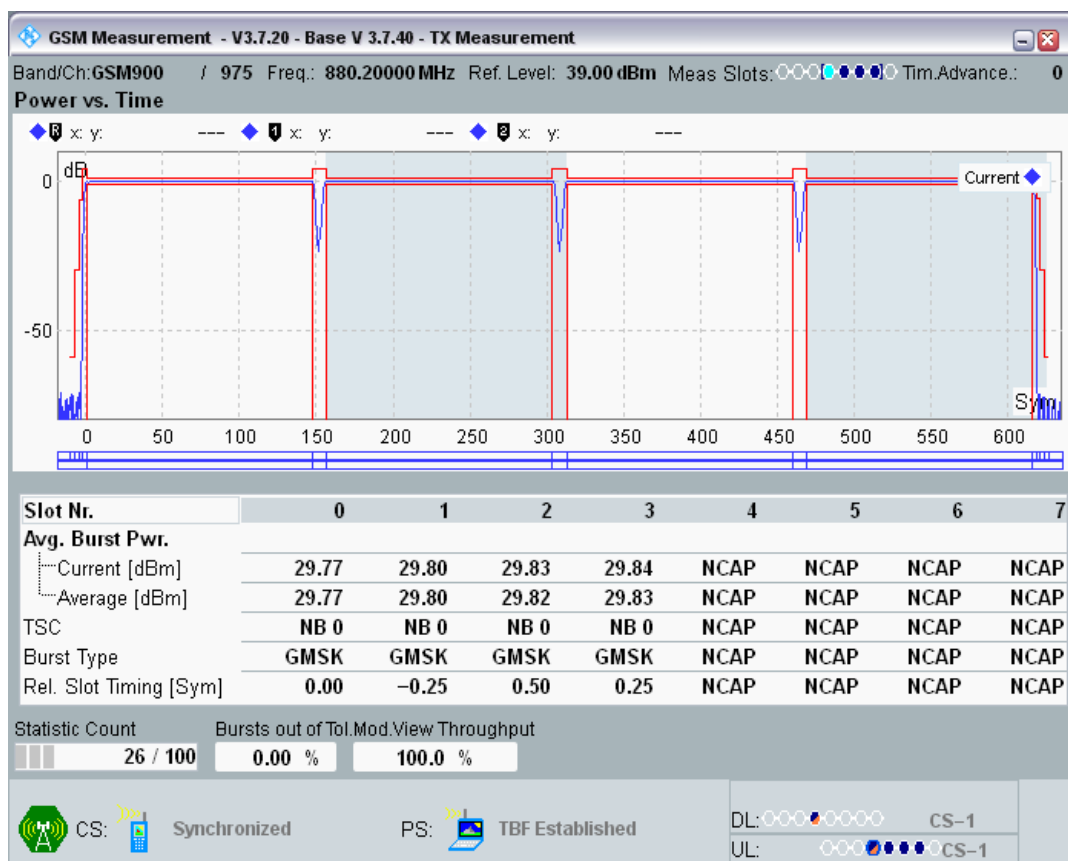


DCS1800 Channel=512 Gamma=18;18;18.png

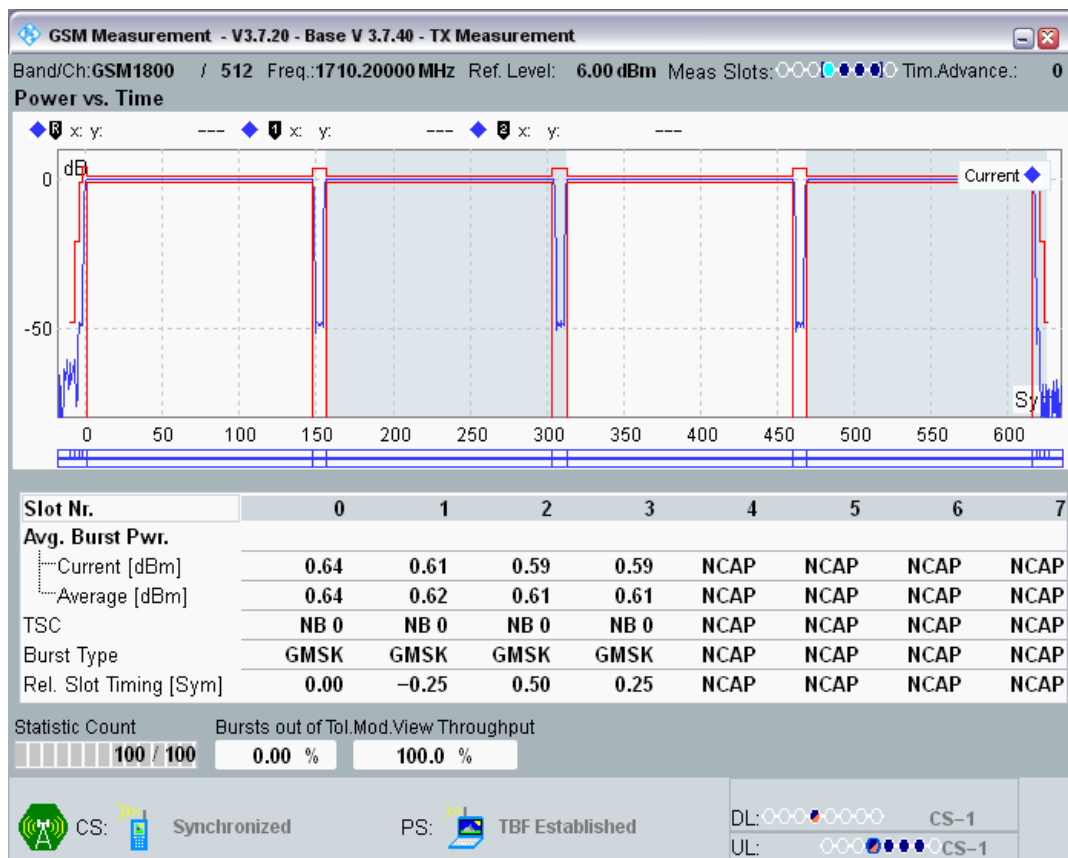


DCS1800 Channel=512 Gamma=3;3;3;3.png

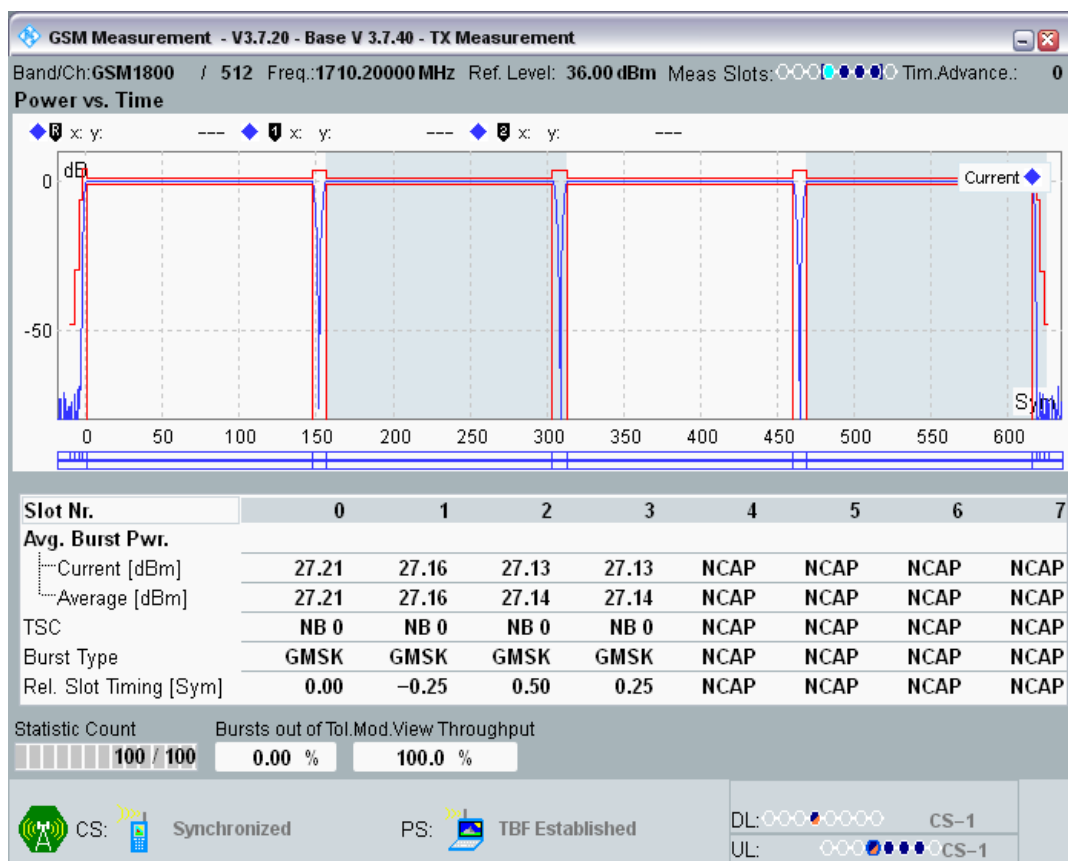


DCS1800 Channel=700 Gamma=18;18;18;18.png

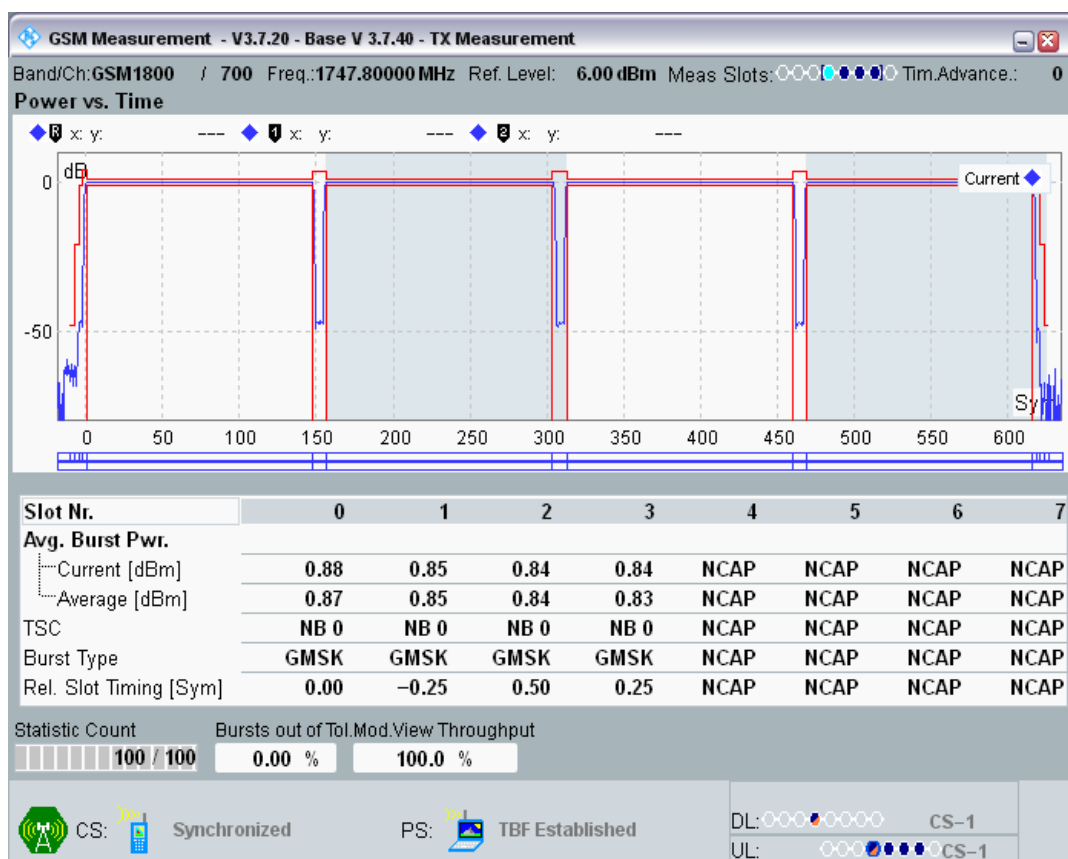


DCS1800 Channel=700 Gamma=3;3;3;3.png

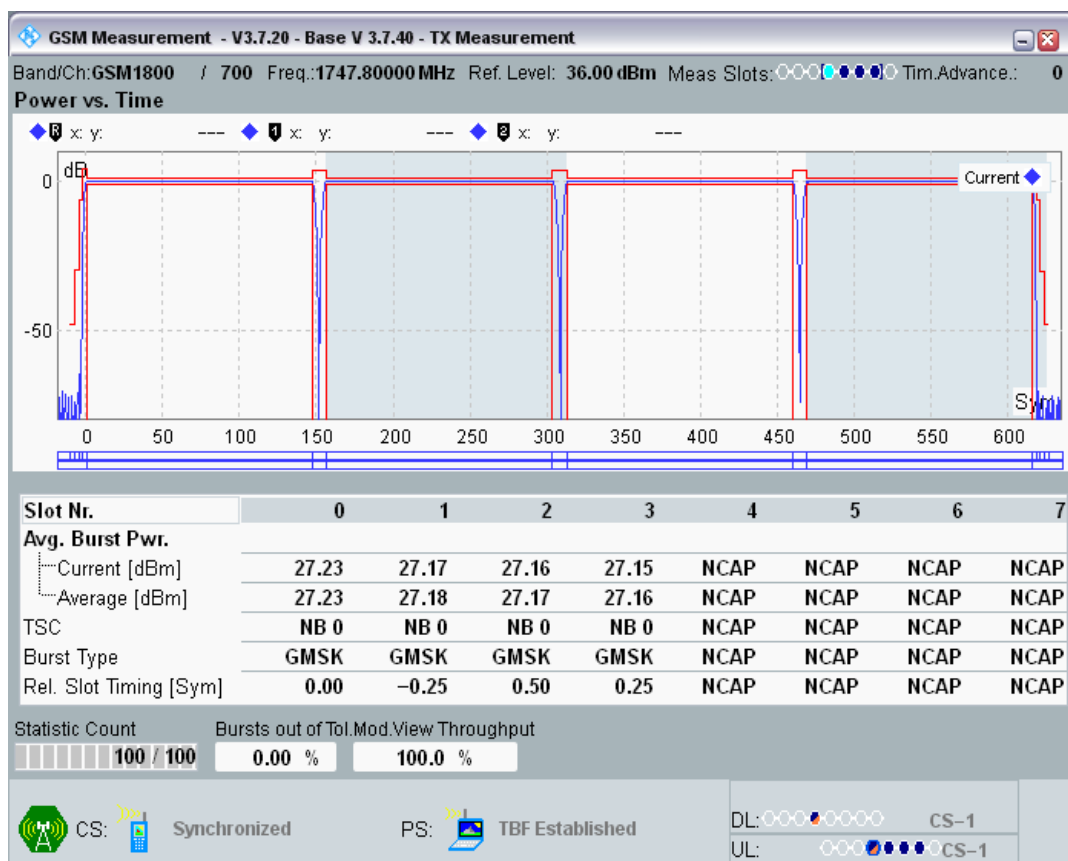

DCS1800 Channel=885 Gamma=18;18;18;18.png

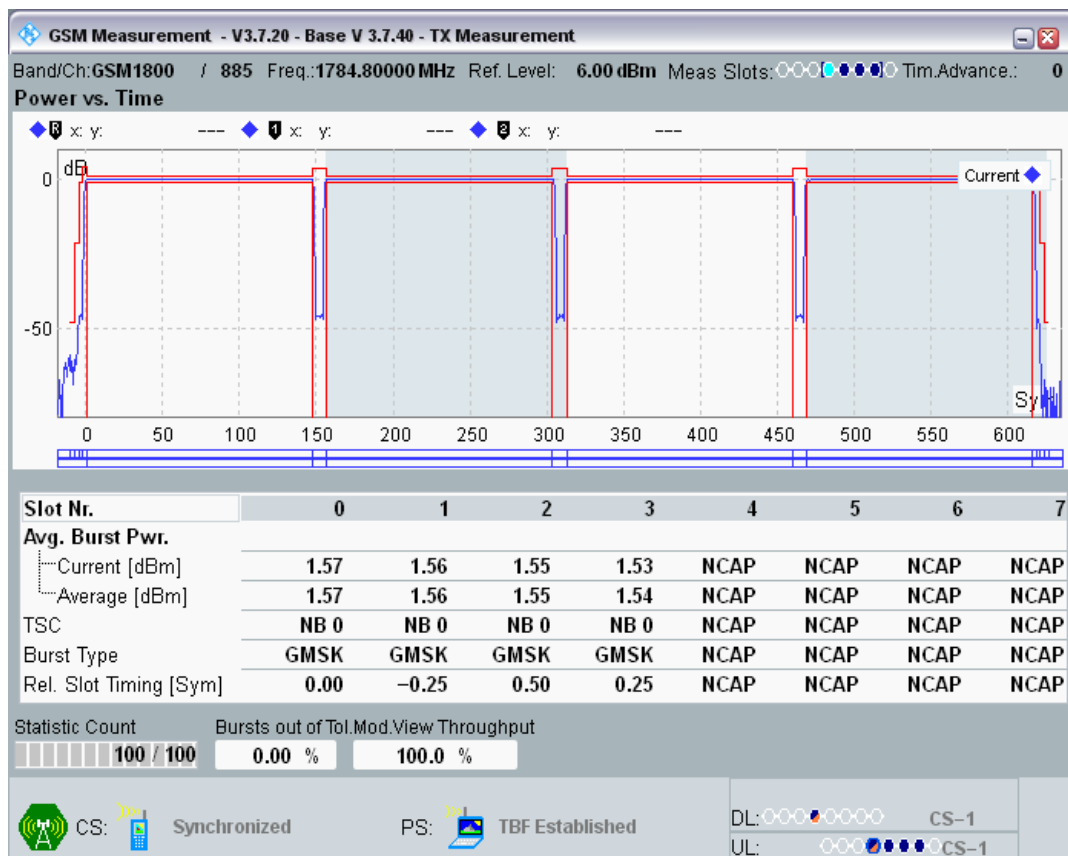

DCS1800 Channel=885 Gamma=3;3;3.png

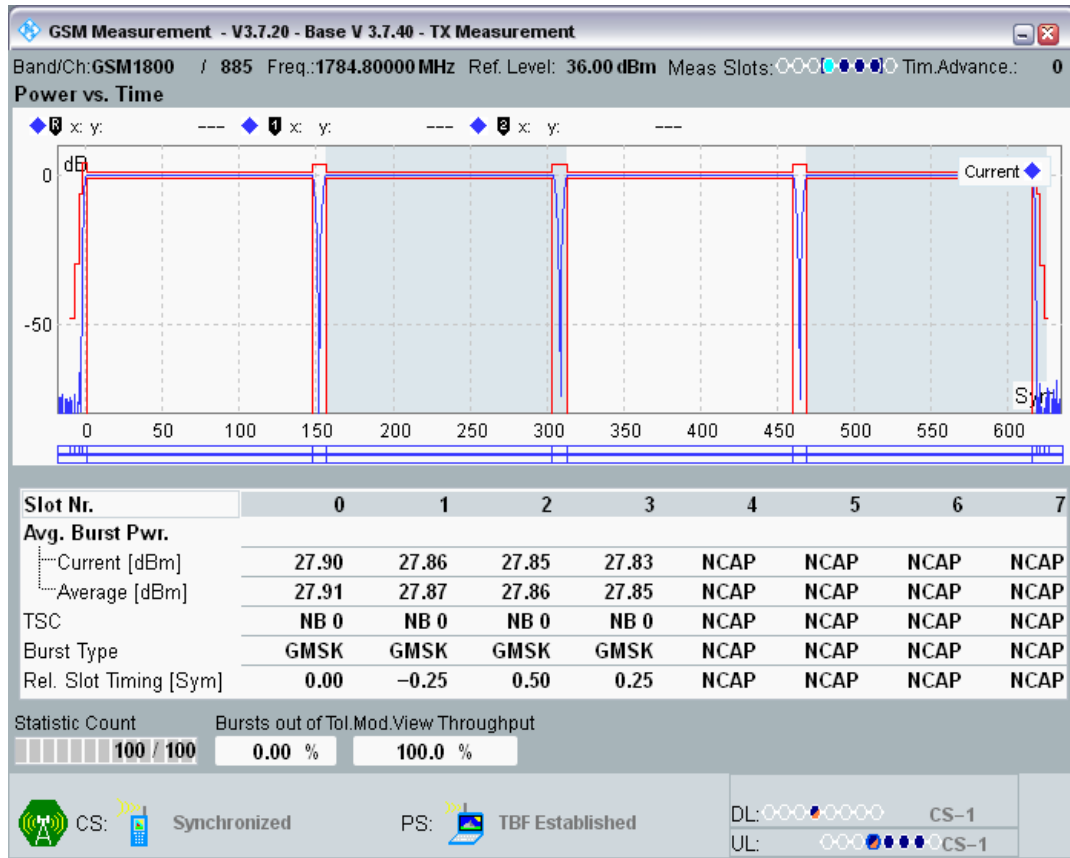

Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-79.54	-60	-57.59	-51	PASS
GSM900	975	880.2	3;3;3;3	-1600 KHz	-79.97	-60	-58.02	-51	PASS
GSM900	975	880.2	3;3;3;3	-1400 KHz	-78.79	-60	-56.85	-51	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-78.19	-60	-56.24	-51	PASS
GSM900	975	880.2	3;3;3;3	-1000 KHz	-76.72	-60	-54.78	-51	PASS
GSM900	975	880.2	3;3;3;3	-800 KHz	-75.99	-60	-54.04	-51	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-74.86	-60	-52.91	-51	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-70.23	-60	-48.28	-36	PASS
GSM900	975	880.2	3;3;3;3	-250 KHz	-40.94	-33	-19.00	-36	PASS

GSM900	975	880.2	3;3;3;3	-200 KHz	-36.81	-30	-14.86	-36	PASS
GSM900	975	880.2	3;3;3;3	-100 KHz	-8.82	0.5	13.12	-36	PASS
GSM900	975	880.2	3;3;3;3	100 KHz	-8.74	0.5	13.21	-36	PASS
GSM900	975	880.2	3;3;3;3	200 KHz	-36.68	-30	-14.74	-36	PASS
GSM900	975	880.2	3;3;3;3	250 KHz	-40.99	-33	-19.05	-36	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-69.91	-60	-47.96	-36	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-74.96	-60	-53.01	-51	PASS
GSM900	975	880.2	3;3;3;3	800 KHz	-76.25	-60	-54.30	-51	PASS
GSM900	975	880.2	3;3;3;3	1000 KHz	-76.88	-60	-54.94	-51	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-78.09	-60	-56.14	-51	PASS
GSM900	975	880.2	3;3;3;3	1400 KHz	-78.36	-60	-56.41	-51	PASS
GSM900	975	880.2	3;3;3;3	1600 KHz	-80.04	-60	-58.09	-51	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-79.50	-60	-57.55	-51	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-80.34	-60	-58.21	-51	PASS
GSM900	60	902	3;3;3;3	-1600 KHz	-80.23	-60	-58.10	-51	PASS
GSM900	60	902	3;3;3;3	-1400 KHz	-79.25	-60	-57.12	-51	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-78.20	-60	-56.07	-51	PASS
GSM900	60	902	3;3;3;3	-1000 KHz	-76.94	-60	-54.81	-51	PASS
GSM900	60	902	3;3;3;3	-800 KHz	-76.52	-60	-54.39	-51	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-74.99	-60	-52.86	-51	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-70.15	-60	-48.02	-36	PASS
GSM900	60	902	3;3;3;3	-250 KHz	-41.10	-33	-18.97	-36	PASS
GSM900	60	902	3;3;3;3	-200 KHz	-36.94	-30	-14.81	-36	PASS
GSM900	60	902	3;3;3;3	-100 KHz	-8.73	0.5	13.40	-36	PASS
GSM900	60	902	3;3;3;3	100 KHz	-8.93	0.5	13.20	-36	PASS


GSM900	60	902	3;3;3;3	200 KHz	-36.88	-30	-14.75	-36	PASS
GSM900	60	902	3;3;3;3	250 KHz	-41.01	-33	-18.88	-36	PASS
GSM900	60	902	3;3;3;3	400 KHz	-70.26	-60	-48.13	-36	PASS
GSM900	60	902	3;3;3;3	600 KHz	-75.08	-60	-52.95	-51	PASS
GSM900	60	902	3;3;3;3	800 KHz	-76.49	-60	-54.36	-51	PASS
GSM900	60	902	3;3;3;3	1000 KHz	-77.42	-60	-55.29	-51	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-78.30	-60	-56.17	-51	PASS
GSM900	60	902	3;3;3;3	1400 KHz	-78.89	-60	-56.76	-51	PASS
GSM900	60	902	3;3;3;3	1600 KHz	-80.30	-60	-58.17	-51	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-80.73	-60	-58.60	-51	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-78.96	-60	-57.37	-51	PASS
GSM900	124	914.8	3;3;3;3	-1600 KHz	-79.95	-60	-58.36	-51	PASS
GSM900	124	914.8	3;3;3;3	-1400 KHz	-79.56	-60	-57.97	-51	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-78.65	-60	-57.06	-51	PASS
GSM900	124	914.8	3;3;3;3	-1000 KHz	-77.13	-60	-55.54	-51	PASS
GSM900	124	914.8	3;3;3;3	-800 KHz	-76.62	-60	-55.03	-51	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-74.99	-60	-53.40	-51	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-70.09	-60	-48.50	-36	PASS
GSM900	124	914.8	3;3;3;3	-250 KHz	-40.85	-33	-19.26	-36	PASS
GSM900	124	914.8	3;3;3;3	-200 KHz	-36.76	-30	-15.17	-36	PASS
GSM900	124	914.8	3;3;3;3	-100 KHz	-8.94	0.5	12.65	-36	PASS
GSM900	124	914.8	3;3;3;3	100 KHz	-8.85	0.5	12.74	-36	PASS
GSM900	124	914.8	3;3;3;3	200 KHz	-36.78	-30	-15.19	-36	PASS
GSM900	124	914.8	3;3;3;3	250 KHz	-41.10	-33	-19.51	-36	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-70.30	-60	-48.71	-36	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-75.21	-60	-53.62	-51	PASS
GSM900	124	914.8	3;3;3;3	800 KHz	-76.77	-60	-55.18	-51	PASS

GSM900	124	914.8	3;3;3;3	1000 KHz	-77.29	-60	-55.70	-51	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-78.46	-60	-56.87	-51	PASS
GSM900	124	914.8	3;3;3;3	1400 KHz	-79.21	-60	-57.62	-51	PASS
GSM900	124	914.8	3;3;3;3	1600 KHz	-79.94	-60	-58.35	-51	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-79.08	-60	-57.49	-51	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-79.65	-60	-60.27	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1600 KHz	-79.43	-60	-60.04	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1400 KHz	-78.53	-60	-59.15	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-77.63	-60	-58.25	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1000 KHz	-76.01	-60	-56.63	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-800 KHz	-75.14	-60	-55.76	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-73.05	-60	-53.66	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-67.74	-60	-48.36	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-250 KHz	-41.06	-33	-21.67	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-200 KHz	-36.47	-30	-17.09	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-100 KHz	-8.80	0.5	10.59	-36	PASS
DCS1800	512	1710.2	3;3;3;3	100 KHz	-8.49	0.5	10.90	-36	PASS
DCS1800	512	1710.2	3;3;3;3	200 KHz	-36.44	-30	-17.06	-36	PASS
DCS1800	512	1710.2	3;3;3;3	250 KHz	-40.85	-33	-21.47	-36	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-68.08	-60	-48.70	-36	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-73.28	-60	-53.90	-56	PASS
DCS1800	512	1710.2	3;3;3;3	800 KHz	-75.04	-60	-55.66	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1000 KHz	-76.22	-60	-56.84	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-77.44	-60	-58.06	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1400 KHz	-78.28	-60	-58.90	-56	PASS


				KHz					
DCS1800	512	1710.2	3;3;3;3	1600 KHz	-79.63	-60	-60.25	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-79.78	-60	-60.39	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-79.58	-60	-60.21	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1600 KHz	-79.86	-60	-60.49	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1400 KHz	-78.36	-60	-59.00	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-77.37	-60	-58.01	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1000 KHz	-75.76	-60	-56.39	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-800 KHz	-74.88	-60	-55.52	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-73.41	-60	-54.04	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-67.89	-60	-48.52	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-250 KHz	-40.88	-33	-21.51	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-200 KHz	-36.67	-30	-17.31	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-100 KHz	-8.75	0.5	10.62	-36	PASS
DCS1800	700	1747.8	3;3;3;3	100 KHz	-9.02	0.5	10.35	-36	PASS
DCS1800	700	1747.8	3;3;3;3	200 KHz	-36.79	-30	-17.42	-36	PASS
DCS1800	700	1747.8	3;3;3;3	250 KHz	-40.92	-33	-21.56	-36	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-68.07	-60	-48.70	-36	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-73.44	-60	-54.07	-56	PASS
DCS1800	700	1747.8	3;3;3;3	800 KHz	-75.05	-60	-55.68	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1000 KHz	-76.24	-60	-56.87	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-77.31	-60	-57.94	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1400 KHz	-78.24	-60	-58.87	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1600 KHz	-79.69	-60	-60.33	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-79.59	-60	-60.23	-56	PASS

DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-79.98	-60	-59.89	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1600 KHz	-79.89	-60	-59.81	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1400 KHz	-78.95	-60	-58.86	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-77.96	-60	-57.87	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1000 KHz	-76.06	-60	-55.97	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-800 KHz	-75.01	-60	-54.93	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-73.28	-60	-53.19	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-67.94	-60	-47.85	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-250 KHz	-40.70	-33	-20.62	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-200 KHz	-36.81	-30	-16.72	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-100 KHz	-9.11	0.5	10.98	-36	PASS
DCS1800	885	1784.8	3;3;3;3	100 KHz	-8.88	0.5	11.21	-36	PASS
DCS1800	885	1784.8	3;3;3;3	200 KHz	-36.67	-30	-16.58	-36	PASS
DCS1800	885	1784.8	3;3;3;3	250 KHz	-40.89	-33	-20.80	-36	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-68.10	-60	-48.01	-36	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-73.22	-60	-53.14	-56	PASS
DCS1800	885	1784.8	3;3;3;3	800 KHz	-75.19	-60	-55.10	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1000 KHz	-76.35	-60	-56.26	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-78.08	-60	-57.99	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1400 KHz	-78.86	-60	-58.77	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1600 KHz	-79.80	-60	-59.71	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-80.04	-60	-59.95	-56	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

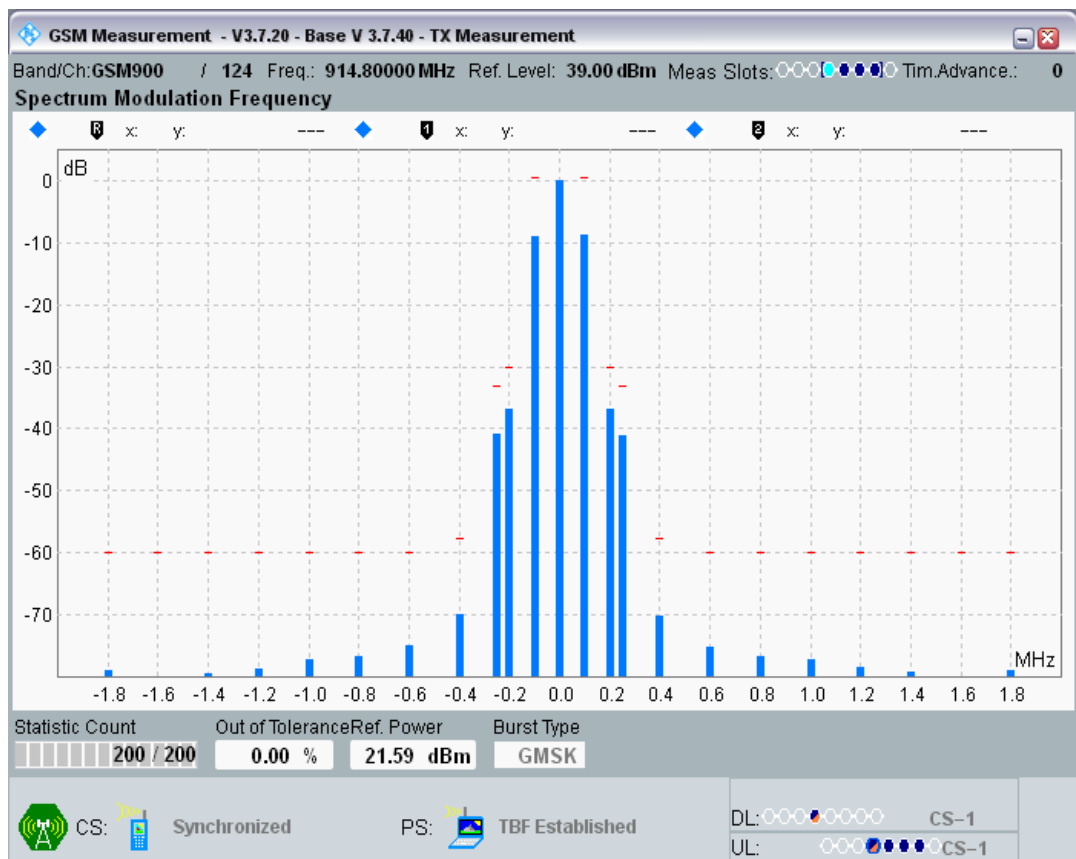


GSM900 Channel=60 Gamma=3;3;3;3.png

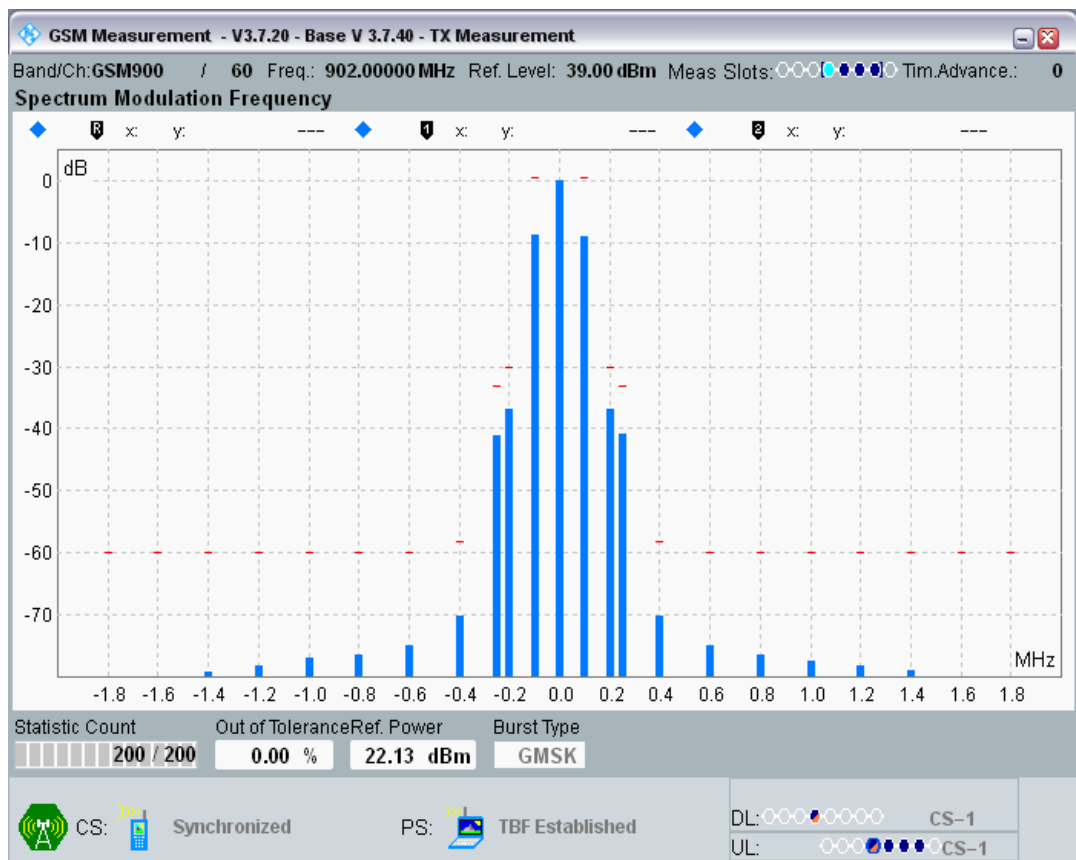


GSM900 Channel=975 Gamma=3;3;3;3.png

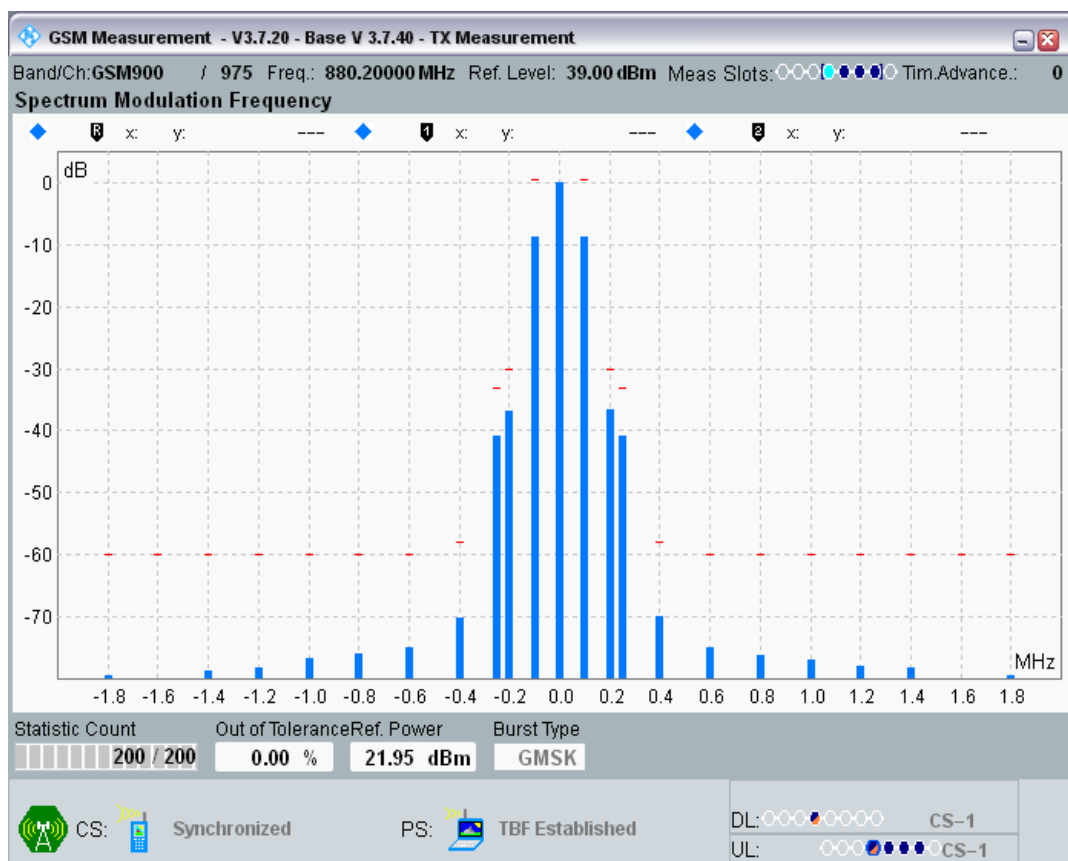


DCS1800 Channel=512 Gamma=3;3;3;3.png

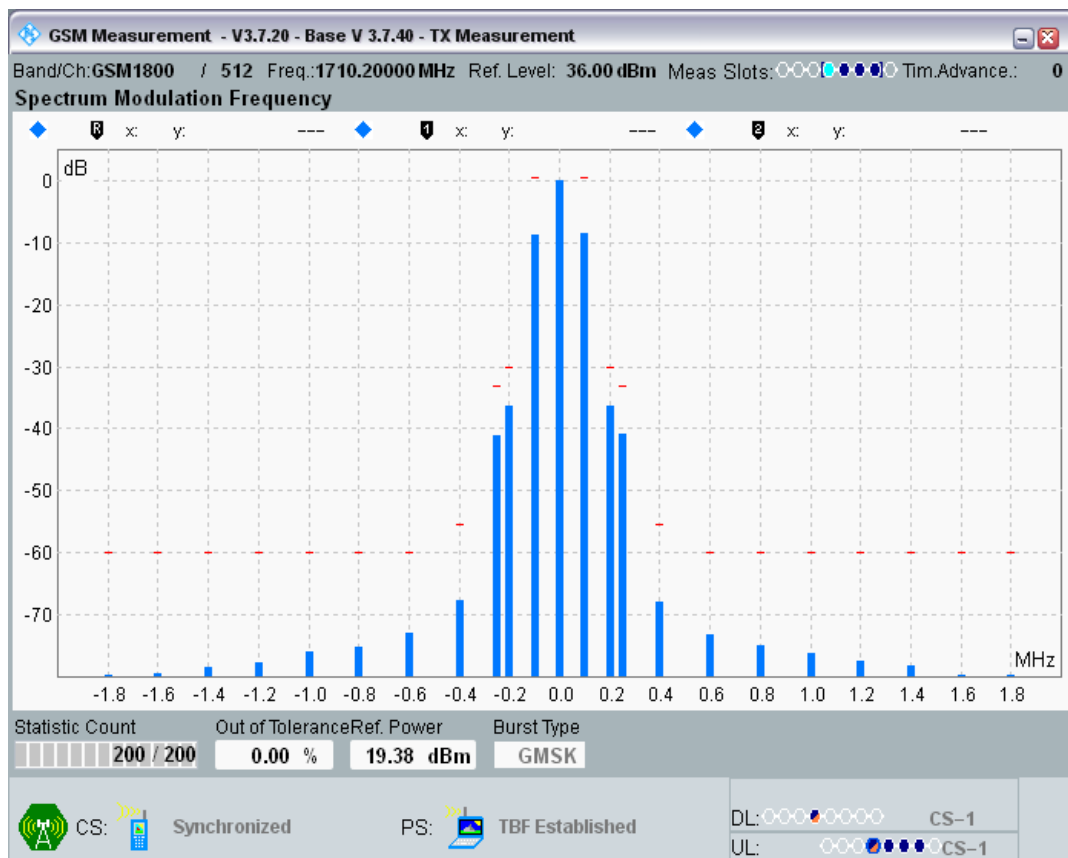

DCS1800 Channel=700 Gamma=3;3;3;3.png

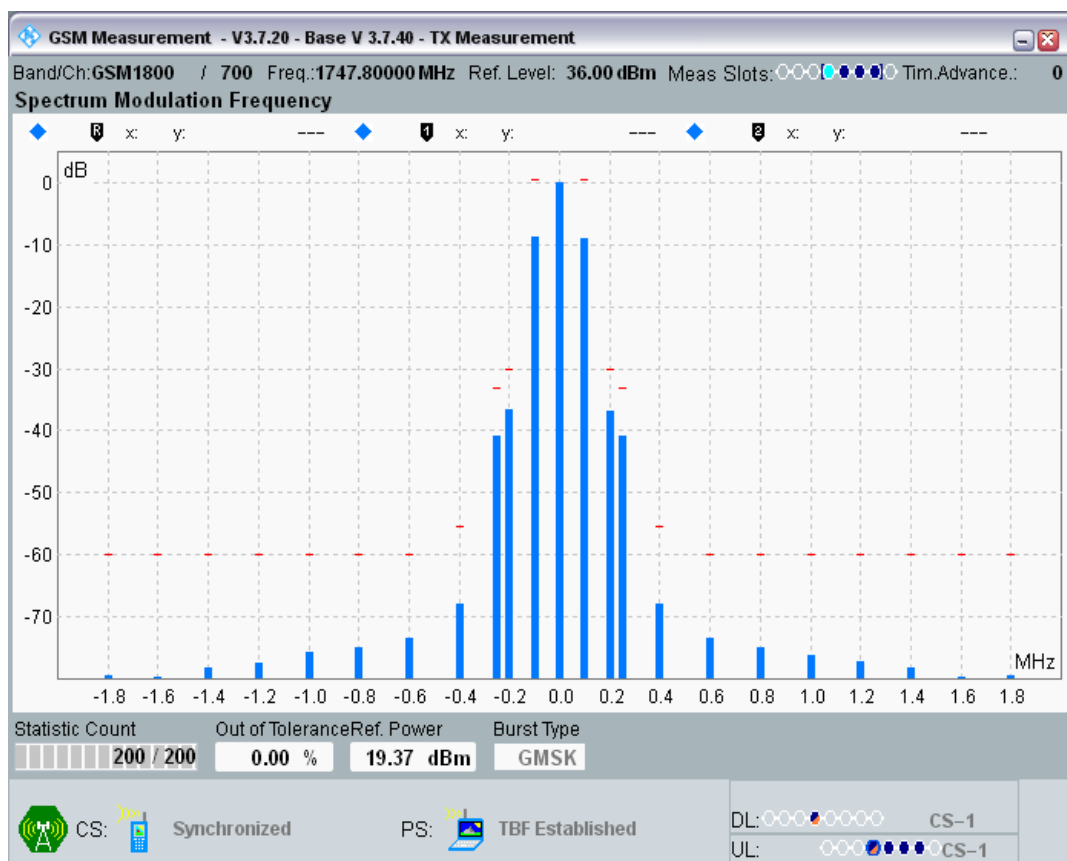

DCS1800 Channel=885 Gamma=3;3;3;3.png

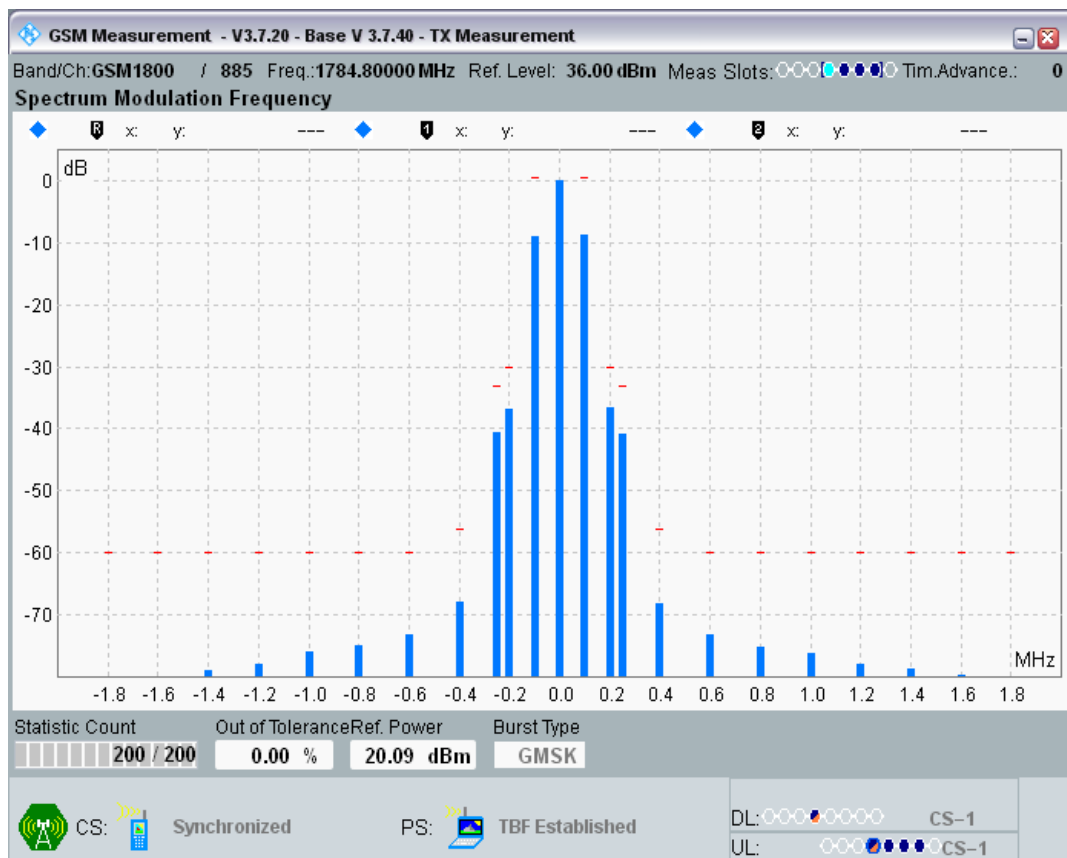


Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-37.91	-24	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-35.47	-21	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-29.00	-21	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-26.11	-19	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-24.98	-19	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-28.59	-21	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-34.89	-21	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-38.84	-24	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-38.11	-24	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-35.76	-21	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-29.90	-21	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-26.18	-19	PASS
GSM900	60	902	3;3;3;3	400 KHz	-25.18	-19	PASS
GSM900	60	902	3;3;3;3	600 KHz	-28.81	-21	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-34.49	-21	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-38.45	-24	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-37.65	-24	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-35.64	-21	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-30.29	-21	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-26.48	-19	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-25.72	-19	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-29.14	-21	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-35.43	-21	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-38.98	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-47.39	-27	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-44.28	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-42.03	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-35.46	-22	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-34.14	-22	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-39.79	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-45.56	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-48.87	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-48.79	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-45.78	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-39.87	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-34.67	-22	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-34.53	-22	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-39.12	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-45.17	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-48.88	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-48.32	-27	PASS

DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-45.54	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-40.75	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-33.66	-22	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-32.81	-22	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-39.06	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-44.68	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-48.68	-27	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

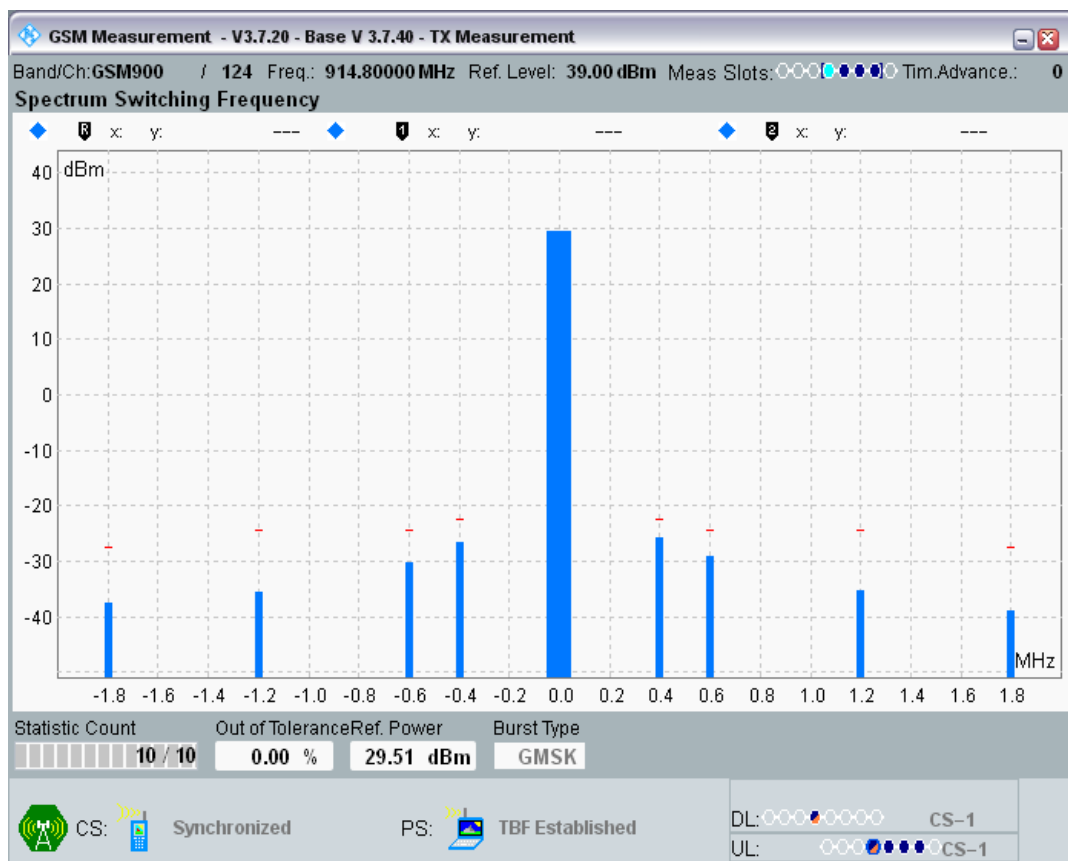


GSM900 Channel=60 Gamma=3;3;3.png

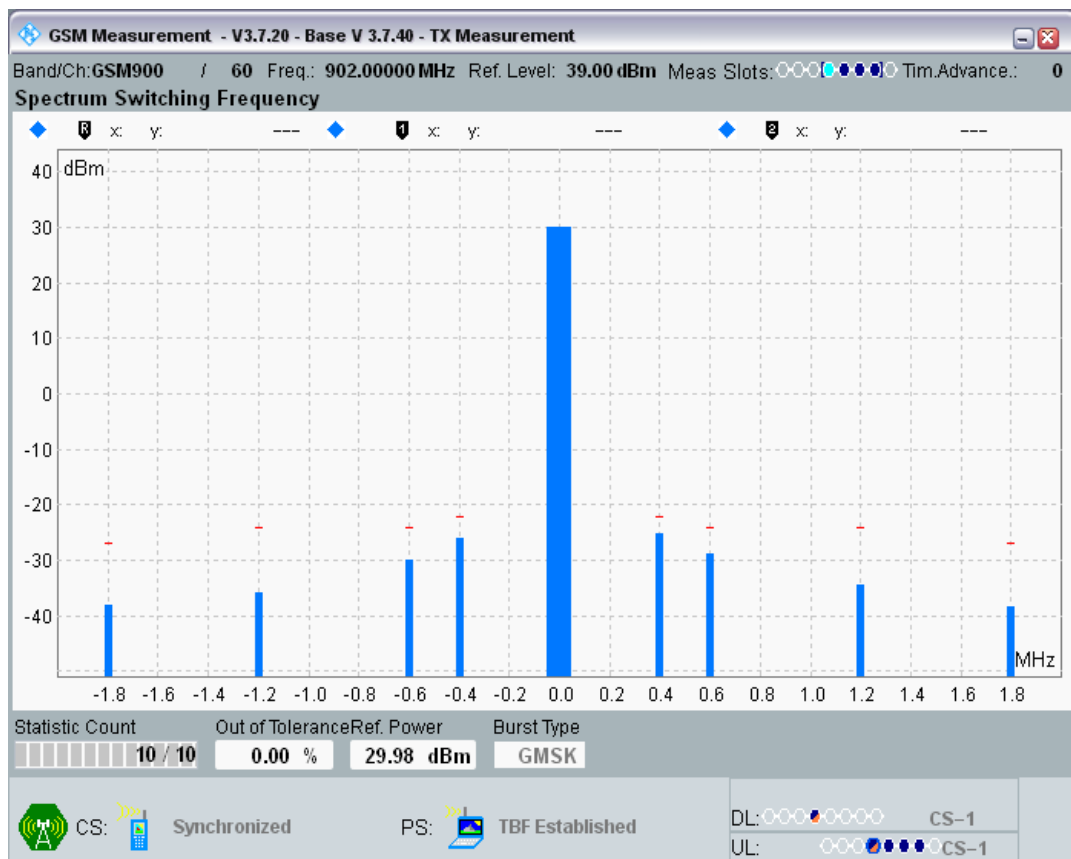


GSM900 Channel=975 Gamma=3;3;3.png

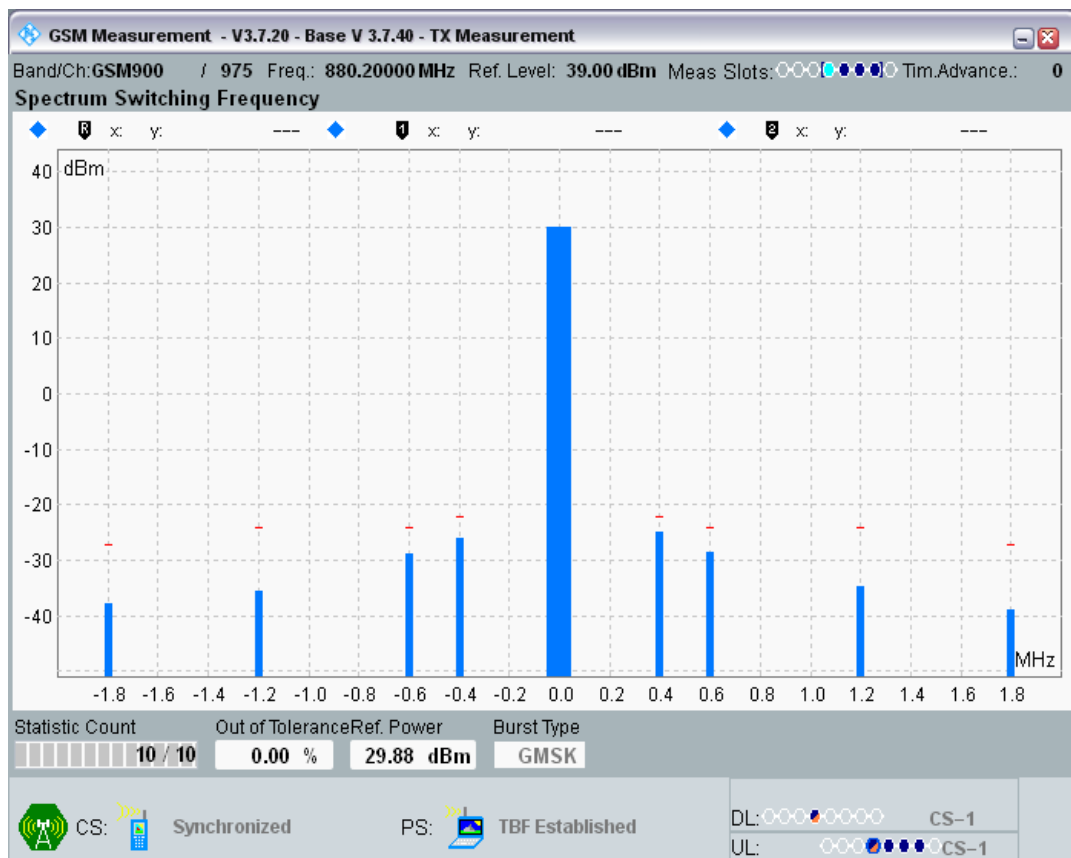


DCS1800 Channel=512 Gamma=3;3;3;3.png

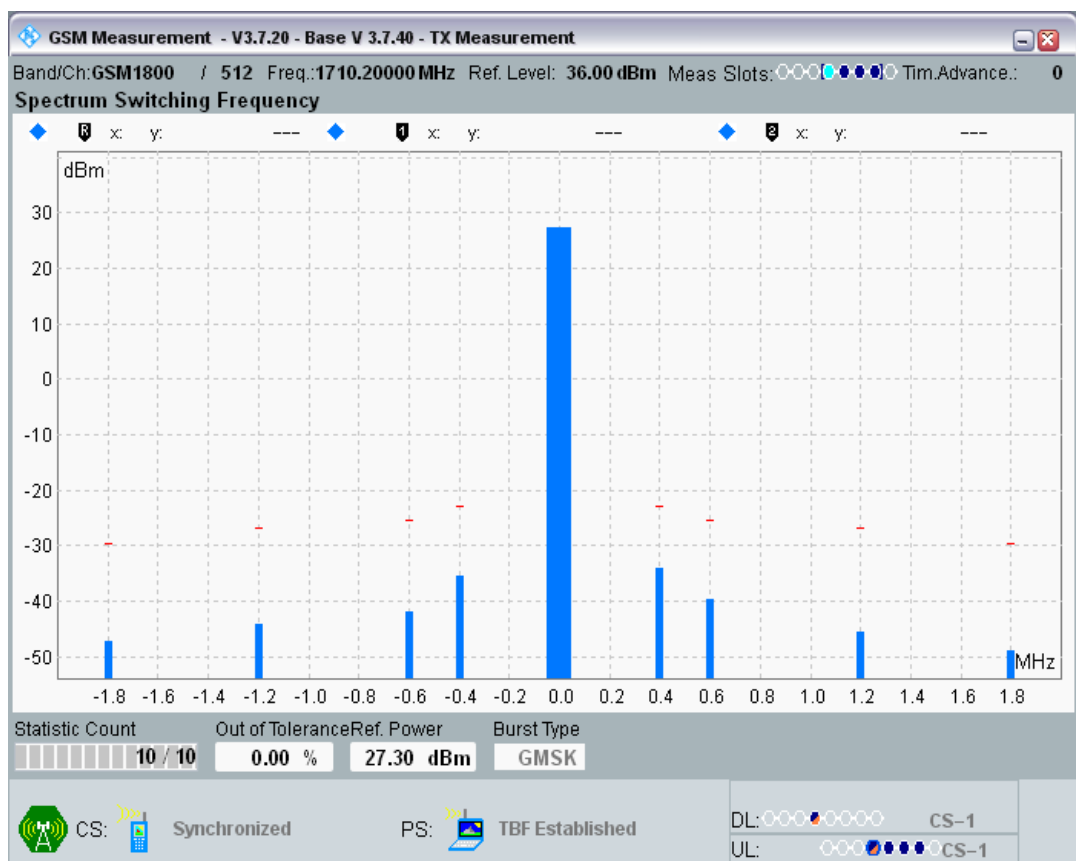

DCS1800 Channel=700 Gamma=3;3;3;3.png

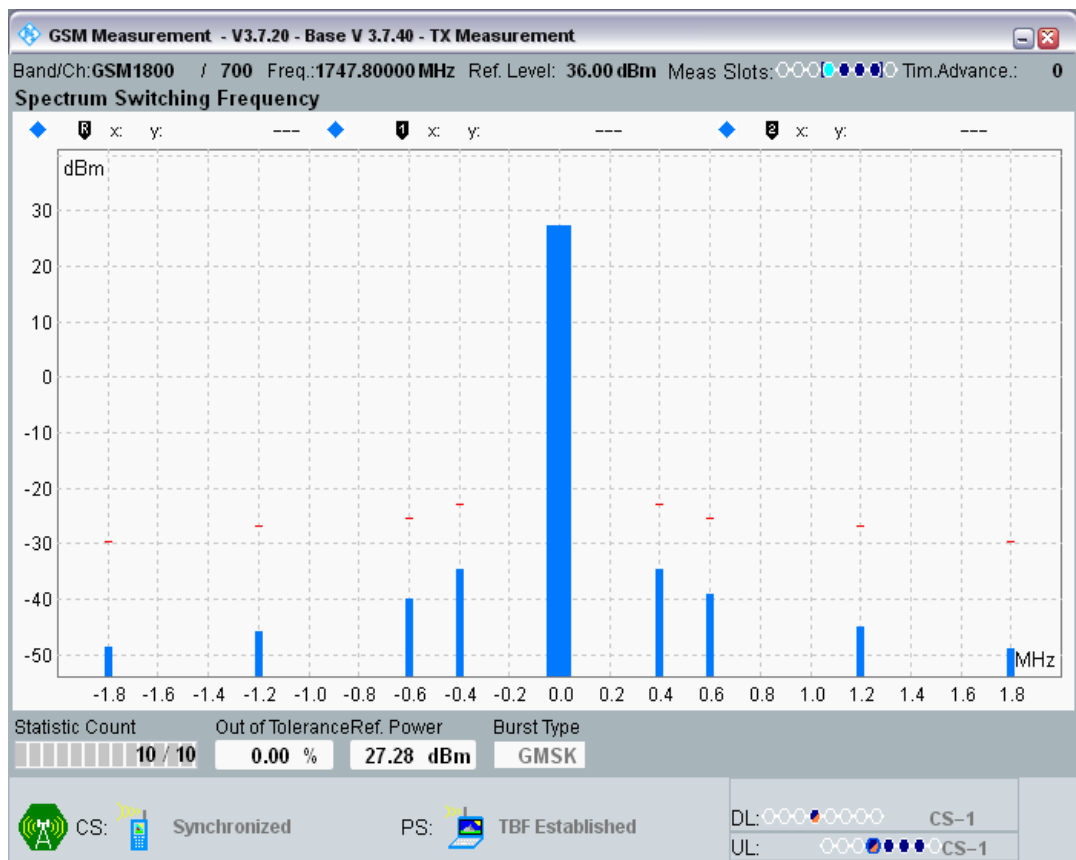


DCS1800 Channel=885 Gamma=3;3;3;3.png

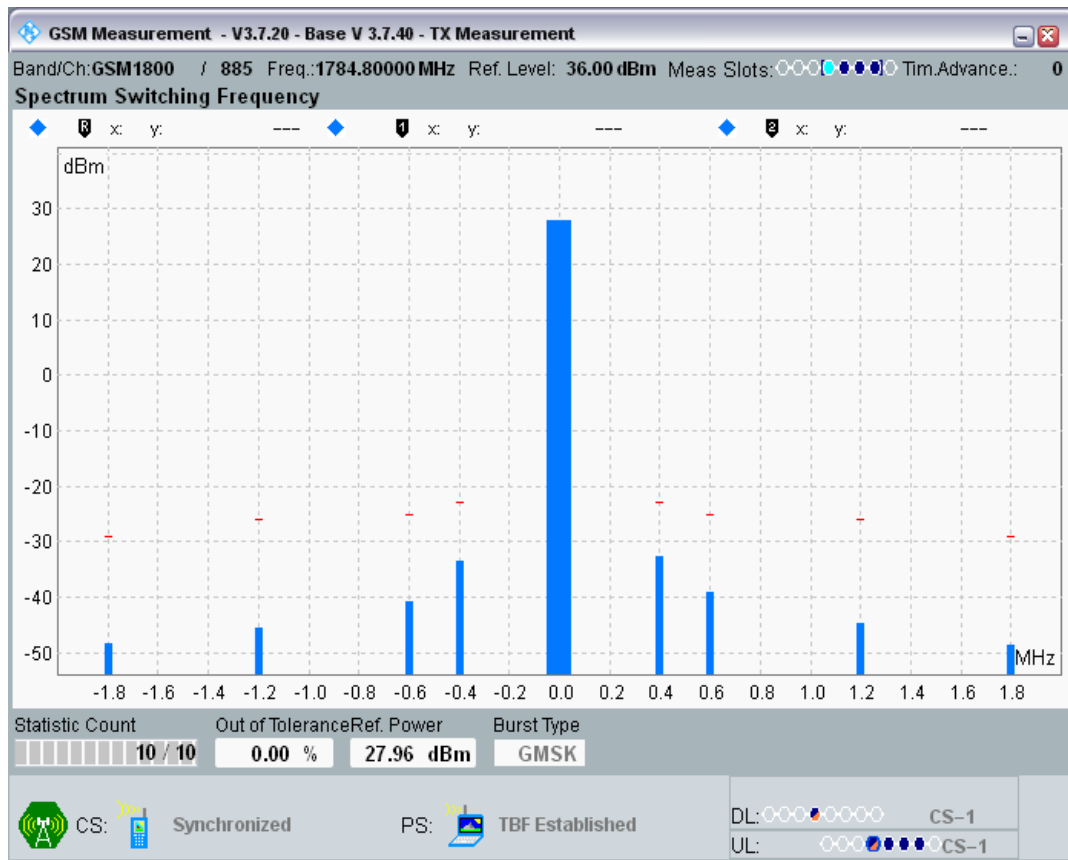


Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	6;6;6;6	Frequency Error (Hz)	12.95	-88.02	88.02	PASS
GSM900	975	880.2	6;6;6;6	RMS EVM (%)	1.04	0	9	PASS
GSM900	975	880.2	6;6;6;6	Peak EVM (%)	2.72	0	30	PASS
GSM900	60	902	6;6;6;6	Frequency Error (Hz)	13.92	-90.2	90.2	PASS
GSM900	60	902	6;6;6;6	RMS EVM (%)	1.06	0	9	PASS
GSM900	60	902	6;6;6;6	Peak EVM (%)	2.79	0	30	PASS
GSM900	124	914.8	6;6;6;6	Frequency Error (Hz)	11.95	-91.48	91.48	PASS
GSM900	124	914.8	6;6;6;6	RMS EVM (%)	1.06	0	9	PASS
GSM900	124	914.8	6;6;6;6	Peak EVM (%)	2.81	0	30	PASS
DCS1800	512	1710.2	5;5;5;5	Frequency Error (Hz)	23.96	-171.02	171.02	PASS
DCS1800	512	1710.2	5;5;5;5	RMS EVM (%)	1.24	0	9	PASS
DCS1800	512	1710.2	5;5;5;5	Peak EVM (%)	3.70	0	30	PASS
DCS1800	700	1747.8	5;5;5;5	Frequency Error (Hz)	20.02	-174.78	174.78	PASS
DCS1800	700	1747.8	5;5;5;5	RMS EVM (%)	1.34	0	9	PASS
DCS1800	700	1747.8	5;5;5;5	Peak EVM (%)	4.00	0	30	PASS
DCS1800	885	1784.8	5;5;5;5	Frequency Error (Hz)	25.83	-178.48	178.48	PASS
DCS1800	885	1784.8	5;5;5;5	RMS EVM (%)	1.39	0	9	PASS
DCS1800	885	1784.8	5;5;5;5	Peak EVM (%)	3.97	0	30	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

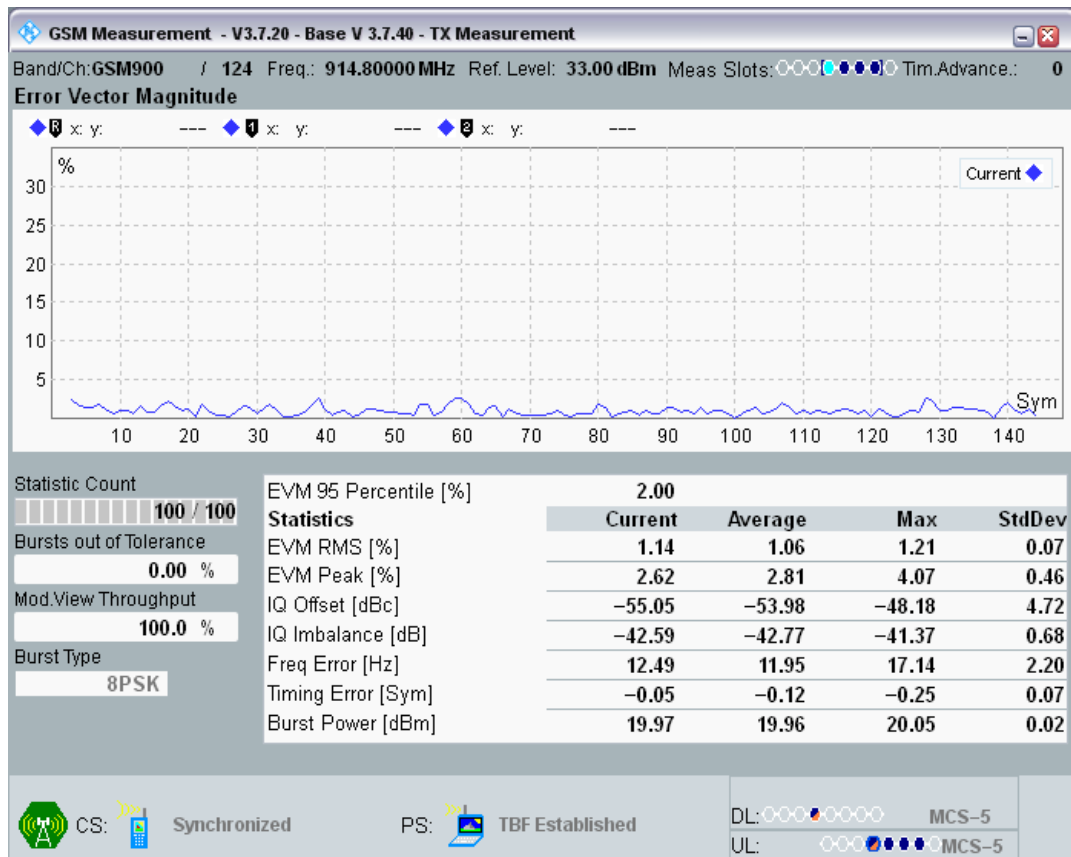


GSM900 Channel=60 Gamma=6;6;6;6.png

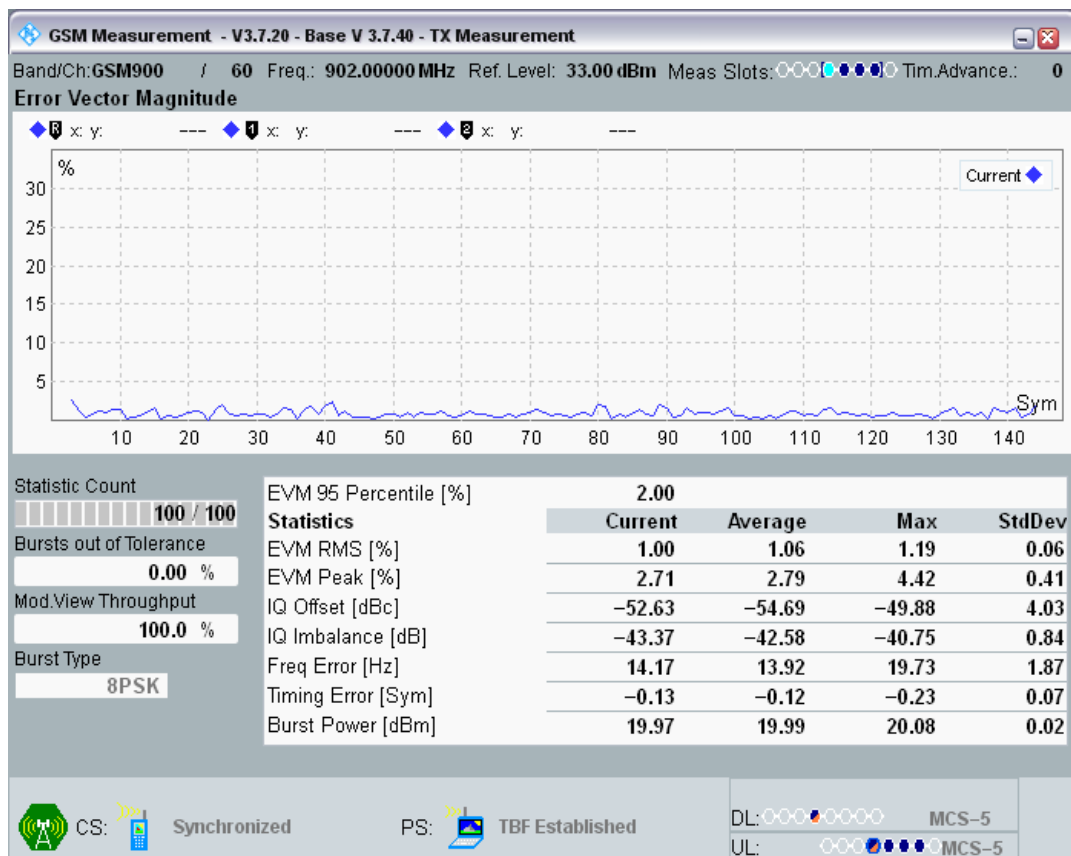


GSM900 Channel=975 Gamma=6;6;6;6.png

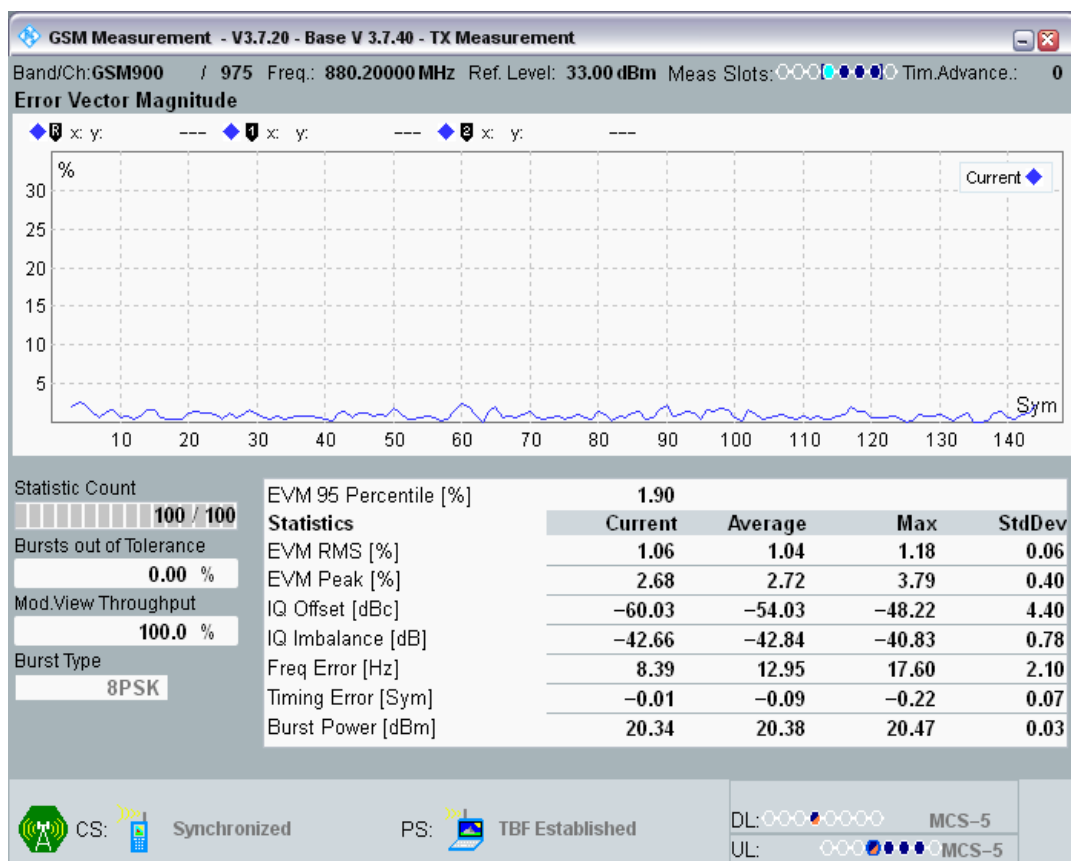


DCS1800 Channel=512 Gamma=5;5;5;5.png

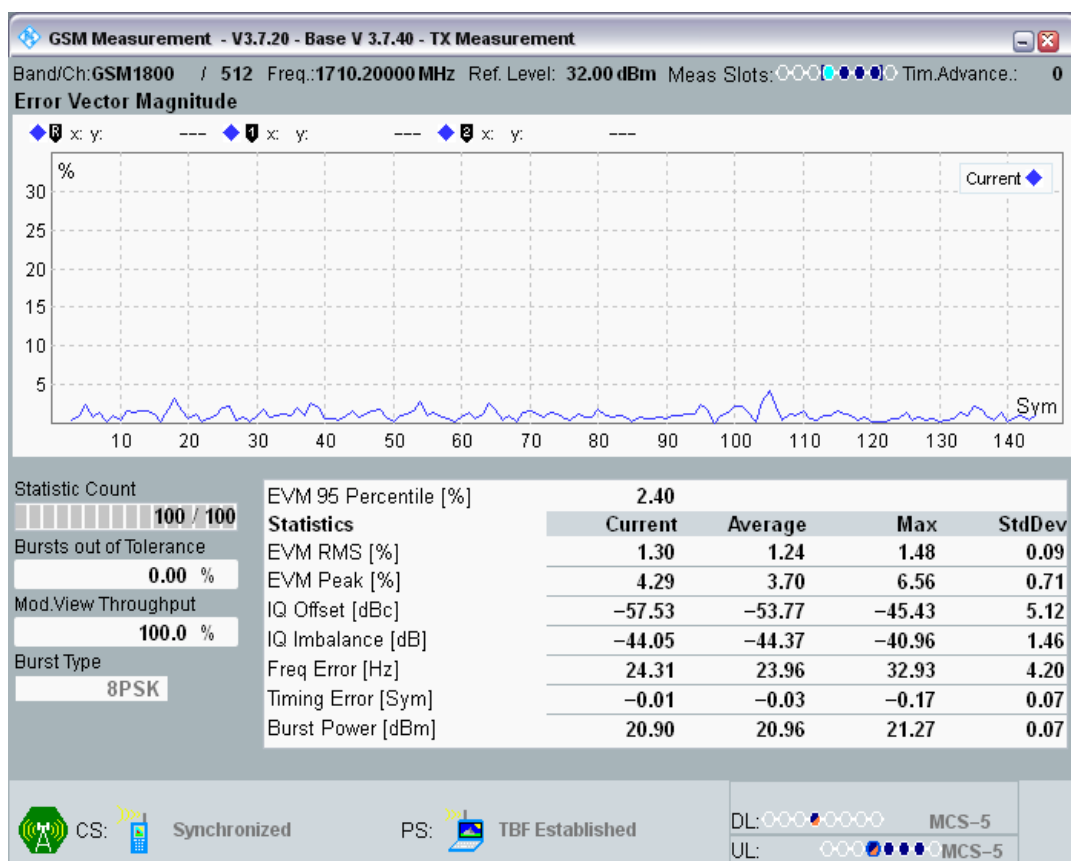

DCS1800 Channel=700 Gamma=5;5;5;5.png

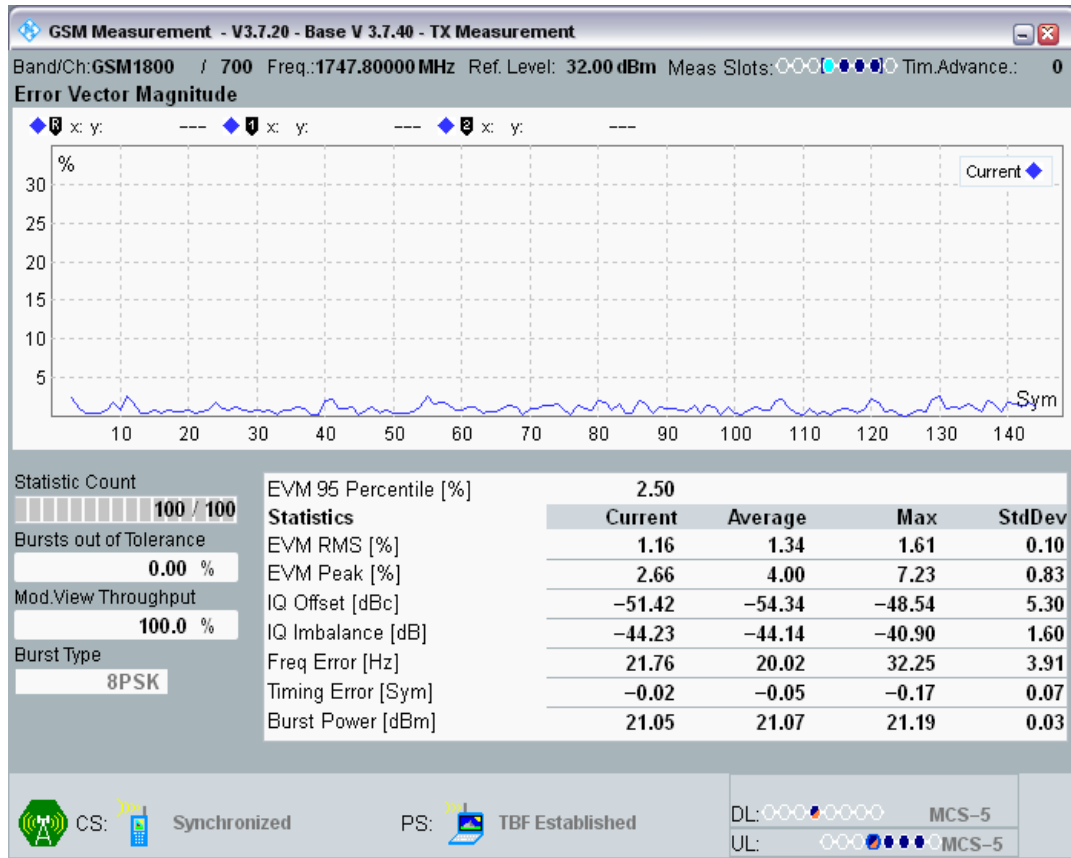


DCS1800 Channel=885 Gamma=5;5;5;5.png

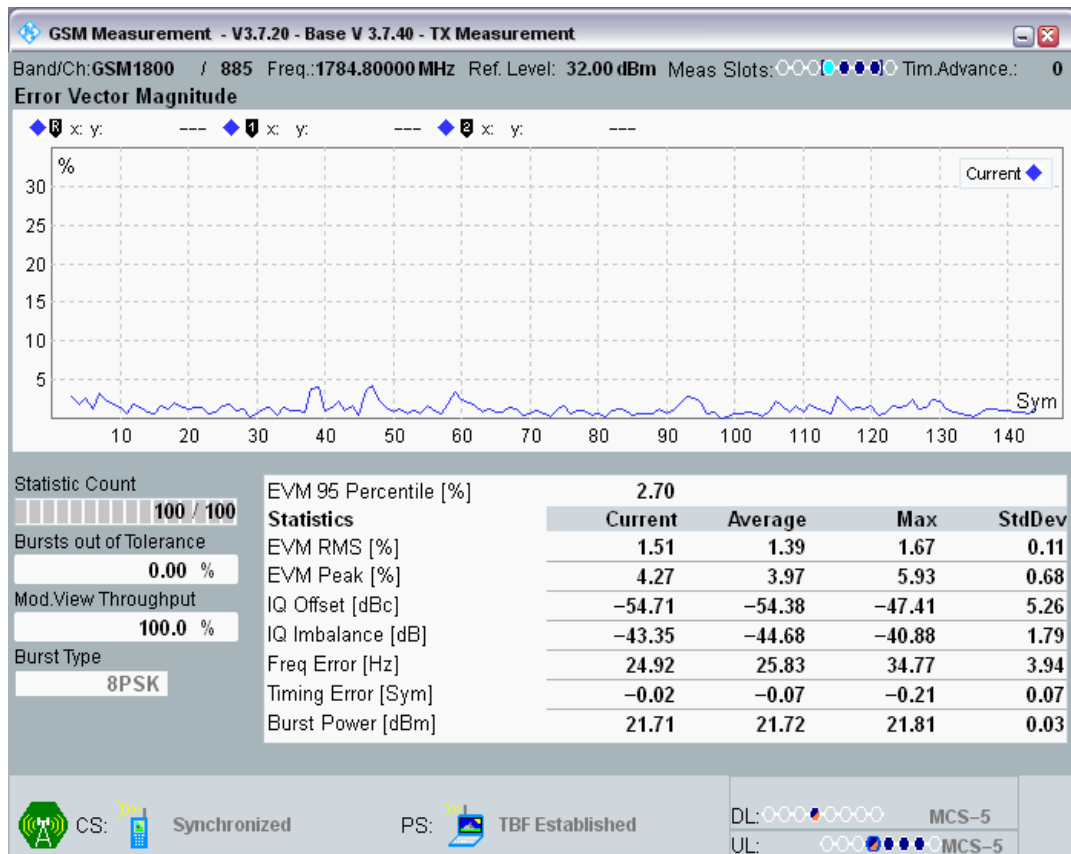


Clause 4.2.27 Frequency error under multipath and interference conditions in EGPRS Configuration

Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
GSM900	RA250	975	880.2	6;6;6;6	12.14	-300	300	PASS
GSM900	RA250	60	902	6;6;6;6	11.85	-300	300	PASS
GSM900	RA250	124	914.8	6;6;6;6	11.62	-300	300	PASS
GSM900	HT100	975	880.2	6;6;6;6	10.78	-180	180	PASS
GSM900	HT100	60	902	6;6;6;6	10.82	-180	180	PASS
GSM900	HT100	124	914.8	6;6;6;6	11.07	-180	180	PASS
GSM900	TU50	975	880.2	6;6;6;6	7.23	-160	160	PASS
GSM900	TU50	60	902	6;6;6;6	12.11	-160	160	PASS
GSM900	TU50	124	914.8	6;6;6;6	11.20	-160	160	PASS
GSM900	TU3	975	880.2	6;6;6;6	9.14	-230	230	PASS
GSM900	TU3	60	902	6;6;6;6	10.94	-230	230	PASS
GSM900	TU3	124	914.8	6;6;6;6	10.94	-230	230	PASS
DCS1800	RA130	512	1710.2	5;5;5;5	19.69	-400	400	PASS
DCS1800	RA130	700	1747.8	5;5;5;5	19.79	-400	400	PASS
DCS1800	RA130	885	1784.8	5;5;5;5	21.92	-400	400	PASS
DCS1800	HT100	512	1710.2	5;5;5;5	20.24	-350	350	PASS
DCS1800	HT100	700	1747.8	5;5;5;5	18.08	-350	350	PASS
DCS1800	HT100	885	1784.8	5;5;5;5	18.79	-350	350	PASS
DCS1800	TU50	512	1710.2	5;5;5;5	15.72	-260	260	PASS
DCS1800	TU50	700	1747.8	5;5;5;5	15.17	-260	260	PASS
DCS1800	TU50	885	1784.8	5;5;5;5	19.37	-260	260	PASS
DCS1800	TU1_5	512	1710.2	5;5;5;5	17.89	-320	320	PASS
DCS1800	TU1_5	700	1747.8	5;5;5;5	13.56	-320	320	PASS
DCS1800	TU1_5	885	1784.8	5;5;5;5	21.08	-320	320	PASS


GSM900 Channel=124 Gamma=6;6;6 HT100.png

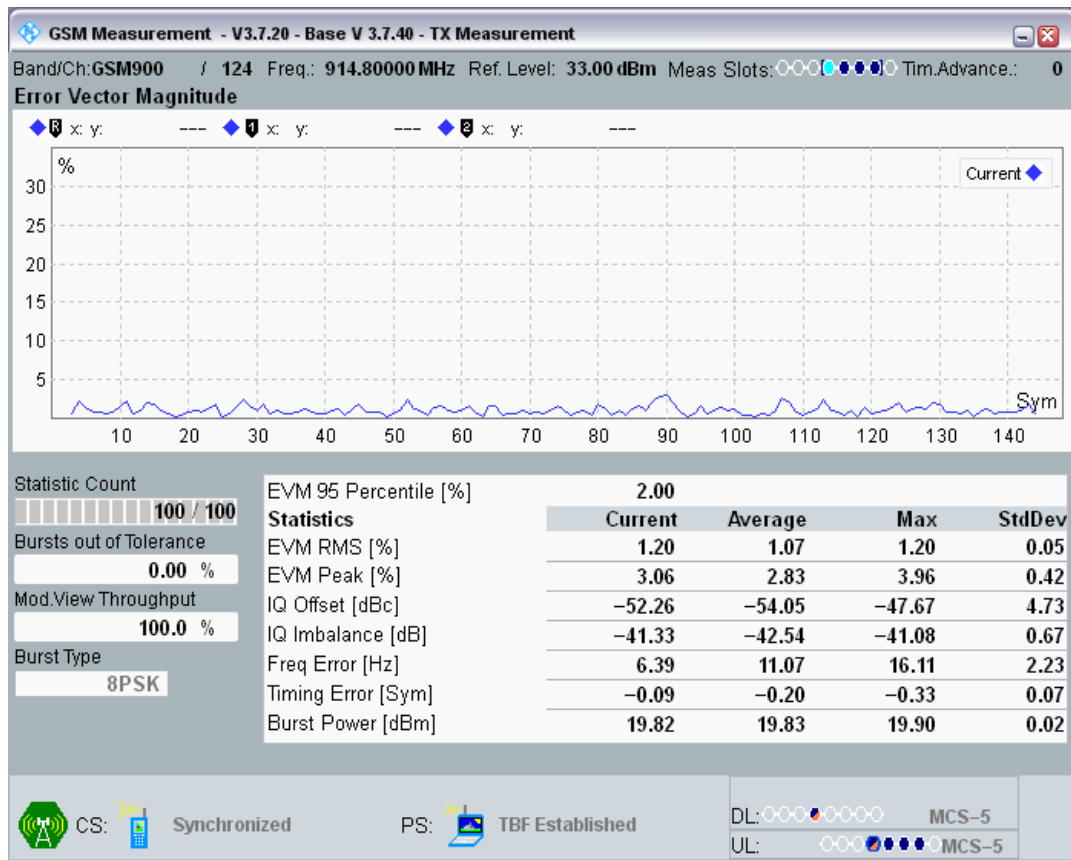


GSM900 Channel=124 Gamma=6;6;6 RA250.png

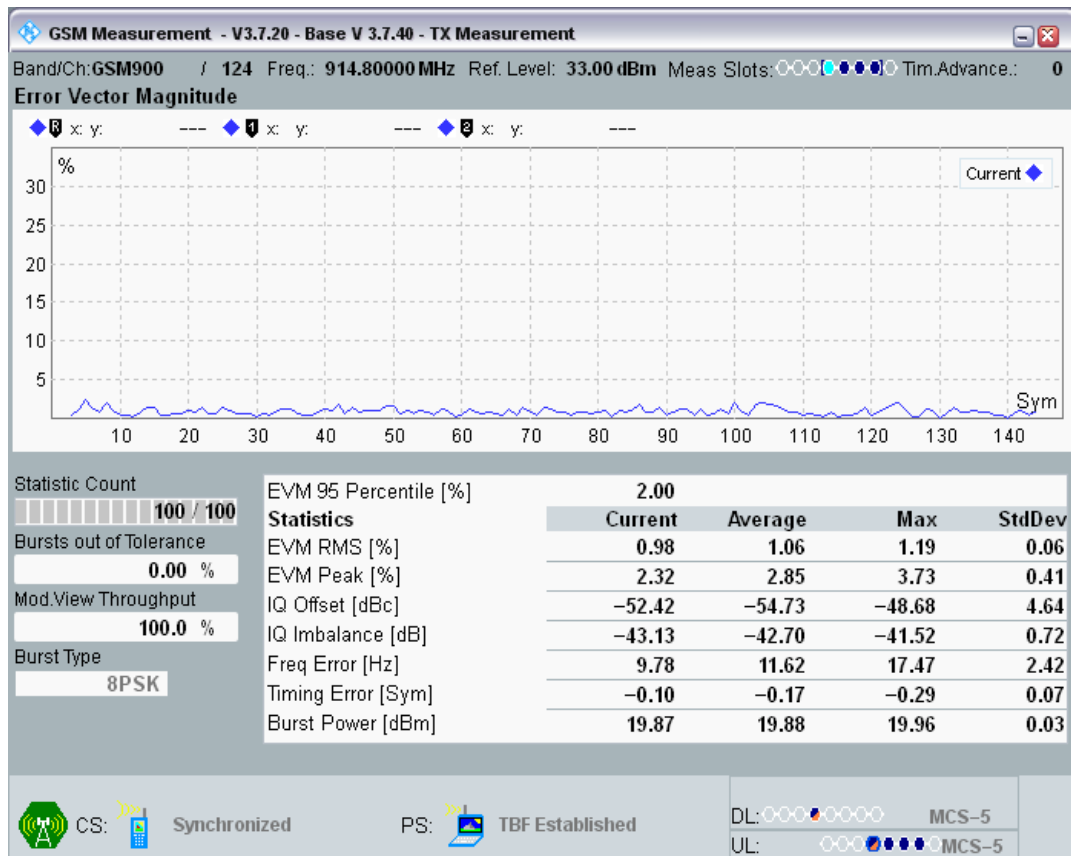


GSM900 Channel=124 Gamma=6;6;6 TU3.png

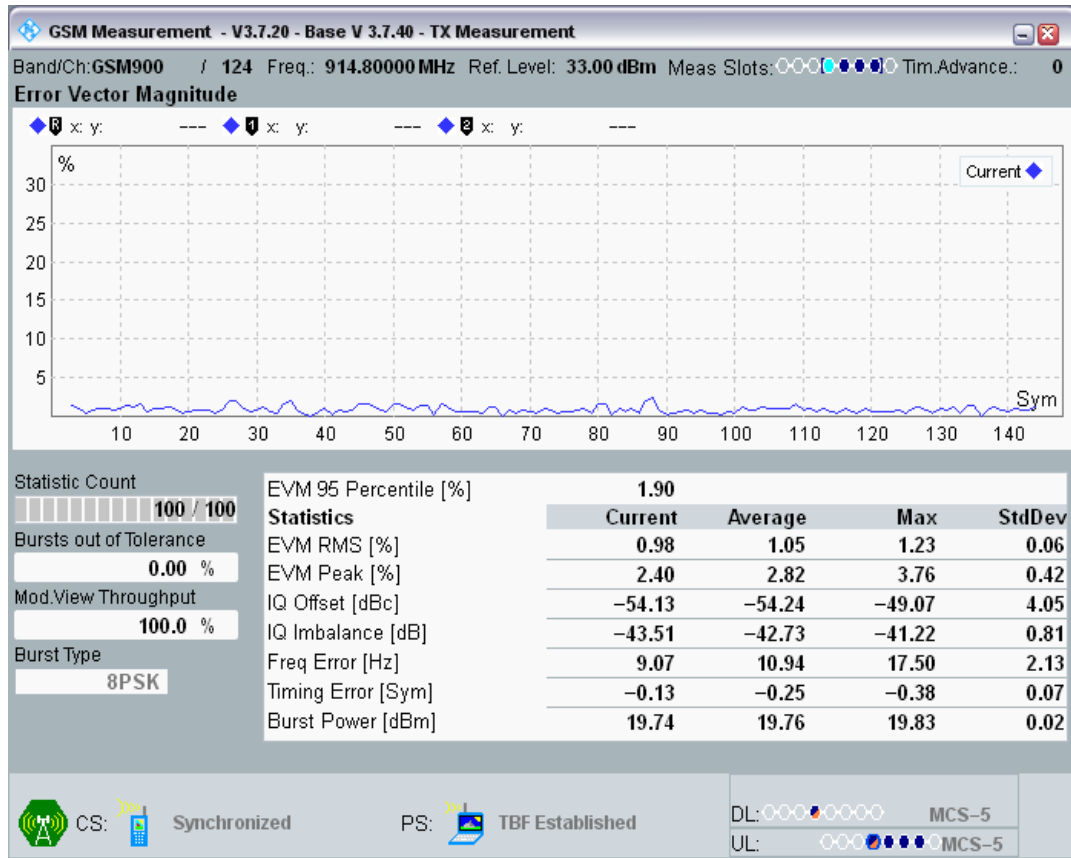


GSM900 Channel=124 Gamma=6;6;6 TU50.png

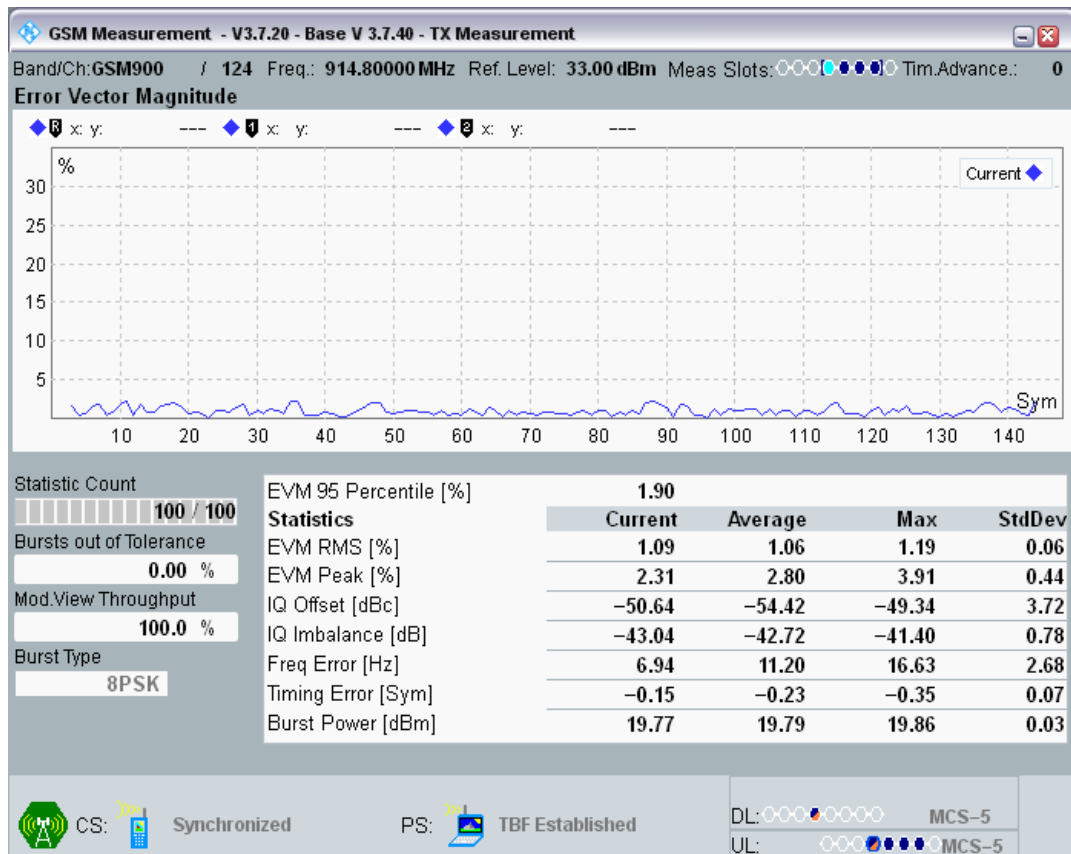


GSM900 Channel=60 Gamma=6;6;6;6 HT100.png

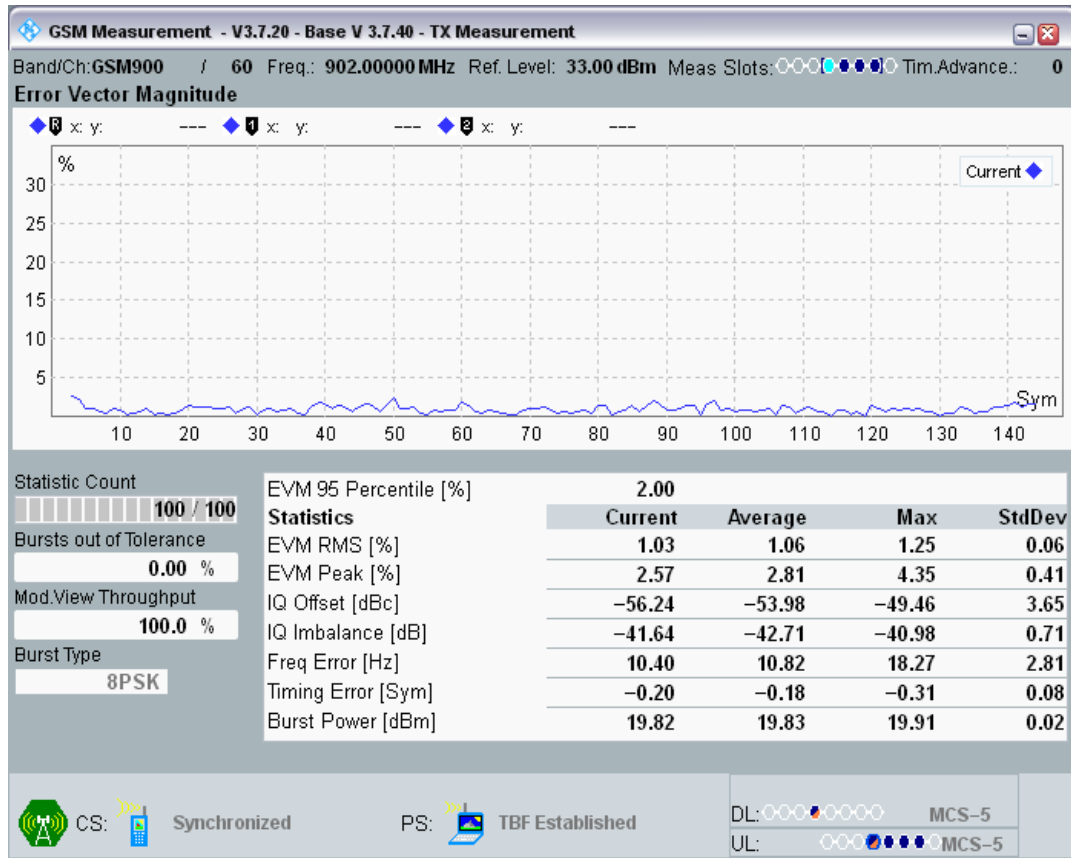


GSM900 Channel=60 Gamma=6;6;6;6 RA250.png

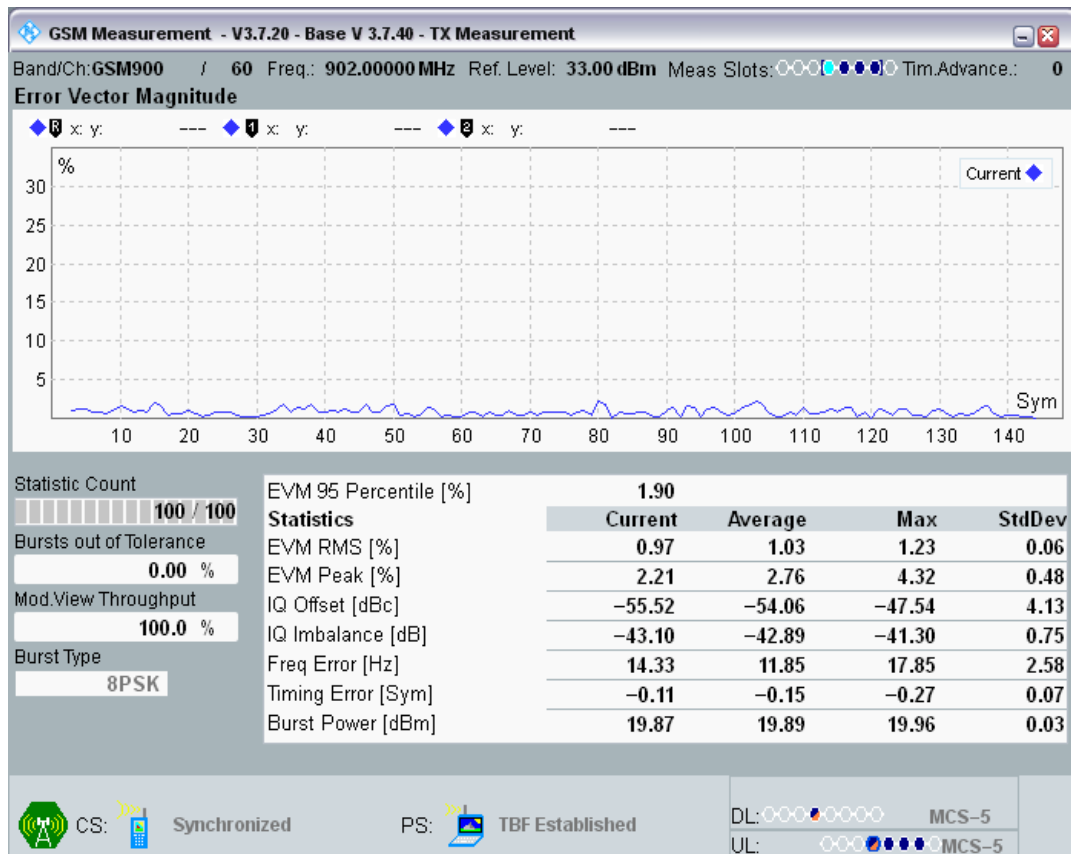


GSM900 Channel=60 Gamma=6;6;6 TU3.png

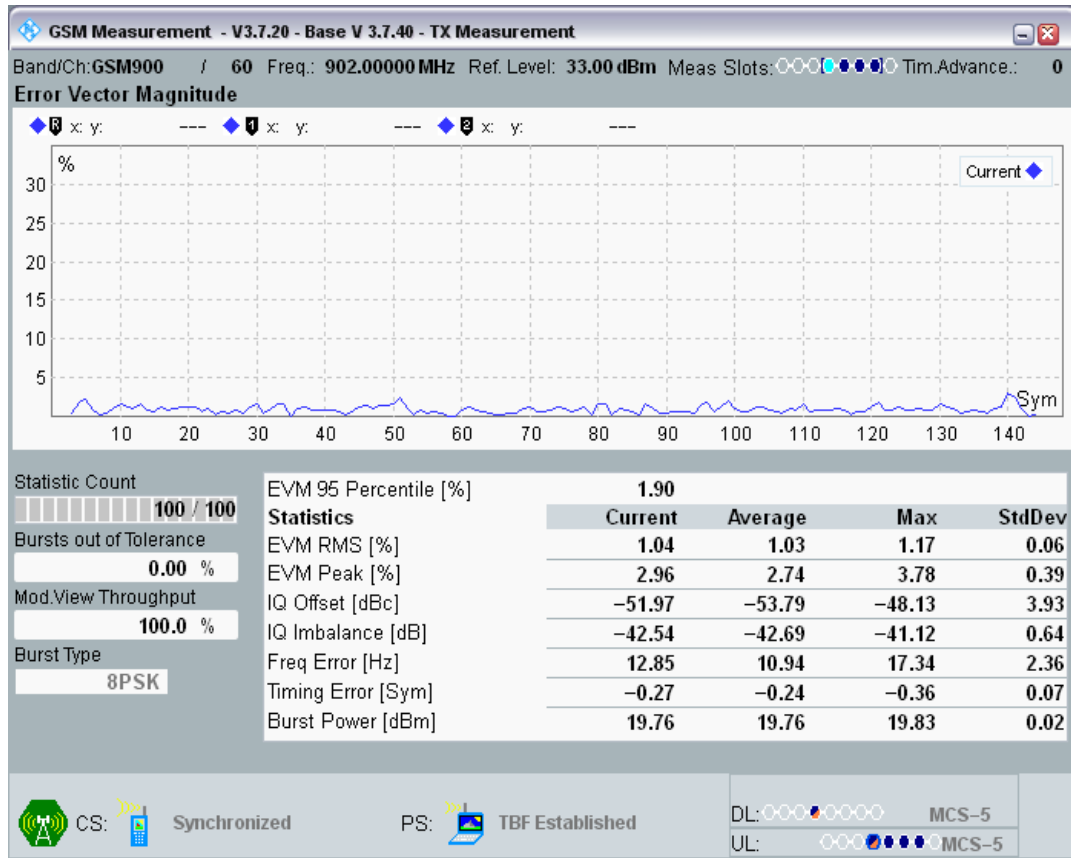


GSM900 Channel=60 Gamma=6;6;6 TU50.png

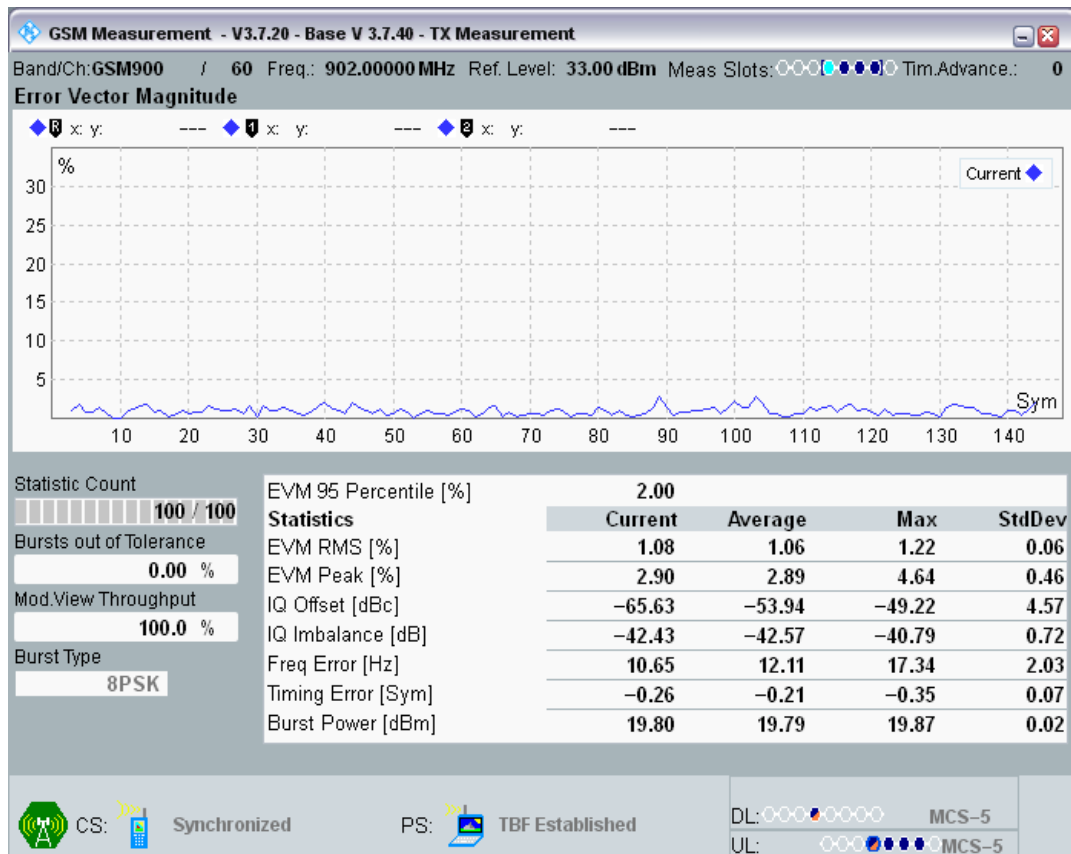


GSM900 Channel=975 Gamma=6;6;6;6 HT100.png

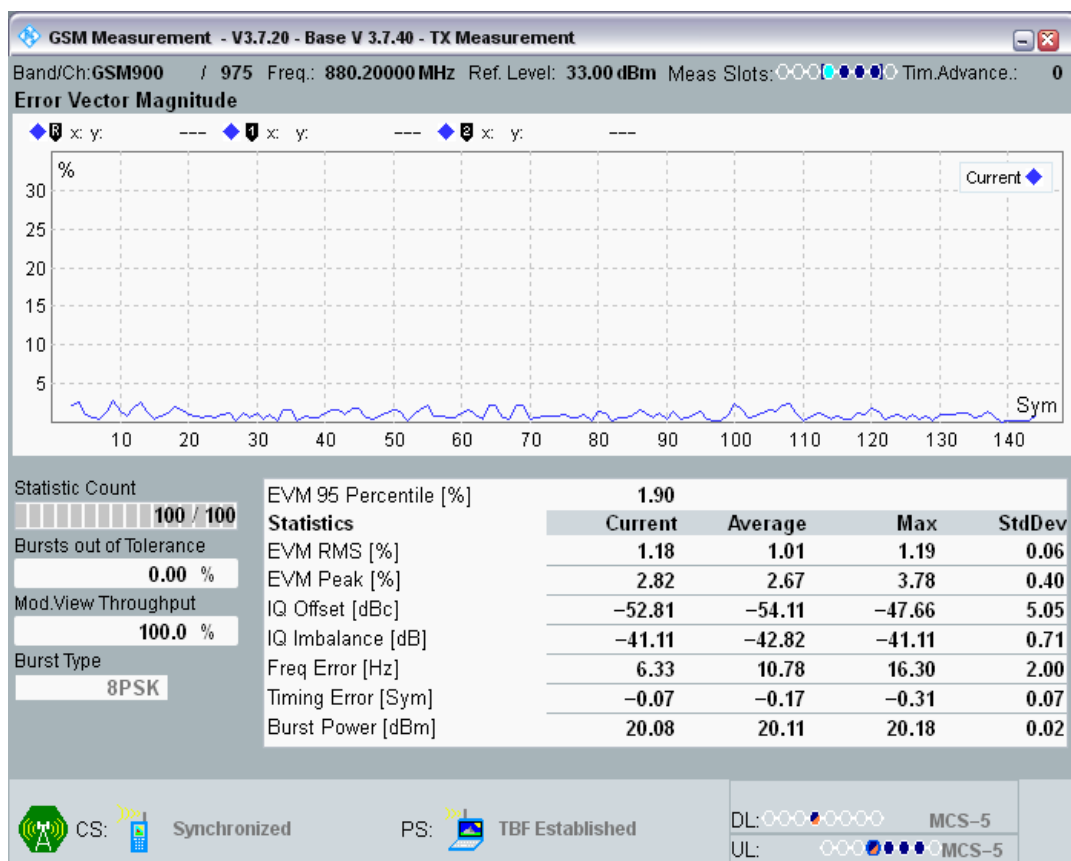


GSM900 Channel=975 Gamma=6;6;6;6 RA250.png

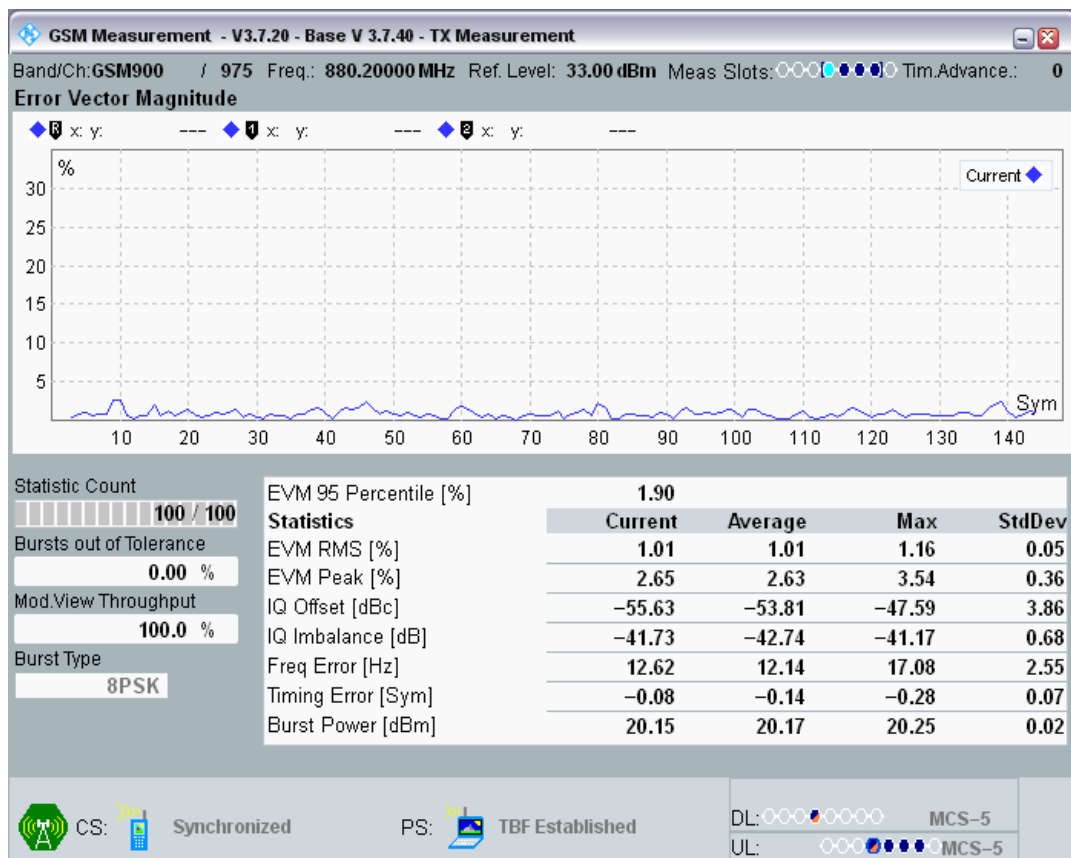


GSM900 Channel=975 Gamma=6;6;6 TU3.png

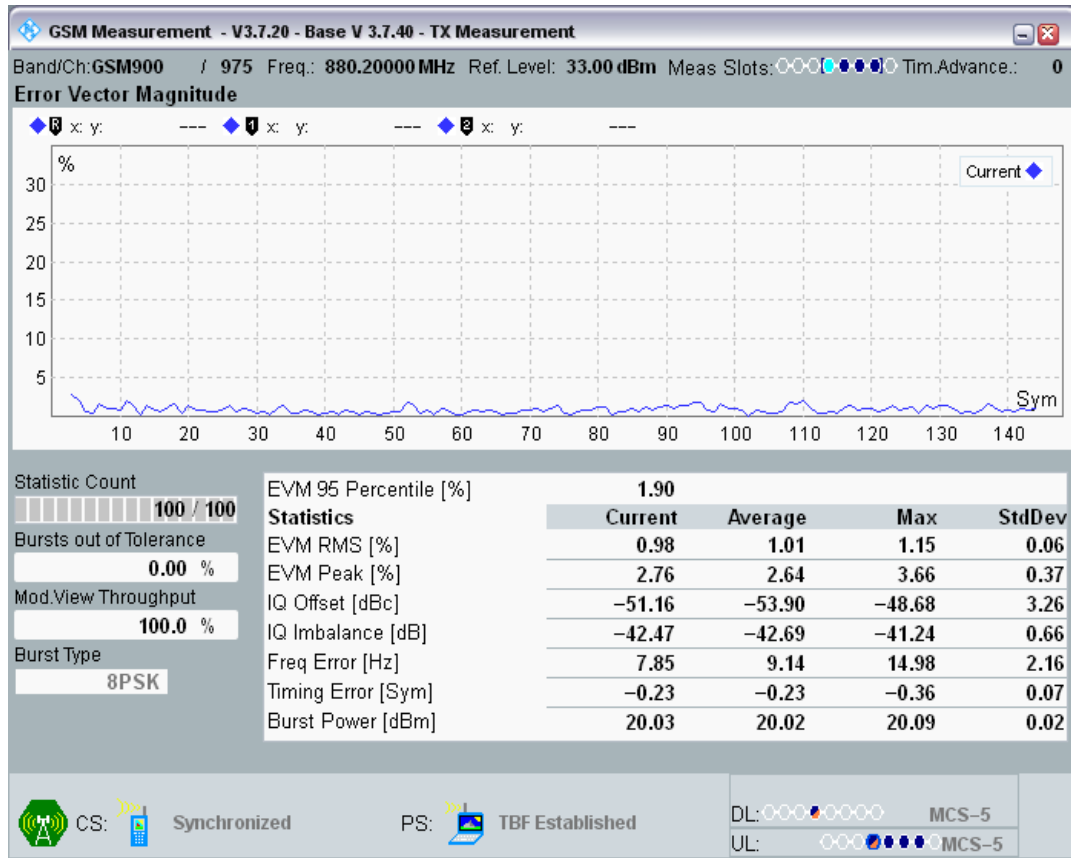


GSM900 Channel=975 Gamma=6;6;6 TU50.png

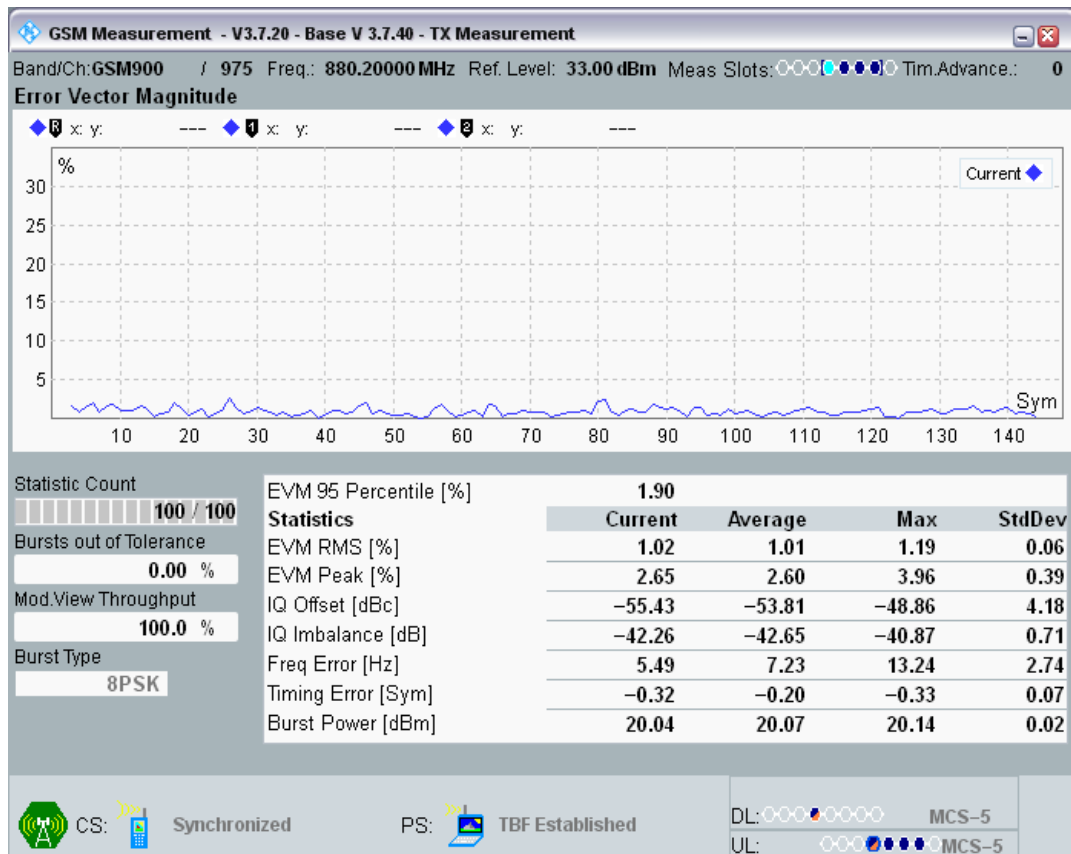


DCS1800 Channel=512 Gamma=5;5;5;5 HT100.png

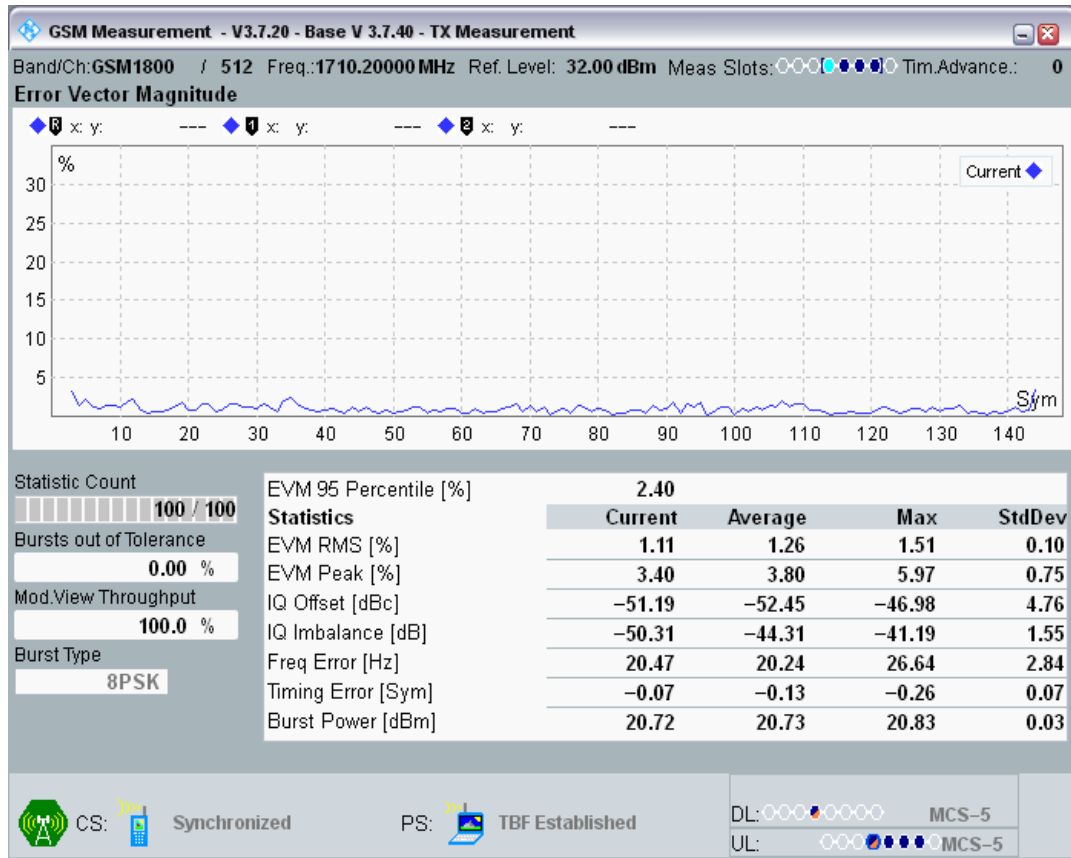


DCS1800 Channel=512 Gamma=5;5;5;5 RA130.png

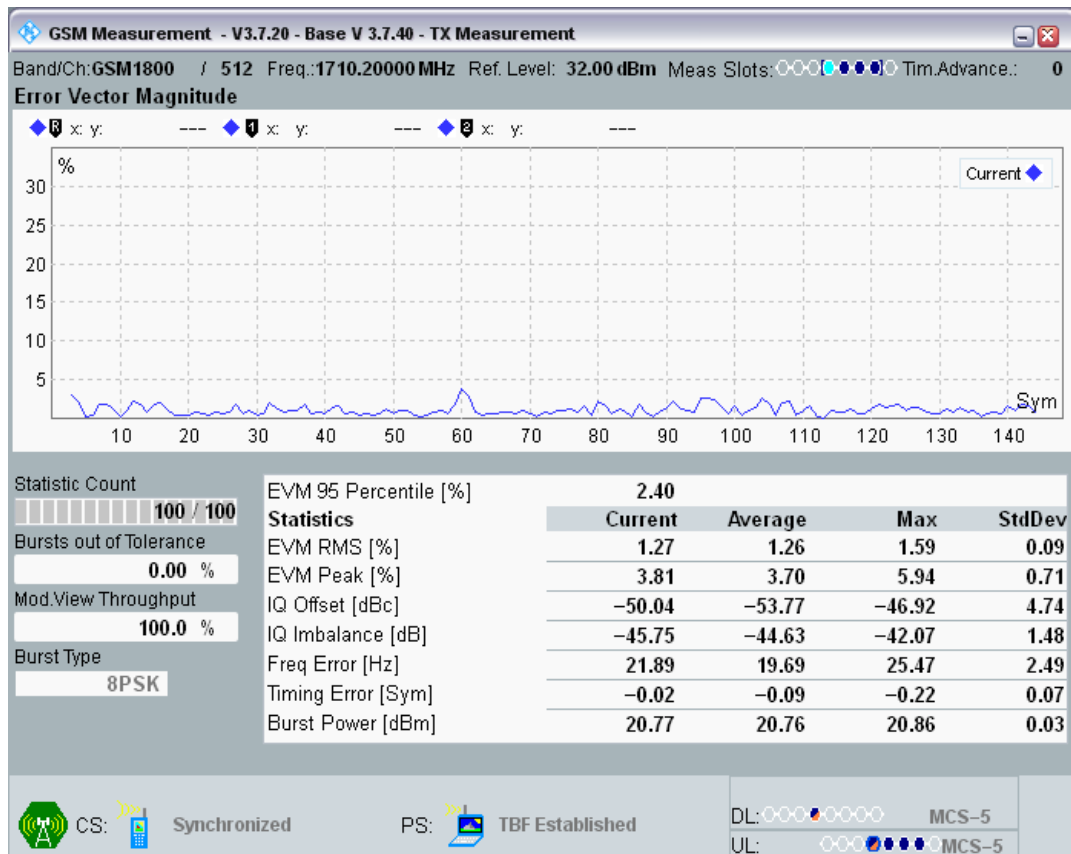


DCS1800 Channel=512 Gamma=5;5;5;5 TU1_5.png

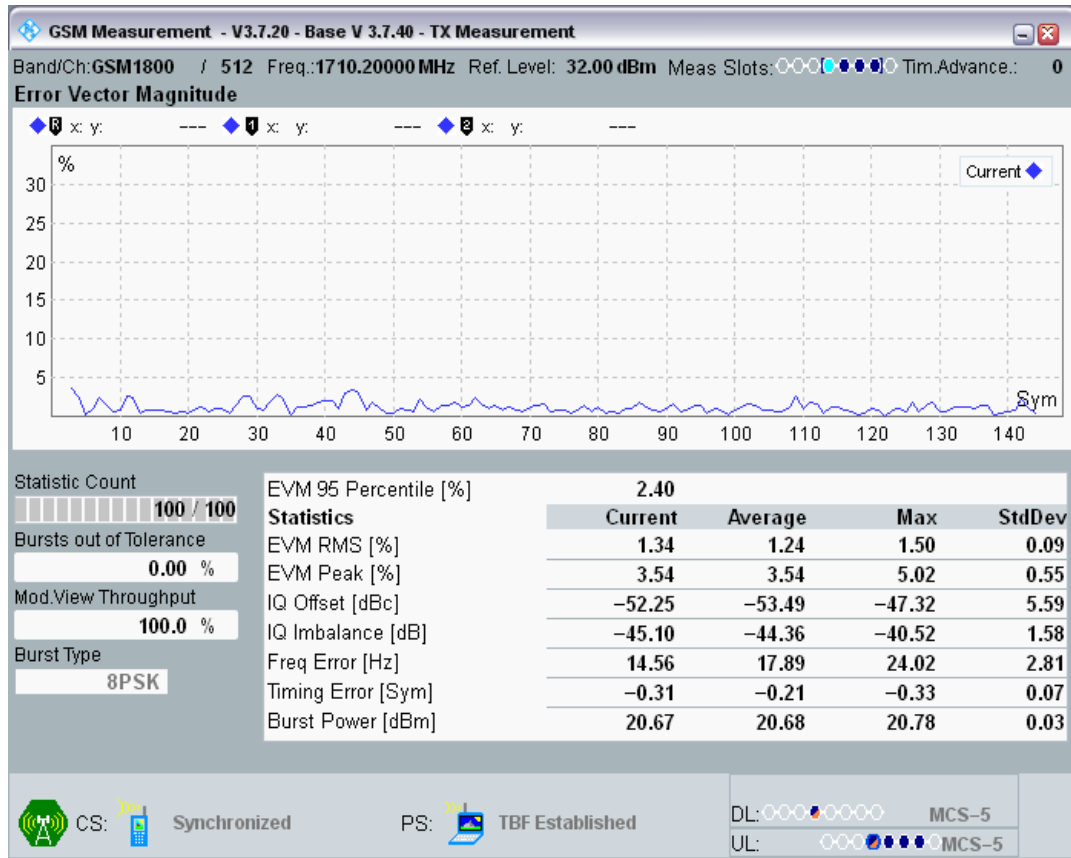


DCS1800 Channel=512 Gamma=5;5;5;5 TU50.png

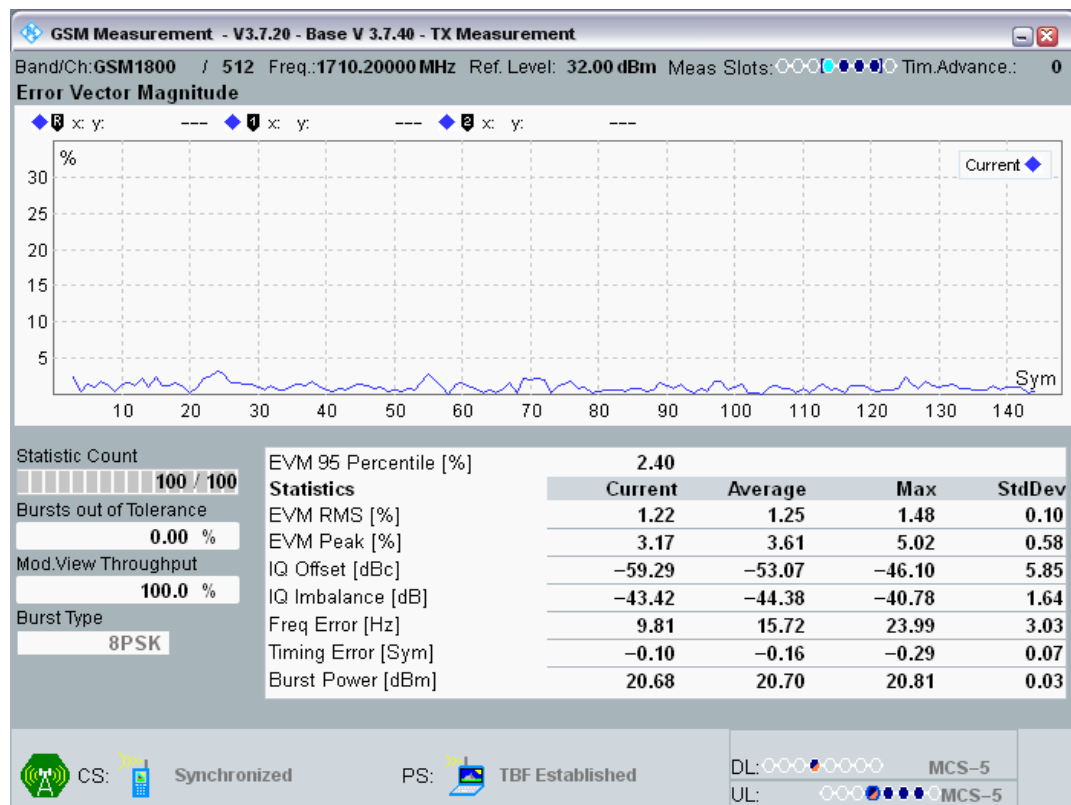


DCS1800 Channel=700 Gamma=5;5;5;5 HT100.png

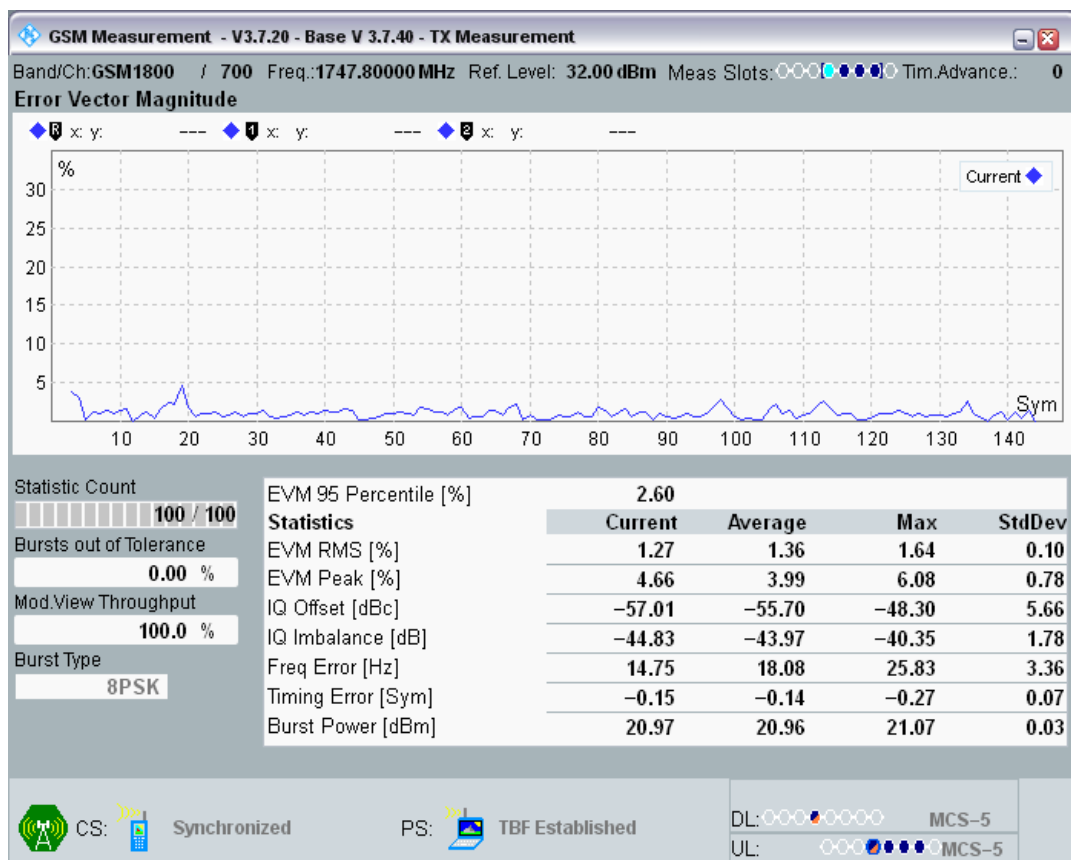


DCS1800 Channel=700 Gamma=5;5;5;5 RA130.png

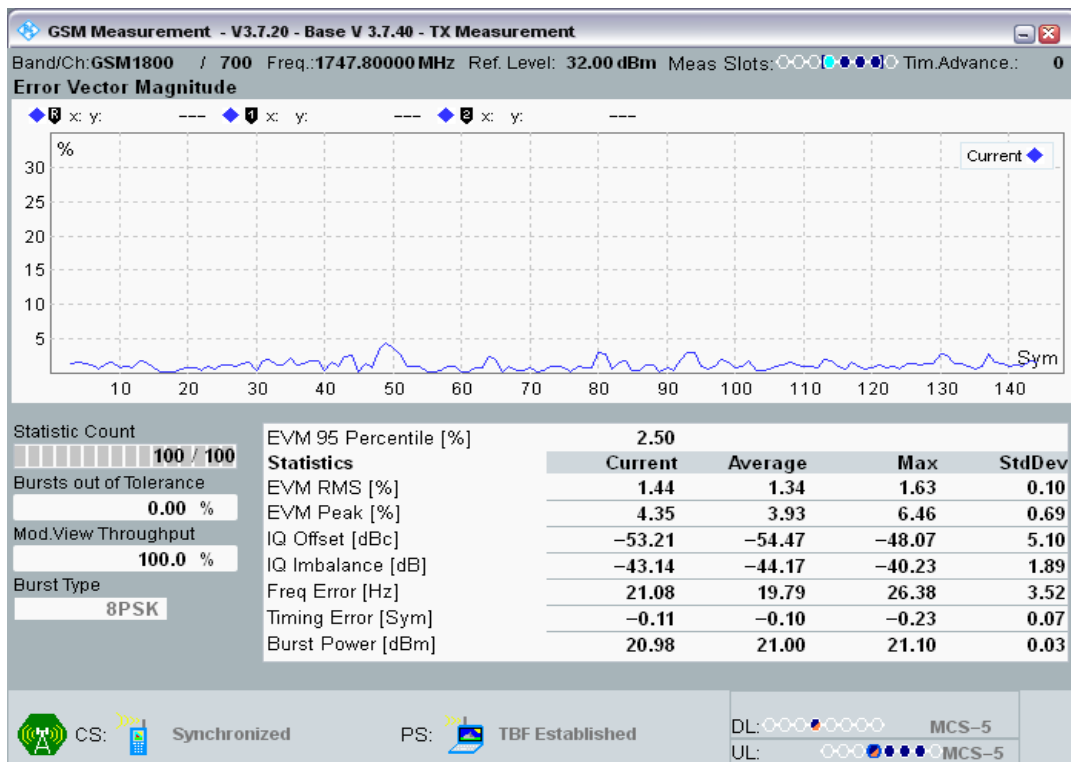


DCS1800 Channel=700 Gamma=5;5;5;5 TU1_5.png

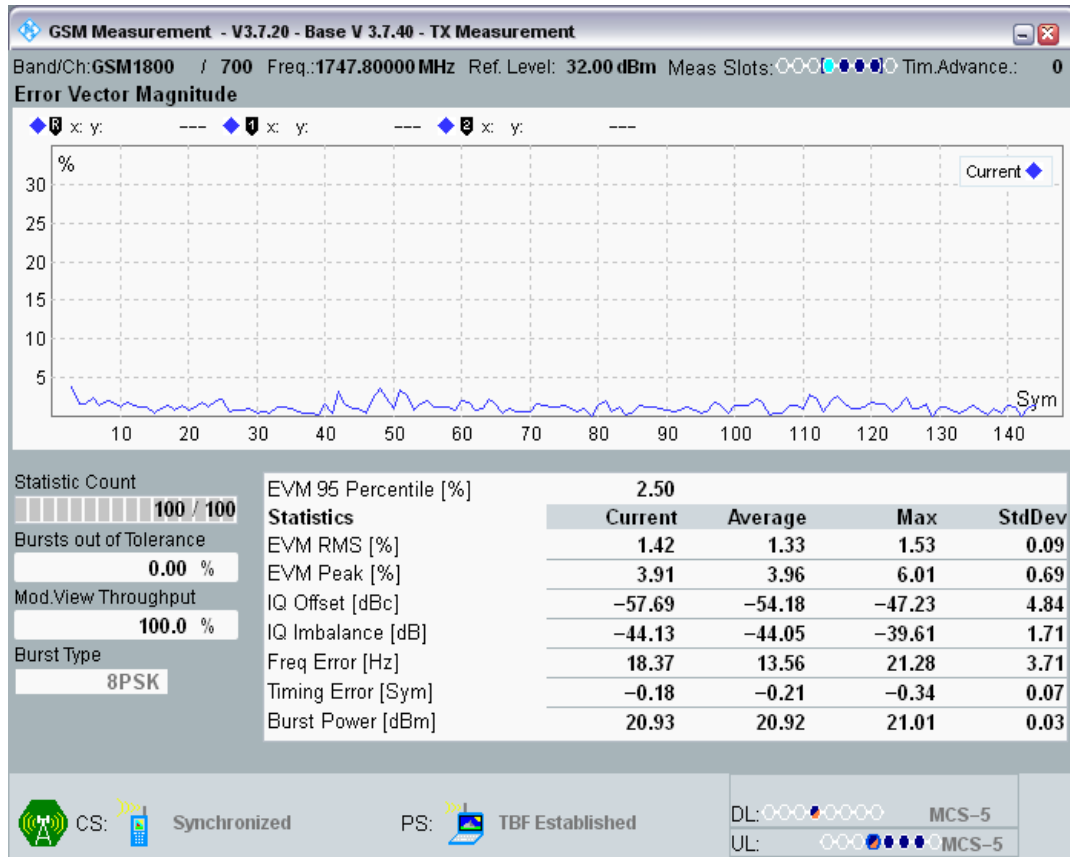


DCS1800 Channel=700 Gamma=5;5;5;5 TU50.png

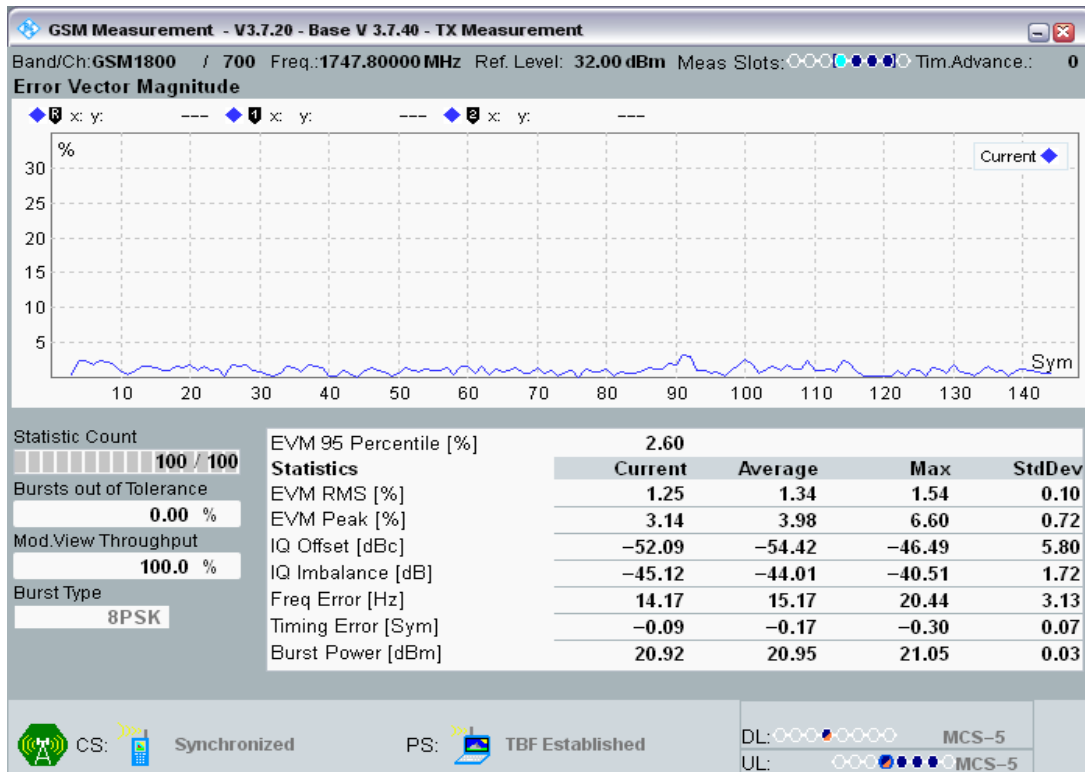


DCS1800 Channel=885 Gamma=5;5;5;5 HT100.png

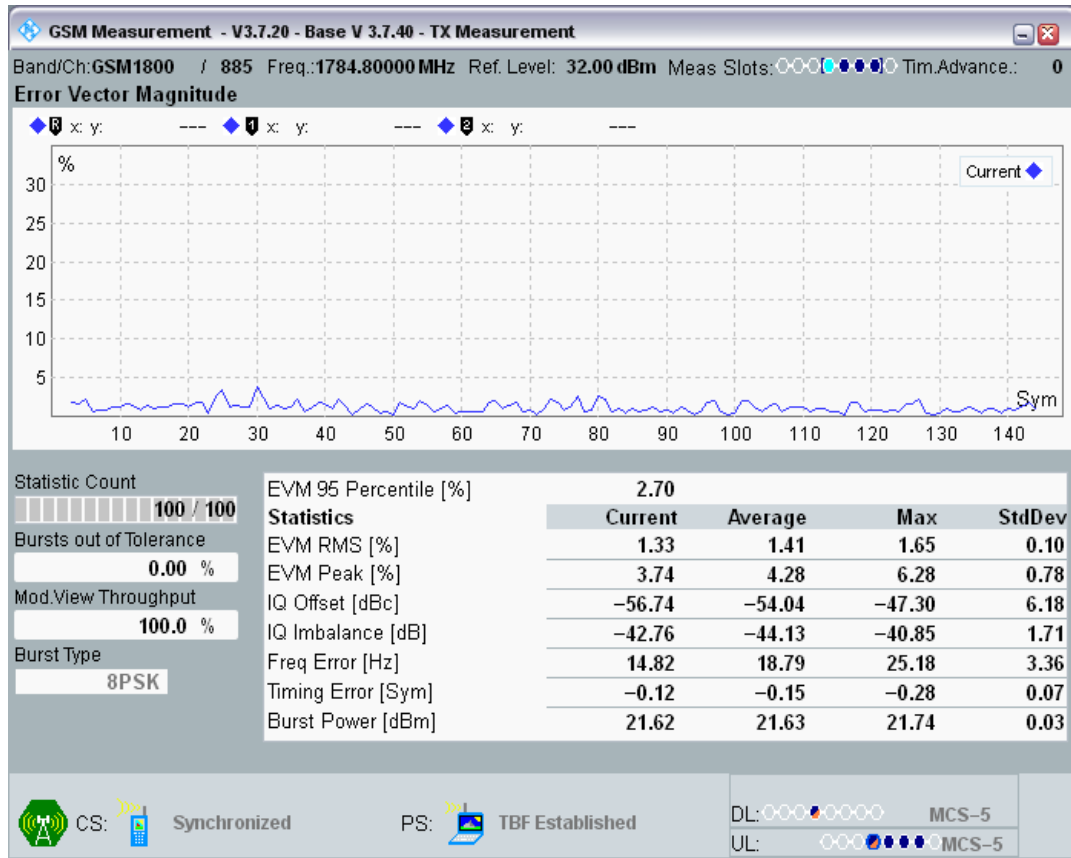


DCS1800 Channel=885 Gamma=5;5;5;5 RA130.png

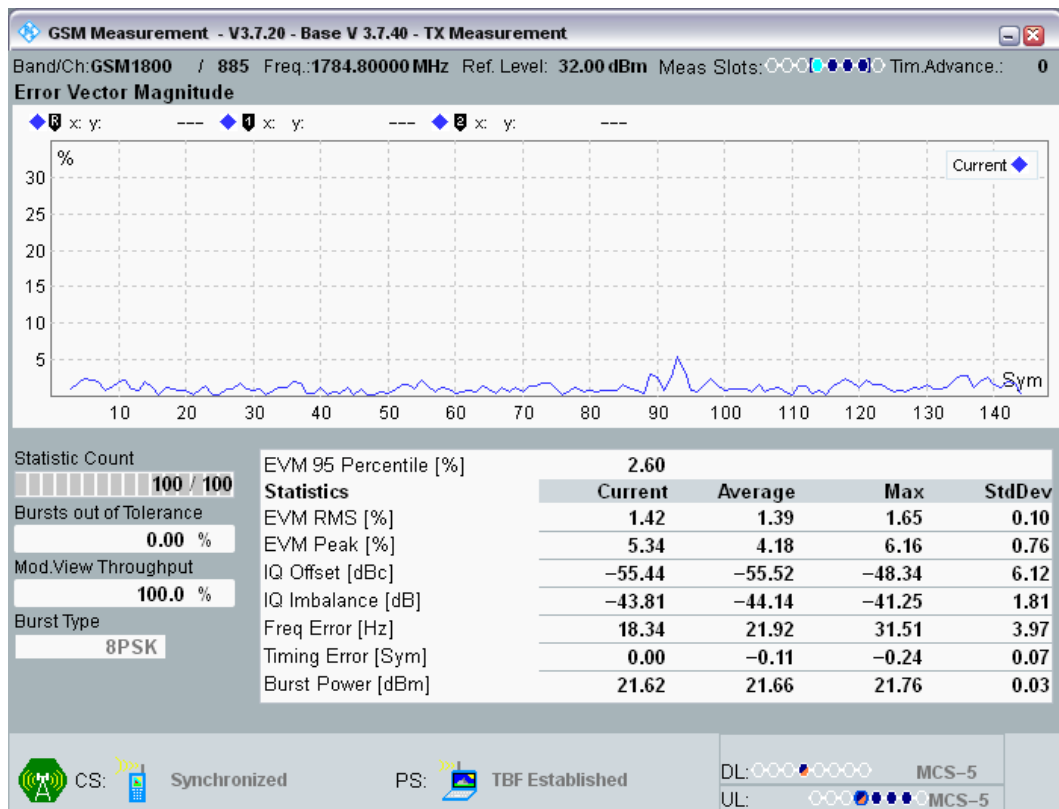

DCS1800 Channel=885 Gamma=5;5;5;5 TU1_5.png

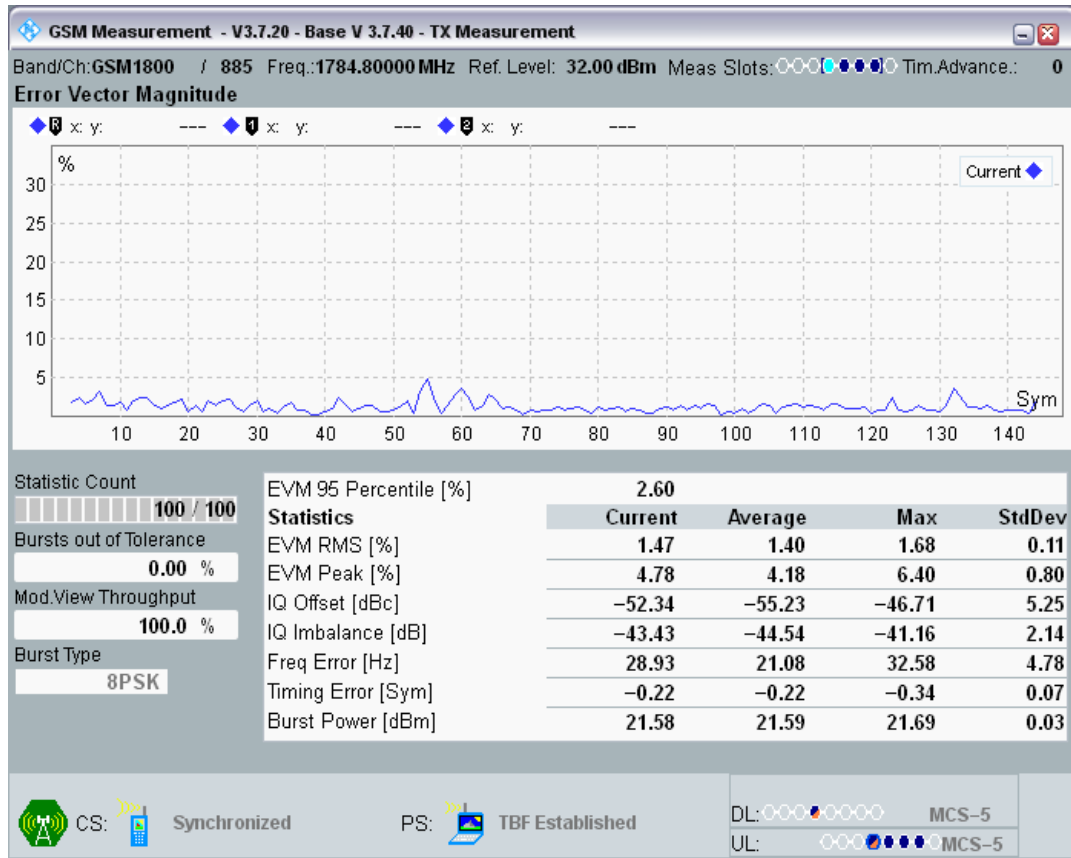

DCS1800 Channel=885 Gamma=5;5;5;5 TU50.png

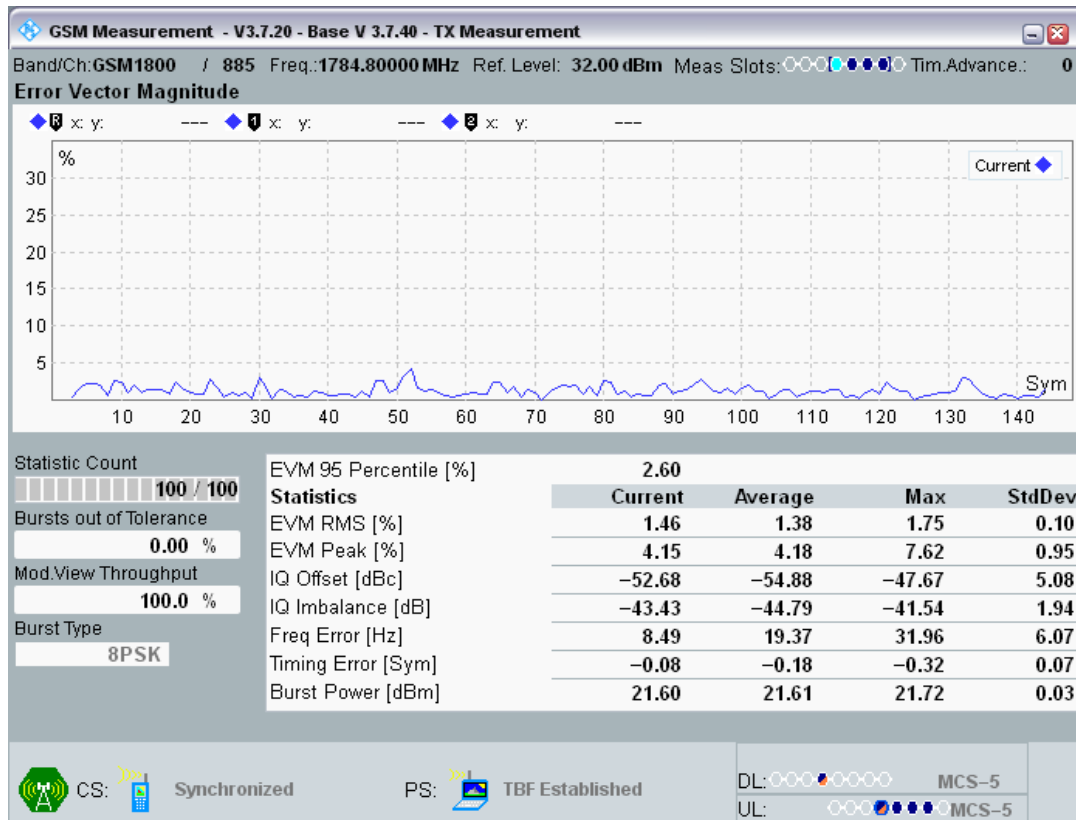

Clause 4.2.28 EGPRS Transmitter output power

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	19.84348	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	20.07147	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	19.86588	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	19.79797	18	27	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	22.4664	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	21.62122	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	22.17642	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	22.53058	18	27	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	22.05923	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	22.23575	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	22.04636	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	22.58804	18	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	20.46326	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	20.1235	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	19.73087	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	20.64249	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	18.54916	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	18.46268	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	18.68964	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	18.18155	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	16.47772	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	16.27411	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	16.58179	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	16.53781	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	14.61362	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	14.59015	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot3	13.99374	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot4	14.66876	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	12.98489	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	12.75995	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	12.49631	10	16	PASS

GSM900	975	880.2	13;13;13;13	Power @ slot4	12.51636	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot1	11.04599	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot2	10.7294	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot3	10.05722	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot4	10.57779	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	8.202393	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	8.562775	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	8.01944	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	8.492371	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	6.545013	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	6.059082	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	6.293549	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	6.658905	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	4.502502	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot2	4.762634	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	4.753204	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	4.470367	0	10	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	20.27954	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	20.1069	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	19.8981	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	19.62512	18	27	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	21.75681	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	21.12418	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	21.98309	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	21.94949	18	27	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	21.40115	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	22.2381	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	22.12103	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	21.99564	18	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	19.83313	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	20.02948	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	19.65472	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	20.26642	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS

GSM900	60	902	10;10;10;10	Power @ slot1	17.93414	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot2	18.40671	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot3	17.90417	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot4	18.35043	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power @ slot1	16.47549	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot2	16.62079	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot3	15.71838	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot4	16.52142	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power @ slot1	14.18134	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot2	14.4032	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot3	14.05984	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot4	14.1572	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power @ slot1	12.03922	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot2	12.42767	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot3	11.75815	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot4	12.39508	10	16	PASS
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	9.859955	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	10.17334	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	10.42587	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot4	10.33087	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	8.108429	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	8.531891	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	8.304871	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	7.839722	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	5.997162	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot2	6.487732	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot3	6.328979	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	5.674713	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	4.381287	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	4.535126	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	3.847809	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	4.670685	0	10	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	19.84222	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	20.08414	18	27	PASS

GSM900	124	914.8	6;6;6;6	Power @ slot3	19.76901	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	19.86588	18	27	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	21.52429	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	22.10736	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	21.79449	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	21.55011	18	27	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	22.10263	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	21.88101	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot3	21.83957	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	21.96704	18	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	20.1214	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	19.9921	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	19.82736	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	19.61102	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	18.27924	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	17.89401	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	18.18311	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	18.21759	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	16.08386	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	16.11469	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	16.54333	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	16.22198	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	13.98941	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	14.07742	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	14.01669	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	14.57034	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	12.56458	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	12.25894	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	12.47797	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	12.53561	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	10.39133	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	10.42944	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	10.29321	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	10.70258	6	16	PASS

GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	8.161865	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	8.074738	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	8.019257	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	8.216797	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	5.878448	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	6.32019	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	6.229401	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	6.149872	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	4.097229	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	3.906036	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	3.832489	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	3.778351	0	10	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	20.3801	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	20.93643	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	20.76303	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	20.21945	16	26	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	20.55258	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	20.73096	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	20.7515	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	20.76361	17	26	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	20.75989	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	20.20215	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	20.66479	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot4	20.90414	17	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	20.32678	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	19.56775	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	20.10318	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	19.74982	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	18.12506	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	17.66217	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	17.85651	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	17.58698	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	15.76733	13	19	PASS

DCS1800	512	1710.2	10;10;10;10	Power @ slot2	15.42639	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	15.61847	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	15.8353	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	13.64618	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	13.6131	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	13.21817	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	13.5686	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	12.13647	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	11.6879	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot3	11.78061	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	11.93497	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	9.941376	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	10.05038	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	9.856567	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	10.23706	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	7.887329	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	7.800659	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	7.626312	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	7.910706	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	5.969818	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot2	5.935303	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot3	6.120819	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot4	5.888214	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT	-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot1	4.264069	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot2	3.99176	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	3.714905	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	3.698578	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	1.634521	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot2	1.493896	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot3	1.788544	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	1.48114	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	-0.264129 6	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	-0.015045	-5	5	PASS


					17			
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	0.05865479	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot4	-0.9085083	-5	5	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	20.59042	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	20.99817	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	21.1142	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	21.08752	16	26	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot1	21.07208	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	20.55887	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	21.09152	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	20.80481	17	26	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	20.97067	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	21.1221	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	20.62708	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	20.62384	17	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	20.17828	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot2	19.61804	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot3	20.14038	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	20.21735	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	18.37555	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	17.97348	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	18.09601	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	18.25018	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	16.02582	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	16.03354	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	16.40366	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	15.86288	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	13.66391	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	13.80862	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	14.08459	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	14.65128	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	12.0174	8	16	PASS

DCS1800	700	1747.8	12;12;12;12	Power @ slot2	11.93088	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	12.72607	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	11.98492	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.11874	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	9.454193	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.10416	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	10.32806	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	7.901764	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.183289	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	7.912903	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	7.769806	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	6.397797	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	5.992554	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot3	5.8815	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	6.34021	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	4.06778	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	4.34613	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	4.06366	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	4.59375	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	1.984375	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	1.78714	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	1.83905	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	2.265564	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.1609802	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	-0.174896 2	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.3596191	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.0962829 6	-5	5	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	21.0643	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	21.51825	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	21.09155	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	21.61691	16	26	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	22.07507	17	26	PASS


DCS1800	885	1784.8	6;6;6;6	Power @ slot2	21.58597	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	21.56223	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	21.35815	17	26	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	21.37338	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	21.55325	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	21.33487	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	20.94788	17	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	21.07623	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	20.91809	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	20.3465	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.17233	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	18.67487	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	18.56085	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	18.92957	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	18.81464	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	16.87701	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	16.47198	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	16.47482	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	16.70856	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	14.69907	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	14.88428	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	14.8511	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	14.66046	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	12.85345	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	12.87921	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	12.98709	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	12.87775	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	10.58783	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	10.62381	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	10.55029	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	10.8067	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	8.826355	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	8.761475	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	8.612	4	12	PASS

DCS1800	885	1784.8	14;14;14;14	Power @ slot4	8.706696	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	6.616943	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	6.714966	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	6.317078	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	6.238739	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	4.992157	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	4.267273	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	4.535065	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	4.751526	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	2.625854	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	2.634674	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot3	2.843994	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot4	2.244965	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot1	0.5988464	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot2	1.521484	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot3	0.2731323	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot4	0.4039307	-5	5	PASS

GSM900 Channel=124 Gamma=17;17;17;17.png

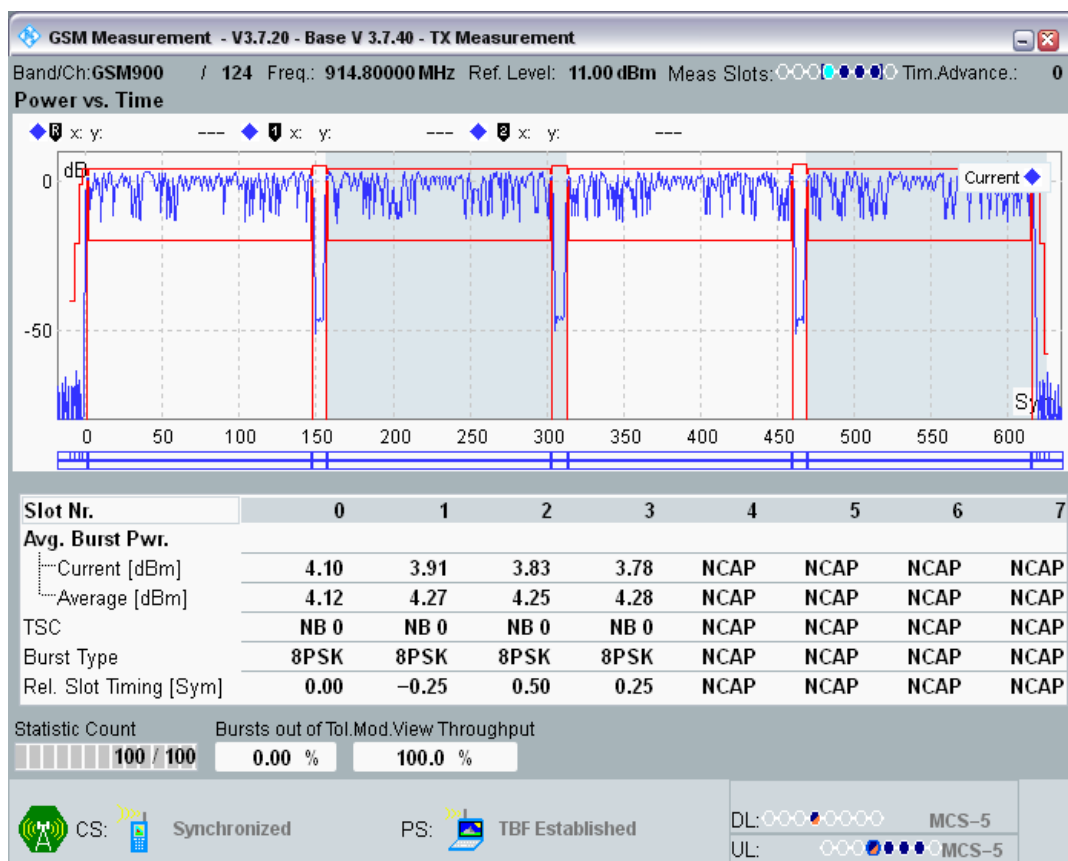


GSM900 Channel=124 Gamma=6;6;6;6.png

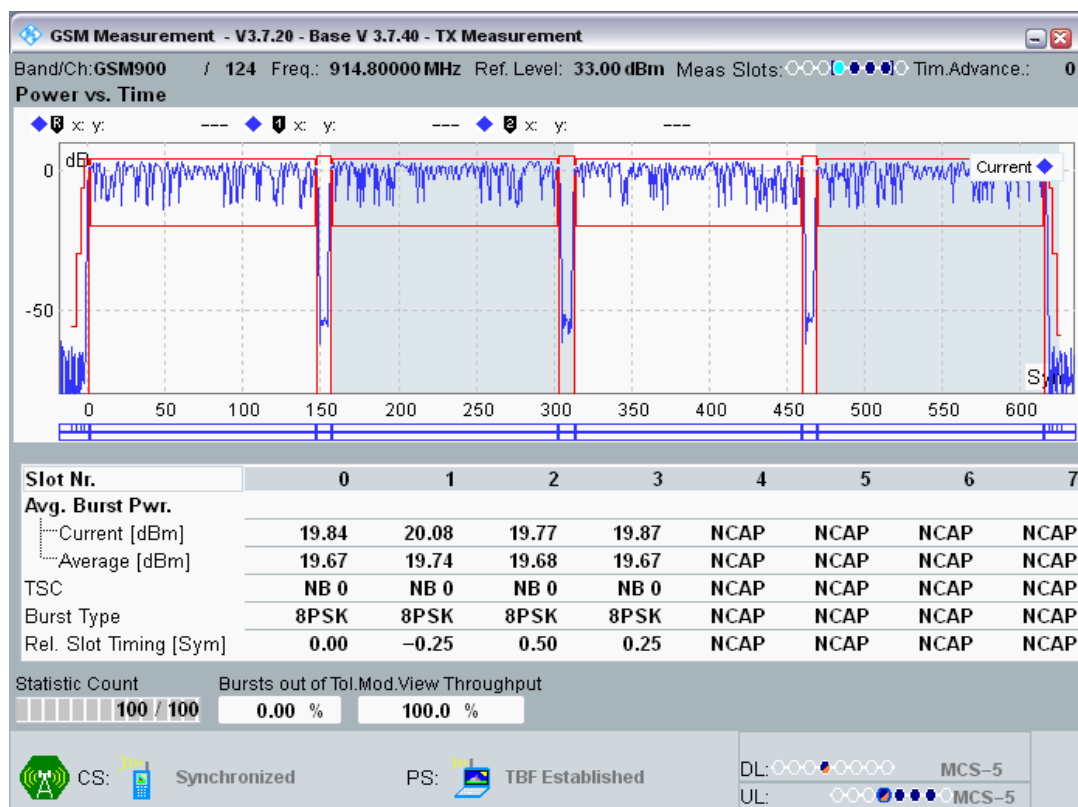

GSM900 Channel=60 Gamma=17;17;17;17.png




GSM900 Channel=60 Gamma=6;6;6;6.png

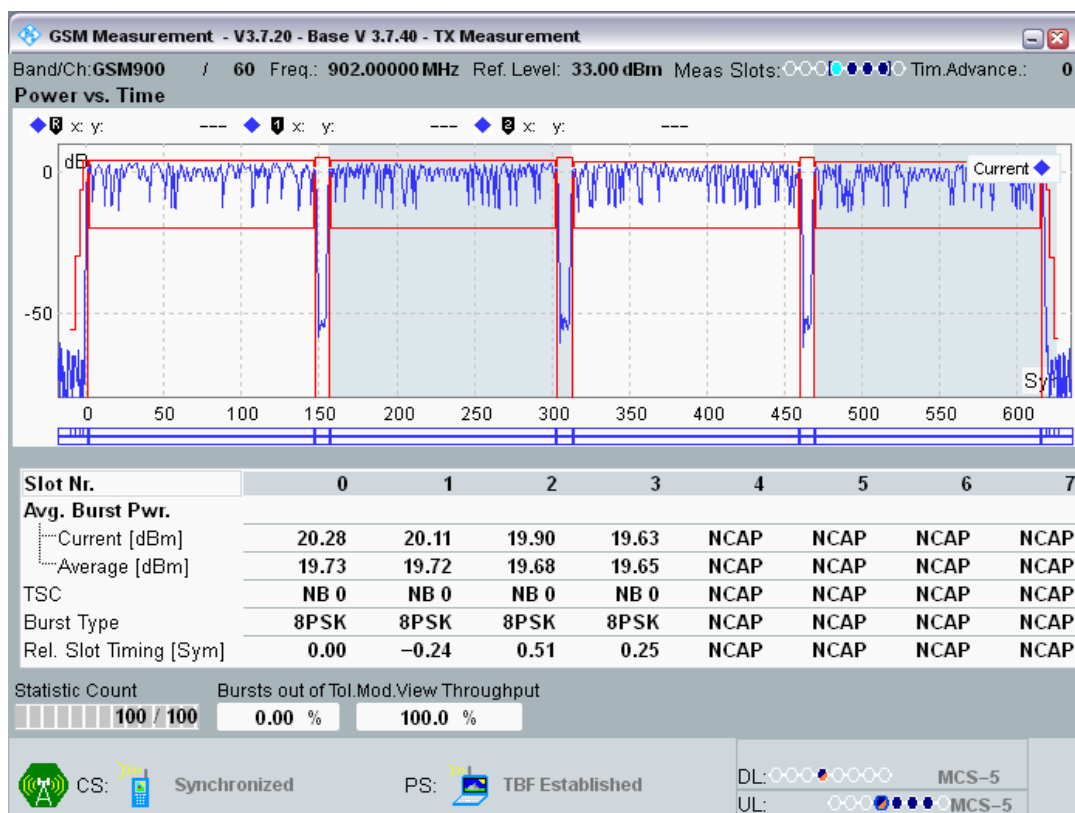


GSM900 Channel=975 Gamma=17;17;17;17.png




GSM900 Channel=975 Gamma=6;6;6;6.png

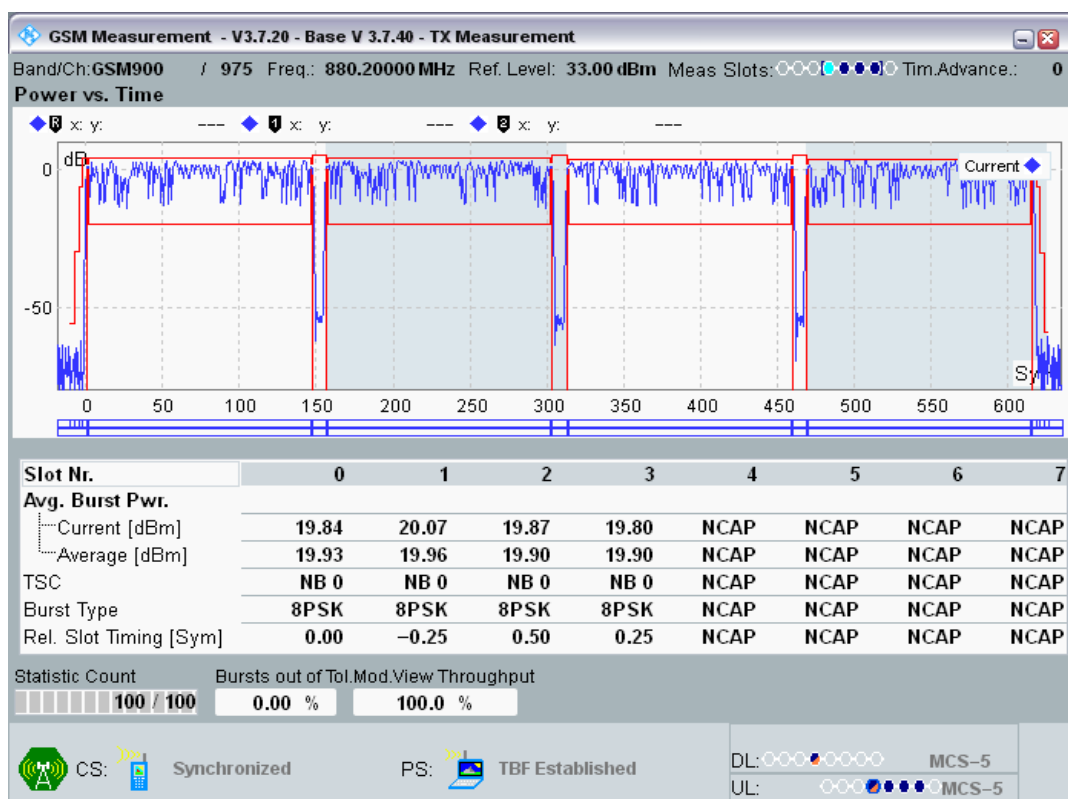


DCS1800 Channel=512 Gamma=18;18;18;18.png

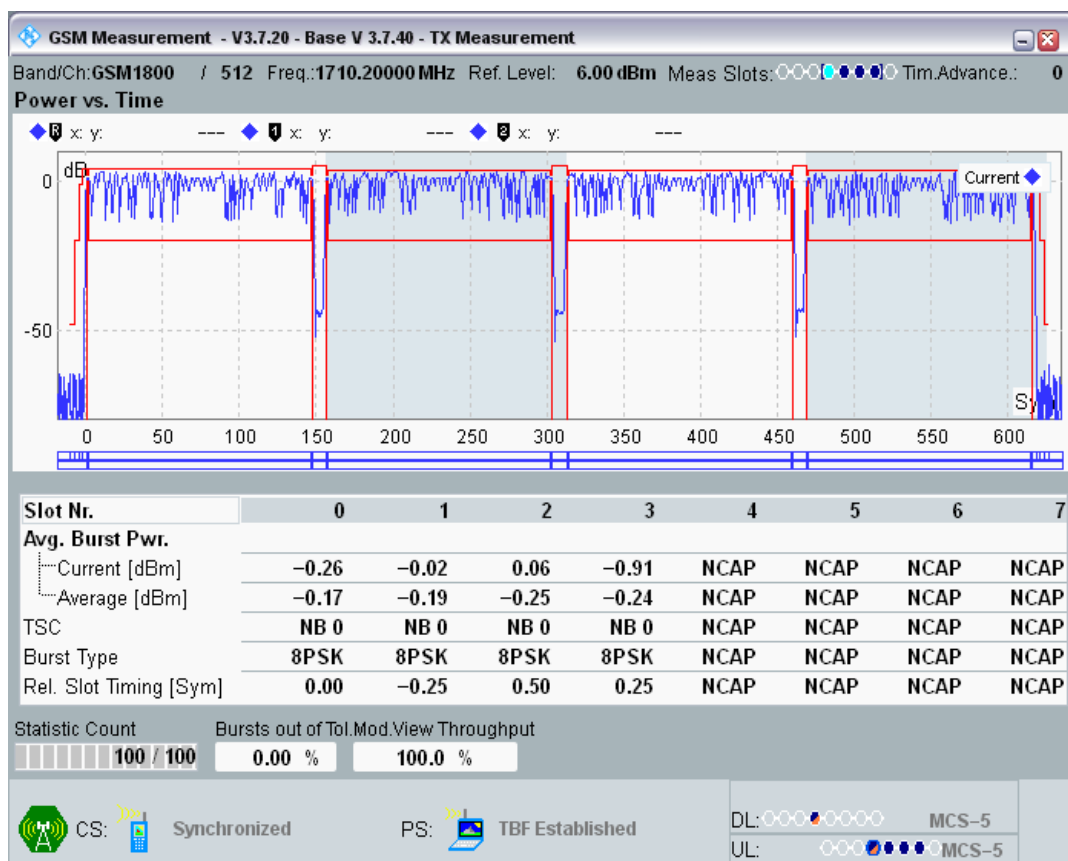


DCS1800 Channel=512 Gamma=5;5;5;5.png

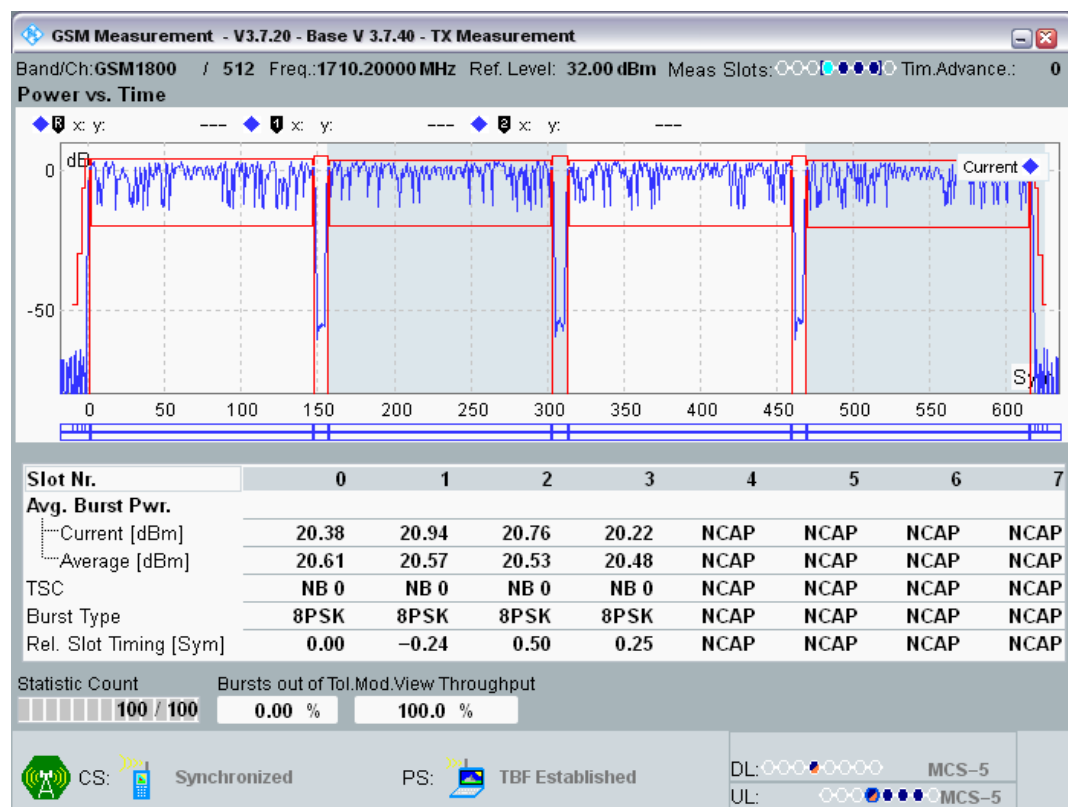

DCS1800 Channel=700 Gamma=18;18;18;18.png

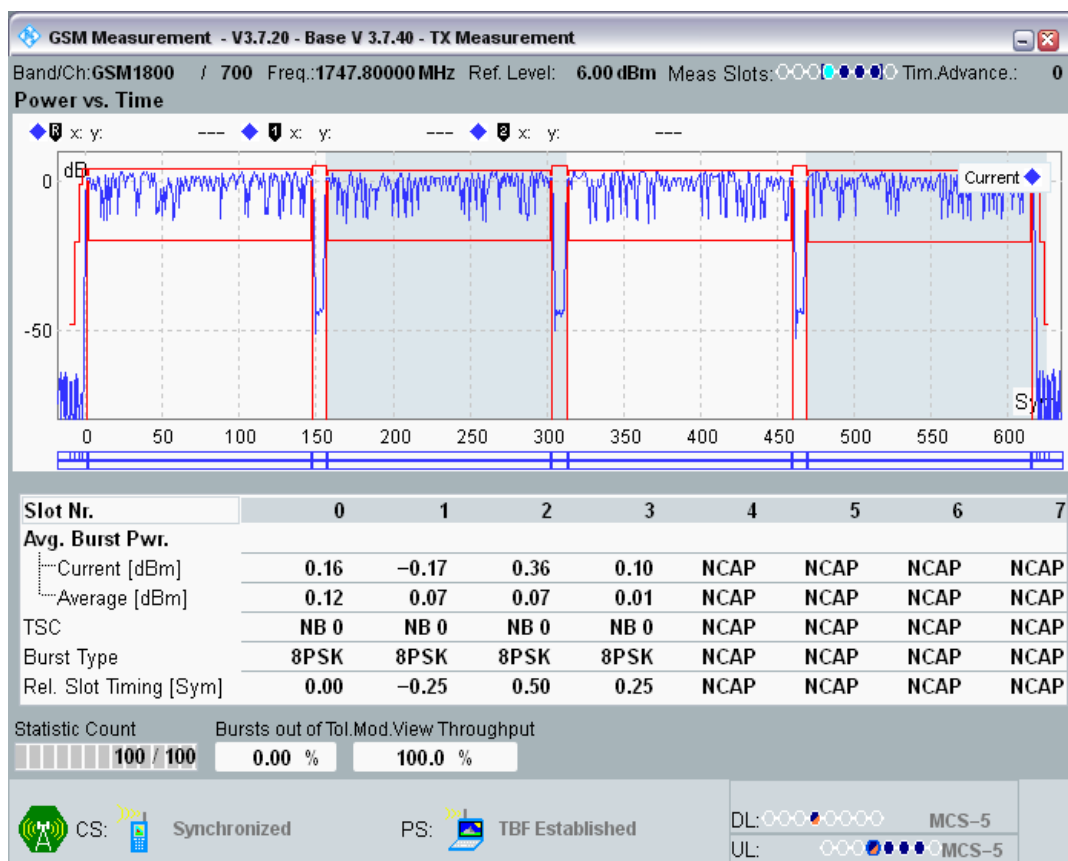


DCS1800 Channel=700 Gamma=5;5;5;5.png

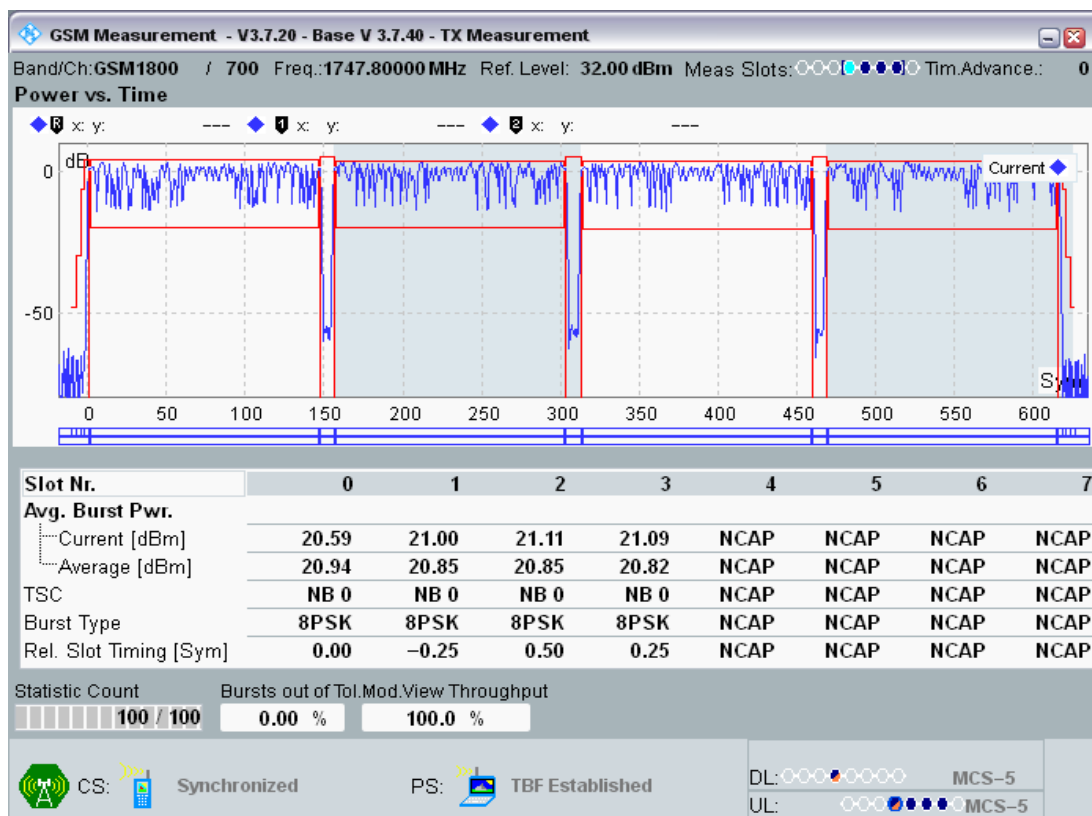

DCS1800 Channel=885 Gamma=18;18;18;18.png



DCS1800 Channel=885 Gamma=5;5;5;5.png

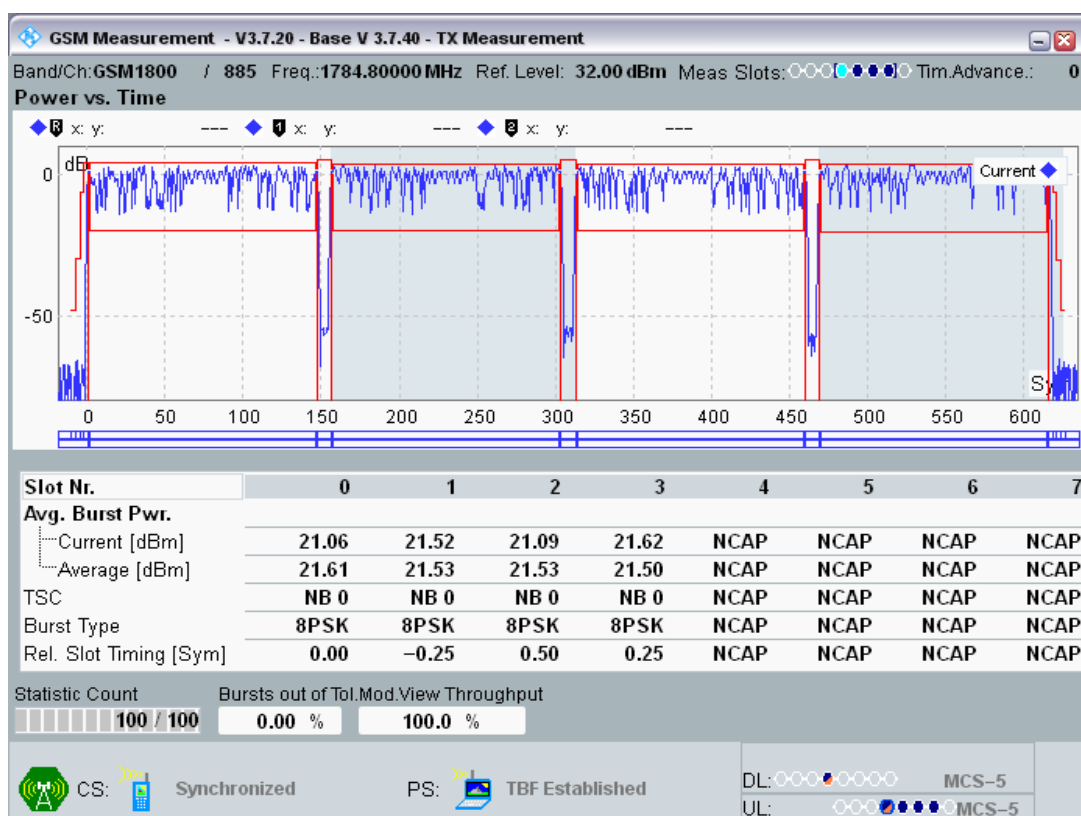

Clause 4.2.29 Modulation Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-73.97	-60	-62.18	-51	PASS
GSM900	975	880.2	6;6;6;6	-1600 KHz	-73.80	-60	-62.00	-51	PASS
GSM900	975	880.2	6;6;6;6	-1400 KHz	-73.33	-60	-61.53	-51	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-72.68	-60	-60.88	-51	PASS
GSM900	975	880.2	6;6;6;6	-1000 KHz	-72.19	-60	-60.39	-51	PASS
GSM900	975	880.2	6;6;6;6	-800 KHz	-70.96	-60	-59.16	-51	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-70.27	-60	-58.47	-51	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-68.36	-60	-56.56	-36	PASS
GSM900	975	880.2	6;6;6;6	-250 KHz	-41.95	-33	-30.15	-36	PASS
GSM900	975	880.2	6;6;6;6	-200 KHz	-38.56	-30	-26.77	-36	PASS
GSM900	975	880.2	6;6;6;6	-100 KHz	-8.11	0.5	3.69	-36	PASS
GSM900	975	880.2	6;6;6;6	100 KHz	-8.12	0.5	3.68	-36	PASS
GSM900	975	880.2	6;6;6;6	200 KHz	-38.61	-30	-26.81	-36	PASS
GSM900	975	880.2	6;6;6;6	250 KHz	-42.43	-33	-30.64	-36	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-68.39	-60	-56.60	-36	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-70.22	-60	-58.42	-51	PASS
GSM900	975	880.2	6;6;6;6	800 KHz	-71.31	-60	-59.52	-51	PASS
GSM900	975	880.2	6;6;6;6	1000 KHz	-72.21	-60	-60.41	-51	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-73.02	-60	-61.23	-51	PASS
GSM900	975	880.2	6;6;6;6	1400 KHz	-73.29	-60	-61.50	-51	PASS
GSM900	975	880.2	6;6;6;6	1600 KHz	-73.99	-60	-62.20	-51	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-74.09	-60	-62.29	-51	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-73.90	-60	-62.61	-51	PASS
GSM900	60	902	6;6;6;6	-1600 KHz	-73.13	-60	-61.84	-51	PASS
GSM900	60	902	6;6;6;6	-1400 KHz	-72.59	-60	-61.30	-51	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-72.28	-60	-60.99	-51	PASS
GSM900	60	902	6;6;6;6	-1000 KHz	-71.83	-60	-60.54	-51	PASS
GSM900	60	902	6;6;6;6	-800 KHz	-70.78	-60	-59.49	-51	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-69.75	-60	-58.46	-51	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-68.04	-60	-56.75	-36	PASS
GSM900	60	902	6;6;6;6	-250 KHz	-42.09	-33	-30.80	-36	PASS
GSM900	60	902	6;6;6;6	-200 KHz	-38.36	-30	-27.07	-36	PASS
GSM900	60	902	6;6;6;6	-100 KHz	-7.59	0.5	3.69	-36	PASS
GSM900	60	902	6;6;6;6	100 KHz	-7.82	0.5	3.47	-36	PASS
GSM900	60	902	6;6;6;6	200 KHz	-38.46	-30	-27.17	-36	PASS
GSM900	60	902	6;6;6;6	250 KHz	-41.96	-33	-30.68	-36	PASS
GSM900	60	902	6;6;6;6	400 KHz	-67.65	-60	-56.36	-36	PASS
GSM900	60	902	6;6;6;6	600 KHz	-70.05	-60	-58.76	-51	PASS

GSM900	60	902	6;6;6;6	800 KHz	-70.96	-60	-59.67	-51	PASS
GSM900	60	902	6;6;6;6	1000 KHz	-71.92	-60	-60.63	-51	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-72.14	-60	-60.85	-51	PASS
GSM900	60	902	6;6;6;6	1400 KHz	-72.99	-60	-61.70	-51	PASS
GSM900	60	902	6;6;6;6	1600 KHz	-73.44	-60	-62.15	-51	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-73.62	-60	-62.33	-51	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-73.32	-60	-62.29	-51	PASS
GSM900	124	914.8	6;6;6;6	-1600 KHz	-73.15	-60	-62.12	-51	PASS
GSM900	124	914.8	6;6;6;6	-1400 KHz	-72.40	-60	-61.37	-51	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-72.40	-60	-61.37	-51	PASS
GSM900	124	914.8	6;6;6;6	-1000 KHz	-71.90	-60	-60.87	-51	PASS
GSM900	124	914.8	6;6;6;6	-800 KHz	-70.79	-60	-59.76	-51	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-69.86	-60	-58.83	-51	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-67.65	-60	-56.62	-36	PASS
GSM900	124	914.8	6;6;6;6	-250 KHz	-41.78	-33	-30.75	-36	PASS
GSM900	124	914.8	6;6;6;6	-200 KHz	-37.91	-30	-26.88	-36	PASS
GSM900	124	914.8	6;6;6;6	-100 KHz	-7.72	0.5	3.31	-36	PASS
GSM900	124	914.8	6;6;6;6	100 KHz	-7.52	0.5	3.51	-36	PASS
GSM900	124	914.8	6;6;6;6	200 KHz	-38.05	-30	-27.02	-36	PASS
GSM900	124	914.8	6;6;6;6	250 KHz	-41.77	-33	-30.74	-36	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-67.93	-60	-56.90	-36	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-69.89	-60	-58.86	-51	PASS
GSM900	124	914.8	6;6;6;6	800 KHz	-70.80	-60	-59.77	-51	PASS
GSM900	124	914.8	6;6;6;6	1000 KHz	-71.70	-60	-60.67	-51	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-72.07	-60	-61.04	-51	PASS
GSM900	124	914.8	6;6;6;6	1400 KHz	-72.77	-60	-61.74	-51	PASS
GSM900	124	914.8	6;6;6;6	1600 KHz	-73.38	-60	-62.35	-51	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-73.21	-60	-62.18	-51	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-74.79	-60	-62.34	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1600 KHz	-74.28	-60	-61.83	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1400 KHz	-73.48	-60	-61.03	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-72.37	-60	-59.93	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1000 KHz	-71.30	-60	-58.86	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-800 KHz	-70.53	-60	-58.08	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-69.50	-60	-57.05	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-66.84	-60	-54.39	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-250 KHz	-41.62	-33	-29.18	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-200 KHz	-38.31	-30	-25.86	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-100 KHz	-7.87	0.5	4.58	-36	PASS
DCS1800	512	1710.2	5;5;5;5	100 KHz	-7.88	0.5	4.57	-36	PASS
DCS1800	512	1710.2	5;5;5;5	200 KHz	-38.06	-30	-25.61	-36	PASS
DCS1800	512	1710.2	5;5;5;5	250 KHz	-41.90	-33	-29.45	-36	PASS


DCS1800	512	1710.2	5;5;5;5	400 KHz	-66.28	-60	-53.83	-36	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-69.52	-60	-57.07	-56	PASS
DCS1800	512	1710.2	5;5;5;5	800 KHz	-70.91	-60	-58.46	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1000 KHz	-71.37	-60	-58.93	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-72.55	-60	-60.10	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1400 KHz	-73.73	-60	-61.28	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1600 KHz	-74.42	-60	-61.98	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-75.18	-60	-62.74	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-75.23	-60	-62.61	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1600 KHz	-74.87	-60	-62.26	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1400 KHz	-73.82	-60	-61.20	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-73.02	-60	-60.40	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1000 KHz	-72.03	-60	-59.41	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-800 KHz	-71.44	-60	-58.82	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-70.14	-60	-57.52	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-67.14	-60	-54.53	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-250 KHz	-41.63	-33	-29.01	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-200 KHz	-38.31	-30	-25.70	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-100 KHz	-8.11	0.5	4.50	-36	PASS
DCS1800	700	1747.8	5;5;5;5	100 KHz	-7.91	0.5	4.71	-36	PASS
DCS1800	700	1747.8	5;5;5;5	200 KHz	-38.42	-30	-25.81	-36	PASS
DCS1800	700	1747.8	5;5;5;5	250 KHz	-41.78	-33	-29.16	-36	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-66.89	-60	-54.27	-36	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-70.15	-60	-57.54	-56	PASS
DCS1800	700	1747.8	5;5;5;5	800 KHz	-71.40	-60	-58.78	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1000 KHz	-72.39	-60	-59.78	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-73.27	-60	-60.65	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1400 KHz	-74.11	-60	-61.49	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1600 KHz	-74.84	-60	-62.22	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-75.10	-60	-62.48	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-75.56	-60	-62.39	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1600 KHz	-75.08	-60	-61.90	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1400 KHz	-73.99	-60	-60.81	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-73.40	-60	-60.22	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1000 KHz	-72.21	-60	-59.03	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-800 KHz	-71.61	-60	-58.43	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-70.36	-60	-57.19	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-66.82	-60	-53.64	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-250 KHz	-41.84	-33	-28.66	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-200 KHz	-38.11	-30	-24.93	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-100 KHz	-8.10	0.5	5.08	-36	PASS
DCS1800	885	1784.8	5;5;5;5	100 KHz	-7.57	0.5	5.61	-36	PASS

DCS1800	885	1784.8	5;5;5;5	200 KHz	-38.12	-30	-24.94	-36	PASS
DCS1800	885	1784.8	5;5;5;5	250 KHz	-41.66	-33	-28.48	-36	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-66.72	-60	-53.54	-36	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-70.22	-60	-57.05	-56	PASS
DCS1800	885	1784.8	5;5;5;5	800 KHz	-71.62	-60	-58.44	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1000 KHz	-72.56	-60	-59.38	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-73.44	-60	-60.26	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1400 KHz	-74.37	-60	-61.19	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1600 KHz	-74.93	-60	-61.75	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-75.56	-60	-62.38	-56	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

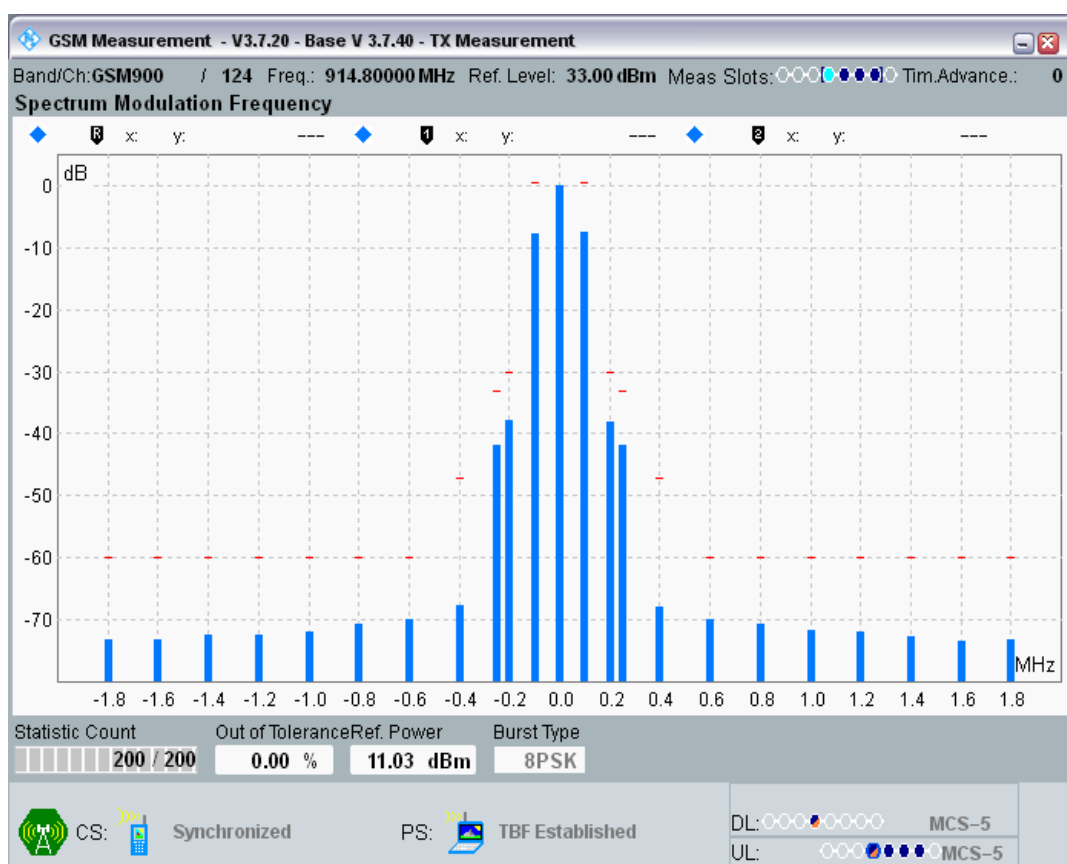


GSM900 Channel=60 Gamma=6;6;6;6.png

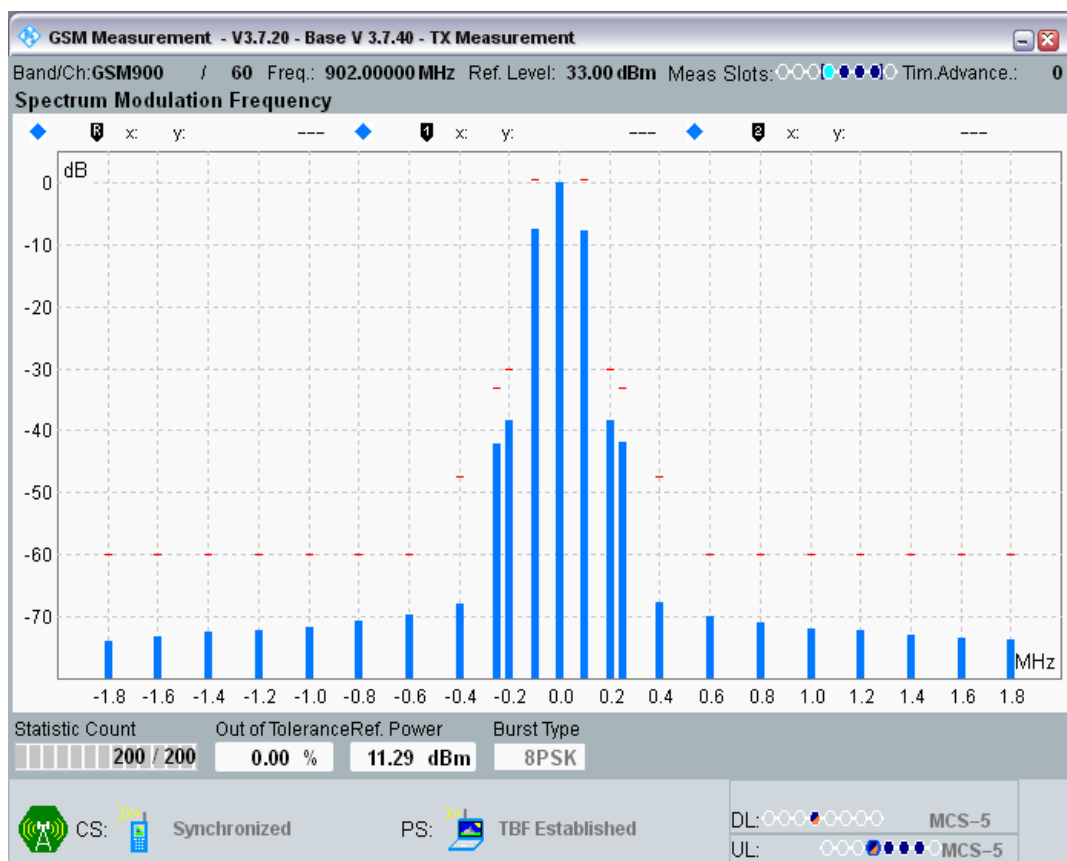


GSM900 Channel=975 Gamma=6;6;6;6.png

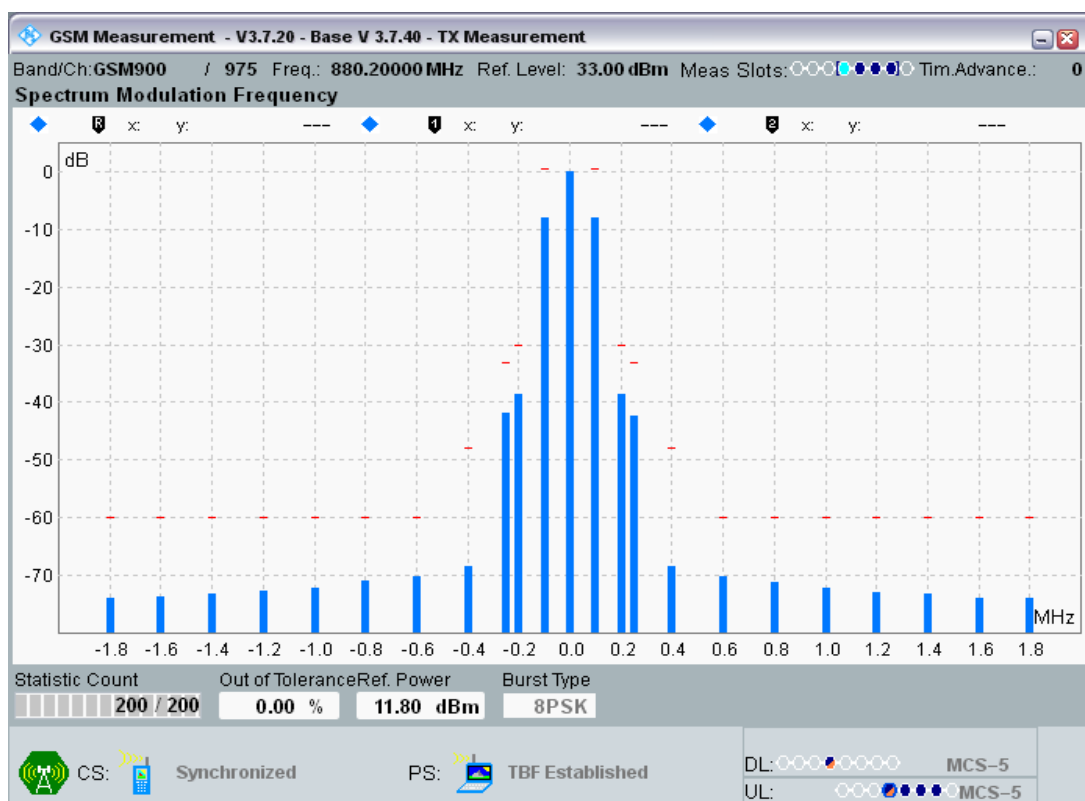


DCS1800 Channel=512 Gamma=5;5;5;5.png

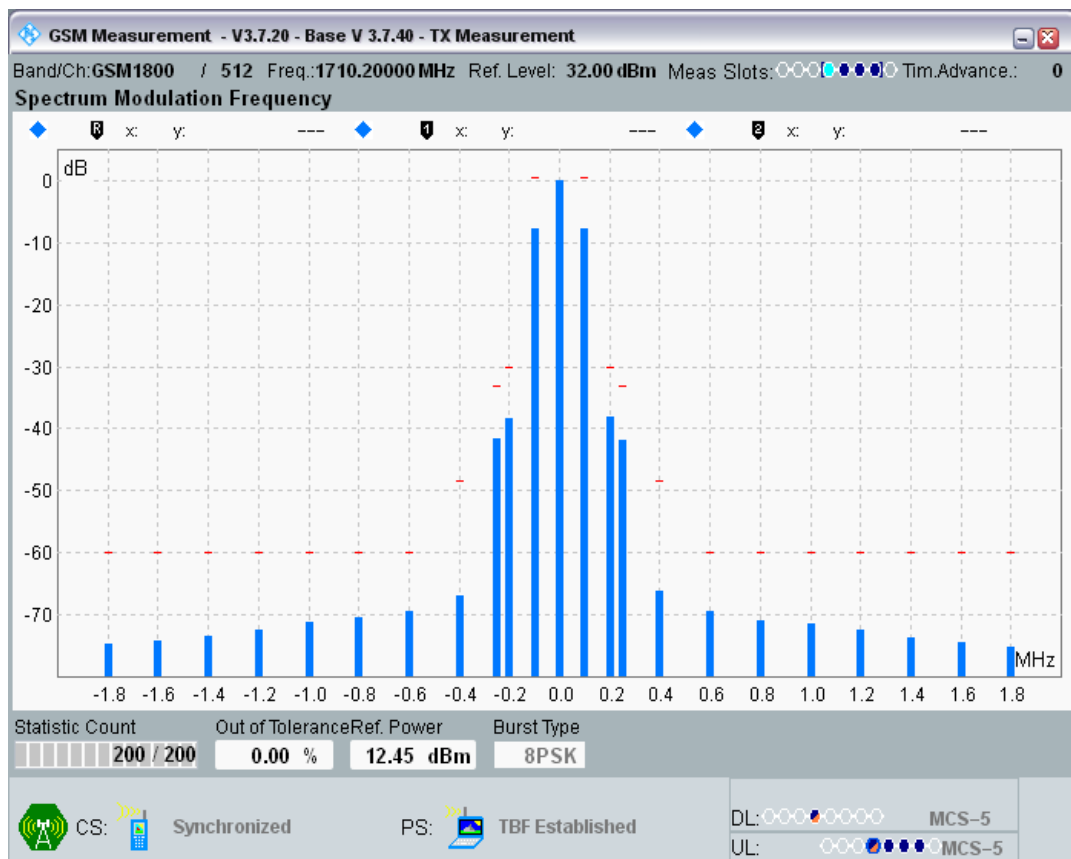

DCS1800 Channel=700 Gamma=5;5;5;5.png

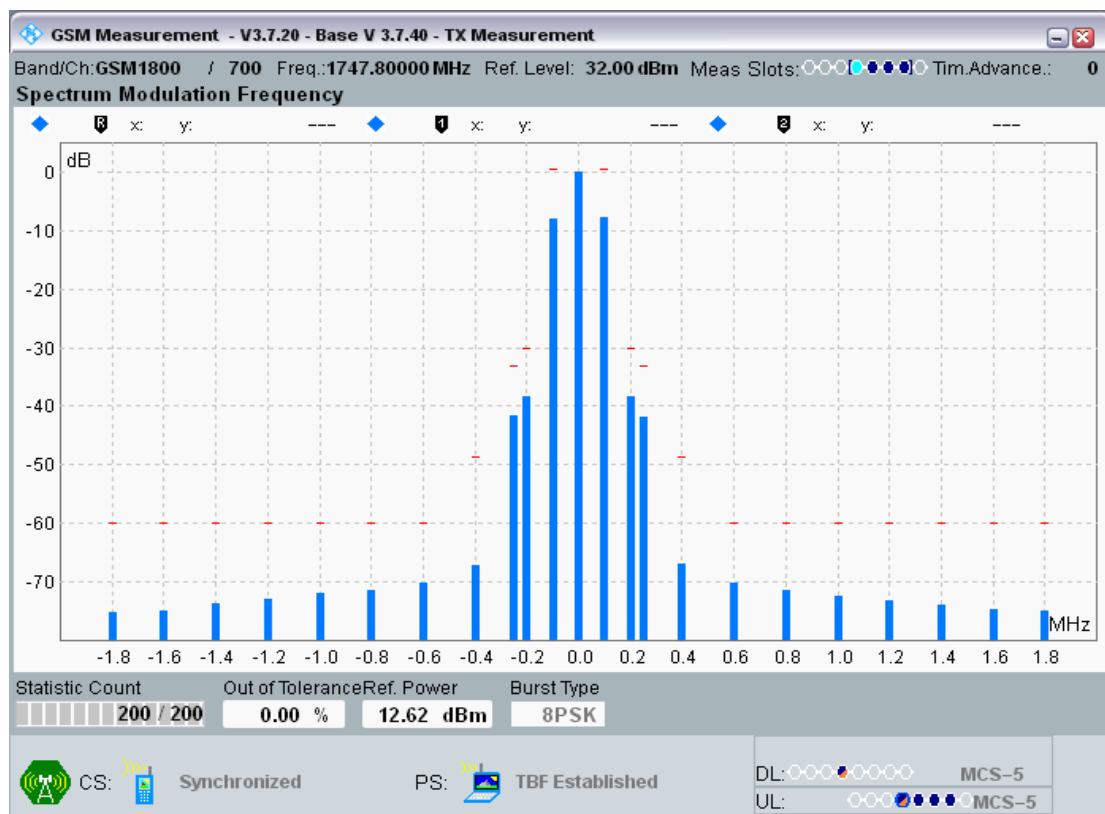

DCS1800 Channel=885 Gamma=5;5;5;5.png

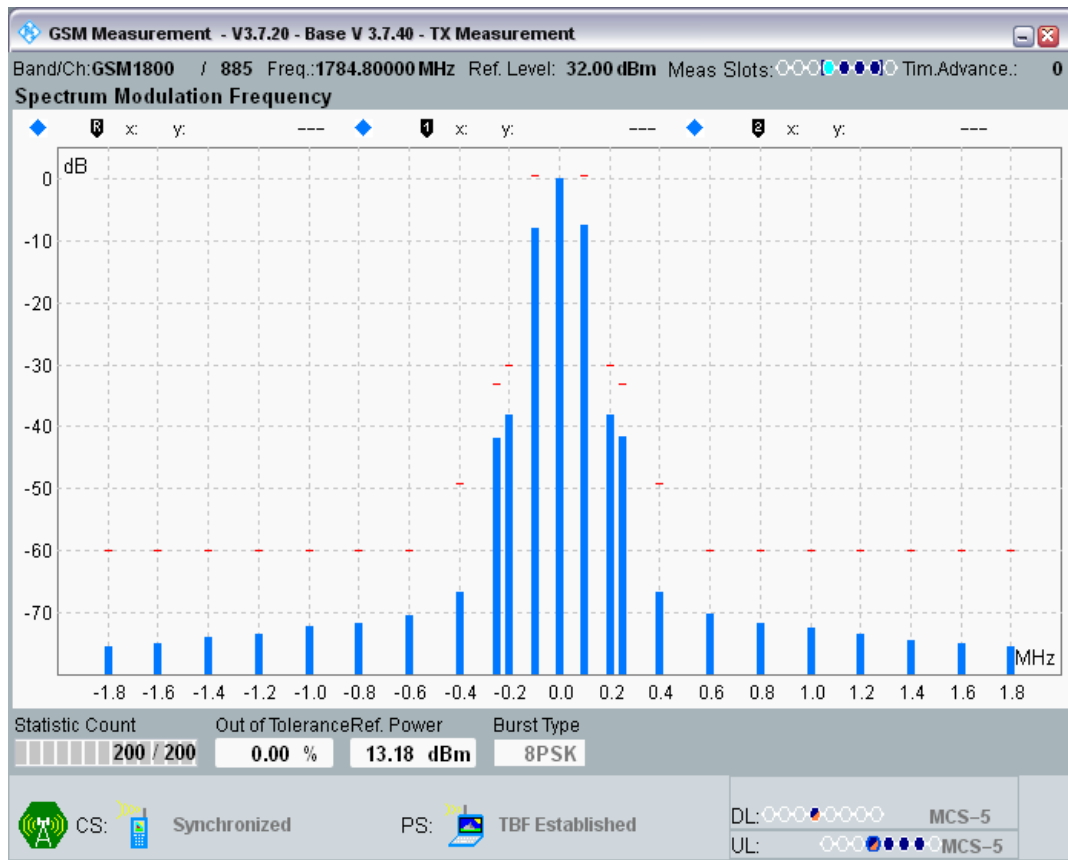


Clause 4.2.29 Switching Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-51.32	-24	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-49.63	-21	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-46.28	-21	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-45.63	-19	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-43.79	-19	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-46.41	-21	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-49.27	-21	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-50.42	-24	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-49.89	-24	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-50.13	-21	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-47.12	-21	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-43.30	-19	PASS
GSM900	60	902	6;6;6;6	400 KHz	-43.94	-19	PASS
GSM900	60	902	6;6;6;6	600 KHz	-46.33	-21	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-50.29	-21	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-51.21	-24	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-49.94	-24	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-48.89	-21	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-47.98	-21	PASS

GSM900	124	914.8	6;6;6;6	-400 KHz	-44.87	-19	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-43.39	-19	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-46.30	-21	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-49.07	-21	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-51.25	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-50.27	-27	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-48.64	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-43.93	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-41.67	-22	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-42.33	-22	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-44.62	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-48.69	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-49.99	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-49.81	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-48.49	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-44.98	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-42.22	-22	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-39.93	-22	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-45.36	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-49.55	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-51.30	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-50.89	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-48.43	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-44.35	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-41.74	-22	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-38.12	-22	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-43.07	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-47.93	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-51.30	-27	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

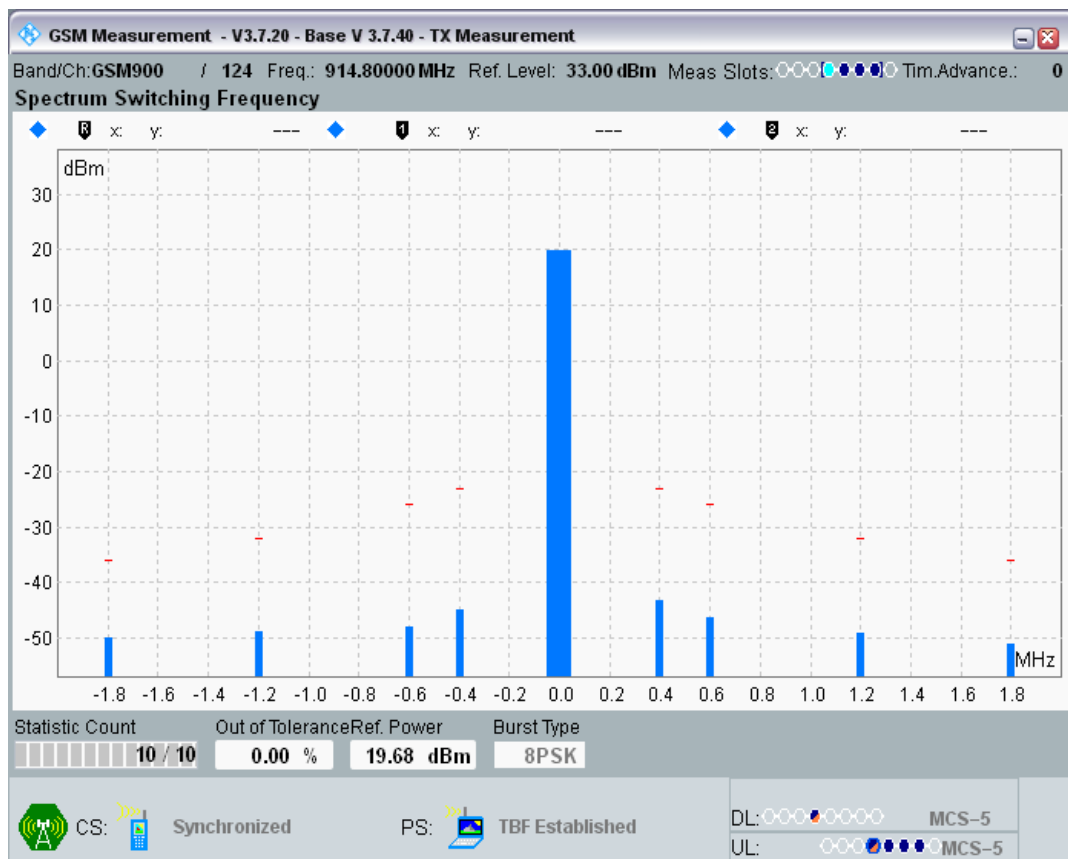


GSM900 Channel=60 Gamma=6;6;6;6.png

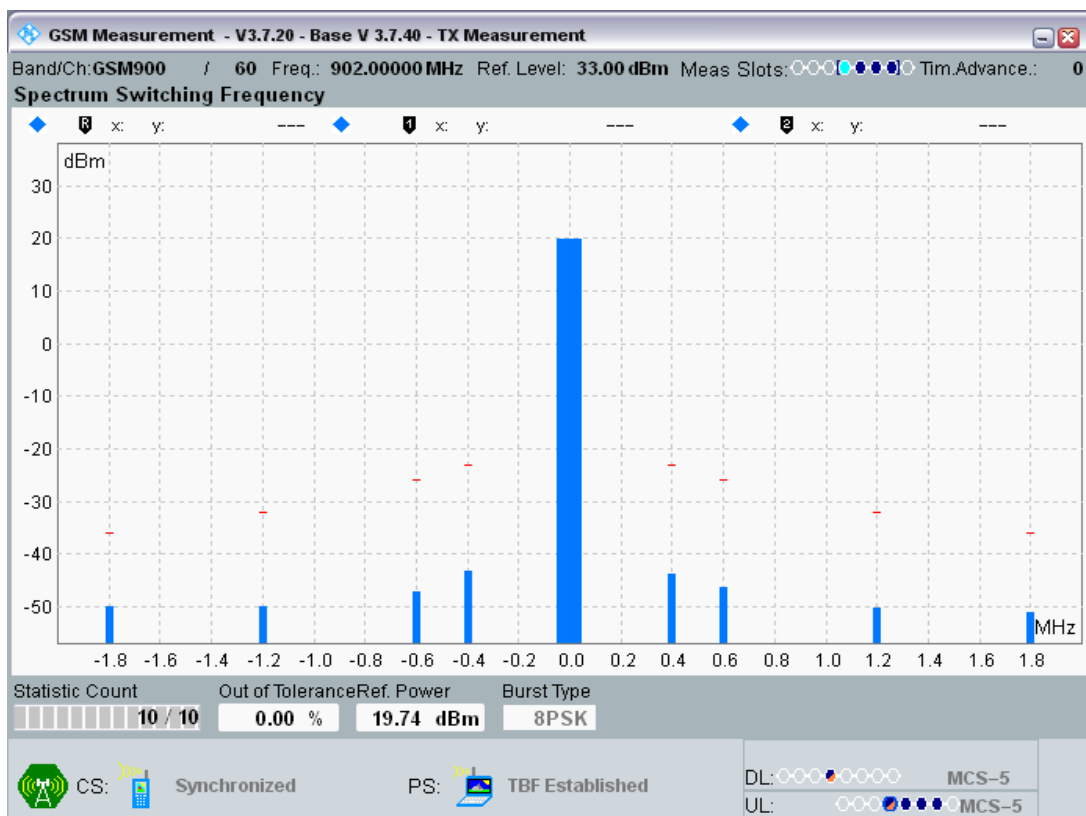


GSM900 Channel=975 Gamma=6;6;6.png

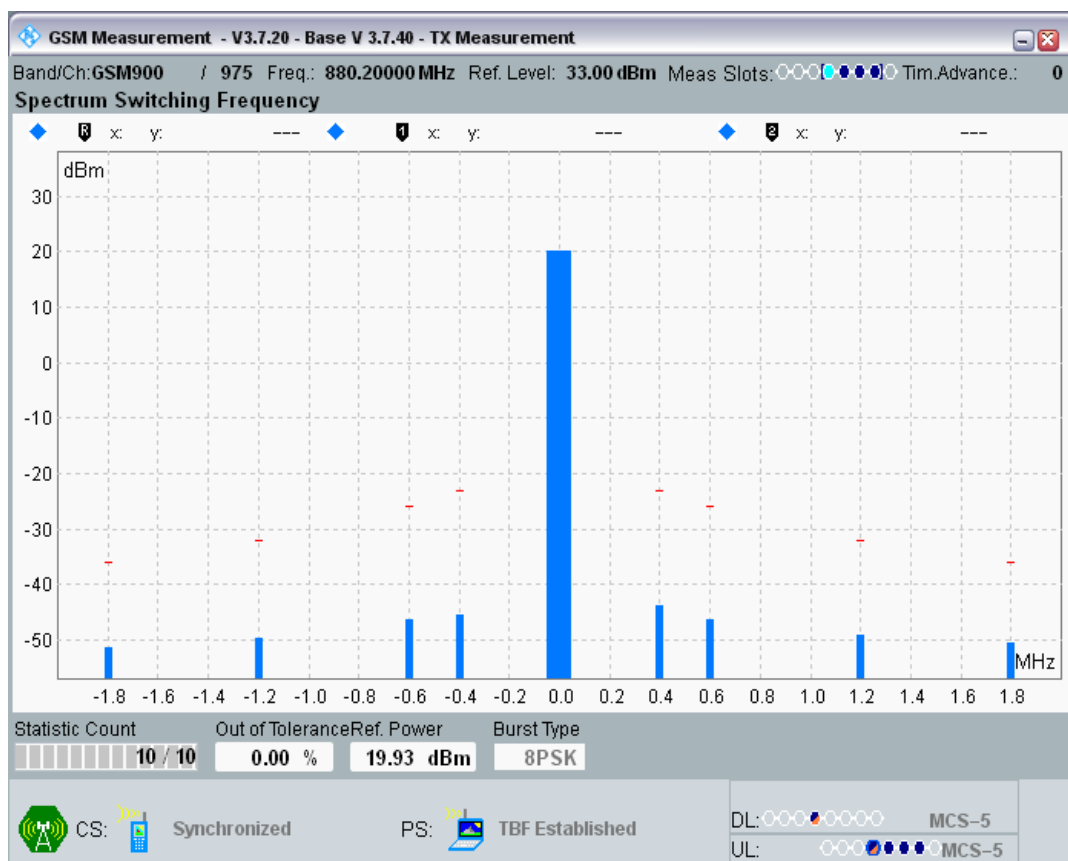

DCS1800 Channel=512 Gamma=5;5;5;5.png

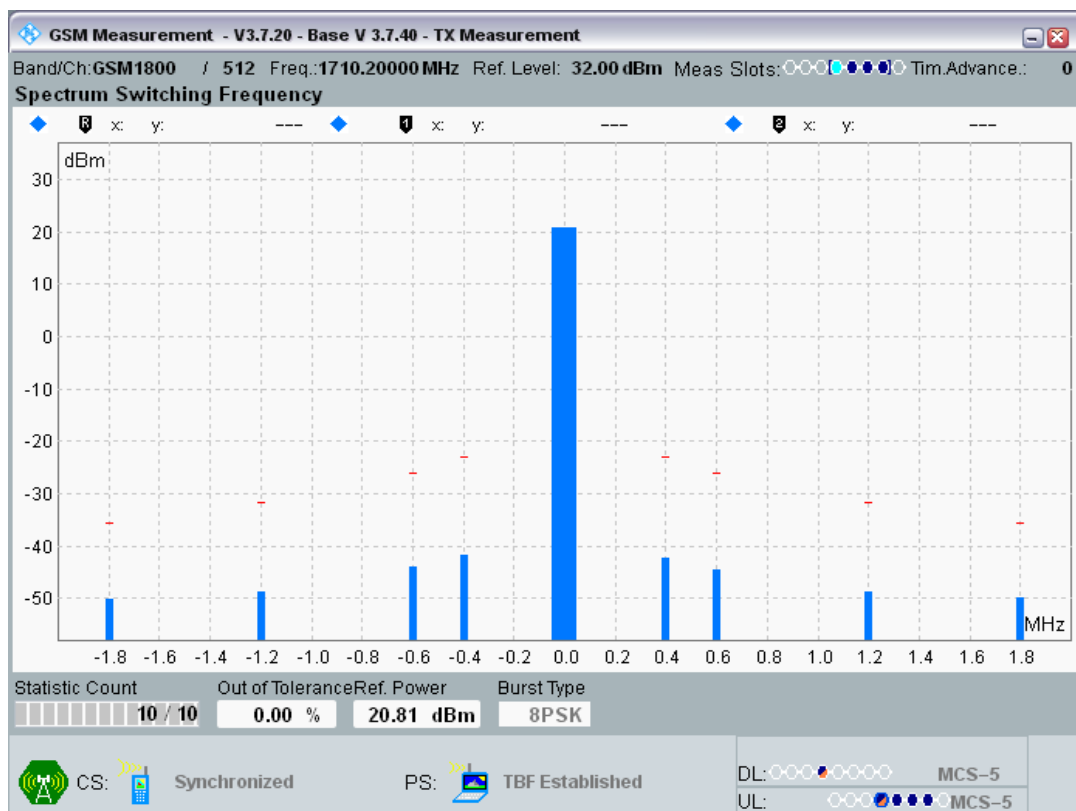

DCS1800 Channel=700 Gamma=5;5;5;5.png

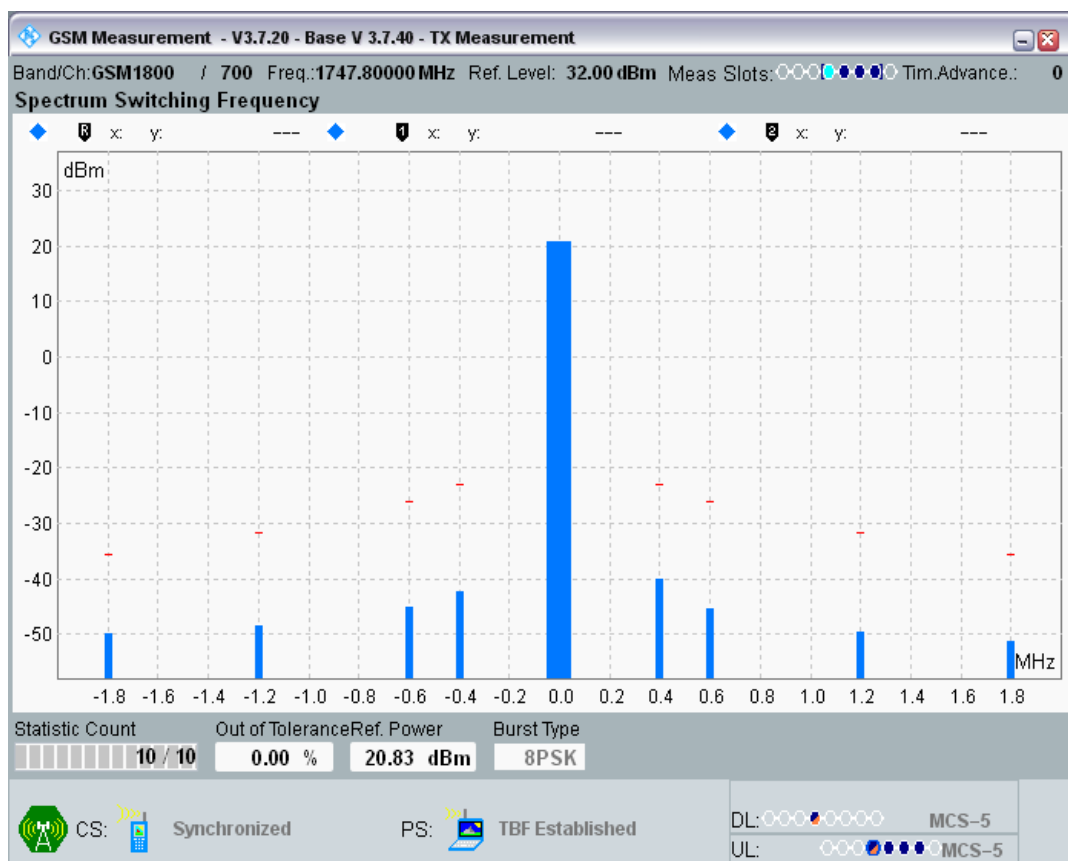

DCS1800 Channel=885 Gamma=5;5;5;5.png

