



Test Condition: LTHV, Test Mode: GSM, GPRS, EGPRS, Test Band: GSM900, DCS1800**Test Data****Clause 4.2.1 Transmitter-Frequency error and phase error**

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	5	Frequency Error (Hz)	14.43	-88.02	88.02	PASS
GSM900	975	880.2	5	RMS Phase Error (Degree)	1.34	0	5	PASS
GSM900	975	880.2	5	Peak Phase Error (Degree)	7.25	0	20	PASS
GSM900	60	902	5	Frequency Error (Hz)	17.31	-90.2	90.2	PASS
GSM900	60	902	5	RMS Phase Error (Degree)	1.68	0	5	PASS
GSM900	60	902	5	Peak Phase Error (Degree)	10.43	0	20	PASS
GSM900	124	914.8	5	Frequency Error (Hz)	12.56	-91.48	91.48	PASS
GSM900	124	914.8	5	RMS Phase Error (Degree)	1.51	0	5	PASS
GSM900	124	914.8	5	Peak Phase Error (Degree)	9.10	0	20	PASS
DCS1800	512	1710.2	0	Frequency Error (Hz)	13.79	-171.02	171.02	PASS
DCS1800	512	1710.2	0	RMS Phase Error (Degree)	0.64	0	5	PASS
DCS1800	512	1710.2	0	Peak Phase Error (Degree)	2.11	0	20	PASS
DCS1800	700	1747.8	0	Frequency Error (Hz)	15.56	-174.78	174.78	PASS
DCS1800	700	1747.8	0	RMS Phase Error (Degree)	0.70	0	5	PASS
DCS1800	700	1747.8	0	Peak Phase Error (Degree)	2.12	0	20	PASS
DCS1800	885	1784.8	0	Frequency Error (Hz)	20.40	-178.48	178.48	PASS
DCS1800	885	1784.8	0	RMS Phase Error (Degree)	0.67	0	5	PASS
DCS1800	885	1784.8	0	Peak Phase Error (Degree)	2.31	0	20	PASS


GSM900 Channel=124 PCL=5.png

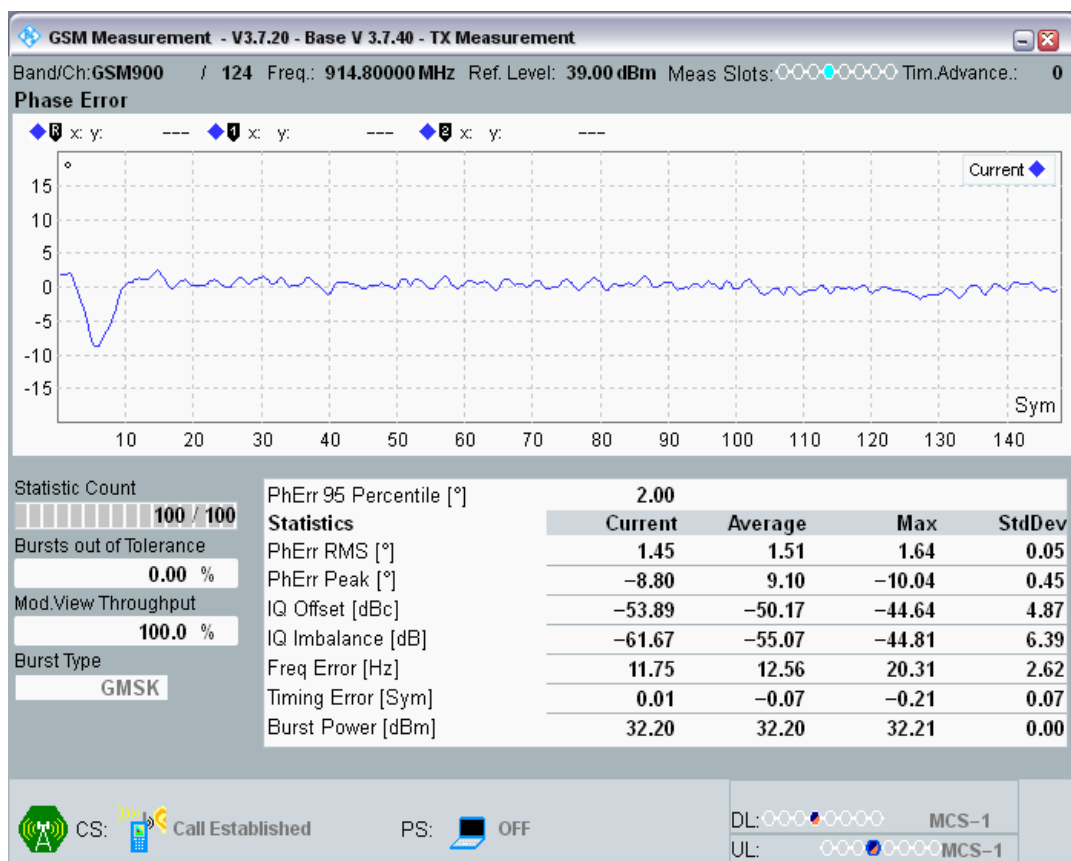


GSM900 Channel=60 PCL=5.png

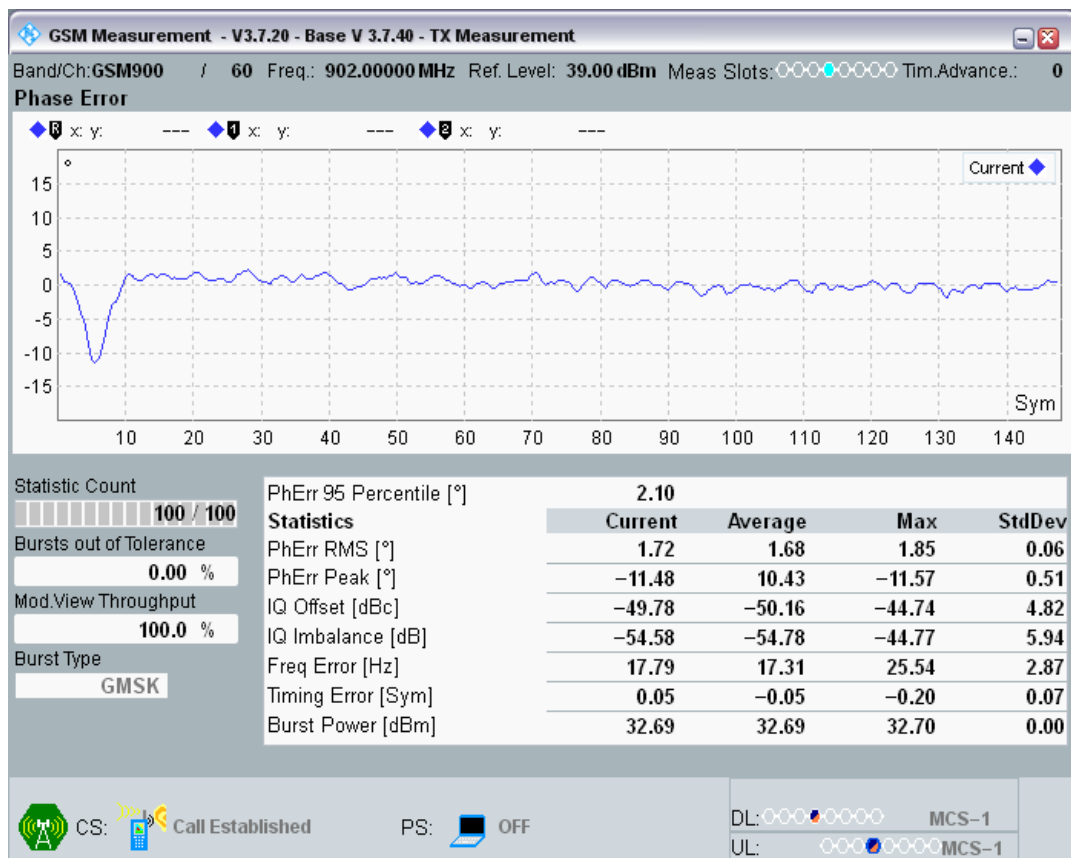


GSM900 Channel=975 PCL=5.png

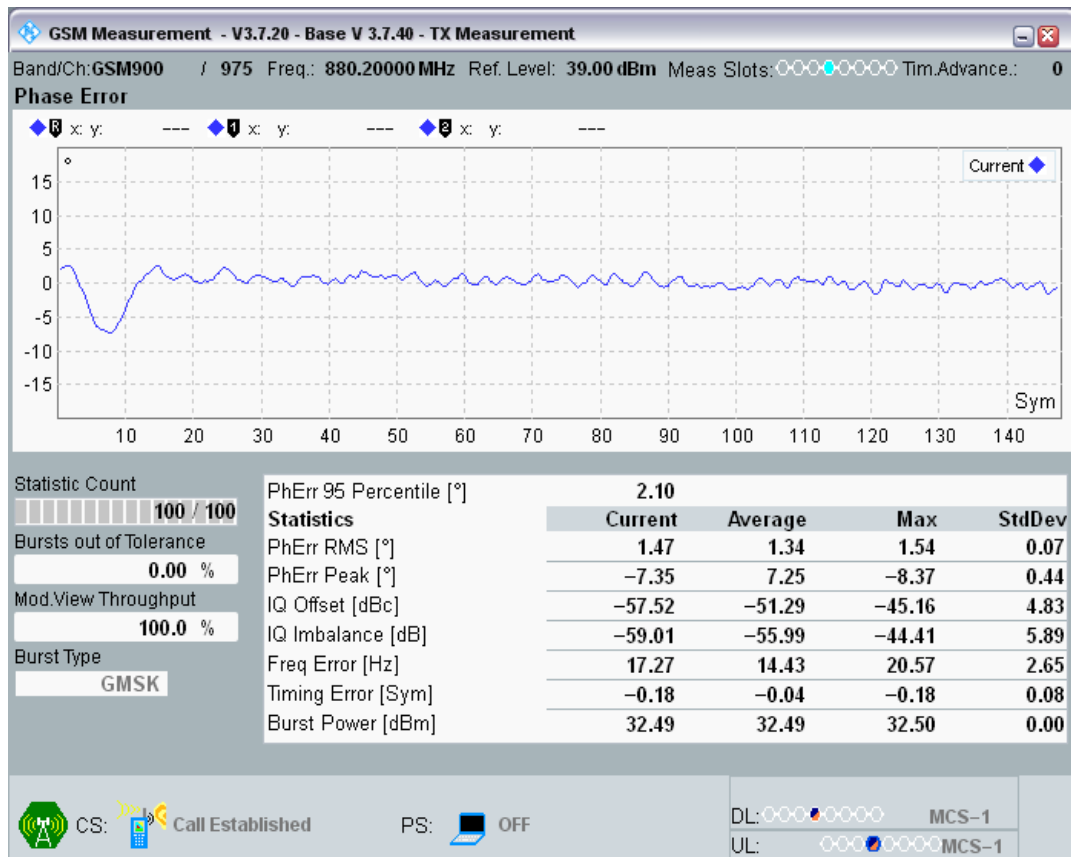


DCS1800 Channel=512 PCL=0.png

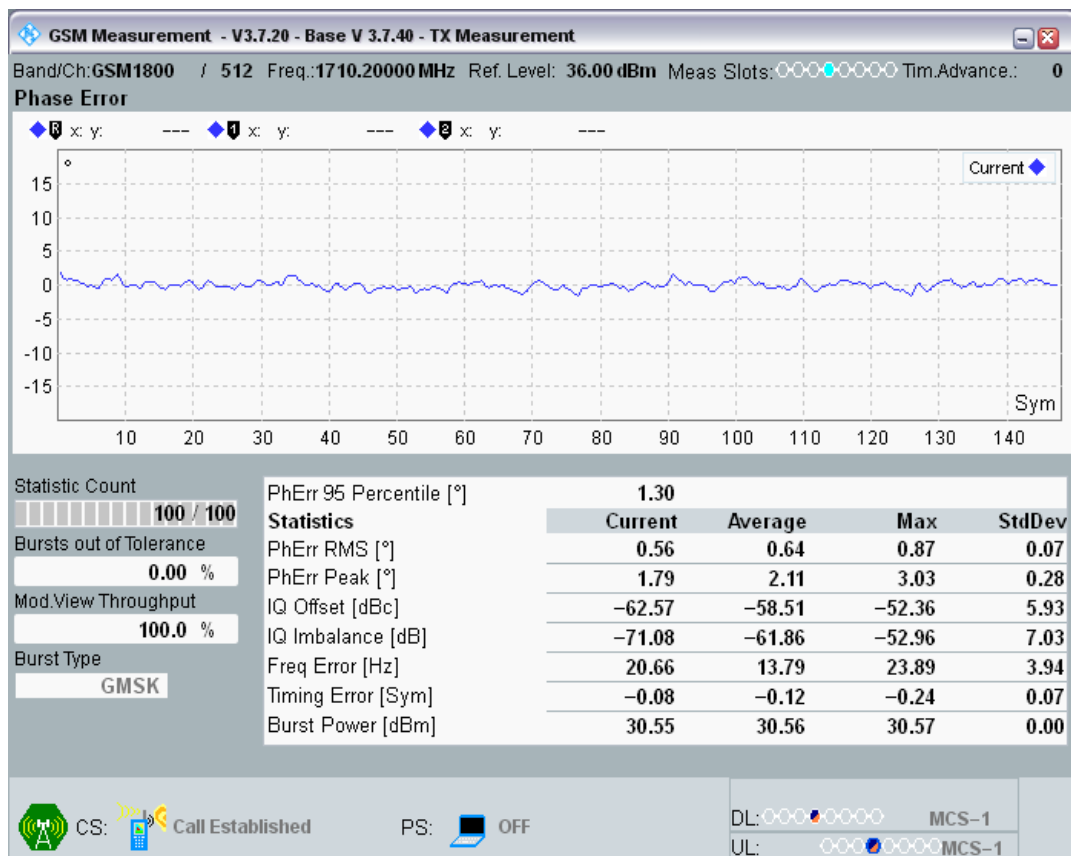

DCS1800 Channel=700 PCL=0.png

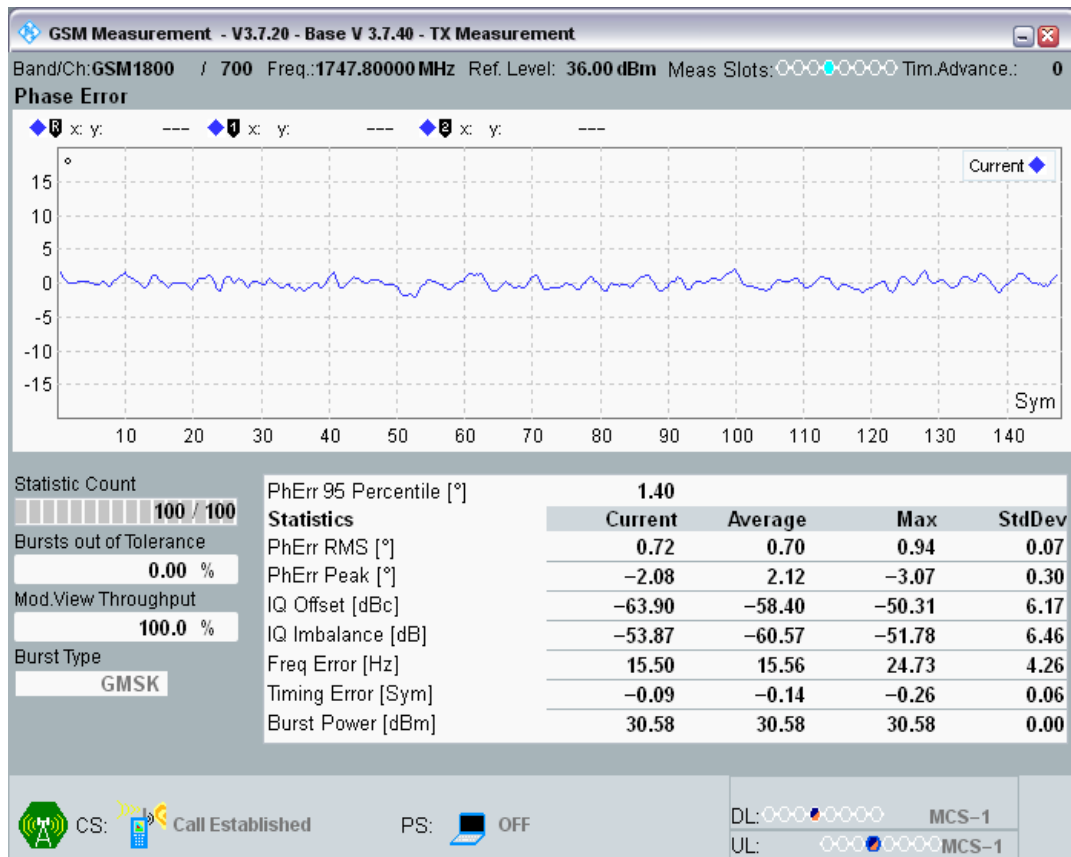


DCS1800 Channel=885 PCL=0.png

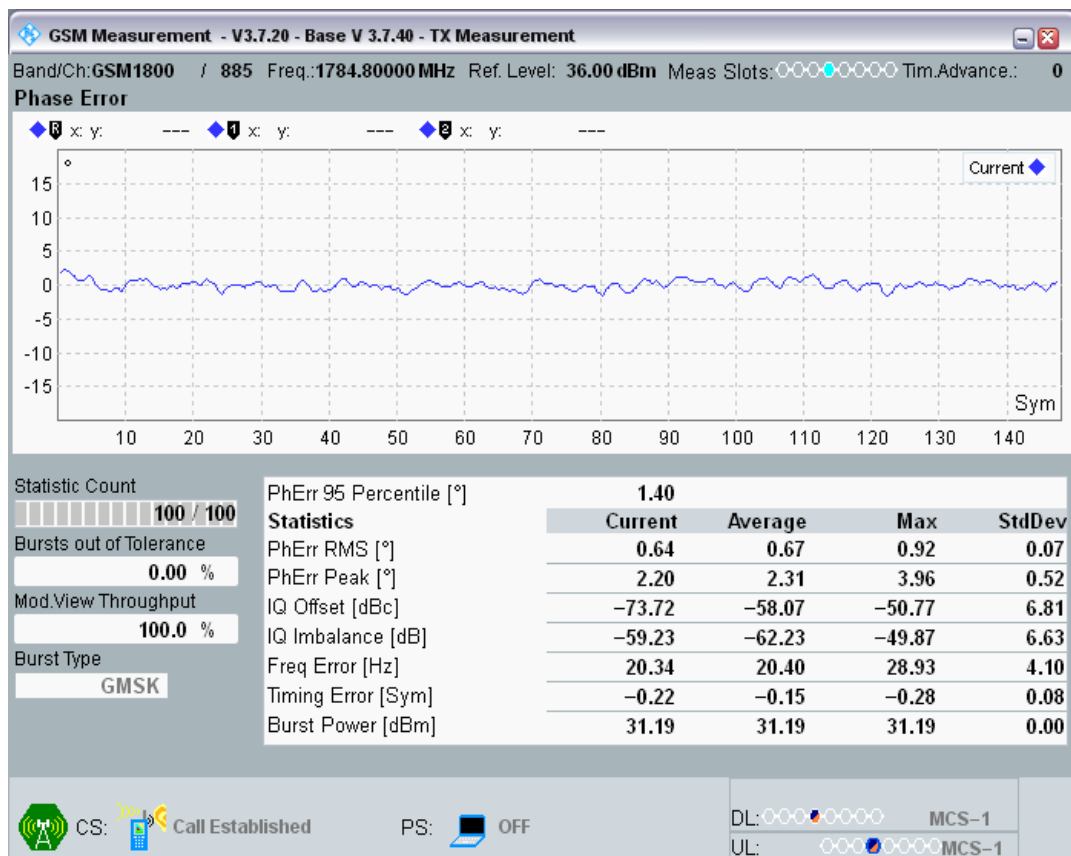


Clause 4.2.2 Transmitter-Frequency error under multi path and interference conditions

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
DCS1800	RA130	512	1710.2	0	14.14	-400	400	PASS
DCS1800	RA130	700	1747.8	0	13.98	-400	400	PASS
DCS1800	RA130	885	1784.8	0	23.60	-400	400	PASS
DCS1800	HT100	512	1710.2	0	13.14	-350	350	PASS
DCS1800	HT100	700	1747.8	0	13.59	-350	350	PASS
DCS1800	HT100	885	1784.8	0	16.34	-350	350	PASS
DCS1800	TU50	512	1710.2	0	14.24	-260	260	PASS
DCS1800	TU50	700	1747.8	0	15.43	-260	260	PASS
DCS1800	TU50	885	1784.8	0	14.88	-260	260	PASS
DCS1800	TU1_5	512	1710.2	0	16.30	-320	320	PASS
DCS1800	TU1_5	700	1747.8	0	15.46	-320	320	PASS
DCS1800	TU1_5	885	1784.8	0	17.76	-320	320	PASS
GSM900	RA250	975	880.2	5	14.08	-300	300	PASS
GSM900	RA250	60	902	5	19.60	-300	300	PASS
GSM900	RA250	124	914.8	5	11.82	-300	300	PASS
GSM900	HT100	975	880.2	5	16.85	-180	180	PASS
GSM900	HT100	60	902	5	18.08	-180	180	PASS
GSM900	HT100	124	914.8	5	10.14	-180	180	PASS
GSM900	TU50	975	880.2	5	16.40	-160	160	PASS
GSM900	TU50	60	902	5	15.40	-160	160	PASS
GSM900	TU50	124	914.8	5	12.59	-160	160	PASS
GSM900	TU3	975	880.2	5	14.30	-230	230	PASS
GSM900	TU3	60	902	5	17.05	-230	230	PASS
GSM900	TU3	124	914.8	5	8.98	-230	230	PASS


DCS1800 Channel=512 PCL=0 HT100.png

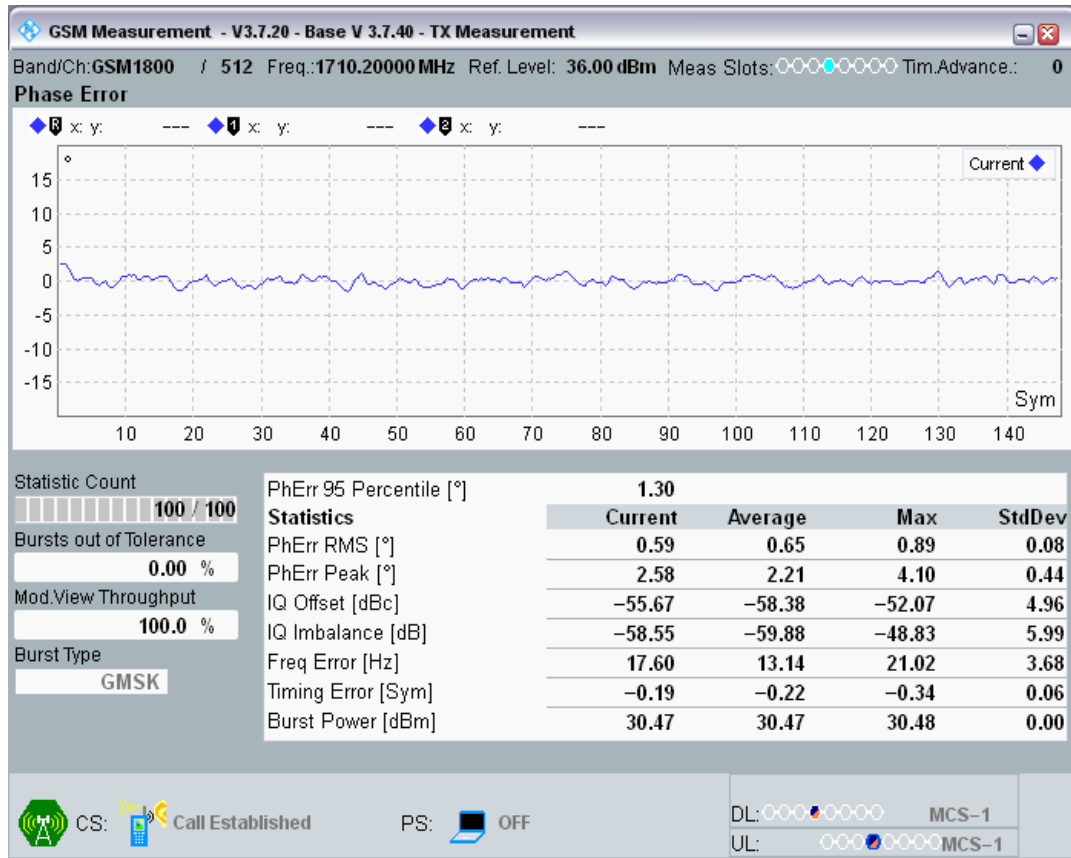


DCS1800 Channel=512 PCL=0 RA130.png

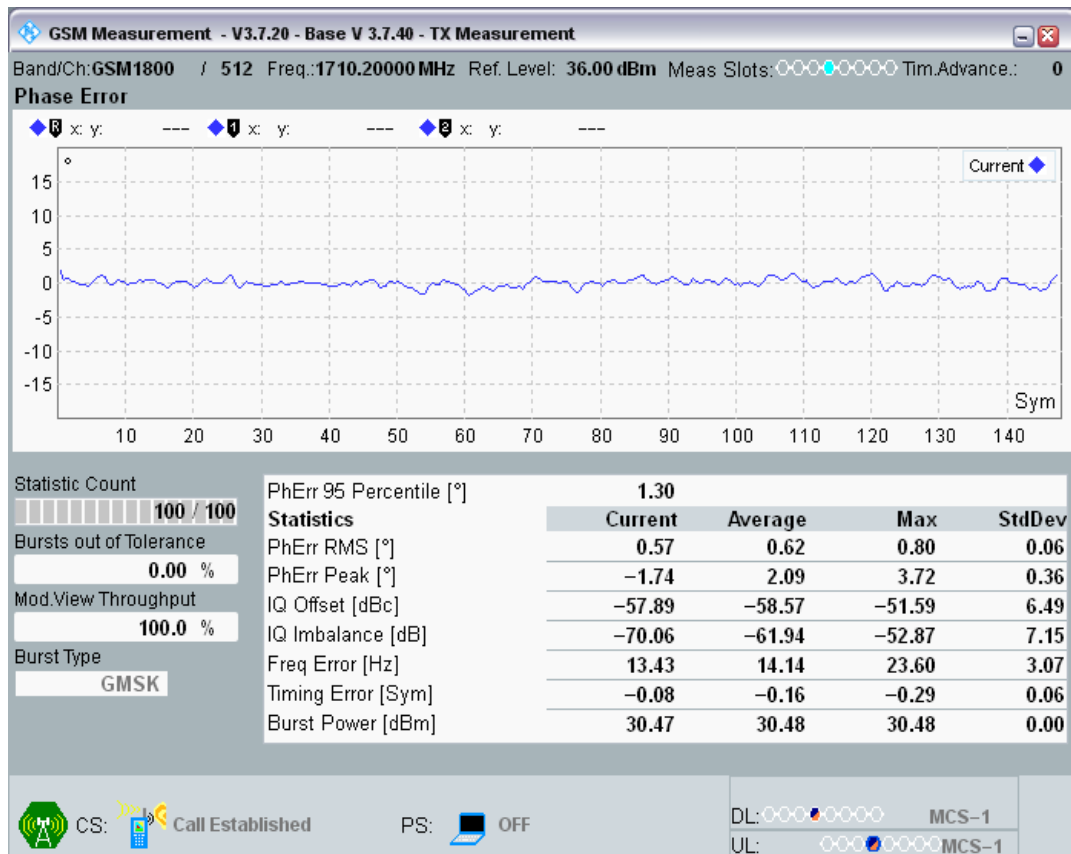


DCS1800 Channel=512 PCL=0 TU1_5.png

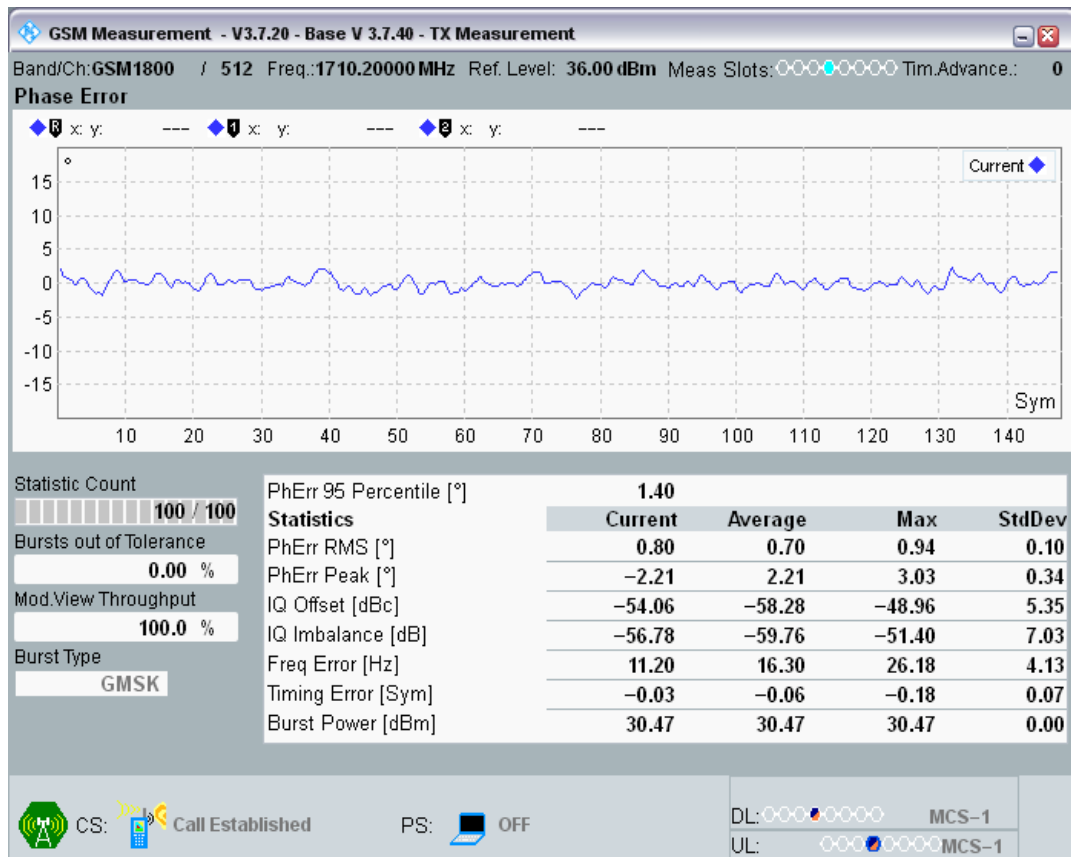

DCS1800 Channel=512 PCL=0 TU50.png

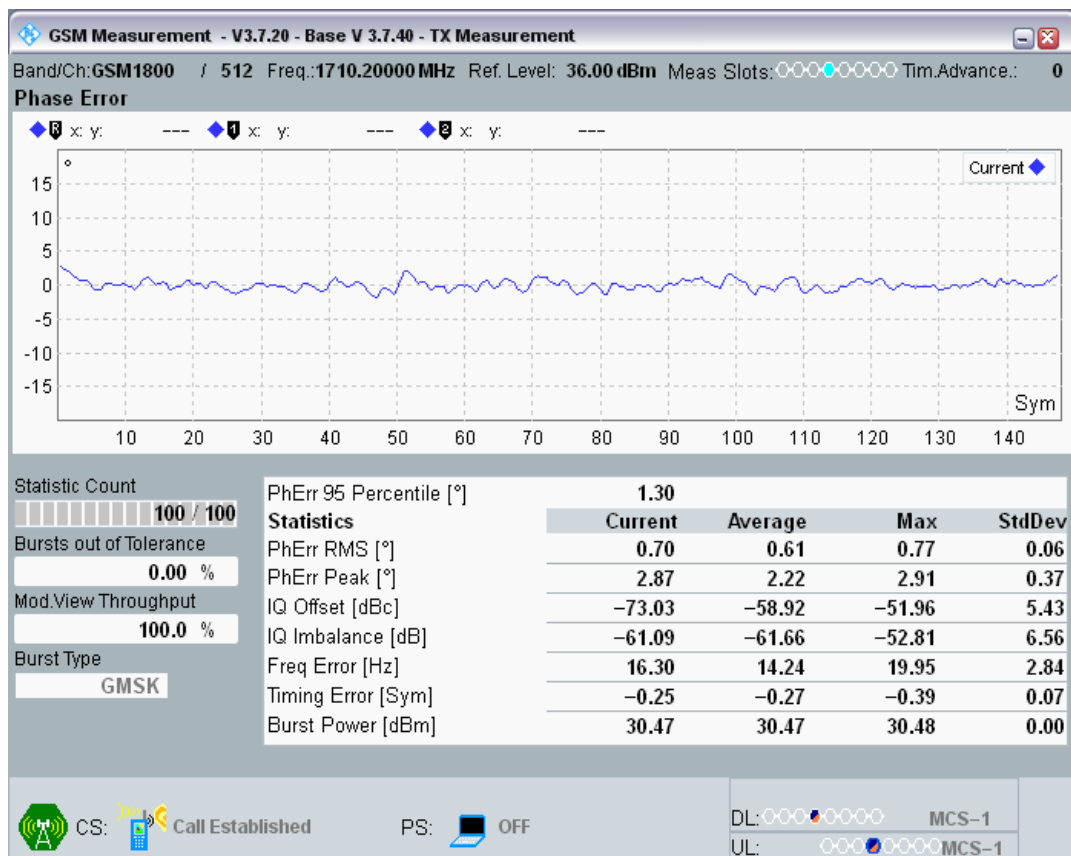


DCS1800 Channel=700 PCL=0 HT100.png

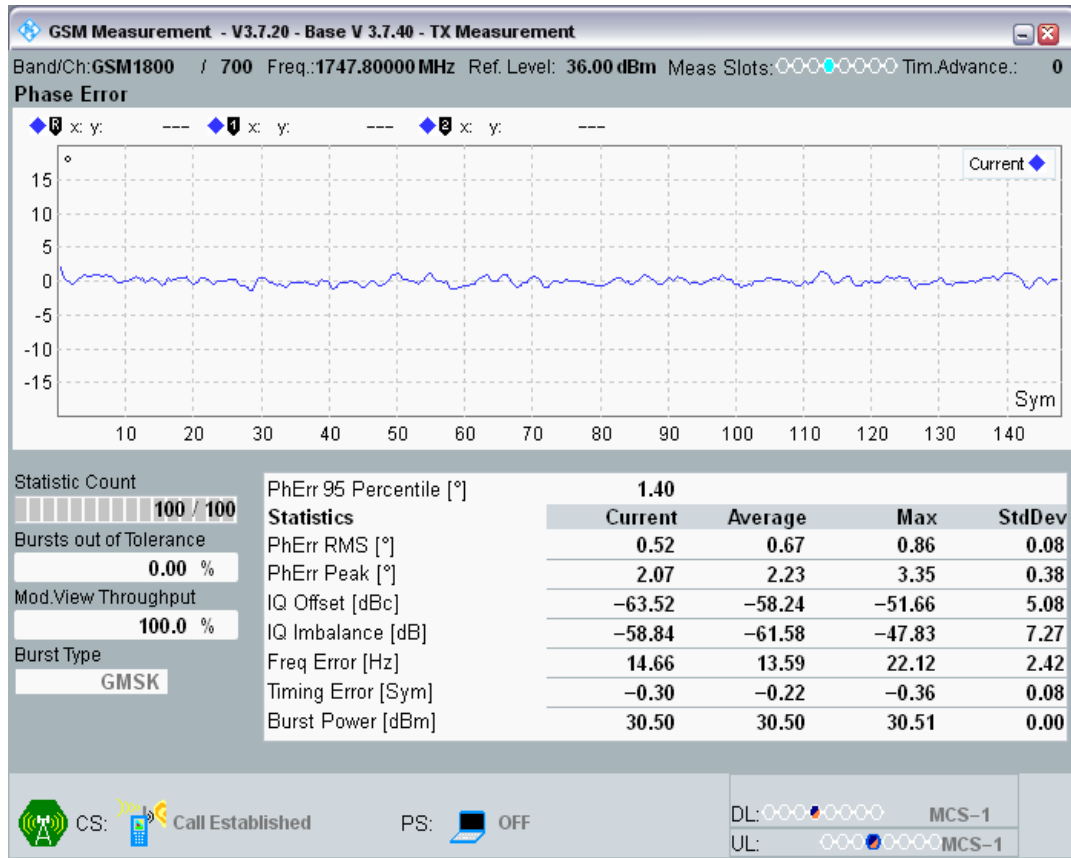


DCS1800 Channel=700 PCL=0 RA130.png




DCS1800 Channel=700 PCL=0 TU1_5.png

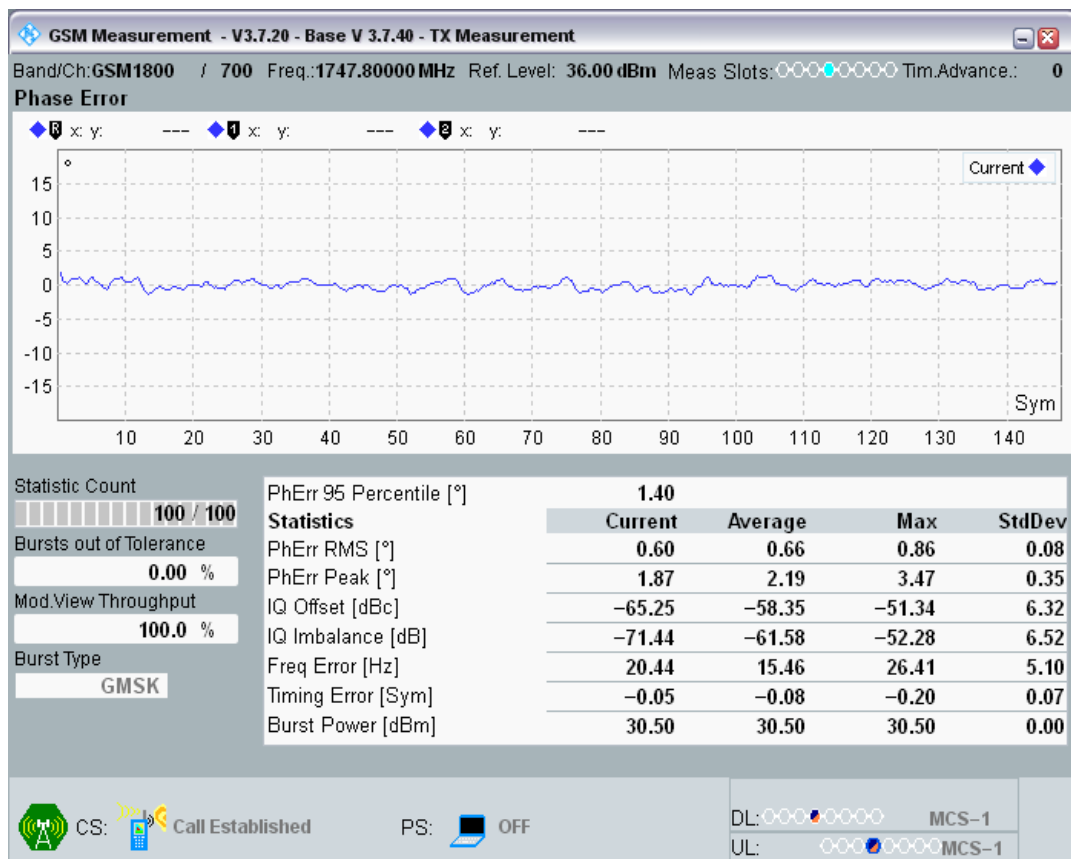


DCS1800 Channel=700 PCL=0 TU50.png

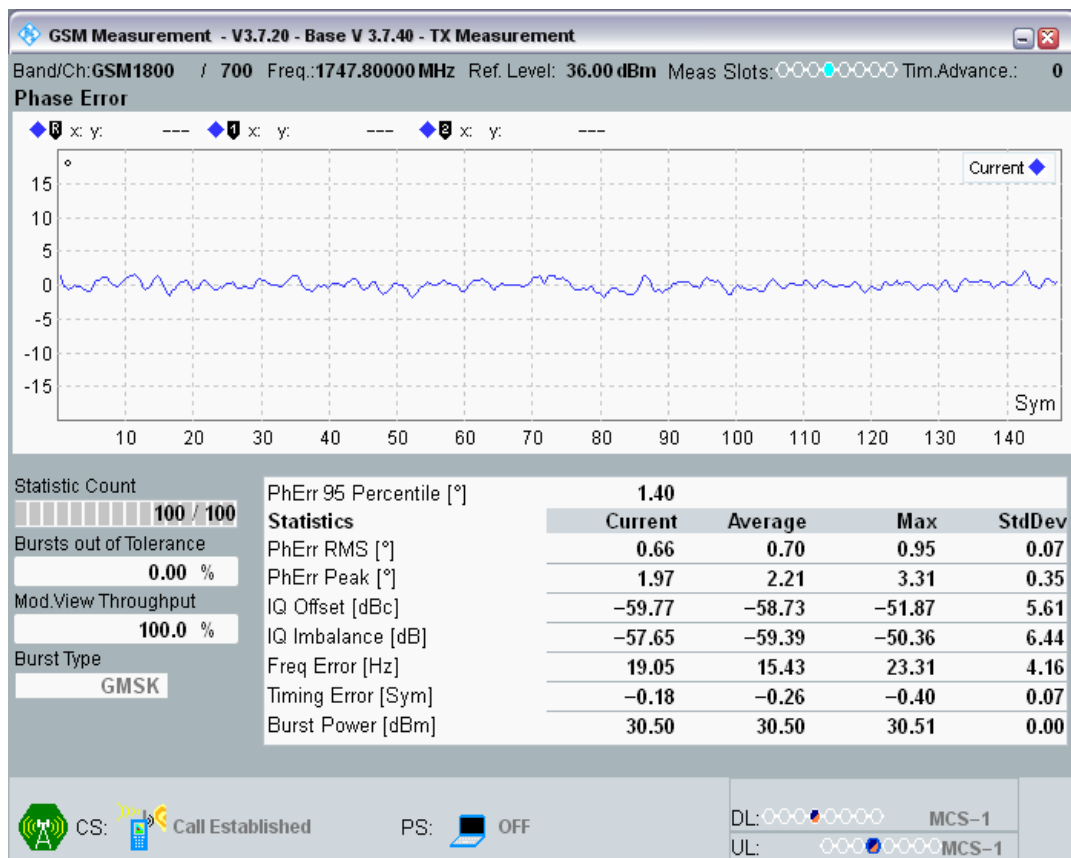


DCS1800 Channel=885 PCL=0 HT100.png

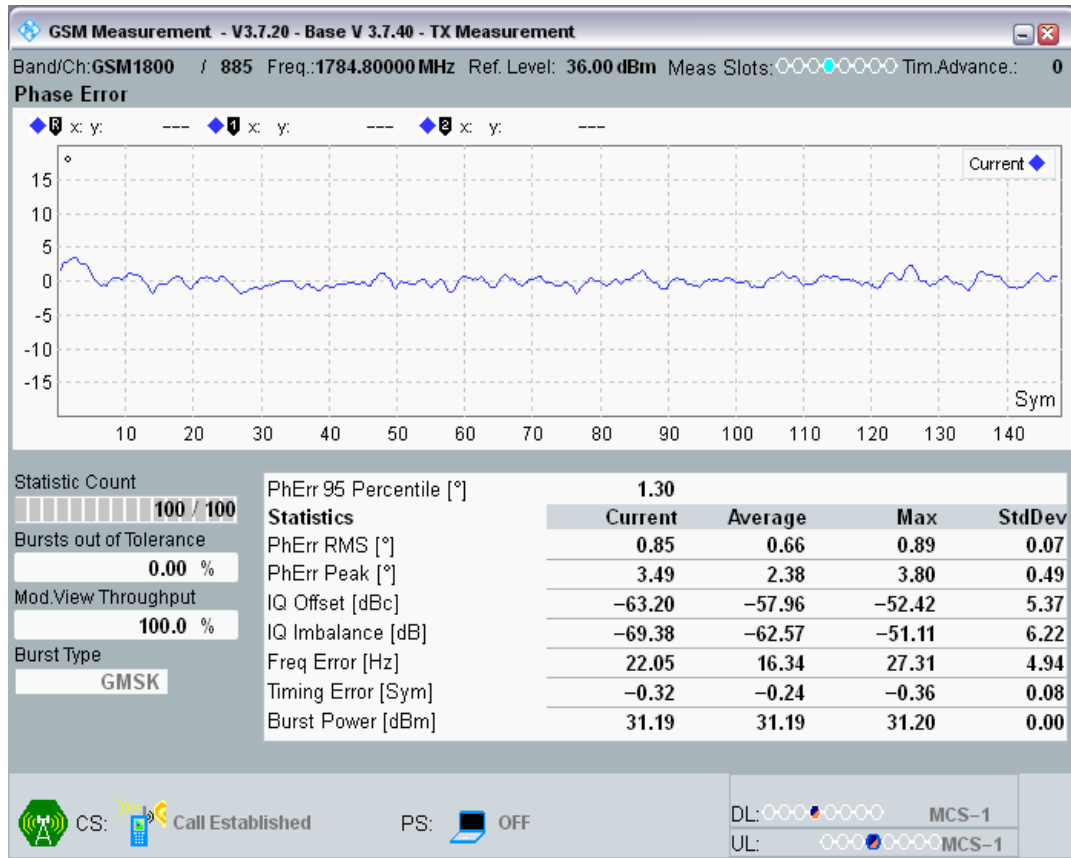


DCS1800 Channel=885 PCL=0 RA130.png

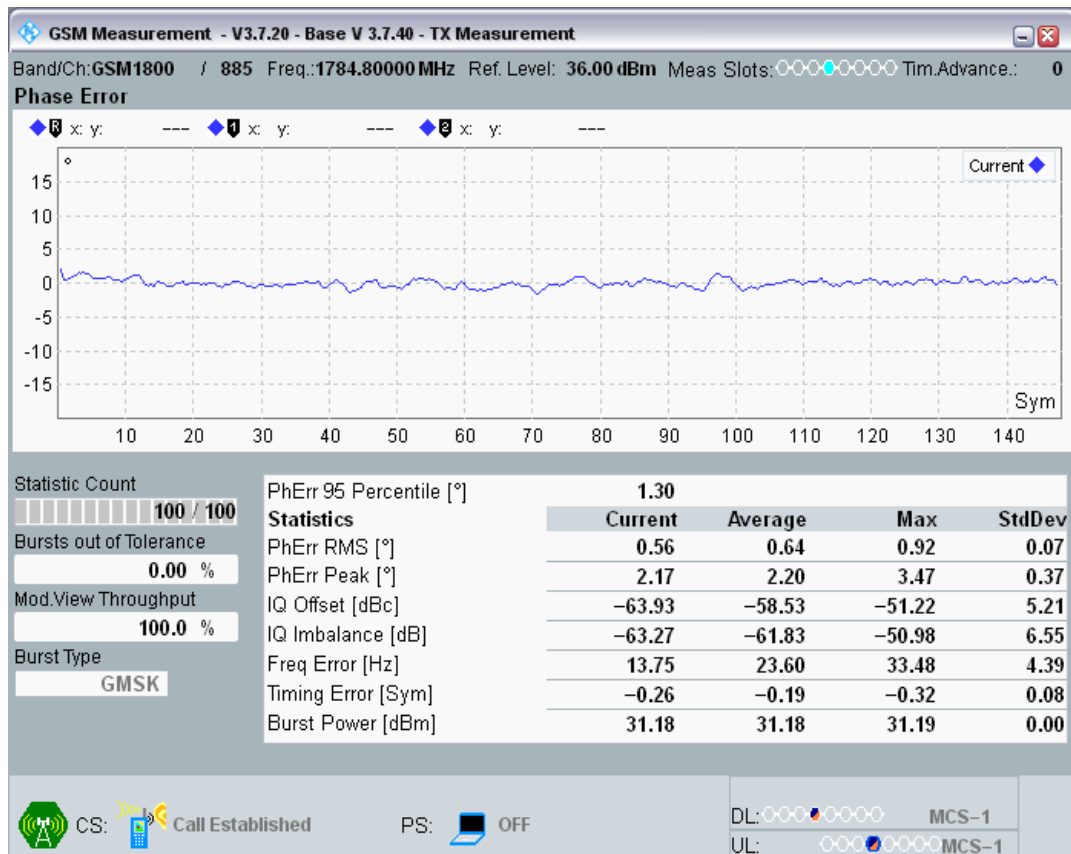


DCS1800 Channel=885 PCL=0 TU1_5.png

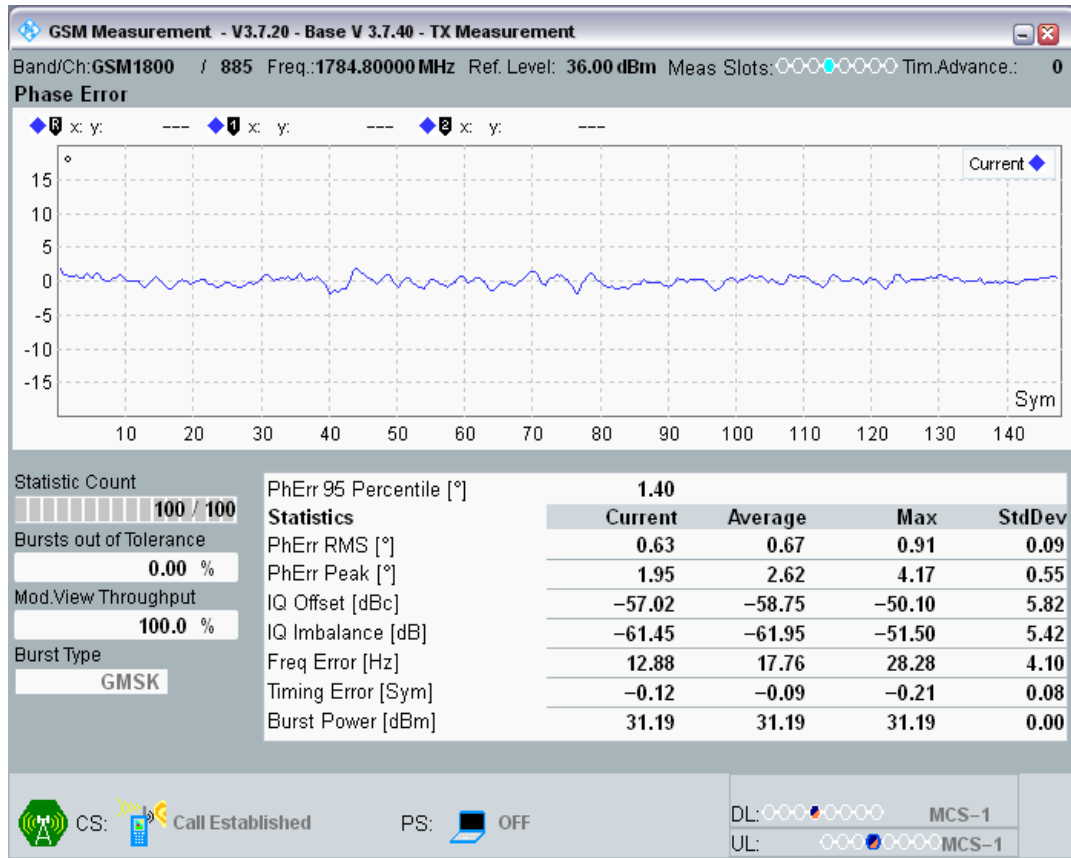


DCS1800 Channel=885 PCL=0 TU50.png

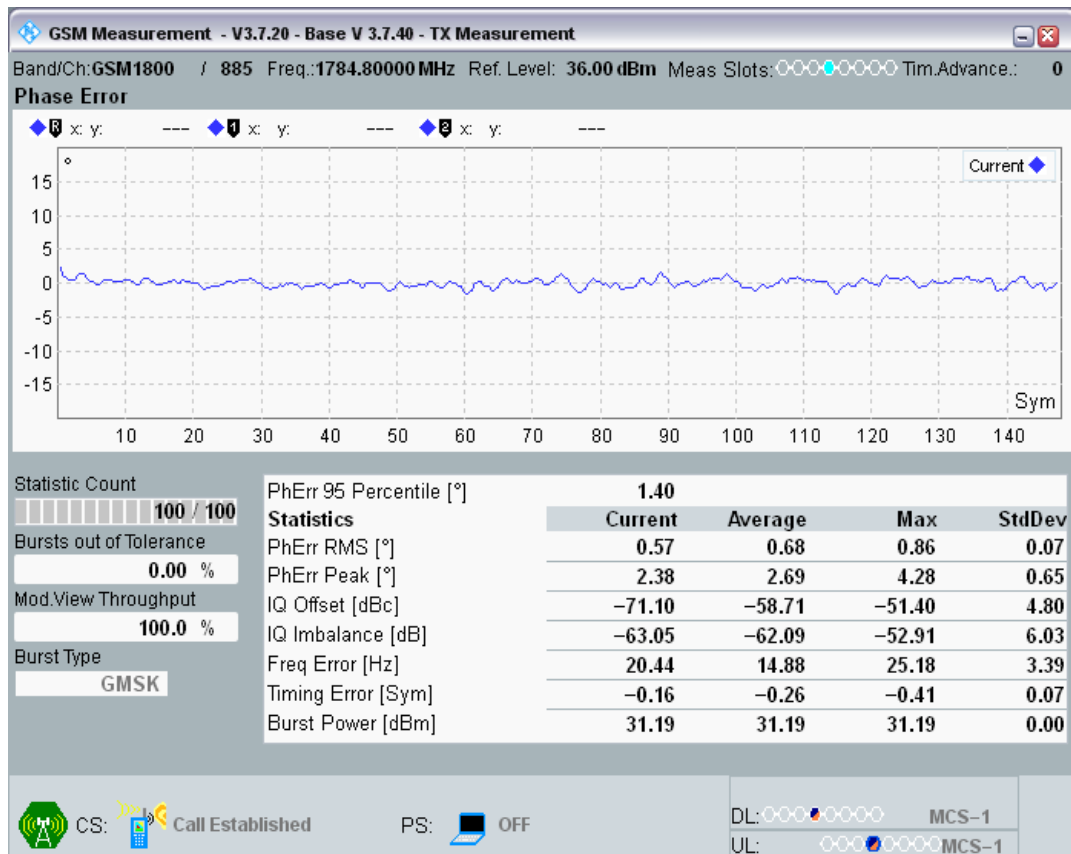


GSM900 Channel=124 PCL=5 HT100.png

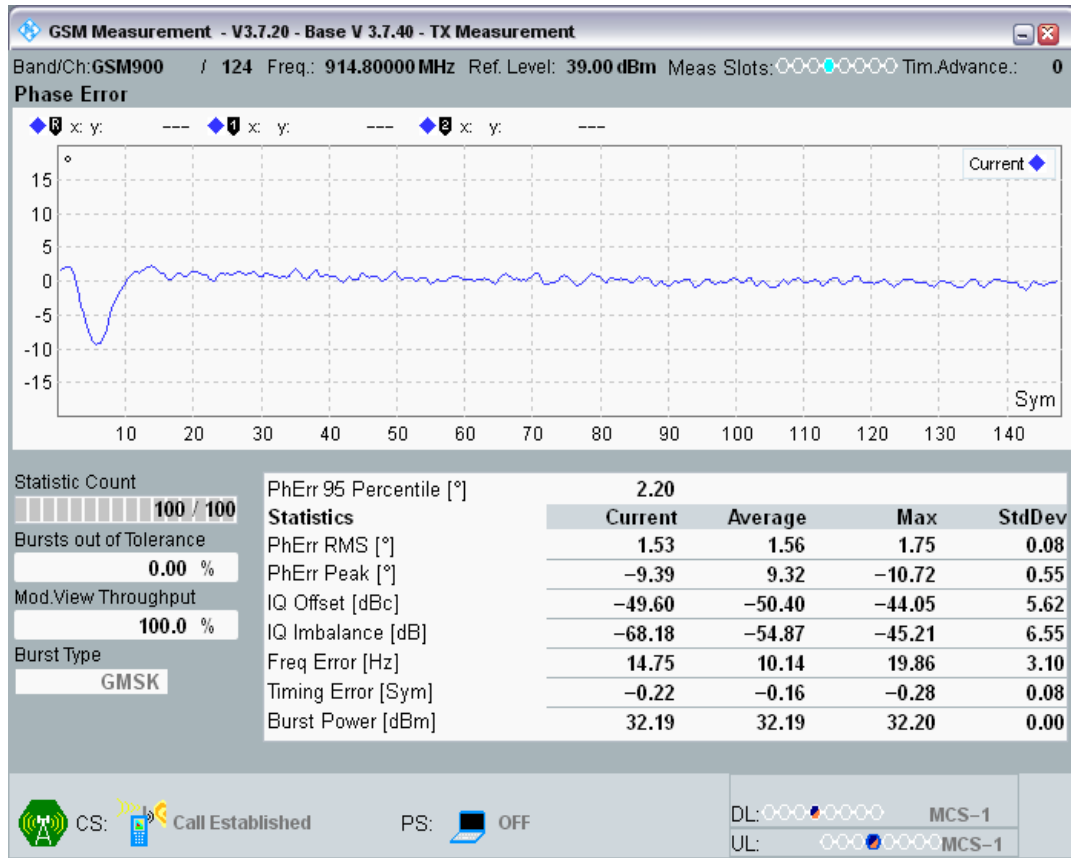


GSM900 Channel=124 PCL=5 RA250.png

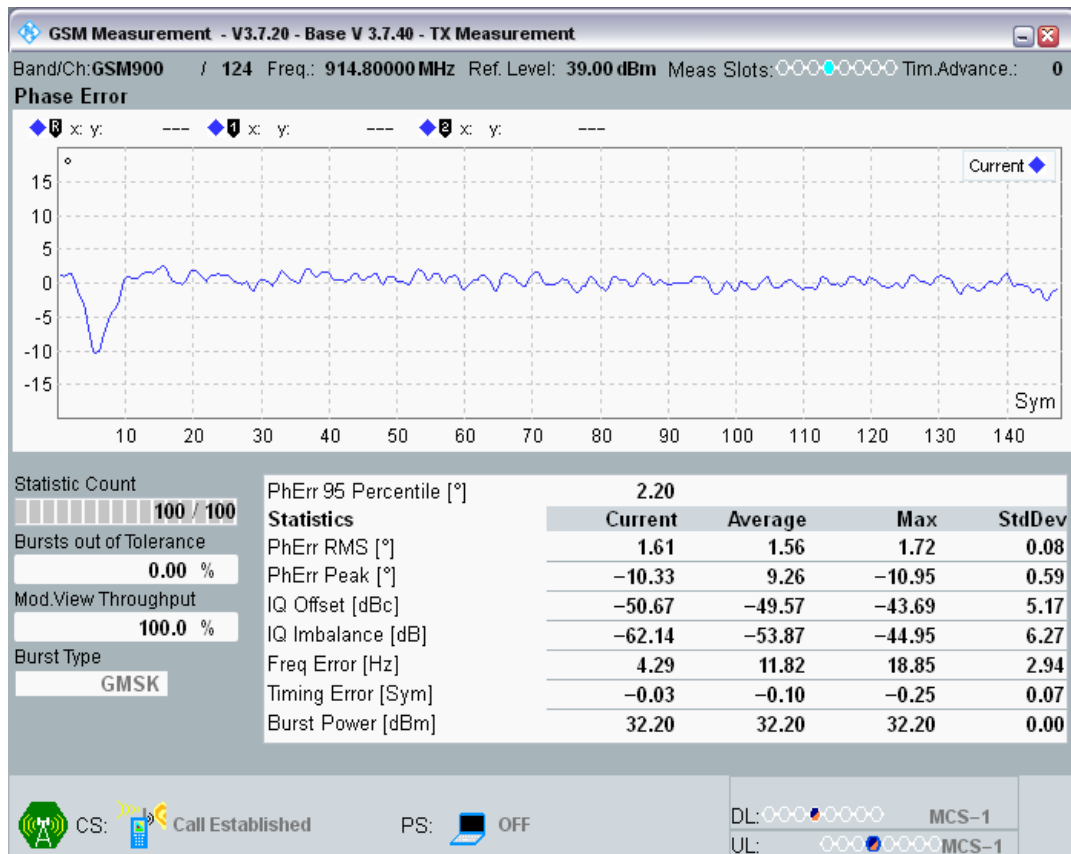


GSM900 Channel=124 PCL=5 TU3.png

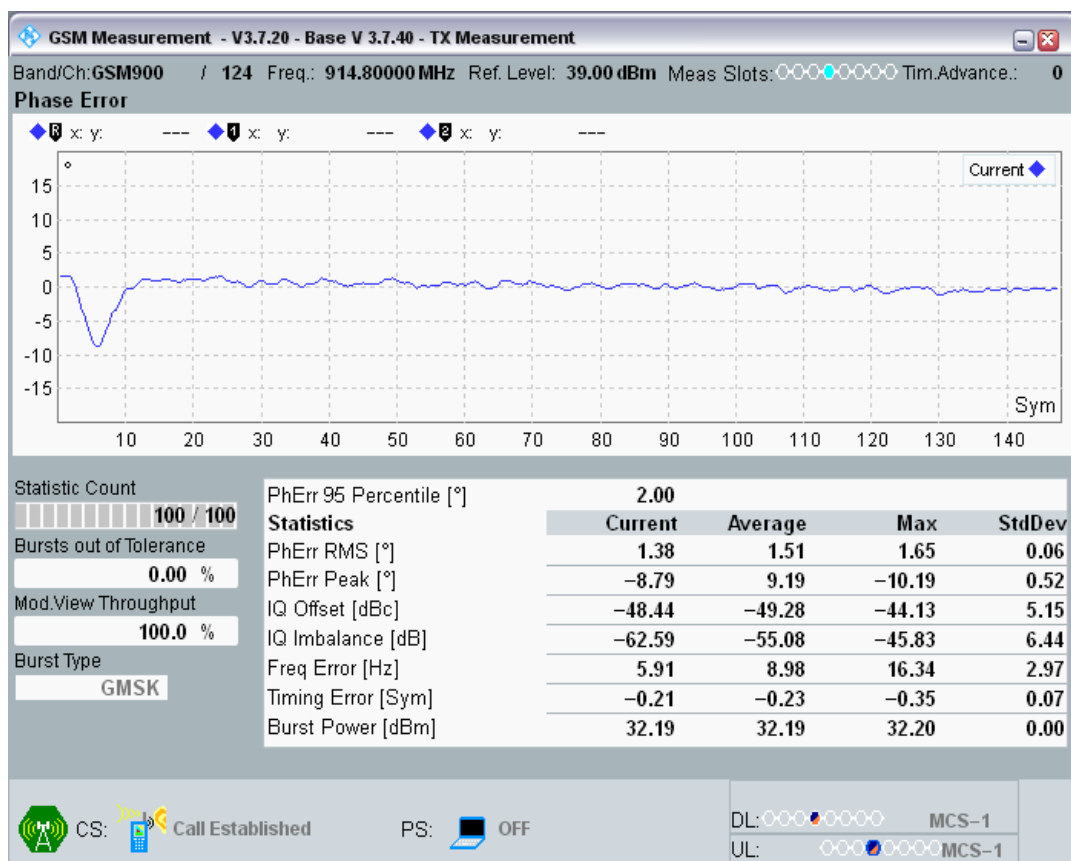


GSM900 Channel=124 PCL=5 TU50.png

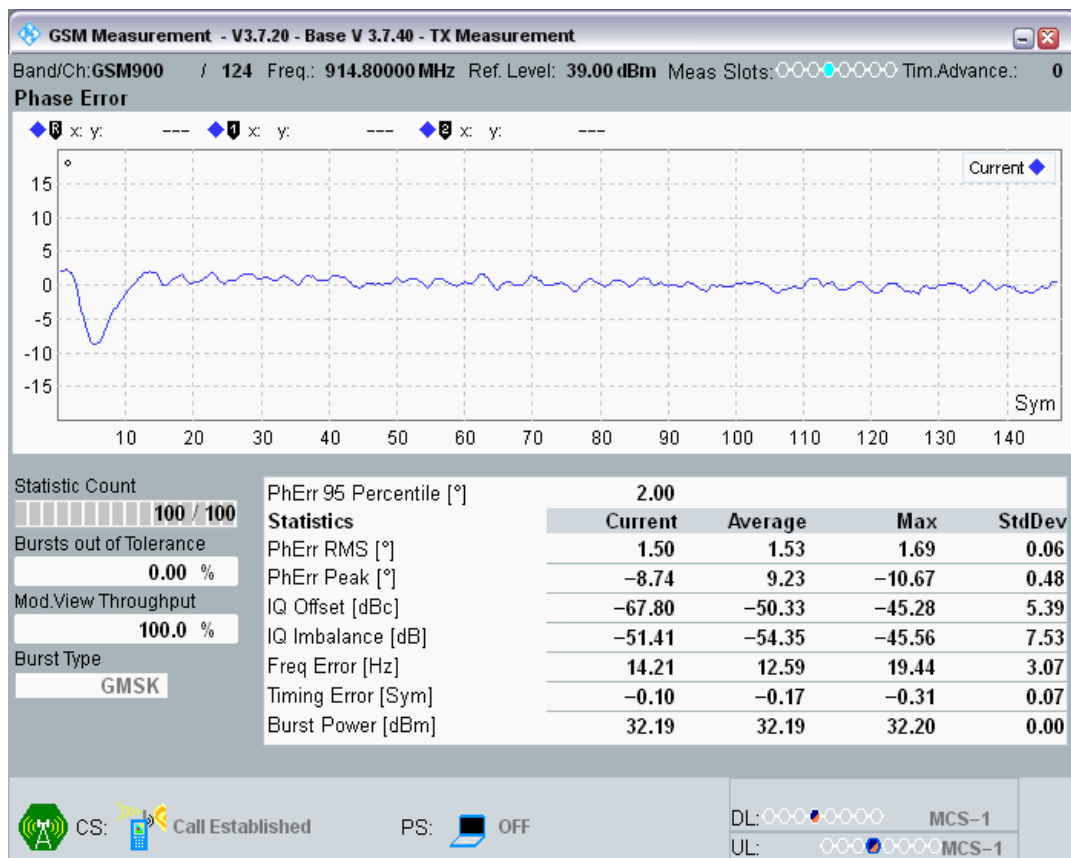


GSM900 Channel=60 PCL=5 HT100.png

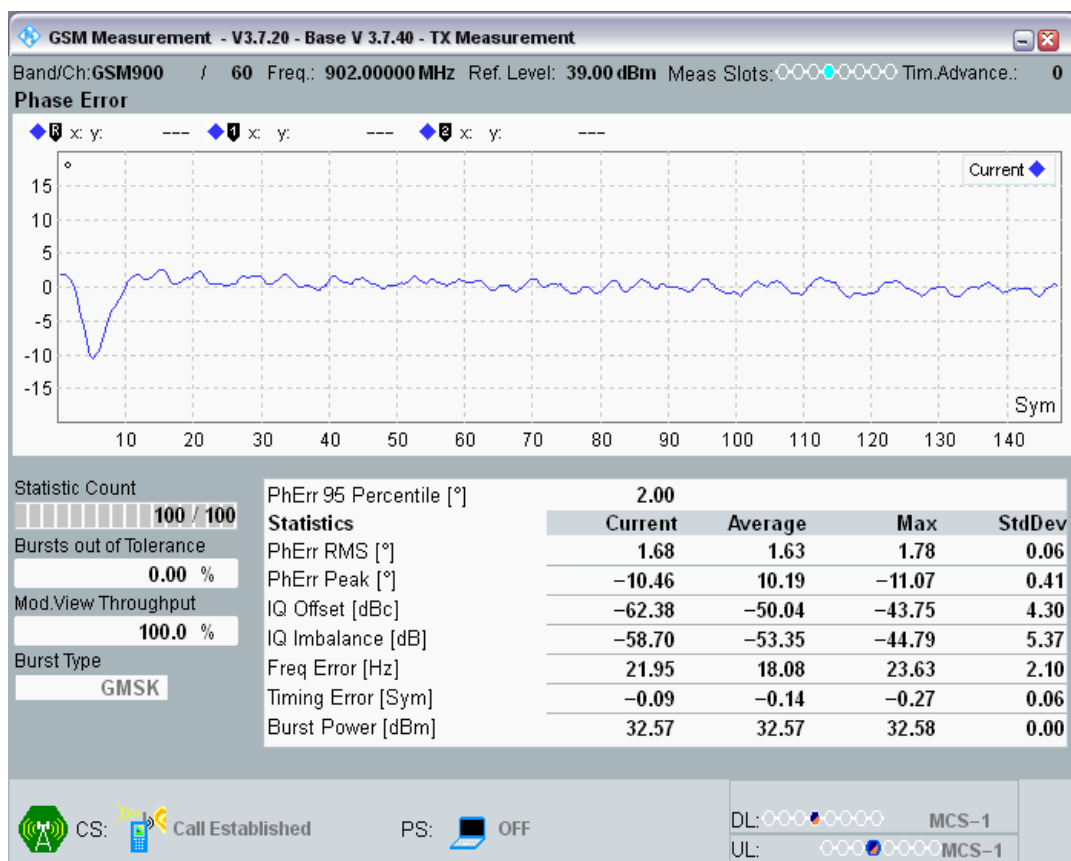


GSM900 Channel=60 PCL=5 RA250.png

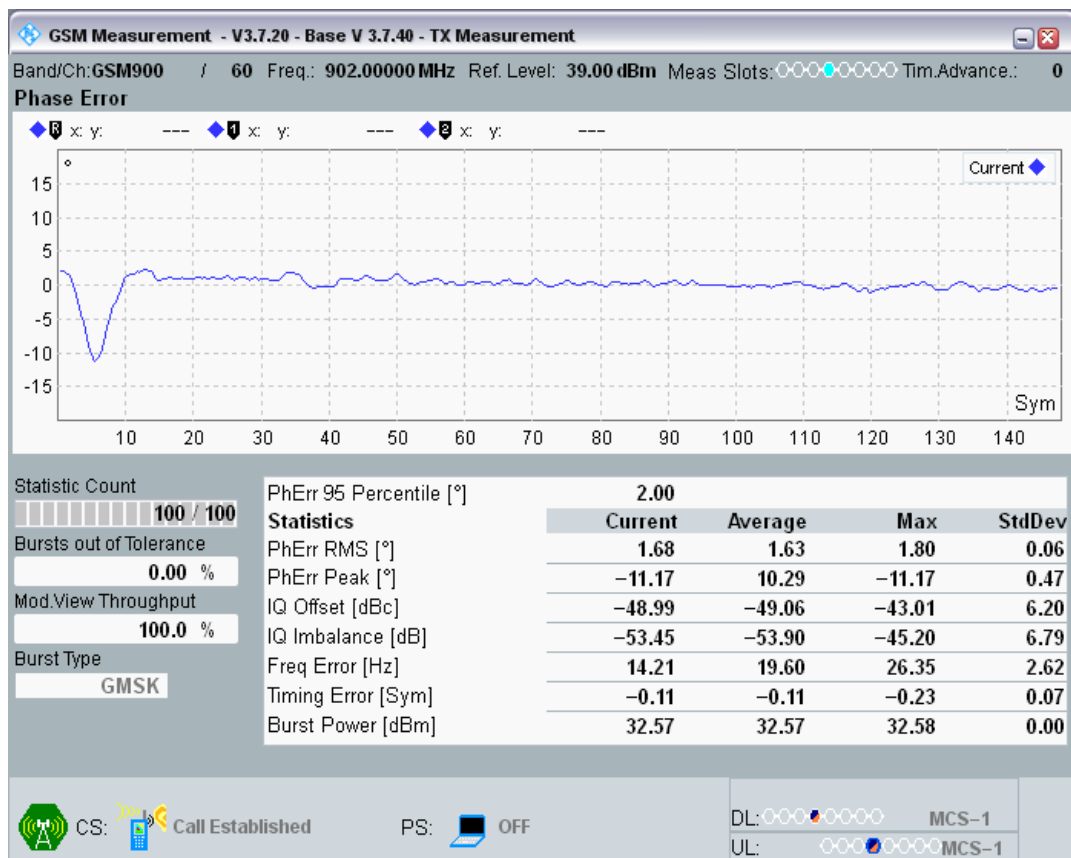


GSM900 Channel=60 PCL=5 TU3.png

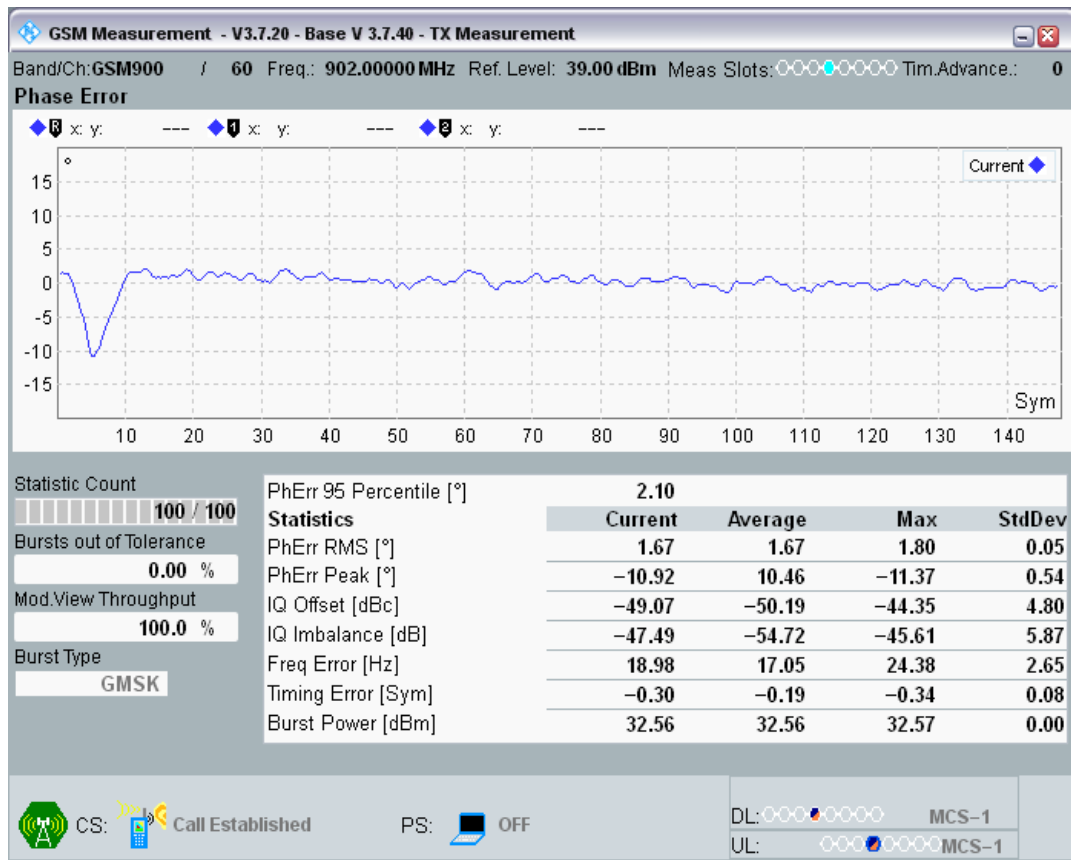


GSM900 Channel=60 PCL=5 TU50.png

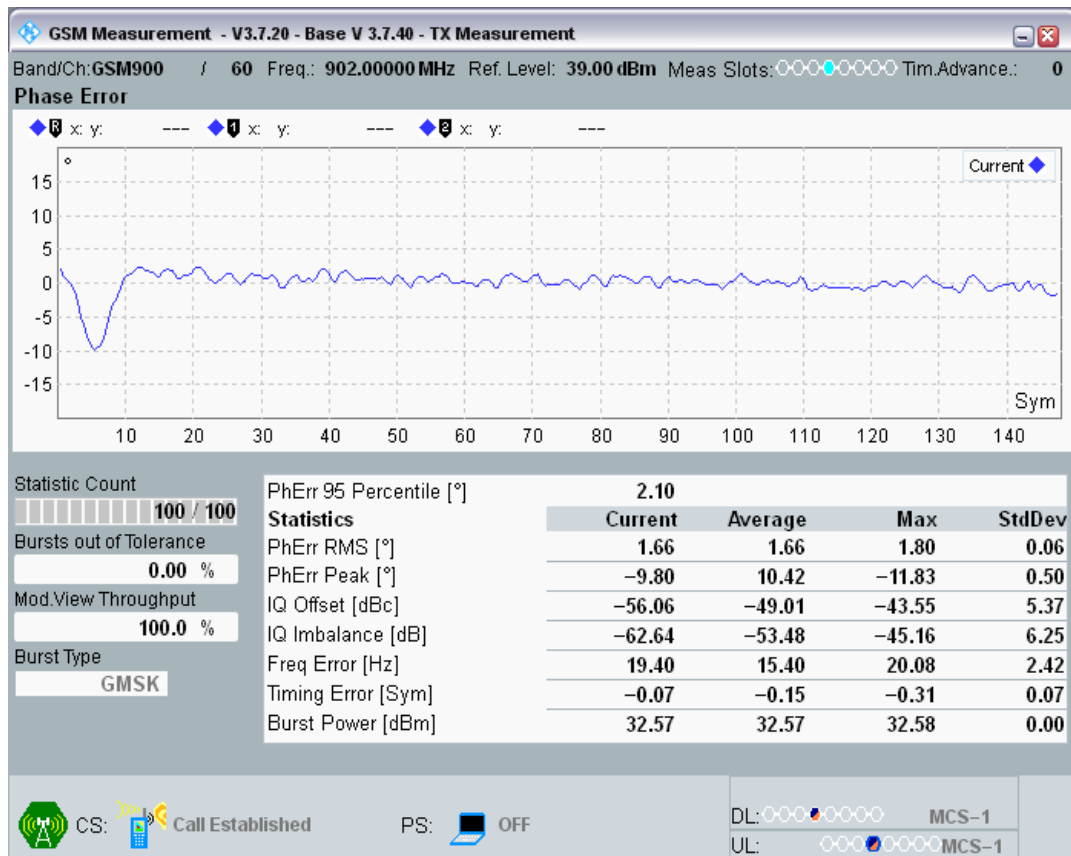


GSM900 Channel=975 PCL=5 HT100.png

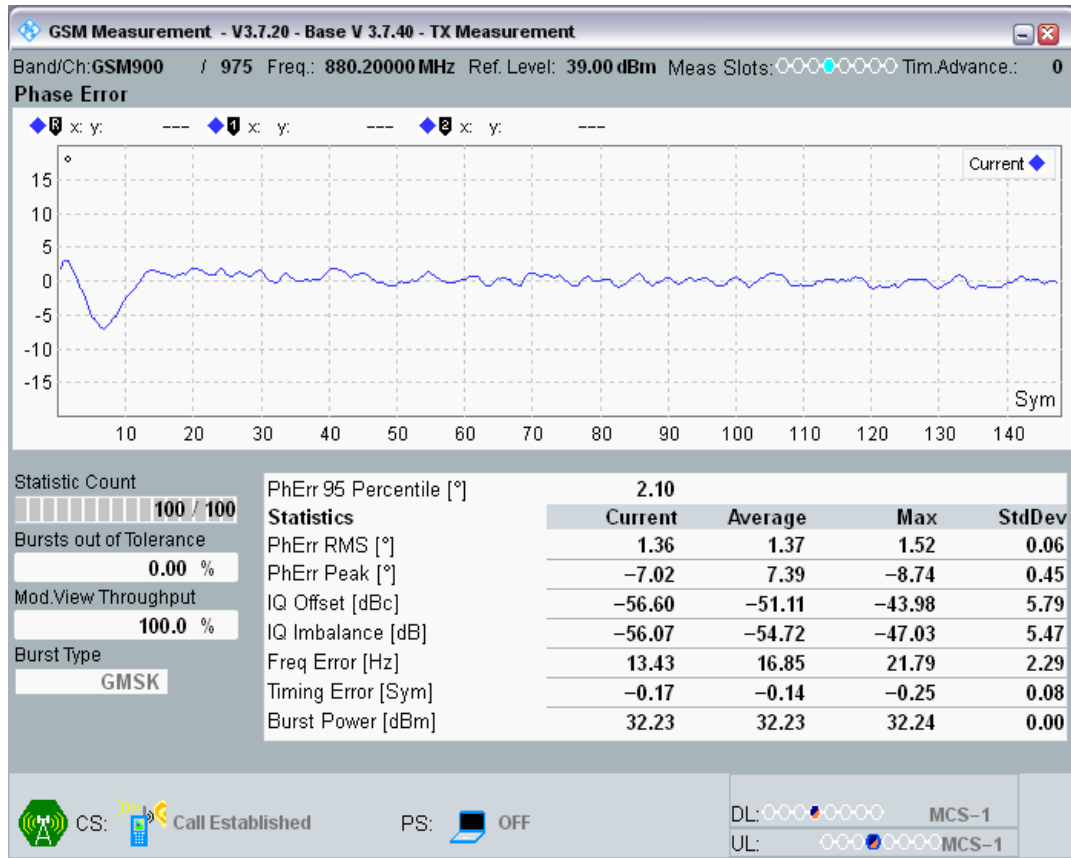


GSM900 Channel=975 PCL=5 RA250.png

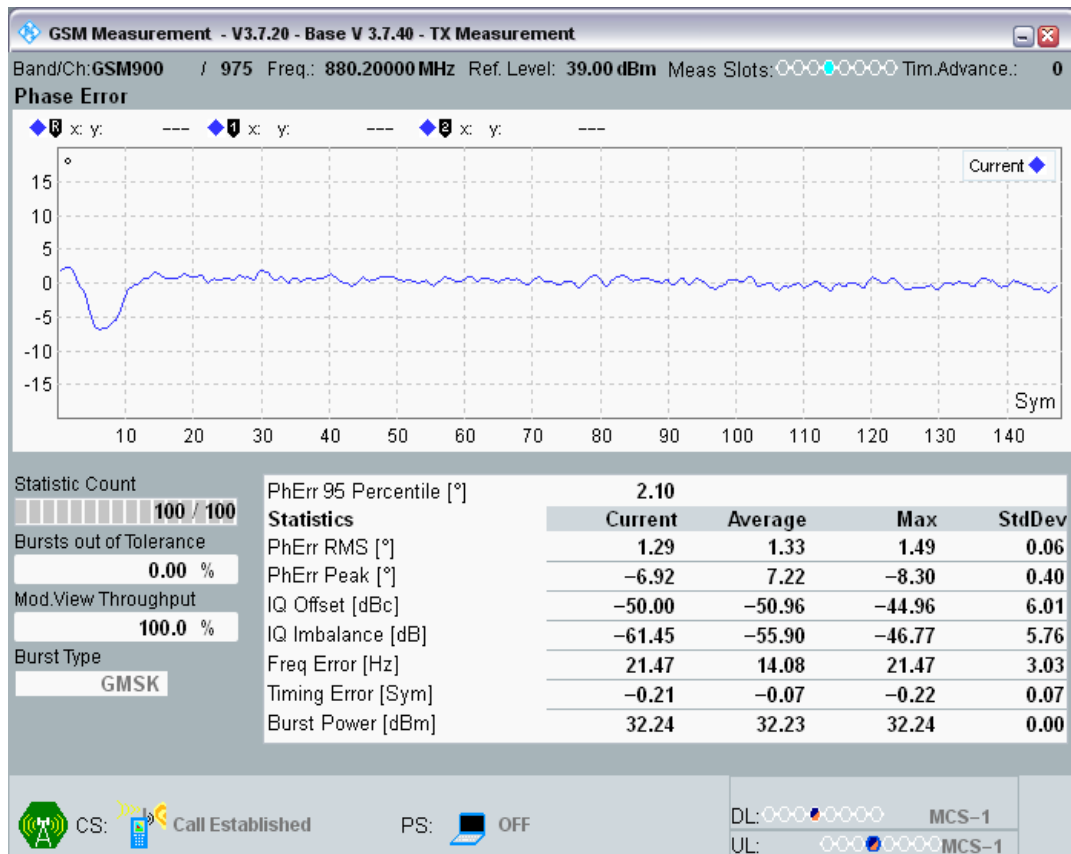

GSM900 Channel=975 PCL=5 TU3.png

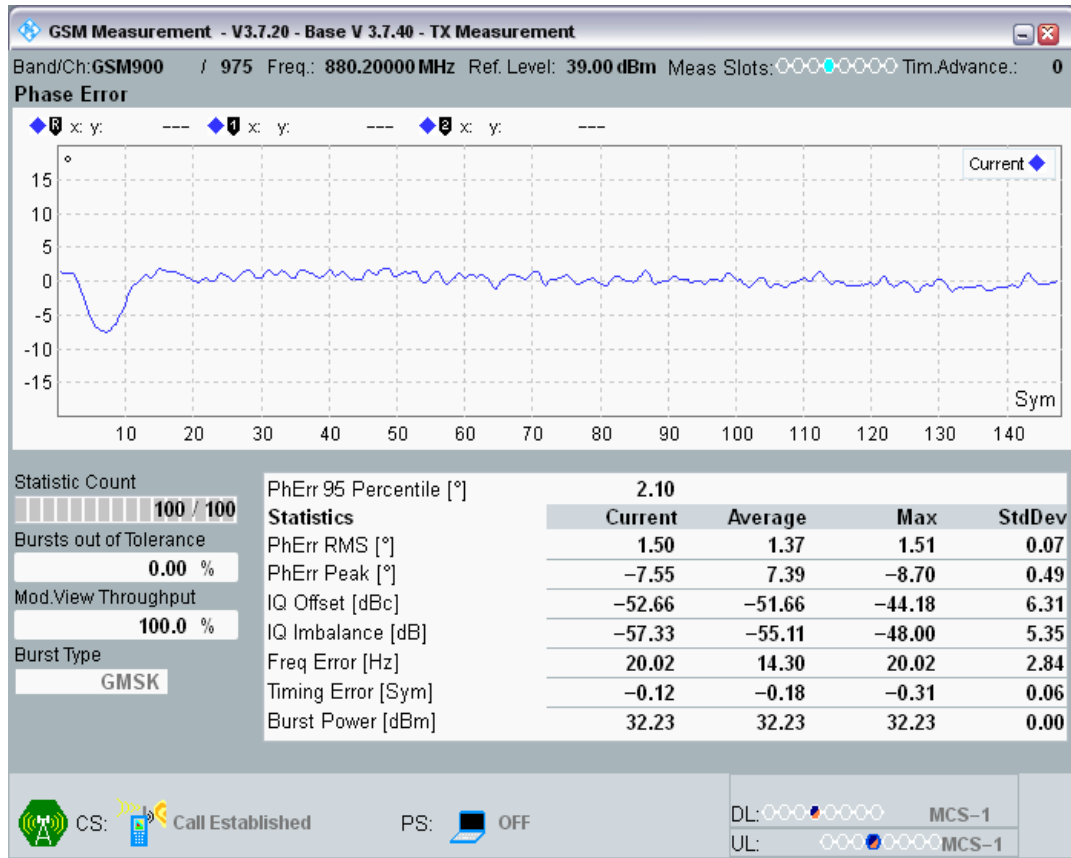

GSM900 Channel=975 PCL=5 TU50.png

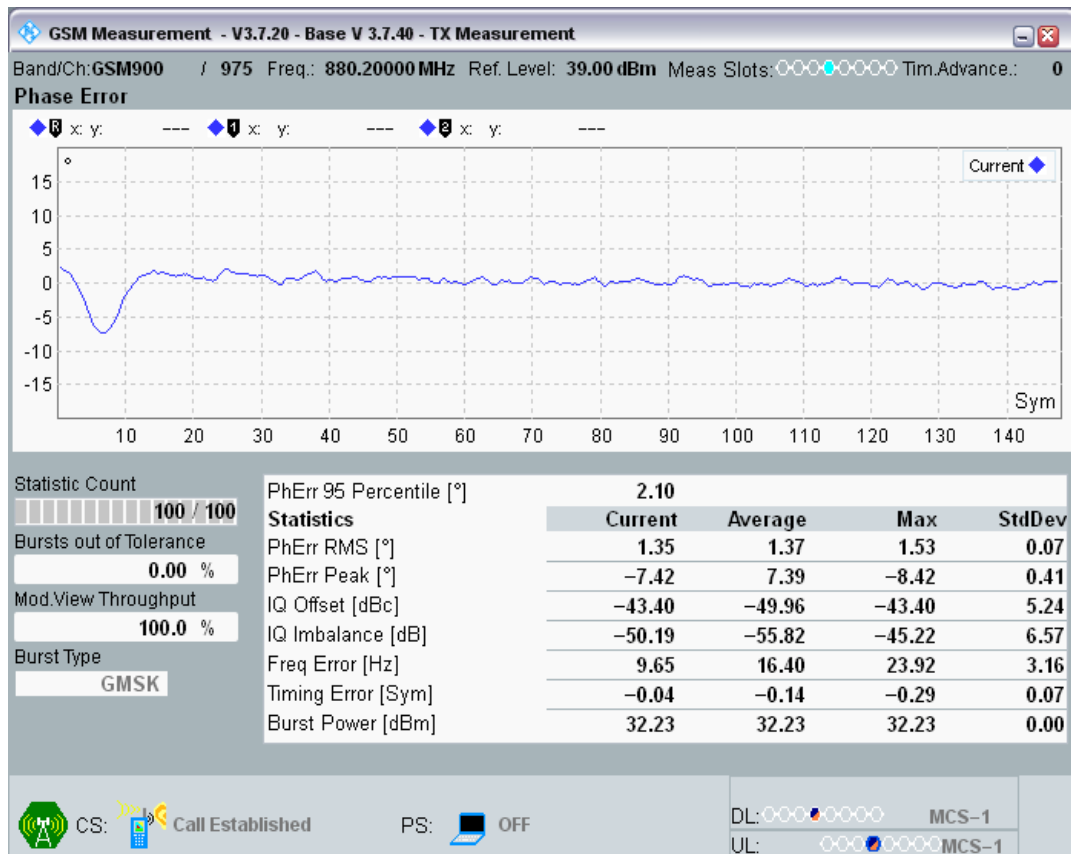

Clause 4.2.5 Transmitter output power and burst timing

Band	Channel	Frequency (MHz)	PCL	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
DCS1800	512	1710.2	0	Power	30.43341	28	32	PASS
DCS1800	512	1710.2	0	PvT	-	-	-	PASS
DCS1800	512	1710.2	1	Power	29.25568	25	31	PASS
DCS1800	512	1710.2	1	PvT	-	-	-	PASS
DCS1800	512	1710.2	2	Power	27.25983	23	29	PASS
DCS1800	512	1710.2	2	PvT	-	-	-	PASS
DCS1800	512	1710.2	3	Power	25.25961	21	27	PASS
DCS1800	512	1710.2	3	PvT	-	-	-	PASS
DCS1800	512	1710.2	4	Power	23.30951	19	25	PASS
DCS1800	512	1710.2	4	PvT	-	-	-	PASS
DCS1800	512	1710.2	5	Power	21.33353	17	23	PASS
DCS1800	512	1710.2	5	PvT	-	-	-	PASS
DCS1800	512	1710.2	6	Power	19.30115	15	21	PASS
DCS1800	512	1710.2	6	PvT	-	-	-	PASS
DCS1800	512	1710.2	7	Power	17.30478	13	19	PASS
DCS1800	512	1710.2	7	PvT	-	-	-	PASS
DCS1800	512	1710.2	8	Power	15.32925	11	17	PASS
DCS1800	512	1710.2	8	PvT	-	-	-	PASS
DCS1800	512	1710.2	9	Power	13.3027	8	16	PASS
DCS1800	512	1710.2	9	PvT	-	-	-	PASS
DCS1800	512	1710.2	10	Power	11.23529	6	14	PASS
DCS1800	512	1710.2	10	PvT	-	-	-	PASS
DCS1800	512	1710.2	11	Power	9.241821	4	12	PASS
DCS1800	512	1710.2	11	PvT	-	-	-	PASS
DCS1800	512	1710.2	12	Power	6.931	2	10	PASS
DCS1800	512	1710.2	12	PvT	-	-	-	PASS
DCS1800	512	1710.2	13	Power	4.847565	0	8	PASS
DCS1800	512	1710.2	13	PvT	-	-	-	PASS
DCS1800	512	1710.2	14	Power	2.92038	-3	7	PASS
DCS1800	512	1710.2	14	PvT	-	-	-	PASS
DCS1800	512	1710.2	15	Power	0.7102661	-5	5	PASS
DCS1800	512	1710.2	15	PvT	-	-	-	PASS
DCS1800	700	1747.8	0	Power	30.46265	28	32	PASS
DCS1800	700	1747.8	0	PvT	-	-	-	PASS
DCS1800	700	1747.8	1	Power	29.25592	25	31	PASS
DCS1800	700	1747.8	1	PvT	-	-	-	PASS
DCS1800	700	1747.8	2	Power	27.2637	23	29	PASS
DCS1800	700	1747.8	2	PvT	-	-	-	PASS
DCS1800	700	1747.8	3	Power	25.21783	21	27	PASS
DCS1800	700	1747.8	3	PvT	-	-	-	PASS
DCS1800	700	1747.8	4	Power	23.21817	19	25	PASS


DCS1800	700	1747.8	4	PvT	-	-	-	PASS
DCS1800	700	1747.8	5	Power	21.25775	17	23	PASS
DCS1800	700	1747.8	5	PvT	-	-	-	PASS
DCS1800	700	1747.8	6	Power	19.24033	15	21	PASS
DCS1800	700	1747.8	6	PvT	-	-	-	PASS
DCS1800	700	1747.8	7	Power	17.26065	13	19	PASS
DCS1800	700	1747.8	7	PvT	-	-	-	PASS
DCS1800	700	1747.8	8	Power	15.19922	11	17	PASS
DCS1800	700	1747.8	8	PvT	-	-	-	PASS
DCS1800	700	1747.8	9	Power	13.16974	8	16	PASS
DCS1800	700	1747.8	9	PvT	-	-	-	PASS
DCS1800	700	1747.8	10	Power	11.04071	6	14	PASS
DCS1800	700	1747.8	10	PvT	-	-	-	PASS
DCS1800	700	1747.8	11	Power	9.051758	4	12	PASS
DCS1800	700	1747.8	11	PvT	-	-	-	PASS
DCS1800	700	1747.8	12	Power	7.161041	2	10	PASS
DCS1800	700	1747.8	12	PvT	-	-	-	PASS
DCS1800	700	1747.8	13	Power	5.092438	0	8	PASS
DCS1800	700	1747.8	13	PvT	-	-	-	PASS
DCS1800	700	1747.8	14	Power	3.139862	-3	7	PASS
DCS1800	700	1747.8	14	PvT	-	-	-	PASS
DCS1800	700	1747.8	15	Power	0.9820557	-5	5	PASS
DCS1800	700	1747.8	15	PvT	-	-	-	PASS
DCS1800	885	1784.8	0	Power	31.09763	28	32	PASS
DCS1800	885	1784.8	0	PvT	-	-	-	PASS
DCS1800	885	1784.8	1	Power	29.9245	25	31	PASS
DCS1800	885	1784.8	1	PvT	-	-	-	PASS
DCS1800	885	1784.8	2	Power	27.93915	23	29	PASS
DCS1800	885	1784.8	2	PvT	-	-	-	PASS
DCS1800	885	1784.8	3	Power	25.92514	21	27	PASS
DCS1800	885	1784.8	3	PvT	-	-	-	PASS
DCS1800	885	1784.8	4	Power	23.89694	19	25	PASS
DCS1800	885	1784.8	4	PvT	-	-	-	PASS
DCS1800	885	1784.8	5	Power	21.88022	17	23	PASS
DCS1800	885	1784.8	5	PvT	-	-	-	PASS
DCS1800	885	1784.8	6	Power	19.84299	15	21	PASS
DCS1800	885	1784.8	6	PvT	-	-	-	PASS
DCS1800	885	1784.8	7	Power	17.82819	13	19	PASS
DCS1800	885	1784.8	7	PvT	-	-	-	PASS
DCS1800	885	1784.8	8	Power	15.81473	11	17	PASS
DCS1800	885	1784.8	8	PvT	-	-	-	PASS
DCS1800	885	1784.8	9	Power	13.71896	8	16	PASS
DCS1800	885	1784.8	9	PvT	-	-	-	PASS

DCS1800	885	1784.8	10	Power	11.5126	6	14	PASS
DCS1800	885	1784.8	10	PvT	-	-	-	PASS
DCS1800	885	1784.8	11	Power	9.498627	4	12	PASS
DCS1800	885	1784.8	11	PvT	-	-	-	PASS
DCS1800	885	1784.8	12	Power	7.867126	2	10	PASS
DCS1800	885	1784.8	12	PvT	-	-	-	PASS
DCS1800	885	1784.8	13	Power	5.789886	0	8	PASS
DCS1800	885	1784.8	13	PvT	-	-	-	PASS
DCS1800	885	1784.8	14	Power	3.840759	-3	7	PASS
DCS1800	885	1784.8	14	PvT	-	-	-	PASS
DCS1800	885	1784.8	15	Power	1.686798	-5	5	PASS
DCS1800	885	1784.8	15	PvT	-	-	-	PASS
GSM900	975	880.2	5	Power	32.36642	31	35	PASS
GSM900	975	880.2	5	PvT	-	-	-	PASS
GSM900	975	880.2	6	Power	31.62451	28	34	PASS
GSM900	975	880.2	6	PvT	-	-	-	PASS
GSM900	975	880.2	7	Power	29.65784	26	32	PASS
GSM900	975	880.2	7	PvT	-	-	-	PASS
GSM900	975	880.2	8	Power	27.6095	24	30	PASS
GSM900	975	880.2	8	PvT	-	-	-	PASS
GSM900	975	880.2	9	Power	25.58282	22	28	PASS
GSM900	975	880.2	9	PvT	-	-	-	PASS
GSM900	975	880.2	10	Power	23.60074	20	26	PASS
GSM900	975	880.2	10	PvT	-	-	-	PASS
GSM900	975	880.2	11	Power	21.89383	18	24	PASS
GSM900	975	880.2	11	PvT	-	-	-	PASS
GSM900	975	880.2	12	Power	19.90189	16	22	PASS
GSM900	975	880.2	12	PvT	-	-	-	PASS
GSM900	975	880.2	13	Power	17.94464	14	20	PASS
GSM900	975	880.2	13	PvT	-	-	-	PASS
GSM900	975	880.2	14	Power	15.89087	12	18	PASS
GSM900	975	880.2	14	PvT	-	-	-	PASS
GSM900	975	880.2	15	Power	13.80203	10	16	PASS
GSM900	975	880.2	15	PvT	-	-	-	PASS
GSM900	975	880.2	16	Power	11.79608	6	16	PASS
GSM900	975	880.2	16	PvT	-	-	-	PASS
GSM900	975	880.2	17	Power	9.797729	4	14	PASS
GSM900	975	880.2	17	PvT	-	-	-	PASS
GSM900	975	880.2	18	Power	7.836334	2	12	PASS
GSM900	975	880.2	18	PvT	-	-	-	PASS
GSM900	975	880.2	19	Power	4.600952	0	10	PASS
GSM900	975	880.2	19	PvT	-	-	-	PASS
GSM900	60	902	5	Power	32.55341	31	35	PASS


GSM900	60	902	5	PvT	-	-	-	PASS
GSM900	60	902	6	Power	31.77615	28	34	PASS
GSM900	60	902	6	PvT	-	-	-	PASS
GSM900	60	902	7	Power	29.80801	26	32	PASS
GSM900	60	902	7	PvT	-	-	-	PASS
GSM900	60	902	8	Power	27.74442	24	30	PASS
GSM900	60	902	8	PvT	-	-	-	PASS
GSM900	60	902	9	Power	25.69467	22	28	PASS
GSM900	60	902	9	PvT	-	-	-	PASS
GSM900	60	902	10	Power	23.68982	20	26	PASS
GSM900	60	902	10	PvT	-	-	-	PASS
GSM900	60	902	11	Power	21.61981	18	24	PASS
GSM900	60	902	11	PvT	-	-	-	PASS
GSM900	60	902	12	Power	19.64685	16	22	PASS
GSM900	60	902	12	PvT	-	-	-	PASS
GSM900	60	902	13	Power	17.66684	14	20	PASS
GSM900	60	902	13	PvT	-	-	-	PASS
GSM900	60	902	14	Power	15.61374	12	18	PASS
GSM900	60	902	14	PvT	-	-	-	PASS
GSM900	60	902	15	Power	13.49075	10	16	PASS
GSM900	60	902	15	PvT	-	-	-	PASS
GSM900	60	902	16	Power	11.48654	6	16	PASS
GSM900	60	902	16	PvT	-	-	-	PASS
GSM900	60	902	17	Power	9.477844	4	14	PASS
GSM900	60	902	17	PvT	-	-	-	PASS
GSM900	60	902	18	Power	7.503174	2	12	PASS
GSM900	60	902	18	PvT	-	-	-	PASS
GSM900	60	902	19	Power	4.228668	0	10	PASS
GSM900	60	902	19	PvT	-	-	-	PASS
GSM900	124	914.8	5	Power	32.08884	31	35	PASS
GSM900	124	914.8	5	PvT	-	-	-	PASS
GSM900	124	914.8	6	Power	31.32547	28	34	PASS
GSM900	124	914.8	6	PvT	-	-	-	PASS
GSM900	124	914.8	7	Power	29.32672	26	32	PASS
GSM900	124	914.8	7	PvT	-	-	-	PASS
GSM900	124	914.8	8	Power	27.30649	24	30	PASS
GSM900	124	914.8	8	PvT	-	-	-	PASS
GSM900	124	914.8	9	Power	25.25385	22	28	PASS
GSM900	124	914.8	9	PvT	-	-	-	PASS
GSM900	124	914.8	10	Power	23.24283	20	26	PASS
GSM900	124	914.8	10	PvT	-	-	-	PASS
GSM900	124	914.8	11	Power	21.63556	18	24	PASS
GSM900	124	914.8	11	PvT	-	-	-	PASS

GSM900	124	914.8	12	Power	19.63452	16	22	PASS
GSM900	124	914.8	12	PvT	-	-	-	PASS
GSM900	124	914.8	13	Power	17.65829	14	20	PASS
GSM900	124	914.8	13	PvT	-	-	-	PASS
GSM900	124	914.8	14	Power	15.6293	12	18	PASS
GSM900	124	914.8	14	PvT	-	-	-	PASS
GSM900	124	914.8	15	Power	13.59842	10	16	PASS
GSM900	124	914.8	15	PvT	-	-	-	PASS
GSM900	124	914.8	16	Power	11.49817	6	16	PASS
GSM900	124	914.8	16	PvT	-	-	-	PASS
GSM900	124	914.8	17	Power	9.551453	4	14	PASS
GSM900	124	914.8	17	PvT	-	-	-	PASS
GSM900	124	914.8	18	Power	7.556824	2	12	PASS
GSM900	124	914.8	18	PvT	-	-	-	PASS
GSM900	124	914.8	19	Power	4.291016	0	10	PASS
GSM900	124	914.8	19	PvT	-	-	-	PASS

DCS1800 Channel=512 PCL=0.png

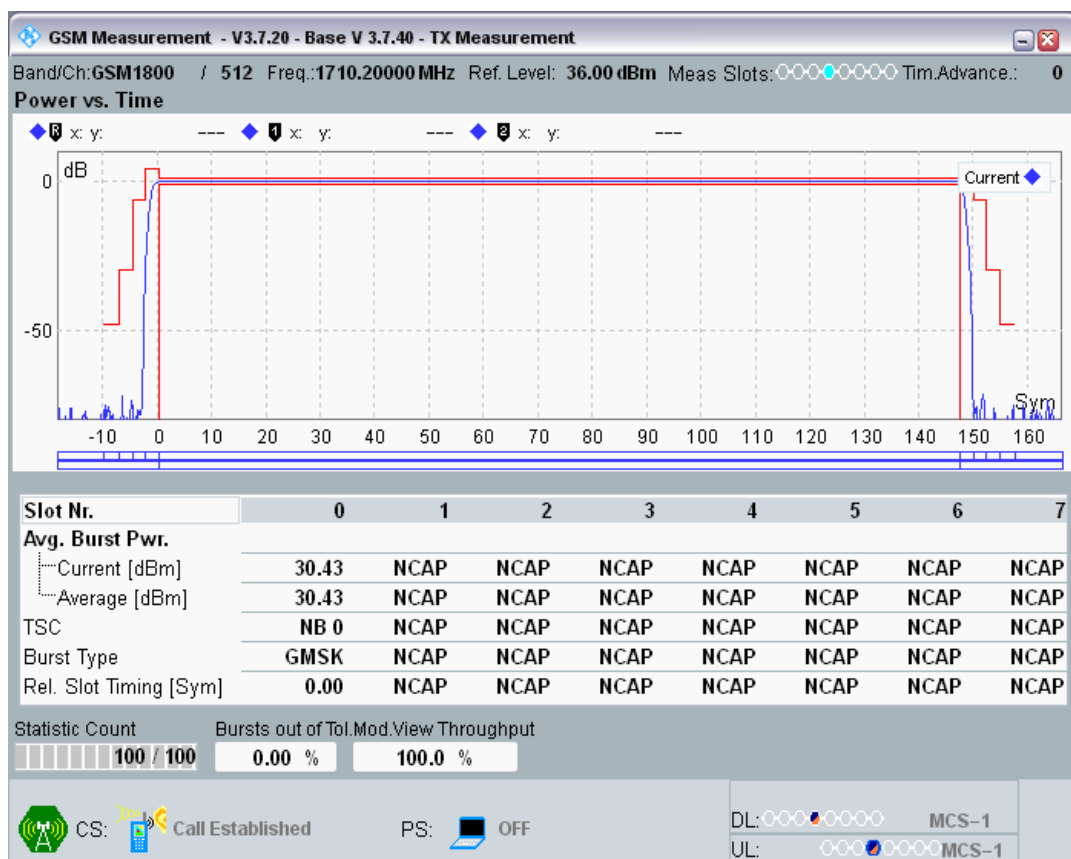


DCS1800 Channel=512 PCL=15.png

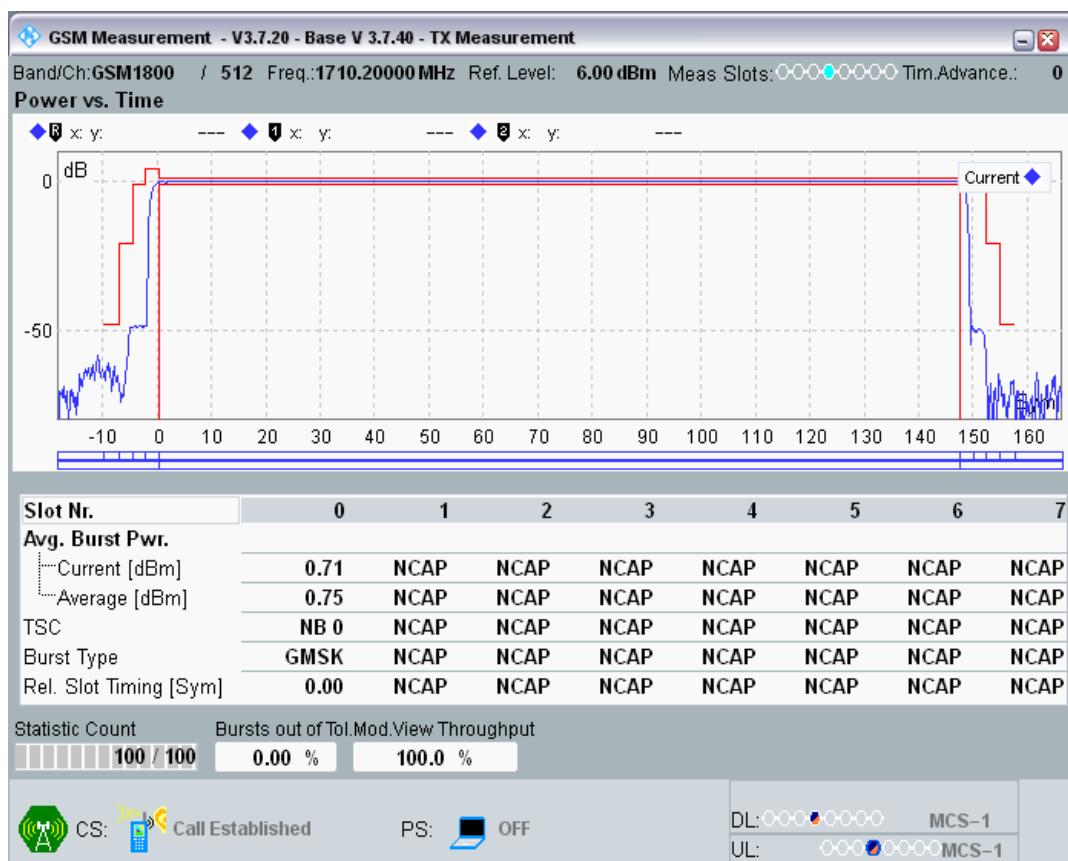

DCS1800 Channel=700 PCL=0.png



DCS1800 Channel=700 PCL=15.png

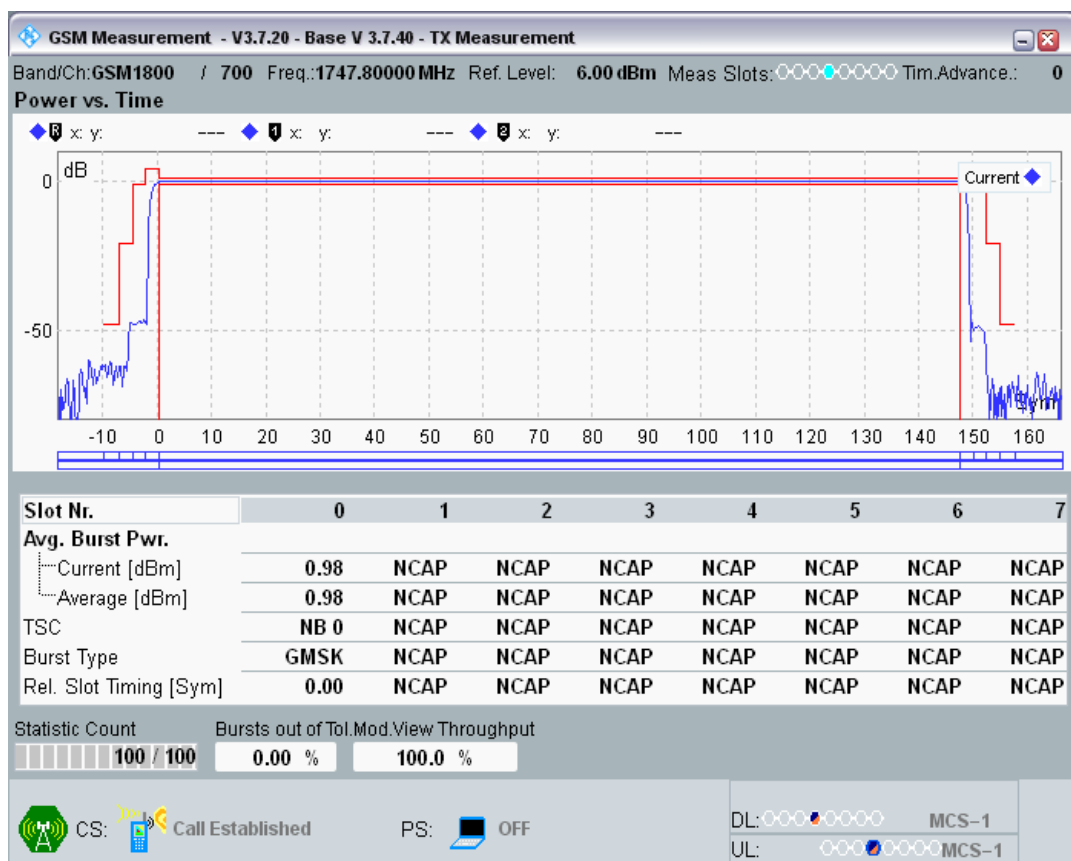

DCS1800 Channel=885 PCL=0.png



DCS1800 Channel=885 PCL=15.png



GSM900 Channel=124 PCL=19.png



GSM900 Channel=124 PCL=5.png



GSM900 Channel=60 PCL=19.png




GSM900 Channel=60 PCL=5.png



GSM900 Channel=975 PCL=19.png



GSM900 Channel=975 PCL=5.png

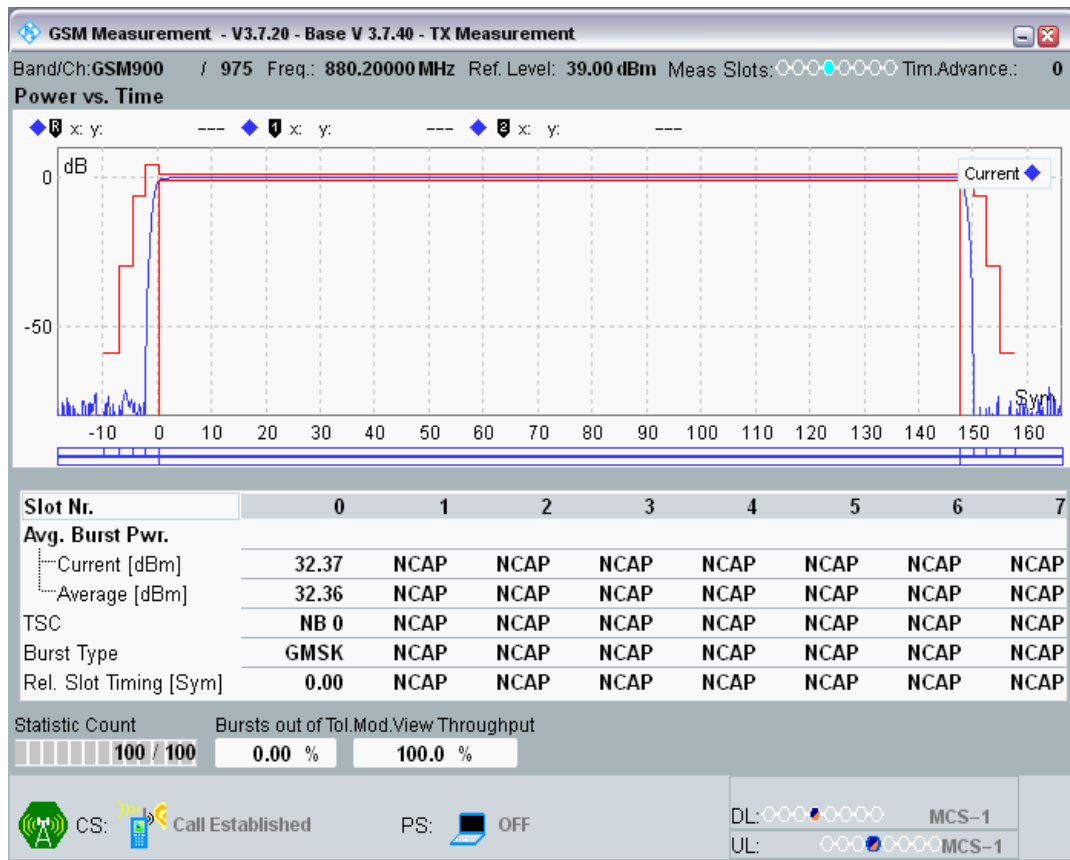

Clause 4.2.6 Transmitter-Modulation Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-80.59	-60	-58.31	-56	PASS
DCS1800	512	1710.2	0	-1600 KHz	-80.27	-60	-57.98	-56	PASS
DCS1800	512	1710.2	0	-1400 KHz	-79.45	-60	-57.17	-56	PASS
DCS1800	512	1710.2	0	-1200 KHz	-78.20	-60	-55.92	-56	PASS
DCS1800	512	1710.2	0	-1000 KHz	-76.43	-60	-54.15	-56	PASS
DCS1800	512	1710.2	0	-800 KHz	-75.53	-60	-53.24	-56	PASS
DCS1800	512	1710.2	0	-600 KHz	-73.75	-60	-51.47	-56	PASS
DCS1800	512	1710.2	0	-400 KHz	-68.10	-60	-45.82	-36	PASS
DCS1800	512	1710.2	0	-250 KHz	-41.15	-33	-18.87	-36	PASS

DCS1800	512	1710.2	0	-200 KHz	-36.19	-30	-13.91	-36	PASS
DCS1800	512	1710.2	0	-100 KHz	-8.36	0.5	13.92	-36	PASS
DCS1800	512	1710.2	0	100 KHz	-8.42	0.5	13.86	-36	PASS
DCS1800	512	1710.2	0	200 KHz	-36.42	-30	-14.14	-36	PASS
DCS1800	512	1710.2	0	250 KHz	-40.86	-33	-18.57	-36	PASS
DCS1800	512	1710.2	0	400 KHz	-68.09	-60	-45.81	-36	PASS
DCS1800	512	1710.2	0	600 KHz	-73.51	-60	-51.23	-56	PASS
DCS1800	512	1710.2	0	800 KHz	-75.18	-60	-52.90	-56	PASS
DCS1800	512	1710.2	0	1000 KHz	-75.99	-60	-53.71	-56	PASS
DCS1800	512	1710.2	0	1200 KHz	-77.93	-60	-55.65	-56	PASS
DCS1800	512	1710.2	0	1400 KHz	-79.04	-60	-56.75	-56	PASS
DCS1800	512	1710.2	0	1600 KHz	-80.20	-60	-57.92	-56	PASS
DCS1800	512	1710.2	0	1800 KHz	-80.86	-60	-58.58	-56	PASS
DCS1800	700	1747.8	0	-1800 KHz	-81.18	-60	-58.50	-56	PASS
DCS1800	700	1747.8	0	-1600 KHz	-80.49	-60	-57.81	-56	PASS
DCS1800	700	1747.8	0	-1400 KHz	-79.74	-60	-57.06	-56	PASS
DCS1800	700	1747.8	0	-1200 KHz	-78.50	-60	-55.81	-56	PASS
DCS1800	700	1747.8	0	-1000 KHz	-76.59	-60	-53.91	-56	PASS
DCS1800	700	1747.8	0	-800 KHz	-76.04	-60	-53.36	-56	PASS
DCS1800	700	1747.8	0	-600 KHz	-74.00	-60	-51.32	-56	PASS
DCS1800	700	1747.8	0	-400 KHz	-68.46	-60	-45.78	-36	PASS
DCS1800	700	1747.8	0	-250 KHz	-41.33	-33	-18.64	-36	PASS
DCS1800	700	1747.8	0	-200 KHz	-36.58	-30	-13.90	-36	PASS
DCS1800	700	1747.8	0	-100 KHz	-8.65	0.5	14.03	-36	PASS
DCS1800	700	1747.8	0	100 KHz	-8.95	0.5	13.73	-36	PASS


DCS1800	700	1747.8	0	200 KHz	-36.75	-30	-14.06	-36	PASS
DCS1800	700	1747.8	0	250 KHz	-41.14	-33	-18.46	-36	PASS
DCS1800	700	1747.8	0	400 KHz	-68.50	-60	-45.82	-36	PASS
DCS1800	700	1747.8	0	600 KHz	-73.76	-60	-51.07	-56	PASS
DCS1800	700	1747.8	0	800 KHz	-75.73	-60	-53.04	-56	PASS
DCS1800	700	1747.8	0	1000 KHz	-76.46	-60	-53.78	-56	PASS
DCS1800	700	1747.8	0	1200 KHz	-78.17	-60	-55.49	-56	PASS
DCS1800	700	1747.8	0	1400 KHz	-79.38	-60	-56.70	-56	PASS
DCS1800	700	1747.8	0	1600 KHz	-80.60	-60	-57.92	-56	PASS
DCS1800	700	1747.8	0	1800 KHz	-81.45	-60	-58.77	-56	PASS
DCS1800	885	1784.8	0	-1800 KHz	-81.17	-60	-57.98	-56	PASS
DCS1800	885	1784.8	0	-1600 KHz	-80.88	-60	-57.68	-56	PASS
DCS1800	885	1784.8	0	-1400 KHz	-79.65	-60	-56.45	-56	PASS
DCS1800	885	1784.8	0	-1200 KHz	-78.54	-60	-55.34	-56	PASS
DCS1800	885	1784.8	0	-1000 KHz	-76.92	-60	-53.72	-56	PASS
DCS1800	885	1784.8	0	-800 KHz	-75.82	-60	-52.62	-56	PASS
DCS1800	885	1784.8	0	-600 KHz	-73.61	-60	-50.41	-56	PASS
DCS1800	885	1784.8	0	-400 KHz	-68.28	-60	-45.09	-36	PASS
DCS1800	885	1784.8	0	-250 KHz	-40.88	-33	-17.69	-36	PASS
DCS1800	885	1784.8	0	-200 KHz	-36.55	-30	-13.36	-36	PASS
DCS1800	885	1784.8	0	-100 KHz	-8.49	0.5	14.71	-36	PASS
DCS1800	885	1784.8	0	100 KHz	-8.72	0.5	14.48	-36	PASS
DCS1800	885	1784.8	0	200 KHz	-36.63	-30	-13.43	-36	PASS
DCS1800	885	1784.8	0	250 KHz	-40.75	-33	-17.56	-36	PASS
DCS1800	885	1784.8	0	400 KHz	-67.96	-60	-44.76	-36	PASS
DCS1800	885	1784.8	0	600 KHz	-73.34	-60	-50.14	-56	PASS
DCS1800	885	1784.8	0	800 KHz	-75.60	-60	-52.41	-56	PASS

DCS1800	885	1784.8	0	1000 KHz	-76.28	-60	-53.08	-56	PASS
DCS1800	885	1784.8	0	1200 KHz	-78.33	-60	-55.13	-56	PASS
DCS1800	885	1784.8	0	1400 KHz	-79.66	-60	-56.46	-56	PASS
DCS1800	885	1784.8	0	1600 KHz	-80.94	-60	-57.74	-56	PASS
DCS1800	885	1784.8	0	1800 KHz	-81.09	-60	-57.89	-56	PASS
GSM900	975	880.2	5	-1800 KHz	-81.19	-60	-56.55	-51	PASS
GSM900	975	880.2	5	-1600 KHz	-81.75	-60	-57.11	-51	PASS
GSM900	975	880.2	5	-1400 KHz	-80.36	-60	-55.72	-51	PASS
GSM900	975	880.2	5	-1200 KHz	-79.02	-60	-54.38	-51	PASS
GSM900	975	880.2	5	-1000 KHz	-76.95	-60	-52.31	-51	PASS
GSM900	975	880.2	5	-800 KHz	-76.75	-60	-52.11	-51	PASS
GSM900	975	880.2	5	-600 KHz	-75.47	-60	-50.83	-51	PASS
GSM900	975	880.2	5	-400 KHz	-70.61	-60	-45.97	-36	PASS
GSM900	975	880.2	5	-250 KHz	-41.35	-33	-16.71	-36	PASS
GSM900	975	880.2	5	-200 KHz	-36.69	-30	-12.05	-36	PASS
GSM900	975	880.2	5	-100 KHz	-8.72	0.5	15.92	-36	PASS
GSM900	975	880.2	5	100 KHz	-8.69	0.5	15.95	-36	PASS
GSM900	975	880.2	5	200 KHz	-36.85	-30	-12.21	-36	PASS
GSM900	975	880.2	5	250 KHz	-41.13	-33	-16.49	-36	PASS
GSM900	975	880.2	5	400 KHz	-70.56	-60	-45.92	-36	PASS
GSM900	975	880.2	5	600 KHz	-75.39	-60	-50.75	-51	PASS
GSM900	975	880.2	5	800 KHz	-76.45	-60	-51.81	-51	PASS
GSM900	975	880.2	5	1000 KHz	-76.51	-60	-51.87	-51	PASS
GSM900	975	880.2	5	1200 KHz	-78.82	-60	-54.18	-51	PASS
GSM900	975	880.2	5	1400 KHz	-80.07	-60	-55.43	-51	PASS


				KHz					
GSM900	975	880.2	5	1600 KHz	-81.49	-60	-56.85	-51	PASS
GSM900	975	880.2	5	1800 KHz	-81.28	-60	-56.64	-51	PASS
GSM900	60	902	5	-1800 KHz	-81.60	-60	-57.01	-51	PASS
GSM900	60	902	5	-1600 KHz	-81.24	-60	-56.65	-51	PASS
GSM900	60	902	5	-1400 KHz	-80.19	-60	-55.60	-51	PASS
GSM900	60	902	5	-1200 KHz	-78.79	-60	-54.20	-51	PASS
GSM900	60	902	5	-1000 KHz	-76.22	-60	-51.63	-51	PASS
GSM900	60	902	5	-800 KHz	-76.24	-60	-51.65	-51	PASS
GSM900	60	902	5	-600 KHz	-75.00	-60	-50.41	-51	PASS
GSM900	60	902	5	-400 KHz	-69.99	-60	-45.40	-36	PASS
GSM900	60	902	5	-250 KHz	-41.05	-33	-16.46	-36	PASS
GSM900	60	902	5	-200 KHz	-36.56	-30	-11.97	-36	PASS
GSM900	60	902	5	-100 KHz	-8.50	0.5	16.09	-36	PASS
GSM900	60	902	5	100 KHz	-8.58	0.5	16.01	-36	PASS
GSM900	60	902	5	200 KHz	-36.56	-30	-11.97	-36	PASS
GSM900	60	902	5	250 KHz	-40.75	-33	-16.16	-36	PASS
GSM900	60	902	5	400 KHz	-69.98	-60	-45.39	-36	PASS
GSM900	60	902	5	600 KHz	-74.83	-60	-50.24	-51	PASS
GSM900	60	902	5	800 KHz	-75.81	-60	-51.22	-51	PASS
GSM900	60	902	5	1000 KHz	-76.02	-60	-51.43	-51	PASS
GSM900	60	902	5	1200 KHz	-78.47	-60	-53.88	-51	PASS
GSM900	60	902	5	1400 KHz	-79.65	-60	-55.06	-51	PASS
GSM900	60	902	5	1600 KHz	-81.43	-60	-56.84	-51	PASS
GSM900	60	902	5	1800 KHz	-81.46	-60	-56.87	-51	PASS

GSM900	124	914.8	5	-1800 KHz	-80.03	-60	-55.93	-51	PASS
GSM900	124	914.8	5	-1600 KHz	-81.58	-60	-57.48	-51	PASS
GSM900	124	914.8	5	-1400 KHz	-80.55	-60	-56.45	-51	PASS
GSM900	124	914.8	5	-1200 KHz	-78.88	-60	-54.78	-51	PASS
GSM900	124	914.8	5	-1000 KHz	-76.62	-60	-52.52	-51	PASS
GSM900	124	914.8	5	-800 KHz	-76.69	-60	-52.59	-51	PASS
GSM900	124	914.8	5	-600 KHz	-75.82	-60	-51.72	-51	PASS
GSM900	124	914.8	5	-400 KHz	-70.31	-60	-46.21	-36	PASS
GSM900	124	914.8	5	-250 KHz	-40.64	-33	-16.54	-36	PASS
GSM900	124	914.8	5	-200 KHz	-36.60	-30	-12.50	-36	PASS
GSM900	124	914.8	5	-100 KHz	-8.74	0.5	15.36	-36	PASS
GSM900	124	914.8	5	100 KHz	-8.51	0.5	15.59	-36	PASS
GSM900	124	914.8	5	200 KHz	-36.78	-30	-12.68	-36	PASS
GSM900	124	914.8	5	250 KHz	-40.67	-33	-16.57	-36	PASS
GSM900	124	914.8	5	400 KHz	-70.20	-60	-46.10	-36	PASS
GSM900	124	914.8	5	600 KHz	-75.51	-60	-51.41	-51	PASS
GSM900	124	914.8	5	800 KHz	-76.48	-60	-52.38	-51	PASS
GSM900	124	914.8	5	1000 KHz	-76.34	-60	-52.24	-51	PASS
GSM900	124	914.8	5	1200 KHz	-78.78	-60	-54.68	-51	PASS
GSM900	124	914.8	5	1400 KHz	-79.79	-60	-55.69	-51	PASS
GSM900	124	914.8	5	1600 KHz	-81.37	-60	-57.27	-51	PASS
GSM900	124	914.8	5	1800 KHz	-80.08	-60	-55.98	-51	PASS


DCS1800 Channel=512 PCL=0.png

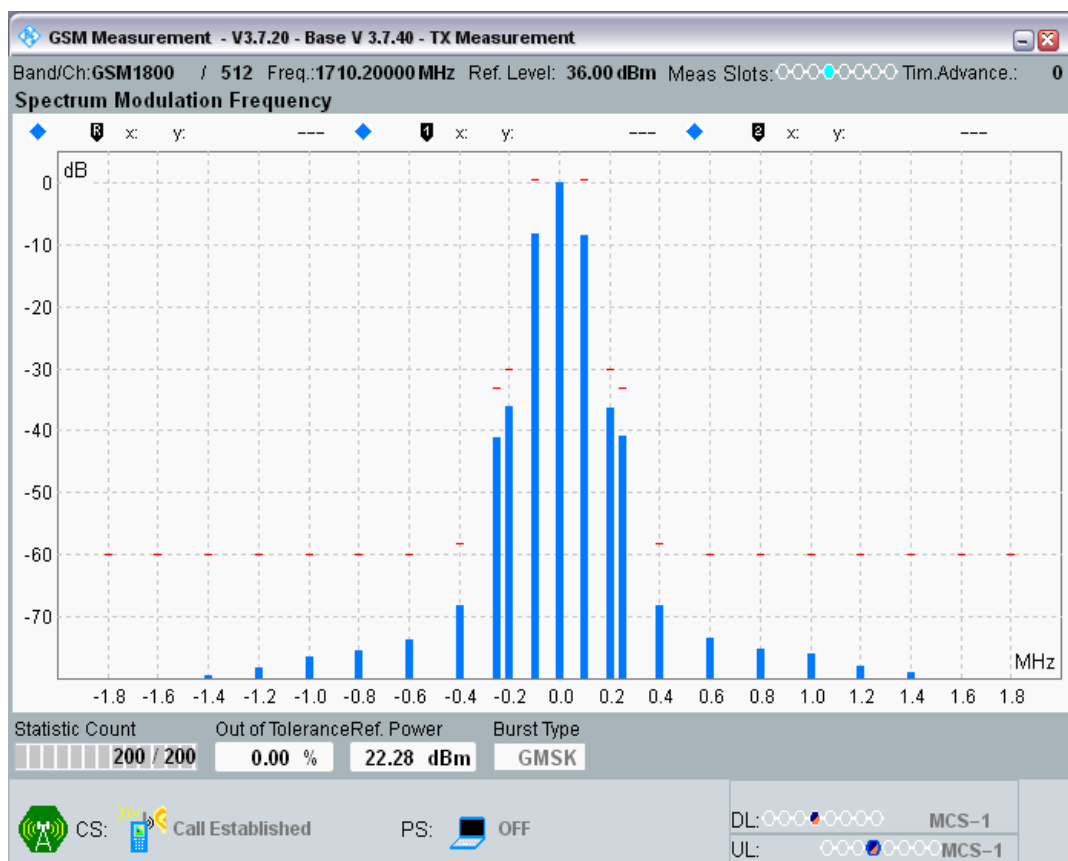


DCS1800 Channel=700 PCL=0.png

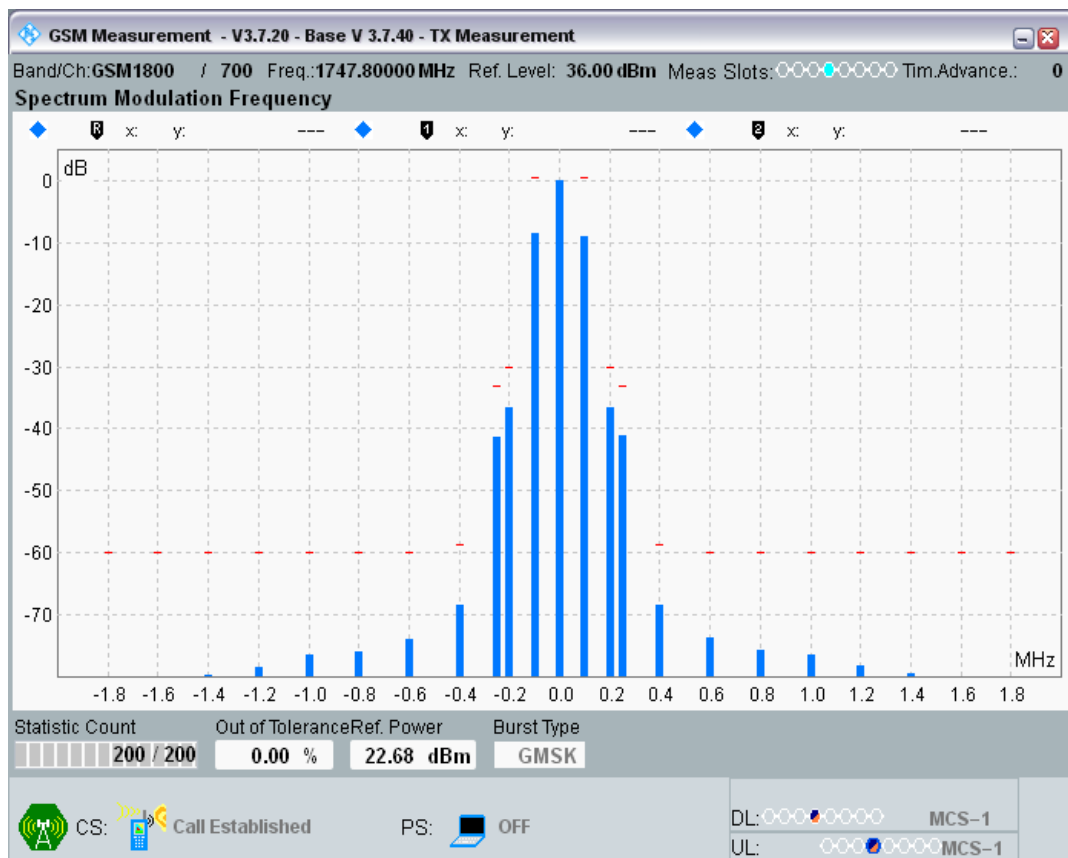


DCS1800 Channel=885 PCL=0.png

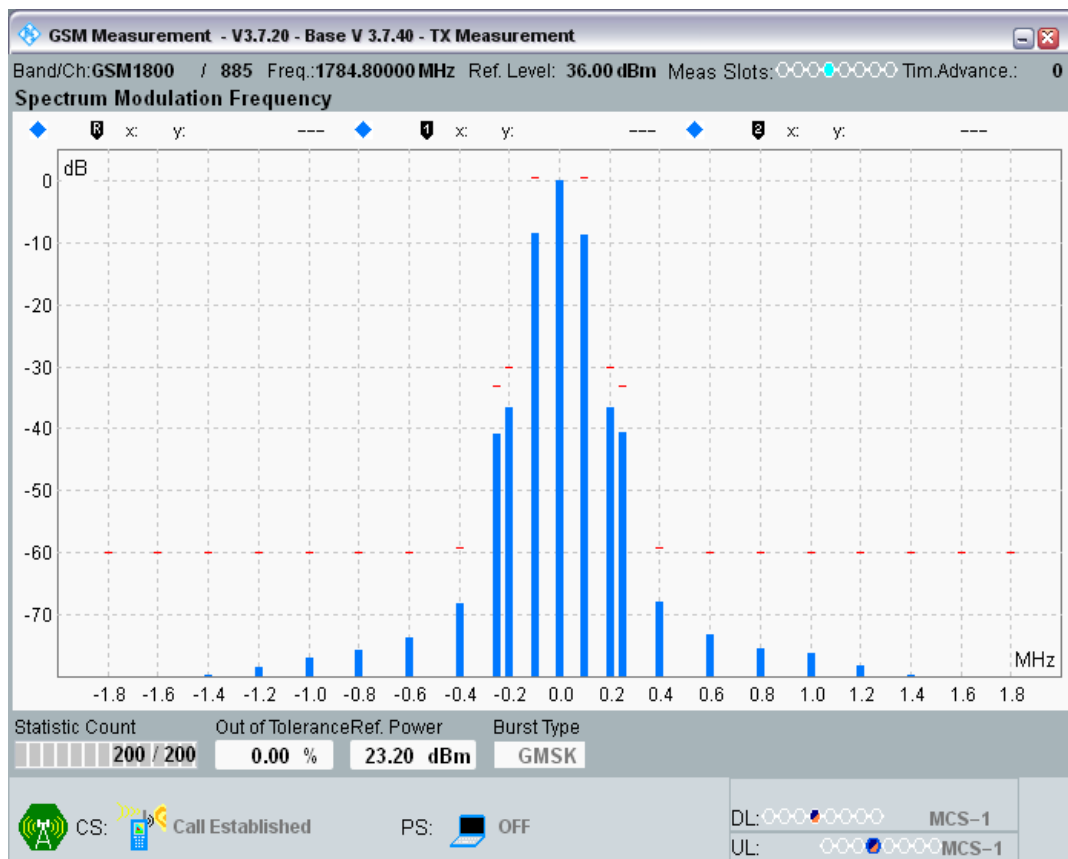


GSM900 Channel=124 PCL=5.png

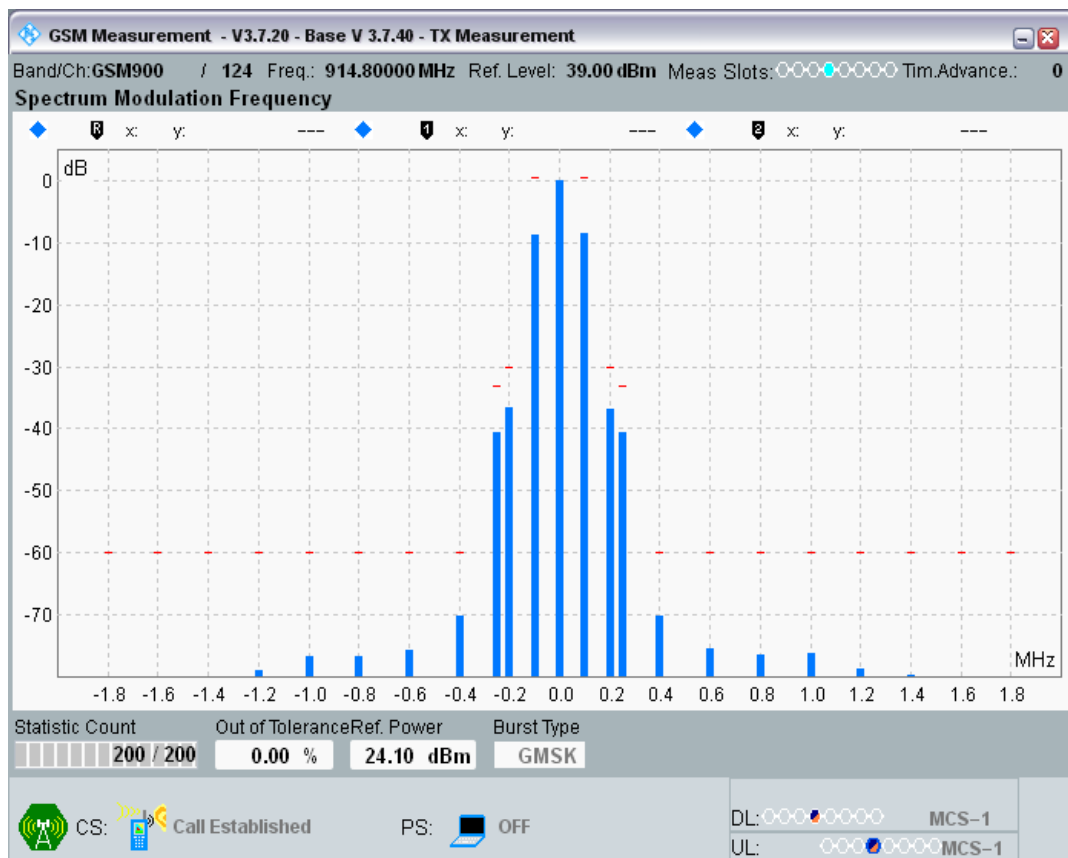

GSM900 Channel=60 PCL=5.png

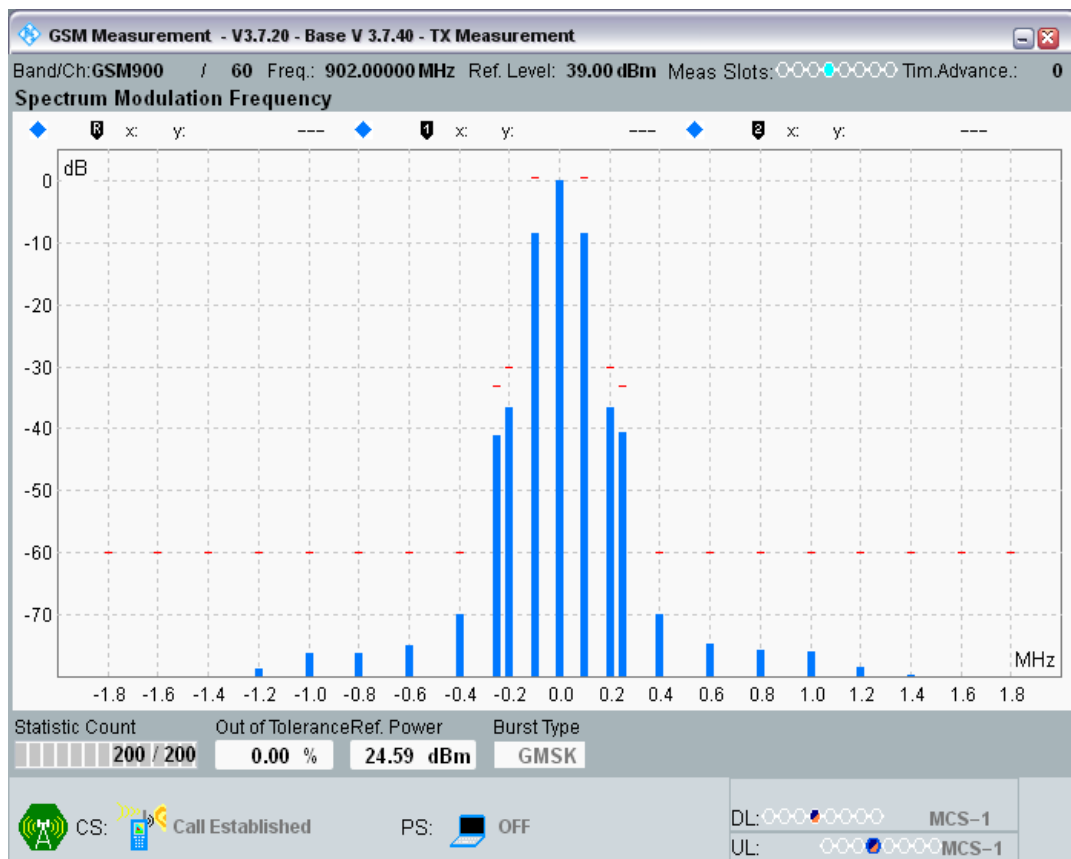

GSM900 Channel=975 PCL=5.png

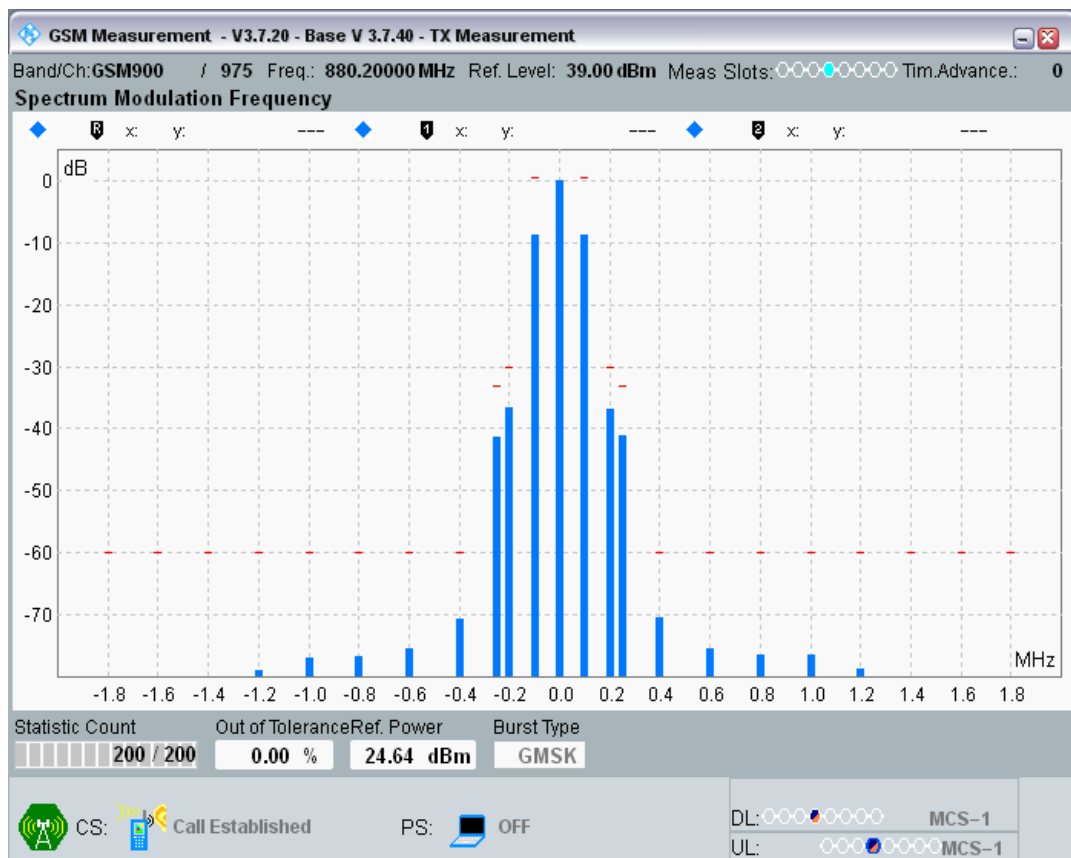


Clause 4.2.6 Transmitter-Switching Spectrum


Band	Channel	Frequency (MHz)	PCL	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
DCS1800	512	1710.2	0	-1800 KHz	-44.79	-27	PASS
DCS1800	512	1710.2	0	-1200 KHz	-42.72	-24	PASS
DCS1800	512	1710.2	0	-600 KHz	-37.17	-24	PASS
DCS1800	512	1710.2	0	-400 KHz	-32.42	-22	PASS
DCS1800	512	1710.2	0	400 KHz	-31.47	-22	PASS
DCS1800	512	1710.2	0	600 KHz	-34.76	-24	PASS
DCS1800	512	1710.2	0	1200 KHz	-40.87	-24	PASS
DCS1800	512	1710.2	0	1800 KHz	-44.44	-27	PASS
DCS1800	700	1747.8	0	-1800 KHz	-46.38	-27	PASS
DCS1800	700	1747.8	0	-1200 KHz	-42.24	-24	PASS
DCS1800	700	1747.8	0	-600 KHz	-37.22	-24	PASS
DCS1800	700	1747.8	0	-400 KHz	-32.45	-22	PASS
DCS1800	700	1747.8	0	400 KHz	-30.29	-22	PASS
DCS1800	700	1747.8	0	600 KHz	-34.86	-24	PASS
DCS1800	700	1747.8	0	1200 KHz	-40.22	-24	PASS
DCS1800	700	1747.8	0	1800 KHz	-43.66	-27	PASS
DCS1800	885	1784.8	0	-1800 KHz	-43.23	-27	PASS
DCS1800	885	1784.8	0	-1200 KHz	-41.09	-24	PASS
DCS1800	885	1784.8	0	-600 KHz	-35.88	-24	PASS
DCS1800	885	1784.8	0	-400 KHz	-30.20	-22	PASS
DCS1800	885	1784.8	0	400 KHz	-27.88	-22	PASS
DCS1800	885	1784.8	0	600 KHz	-33.99	-24	PASS
DCS1800	885	1784.8	0	1200 KHz	-39.91	-24	PASS
DCS1800	885	1784.8	0	1800 KHz	-42.07	-27	PASS
GSM900	975	880.2	5	-1800 KHz	-40.91	-24	PASS
GSM900	975	880.2	5	-1200 KHz	-38.78	-21	PASS
GSM900	975	880.2	5	-600 KHz	-33.99	-21	PASS
GSM900	975	880.2	5	-400 KHz	-32.15	-19	PASS
GSM900	975	880.2	5	400 KHz	-28.98	-19	PASS
GSM900	975	880.2	5	600 KHz	-33.59	-21	PASS
GSM900	975	880.2	5	1200 KHz	-38.53	-21	PASS
GSM900	975	880.2	5	1800 KHz	-42.04	-24	PASS
GSM900	60	902	5	-1800 KHz	-42.47	-24	PASS
GSM900	60	902	5	-1200 KHz	-38.06	-21	PASS
GSM900	60	902	5	-600 KHz	-33.53	-21	PASS
GSM900	60	902	5	-400 KHz	-31.93	-19	PASS
GSM900	60	902	5	400 KHz	-29.00	-19	PASS
GSM900	60	902	5	600 KHz	-33.00	-21	PASS
GSM900	60	902	5	1200 KHz	-38.13	-21	PASS
GSM900	60	902	5	1800 KHz	-41.97	-24	PASS
GSM900	124	914.8	5	-1800 KHz	-42.61	-24	PASS

GSM900	124	914.8	5	-1200 KHz	-39.99	-21	PASS
GSM900	124	914.8	5	-600 KHz	-34.12	-21	PASS
GSM900	124	914.8	5	-400 KHz	-31.10	-19	PASS
GSM900	124	914.8	5	400 KHz	-30.59	-19	PASS
GSM900	124	914.8	5	600 KHz	-34.30	-21	PASS
GSM900	124	914.8	5	1200 KHz	-39.72	-21	PASS
GSM900	124	914.8	5	1800 KHz	-41.18	-24	PASS


DCS1800 Channel=512 PCL=0.png

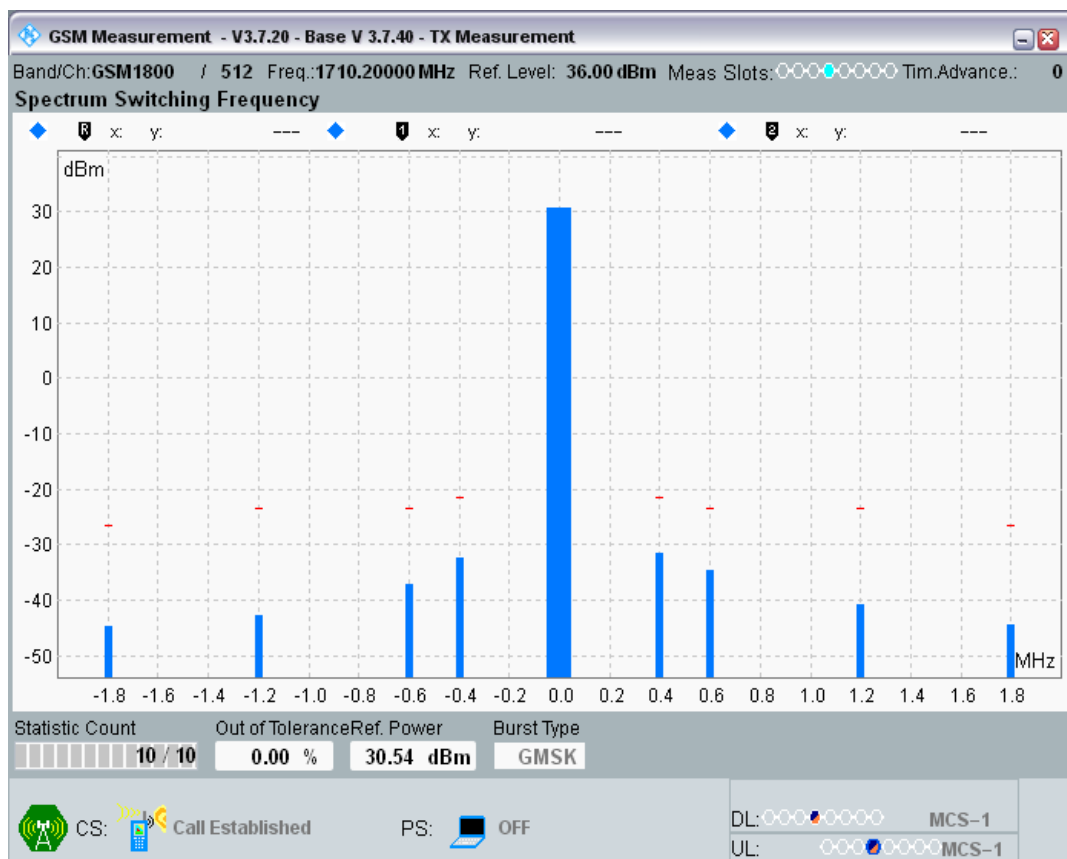


DCS1800 Channel=700 PCL=0.png

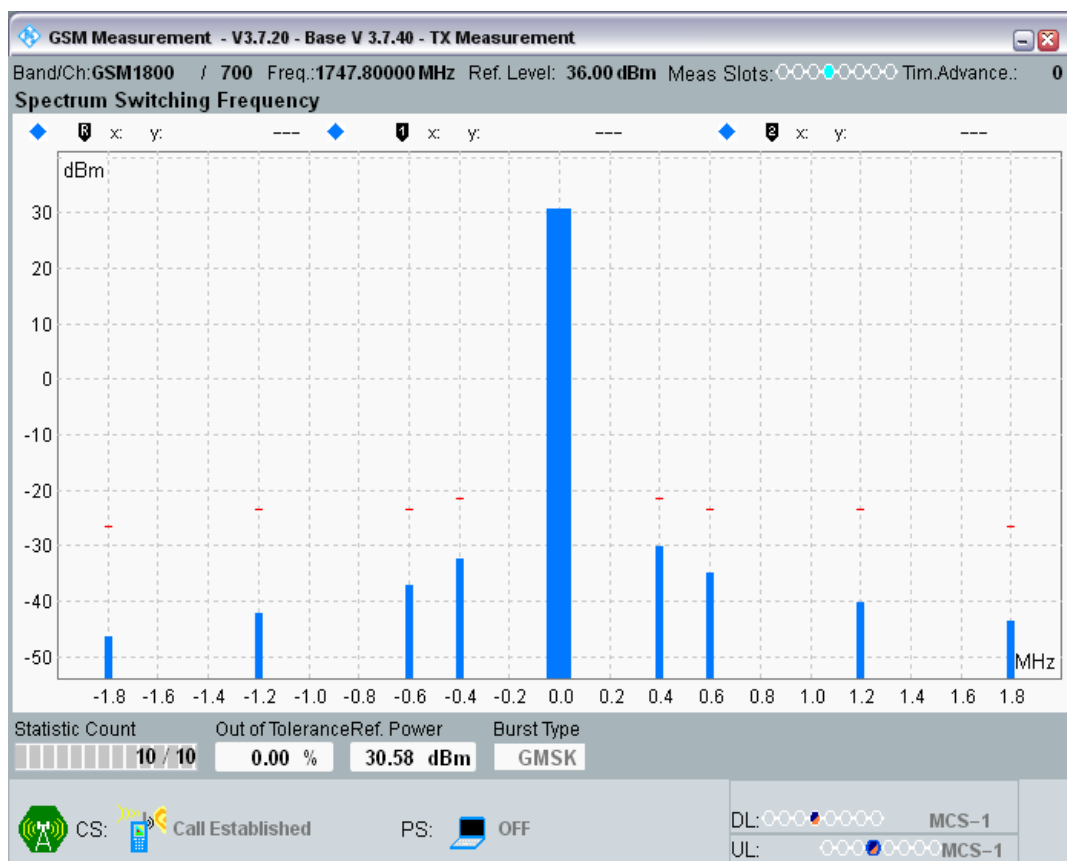


DCS1800 Channel=885 PCL=0.png

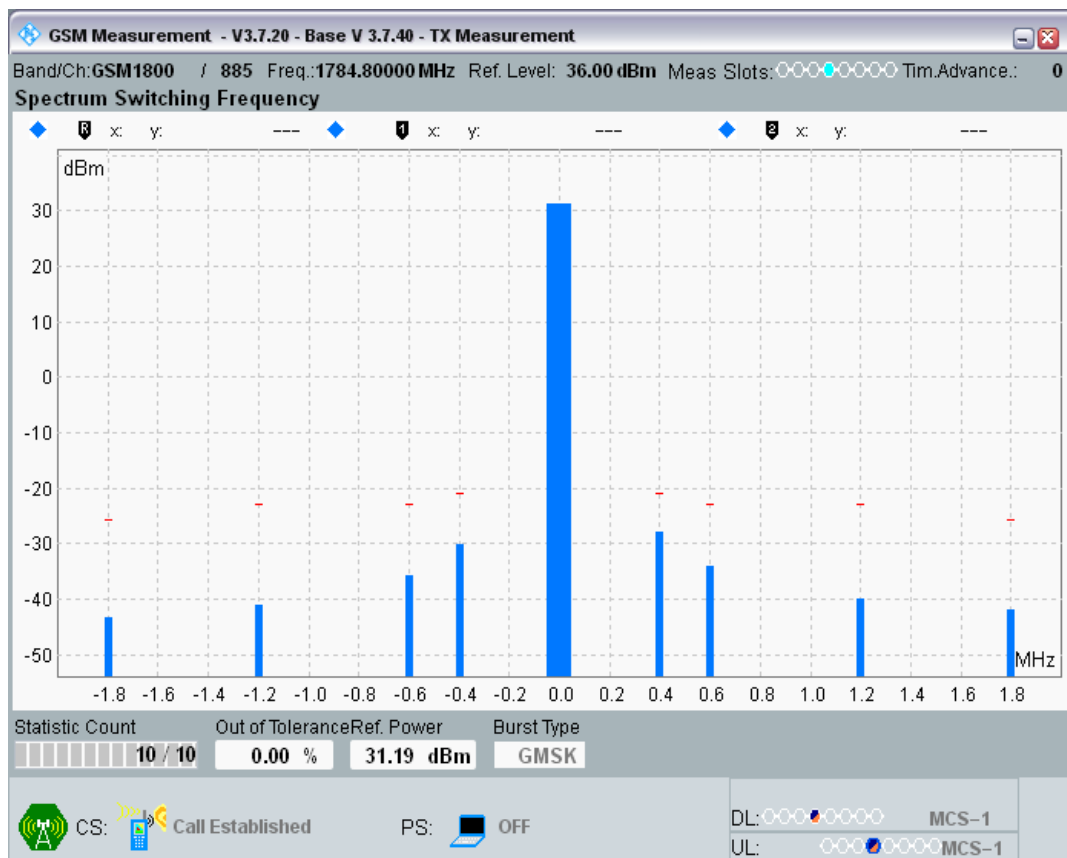


GSM900 Channel=124 PCL=5.png

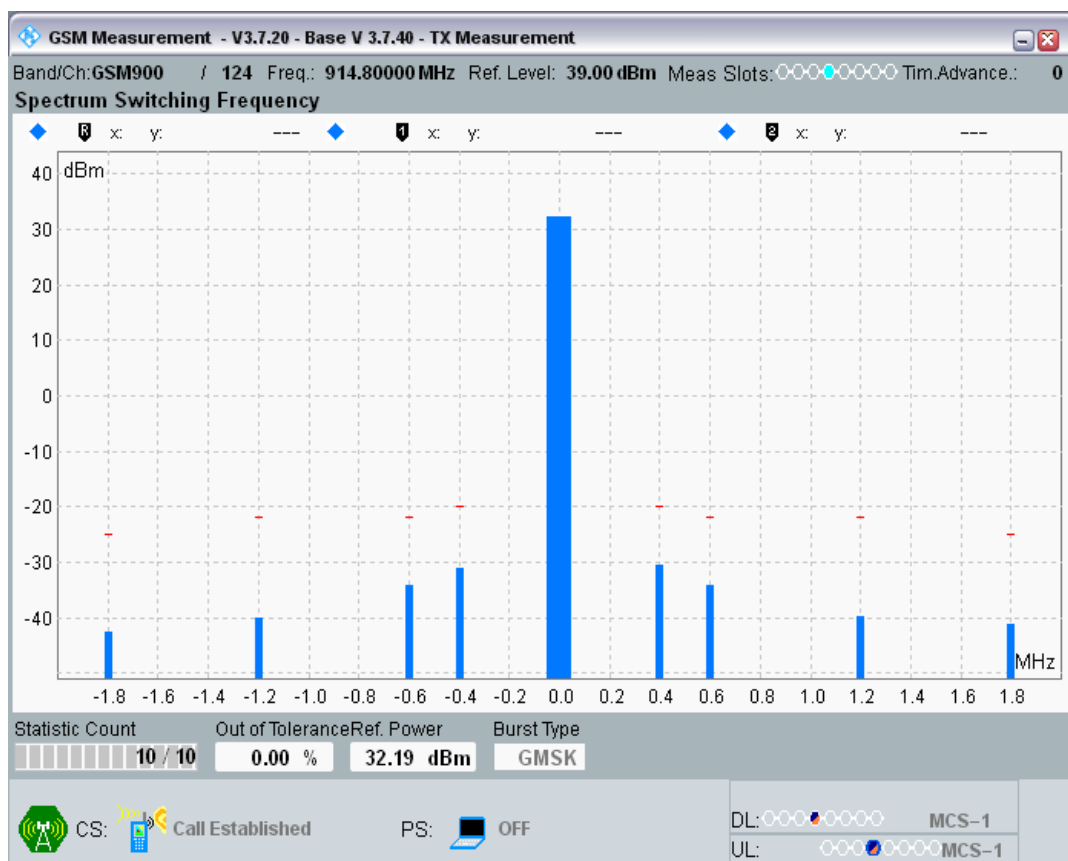

GSM900 Channel=60 PCL=5.png

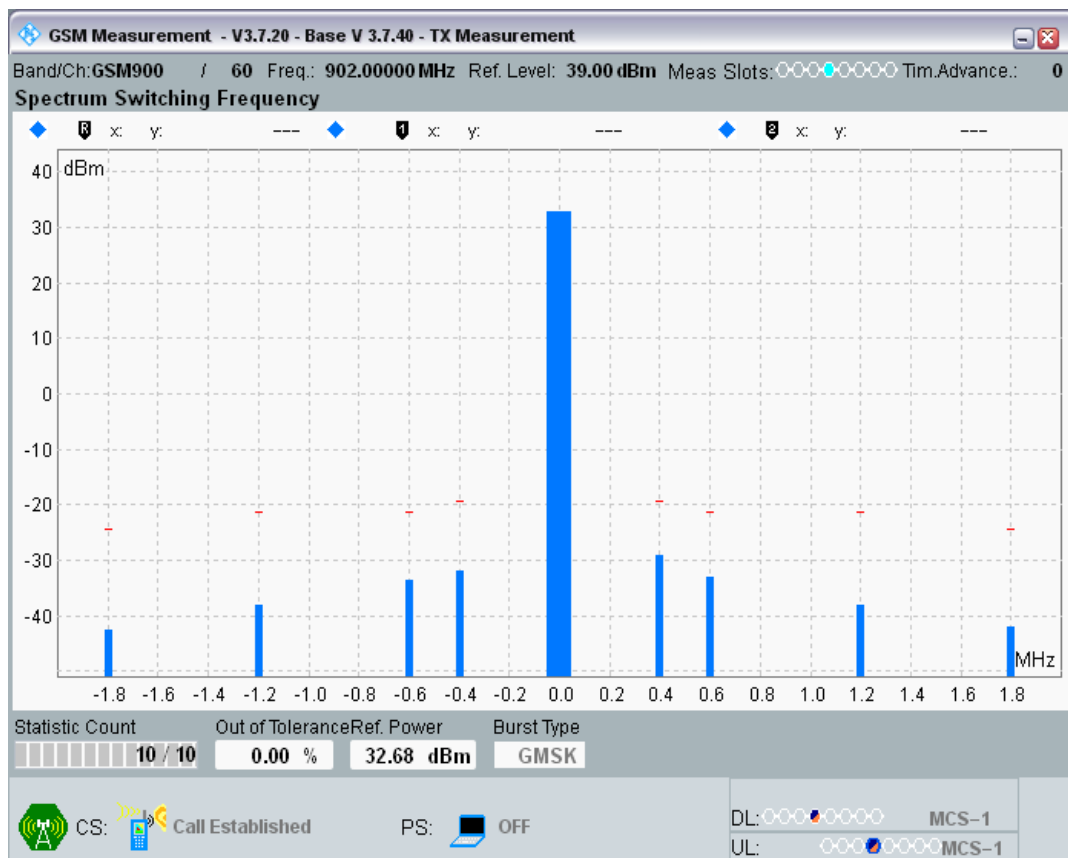

GSM900 Channel=975 PCL=5.png

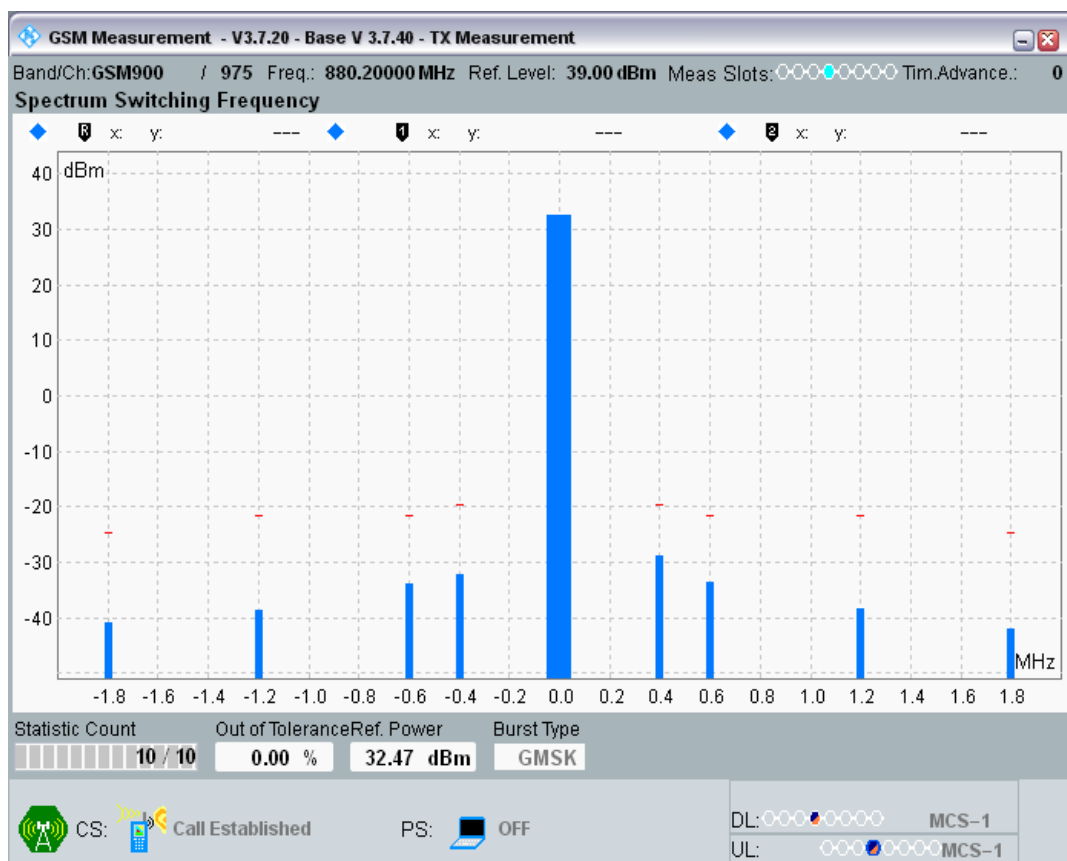


Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.11	-79.06	-36	PASS
DCS1800	700	1747.8	0	50MHz - 500MHz	100	487.3	-80.09	-36	PASS
DCS1800	700	1747.8	0	500MHz - 1000MHz	3000	833	-66.60	-36	PASS
DCS1800	700	1747.8	0	1000MHz - 1680MHz	3000	1424.32	-57.70	-30	PASS
DCS1800	700	1747.8	0	1680MHz - 1690MHz	1000	1680.08	-56.21	-30	PASS
DCS1800	700	1747.8	0	1690MHz - 1700MHz	300	1692.18	-63.77	-30	PASS
DCS1800	700	1747.8	0	1700MHz - 1710MHz	100	1707.2	-76.39	-30	PASS
DCS1800	700	1747.8	0	1785MHz - 1795MHz	100	1792.81	-75.99	-30	PASS
DCS1800	700	1747.8	0	1795MHz - 1805MHz	300	1804.63	-70.93	-30	PASS
DCS1800	700	1747.8	0	1800MHz - 4000MHz	3000	3496.2	-40.68	-30	PASS

DCS1800	700	1747.8	0	4000MHz - 12750MHz	3000	12716.99246	-57.08	-30	PASS
DCS1800	700	1747.8	0	1710MHz - 1741.8MHz	100	1741.8	-50.28	-30	PASS
DCS1800	700	1747.8	0	1741.8MHz - 1746MHz	30	1745.9076	-46.92	-30	PASS
DCS1800	700	1747.8	0	1749.6MHz - 1753.8MHz	30	1750.1418	-45.62	-30	PASS
DCS1800	700	1747.8	0	1753.8MHz - 1785MHz	100	1754.2992	-44.86	-30	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.11	-94.54	-36	PASS
GSM900	60	902	5	50MHz - 500MHz	100	359.1	-81.30	-36	PASS
GSM900	60	902	5	500MHz - 850MHz	3000	531.5	-71.97	-36	PASS
GSM900	60	902	5	850MHz - 860MHz	1000	854.76	-63.07	-36	PASS
GSM900	60	902	5	860MHz - 870MHz	300	862.28	-71.13	-30	PASS
GSM900	60	902	5	870MHz - 880MHz	100	871.59	-83.98	-36	PASS
GSM900	60	902	5	915MHz - 925MHz	100	924.37	-91.58	-36	PASS
GSM900	60	902	5	960MHz - 1000MHz	3000	985.16	-55.77	-36	PASS
GSM900	60	902	5	1000MHz - 2000MHz	3000	1804	-65.40	-30	PASS
GSM900	60	902	5	2000MHz - 12750MHz	3000	2705.065587	-45.76	-30	PASS
GSM900	60	902	5	880MHz - 896MHz	100	888.8	-52.00	-36	PASS
GSM900	60	902	5	896MHz - 900.2MHz	30	900.1916	-43.39	-36	PASS
GSM900	60	902	5	903.8MHz - 908MHz	30	904.1318	-45.10	-36	PASS
GSM900	60	902	5	908MHz - 915MHz	100	908.742	-46.09	-36	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

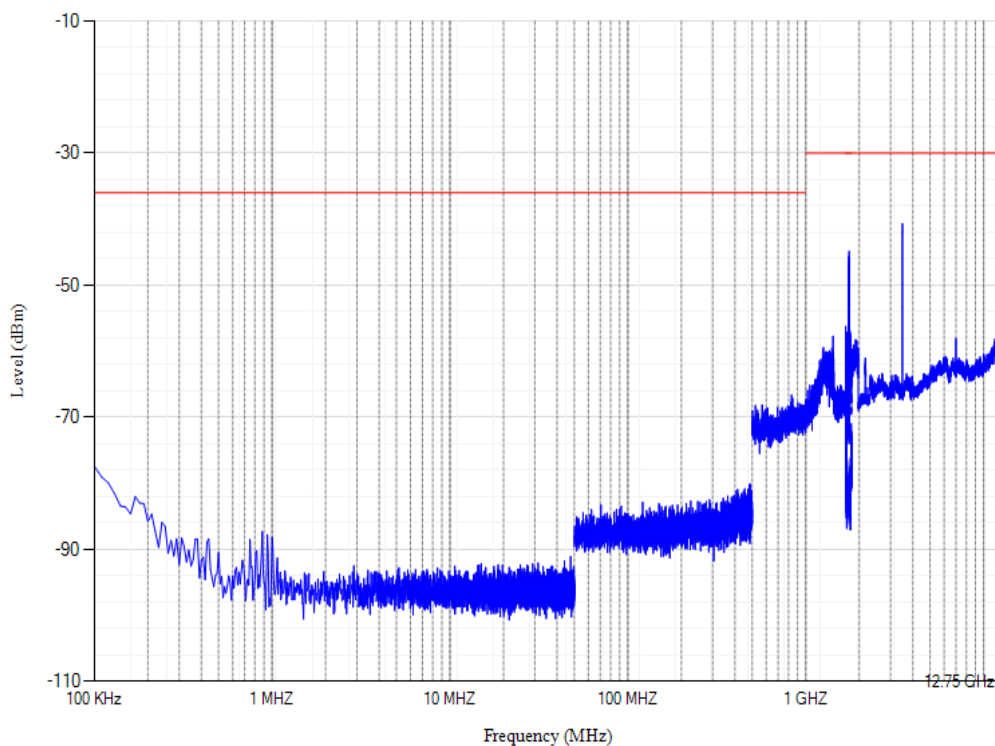

GSM900 Channel=60 PCL=5.png

Conducted spurious emissions

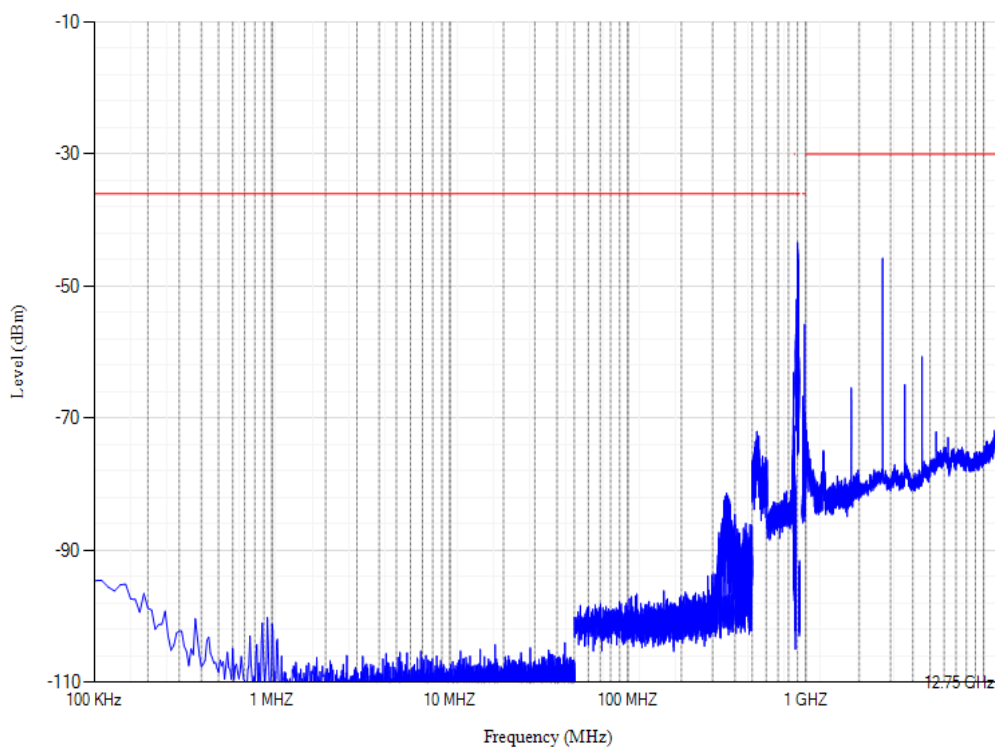


Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW (KHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
DCS1800	700	1747.8	0	0.1MHz - 50MHz	10	0.15	-78.09	-57	PASS
DCS1800	700	1747.8	0	50MHz - 880MHz	100	852.3	-78.18	-57	PASS
DCS1800	700	1747.8	0	880MHz - 915MHz	100	883.57	-77.15	-59	PASS
DCS1800	700	1747.8	0	915MHz - 1000MHz	100	970.42	-76.57	-57	PASS
DCS1800	700	1747.8	0	1000MHz - 1710MHz	100	1626.4	-75.79	-47	PASS
DCS1800	700	1747.8	0	1710MHz - 1785MHz	100	1748.025	-76.46	-53	PASS
DCS1800	700	1747.8	0	1785MHz - 12750MHz	100	12527.68463	-68.73	-47	PASS
GSM900	60	902	5	0.1MHz - 50MHz	10	0.12	-79.89	-57	PASS
GSM900	60	902	5	50MHz - 880MHz	100	498.2	-79.26	-57	PASS
GSM900	60	902	5	880MHz - 915MHz	100	893.895	-78.53	-59	PASS
GSM900	60	902	5	915MHz - 1000MHz	100	998.98	-79.72	-57	PASS
GSM900	60	902	5	1000MHz - 1710MHz	100	1454.2	-77.47	-47	PASS
GSM900	60	902	5	1710MHz - 1785MHz	100	1712.85	-77.25	-53	PASS
GSM900	60	902	5	1785MHz - 12750MHz	100	12704.76938	-70.42	-47	PASS


DCS1800 Channel=700 PCL=0.png

Conducted spurious emissions

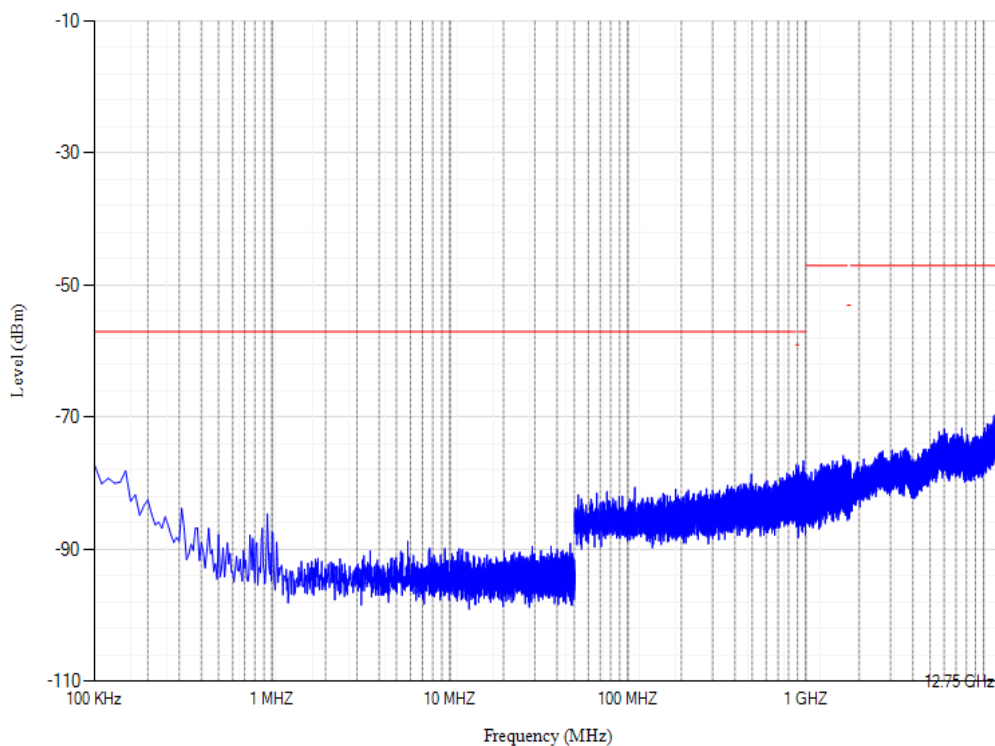

GSM900 Channel=60 PCL=5.png


Conducted spurious emissions

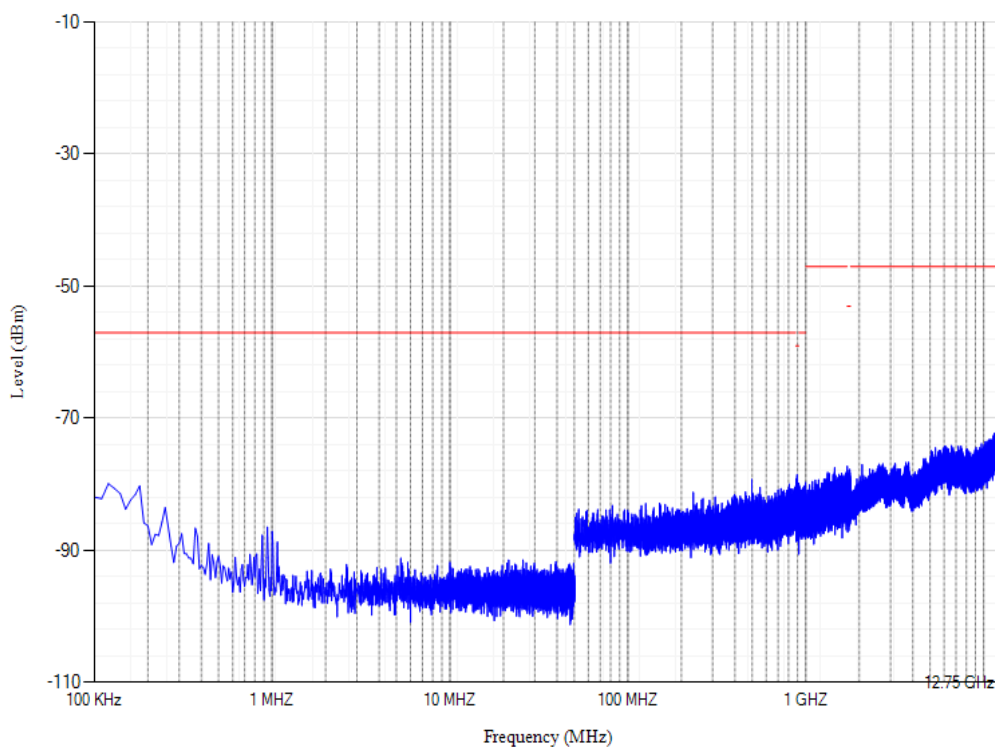


Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	3;3;3;3	Frequency Error (Hz)	7.46	-88.02	88.02	PASS
GSM900	975	880.2	3;3;3;3	RMS Phase Error (Degree)	0.48	0	5	PASS
GSM900	975	880.2	3;3;3;3	Peak Phase Error (Degree)	1.40	0	20	PASS
GSM900	60	902	3;3;3;3	Frequency Error (Hz)	8.33	-90.2	90.2	PASS
GSM900	60	902	3;3;3;3	RMS Phase Error (Degree)	0.53	0	5	PASS
GSM900	60	902	3;3;3;3	Peak Phase Error (Degree)	1.55	0	20	PASS
GSM900	124	914.8	3;3;3;3	Frequency Error (Hz)	5.68	-91.48	91.48	PASS
GSM900	124	914.8	3;3;3;3	RMS Phase Error (Degree)	0.54	0	5	PASS
GSM900	124	914.8	3;3;3;3	Peak Phase Error (Degree)	1.59	0	20	PASS
DCS1800	512	1710.2	3;3;3;3	Frequency Error (Hz)	18.08	-171.02	171.02	PASS
DCS1800	512	1710.2	3;3;3;3	RMS Phase Error (Degree)	0.61	0	5	PASS
DCS1800	512	1710.2	3;3;3;3	Peak Phase Error (Degree)	2.11	0	20	PASS
DCS1800	700	1747.8	3;3;3;3	Frequency Error (Hz)	13.95	-174.78	174.78	PASS
DCS1800	700	1747.8	3;3;3;3	RMS Phase Error (Degree)	0.57	0	5	PASS
DCS1800	700	1747.8	3;3;3;3	Peak Phase Error (Degree)	1.92	0	20	PASS
DCS1800	885	1784.8	3;3;3;3	Frequency Error (Hz)	19.24	-178.48	178.48	PASS
DCS1800	885	1784.8	3;3;3;3	RMS Phase Error (Degree)	0.55	0	5	PASS
DCS1800	885	1784.8	3;3;3;3	Peak Phase Error (Degree)	1.86	0	20	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

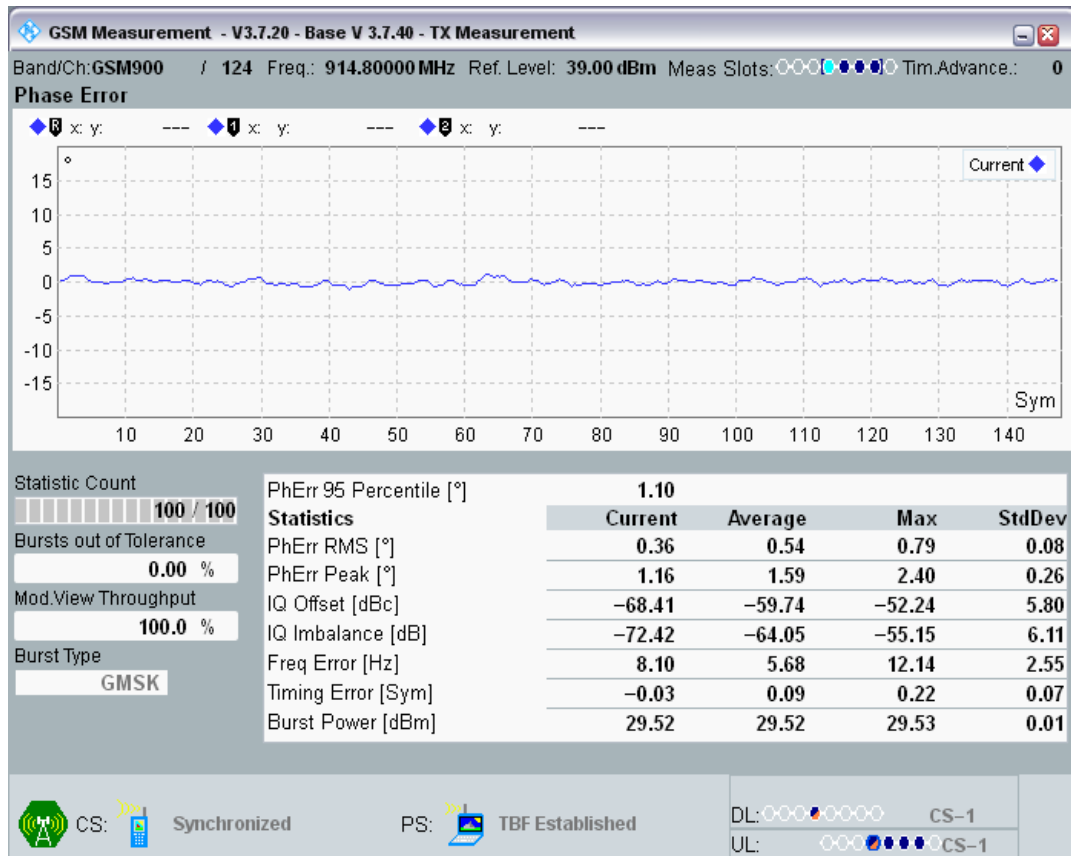


GSM900 Channel=60 Gamma=3;3;3;3.png

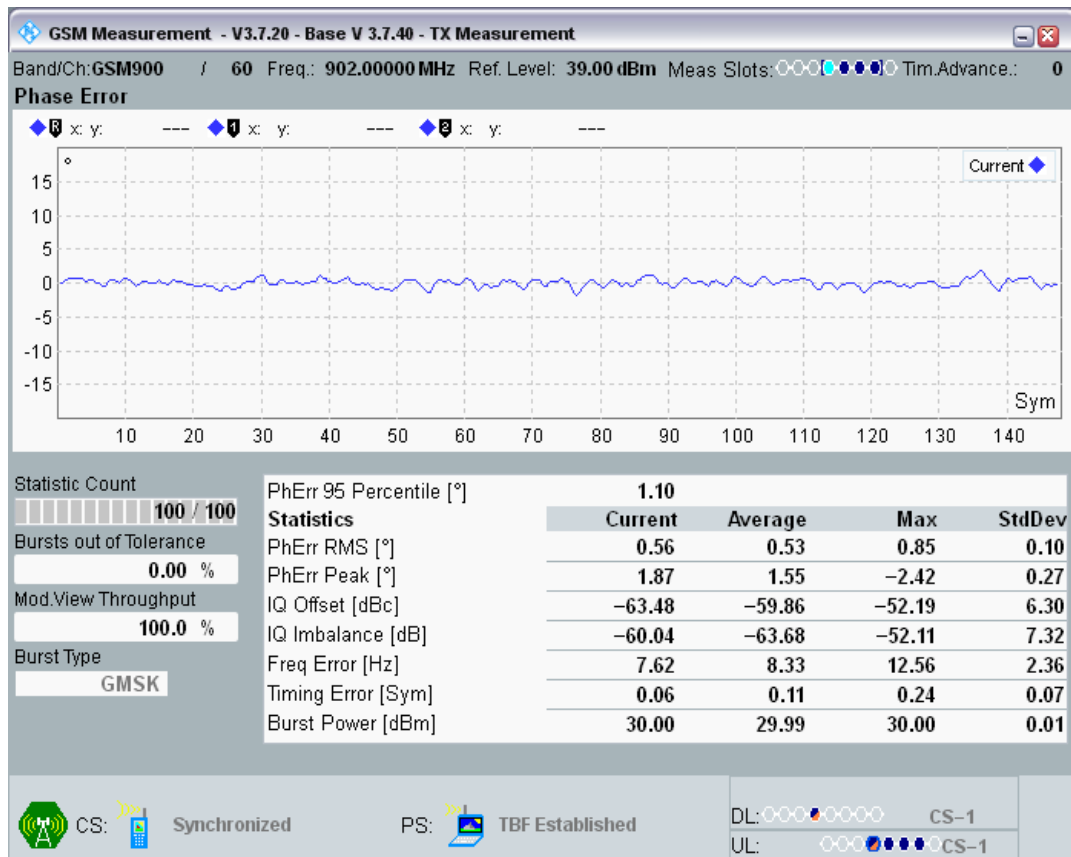


GSM900 Channel=975 Gamma=3;3;3;3.png

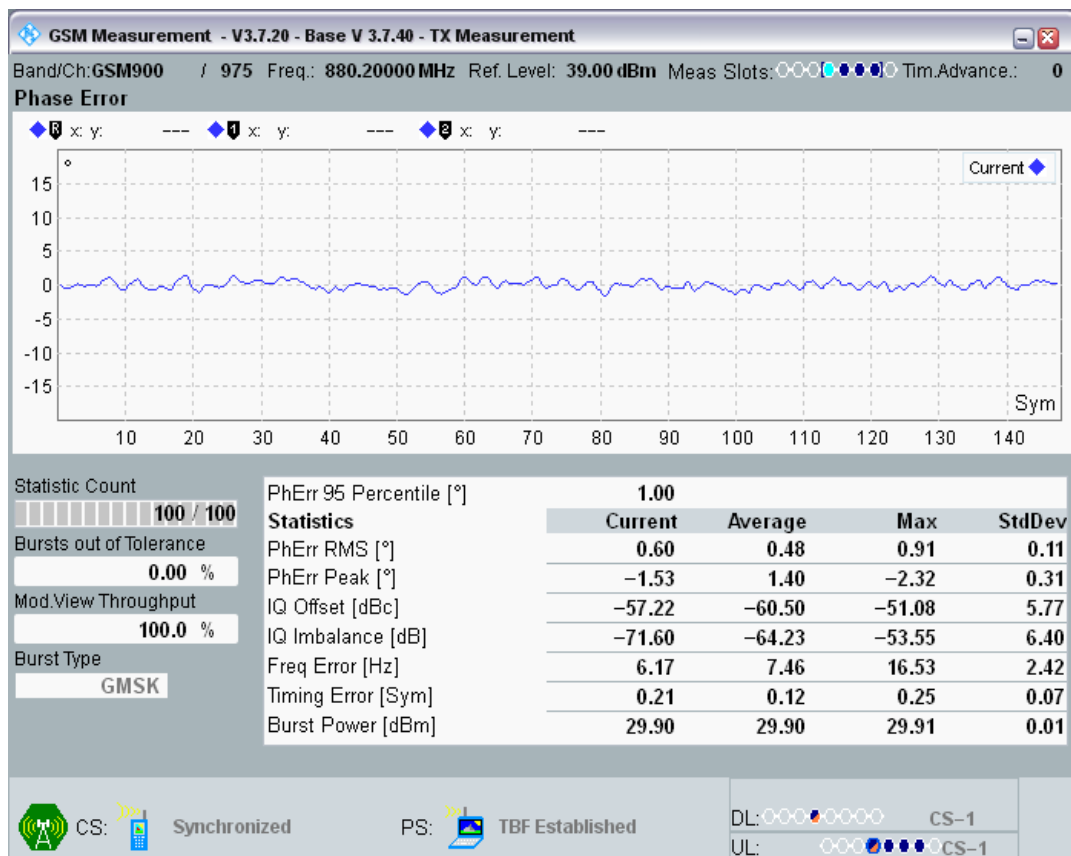


DCS1800 Channel=512 Gamma=3;3;3;3.png

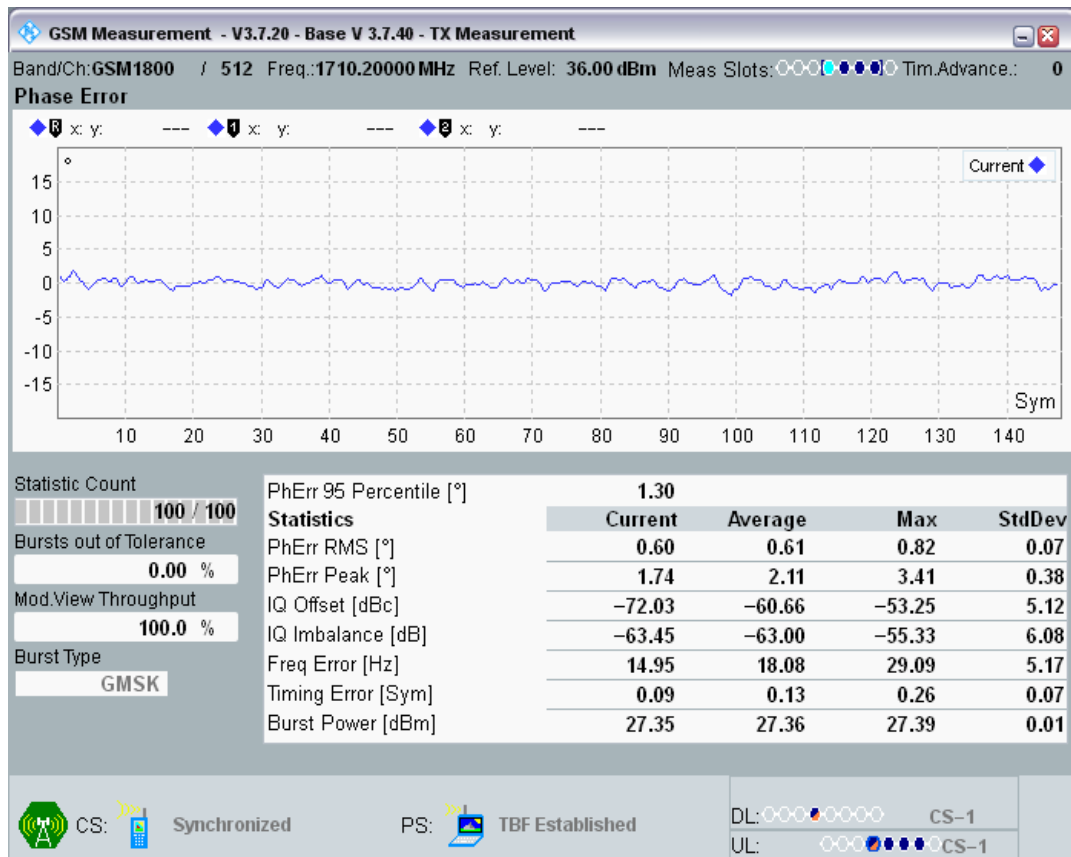

DCS1800 Channel=700 Gamma=3;3;3;3.png

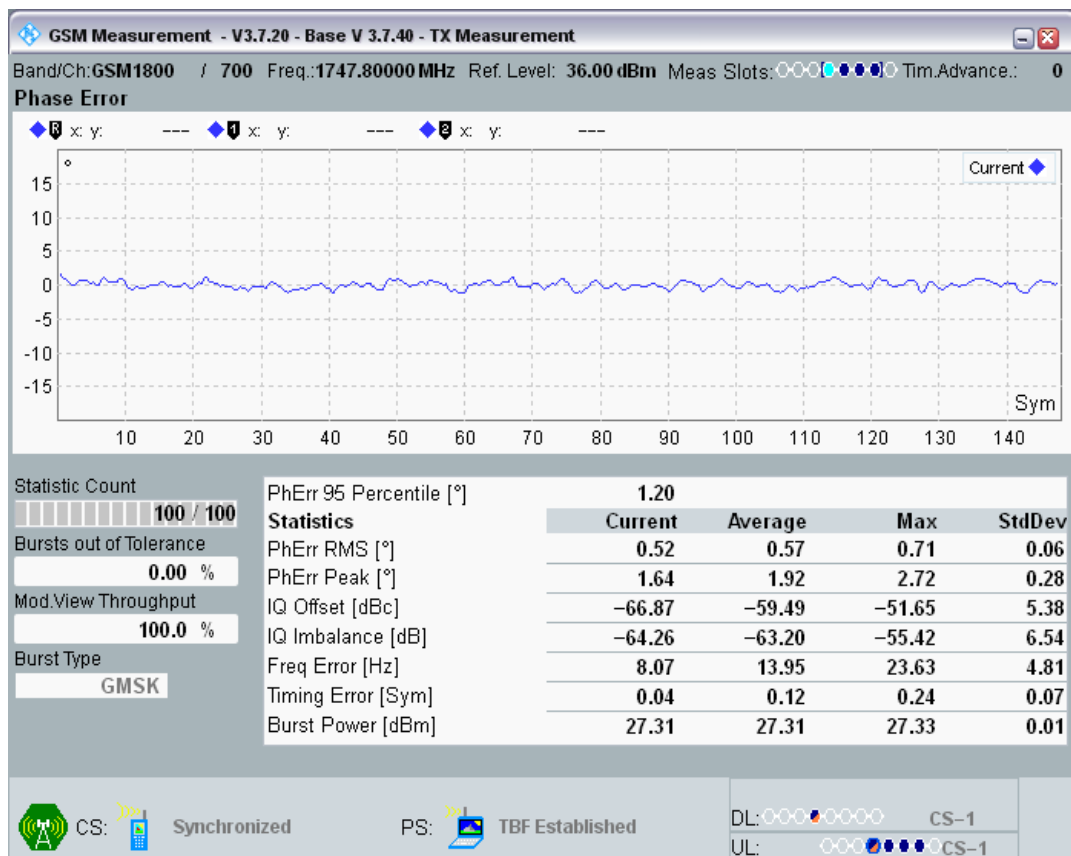

DCS1800 Channel=885 Gamma=3;3;3;3.png

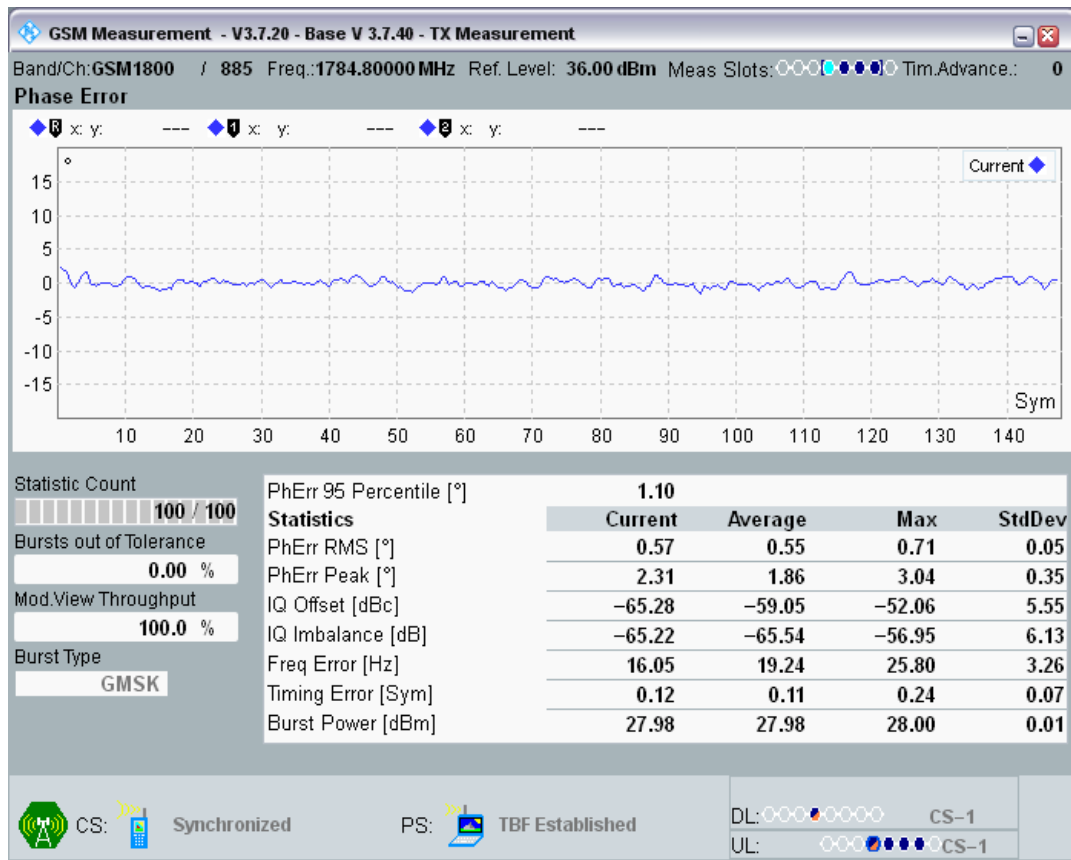

Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low (dBm)	Limit high (dBm)	Limit	Verdict
GSM900	975	880.2	3;3;3;3	PvT	-	-	-		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot1	29.77707	25	32		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot2	29.80234	25	32		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot3	29.80725	25	32		PASS
GSM900	975	880.2	3;3;3;3	Pow er @ slot4	29.83255	25	32		PASS
GSM900	975	880.2	4;4;4;4	PvT	-	-	-		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot1	29.75531	24	33		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot2	29.79916	24	33		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot3	29.8002	24	33		PASS
GSM900	975	880.2	4;4;4;4	Pow er @ slot4	29.82819	24	33		PASS

GSM900	975	880.2	5;5;5;5	PvT	-	-	-	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot1	29.70535	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot2	29.72751	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot3	29.754	24	32	PASS
GSM900	975	880.2	5;5;5;5	Power @ slot4	29.77963	24	32	PASS
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	27.69751	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	27.72842	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	27.74475	24	30	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	27.74945	24	30	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	25.62469	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	25.63922	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	25.65009	22	28	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	25.66385	22	28	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	23.64954	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	23.64505	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	23.65433	20	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	23.64462	20	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	21.9621	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	21.95932	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	21.94775	18	24	PASS

GSM900	975	880.2	9;9;9;9	Power @ slot4	21.95361	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	19.93259	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	19.92212	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	19.92099	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	19.93106	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	18.0025	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	17.98059	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	17.9827	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	17.97769	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	15.94418	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	15.93091	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot3	15.93506	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot4	15.94022	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	13.86331	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	13.90527	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	13.89899	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot4	13.90976	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot1	11.83514	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot2	11.82706	6	16	PASS

GSM900	975	880.2	14;14;14;14	Power @ slot3	11.81424	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot4	11.81818	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	9.849091	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	9.920471	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	9.930908	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	9.918579	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	7.878601	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	7.865997	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	7.884491	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	7.880371	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	4.659943	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot2	4.673492	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	4.658295	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	4.666656	0	10	PASS
GSM900	60	902	3;3;3;3	PvT	-	-	-	PASS
GSM900	60	902	3;3;3;3	Power @ slot1	29.88614	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot2	29.92627	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot3	29.9248	25	32	PASS
GSM900	60	902	3;3;3;3	Power @ slot4	29.94193	25	32	PASS
GSM900	60	902	4;4;4;4	PvT	-	-	-	PASS
GSM900	60	902	4;4;4;4	Power @ slot1	29.87924	24	33	PASS

GSM900	60	902	4;4;4;4	Power @ slot2	29.90598	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot3	29.91977	24	33	PASS
GSM900	60	902	4;4;4;4	Power @ slot4	29.92157	24	33	PASS
GSM900	60	902	5;5;5;5	PvT	-	-	-	PASS
GSM900	60	902	5;5;5;5	Power @ slot1	29.83163	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot2	29.86542	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot3	29.89465	24	32	PASS
GSM900	60	902	5;5;5;5	Power @ slot4	29.89291	24	32	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	27.81183	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	27.8378	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	27.84381	24	30	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	27.85544	24	30	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	25.75311	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	25.74722	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	25.76059	22	28	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	25.77029	22	28	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	23.73398	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	23.72391	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	23.74417	20	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	23.73257	20	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS

GSM900	60	902	9;9;9;9	Power slot1 @	21.67249	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot2 @	21.67194	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot3 @	21.67303	18	24	PASS
GSM900	60	902	9;9;9;9	Power slot4 @	21.67194	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS
GSM900	60	902	10;10;10;10	Power slot1 @	19.66083	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot2 @	19.64944	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot3 @	19.63684	16	22	PASS
GSM900	60	902	10;10;10;10	Power slot4 @	19.64307	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power slot1 @	17.71027	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot2 @	17.71222	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot3 @	17.68185	14	20	PASS
GSM900	60	902	11;11;11;11	Power slot4 @	17.69211	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power slot1 @	15.66376	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot2 @	15.63284	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot3 @	15.64343	12	18	PASS
GSM900	60	902	12;12;12;12	Power slot4 @	15.64157	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power slot1 @	13.55051	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot2 @	13.6145	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot3 @	13.59152	10	16	PASS
GSM900	60	902	13;13;13;13	Power slot4 @	13.60593	10	16	PASS

				slot4				
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Pow er @ slot1	11.53448	6	16	PASS
GSM900	60	902	14;14;14;14	Pow er @ slot2	11.52267	6	16	PASS
GSM900	60	902	14;14;14;14	Pow er @ slot3	11.5199	6	16	PASS
GSM900	60	902	14;14;14;14	Pow er @ slot4	11.52762	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Pow er @ slot1	9.526672	4	14	PASS
GSM900	60	902	15;15;15;15	Pow er @ slot2	9.624084	4	14	PASS
GSM900	60	902	15;15;15;15	Pow er @ slot3	9.620056	4	14	PASS
GSM900	60	902	15;15;15;15	Pow er @ slot4	9.610657	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Pow er @ slot1	7.552643	2	12	PASS
GSM900	60	902	16;16;16;16	Pow er @ slot2	7.541229	2	12	PASS
GSM900	60	902	16;16;16;16	Pow er @ slot3	7.55719	2	12	PASS
GSM900	60	902	16;16;16;16	Pow er @ slot4	7.545044	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Pow er @ slot1	4.297089	0	10	PASS
GSM900	60	902	17;17;17;17	Pow er @ slot2	4.288391	0	10	PASS
GSM900	60	902	17;17;17;17	Pow er @ slot3	4.311676	0	10	PASS
GSM900	60	902	17;17;17;17	Pow er @ slot4	4.297943	0	10	PASS
GSM900	124	914.8	3;3;3;3	PvT	-	-	-	PASS
GSM900	124	914.8	3;3;3;3	Pow er @ slot1	29.41324	25	32	PASS
GSM900	124	914.8	3;3;3;3	Pow er @ slot2	29.43497	25	32	PASS
GSM900	124	914.8	3;3;3;3	Pow er @	29.46393	25	32	PASS

				slot3				
GSM900	124	914.8	3;3;3;3	Power @ slot4	29.46033	25	32	PASS
GSM900	124	914.8	4;4;4;4	PvT	-	-	-	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot1	29.41681	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot2	29.42737	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot3	29.44586	24	33	PASS
GSM900	124	914.8	4;4;4;4	Power @ slot4	29.4668	24	33	PASS
GSM900	124	914.8	5;5;5;5	PvT	-	-	-	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot1	29.37625	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot2	29.40359	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot3	29.4231	24	32	PASS
GSM900	124	914.8	5;5;5;5	Power @ slot4	29.42752	24	32	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	27.36014	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	27.39185	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot3	27.38507	24	30	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	27.39633	24	30	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	25.28522	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	25.30405	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	25.31985	22	28	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	25.31015	22	28	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	23.26859	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	23.27847	20	26	PASS

				slot2				
GSM900	124	914.8	8;8;8;8	Power @ slot3	23.26935	20	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	23.27112	20	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	21.6373	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	21.62427	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	21.62738	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	21.62039	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	19.64944	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	19.63843	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	19.62799	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	19.6348	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	17.70694	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	17.69272	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	17.67468	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	17.67838	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	15.65039	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	15.64111	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	15.63965	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	15.63541	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @	13.63187	10	16	PASS

				slot1				
GSM900	124	914.8	13;13;13;13	Power @ slot2	13.68762	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	13.68015	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	13.67813	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	11.53827	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	11.5325	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	11.52802	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	11.5163	6	16	PASS
GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	9.572937	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	9.651001	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	9.635742	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	9.649475	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	7.588776	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	7.581299	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	7.580048	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	7.566437	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	4.352631	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	4.326813	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	4.345276	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	4.33786	0	10	PASS

DCS1800	512	1710.2	3;3;3;3	PvT	-	-	-	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot1	27.20398	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot2	27.14279	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot3	27.13412	22	29	PASS
DCS1800	512	1710.2	3;3;3;3	Power @ slot4	27.10919	22	29	PASS
DCS1800	512	1710.2	4;4;4;4	PvT	-	-	-	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot1	27.16486	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot2	27.10718	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot3	27.1066	21	30	PASS
DCS1800	512	1710.2	4;4;4;4	Power @ slot4	27.09515	21	30	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	27.15158	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	27.09653	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	27.06995	21	29	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	27.07678	21	29	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	25.14026	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	25.09509	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	25.08038	21	27	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	25.06317	21	27	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	23.20093	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	23.16348	19	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	23.13086	19	25	PASS

DCS1800	512	1710.2	7;7;7;7	Power @ slot4	23.1275	19	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	21.23657	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	21.1716	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	21.15259	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	21.1514	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	19.17038	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	19.12616	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	19.09528	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	19.09613	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	17.18073	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot2	17.12909	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	17.1044	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	17.08609	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	15.20547	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	15.15405	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	15.1275	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	15.11481	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	13.18228	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	13.11481	8	16	PASS

DCS1800	512	1710.2	12;12;12;12	Power @ slot3	13.1152	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	13.09775	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	11.07483	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	11.0318	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	11.01514	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	10.99078	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	9.092224	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	9.052307	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	9.045135	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	9.04129	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	6.746368	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot2	6.703552	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot3	6.70462	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot4	6.69632	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT	-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot1	4.696259	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot2	4.674469	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	4.663483	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	4.646881	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	2.764191	-3	7	PASS

DCS1800	512	1710.2	17;17;17;17	Power @ slot2	2.724884	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot3	2.718536	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	2.700256	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	0.6032104	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	0.5852051	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	0.565094	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot4	0.5730286	-5	5	PASS
DCS1800	700	1747.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot1	27.18869	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot2	27.15915	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot3	27.13892	22	29	PASS
DCS1800	700	1747.8	3;3;3;3	Power @ slot4	27.13297	22	29	PASS
DCS1800	700	1747.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot1	27.1969	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot2	27.12357	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot3	27.11472	21	30	PASS
DCS1800	700	1747.8	4;4;4;4	Power @ slot4	27.10831	21	30	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	27.16113	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	27.12451	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	27.10483	21	29	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	27.08417	21	29	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS

DCS1800	700	1747.8	6;6;6;6	Power slot1 @	25.1532	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot2 @	25.09348	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot3 @	25.07684	21	27	PASS
DCS1800	700	1747.8	6;6;6;6	Power slot4 @	25.07306	21	27	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot1 @	23.18423	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot2 @	23.13412	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot3 @	23.11334	19	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power slot4 @	23.09845	19	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot1 @	21.19202	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot2 @	21.14621	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot3 @	21.12195	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power slot4 @	21.11594	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot1 @	19.1535	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot2 @	19.1059	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot3 @	19.0798	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power slot4 @	19.08295	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot1 @	17.1485	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot2 @	17.11417	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot3 @	17.09436	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power slot4 @	17.08362	13	19	PASS

				slot4				
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	15.0853	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	15.03961	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	15.01364	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	15.00452	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	13.03824	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	13.07361	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	13.04852	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	13.01605	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.91949	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	10.88651	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.86325	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	10.8576	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	8.914001	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.961823	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	8.944031	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	8.941437	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	6.981537	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	6.966583	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot3	6.949219	2	10	PASS

				slot3				
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	6.949371	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	4.927185	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	4.912964	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	4.909485	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	4.877869	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	2.978699	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	2.963715	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	2.948212	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	2.945099	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.8444824	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	0.8052368	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.7958069	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.7866516	-5	5	PASS
DCS1800	885	1784.8	3;3;3;3	PvT	-	-	-	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot1	27.89316	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot2	27.84399	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot3	27.83743	22	29	PASS
DCS1800	885	1784.8	3;3;3;3	Power @ slot4	27.82681	22	29	PASS
DCS1800	885	1784.8	4;4;4;4	PvT	-	-	-	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot1	27.86084	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot2	27.80984	21	30	PASS


				slot2				
DCS1800	885	1784.8	4;4;4;4	Power @ slot3	27.81006	21	30	PASS
DCS1800	885	1784.8	4;4;4;4	Power @ slot4	27.78137	21	30	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	27.8259	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	27.78409	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	27.77847	21	29	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	27.76151	21	29	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	25.85086	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	25.79861	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	25.7807	21	27	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	25.77173	21	27	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	23.80612	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	23.77734	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot3	23.77151	19	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	23.75513	19	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	21.79327	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	21.75769	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	21.74301	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	21.72705	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @	19.78217	15	21	PASS

				slot1				
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.75253	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	19.73114	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	19.71768	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	17.78888	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	17.73898	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	17.74005	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	17.71674	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	15.7226	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	15.68082	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.63901	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	15.65393	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	13.60458	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	13.65384	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	13.62549	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	13.6077	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	11.38986	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	11.37637	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	11.35205	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	11.36755	6	14	PASS


DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	9.348846	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	9.417023	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	9.402527	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	9.388977	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	7.722778	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	7.685333	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	7.669678	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	7.670441	2	10	PASS
DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	5.617065	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	5.595093	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	5.590851	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	5.576324	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	3.696869	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	3.663208	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot3	3.655853	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot4	3.656036	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot1	1.548431	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot2	1.508636	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot3	1.50235	-5	5	PASS

DCS1800	885	1784.8	18;18;18;18	Power @ slot4	1.513458	-5	5	PASS
---------	-----	--------	-------------	---------------	----------	----	---	------


GSM900 Channel=124 Gamma=17;17;17;17.png

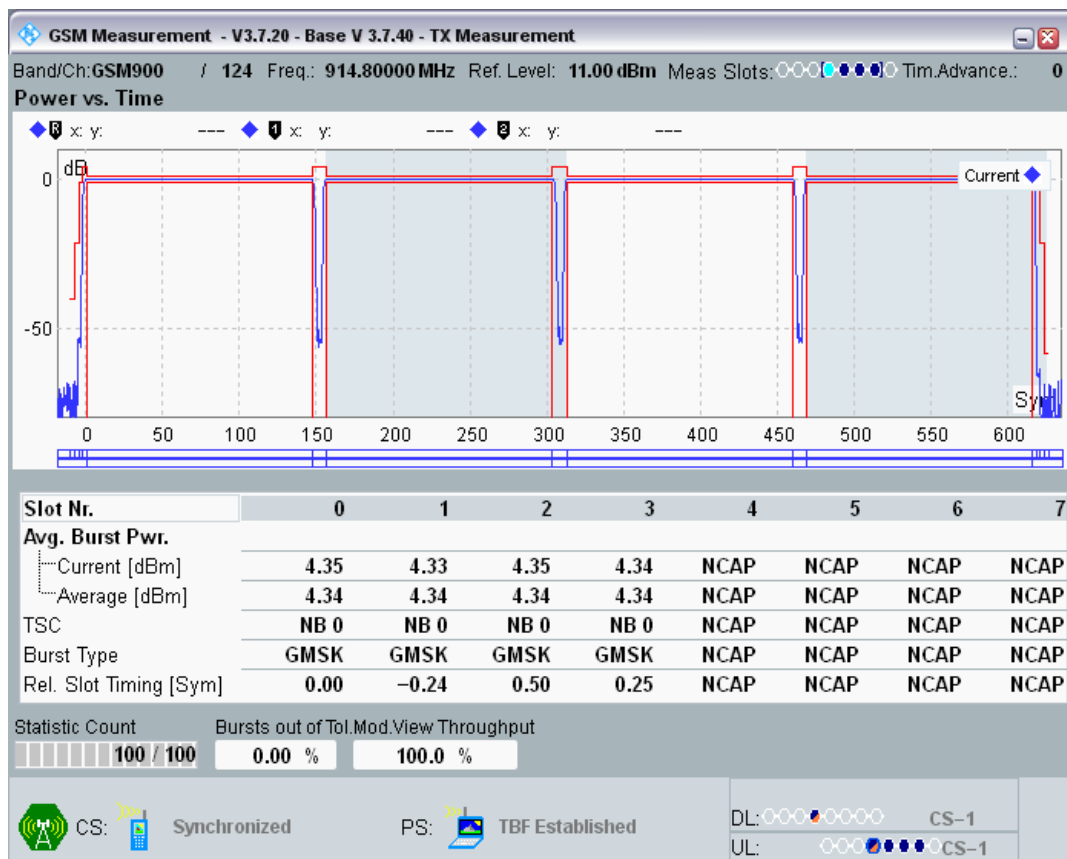


GSM900 Channel=124 Gamma=3;3;3;3.png

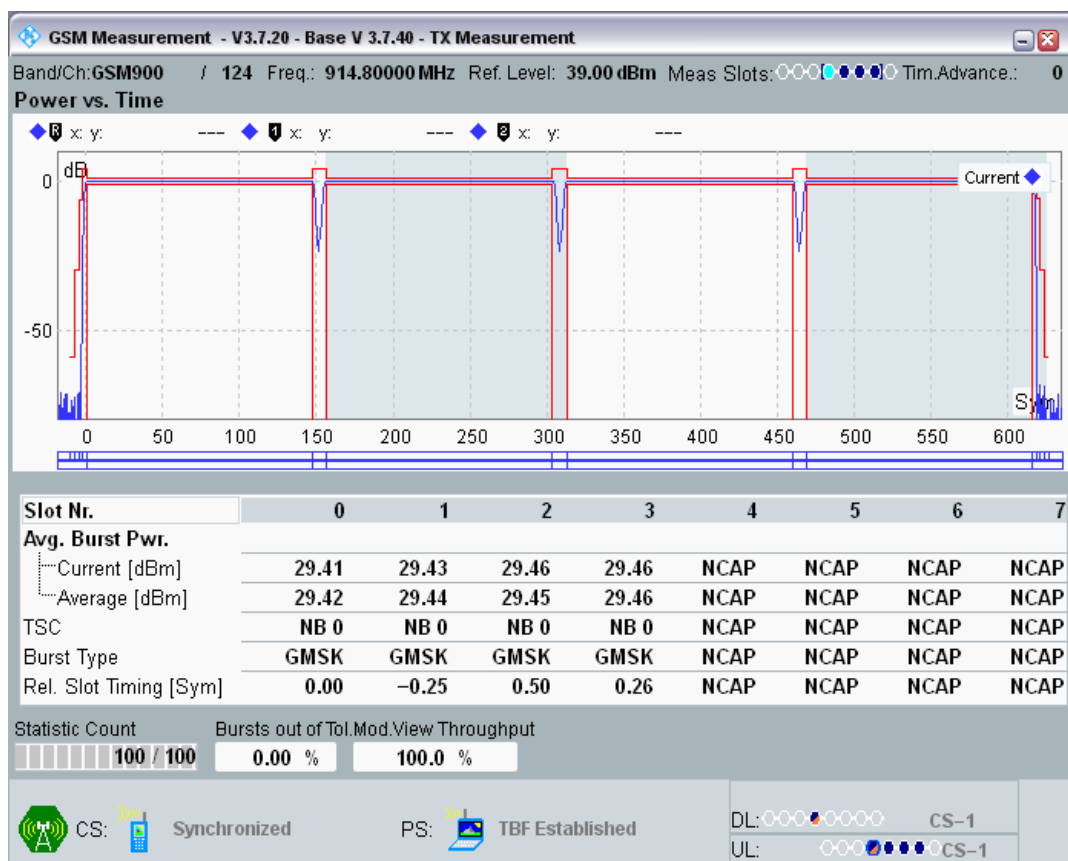

GSM900 Channel=60 Gamma=17;17;17;17.png

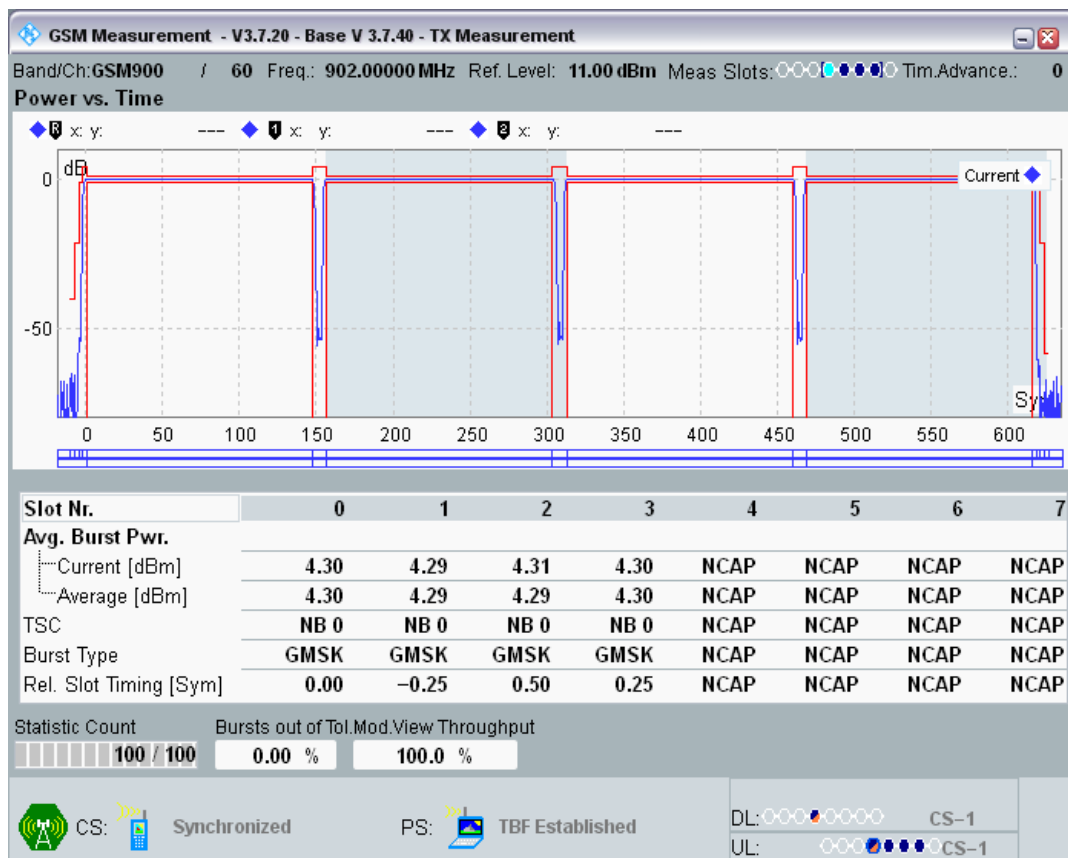


GSM900 Channel=60 Gamma=3;3;3;3.png

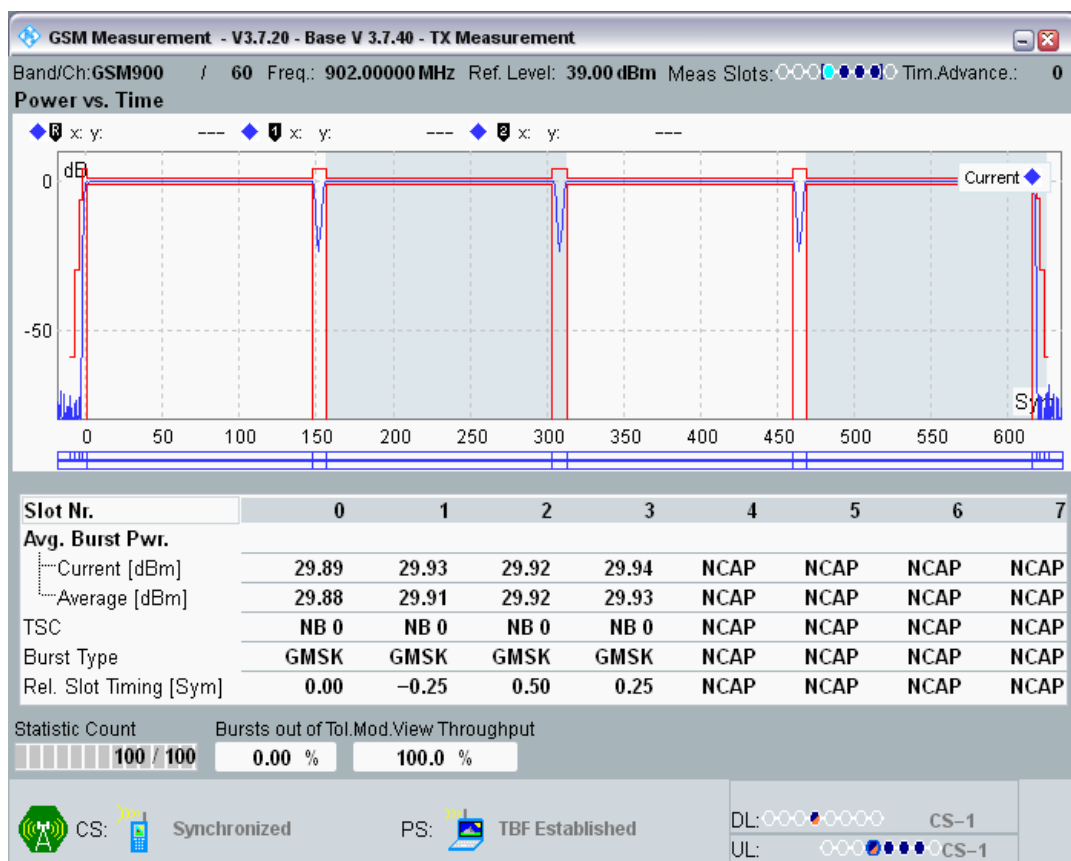

GSM900 Channel=975 Gamma=17;17;17;17.png




GSM900 Channel=975 Gamma=3;3;3;3.png

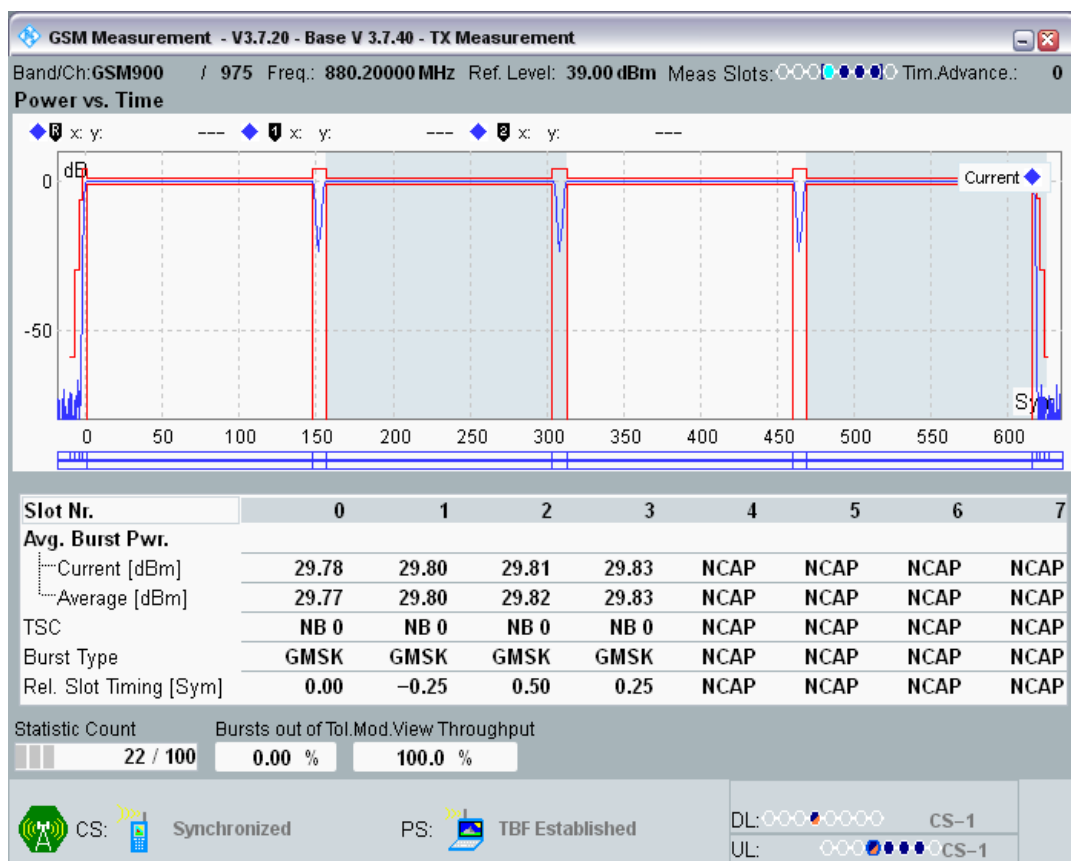

DCS1800 Channel=512 Gamma=18;18;18;18.png




DCS1800 Channel=512 Gamma=3;3;3;3.png

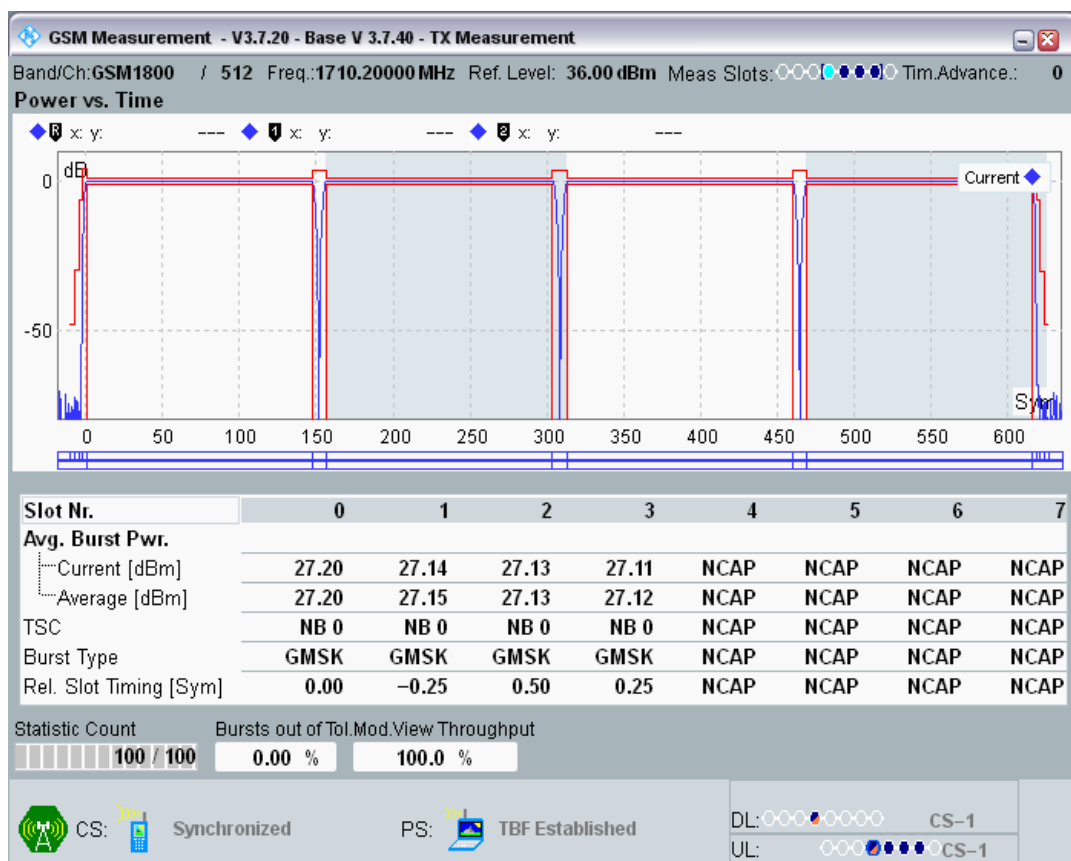

DCS1800 Channel=700 Gamma=18;18;18;18.png




DCS1800 Channel=700 Gamma=3;3;3;3.png

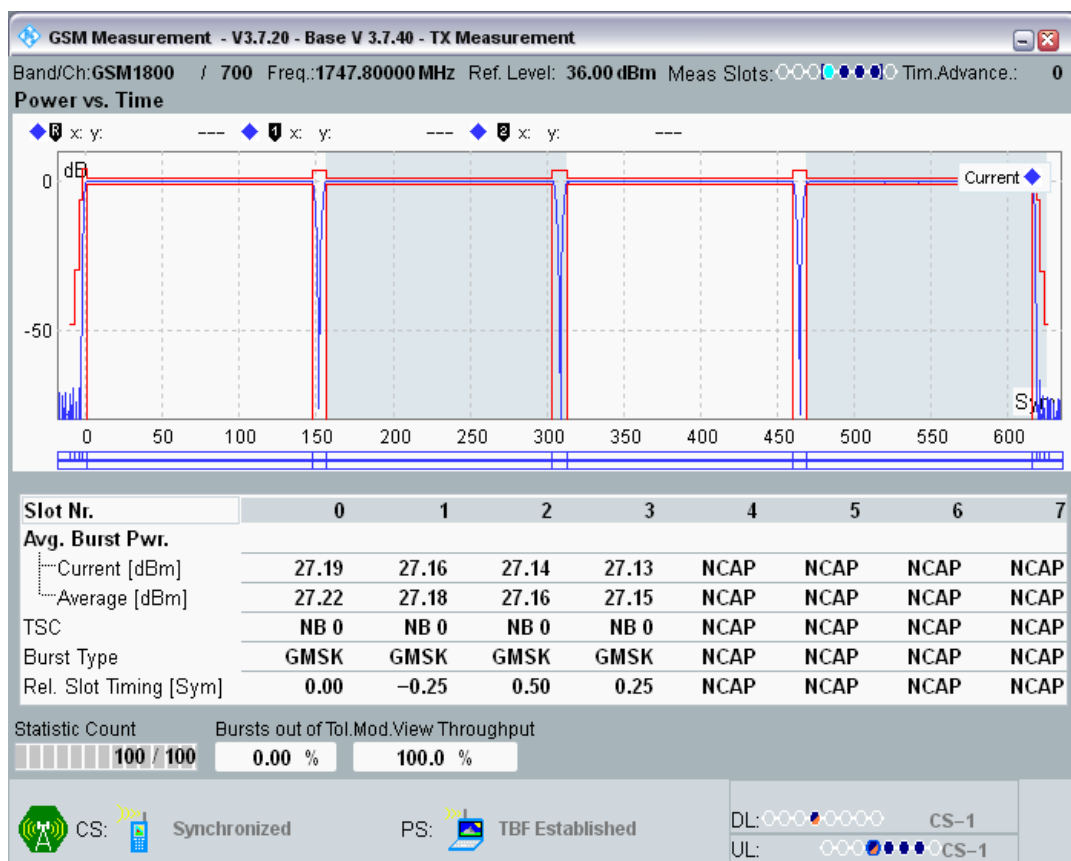

DCS1800 Channel=885 Gamma=18;18;18;18.png



DCS1800 Channel=885 Gamma=3;3;3.png

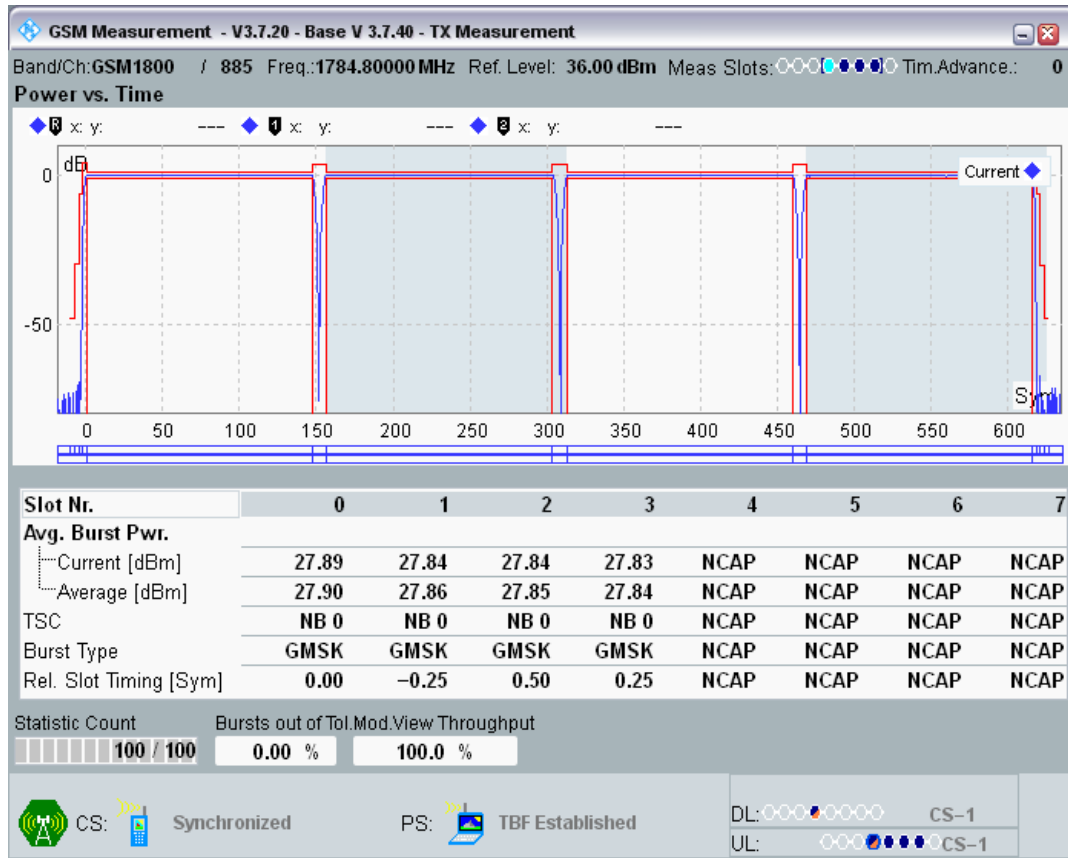

Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-79.28	-60	-57.36	-51	PASS
GSM900	975	880.2	3;3;3;3	-1600 KHz	-79.79	-60	-57.87	-51	PASS
GSM900	975	880.2	3;3;3;3	-1400 KHz	-78.92	-60	-57.01	-51	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-78.59	-60	-56.67	-51	PASS
GSM900	975	880.2	3;3;3;3	-1000 KHz	-76.33	-60	-54.41	-51	PASS
GSM900	975	880.2	3;3;3;3	-800 KHz	-76.32	-60	-54.40	-51	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-74.68	-60	-52.76	-51	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-69.96	-60	-48.04	-36	PASS
GSM900	975	880.2	3;3;3;3	-250 KHz	-40.94	-33	-19.02	-36	PASS

GSM900	975	880.2	3;3;3;3	-200 KHz	-36.76	-30	-14.84	-36	PASS
GSM900	975	880.2	3;3;3;3	-100 KHz	-8.67	0.5	13.24	-36	PASS
GSM900	975	880.2	3;3;3;3	100 KHz	-8.52	0.5	13.40	-36	PASS
GSM900	975	880.2	3;3;3;3	200 KHz	-36.65	-30	-14.73	-36	PASS
GSM900	975	880.2	3;3;3;3	250 KHz	-41.14	-33	-19.22	-36	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-69.96	-60	-48.04	-36	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-74.75	-60	-52.83	-51	PASS
GSM900	975	880.2	3;3;3;3	800 KHz	-76.23	-60	-54.32	-51	PASS
GSM900	975	880.2	3;3;3;3	1000 KHz	-77.08	-60	-55.16	-51	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-78.13	-60	-56.21	-51	PASS
GSM900	975	880.2	3;3;3;3	1400 KHz	-78.56	-60	-56.64	-51	PASS
GSM900	975	880.2	3;3;3;3	1600 KHz	-79.91	-60	-57.99	-51	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-79.56	-60	-57.64	-51	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-79.96	-60	-57.94	-51	PASS
GSM900	60	902	3;3;3;3	-1600 KHz	-80.54	-60	-58.52	-51	PASS
GSM900	60	902	3;3;3;3	-1400 KHz	-78.96	-60	-56.94	-51	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-78.41	-60	-56.39	-51	PASS
GSM900	60	902	3;3;3;3	-1000 KHz	-76.97	-60	-54.95	-51	PASS
GSM900	60	902	3;3;3;3	-800 KHz	-76.11	-60	-54.10	-51	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-75.04	-60	-53.03	-51	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-69.96	-60	-47.94	-36	PASS
GSM900	60	902	3;3;3;3	-250 KHz	-40.92	-33	-18.90	-36	PASS
GSM900	60	902	3;3;3;3	-200 KHz	-36.81	-30	-14.79	-36	PASS
GSM900	60	902	3;3;3;3	-100 KHz	-8.65	0.5	13.37	-36	PASS
GSM900	60	902	3;3;3;3	100 KHz	-8.71	0.5	13.31	-36	PASS


GSM900	60	902	3;3;3;3	200 KHz	-36.78	-30	-14.76	-36	PASS
GSM900	60	902	3;3;3;3	250 KHz	-40.85	-33	-18.84	-36	PASS
GSM900	60	902	3;3;3;3	400 KHz	-70.12	-60	-48.11	-36	PASS
GSM900	60	902	3;3;3;3	600 KHz	-74.96	-60	-52.94	-51	PASS
GSM900	60	902	3;3;3;3	800 KHz	-76.52	-60	-54.51	-51	PASS
GSM900	60	902	3;3;3;3	1000 KHz	-77.06	-60	-55.04	-51	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-78.24	-60	-56.22	-51	PASS
GSM900	60	902	3;3;3;3	1400 KHz	-78.71	-60	-56.69	-51	PASS
GSM900	60	902	3;3;3;3	1600 KHz	-80.43	-60	-58.42	-51	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-80.14	-60	-58.12	-51	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-79.03	-60	-57.41	-51	PASS
GSM900	124	914.8	3;3;3;3	-1600 KHz	-80.07	-60	-58.45	-51	PASS
GSM900	124	914.8	3;3;3;3	-1400 KHz	-79.28	-60	-57.66	-51	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-78.66	-60	-57.03	-51	PASS
GSM900	124	914.8	3;3;3;3	-1000 KHz	-77.11	-60	-55.48	-51	PASS
GSM900	124	914.8	3;3;3;3	-800 KHz	-76.72	-60	-55.10	-51	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-74.93	-60	-53.30	-51	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-70.15	-60	-48.53	-36	PASS
GSM900	124	914.8	3;3;3;3	-250 KHz	-41.07	-33	-19.45	-36	PASS
GSM900	124	914.8	3;3;3;3	-200 KHz	-36.73	-30	-15.11	-36	PASS
GSM900	124	914.8	3;3;3;3	-100 KHz	-8.81	0.5	12.82	-36	PASS
GSM900	124	914.8	3;3;3;3	100 KHz	-9.02	0.5	12.61	-36	PASS
GSM900	124	914.8	3;3;3;3	200 KHz	-36.77	-30	-15.15	-36	PASS
GSM900	124	914.8	3;3;3;3	250 KHz	-40.84	-33	-19.22	-36	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-70.43	-60	-48.80	-36	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-75.40	-60	-53.78	-51	PASS
GSM900	124	914.8	3;3;3;3	800 KHz	-76.62	-60	-55.00	-51	PASS

GSM900	124	914.8	3;3;3;3	1000 KHz	-77.47	-60	-55.85	-51	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-78.90	-60	-57.28	-51	PASS
GSM900	124	914.8	3;3;3;3	1400 KHz	-79.06	-60	-57.44	-51	PASS
GSM900	124	914.8	3;3;3;3	1600 KHz	-80.14	-60	-58.52	-51	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-79.05	-60	-57.43	-51	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-79.51	-60	-60.25	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1600 KHz	-79.65	-60	-60.39	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1400 KHz	-78.81	-60	-59.55	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-77.22	-60	-57.96	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-1000 KHz	-76.14	-60	-56.88	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-800 KHz	-74.82	-60	-55.56	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-73.08	-60	-53.82	-56	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-67.60	-60	-48.34	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-250 KHz	-40.88	-33	-21.62	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-200 KHz	-36.37	-30	-17.11	-36	PASS
DCS1800	512	1710.2	3;3;3;3	-100 KHz	-8.58	0.5	10.68	-36	PASS
DCS1800	512	1710.2	3;3;3;3	100 KHz	-8.75	0.5	10.51	-36	PASS
DCS1800	512	1710.2	3;3;3;3	200 KHz	-36.37	-30	-17.11	-36	PASS
DCS1800	512	1710.2	3;3;3;3	250 KHz	-40.80	-33	-21.54	-36	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-67.68	-60	-48.42	-36	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-73.41	-60	-54.15	-56	PASS
DCS1800	512	1710.2	3;3;3;3	800 KHz	-75.04	-60	-55.78	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1000 KHz	-76.30	-60	-57.04	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-77.50	-60	-58.24	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1400 KHz	-78.13	-60	-58.87	-56	PASS


				KHz					
DCS1800	512	1710.2	3;3;3;3	1600 KHz	-79.43	-60	-60.17	-56	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-79.91	-60	-60.65	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-79.45	-60	-60.27	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1600 KHz	-79.72	-60	-60.54	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1400 KHz	-78.31	-60	-59.12	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-77.43	-60	-58.24	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-1000 KHz	-75.67	-60	-56.49	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-800 KHz	-74.76	-60	-55.58	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-73.11	-60	-53.93	-56	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-67.60	-60	-48.41	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-250 KHz	-41.02	-33	-21.84	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-200 KHz	-36.39	-30	-17.21	-36	PASS
DCS1800	700	1747.8	3;3;3;3	-100 KHz	-8.79	0.5	10.39	-36	PASS
DCS1800	700	1747.8	3;3;3;3	100 KHz	-8.66	0.5	10.52	-36	PASS
DCS1800	700	1747.8	3;3;3;3	200 KHz	-36.47	-30	-17.29	-36	PASS
DCS1800	700	1747.8	3;3;3;3	250 KHz	-40.79	-33	-21.61	-36	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-67.90	-60	-48.71	-36	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-73.04	-60	-53.86	-56	PASS
DCS1800	700	1747.8	3;3;3;3	800 KHz	-74.90	-60	-55.72	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1000 KHz	-76.01	-60	-56.83	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-77.41	-60	-58.23	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1400 KHz	-78.06	-60	-58.88	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1600 KHz	-79.41	-60	-60.23	-56	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-79.50	-60	-60.32	-56	PASS

DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-79.61	-60	-59.81	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1600 KHz	-79.36	-60	-59.56	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1400 KHz	-78.50	-60	-58.70	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-77.57	-60	-57.77	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-1000 KHz	-76.30	-60	-56.50	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-800 KHz	-74.83	-60	-55.03	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-72.95	-60	-53.15	-56	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-67.94	-60	-48.14	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-250 KHz	-40.87	-33	-21.07	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-200 KHz	-36.34	-30	-16.54	-36	PASS
DCS1800	885	1784.8	3;3;3;3	-100 KHz	-8.59	0.5	11.21	-36	PASS
DCS1800	885	1784.8	3;3;3;3	100 KHz	-8.39	0.5	11.41	-36	PASS
DCS1800	885	1784.8	3;3;3;3	200 KHz	-36.38	-30	-16.58	-36	PASS
DCS1800	885	1784.8	3;3;3;3	250 KHz	-40.74	-33	-20.94	-36	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-67.90	-60	-48.10	-36	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-72.93	-60	-53.13	-56	PASS
DCS1800	885	1784.8	3;3;3;3	800 KHz	-75.00	-60	-55.20	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1000 KHz	-76.10	-60	-56.30	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-77.59	-60	-57.79	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1400 KHz	-78.65	-60	-58.86	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1600 KHz	-79.75	-60	-59.95	-56	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-79.94	-60	-60.14	-56	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

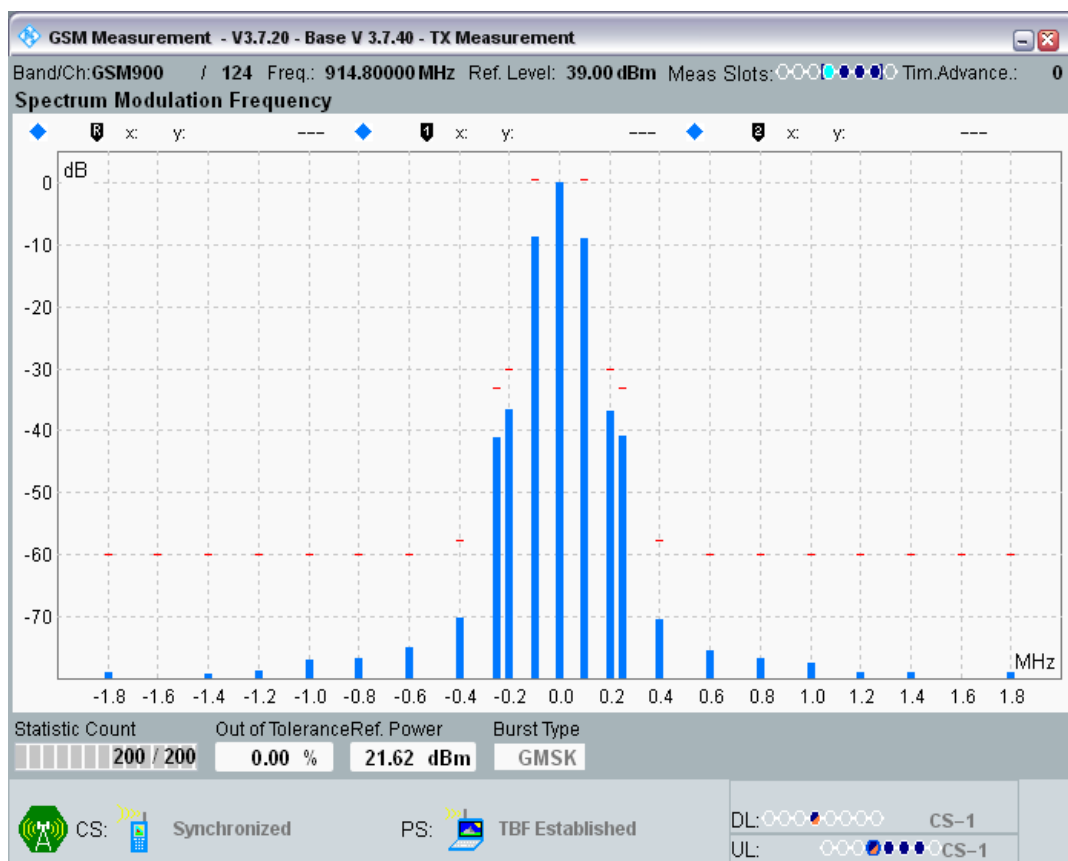


GSM900 Channel=60 Gamma=3;3;3;3.png

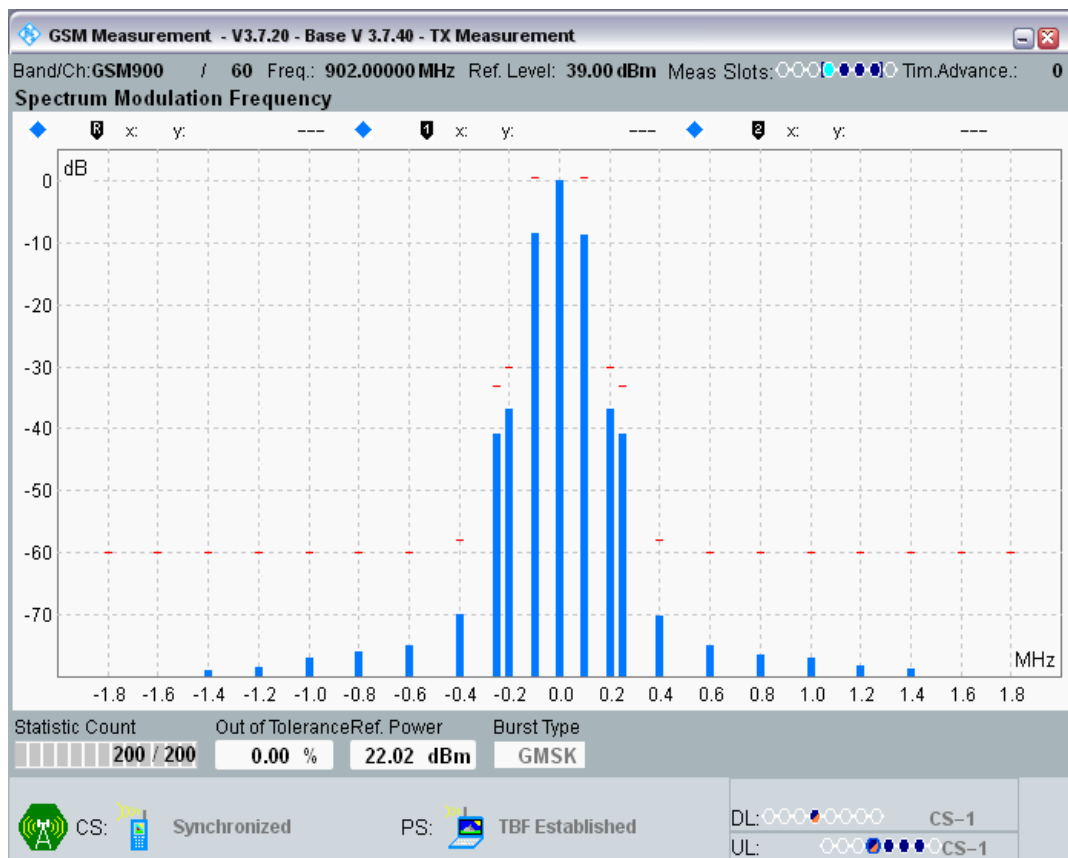


GSM900 Channel=975 Gamma=3;3;3;3.png

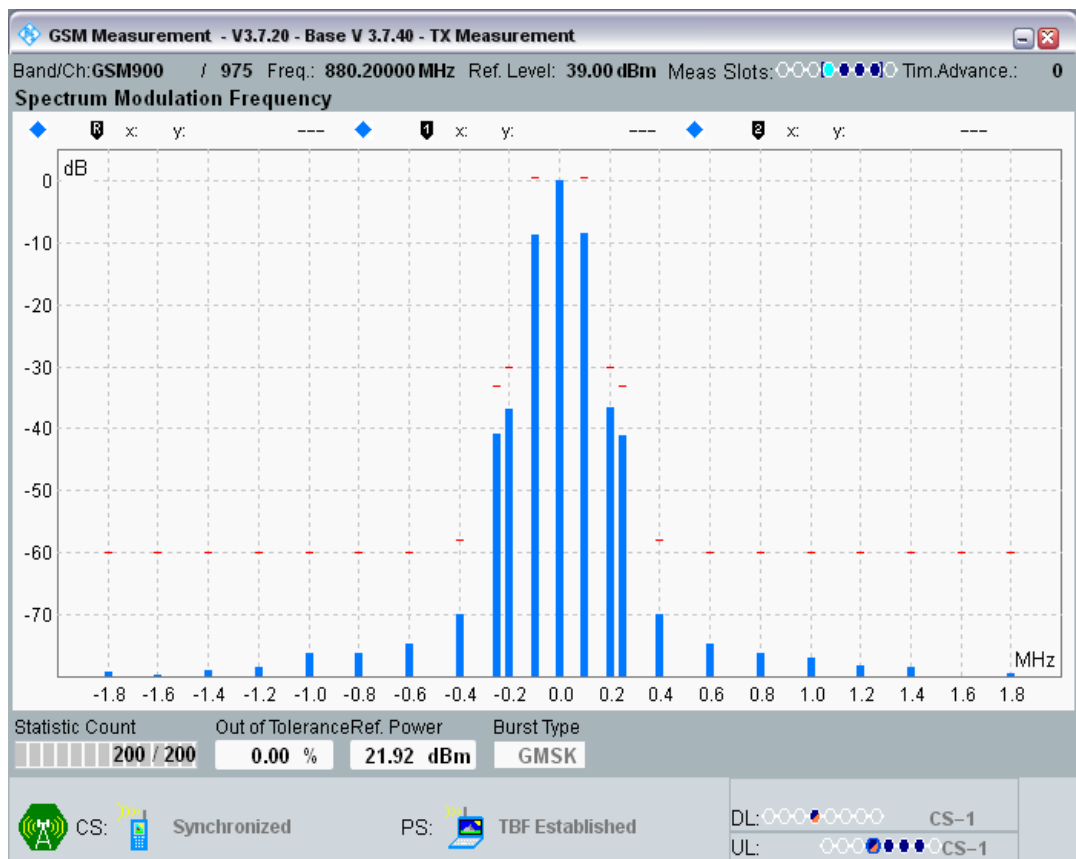


DCS1800 Channel=512 Gamma=3;3;3;3.png

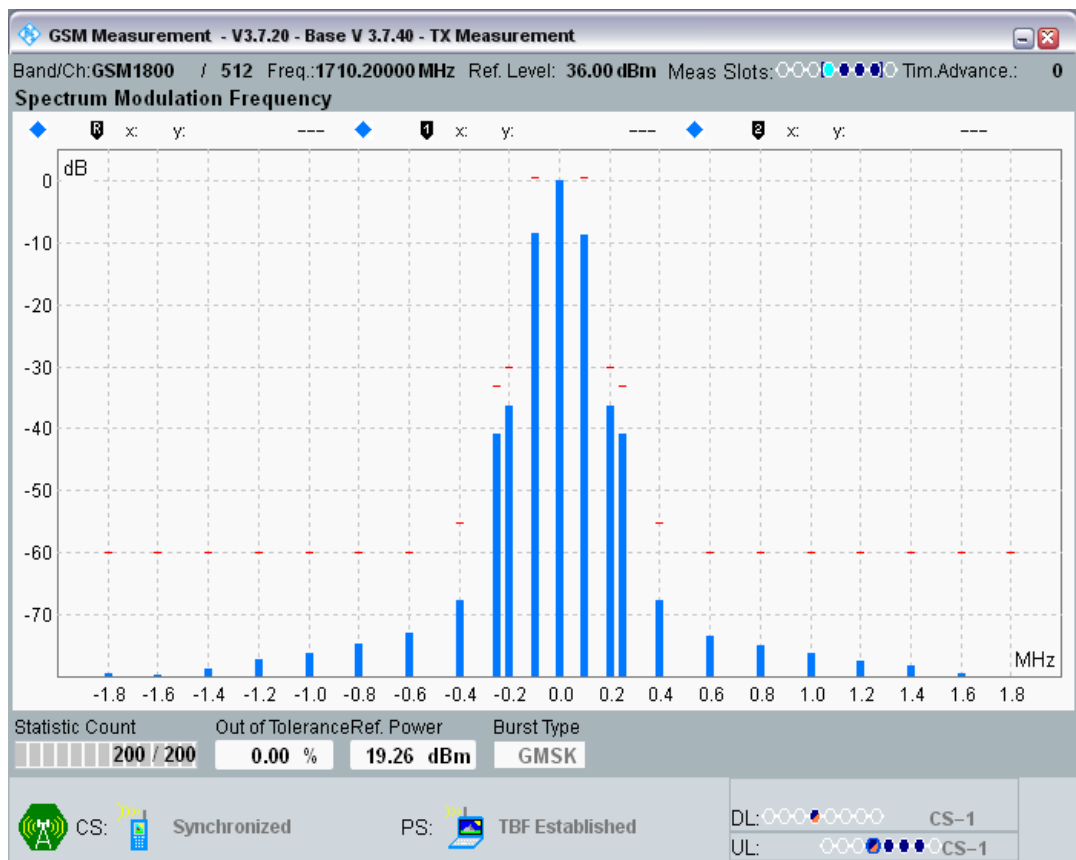

DCS1800 Channel=700 Gamma=3;3;3;3.png

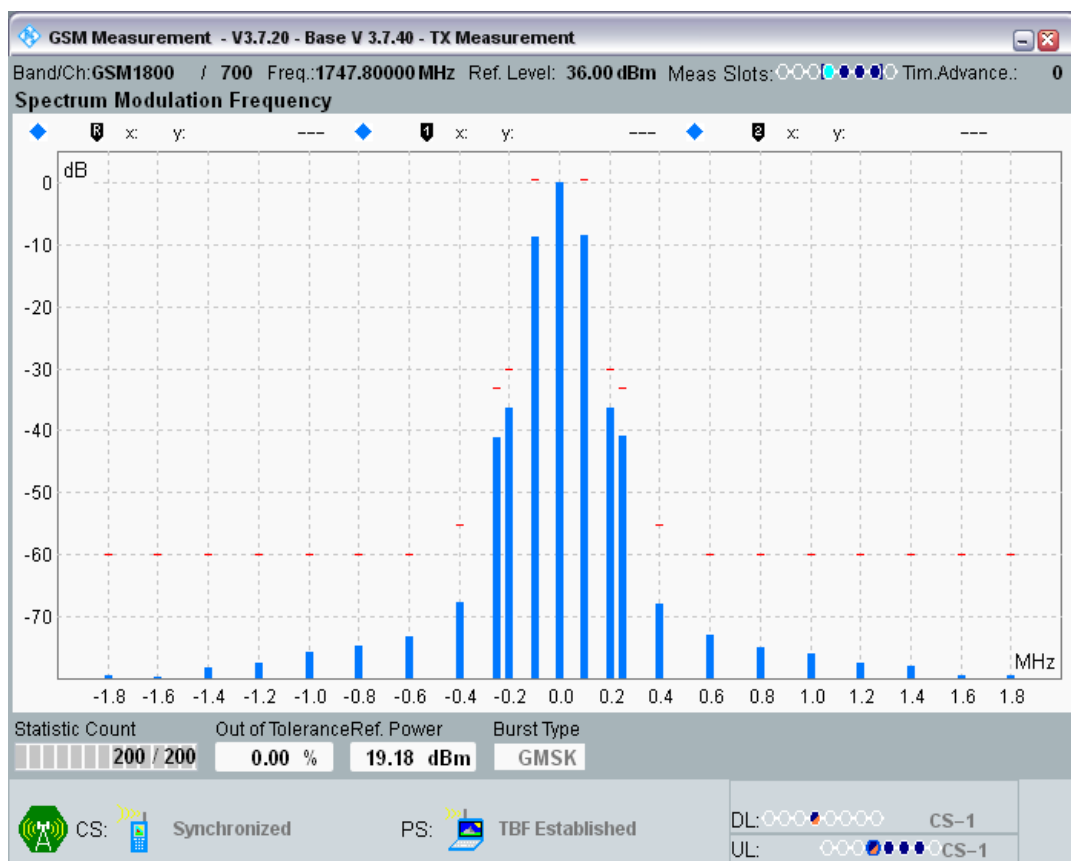

DCS1800 Channel=885 Gamma=3;3;3;3.png

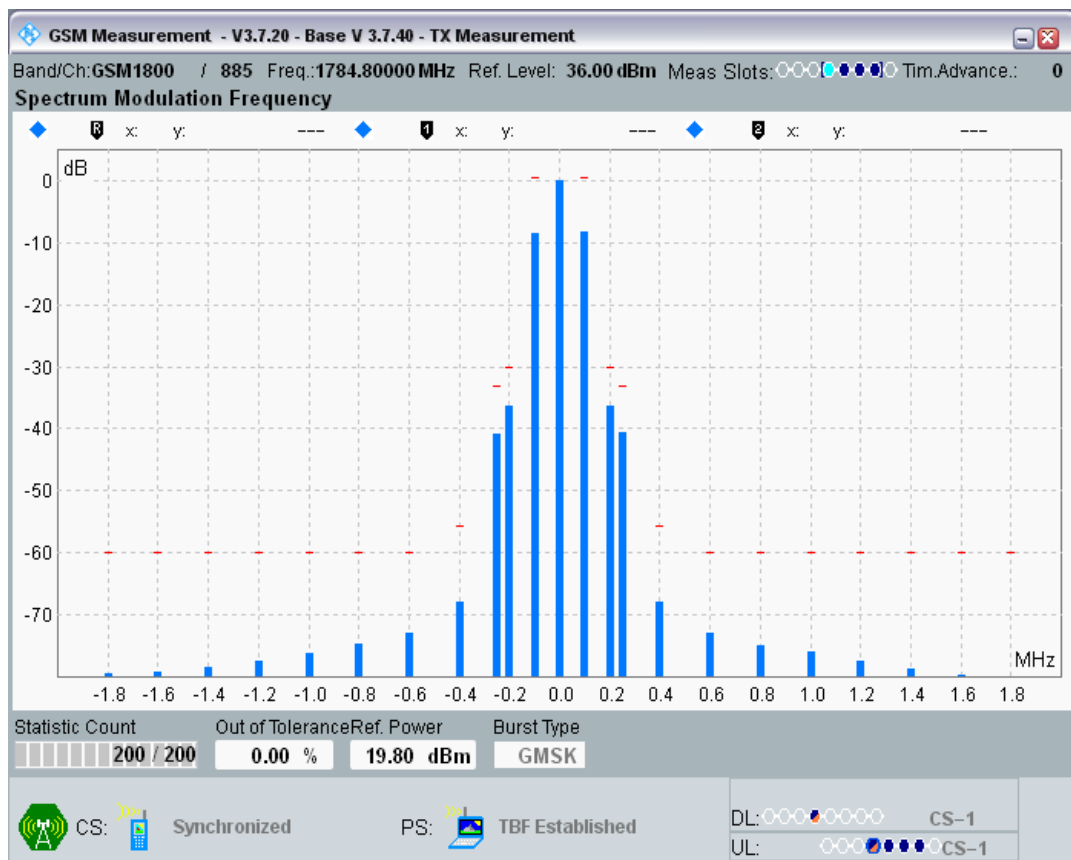


Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	3;3;3;3	-1800 KHz	-38.52	-24	PASS
GSM900	975	880.2	3;3;3;3	-1200 KHz	-35.06	-21	PASS
GSM900	975	880.2	3;3;3;3	-600 KHz	-30.12	-21	PASS
GSM900	975	880.2	3;3;3;3	-400 KHz	-26.33	-19	PASS
GSM900	975	880.2	3;3;3;3	400 KHz	-24.96	-19	PASS
GSM900	975	880.2	3;3;3;3	600 KHz	-29.03	-21	PASS
GSM900	975	880.2	3;3;3;3	1200 KHz	-34.41	-21	PASS
GSM900	975	880.2	3;3;3;3	1800 KHz	-37.84	-24	PASS
GSM900	60	902	3;3;3;3	-1800 KHz	-38.39	-24	PASS
GSM900	60	902	3;3;3;3	-1200 KHz	-34.85	-21	PASS
GSM900	60	902	3;3;3;3	-600 KHz	-30.39	-21	PASS
GSM900	60	902	3;3;3;3	-400 KHz	-26.56	-19	PASS
GSM900	60	902	3;3;3;3	400 KHz	-25.22	-19	PASS
GSM900	60	902	3;3;3;3	600 KHz	-28.81	-21	PASS
GSM900	60	902	3;3;3;3	1200 KHz	-34.39	-21	PASS
GSM900	60	902	3;3;3;3	1800 KHz	-38.00	-24	PASS
GSM900	124	914.8	3;3;3;3	-1800 KHz	-39.56	-24	PASS
GSM900	124	914.8	3;3;3;3	-1200 KHz	-35.85	-21	PASS
GSM900	124	914.8	3;3;3;3	-600 KHz	-30.33	-21	PASS
GSM900	124	914.8	3;3;3;3	-400 KHz	-26.48	-19	PASS
GSM900	124	914.8	3;3;3;3	400 KHz	-25.25	-19	PASS
GSM900	124	914.8	3;3;3;3	600 KHz	-29.26	-21	PASS
GSM900	124	914.8	3;3;3;3	1200 KHz	-35.41	-21	PASS
GSM900	124	914.8	3;3;3;3	1800 KHz	-38.68	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-1800 KHz	-47.85	-27	PASS
DCS1800	512	1710.2	3;3;3;3	-1200 KHz	-44.59	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-600 KHz	-41.51	-24	PASS
DCS1800	512	1710.2	3;3;3;3	-400 KHz	-36.02	-22	PASS
DCS1800	512	1710.2	3;3;3;3	400 KHz	-34.28	-22	PASS
DCS1800	512	1710.2	3;3;3;3	600 KHz	-39.23	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1200 KHz	-44.95	-24	PASS
DCS1800	512	1710.2	3;3;3;3	1800 KHz	-48.04	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1800 KHz	-47.93	-27	PASS
DCS1800	700	1747.8	3;3;3;3	-1200 KHz	-45.22	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-600 KHz	-40.91	-24	PASS
DCS1800	700	1747.8	3;3;3;3	-400 KHz	-35.67	-22	PASS
DCS1800	700	1747.8	3;3;3;3	400 KHz	-32.56	-22	PASS
DCS1800	700	1747.8	3;3;3;3	600 KHz	-39.15	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1200 KHz	-45.72	-24	PASS
DCS1800	700	1747.8	3;3;3;3	1800 KHz	-48.55	-27	PASS
DCS1800	885	1784.8	3;3;3;3	-1800 KHz	-47.87	-27	PASS

DCS1800	885	1784.8	3;3;3;3	-1200 KHz	-44.33	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-600 KHz	-41.71	-24	PASS
DCS1800	885	1784.8	3;3;3;3	-400 KHz	-33.04	-22	PASS
DCS1800	885	1784.8	3;3;3;3	400 KHz	-33.05	-22	PASS
DCS1800	885	1784.8	3;3;3;3	600 KHz	-39.30	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1200 KHz	-44.92	-24	PASS
DCS1800	885	1784.8	3;3;3;3	1800 KHz	-48.11	-27	PASS


GSM900 Channel=124 Gamma=3;3;3;3.png

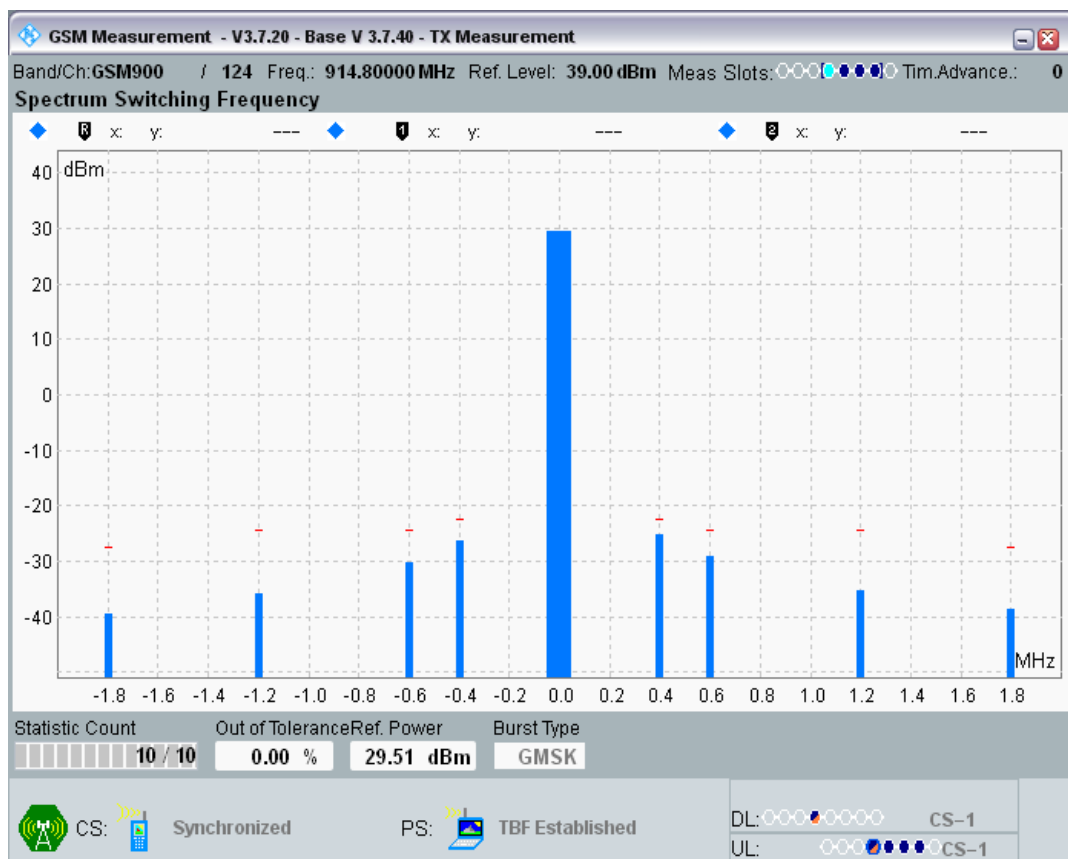


GSM900 Channel=60 Gamma=3;3;3;3.png

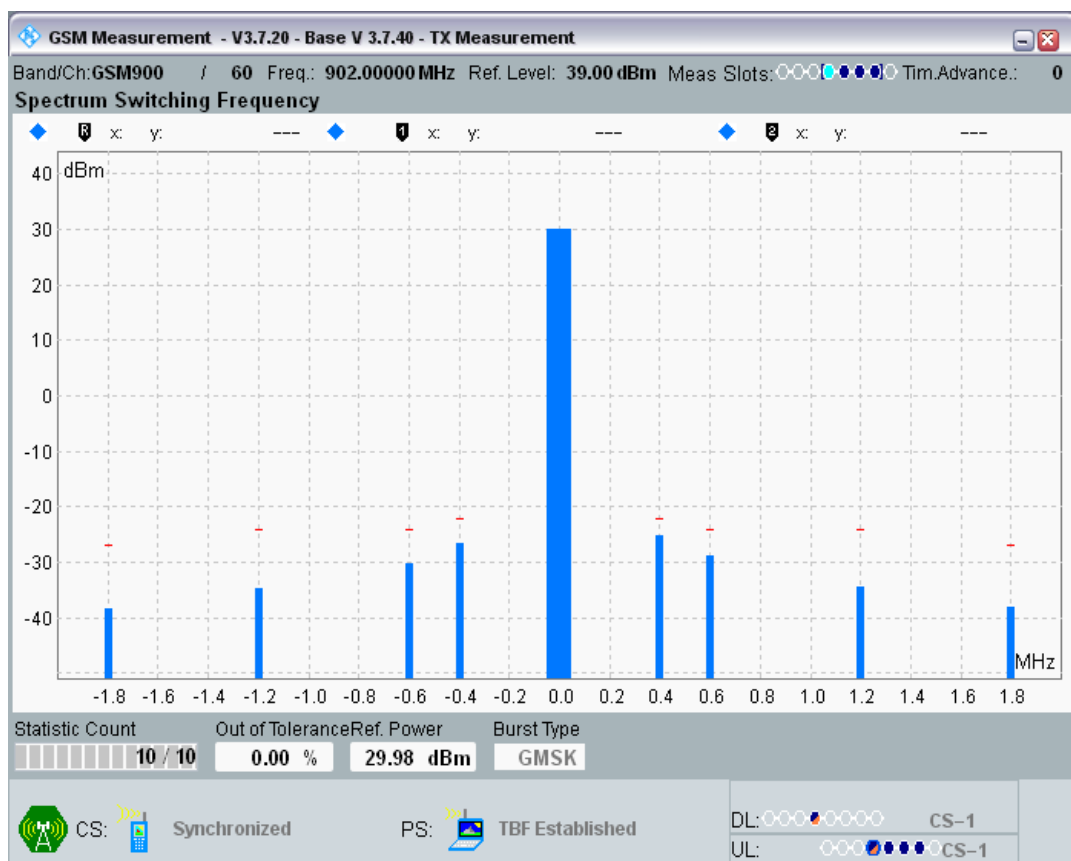


GSM900 Channel=975 Gamma=3;3;3;3.png

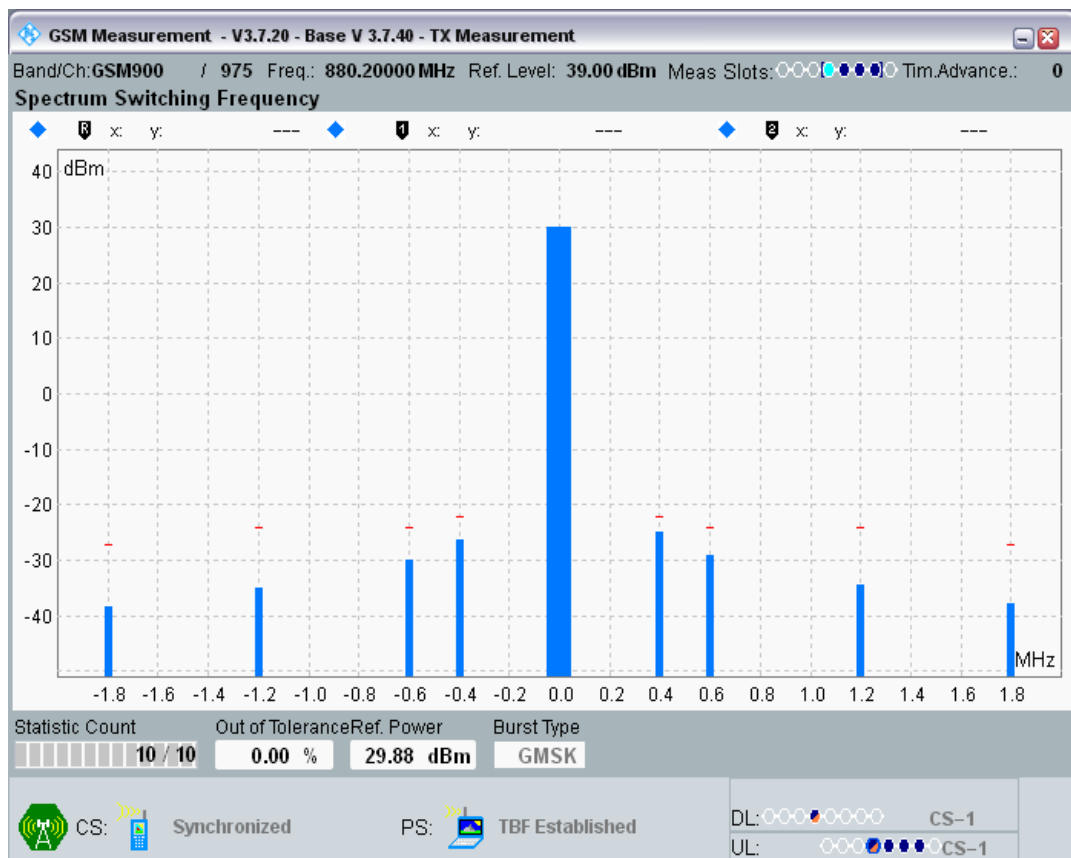


DCS1800 Channel=512 Gamma=3;3;3;3.png

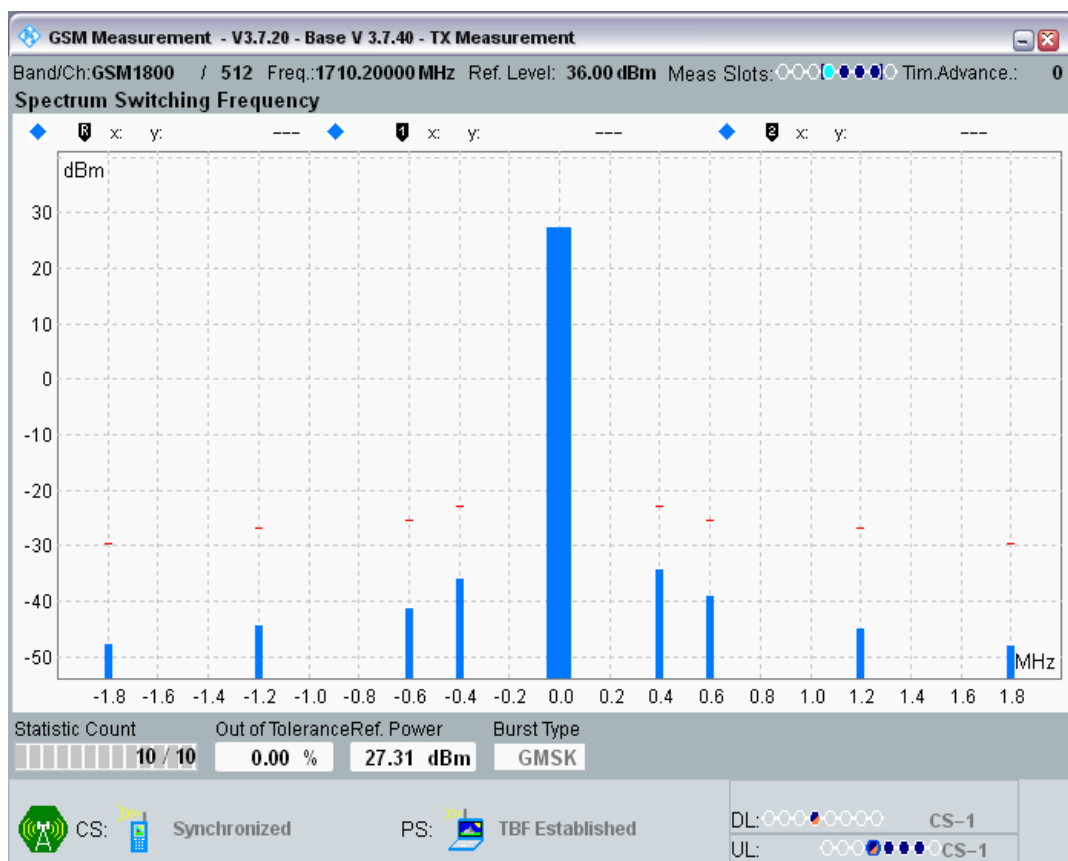

DCS1800 Channel=700 Gamma=3;3;3;3.png

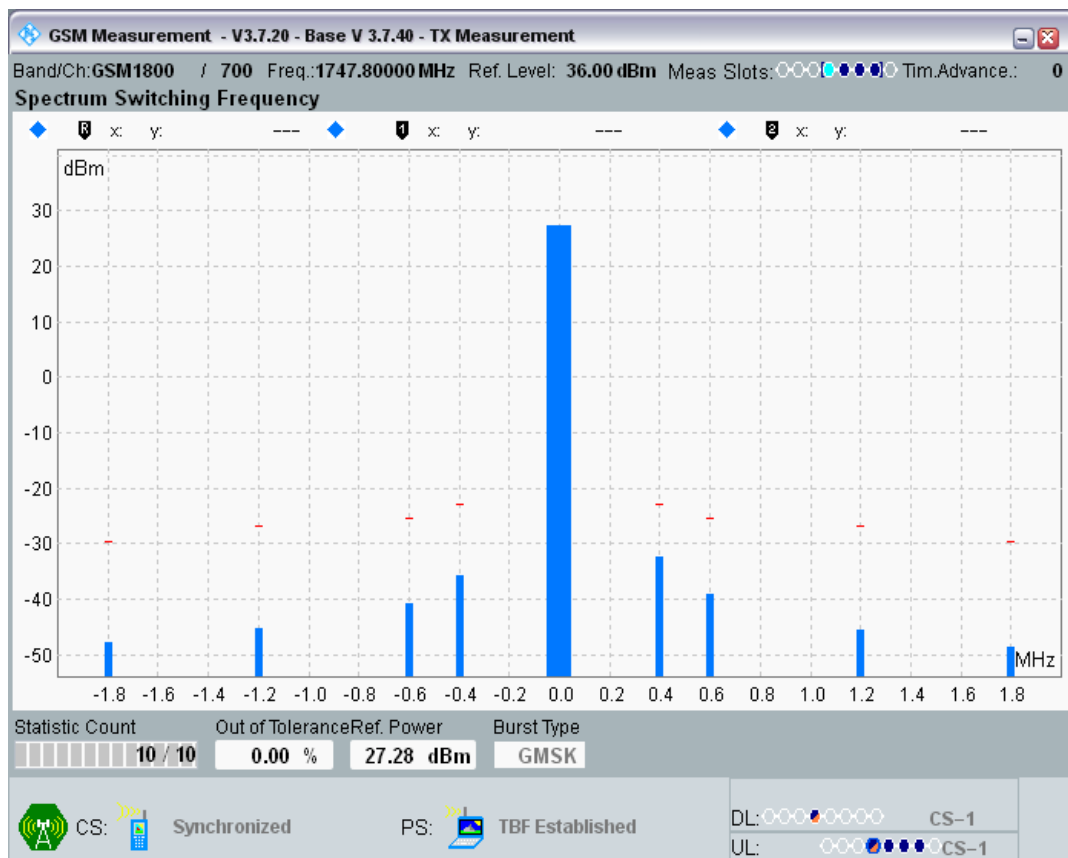


DCS1800 Channel=885 Gamma=3;3;3;3.png

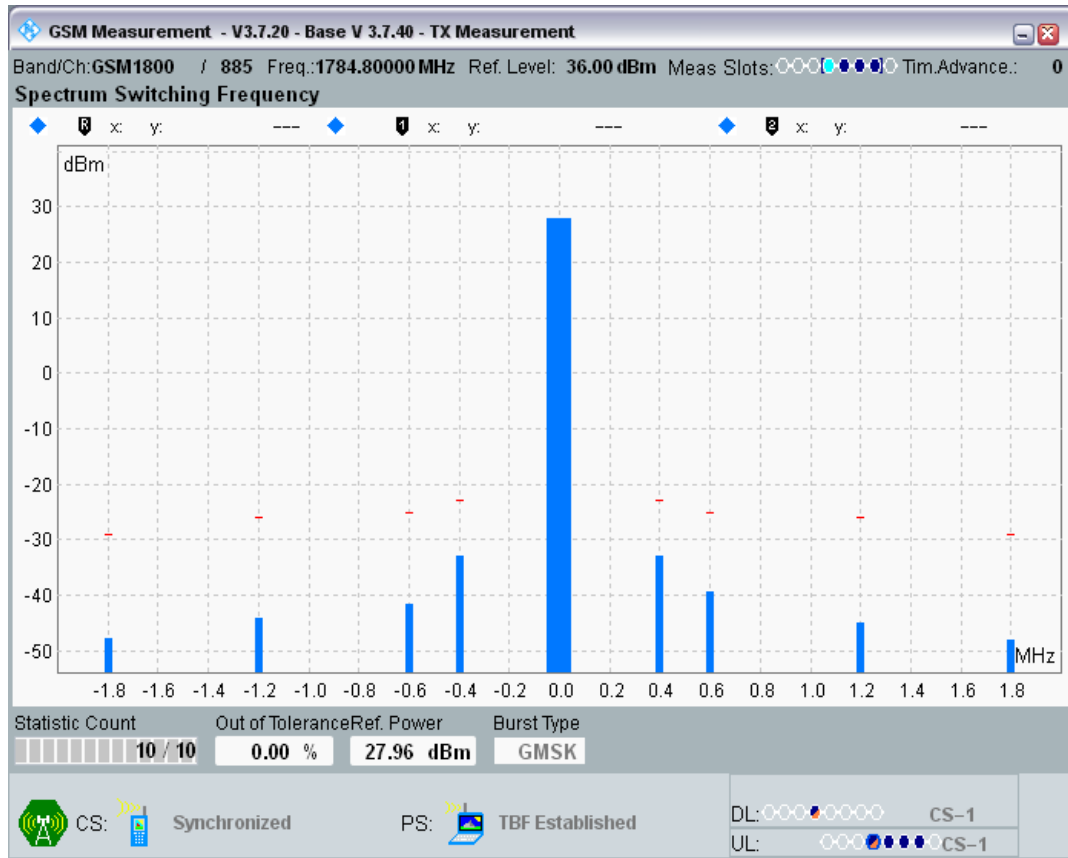


Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GSM900	975	880.2	6;6;6;6	Frequency Error (Hz)	13.08	-88.02	88.02	PASS
GSM900	975	880.2	6;6;6;6	RMS EVM (%)	1.01	0	9	PASS
GSM900	975	880.2	6;6;6;6	Peak EVM (%)	2.62	0	30	PASS
GSM900	60	902	6;6;6;6	Frequency Error (Hz)	14.46	-90.2	90.2	PASS
GSM900	60	902	6;6;6;6	RMS EVM (%)	1.04	0	9	PASS
GSM900	60	902	6;6;6;6	Peak EVM (%)	2.74	0	30	PASS
GSM900	124	914.8	6;6;6;6	Frequency Error (Hz)	12.95	-91.48	91.48	PASS
GSM900	124	914.8	6;6;6;6	RMS EVM (%)	1.08	0	9	PASS
GSM900	124	914.8	6;6;6;6	Peak EVM (%)	2.89	0	30	PASS
DCS1800	512	1710.2	5;5;5;5	Frequency Error (Hz)	25.34	-171.02	171.02	PASS
DCS1800	512	1710.2	5;5;5;5	RMS EVM (%)	1.24	0	9	PASS
DCS1800	512	1710.2	5;5;5;5	Peak EVM (%)	3.60	0	30	PASS
DCS1800	700	1747.8	5;5;5;5	Frequency Error (Hz)	22.63	-174.78	174.78	PASS
DCS1800	700	1747.8	5;5;5;5	RMS EVM (%)	1.37	0	9	PASS
DCS1800	700	1747.8	5;5;5;5	Peak EVM (%)	4.36	0	30	PASS
DCS1800	885	1784.8	5;5;5;5	Frequency Error (Hz)	26.15	-178.48	178.48	PASS
DCS1800	885	1784.8	5;5;5;5	RMS EVM (%)	1.41	0	9	PASS
DCS1800	885	1784.8	5;5;5;5	Peak EVM (%)	4.20	0	30	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

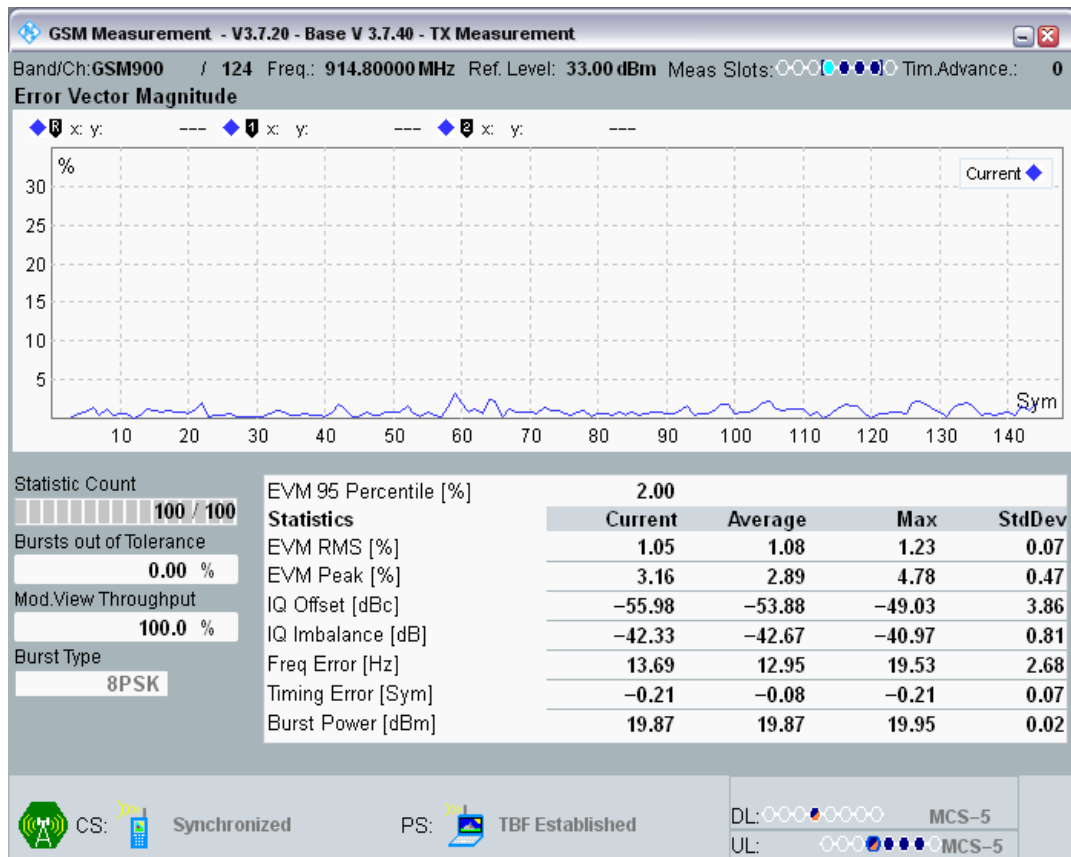


GSM900 Channel=60 Gamma=6;6;6;6.png

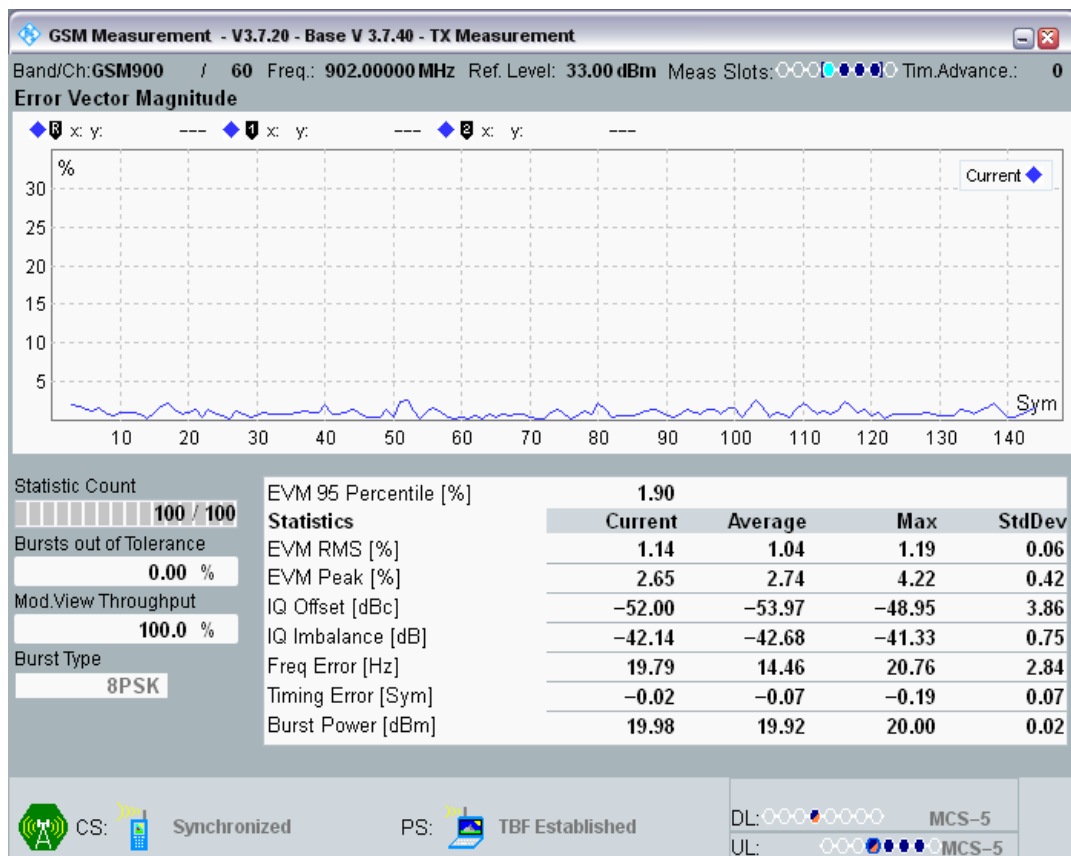


GSM900 Channel=975 Gamma=6;6;6.png

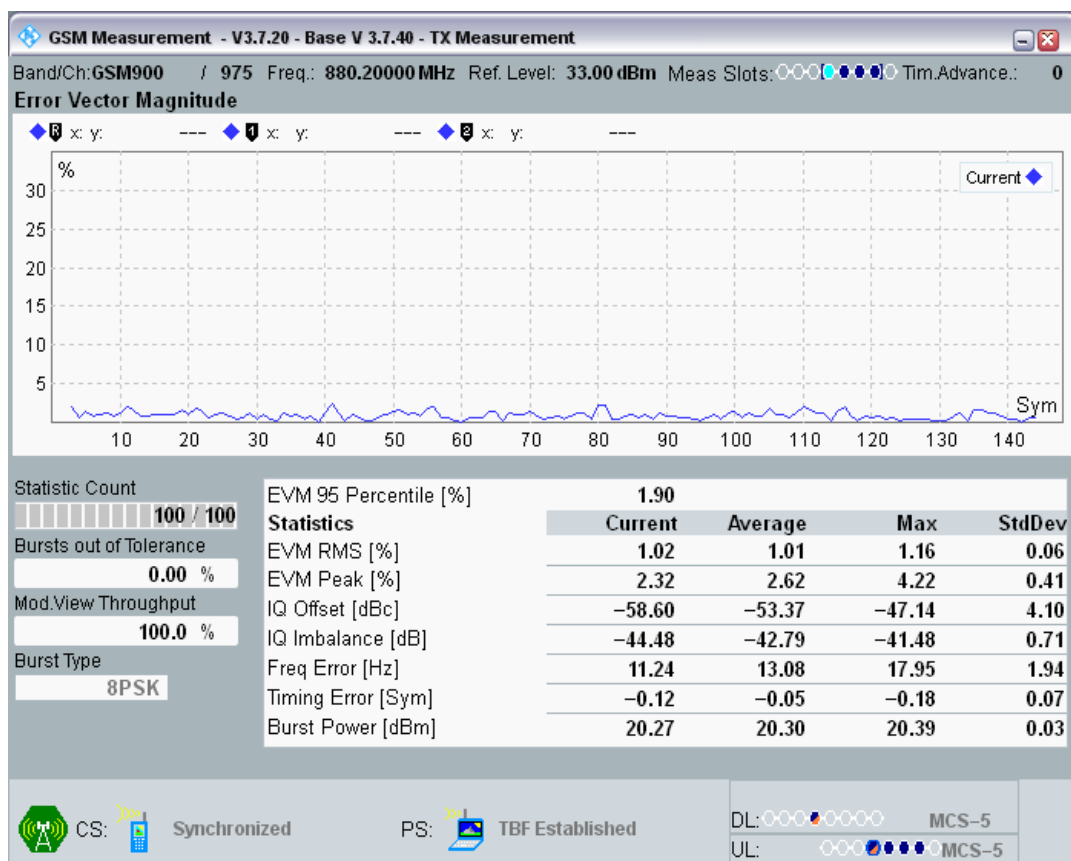


DCS1800 Channel=512 Gamma=5;5;5.png

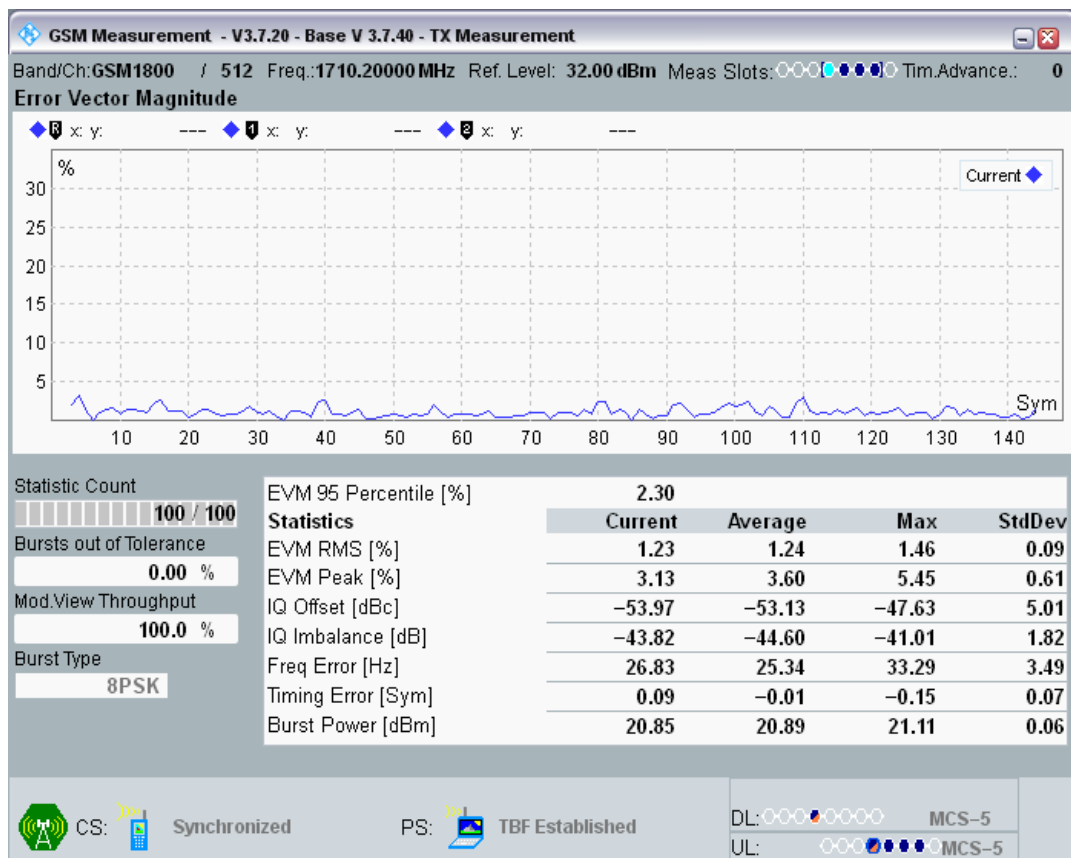

DCS1800 Channel=700 Gamma=5;5;5;5.png

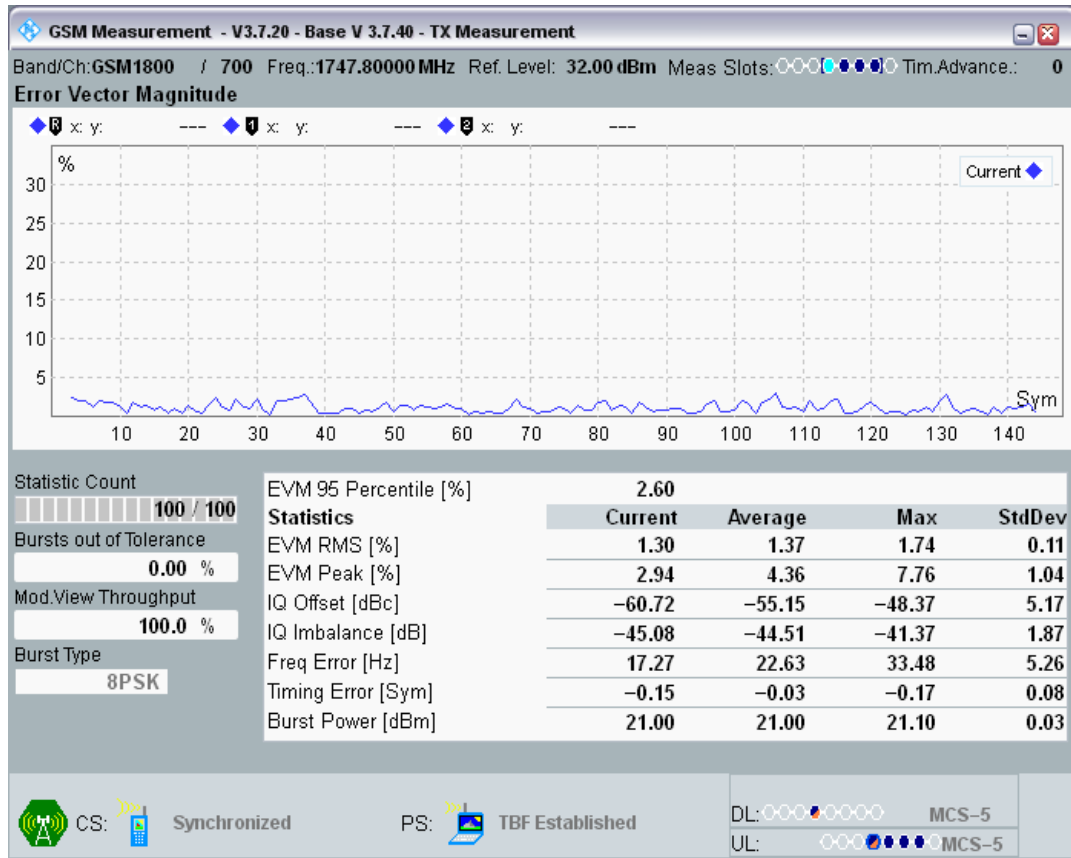


DCS1800 Channel=885 Gamma=5;5;5;5.png

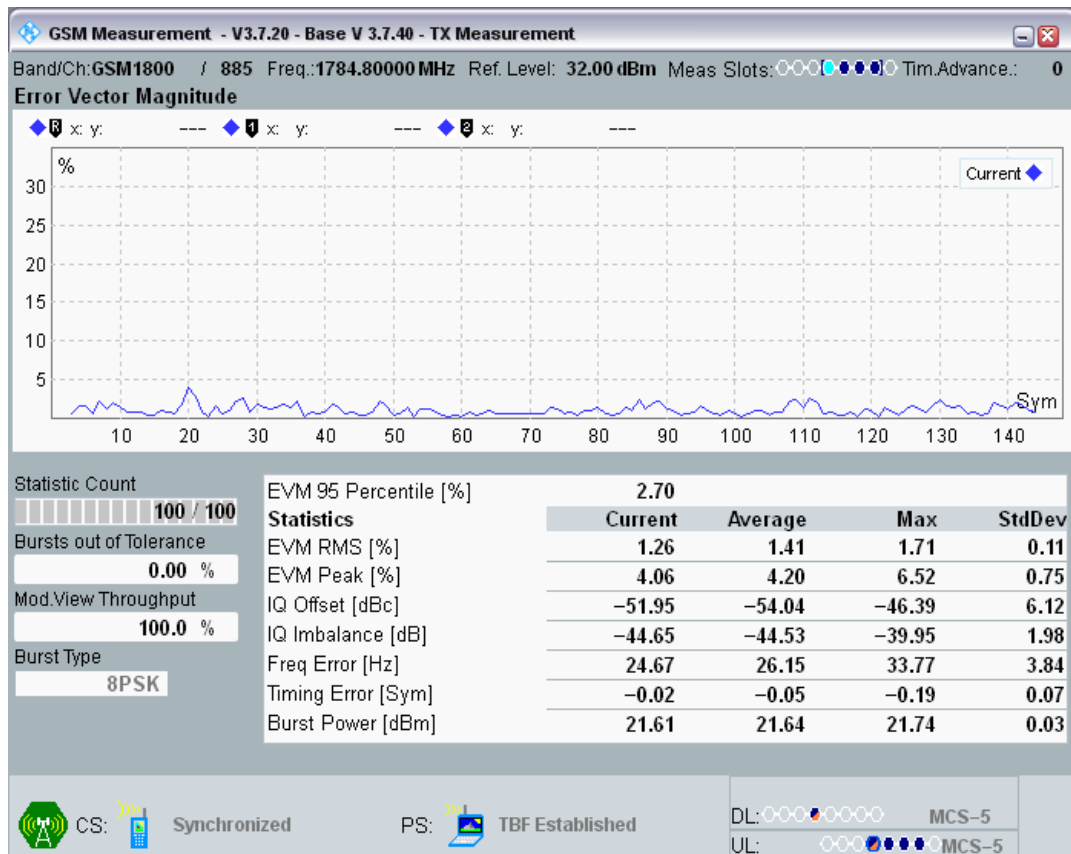


Clause 4.2.27 Frequency error under multipath and interference conditions in EGPRS Configuration

Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
GSM900	RA250	975	880.2	6;6;6;6	13.53	-300	300	PASS
GSM900	RA250	60	902	6;6;6;6	12.79	-300	300	PASS
GSM900	RA250	124	914.8	6;6;6;6	10.72	-300	300	PASS
GSM900	HT100	975	880.2	6;6;6;6	7.39	-180	180	PASS
GSM900	HT100	60	902	6;6;6;6	10.88	-180	180	PASS
GSM900	HT100	124	914.8	6;6;6;6	9.49	-180	180	PASS
GSM900	TU50	975	880.2	6;6;6;6	12.01	-160	160	PASS
GSM900	TU50	60	902	6;6;6;6	13.43	-160	160	PASS
GSM900	TU50	124	914.8	6;6;6;6	7.94	-160	160	PASS
GSM900	TU3	975	880.2	6;6;6;6	11.20	-230	230	PASS
GSM900	TU3	60	902	6;6;6;6	11.36	-230	230	PASS
GSM900	TU3	124	914.8	6;6;6;6	10.78	-230	230	PASS
DCS1800	RA130	512	1710.2	5;5;5;5	23.89	-400	400	PASS
DCS1800	RA130	700	1747.8	5;5;5;5	22.83	-400	400	PASS
DCS1800	RA130	885	1784.8	5;5;5;5	26.99	-400	400	PASS
DCS1800	HT100	512	1710.2	5;5;5;5	22.57	-350	350	PASS
DCS1800	HT100	700	1747.8	5;5;5;5	22.63	-350	350	PASS
DCS1800	HT100	885	1784.8	5;5;5;5	26.22	-350	350	PASS
DCS1800	TU50	512	1710.2	5;5;5;5	21.63	-260	260	PASS
DCS1800	TU50	700	1747.8	5;5;5;5	22.37	-260	260	PASS
DCS1800	TU50	885	1784.8	5;5;5;5	23.60	-260	260	PASS
DCS1800	TU1_5	512	1710.2	5;5;5;5	19.05	-320	320	PASS
DCS1800	TU1_5	700	1747.8	5;5;5;5	18.47	-320	320	PASS
DCS1800	TU1_5	885	1784.8	5;5;5;5	24.89	-320	320	PASS


GSM900 Channel=124 Gamma=6;6;6 HT100.png

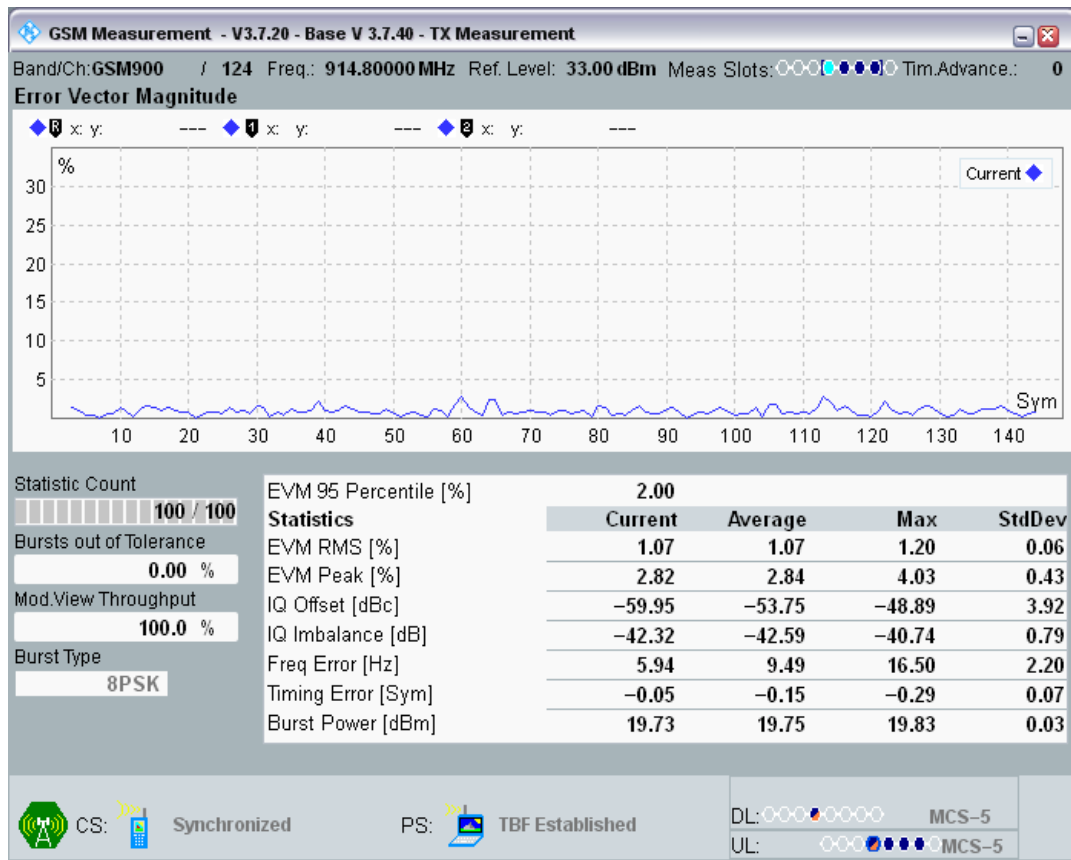


GSM900 Channel=124 Gamma=6;6;6 RA250.png

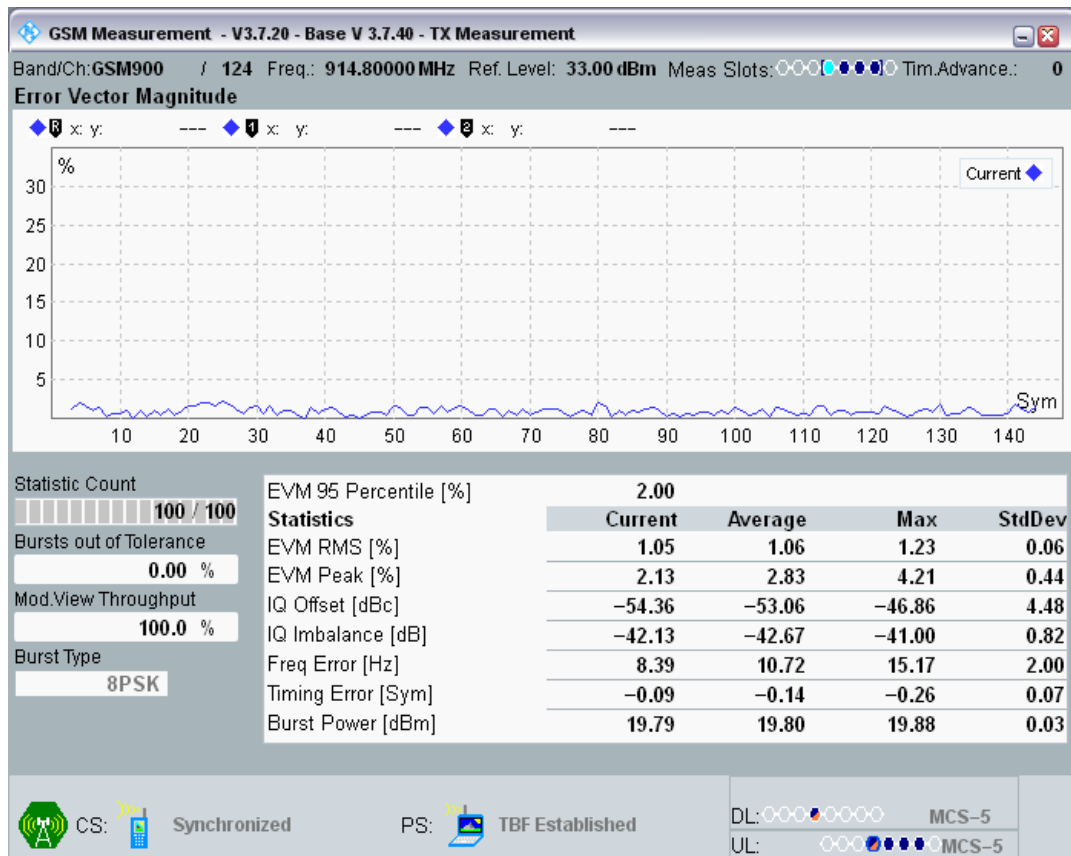


GSM900 Channel=124 Gamma=6;6;6 TU3.png

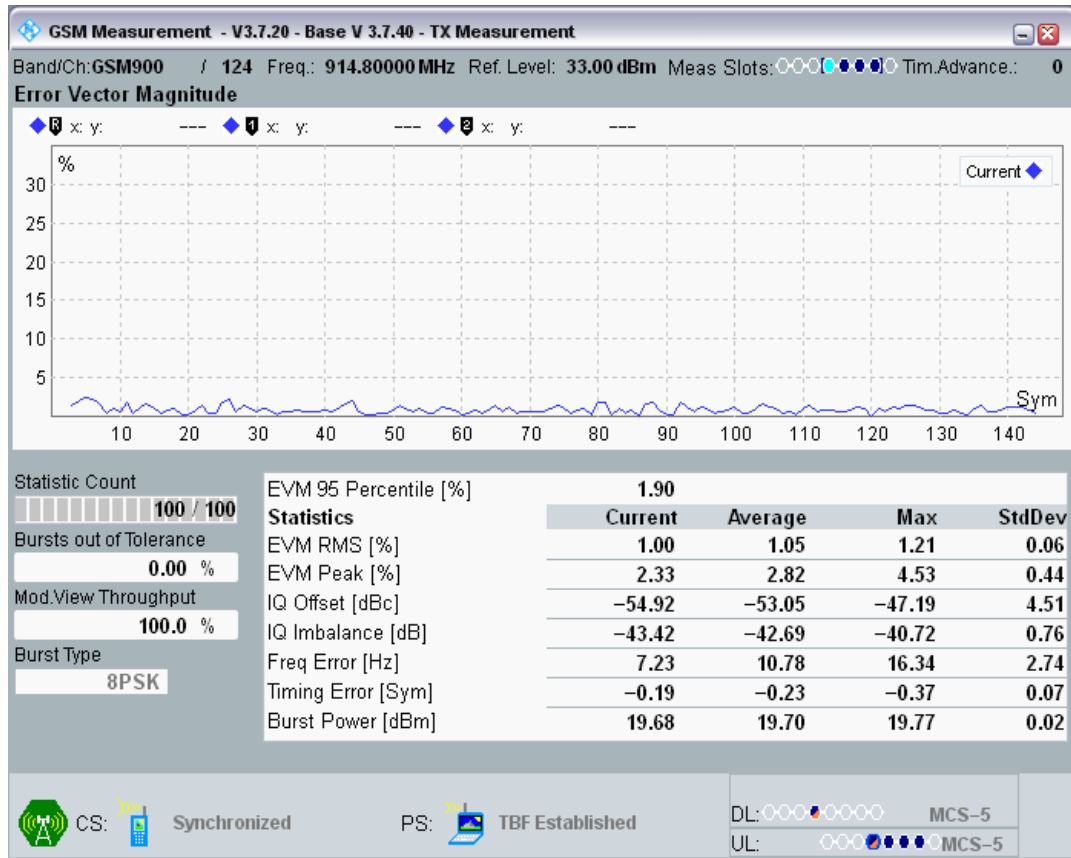


GSM900 Channel=124 Gamma=6;6;6 TU50.png

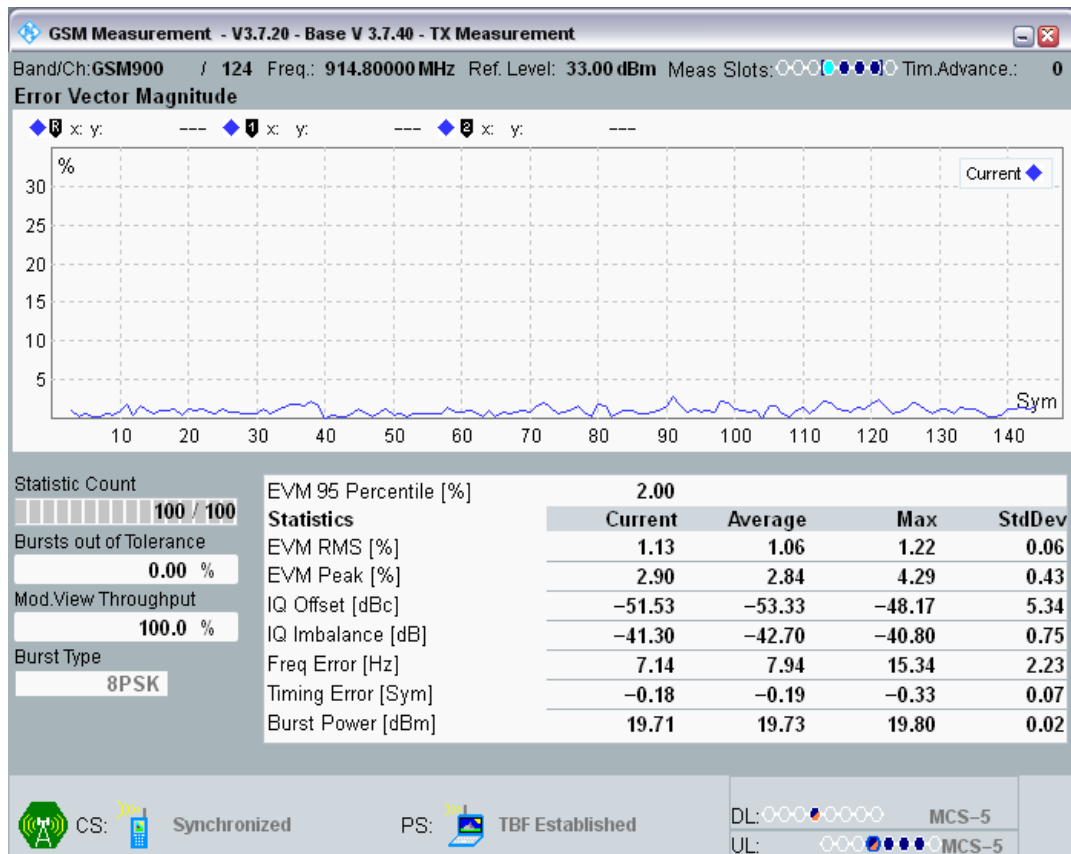


GSM900 Channel=60 Gamma=6;6;6;6 HT100.png

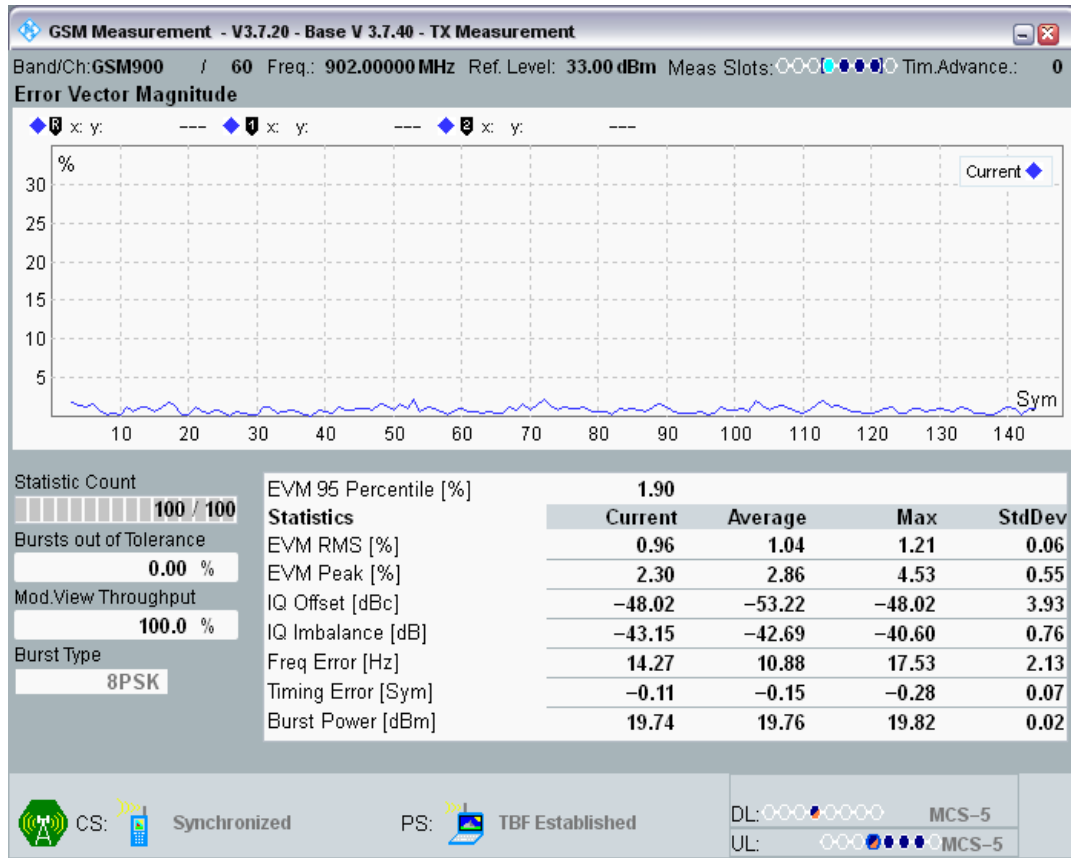


GSM900 Channel=60 Gamma=6;6;6;6 RA250.png

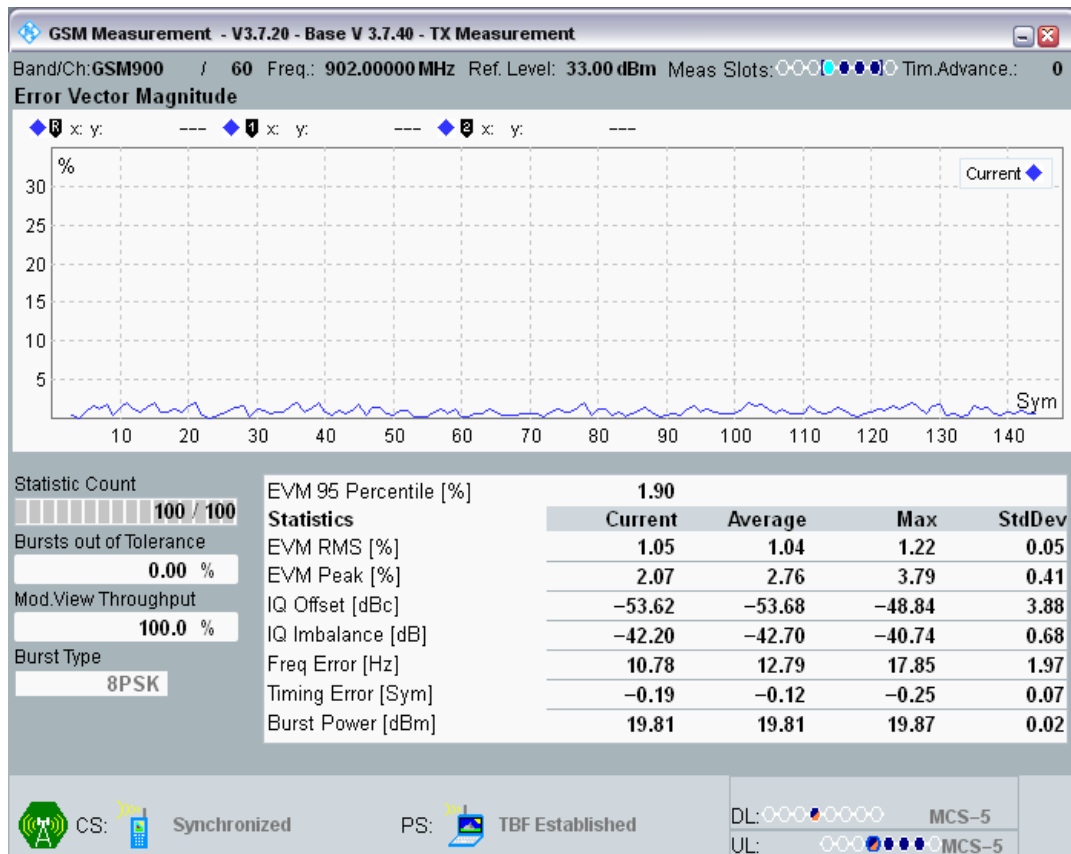


GSM900 Channel=60 Gamma=6;6;6;6 TU3.png

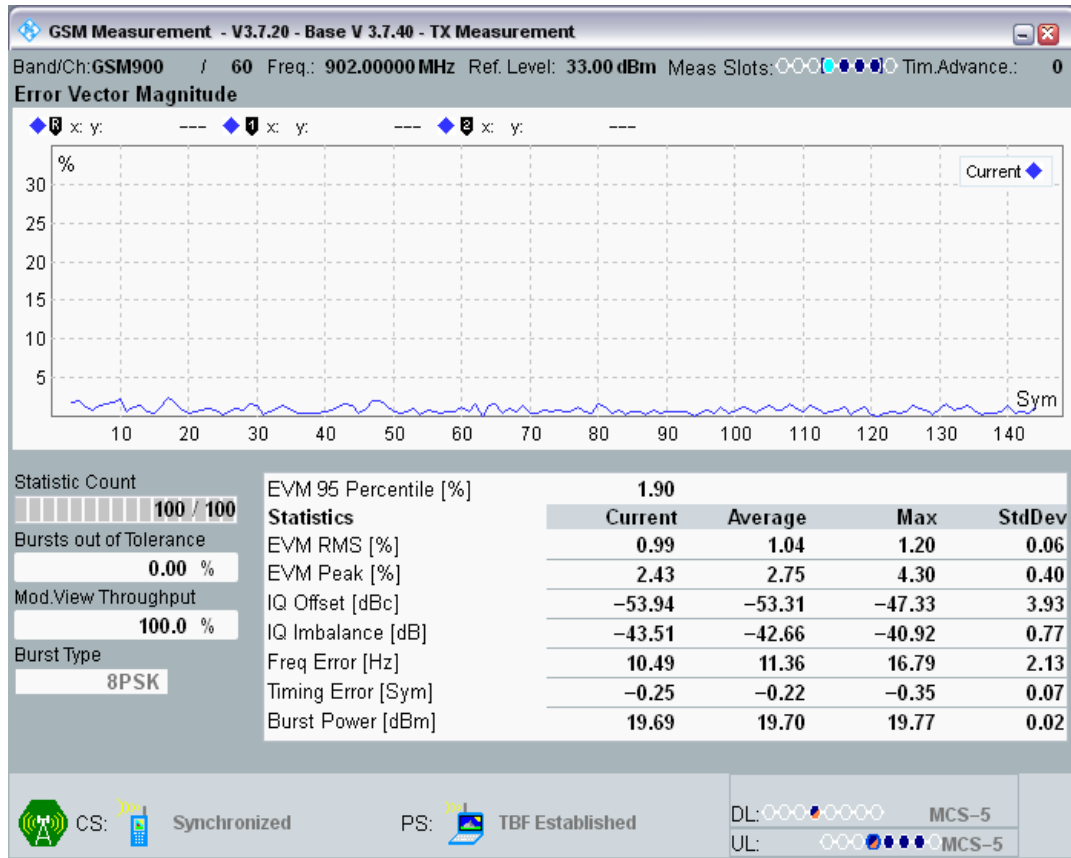


GSM900 Channel=60 Gamma=6;6;6;6 TU50.png

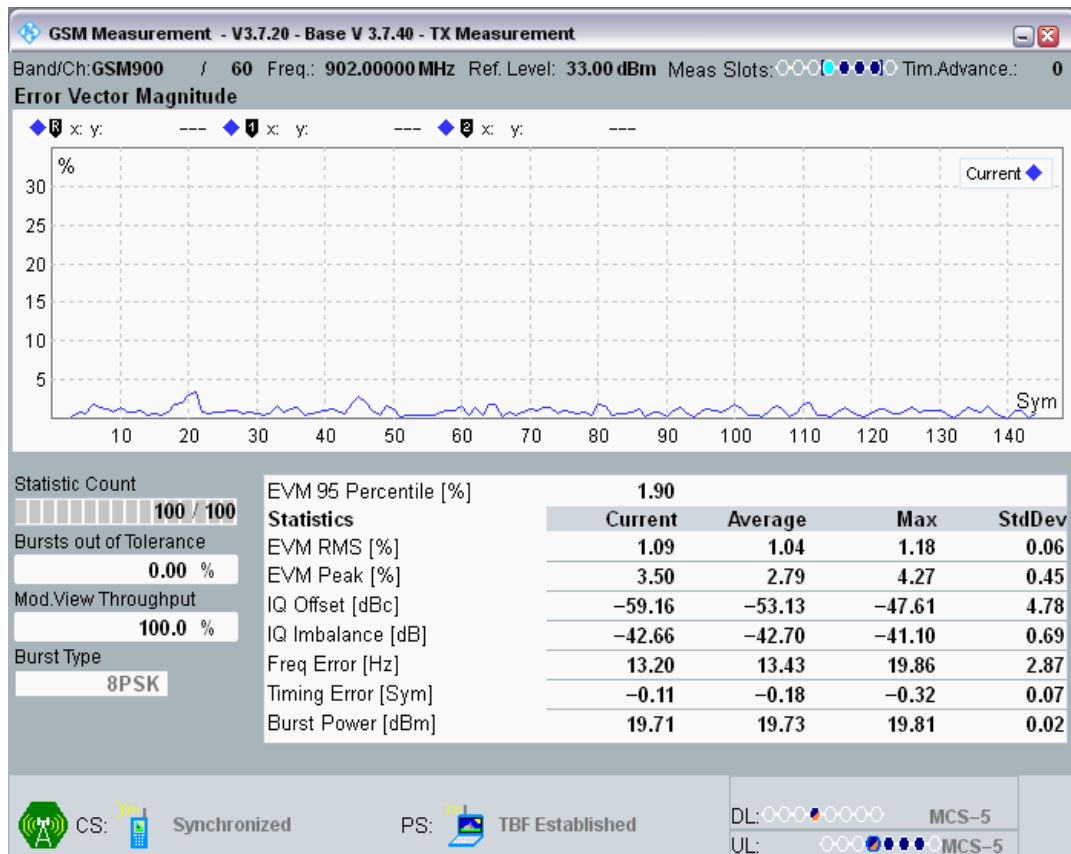


GSM900 Channel=975 Gamma=6;6;6;6 HT100.png

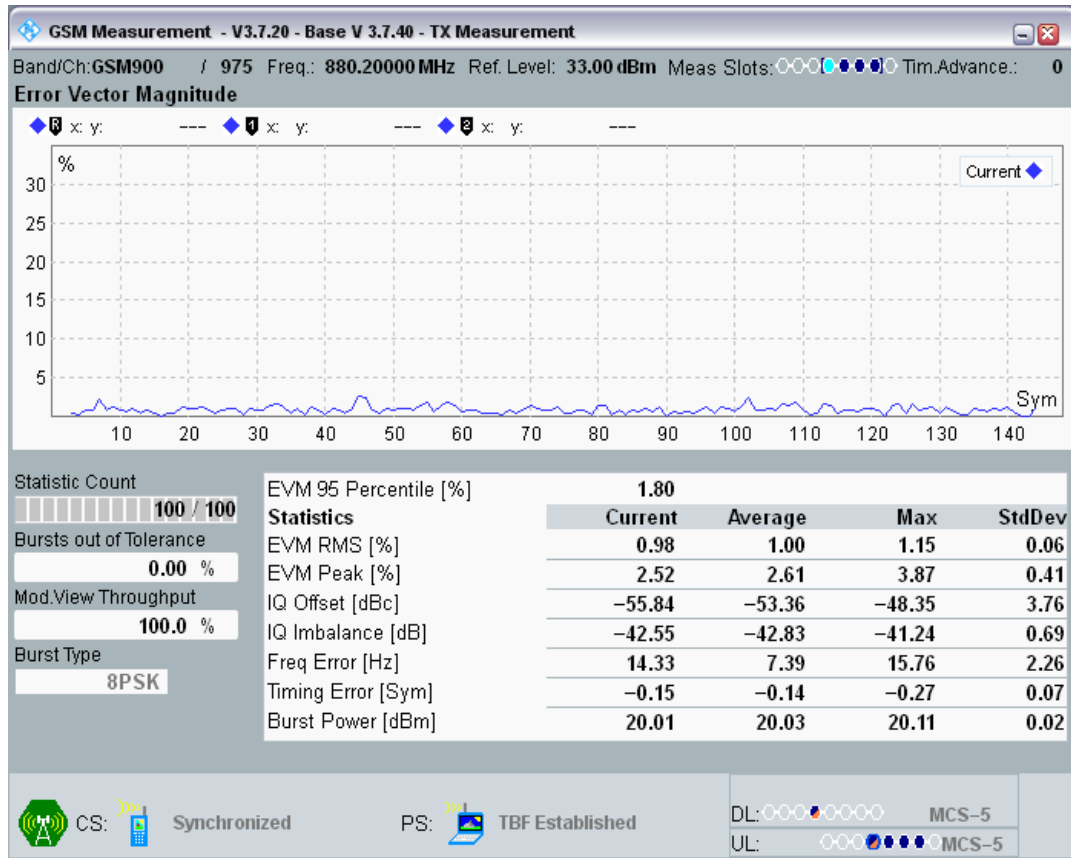


GSM900 Channel=975 Gamma=6;6;6;6 RA250.png

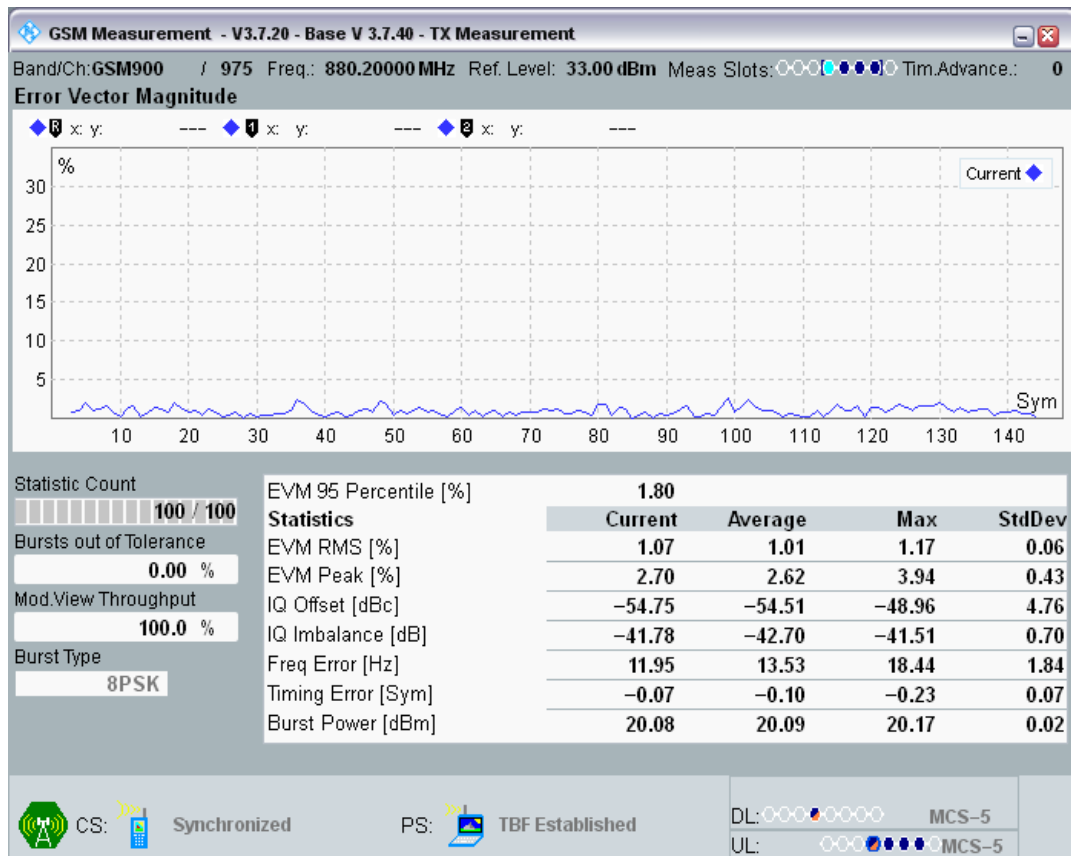


GSM900 Channel=975 Gamma=6;6;6 TU3.png

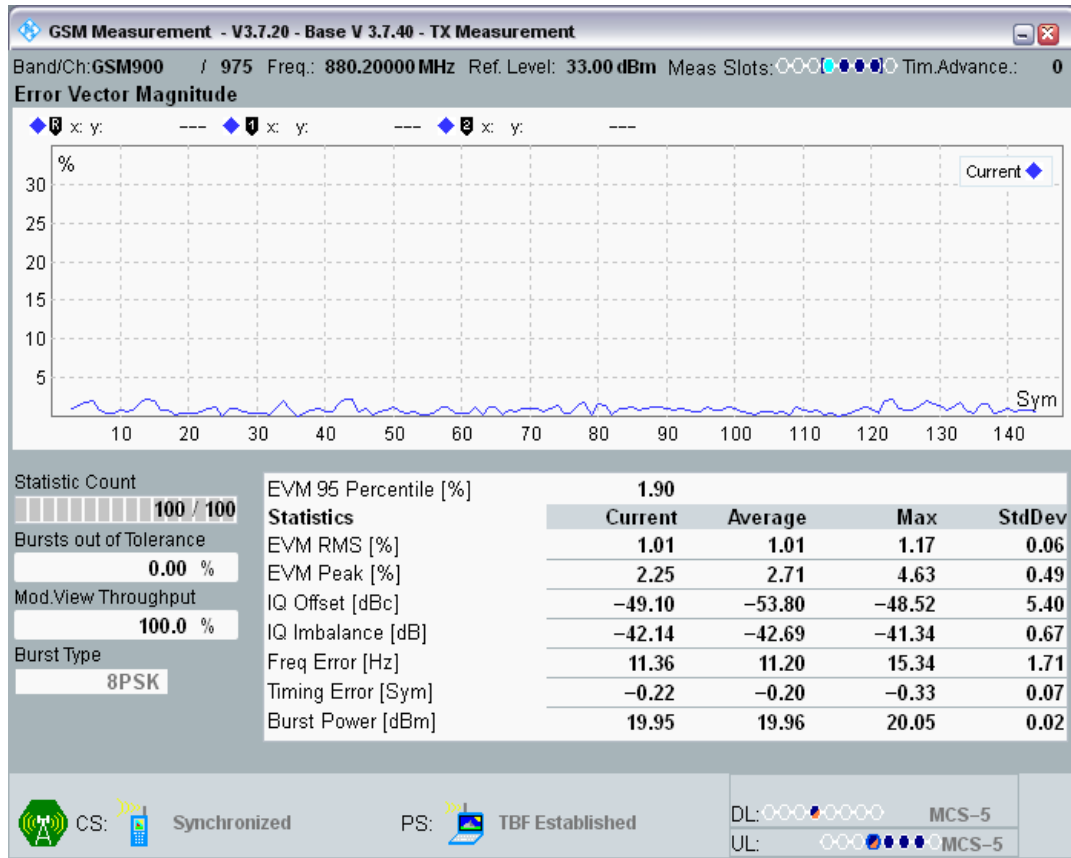


GSM900 Channel=975 Gamma=6;6;6 TU50.png

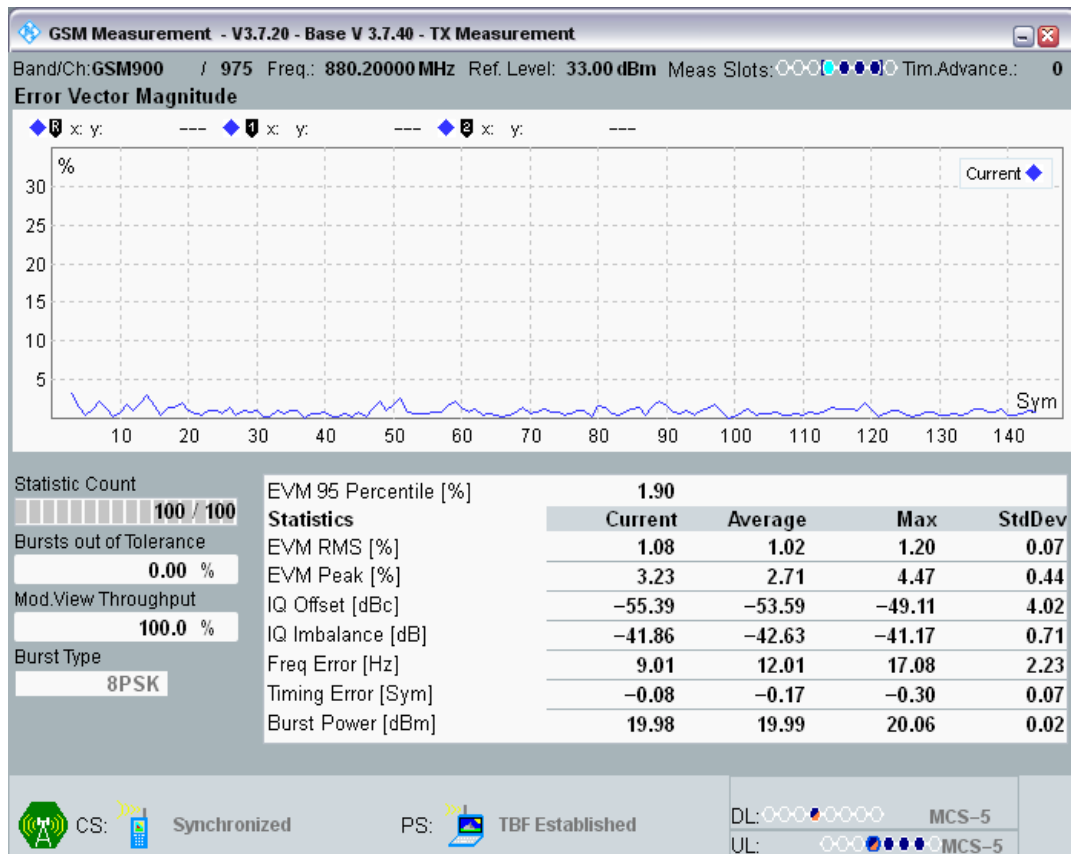


DCS1800 Channel=512 Gamma=5;5;5;5 HT100.png

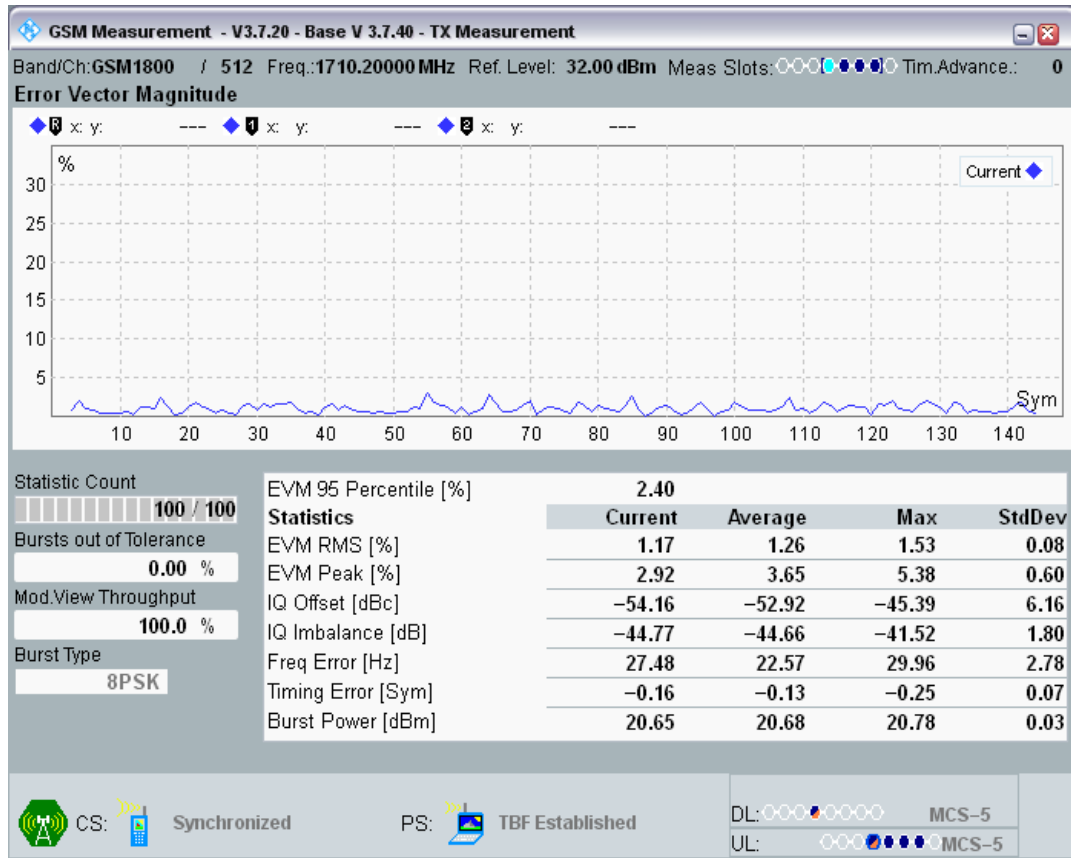


DCS1800 Channel=512 Gamma=5;5;5;5 RA130.png

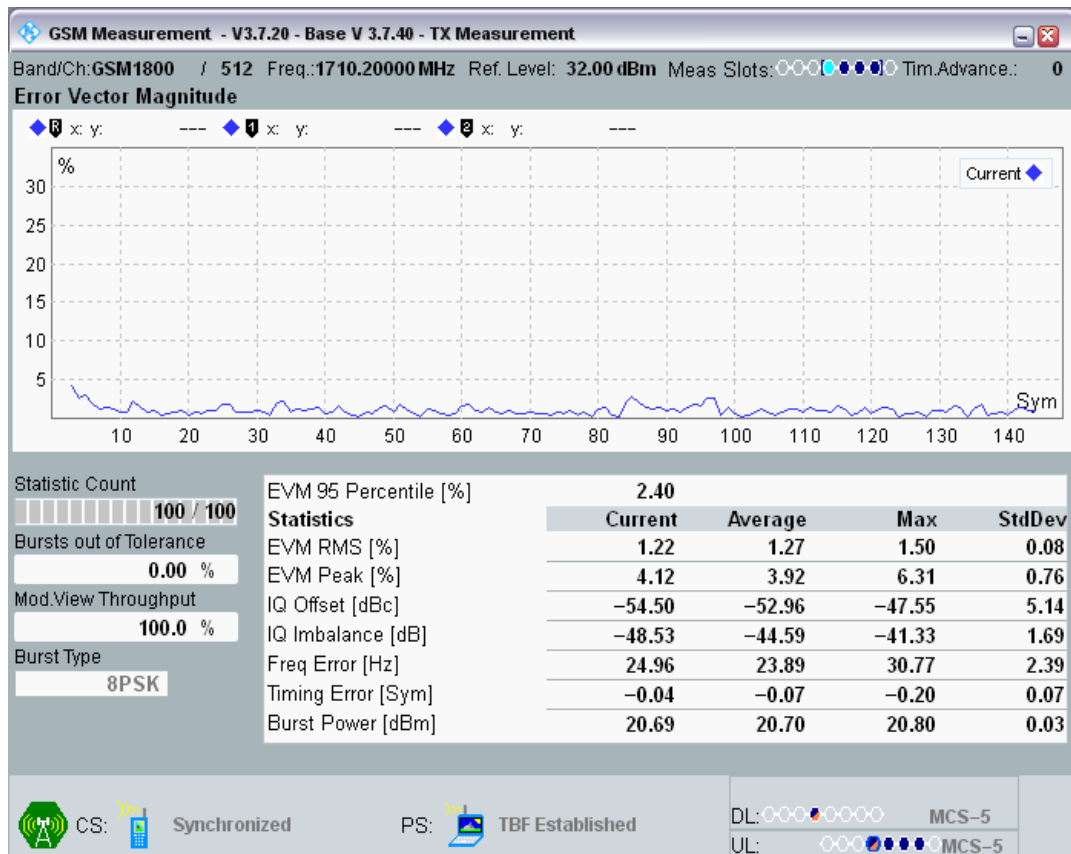


DCS1800 Channel=512 Gamma=5;5;5;5 TU1_5.png

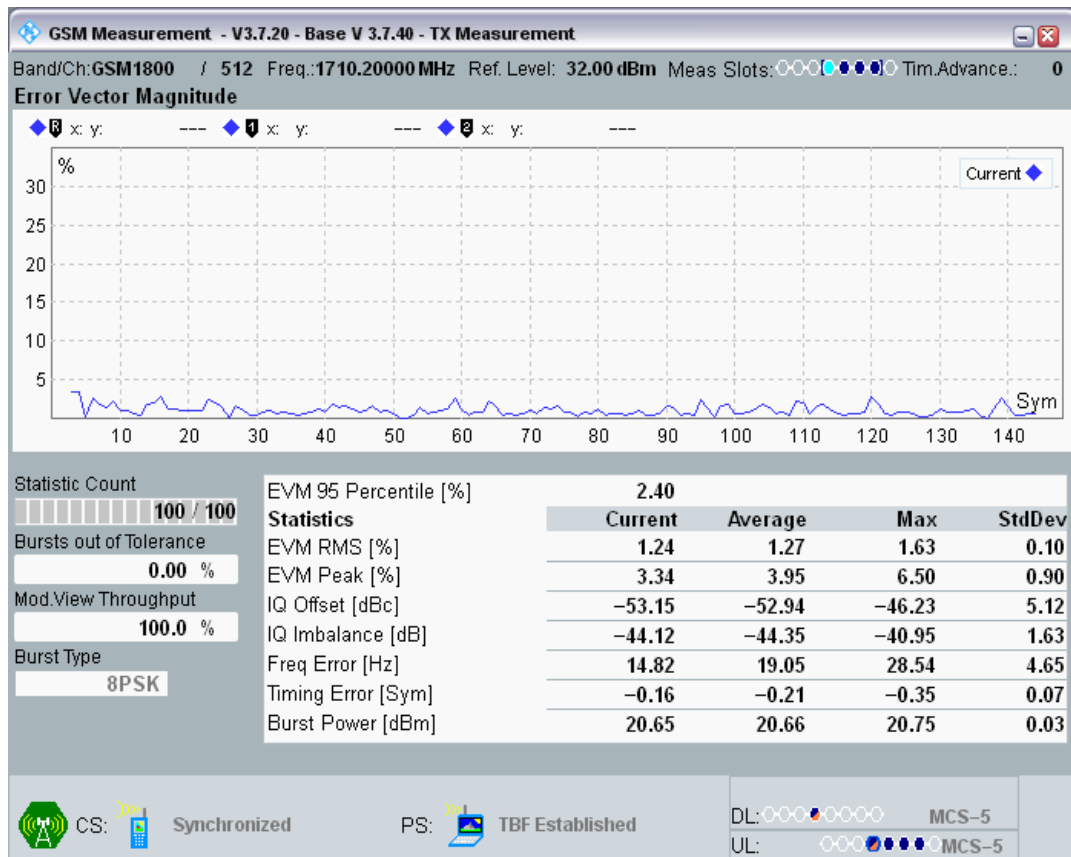


DCS1800 Channel=512 Gamma=5;5;5;5 TU50.png

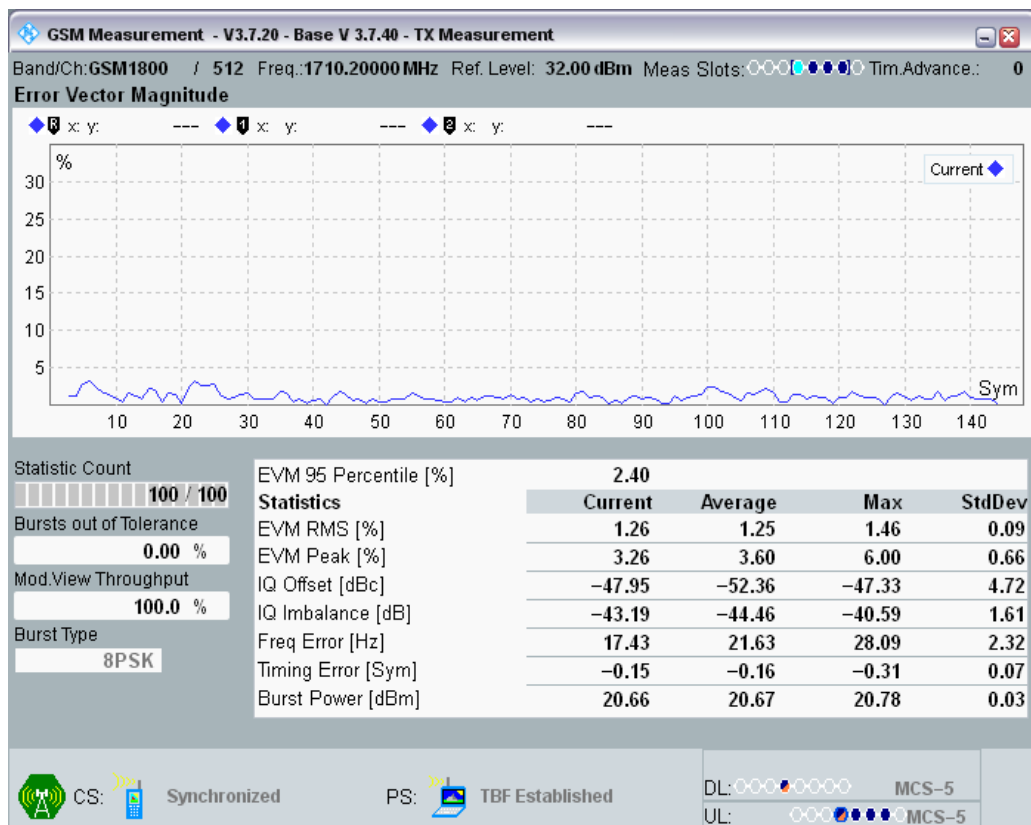


DCS1800 Channel=700 Gamma=5;5;5;5 HT100.png

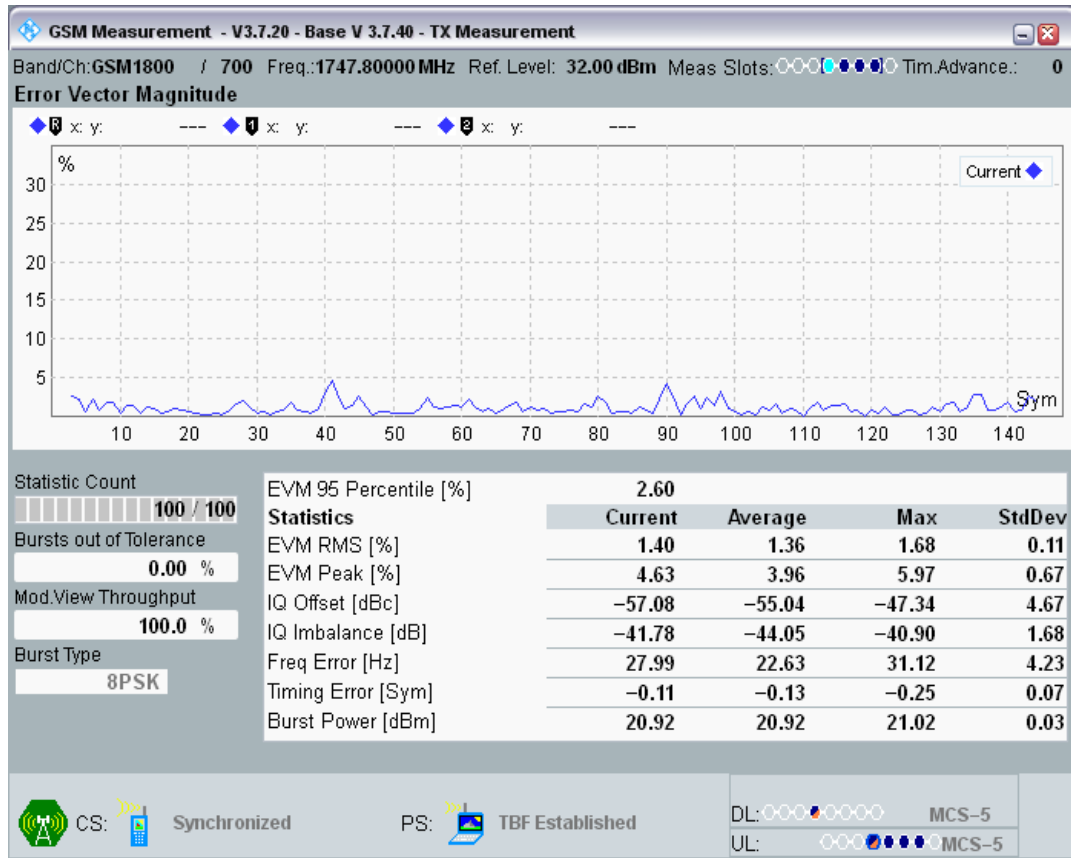


DCS1800 Channel=700 Gamma=5;5;5;5 RA130.png

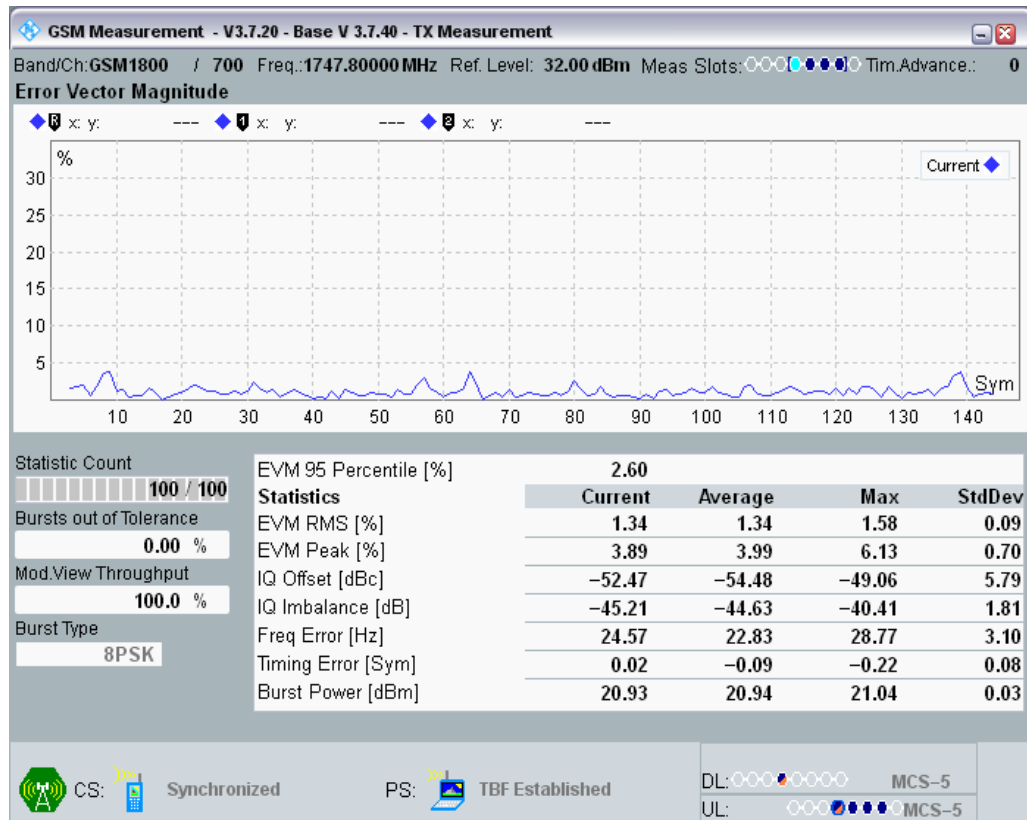


DCS1800 Channel=700 Gamma=5;5;5;5 TU1_5.png

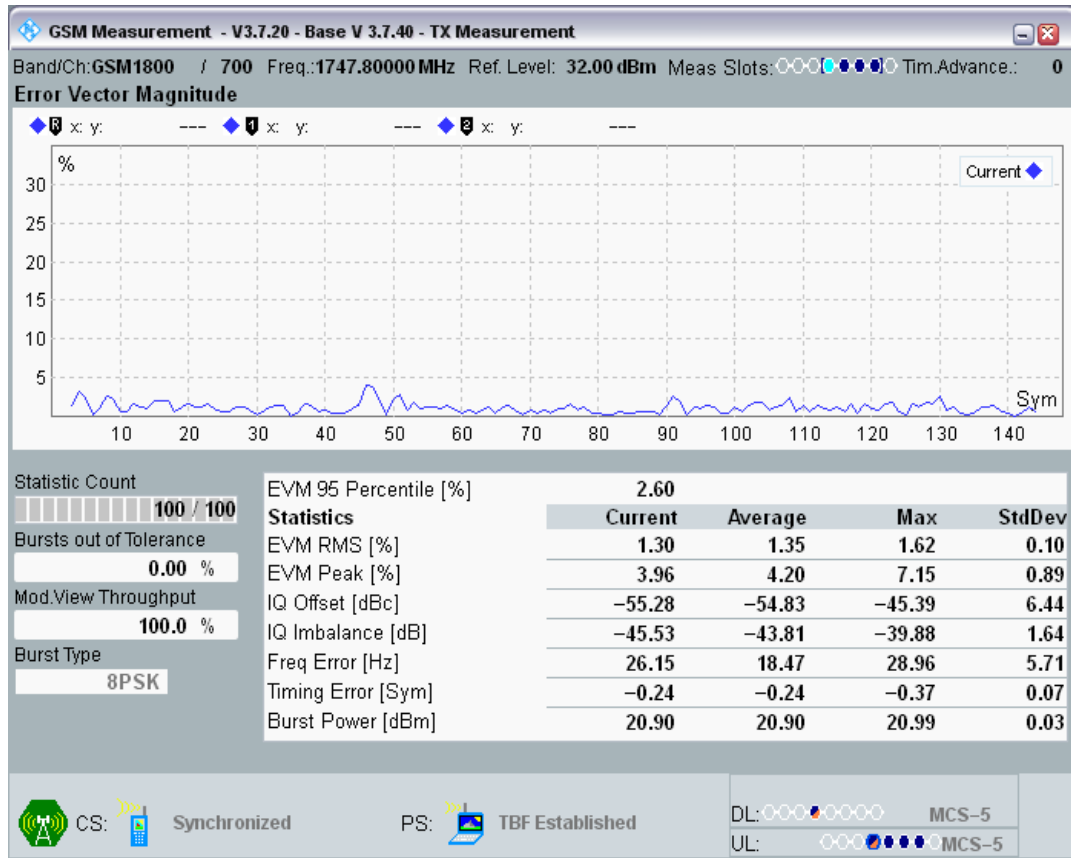


DCS1800 Channel=700 Gamma=5;5;5;5 TU50.png

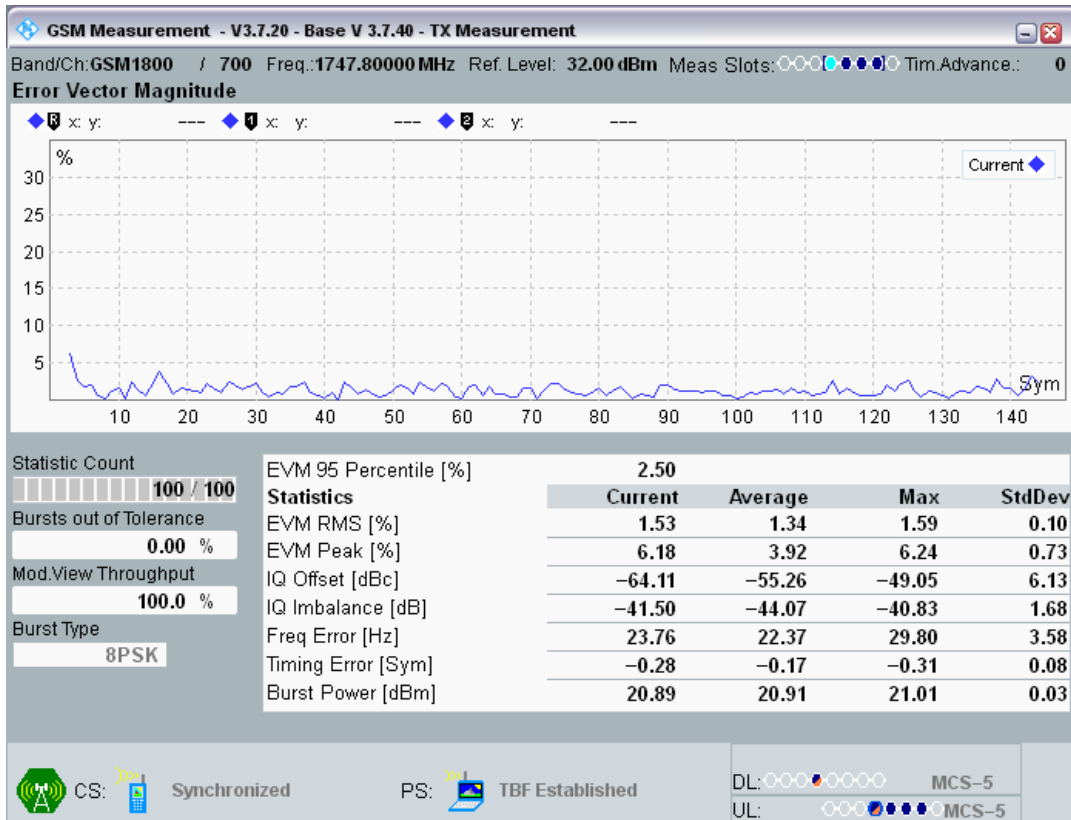


DCS1800 Channel=885 Gamma=5;5;5;5 HT100.png

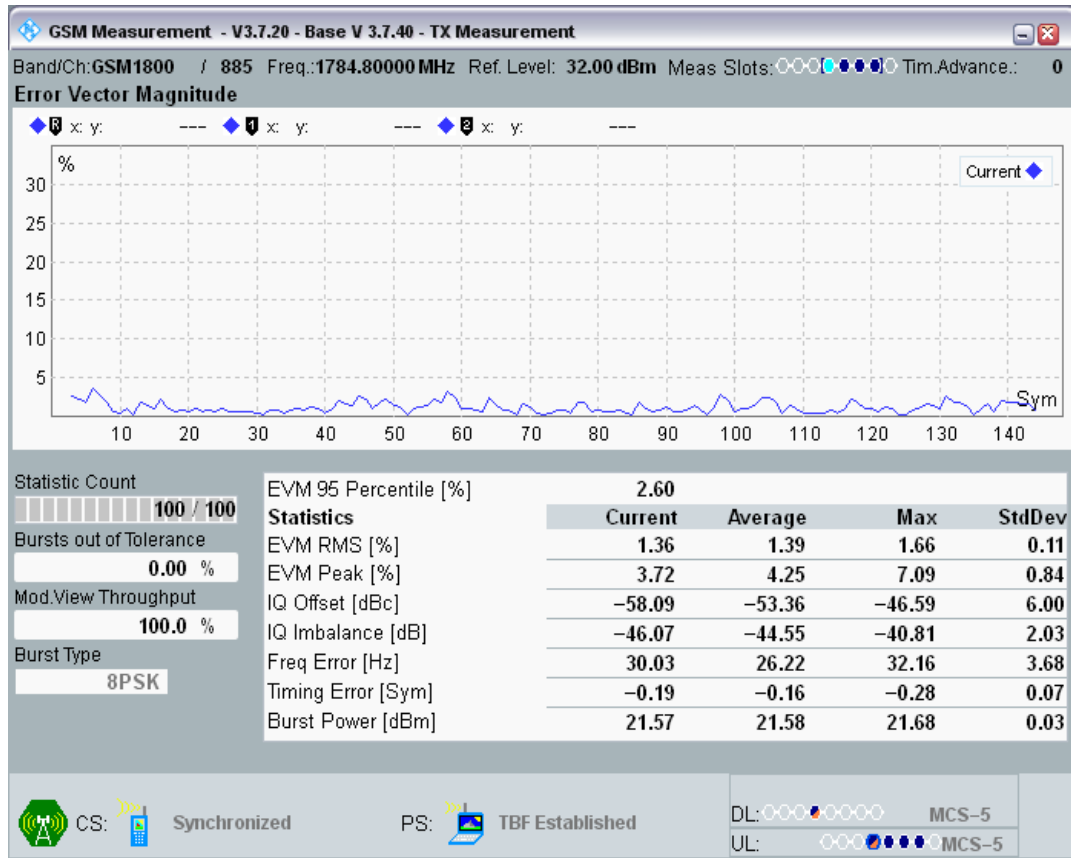


DCS1800 Channel=885 Gamma=5;5;5;5 RA130.png

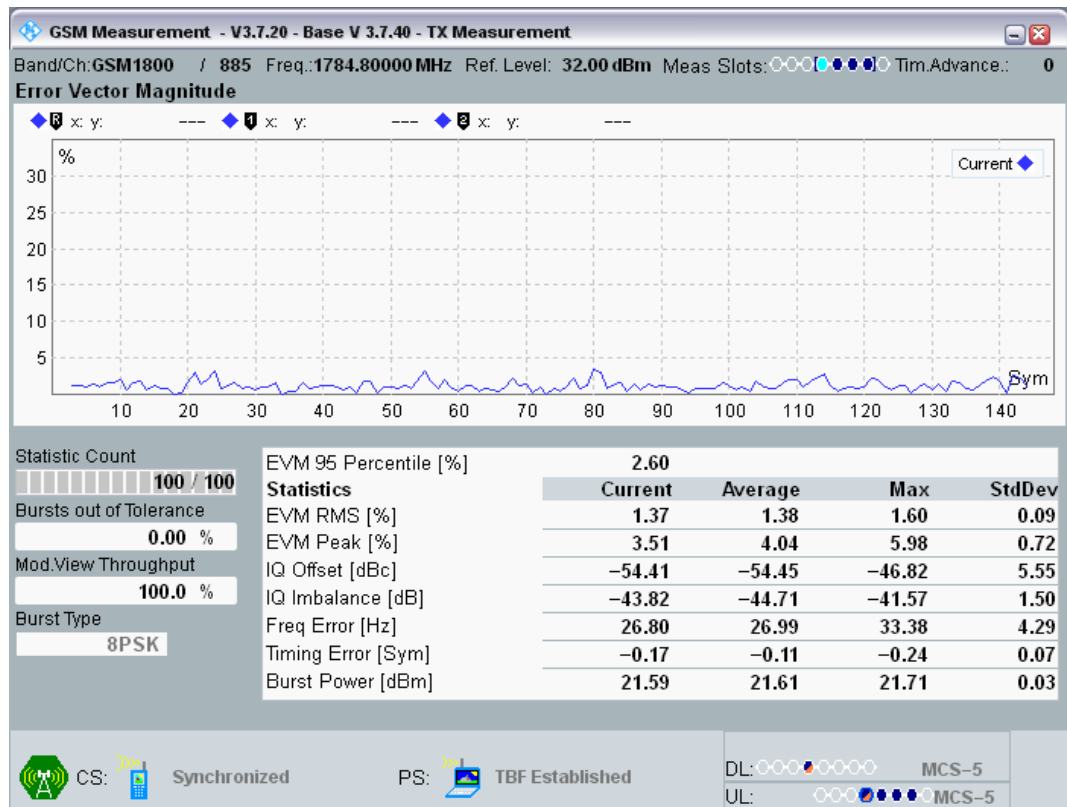

DCS1800 Channel=885 Gamma=5;5;5;5 TU1_5.png

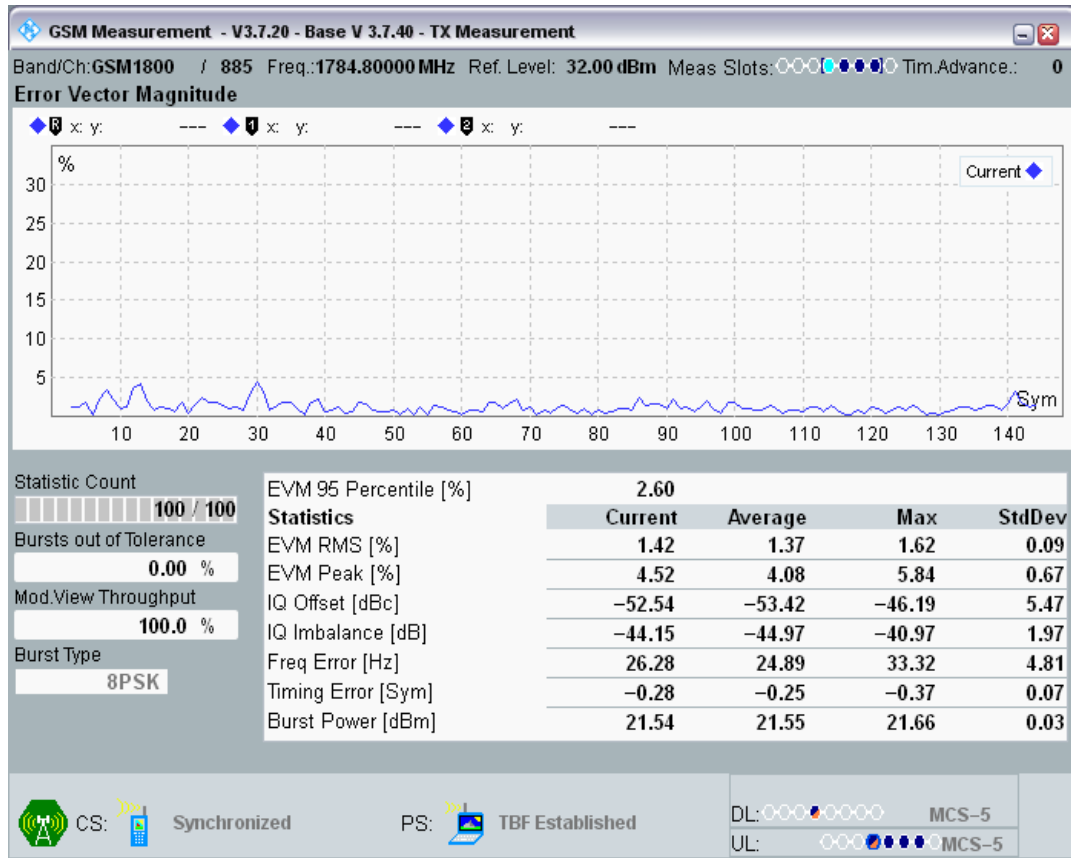

DCS1800 Channel=885 Gamma=5;5;5;5 TU50.png

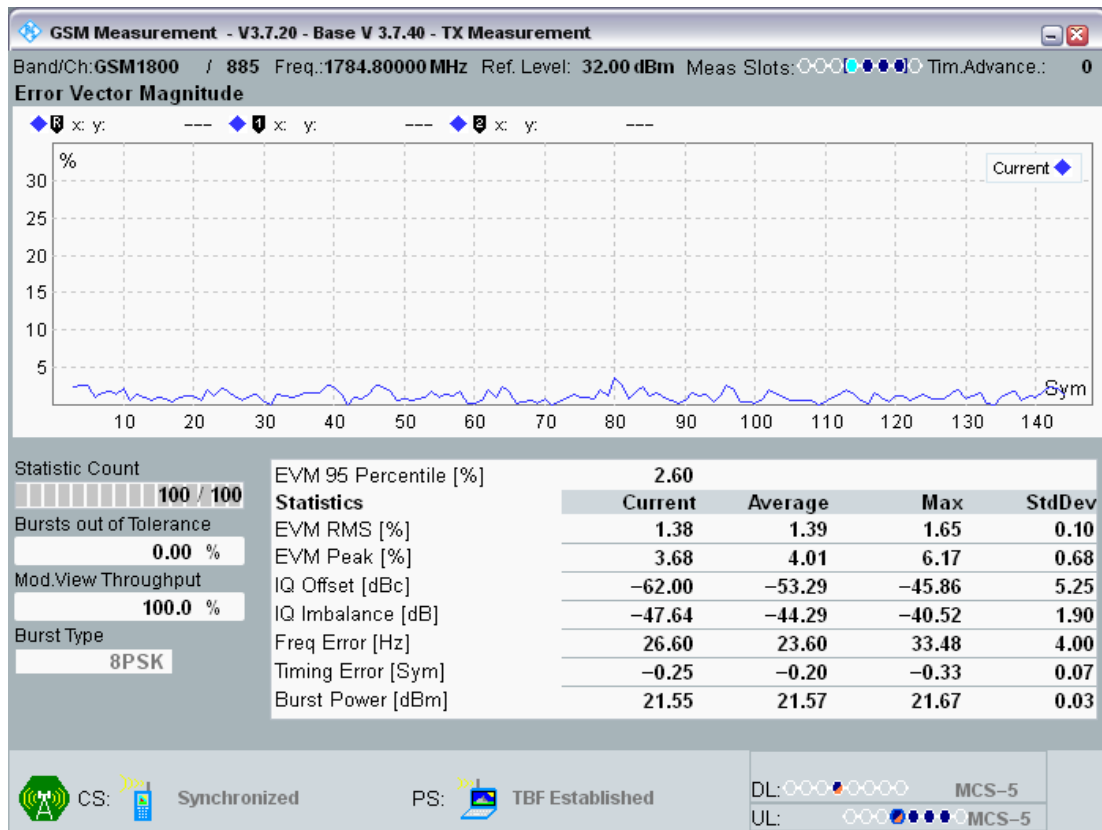

Clause 4.2.28 EGPRS Transmitter output power

Band	Channel	Frequency (MHz)	Gamma	Type	Result (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	PvT	-	-	-	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot1	20.00589	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot2	20.05527	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot3	19.86835	18	27	PASS
GSM900	975	880.2	6;6;6;6	Power @ slot4	19.97888	18	27	PASS
GSM900	975	880.2	7;7;7;7	PvT	-	-	-	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot1	21.84256	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot2	22.03589	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot3	22.29562	18	27	PASS
GSM900	975	880.2	7;7;7;7	Power @ slot4	22.08572	18	27	PASS
GSM900	975	880.2	8;8;8;8	PvT	-	-	-	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot1	22.17038	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot2	22.24146	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot3	22.53049	18	26	PASS
GSM900	975	880.2	8;8;8;8	Power @ slot4	22.20572	18	26	PASS
GSM900	975	880.2	9;9;9;9	PvT	-	-	-	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot1	19.99081	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot2	19.66043	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot3	20.15936	18	24	PASS
GSM900	975	880.2	9;9;9;9	Power @ slot4	20.21667	18	24	PASS
GSM900	975	880.2	10;10;10;10	PvT	-	-	-	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot1	17.97574	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot2	18.20703	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot3	18.62216	16	22	PASS
GSM900	975	880.2	10;10;10;10	Power @ slot4	17.97446	16	22	PASS
GSM900	975	880.2	11;11;11;11	PvT	-	-	-	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot1	16.75415	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot2	16.64627	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot3	16.55847	14	20	PASS
GSM900	975	880.2	11;11;11;11	Power @ slot4	16.34796	14	20	PASS
GSM900	975	880.2	12;12;12;12	PvT	-	-	-	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot1	14.56396	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot2	14.24258	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot3	14.54025	12	18	PASS
GSM900	975	880.2	12;12;12;12	Power @ slot4	14.42877	12	18	PASS
GSM900	975	880.2	13;13;13;13	PvT	-	-	-	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot1	12.43695	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot2	12.27478	10	16	PASS
GSM900	975	880.2	13;13;13;13	Power @ slot3	12.5611	10	16	PASS

GSM900	975	880.2	13;13;13;13	Power @ slot4	12.26553	10	16	PASS
GSM900	975	880.2	14;14;14;14	PvT	-	-	-	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot1	10.0766	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot2	10.21265	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot3	10.76987	6	16	PASS
GSM900	975	880.2	14;14;14;14	Power @ slot4	10.51642	6	16	PASS
GSM900	975	880.2	15;15;15;15	PvT	-	-	-	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot1	8.323059	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot2	8.455536	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot3	8.553101	4	14	PASS
GSM900	975	880.2	15;15;15;15	Power @ slot4	8.286163	4	14	PASS
GSM900	975	880.2	16;16;16;16	PvT	-	-	-	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot1	6.375214	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot2	6.549561	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot3	6.577393	2	12	PASS
GSM900	975	880.2	16;16;16;16	Power @ slot4	6.549377	2	12	PASS
GSM900	975	880.2	17;17;17;17	PvT	-	-	-	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot1	4.306213	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot2	4.643494	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot3	4.637848	0	10	PASS
GSM900	975	880.2	17;17;17;17	Power @ slot4	4.300171	0	10	PASS
GSM900	60	902	6;6;6;6	PvT	-	-	-	PASS
GSM900	60	902	6;6;6;6	Power @ slot1	19.82379	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot2	19.2341	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot3	19.19476	18	27	PASS
GSM900	60	902	6;6;6;6	Power @ slot4	19.87946	18	27	PASS
GSM900	60	902	7;7;7;7	PvT	-	-	-	PASS
GSM900	60	902	7;7;7;7	Power @ slot1	21.96194	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot2	22.03677	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot3	21.24072	18	27	PASS
GSM900	60	902	7;7;7;7	Power @ slot4	22.18985	18	27	PASS
GSM900	60	902	8;8;8;8	PvT	-	-	-	PASS
GSM900	60	902	8;8;8;8	Power @ slot1	22.11414	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot2	22.11273	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot3	21.88577	18	26	PASS
GSM900	60	902	8;8;8;8	Power @ slot4	21.83795	18	26	PASS
GSM900	60	902	9;9;9;9	PvT	-	-	-	PASS
GSM900	60	902	9;9;9;9	Power @ slot1	19.96762	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot2	19.37073	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot3	20.34625	18	24	PASS
GSM900	60	902	9;9;9;9	Power @ slot4	19.37213	18	24	PASS
GSM900	60	902	10;10;10;10	PvT	-	-	-	PASS

GSM900	60	902	10;10;10;10	Power @ slot1	18.11542	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot2	17.95187	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot3	17.71329	16	22	PASS
GSM900	60	902	10;10;10;10	Power @ slot4	17.78543	16	22	PASS
GSM900	60	902	11;11;11;11	PvT	-	-	-	PASS
GSM900	60	902	11;11;11;11	Power @ slot1	16.29105	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot2	16.45319	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot3	16.05276	14	20	PASS
GSM900	60	902	11;11;11;11	Power @ slot4	15.9155	14	20	PASS
GSM900	60	902	12;12;12;12	PvT	-	-	-	PASS
GSM900	60	902	12;12;12;12	Power @ slot1	13.76065	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot2	14.63074	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot3	14.17673	12	18	PASS
GSM900	60	902	12;12;12;12	Power @ slot4	13.90057	12	18	PASS
GSM900	60	902	13;13;13;13	PvT	-	-	-	PASS
GSM900	60	902	13;13;13;13	Power @ slot1	12.33963	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot2	12.02734	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot3	11.91888	10	16	PASS
GSM900	60	902	13;13;13;13	Power @ slot4	12.59903	10	16	PASS
GSM900	60	902	14;14;14;14	PvT	-	-	-	PASS
GSM900	60	902	14;14;14;14	Power @ slot1	10.44391	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot2	10.11273	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot3	10.41901	6	16	PASS
GSM900	60	902	14;14;14;14	Power @ slot4	10.27463	6	16	PASS
GSM900	60	902	15;15;15;15	PvT	-	-	-	PASS
GSM900	60	902	15;15;15;15	Power @ slot1	7.947144	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot2	7.933868	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot3	7.985992	4	14	PASS
GSM900	60	902	15;15;15;15	Power @ slot4	8.042511	4	14	PASS
GSM900	60	902	16;16;16;16	PvT	-	-	-	PASS
GSM900	60	902	16;16;16;16	Power @ slot1	5.826019	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot2	5.772614	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot3	6.168396	2	12	PASS
GSM900	60	902	16;16;16;16	Power @ slot4	6.150604	2	12	PASS
GSM900	60	902	17;17;17;17	PvT	-	-	-	PASS
GSM900	60	902	17;17;17;17	Power @ slot1	3.886902	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot2	4.078217	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot3	4.069763	0	10	PASS
GSM900	60	902	17;17;17;17	Power @ slot4	4.120911	0	10	PASS
GSM900	124	914.8	6;6;6;6	PvT	-	-	-	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot1	19.99915	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot2	19.32751	18	27	PASS

GSM900	124	914.8	6;6;6;6	Power @ slot3	19.17963	18	27	PASS
GSM900	124	914.8	6;6;6;6	Power @ slot4	19.45673	18	27	PASS
GSM900	124	914.8	7;7;7;7	PvT	-	-	-	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot1	21.84915	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot2	22.07413	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot3	21.78708	18	27	PASS
GSM900	124	914.8	7;7;7;7	Power @ slot4	21.65466	18	27	PASS
GSM900	124	914.8	8;8;8;8	PvT	-	-	-	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot1	21.36227	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot2	22.03375	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot3	21.77863	18	26	PASS
GSM900	124	914.8	8;8;8;8	Power @ slot4	22.15933	18	26	PASS
GSM900	124	914.8	9;9;9;9	PvT	-	-	-	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot1	20.05624	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot2	19.57492	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot3	19.88721	18	24	PASS
GSM900	124	914.8	9;9;9;9	Power @ slot4	19.927	18	24	PASS
GSM900	124	914.8	10;10;10;10	PvT	-	-	-	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot1	18.13104	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot2	17.90472	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot3	18.29095	16	22	PASS
GSM900	124	914.8	10;10;10;10	Power @ slot4	18.15787	16	22	PASS
GSM900	124	914.8	11;11;11;11	PvT	-	-	-	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot1	15.91287	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot2	15.82916	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot3	15.81839	14	20	PASS
GSM900	124	914.8	11;11;11;11	Power @ slot4	16.12265	14	20	PASS
GSM900	124	914.8	12;12;12;12	PvT	-	-	-	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot1	14.01489	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot2	14.03851	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot3	14.44705	12	18	PASS
GSM900	124	914.8	12;12;12;12	Power @ slot4	13.98196	12	18	PASS
GSM900	124	914.8	13;13;13;13	PvT	-	-	-	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot1	11.95187	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot2	12.16345	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot3	12.35934	10	16	PASS
GSM900	124	914.8	13;13;13;13	Power @ slot4	12.31509	10	16	PASS
GSM900	124	914.8	14;14;14;14	PvT	-	-	-	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot1	10.59283	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot2	10.66177	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot3	10.33932	6	16	PASS
GSM900	124	914.8	14;14;14;14	Power @ slot4	10.01062	6	16	PASS

GSM900	124	914.8	15;15;15;15	PvT	-	-	-	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot1	7.946075	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot2	7.894775	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot3	7.620392	4	14	PASS
GSM900	124	914.8	15;15;15;15	Power @ slot4	8.385864	4	14	PASS
GSM900	124	914.8	16;16;16;16	PvT	-	-	-	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot1	6.168121	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot2	6.395538	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot3	5.990448	2	12	PASS
GSM900	124	914.8	16;16;16;16	Power @ slot4	6.784302	2	12	PASS
GSM900	124	914.8	17;17;17;17	PvT	-	-	-	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot1	4.074127	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot2	4.436279	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot3	4.110077	0	10	PASS
GSM900	124	914.8	17;17;17;17	Power @ slot4	4.274658	0	10	PASS
DCS1800	512	1710.2	5;5;5;5	PvT	-	-	-	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot1	20.45639	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot2	20.43268	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot3	20.36798	16	26	PASS
DCS1800	512	1710.2	5;5;5;5	Power @ slot4	20.40359	16	26	PASS
DCS1800	512	1710.2	6;6;6;6	PvT	-	-	-	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot1	20.61414	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot2	20.34918	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot3	20.49075	17	26	PASS
DCS1800	512	1710.2	6;6;6;6	Power @ slot4	20.72635	17	26	PASS
DCS1800	512	1710.2	7;7;7;7	PvT	-	-	-	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot1	20.94678	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot2	20.7175	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot3	20.35229	17	25	PASS
DCS1800	512	1710.2	7;7;7;7	Power @ slot4	20.54883	17	25	PASS
DCS1800	512	1710.2	8;8;8;8	PvT	-	-	-	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot1	19.97272	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot2	19.92432	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot3	19.41266	17	23	PASS
DCS1800	512	1710.2	8;8;8;8	Power @ slot4	19.74933	17	23	PASS
DCS1800	512	1710.2	9;9;9;9	PvT	-	-	-	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot1	17.47061	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot2	18.09717	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot3	17.73483	15	21	PASS
DCS1800	512	1710.2	9;9;9;9	Power @ slot4	17.53033	15	21	PASS
DCS1800	512	1710.2	10;10;10;10	PvT	-	-	-	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot1	15.87643	13	19	PASS

DCS1800	512	1710.2	10;10;10;10	Power @ slot2	15.76663	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot3	15.74301	13	19	PASS
DCS1800	512	1710.2	10;10;10;10	Power @ slot4	15.48505	13	19	PASS
DCS1800	512	1710.2	11;11;11;11	PvT	-	-	-	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot1	13.87936	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot2	13.71613	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot3	13.54276	11	17	PASS
DCS1800	512	1710.2	11;11;11;11	Power @ slot4	13.23712	11	17	PASS
DCS1800	512	1710.2	12;12;12;12	PvT	-	-	-	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot1	12.01004	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot2	11.38766	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot3	11.69186	8	16	PASS
DCS1800	512	1710.2	12;12;12;12	Power @ slot4	11.84381	8	16	PASS
DCS1800	512	1710.2	13;13;13;13	PvT	-	-	-	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot1	10.01541	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot2	9.667389	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot3	9.852905	6	14	PASS
DCS1800	512	1710.2	13;13;13;13	Power @ slot4	9.939758	6	14	PASS
DCS1800	512	1710.2	14;14;14;14	PvT	-	-	-	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot1	8.127502	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot2	8.165894	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot3	7.850006	4	12	PASS
DCS1800	512	1710.2	14;14;14;14	Power @ slot4	7.704407	4	12	PASS
DCS1800	512	1710.2	15;15;15;15	PvT	-	-	-	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot1	5.662567	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot2	5.930817	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot3	5.820374	2	10	PASS
DCS1800	512	1710.2	15;15;15;15	Power @ slot4	5.671814	2	10	PASS
DCS1800	512	1710.2	16;16;16;16	PvT	-	-	-	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot1	4.049866	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot2	3.447723	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot3	4.064117	0	8	PASS
DCS1800	512	1710.2	16;16;16;16	Power @ slot4	3.691956	0	8	PASS
DCS1800	512	1710.2	17;17;17;17	PvT	-	-	-	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot1	1.841431	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot2	2.056946	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot3	1.693176	-3	7	PASS
DCS1800	512	1710.2	17;17;17;17	Power @ slot4	1.878876	-3	7	PASS
DCS1800	512	1710.2	18;18;18;18	PvT	-	-	-	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot1	-0.2022095	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot2	-0.1203918	-5	5	PASS
DCS1800	512	1710.2	18;18;18;18	Power @ slot3	-0.03848267	-5	5	PASS


DCS1800	512	1710.2	18;18;18;18	Power @ slot4	-0.6398926	-5	5	PASS
DCS1800	700	1747.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot1	20.83298	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot2	20.57617	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot3	20.72955	16	26	PASS
DCS1800	700	1747.8	5;5;5;5	Power @ slot4	21.02991	16	26	PASS
DCS1800	700	1747.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot1	20.94391	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot2	20.96951	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot3	20.54654	17	26	PASS
DCS1800	700	1747.8	6;6;6;6	Power @ slot4	20.2822	17	26	PASS
DCS1800	700	1747.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot1	21.11832	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot2	21.11783	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot3	20.59509	17	25	PASS
DCS1800	700	1747.8	7;7;7;7	Power @ slot4	20.61334	17	25	PASS
DCS1800	700	1747.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot1	19.74197	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot2	20.11124	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot3	19.95325	17	23	PASS
DCS1800	700	1747.8	8;8;8;8	Power @ slot4	19.91461	17	23	PASS
DCS1800	700	1747.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot1	18.52252	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot2	18.21902	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot3	17.94162	15	21	PASS
DCS1800	700	1747.8	9;9;9;9	Power @ slot4	17.76675	15	21	PASS
DCS1800	700	1747.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot1	15.77475	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot2	16.06781	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot3	15.61566	13	19	PASS
DCS1800	700	1747.8	10;10;10;10	Power @ slot4	16.12137	13	19	PASS
DCS1800	700	1747.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot1	14.05963	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot2	13.90479	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot3	14.01755	11	17	PASS
DCS1800	700	1747.8	11;11;11;11	Power @ slot4	14.16986	11	17	PASS
DCS1800	700	1747.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot1	12.14816	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot2	12.20938	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot3	11.68604	8	16	PASS
DCS1800	700	1747.8	12;12;12;12	Power @ slot4	12.66769	8	16	PASS
DCS1800	700	1747.8	13;13;13;13	PvT	-	-	-	PASS

DCS1800	700	1747.8	13;13;13;13	Power @ slot1	10.31079	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot2	9.779266	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot3	10.04407	6	14	PASS
DCS1800	700	1747.8	13;13;13;13	Power @ slot4	10.24051	6	14	PASS
DCS1800	700	1747.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot1	8.247101	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot2	8.055969	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot3	7.974121	4	12	PASS
DCS1800	700	1747.8	14;14;14;14	Power @ slot4	7.741364	4	12	PASS
DCS1800	700	1747.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot1	6.490753	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot2	5.92215	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot3	6.158752	2	10	PASS
DCS1800	700	1747.8	15;15;15;15	Power @ slot4	5.823029	2	10	PASS
DCS1800	700	1747.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot1	4.135925	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot2	4.192444	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot3	3.983795	0	8	PASS
DCS1800	700	1747.8	16;16;16;16	Power @ slot4	3.969421	0	8	PASS
DCS1800	700	1747.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot1	1.672821	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot2	1.667511	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot3	2.270447	-3	7	PASS
DCS1800	700	1747.8	17;17;17;17	Power @ slot4	1.991241	-3	7	PASS
DCS1800	700	1747.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot1	0.1339417	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot2	0.3832092	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot3	0.1988831	-5	5	PASS
DCS1800	700	1747.8	18;18;18;18	Power @ slot4	0.4855957	-5	5	PASS
DCS1800	885	1784.8	5;5;5;5	PvT	-	-	-	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot1	21.88702	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot2	21.52542	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot3	21.20526	16	26	PASS
DCS1800	885	1784.8	5;5;5;5	Power @ slot4	21.33035	16	26	PASS
DCS1800	885	1784.8	6;6;6;6	PvT	-	-	-	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot1	21.57291	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot2	21.24719	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot3	21.50415	17	26	PASS
DCS1800	885	1784.8	6;6;6;6	Power @ slot4	21.061	17	26	PASS
DCS1800	885	1784.8	7;7;7;7	PvT	-	-	-	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot1	21.61826	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot2	20.73398	17	25	PASS


DCS1800	885	1784.8	7;7;7;7	Power @ slot3	21.38593	17	25	PASS
DCS1800	885	1784.8	7;7;7;7	Power @ slot4	21.25681	17	25	PASS
DCS1800	885	1784.8	8;8;8;8	PvT	-	-	-	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot1	20.94626	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot2	20.32309	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot3	20.45618	17	23	PASS
DCS1800	885	1784.8	8;8;8;8	Power @ slot4	20.37039	17	23	PASS
DCS1800	885	1784.8	9;9;9;9	PvT	-	-	-	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot1	18.27728	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot2	19.07443	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot3	18.44138	15	21	PASS
DCS1800	885	1784.8	9;9;9;9	Power @ slot4	18.59073	15	21	PASS
DCS1800	885	1784.8	10;10;10;10	PvT	-	-	-	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot1	16.19812	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot2	16.88797	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot3	16.20459	13	19	PASS
DCS1800	885	1784.8	10;10;10;10	Power @ slot4	16.61365	13	19	PASS
DCS1800	885	1784.8	11;11;11;11	PvT	-	-	-	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot1	14.55875	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot2	14.75262	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot3	15.30008	11	17	PASS
DCS1800	885	1784.8	11;11;11;11	Power @ slot4	14.72021	11	17	PASS
DCS1800	885	1784.8	12;12;12;12	PvT	-	-	-	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot1	12.7146	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot2	12.94025	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot3	12.82645	8	16	PASS
DCS1800	885	1784.8	12;12;12;12	Power @ slot4	13.07114	8	16	PASS
DCS1800	885	1784.8	13;13;13;13	PvT	-	-	-	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot1	10.79996	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot2	10.45459	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot3	10.83975	6	14	PASS
DCS1800	885	1784.8	13;13;13;13	Power @ slot4	10.83975	6	14	PASS
DCS1800	885	1784.8	14;14;14;14	PvT	-	-	-	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot1	9.01059	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot2	9.059235	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot3	8.853699	4	12	PASS
DCS1800	885	1784.8	14;14;14;14	Power @ slot4	8.625366	4	12	PASS
DCS1800	885	1784.8	15;15;15;15	PvT	-	-	-	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot1	6.746887	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot2	6.465637	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot3	6.366974	2	10	PASS
DCS1800	885	1784.8	15;15;15;15	Power @ slot4	6.446503	2	10	PASS

DCS1800	885	1784.8	16;16;16;16	PvT	-	-	-	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot1	4.628754	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot2	4.2966	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot3	4.897064	0	8	PASS
DCS1800	885	1784.8	16;16;16;16	Power @ slot4	4.400543	0	8	PASS
DCS1800	885	1784.8	17;17;17;17	PvT	-	-	-	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot1	2.68573	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot2	2.686523	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot3	2.952972	-3	7	PASS
DCS1800	885	1784.8	17;17;17;17	Power @ slot4	1.844849	-3	7	PASS
DCS1800	885	1784.8	18;18;18;18	PvT	-	-	-	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot1	0.5061035	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot2	0.9992676	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot3	0.2961121	-5	5	PASS
DCS1800	885	1784.8	18;18;18;18	Power @ slot4	0.5543823	-5	5	PASS

GSM900 Channel=124 Gamma=17;17;17;17.png

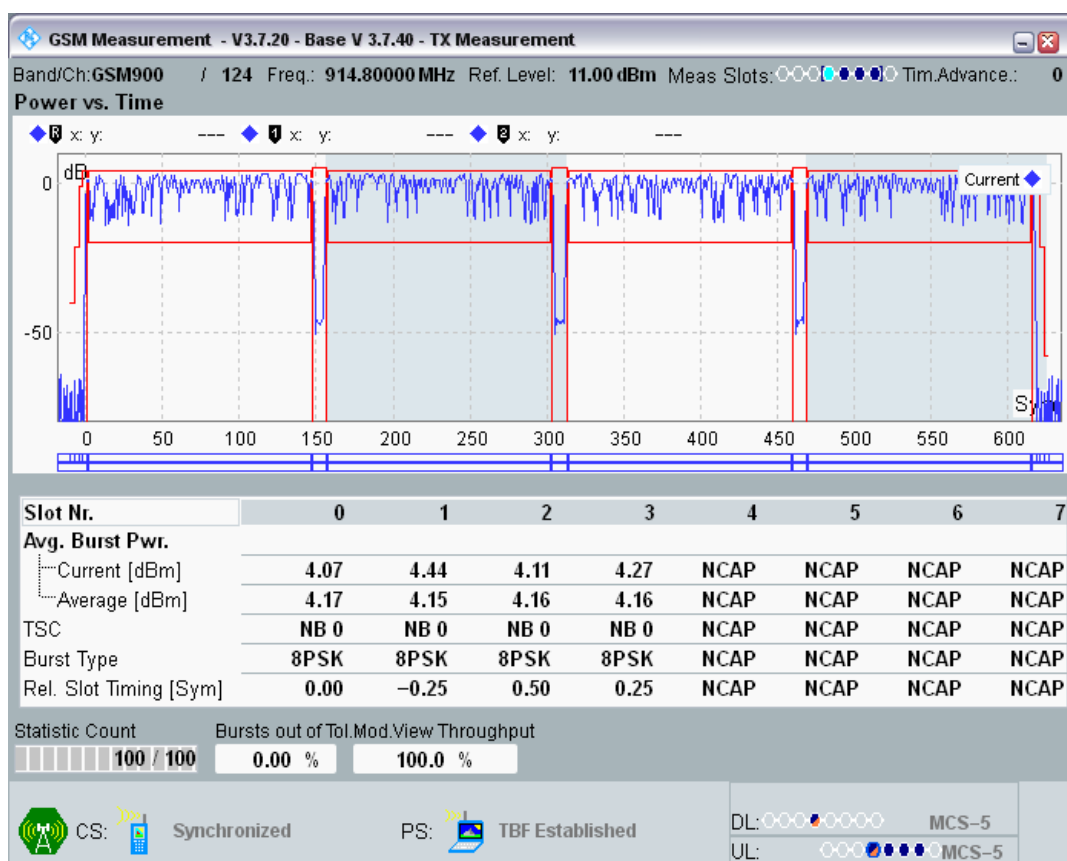

GSM900 Channel=124 Gamma=6;6;6;6.png

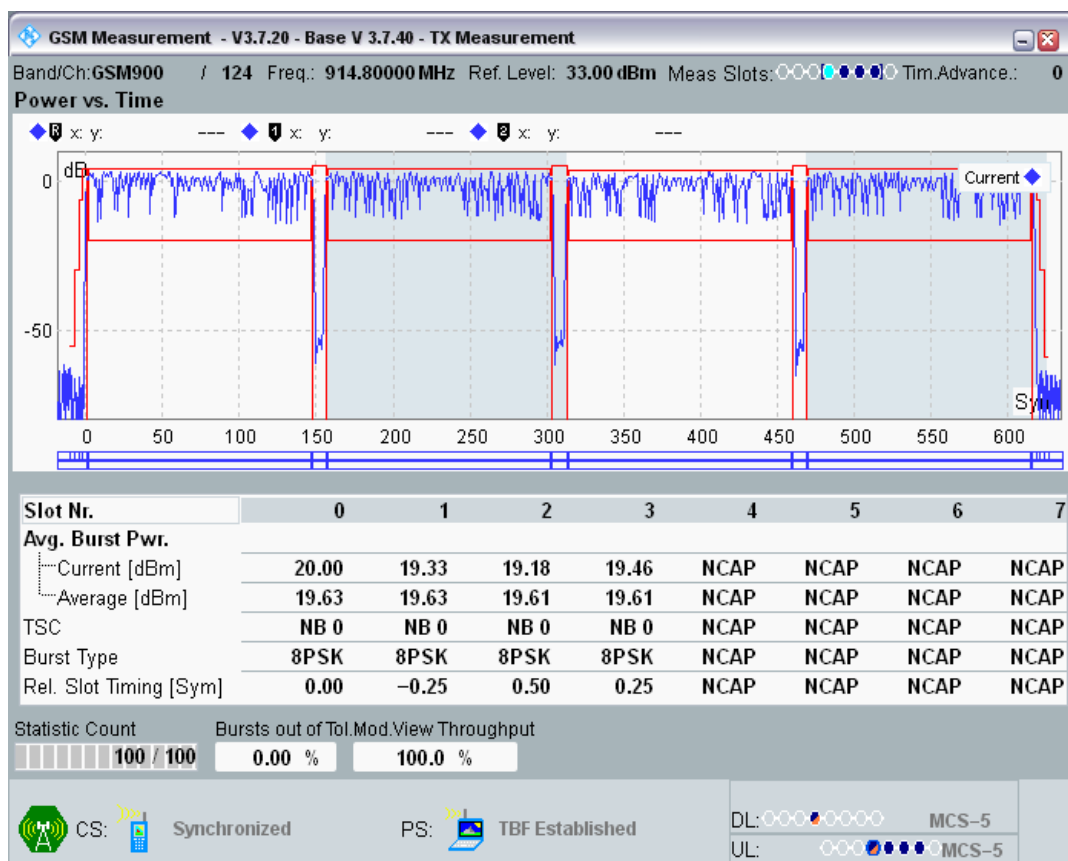

GSM900 Channel=60 Gamma=17;17;17;17.png




GSM900 Channel=60 Gamma=6;6;6;6.png




GSM900 Channel=975 Gamma=17;17;17;17.png




GSM900 Channel=975 Gamma=6;6;6;6.png

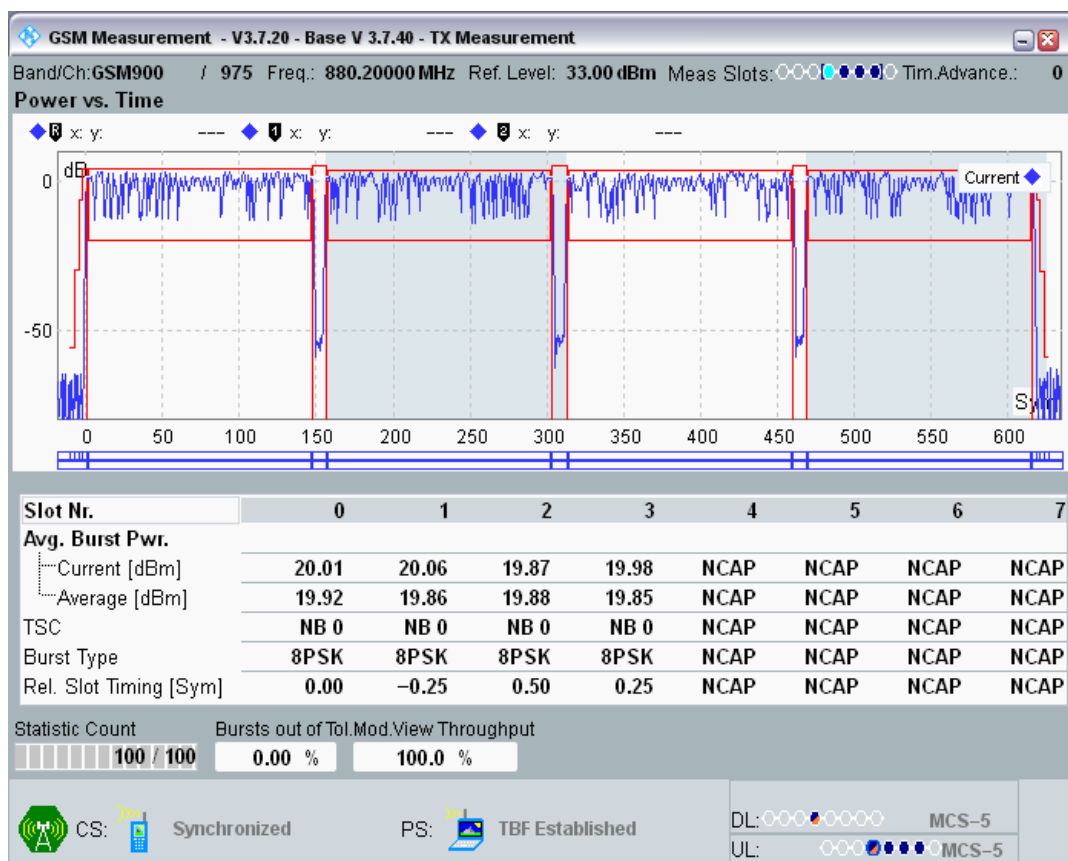


DCS1800 Channel=512 Gamma=18;18;18;18.png

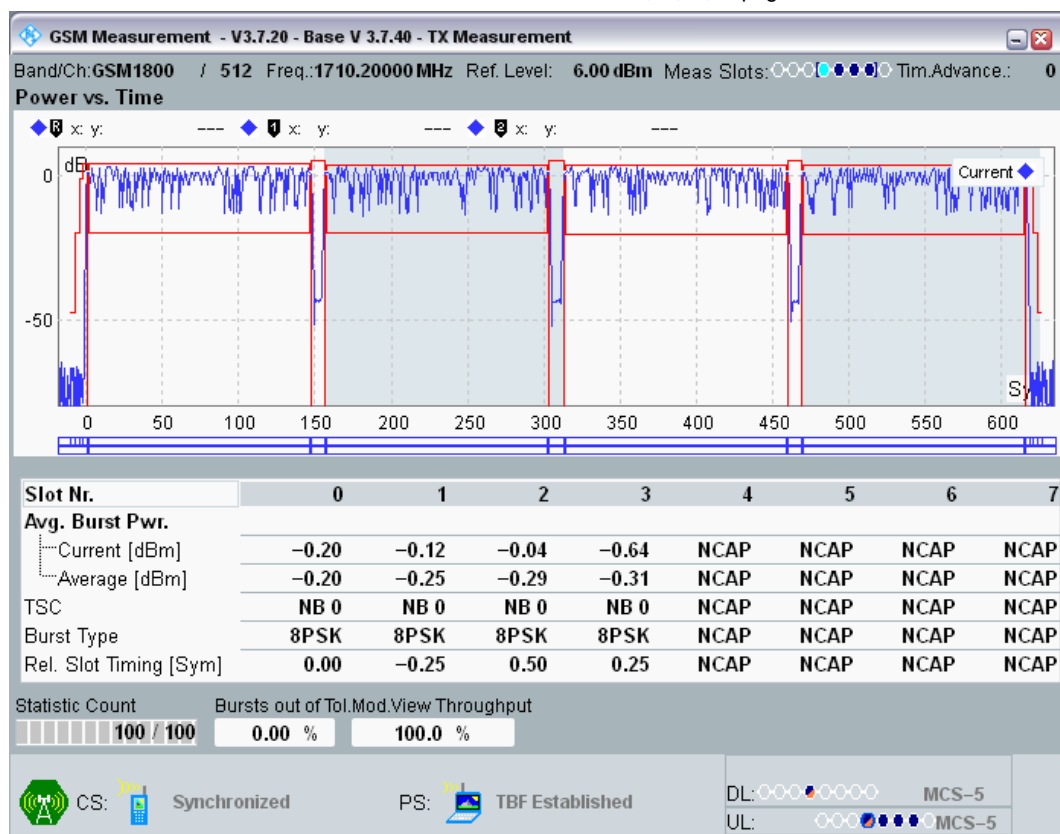


DCS1800 Channel=512 Gamma=5;5;5;5.png

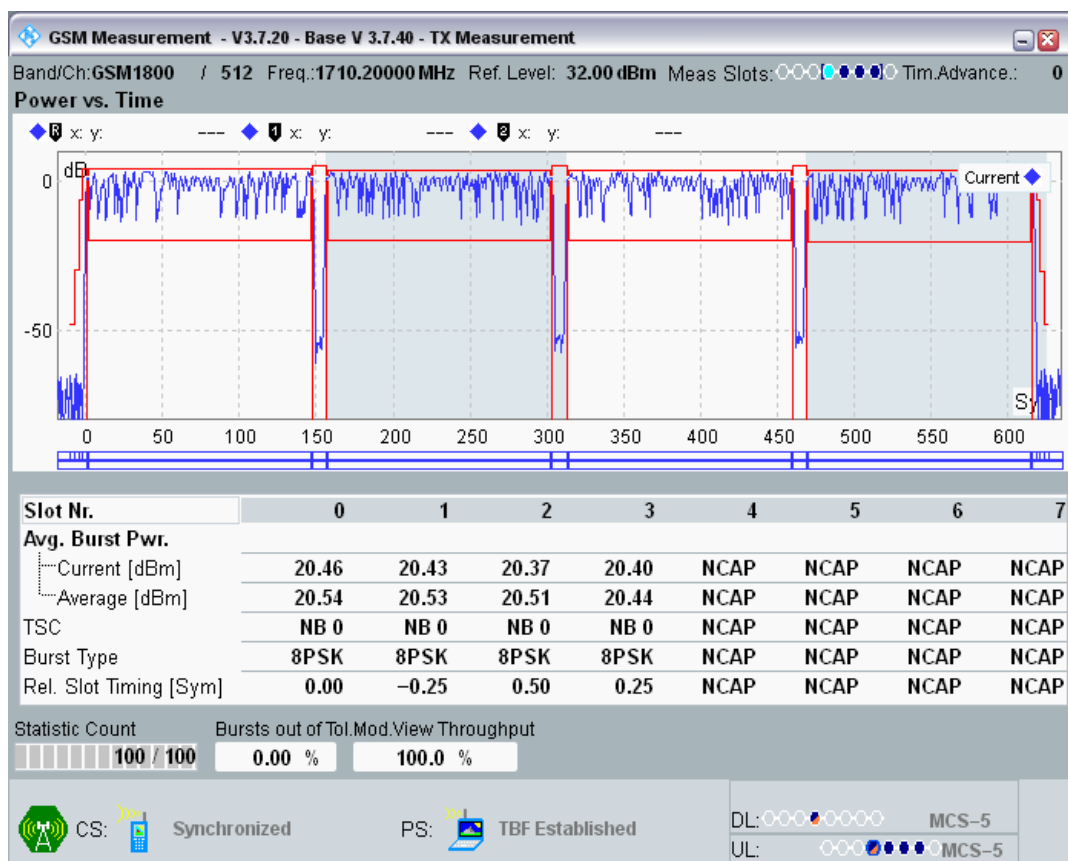

DCS1800 Channel=700 Gamma=18;18;18;18.png

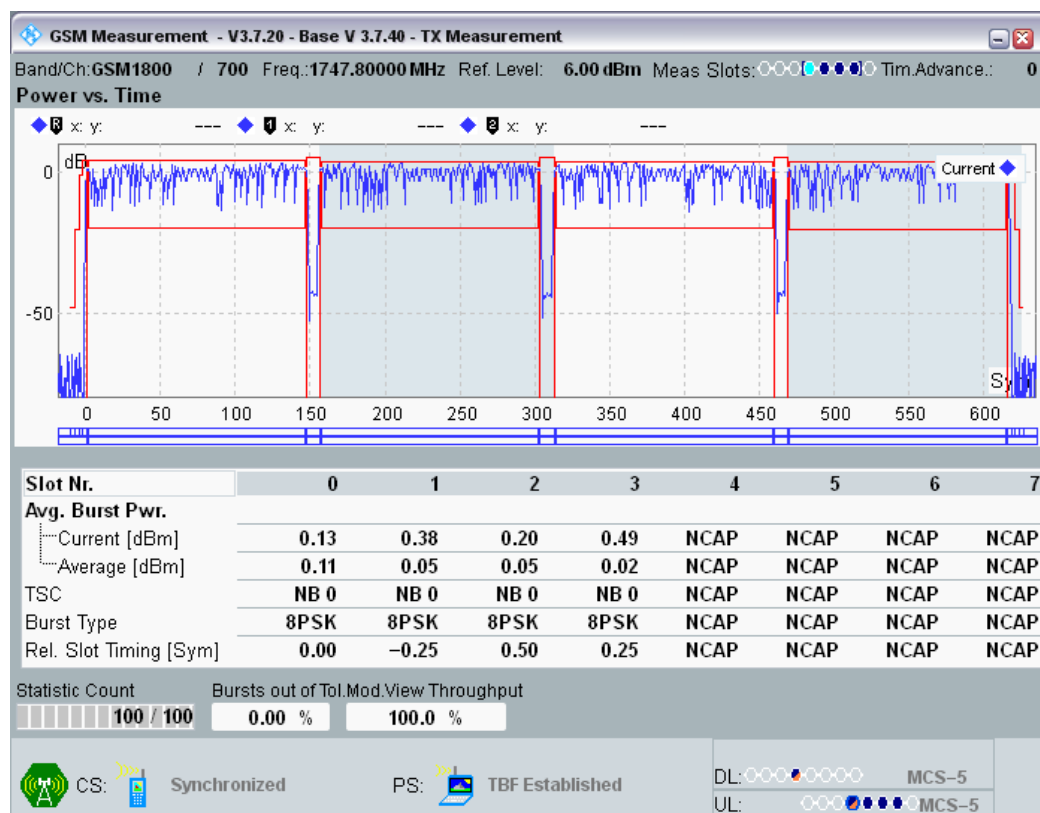


DCS1800 Channel=700 Gamma=5;5;5;5.png

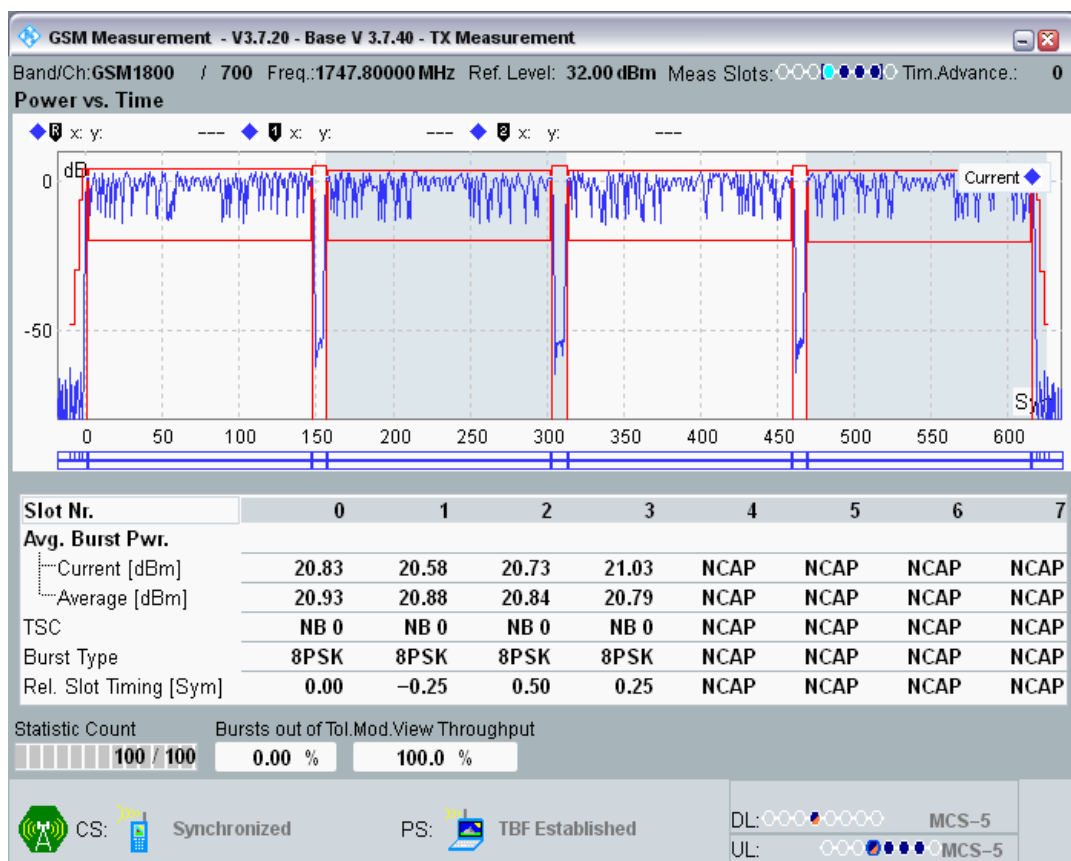

DCS1800 Channel=885 Gamma=18;18;18;18.png



DCS1800 Channel=885 Gamma=5;5;5;5.png

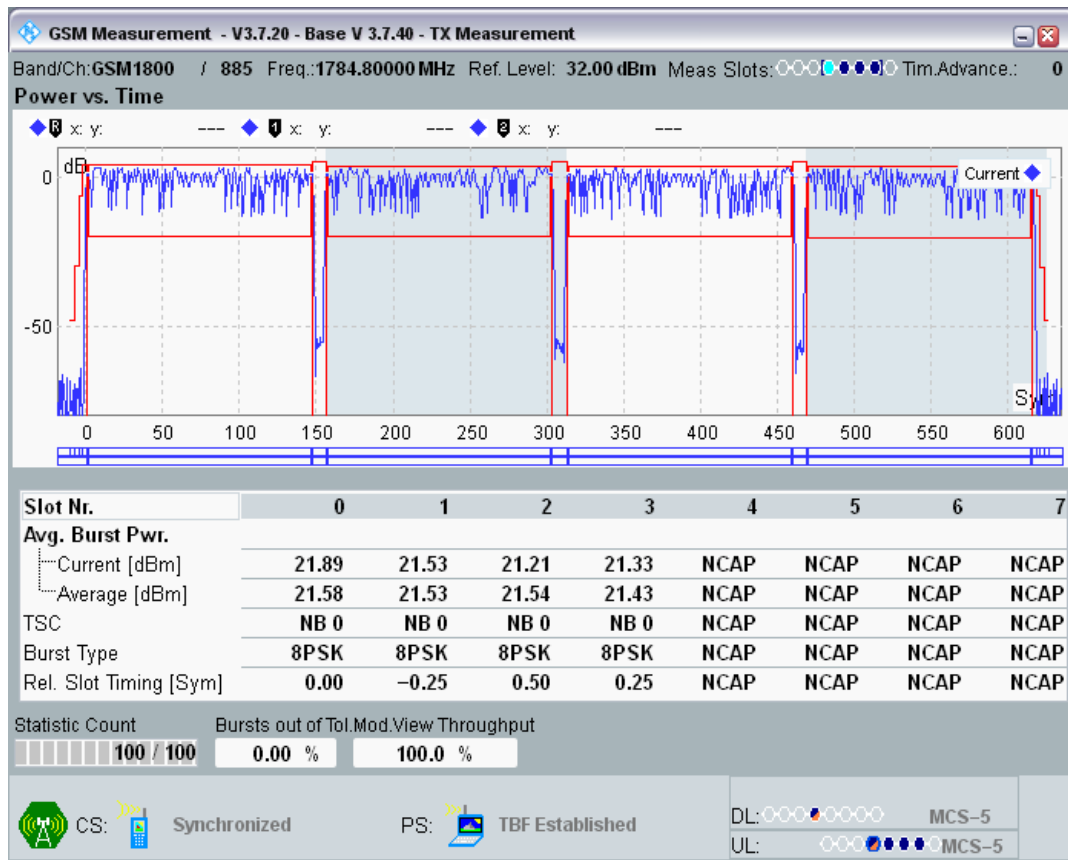

Clause 4.2.29 Modulation Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-73.86	-60	-62.27	-51	PASS
GSM900	975	880.2	6;6;6;6	-1600 KHz	-73.56	-60	-61.98	-51	PASS
GSM900	975	880.2	6;6;6;6	-1400 KHz	-72.88	-60	-61.30	-51	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-72.48	-60	-60.89	-51	PASS
GSM900	975	880.2	6;6;6;6	-1000 KHz	-71.95	-60	-60.36	-51	PASS
GSM900	975	880.2	6;6;6;6	-800 KHz	-70.93	-60	-59.35	-51	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-70.08	-60	-58.49	-51	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-68.09	-60	-56.50	-36	PASS
GSM900	975	880.2	6;6;6;6	-250 KHz	-42.05	-33	-30.46	-36	PASS
GSM900	975	880.2	6;6;6;6	-200 KHz	-38.58	-30	-26.99	-36	PASS
GSM900	975	880.2	6;6;6;6	-100 KHz	-7.83	0.5	3.75	-36	PASS
GSM900	975	880.2	6;6;6;6	100 KHz	-7.81	0.5	3.78	-36	PASS
GSM900	975	880.2	6;6;6;6	200 KHz	-38.45	-30	-26.86	-36	PASS
GSM900	975	880.2	6;6;6;6	250 KHz	-42.21	-33	-30.62	-36	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-68.05	-60	-56.46	-36	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-70.11	-60	-58.53	-51	PASS
GSM900	975	880.2	6;6;6;6	800 KHz	-71.41	-60	-59.83	-51	PASS
GSM900	975	880.2	6;6;6;6	1000 KHz	-71.90	-60	-60.32	-51	PASS

GSM900	975	880.2	6;6;6;6	1200 KHz	-72.51	-60	-60.93	-51	PASS
GSM900	975	880.2	6;6;6;6	1400 KHz	-72.84	-60	-61.26	-51	PASS
GSM900	975	880.2	6;6;6;6	1600 KHz	-73.70	-60	-62.12	-51	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-74.21	-60	-62.63	-51	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-73.64	-60	-62.41	-51	PASS
GSM900	60	902	6;6;6;6	-1600 KHz	-73.22	-60	-61.99	-51	PASS
GSM900	60	902	6;6;6;6	-1400 KHz	-72.53	-60	-61.30	-51	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-72.18	-60	-60.94	-51	PASS
GSM900	60	902	6;6;6;6	-1000 KHz	-71.66	-60	-60.43	-51	PASS
GSM900	60	902	6;6;6;6	-800 KHz	-70.86	-60	-59.63	-51	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-69.75	-60	-58.51	-51	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-67.56	-60	-56.33	-36	PASS
GSM900	60	902	6;6;6;6	-250 KHz	-41.66	-33	-30.43	-36	PASS
GSM900	60	902	6;6;6;6	-200 KHz	-38.24	-30	-27.00	-36	PASS
GSM900	60	902	6;6;6;6	-100 KHz	-8.04	0.5	3.20	-36	PASS
GSM900	60	902	6;6;6;6	100 KHz	-7.97	0.5	3.27	-36	PASS
GSM900	60	902	6;6;6;6	200 KHz	-38.54	-30	-27.30	-36	PASS
GSM900	60	902	6;6;6;6	250 KHz	-42.16	-33	-30.92	-36	PASS
GSM900	60	902	6;6;6;6	400 KHz	-67.72	-60	-56.48	-36	PASS
GSM900	60	902	6;6;6;6	600 KHz	-69.83	-60	-58.59	-51	PASS
GSM900	60	902	6;6;6;6	800 KHz	-71.08	-60	-59.84	-51	PASS
GSM900	60	902	6;6;6;6	1000 KHz	-71.87	-60	-60.64	-51	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-72.14	-60	-60.90	-51	PASS
GSM900	60	902	6;6;6;6	1400 KHz	-72.81	-60	-61.57	-51	PASS
GSM900	60	902	6;6;6;6	1600 KHz	-73.19	-60	-61.96	-51	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-73.82	-60	-62.59	-51	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-73.84	-60	-62.43	-51	PASS
GSM900	124	914.8	6;6;6;6	-1600 KHz	-73.33	-60	-61.92	-51	PASS
GSM900	124	914.8	6;6;6;6	-1400 KHz	-73.04	-60	-61.63	-51	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-72.47	-60	-61.06	-51	PASS
GSM900	124	914.8	6;6;6;6	-1000 KHz	-71.83	-60	-60.42	-51	PASS
GSM900	124	914.8	6;6;6;6	-800 KHz	-71.29	-60	-59.88	-51	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-70.12	-60	-58.70	-51	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-68.13	-60	-56.72	-36	PASS
GSM900	124	914.8	6;6;6;6	-250 KHz	-42.03	-33	-30.62	-36	PASS
GSM900	124	914.8	6;6;6;6	-200 KHz	-38.52	-30	-27.11	-36	PASS
GSM900	124	914.8	6;6;6;6	-100 KHz	-8.39	0.5	3.02	-36	PASS
GSM900	124	914.8	6;6;6;6	100 KHz	-8.08	0.5	3.33	-36	PASS
GSM900	124	914.8	6;6;6;6	200 KHz	-38.52	-30	-27.11	-36	PASS
GSM900	124	914.8	6;6;6;6	250 KHz	-41.99	-33	-30.57	-36	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-68.10	-60	-56.69	-36	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-70.33	-60	-58.91	-51	PASS


GSM900	124	914.8	6;6;6;6	800 KHz	-71.15	-60	-59.74	-51	PASS
GSM900	124	914.8	6;6;6;6	1000 KHz	-72.22	-60	-60.81	-51	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-72.64	-60	-61.23	-51	PASS
GSM900	124	914.8	6;6;6;6	1400 KHz	-73.21	-60	-61.80	-51	PASS
GSM900	124	914.8	6;6;6;6	1600 KHz	-73.58	-60	-62.17	-51	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-74.00	-60	-62.59	-51	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-74.58	-60	-62.27	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1600 KHz	-73.96	-60	-61.65	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1400 KHz	-73.26	-60	-60.95	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-72.19	-60	-59.88	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-1000 KHz	-70.93	-60	-58.62	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-800 KHz	-70.35	-60	-58.05	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-69.33	-60	-57.03	-56	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-66.30	-60	-53.99	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-250 KHz	-41.91	-33	-29.61	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-200 KHz	-38.19	-30	-25.88	-36	PASS
DCS1800	512	1710.2	5;5;5;5	-100 KHz	-7.57	0.5	4.74	-36	PASS
DCS1800	512	1710.2	5;5;5;5	100 KHz	-7.75	0.5	4.55	-36	PASS
DCS1800	512	1710.2	5;5;5;5	200 KHz	-37.88	-30	-25.57	-36	PASS
DCS1800	512	1710.2	5;5;5;5	250 KHz	-41.58	-33	-29.27	-36	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-66.24	-60	-53.93	-36	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-69.39	-60	-57.08	-56	PASS
DCS1800	512	1710.2	5;5;5;5	800 KHz	-70.55	-60	-58.25	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1000 KHz	-71.46	-60	-59.16	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-72.41	-60	-60.11	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1400 KHz	-73.49	-60	-61.19	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1600 KHz	-74.11	-60	-61.80	-56	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-74.85	-60	-62.54	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-74.67	-60	-62.21	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1600 KHz	-74.36	-60	-61.90	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1400 KHz	-73.81	-60	-61.35	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-72.76	-60	-60.30	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-1000 KHz	-72.32	-60	-59.86	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-800 KHz	-71.20	-60	-58.74	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-69.87	-60	-57.41	-56	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-66.75	-60	-54.29	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-250 KHz	-41.74	-33	-29.28	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-200 KHz	-37.97	-30	-25.51	-36	PASS
DCS1800	700	1747.8	5;5;5;5	-100 KHz	-7.86	0.5	4.60	-36	PASS
DCS1800	700	1747.8	5;5;5;5	100 KHz	-8.05	0.5	4.41	-36	PASS
DCS1800	700	1747.8	5;5;5;5	200 KHz	-37.92	-30	-25.46	-36	PASS
DCS1800	700	1747.8	5;5;5;5	250 KHz	-41.82	-33	-29.37	-36	PASS

DCS1800	700	1747.8	5;5;5;5	400 KHz	-66.83	-60	-54.37	-36	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-69.97	-60	-57.51	-56	PASS
DCS1800	700	1747.8	5;5;5;5	800 KHz	-71.33	-60	-58.87	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1000 KHz	-72.55	-60	-60.09	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-73.32	-60	-60.86	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1400 KHz	-73.98	-60	-61.52	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1600 KHz	-74.62	-60	-62.16	-56	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-74.97	-60	-62.51	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-75.60	-60	-62.53	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1600 KHz	-74.77	-60	-61.71	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1400 KHz	-74.02	-60	-60.96	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-72.93	-60	-59.87	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-1000 KHz	-72.29	-60	-59.22	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-800 KHz	-71.27	-60	-58.20	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-69.77	-60	-56.70	-56	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-66.50	-60	-53.44	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-250 KHz	-41.71	-33	-28.65	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-200 KHz	-37.84	-30	-24.77	-36	PASS
DCS1800	885	1784.8	5;5;5;5	-100 KHz	-7.72	0.5	5.35	-36	PASS
DCS1800	885	1784.8	5;5;5;5	100 KHz	-7.73	0.5	5.33	-36	PASS
DCS1800	885	1784.8	5;5;5;5	200 KHz	-37.99	-30	-24.93	-36	PASS
DCS1800	885	1784.8	5;5;5;5	250 KHz	-41.54	-33	-28.47	-36	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-66.66	-60	-53.59	-36	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-70.08	-60	-57.01	-56	PASS
DCS1800	885	1784.8	5;5;5;5	800 KHz	-71.66	-60	-58.60	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1000 KHz	-72.42	-60	-59.36	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-73.26	-60	-60.20	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1400 KHz	-74.21	-60	-61.15	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1600 KHz	-74.93	-60	-61.86	-56	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-75.70	-60	-62.64	-56	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

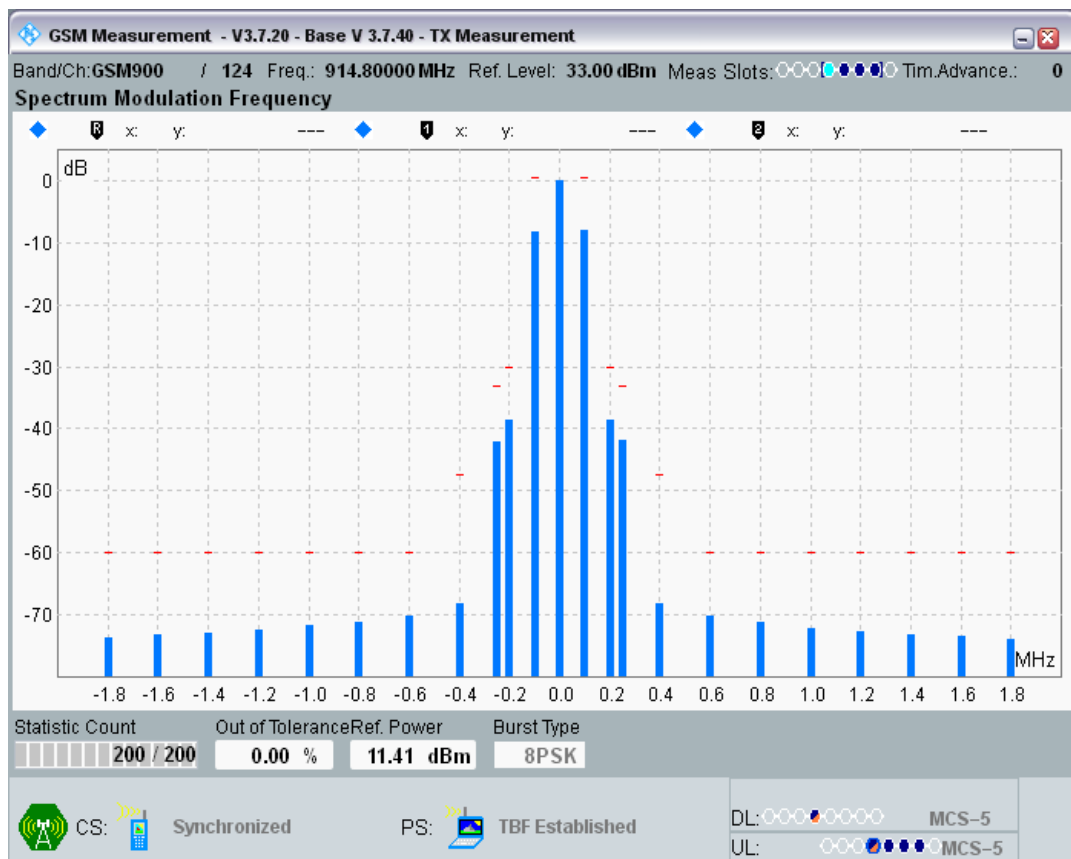


GSM900 Channel=60 Gamma=6;6;6;6.png

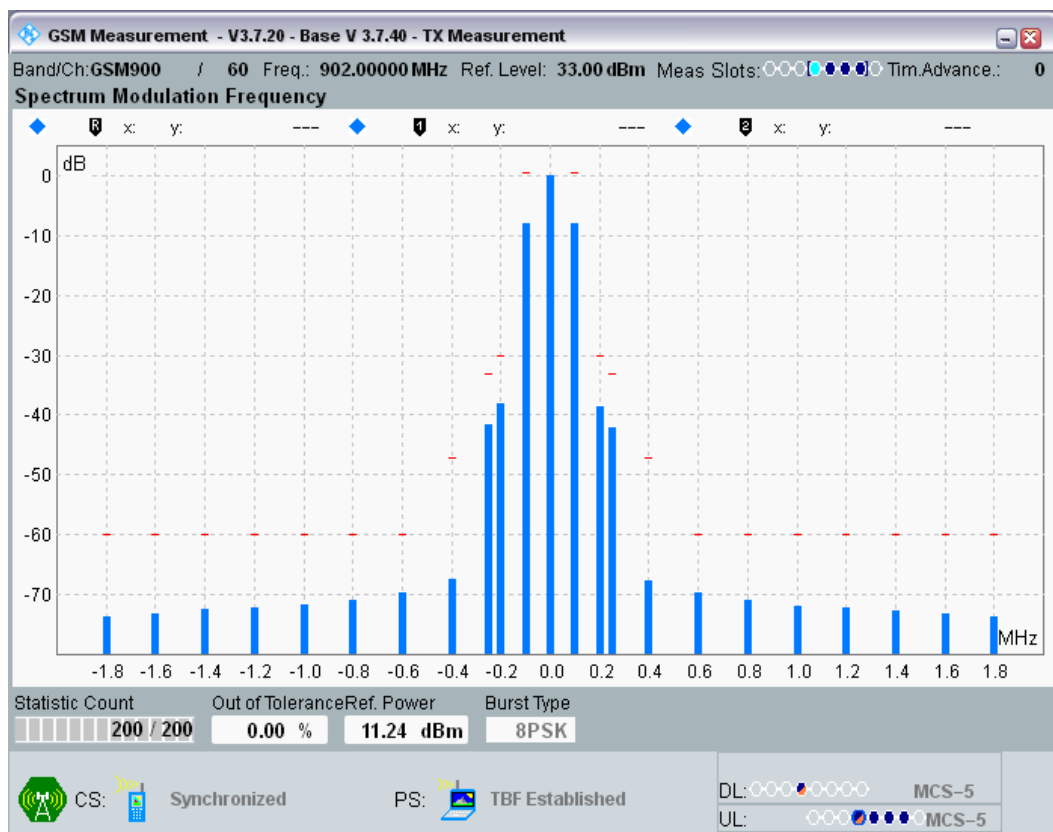


GSM900 Channel=975 Gamma=6;6;6;6.png

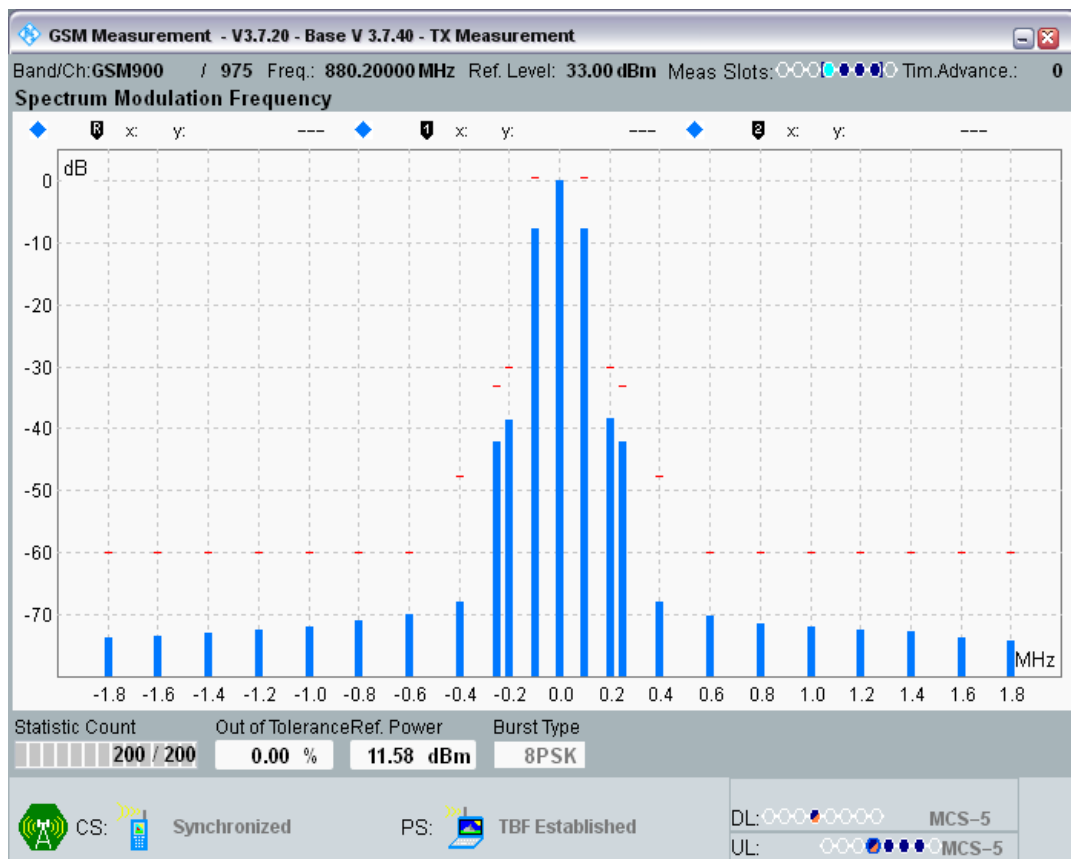


DCS1800 Channel=512 Gamma=5;5;5;5.png

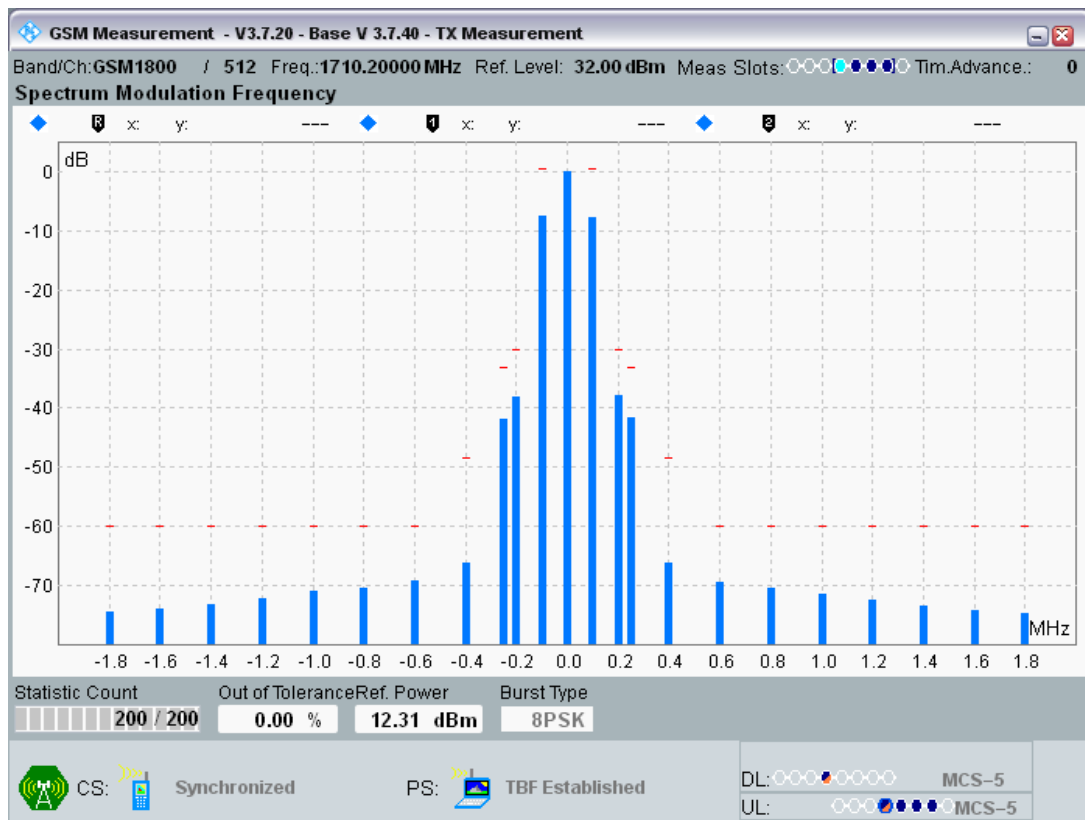

DCS1800 Channel=700 Gamma=5;5;5;5.png

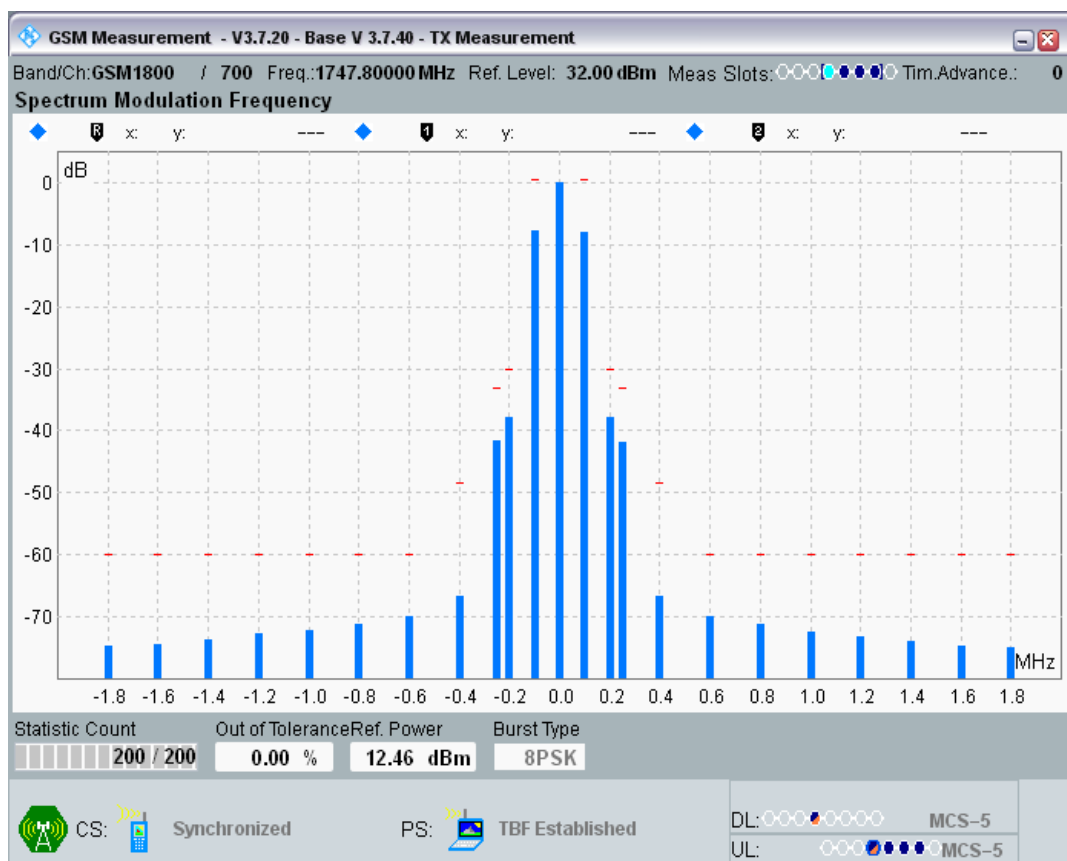

DCS1800 Channel=885 Gamma=5;5;5;5.png

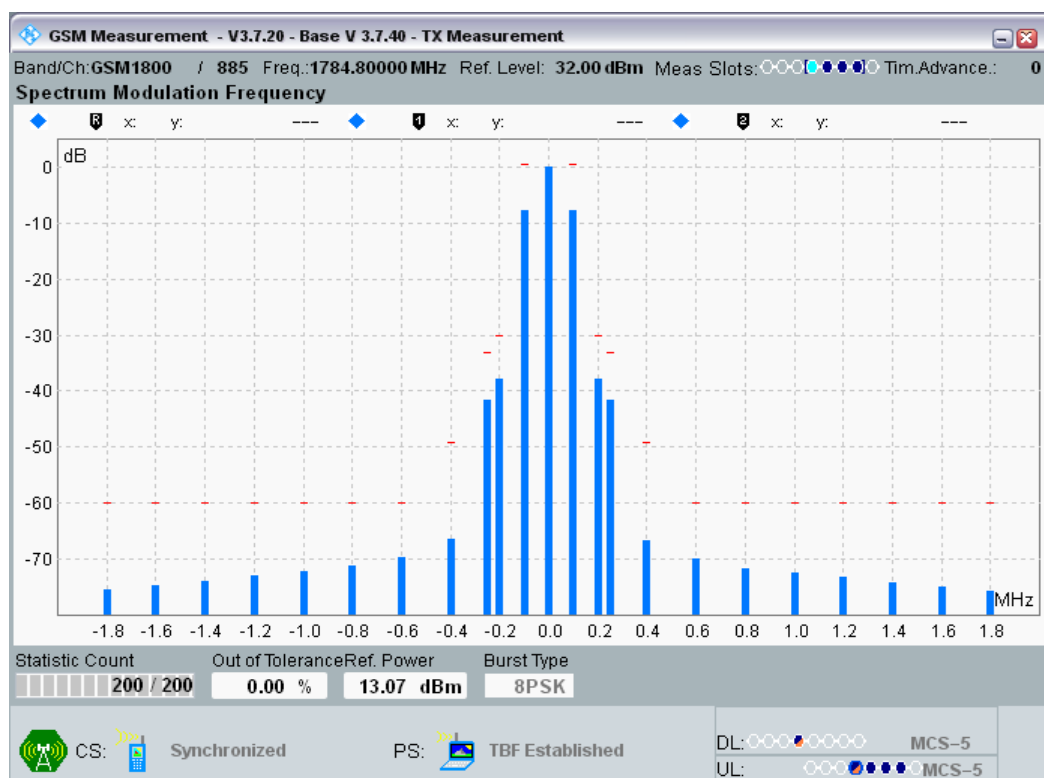


Clause 4.2.29 Switching Spectrum in EGPRS configuration


Band	Channel	Frequency (MHz)	Gamma	Offset (KHz)	Result (dB)	Limit (dB)	Verdict
GSM900	975	880.2	6;6;6;6	-1800 KHz	-49.29	-24	PASS
GSM900	975	880.2	6;6;6;6	-1200 KHz	-49.66	-21	PASS
GSM900	975	880.2	6;6;6;6	-600 KHz	-47.13	-21	PASS
GSM900	975	880.2	6;6;6;6	-400 KHz	-45.62	-19	PASS
GSM900	975	880.2	6;6;6;6	400 KHz	-43.90	-19	PASS
GSM900	975	880.2	6;6;6;6	600 KHz	-46.83	-21	PASS
GSM900	975	880.2	6;6;6;6	1200 KHz	-50.59	-21	PASS
GSM900	975	880.2	6;6;6;6	1800 KHz	-50.13	-24	PASS
GSM900	60	902	6;6;6;6	-1800 KHz	-50.28	-24	PASS
GSM900	60	902	6;6;6;6	-1200 KHz	-48.25	-21	PASS
GSM900	60	902	6;6;6;6	-600 KHz	-47.17	-21	PASS
GSM900	60	902	6;6;6;6	-400 KHz	-46.27	-19	PASS
GSM900	60	902	6;6;6;6	400 KHz	-44.84	-19	PASS
GSM900	60	902	6;6;6;6	600 KHz	-44.95	-21	PASS
GSM900	60	902	6;6;6;6	1200 KHz	-49.92	-21	PASS
GSM900	60	902	6;6;6;6	1800 KHz	-50.53	-24	PASS
GSM900	124	914.8	6;6;6;6	-1800 KHz	-50.15	-24	PASS
GSM900	124	914.8	6;6;6;6	-1200 KHz	-50.05	-21	PASS
GSM900	124	914.8	6;6;6;6	-600 KHz	-46.89	-21	PASS
GSM900	124	914.8	6;6;6;6	-400 KHz	-44.49	-19	PASS
GSM900	124	914.8	6;6;6;6	400 KHz	-44.38	-19	PASS
GSM900	124	914.8	6;6;6;6	600 KHz	-45.97	-21	PASS
GSM900	124	914.8	6;6;6;6	1200 KHz	-50.05	-21	PASS
GSM900	124	914.8	6;6;6;6	1800 KHz	-50.30	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-1800 KHz	-50.45	-27	PASS
DCS1800	512	1710.2	5;5;5;5	-1200 KHz	-47.87	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-600 KHz	-44.27	-24	PASS
DCS1800	512	1710.2	5;5;5;5	-400 KHz	-42.72	-22	PASS
DCS1800	512	1710.2	5;5;5;5	400 KHz	-42.36	-22	PASS
DCS1800	512	1710.2	5;5;5;5	600 KHz	-44.37	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1200 KHz	-48.75	-24	PASS
DCS1800	512	1710.2	5;5;5;5	1800 KHz	-51.33	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1800 KHz	-51.75	-27	PASS
DCS1800	700	1747.8	5;5;5;5	-1200 KHz	-49.27	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-600 KHz	-46.16	-24	PASS
DCS1800	700	1747.8	5;5;5;5	-400 KHz	-41.99	-22	PASS
DCS1800	700	1747.8	5;5;5;5	400 KHz	-41.80	-22	PASS
DCS1800	700	1747.8	5;5;5;5	600 KHz	-45.17	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1200 KHz	-48.82	-24	PASS
DCS1800	700	1747.8	5;5;5;5	1800 KHz	-50.40	-27	PASS
DCS1800	885	1784.8	5;5;5;5	-1800 KHz	-50.98	-27	PASS

DCS1800	885	1784.8	5;5;5;5	-1200 KHz	-48.84	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-600 KHz	-44.98	-24	PASS
DCS1800	885	1784.8	5;5;5;5	-400 KHz	-41.15	-22	PASS
DCS1800	885	1784.8	5;5;5;5	400 KHz	-41.63	-22	PASS
DCS1800	885	1784.8	5;5;5;5	600 KHz	-44.60	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1200 KHz	-48.54	-24	PASS
DCS1800	885	1784.8	5;5;5;5	1800 KHz	-50.22	-27	PASS


GSM900 Channel=124 Gamma=6;6;6;6.png

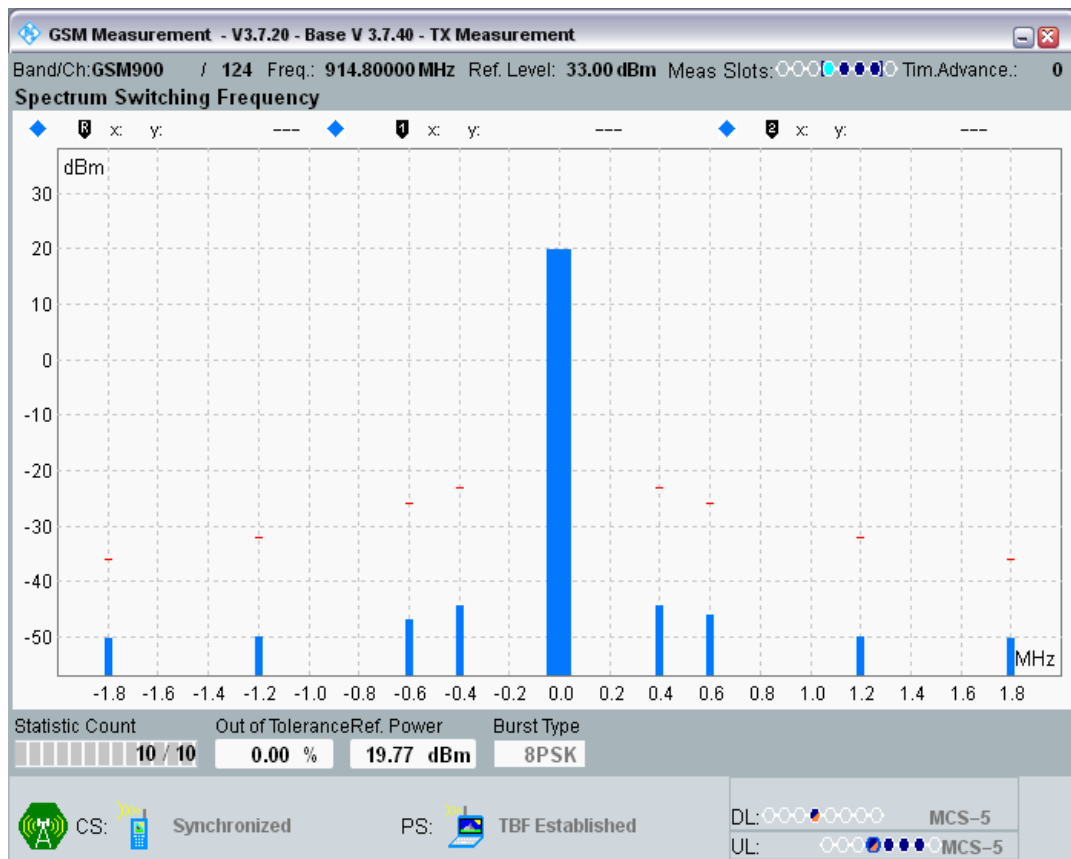


GSM900 Channel=60 Gamma=6;6;6.png

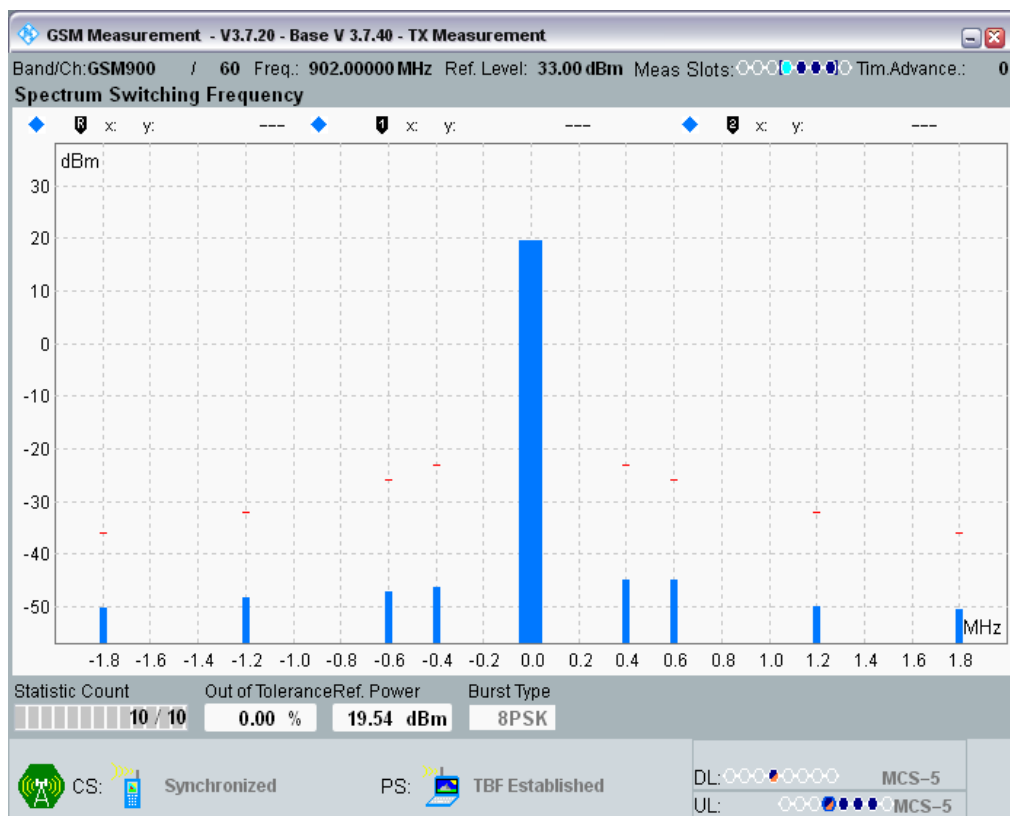


GSM900 Channel=975 Gamma=6;6;6.png

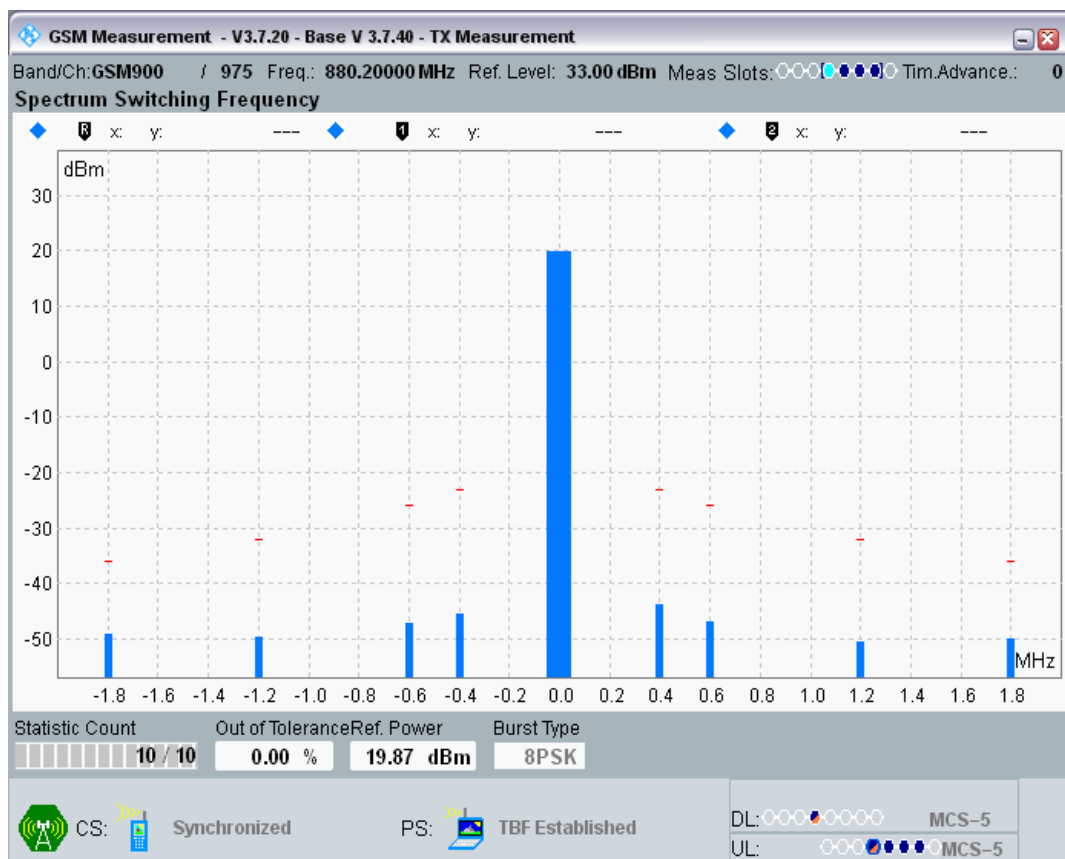

DCS1800 Channel=512 Gamma=5;5;5;5.png

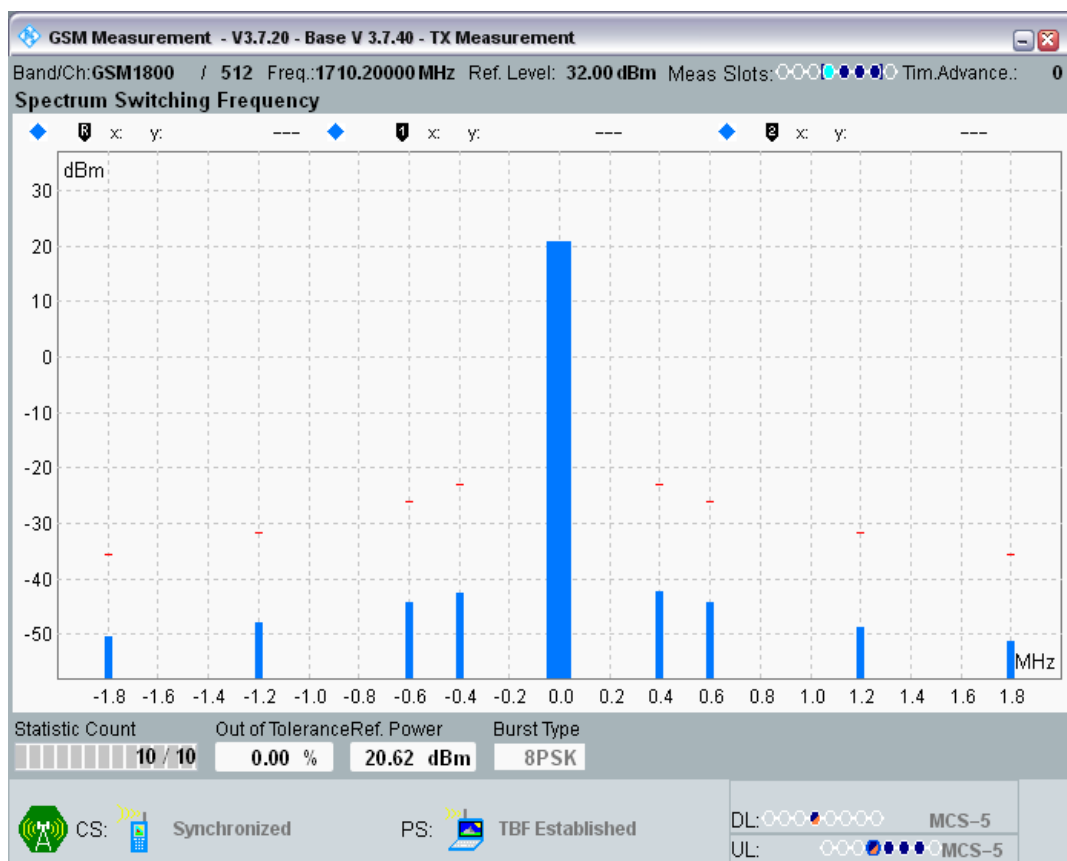

DCS1800 Channel=700 Gamma=5;5;5;5.png

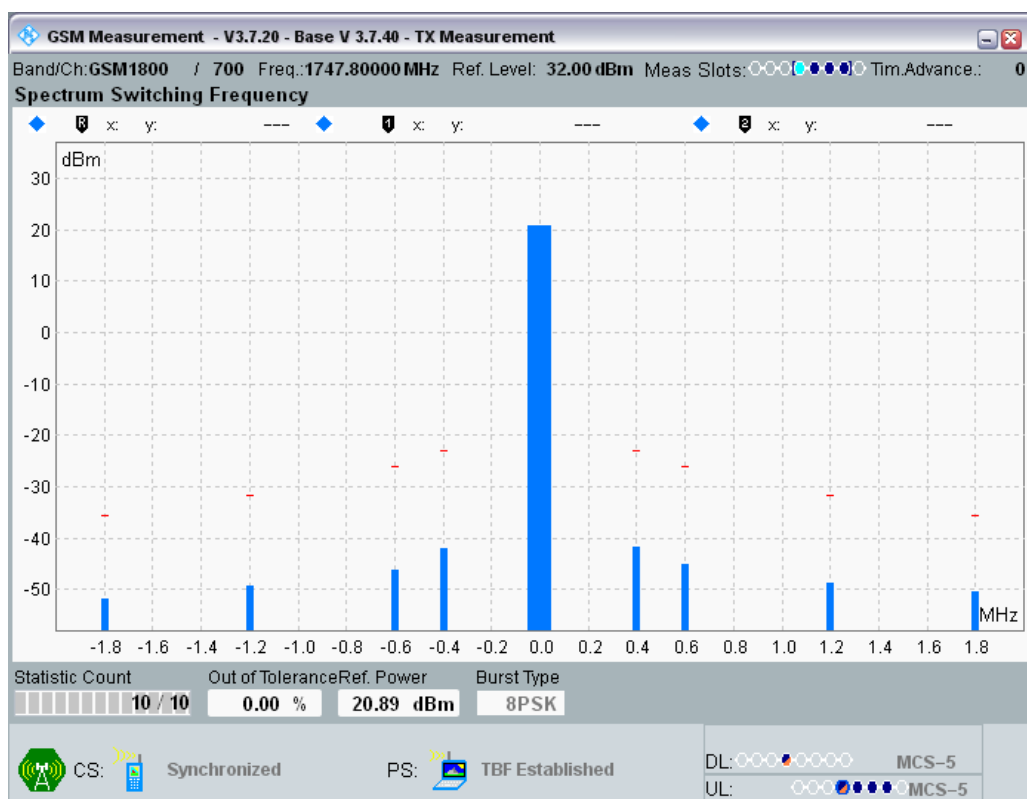

DCS1800 Channel=885 Gamma=5;5;5;5.png

