


## Test Data


### 5.4.2 RF Output Power

Condition	Mode	Frequency (MHz)	Antenna	Max Burst RMS Power (dBm)	Burst Number	Max EIRP (dBm)	Limit (dBm)	Verdict
NVHT	b	2412	Ant1	13.17	36	15.05	20	Pass
NVHT	b	2442	Ant1	13.36	36	15.24	20	Pass
NVHT	b	2472	Ant1	13.45	36	15.33	20	Pass
NVLT	b	2412	Ant1	13.18	37	15.06	20	Pass
NVLT	b	2442	Ant1	13.36	37	15.24	20	Pass
NVLT	b	2472	Ant1	13.82	37	15.7	20	Pass
NVNT	b	2412	Ant1	13.54	37	15.42	20	Pass
NVNT	b	2442	Ant1	13.37	36	15.25	20	Pass
NVNT	b	2472	Ant1	13.47	37	15.35	20	Pass
NVHT	g	2412	Ant1	12.34	49	14.22	20	Pass
NVHT	g	2442	Ant1	12.42	49	14.3	20	Pass
NVHT	g	2472	Ant1	12.5	49	14.38	20	Pass
NVLT	g	2412	Ant1	12.34	50	14.22	20	Pass
NVLT	g	2442	Ant1	12.42	50	14.3	20	Pass
NVLT	g	2472	Ant1	12.51	49	14.39	20	Pass
NVNT	g	2412	Ant1	12.49	49	14.37	20	Pass
NVNT	g	2442	Ant1	12.52	49	14.4	20	Pass
NVNT	g	2472	Ant1	12.59	49	14.47	20	Pass
NVHT	n20	2412	Ant1	11.27	39	13.15	20	Pass
NVHT	n20	2442	Ant1	11.79	39	13.67	20	Pass
NVHT	n20	2472	Ant1	11.46	40	13.34	20	Pass
NVLT	n20	2412	Ant1	11.26	39	13.14	20	Pass
NVLT	n20	2442	Ant1	11.8	39	13.68	20	Pass
NVLT	n20	2472	Ant1	11.43	39	13.31	20	Pass
NVNT	n20	2412	Ant1	11.34	39	13.22	20	Pass
NVNT	n20	2442	Ant1	11.84	39	13.72	20	Pass
NVNT	n20	2472	Ant1	11.48	39	13.36	20	Pass
NVHT	n40	2422	Ant1	10.6	78	12.48	20	Pass
NVHT	n40	2442	Ant1	10.29	78	12.17	20	Pass
NVHT	n40	2483	Ant1	10.93	78	12.81	20	Pass
NVLT	n40	2422	Ant1	10.6	78	12.48	20	Pass
NVLT	n40	2442	Ant1	10.27	79	12.15	20	Pass
NVLT	n40	2495	Ant1	10.99	79	12.87	20	Pass
NVNT	n40	2422	Ant1	10.61	79	12.49	20	Pass
NVNT	n40	2442	Ant1	10.29	78	12.17	20	Pass
NVNT	n40	2462	Ant1	10.93	78	12.81	20	Pass


Power NVHT b 2412MHz Ant1

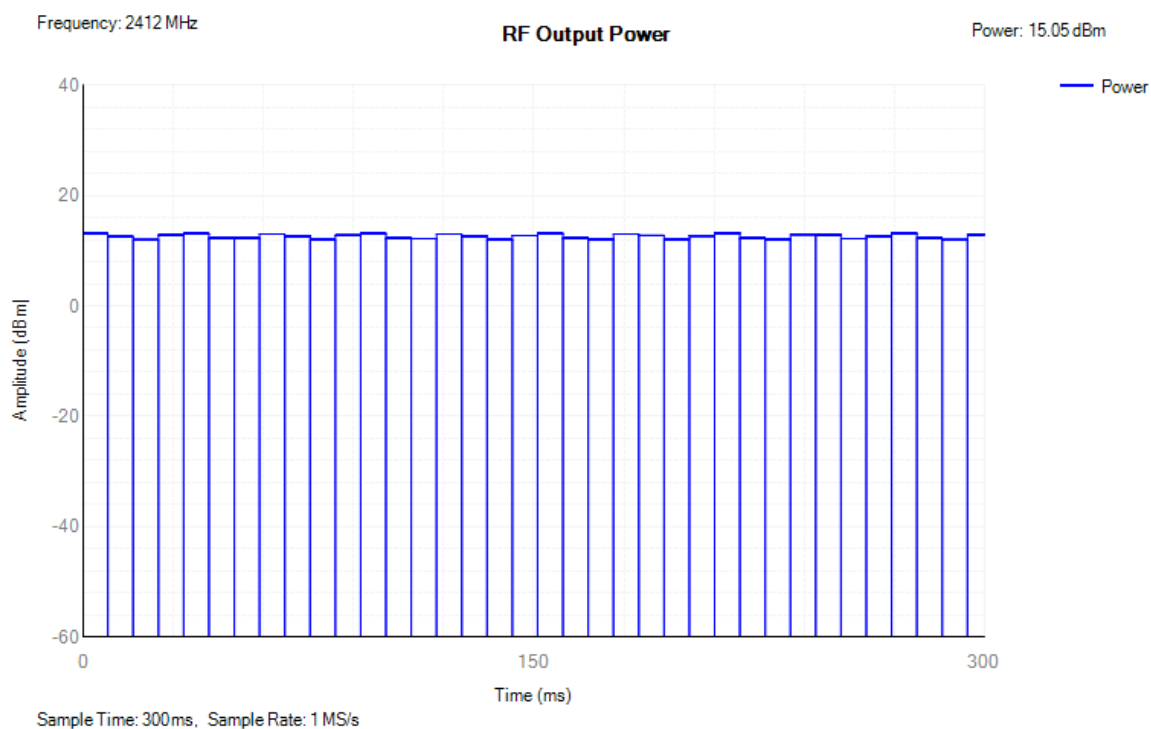


Power NVHT b 2442MHz Ant1

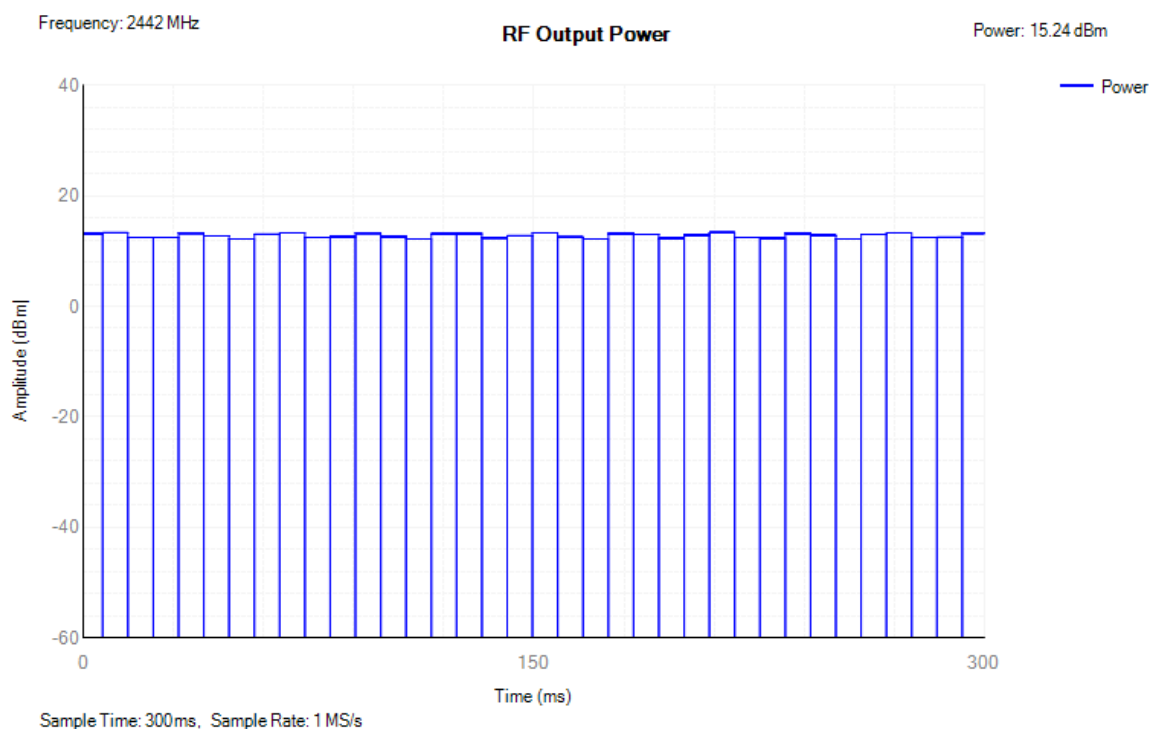


Power NVHT b 2472MHz Ant1

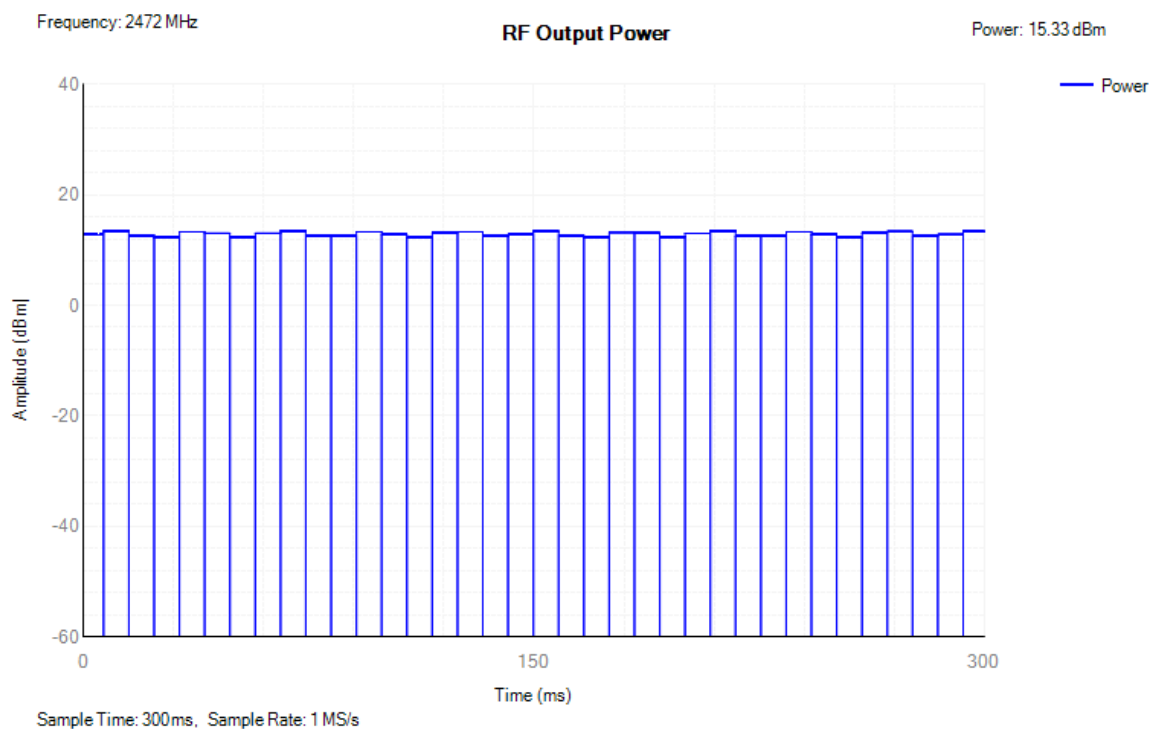


Power NVLT b 2412MHz Ant1

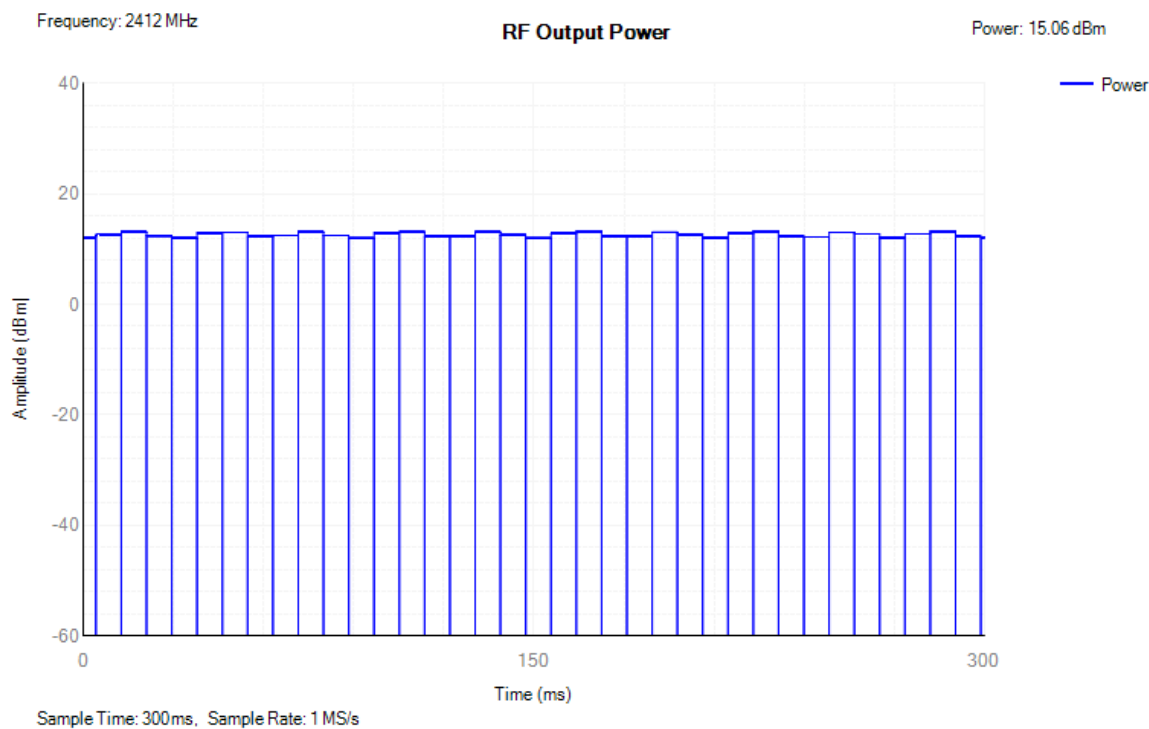


Power NVLT b 2442MHz Ant1

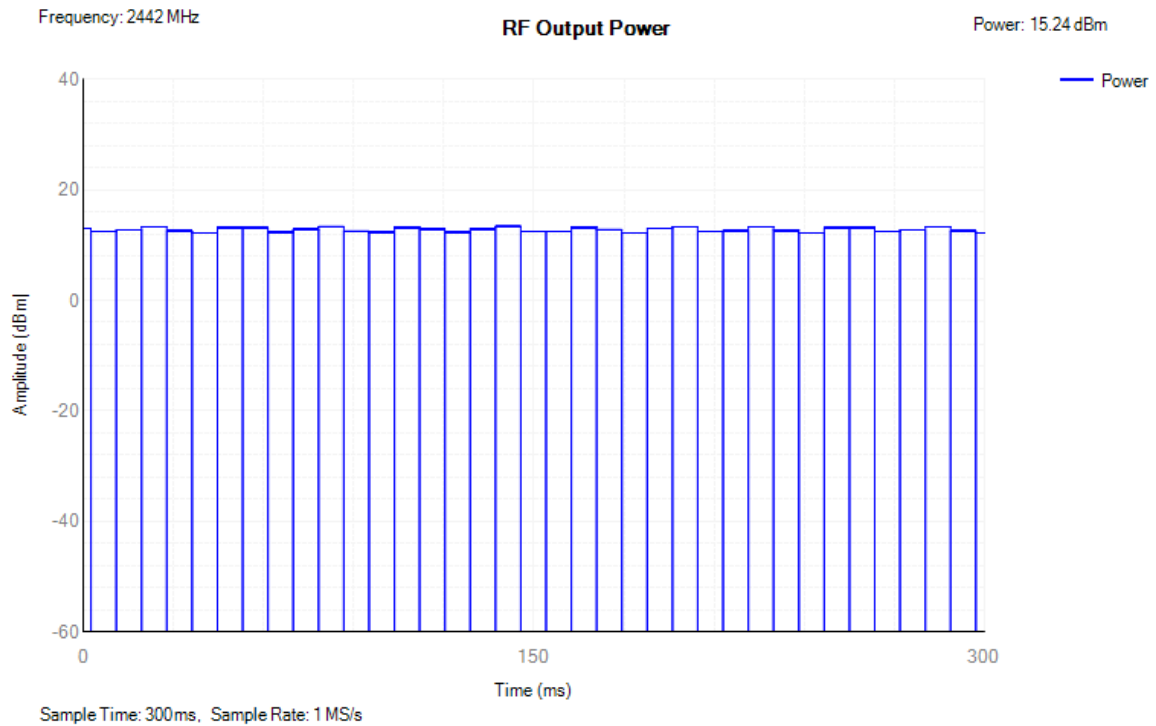


Power NVLT b 2472MHz Ant1

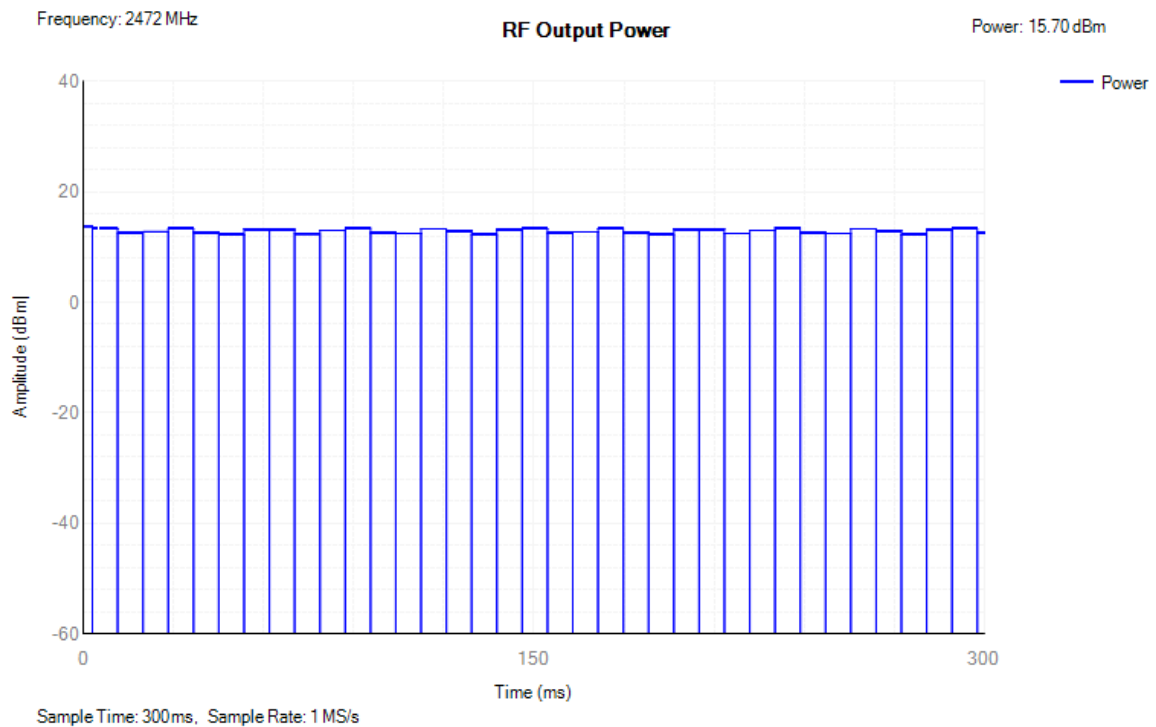


## Pow er NVNT b 2412MHz Ant1

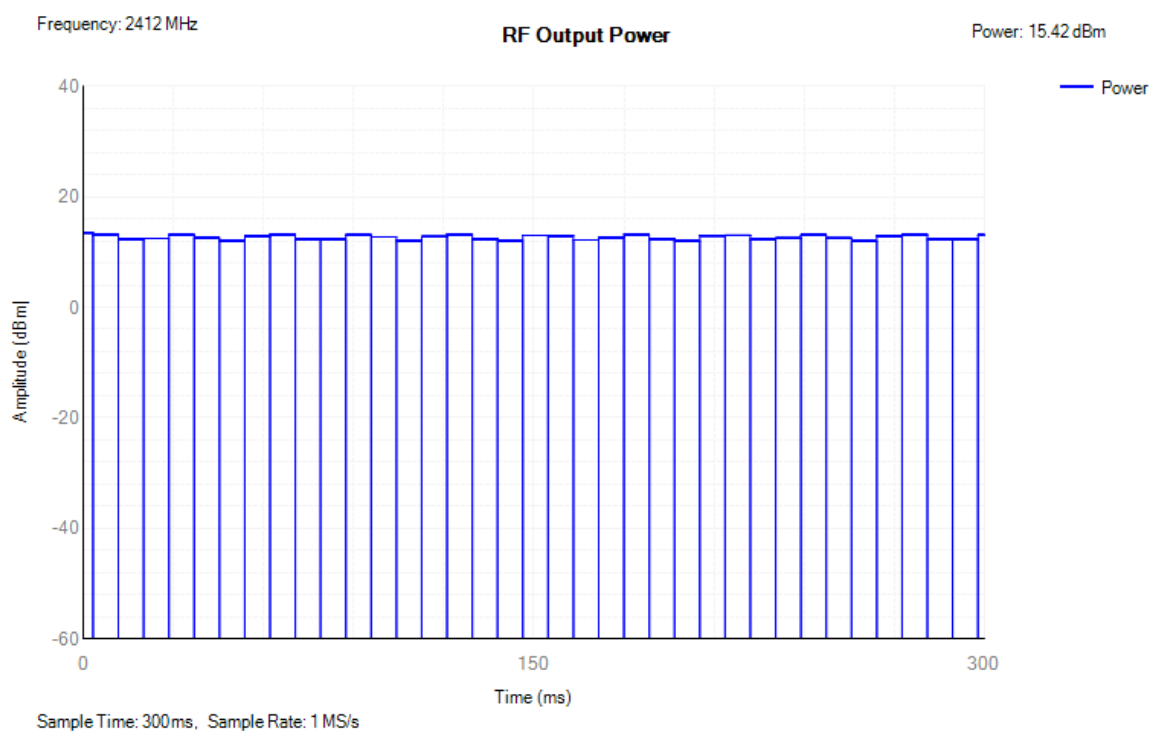


## Pow er NVNT b 2442MHz Ant1

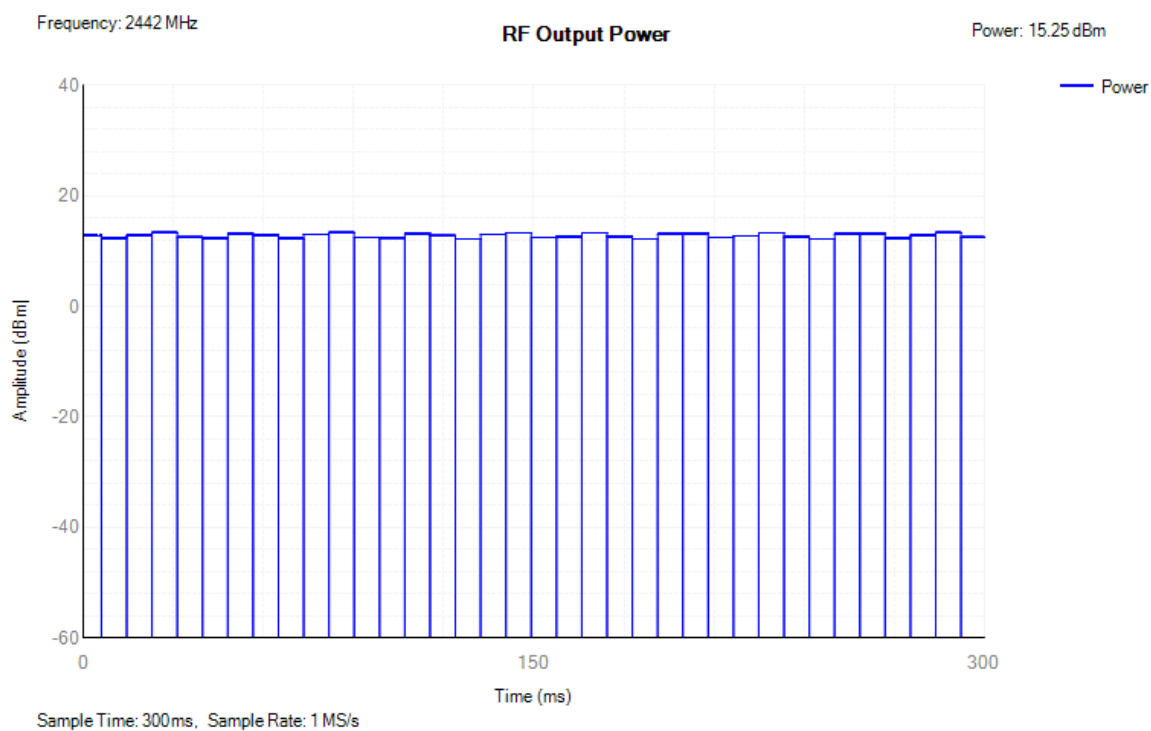


## Pow er NVNT b 2472MHz Ant1

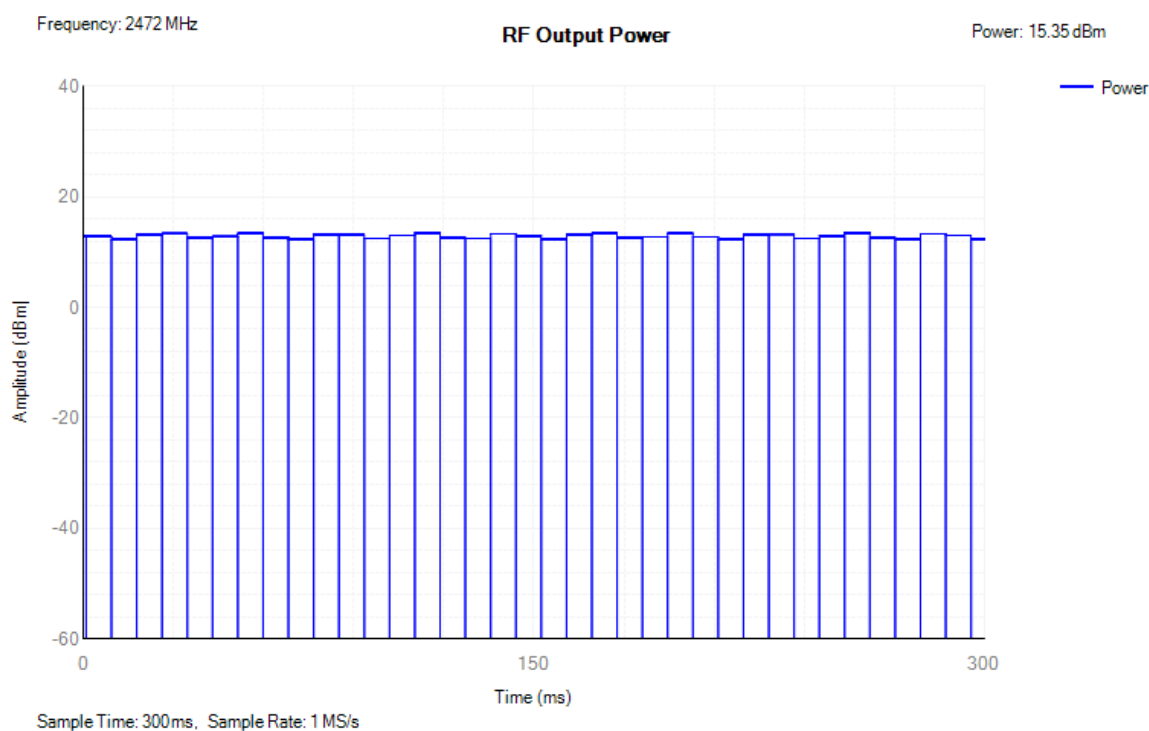


## Pow er NVHT g 2412MHz Ant1

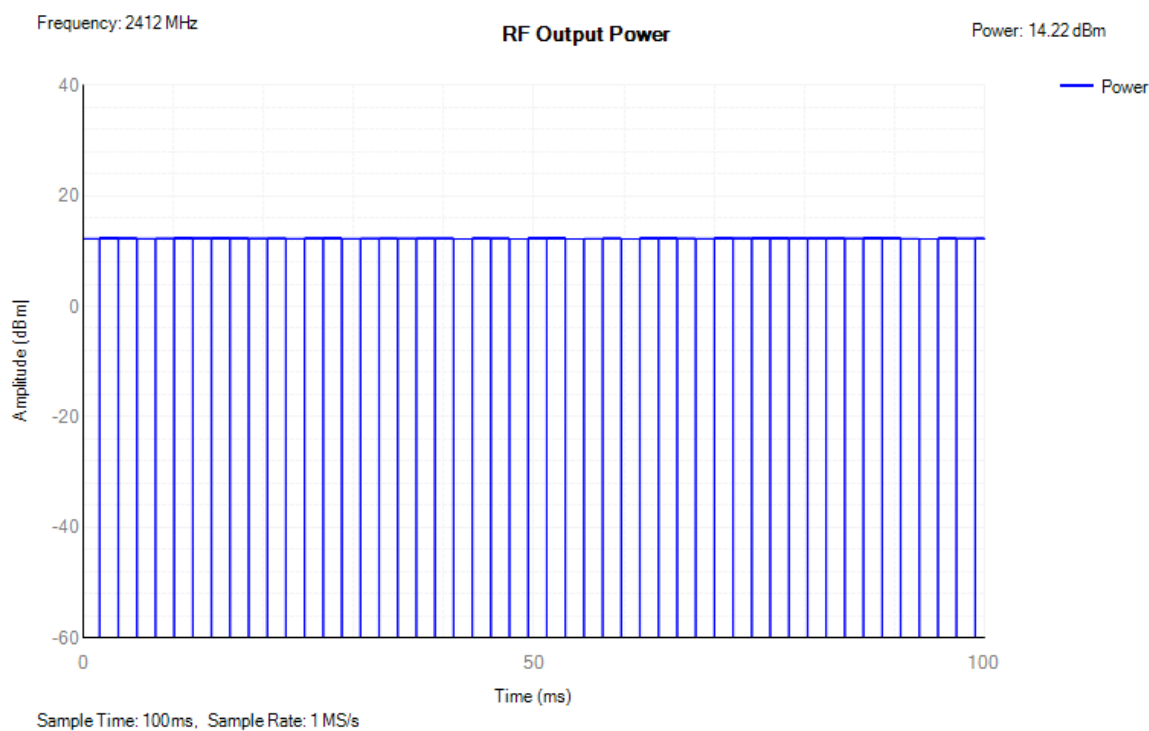


## Pow er NVHT g 2442MHz Ant1

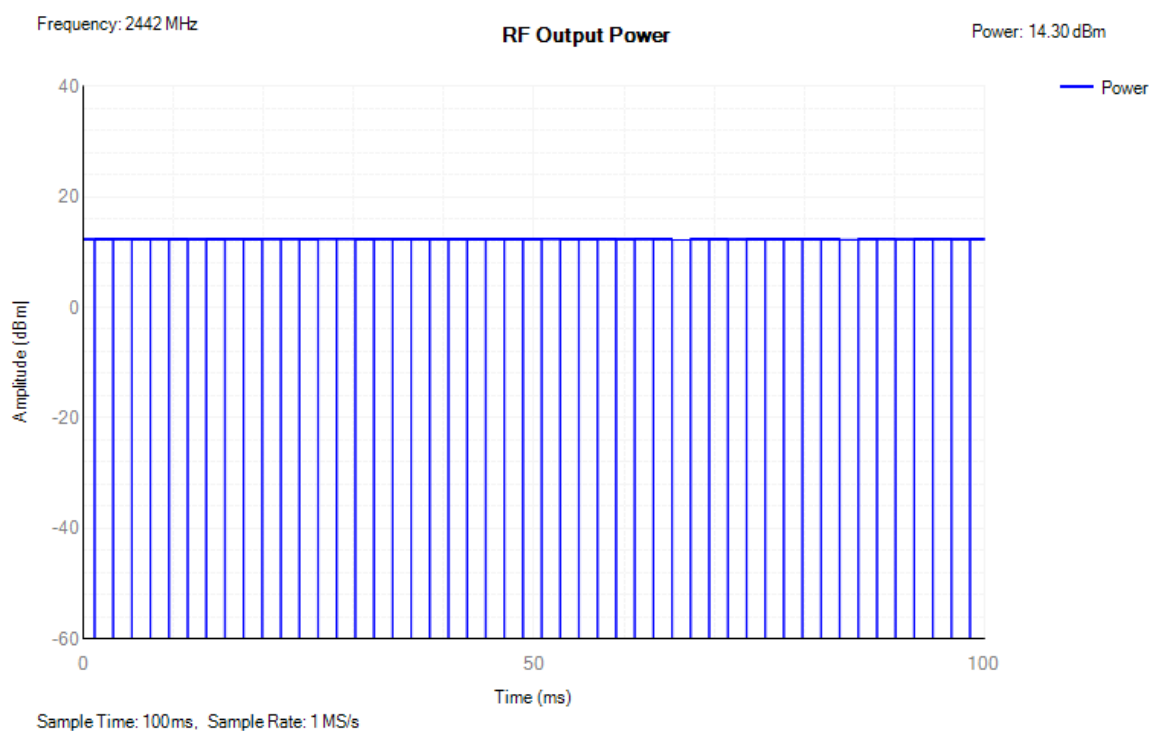


## Pow er NVHT g 2472MHz Ant1

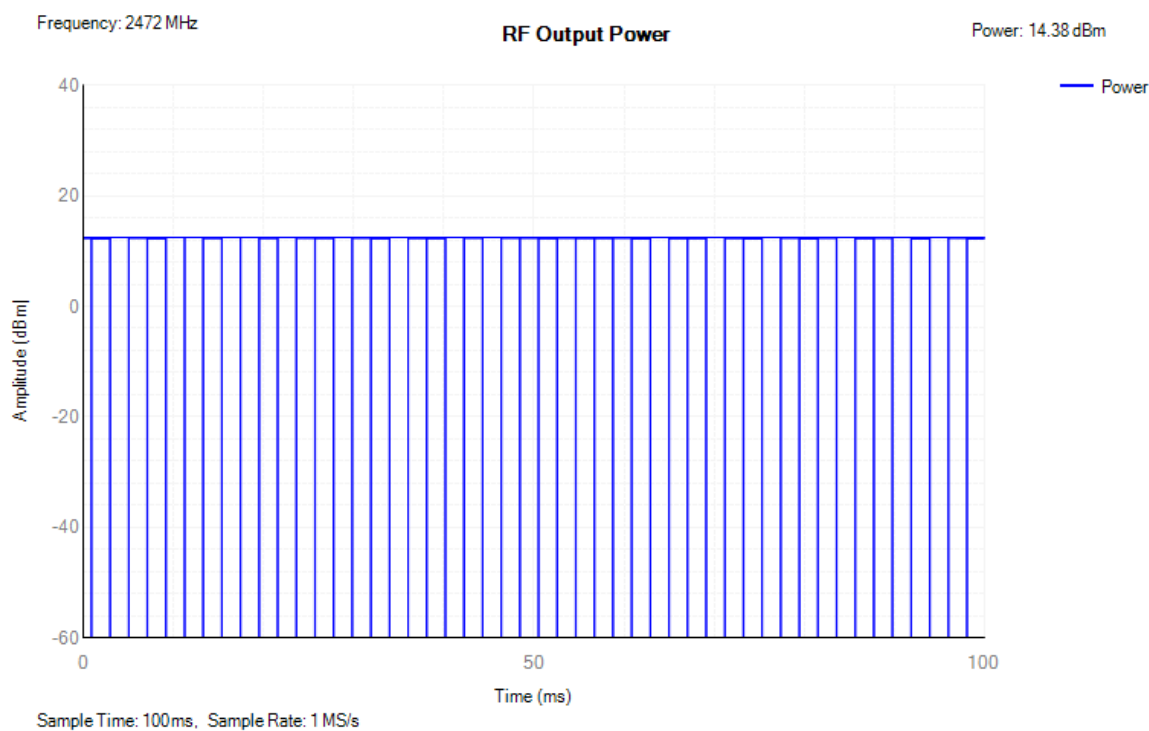

## Power NVLT g 2412MHz Ant1

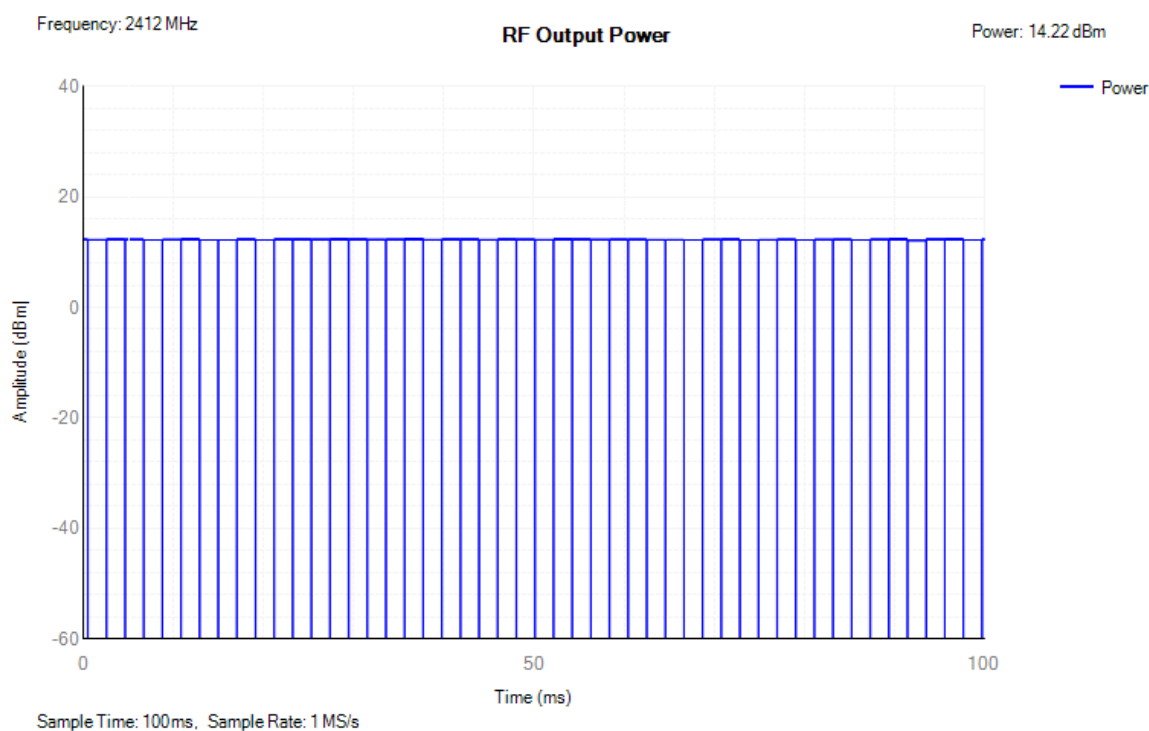


## Power NVLT g 2442MHz Ant1

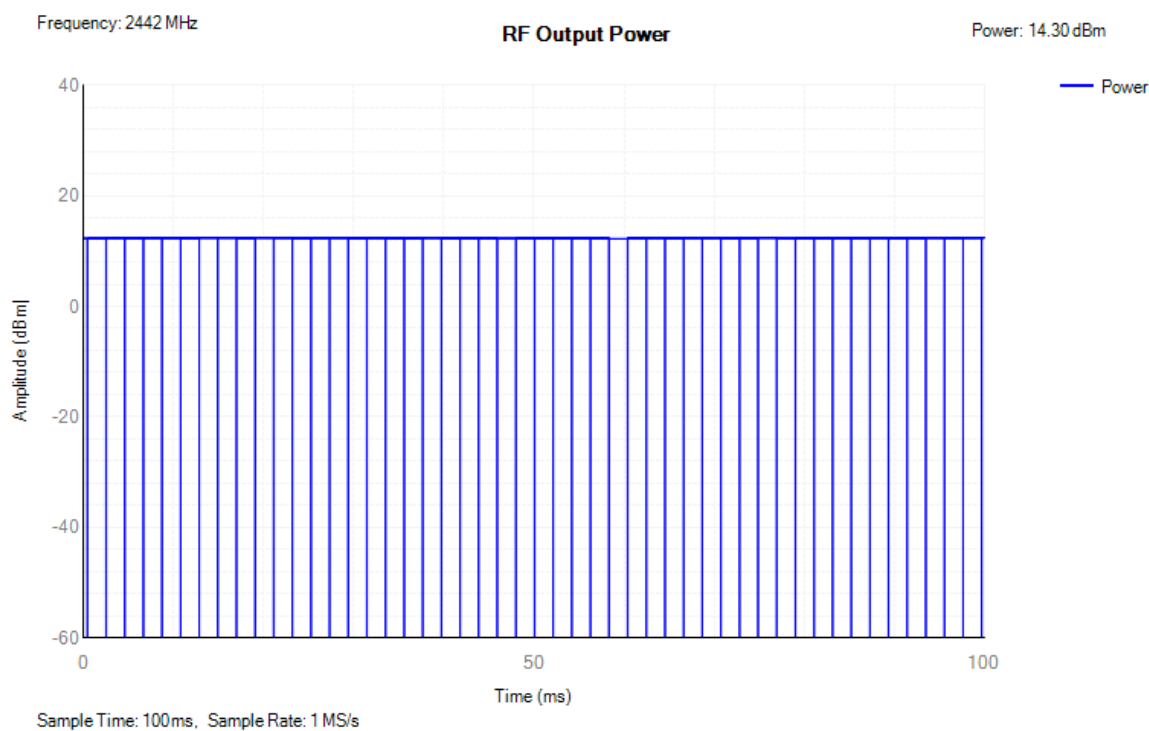





## Power NVLT g 2472MHz Ant1

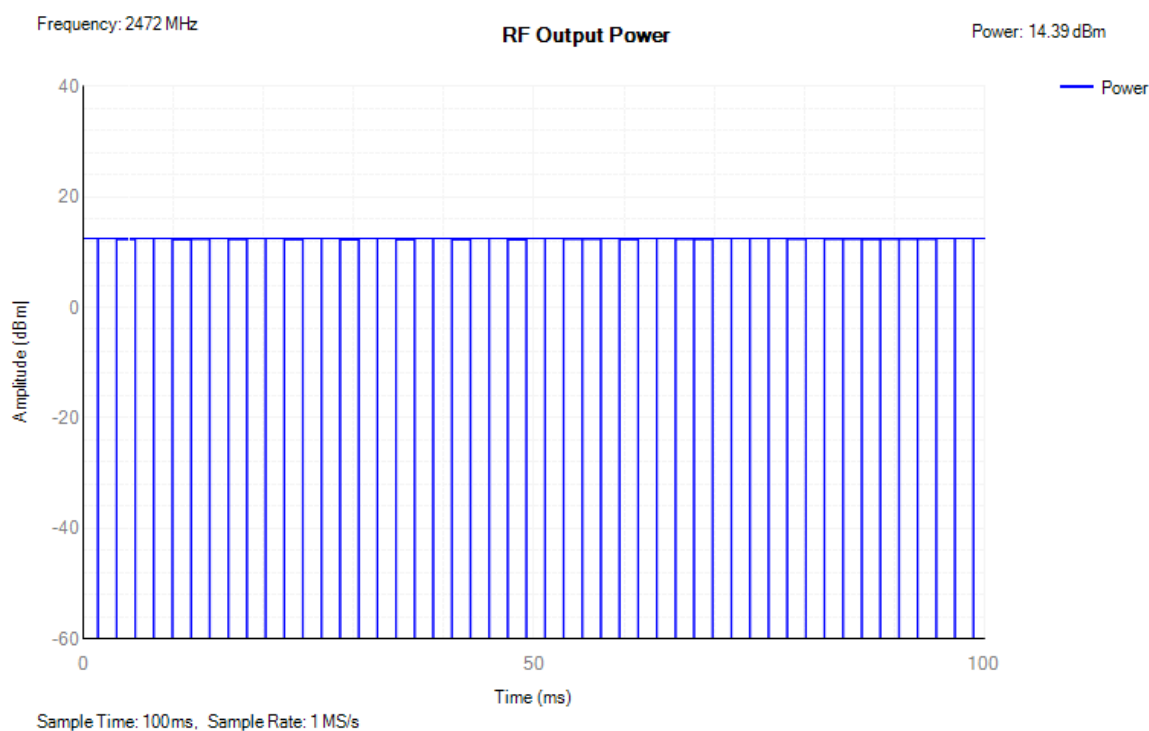


## Power NVNT g 2412MHz Ant1

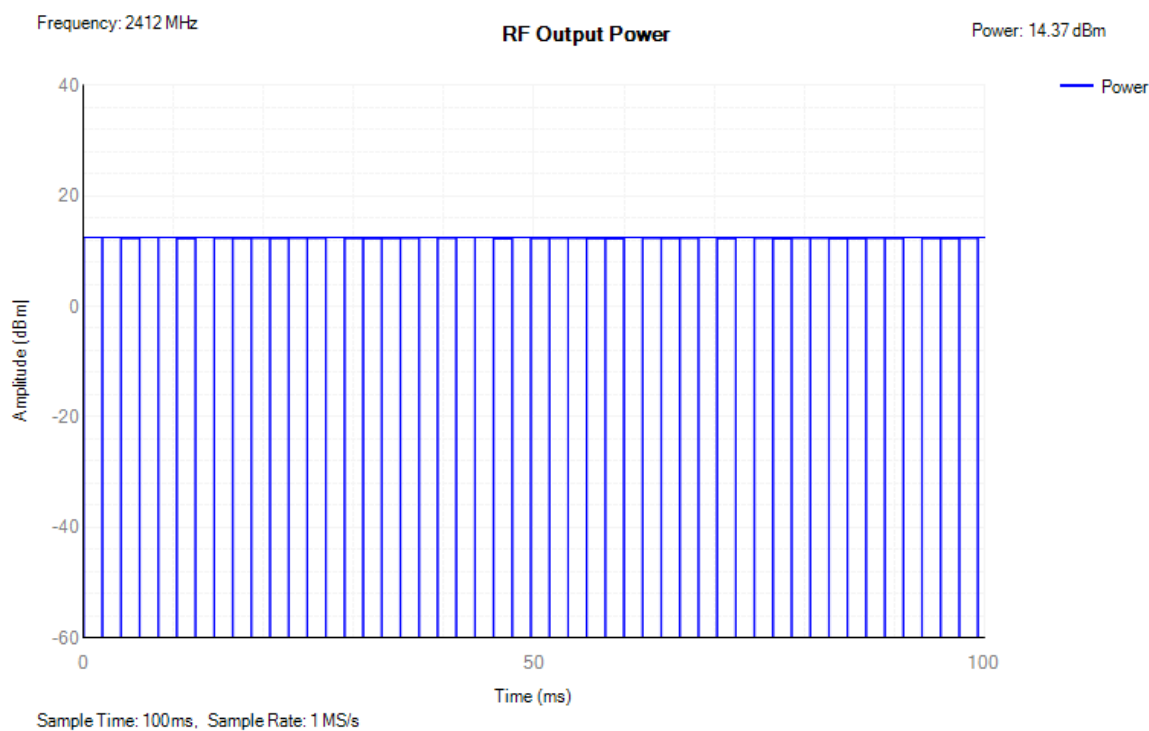


## Pow er NVNT g 2442MHz Ant1

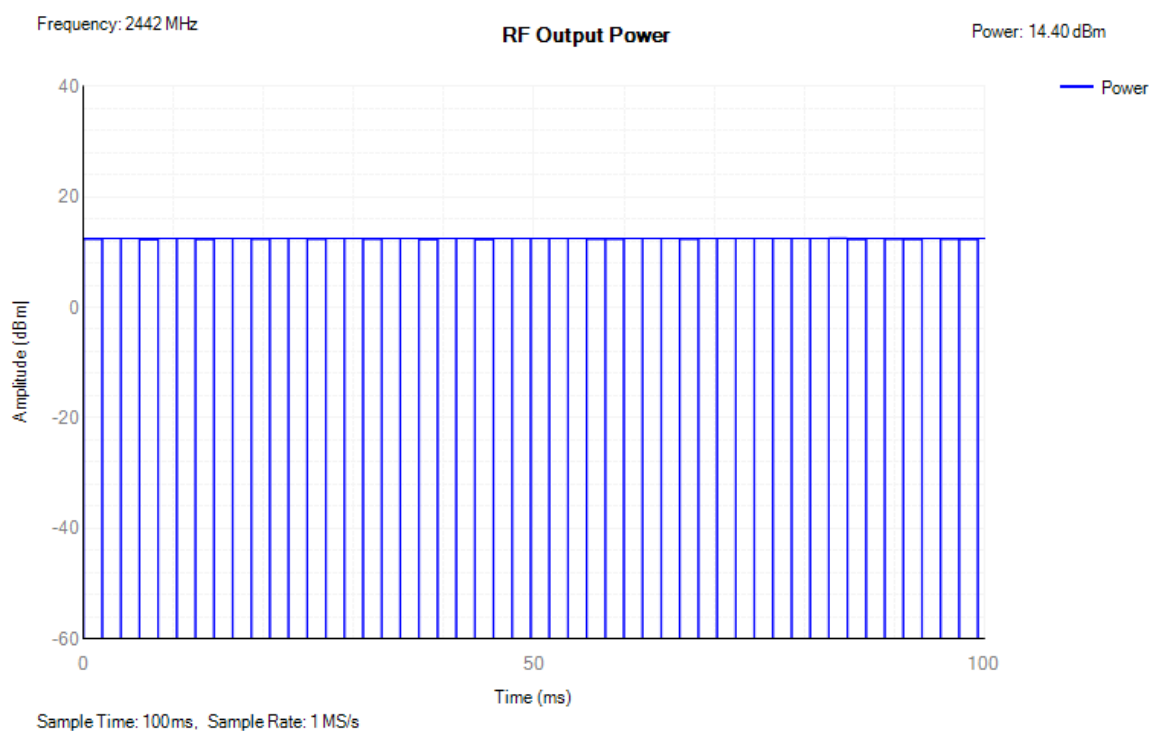


## Pow er NVNT g 2472MHz Ant1

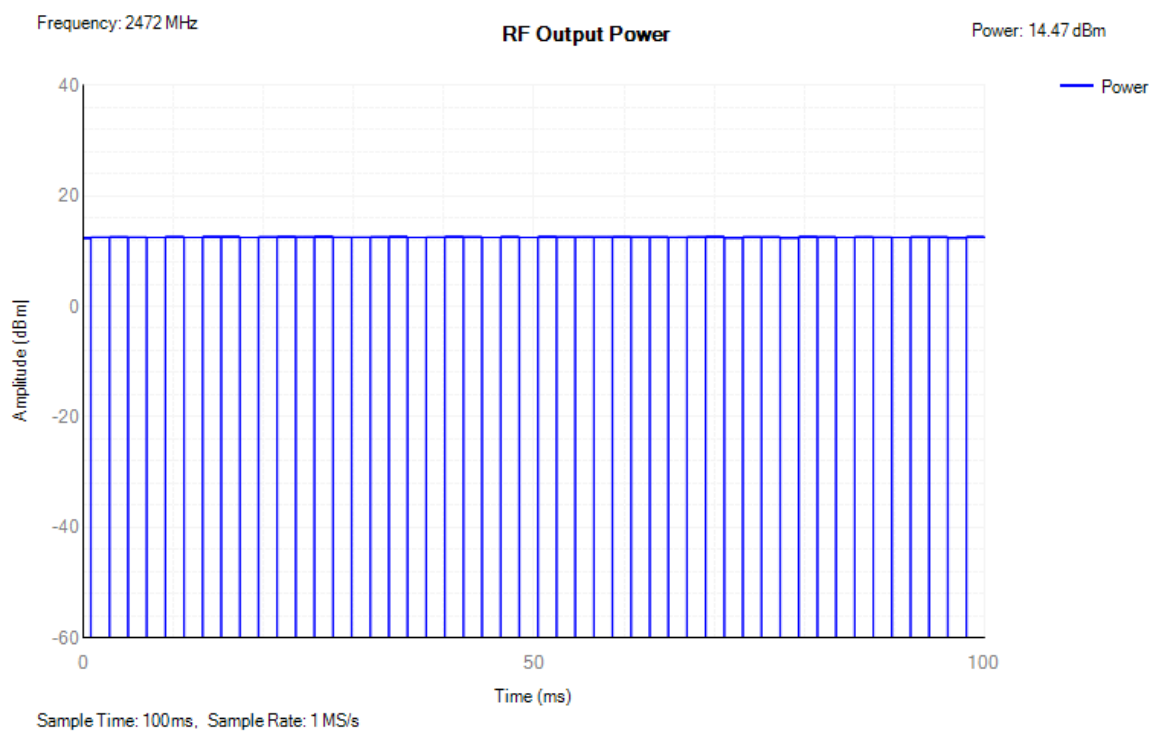


Power NVHT n20 2412MHz Ant1

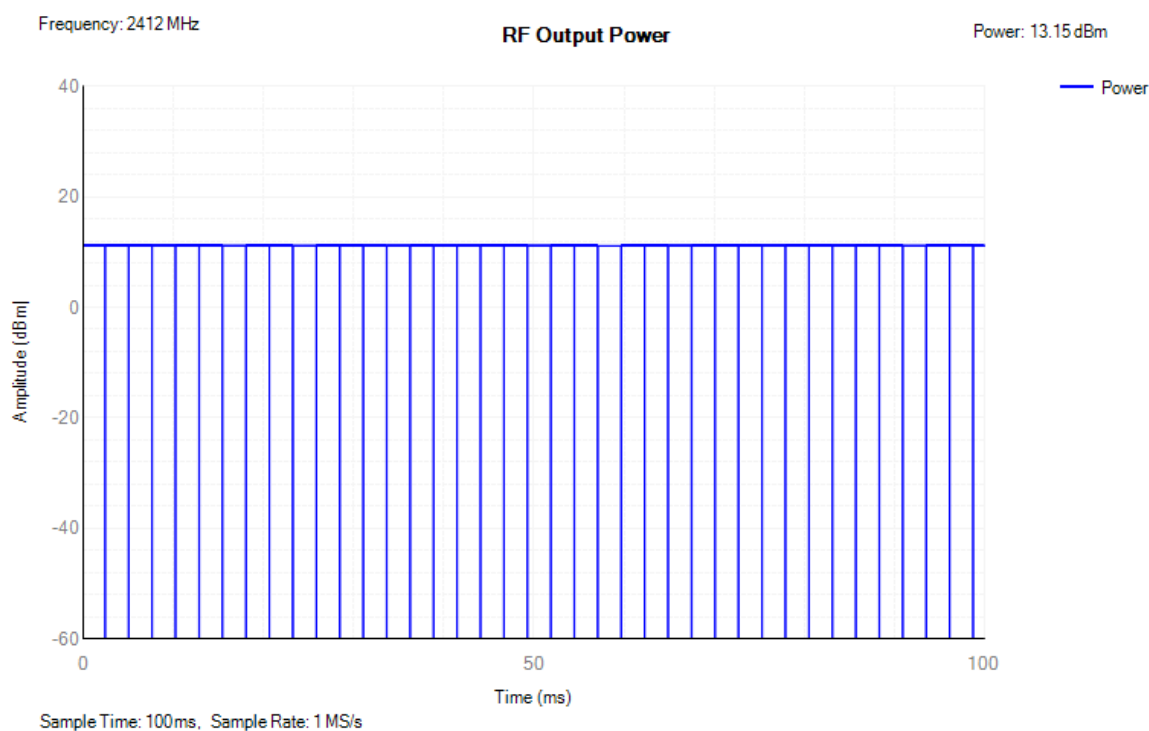


Power NVHT n20 2442MHz Ant1

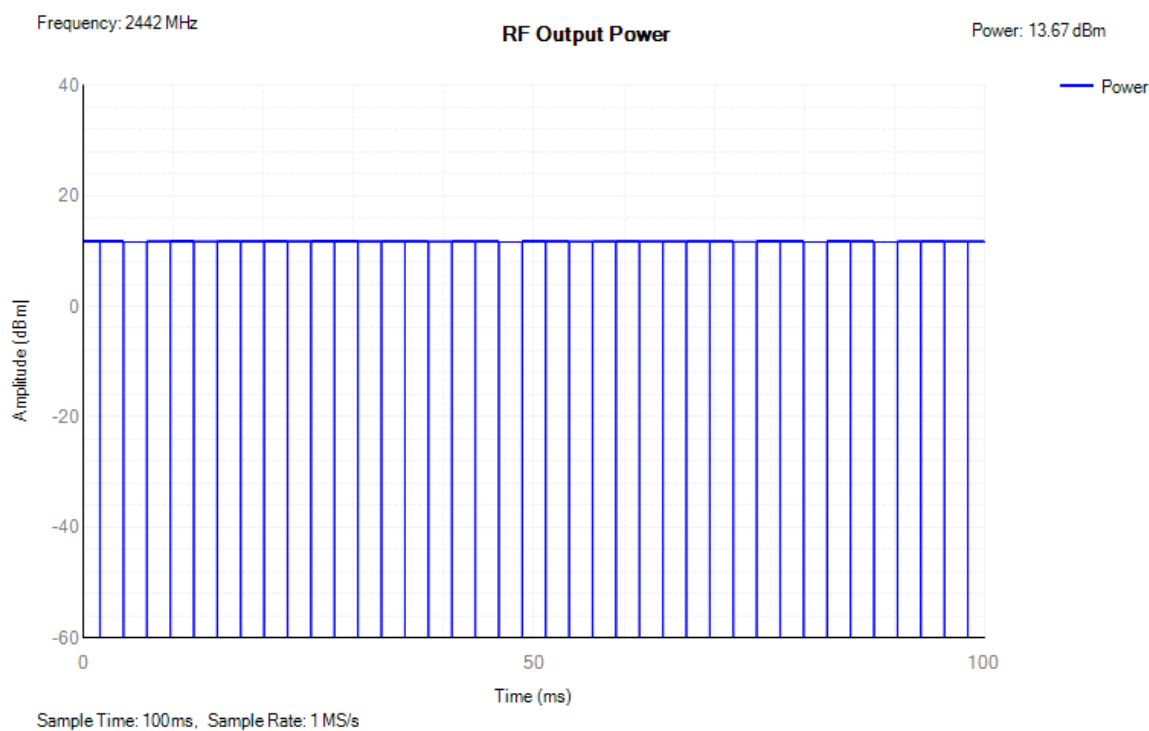


Power NVHT n20 2472MHz Ant1

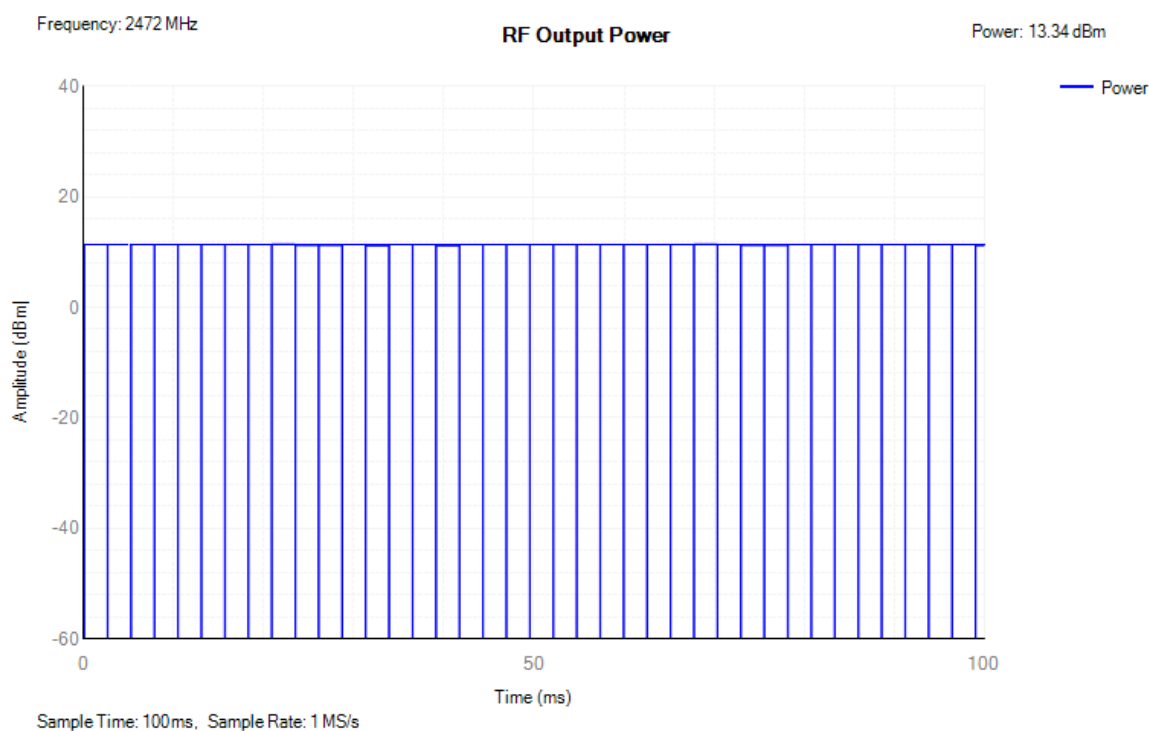


Power NVLT n20 2412MHz Ant1

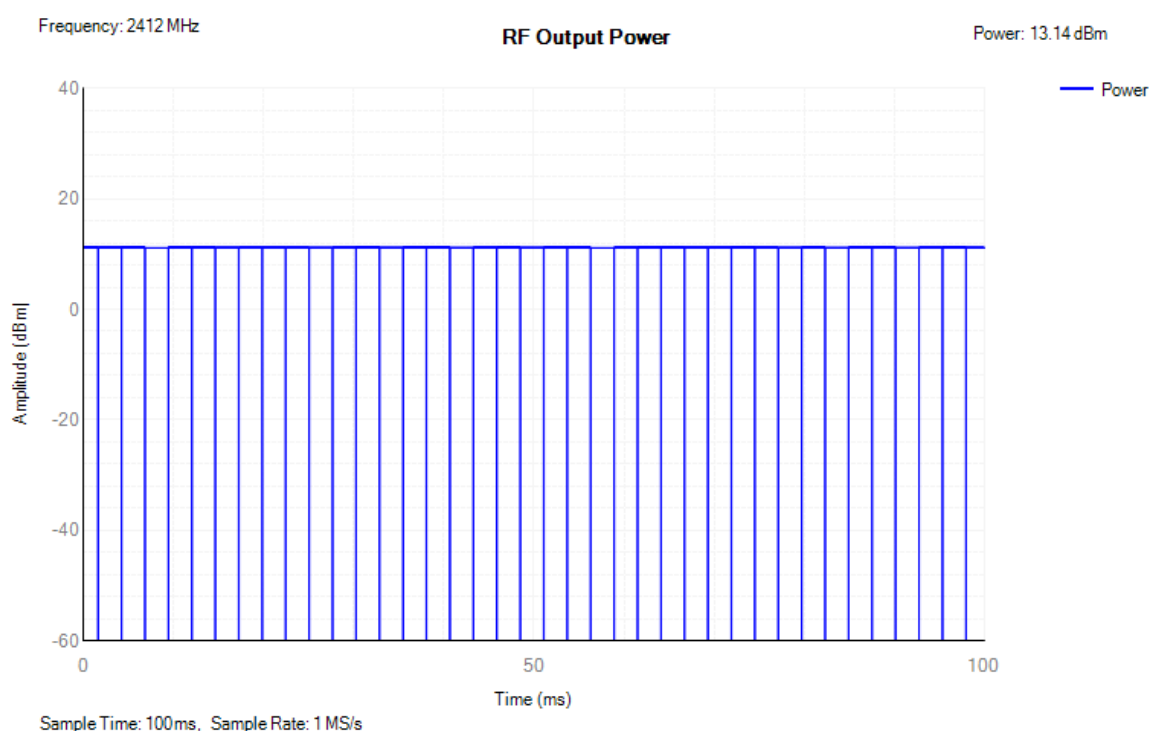


Power NVLT n20 2442MHz Ant1

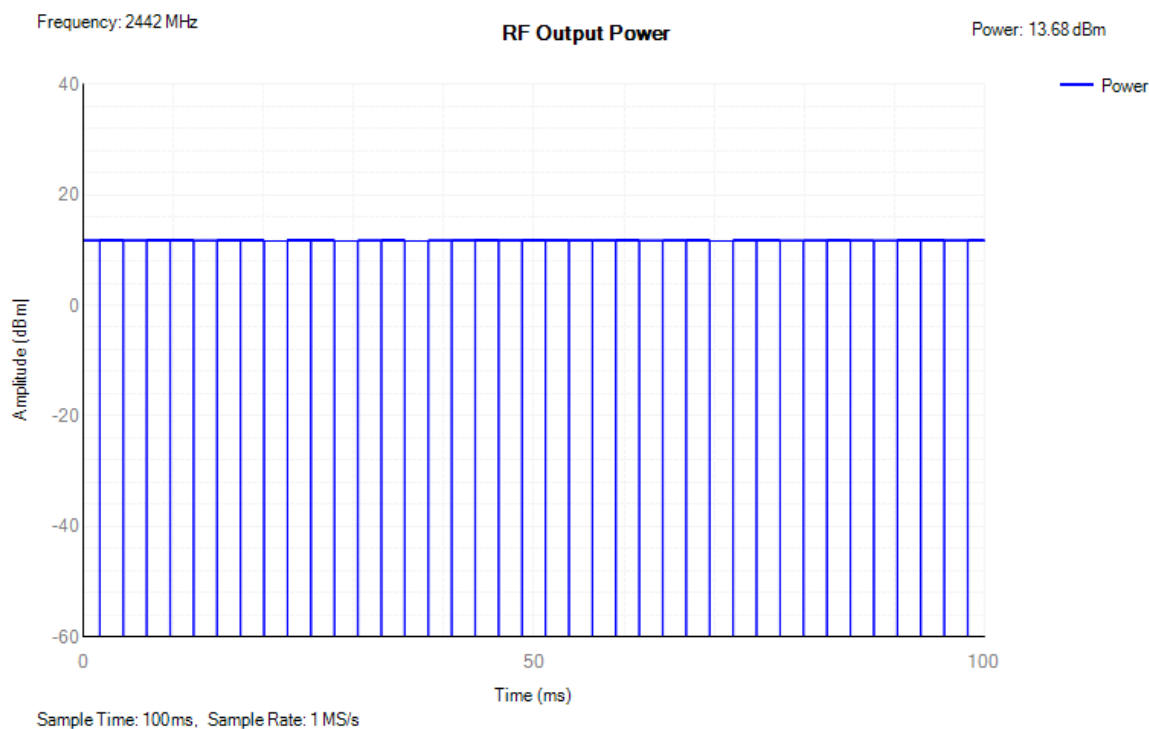


Power NVLT n20 2472MHz Ant1

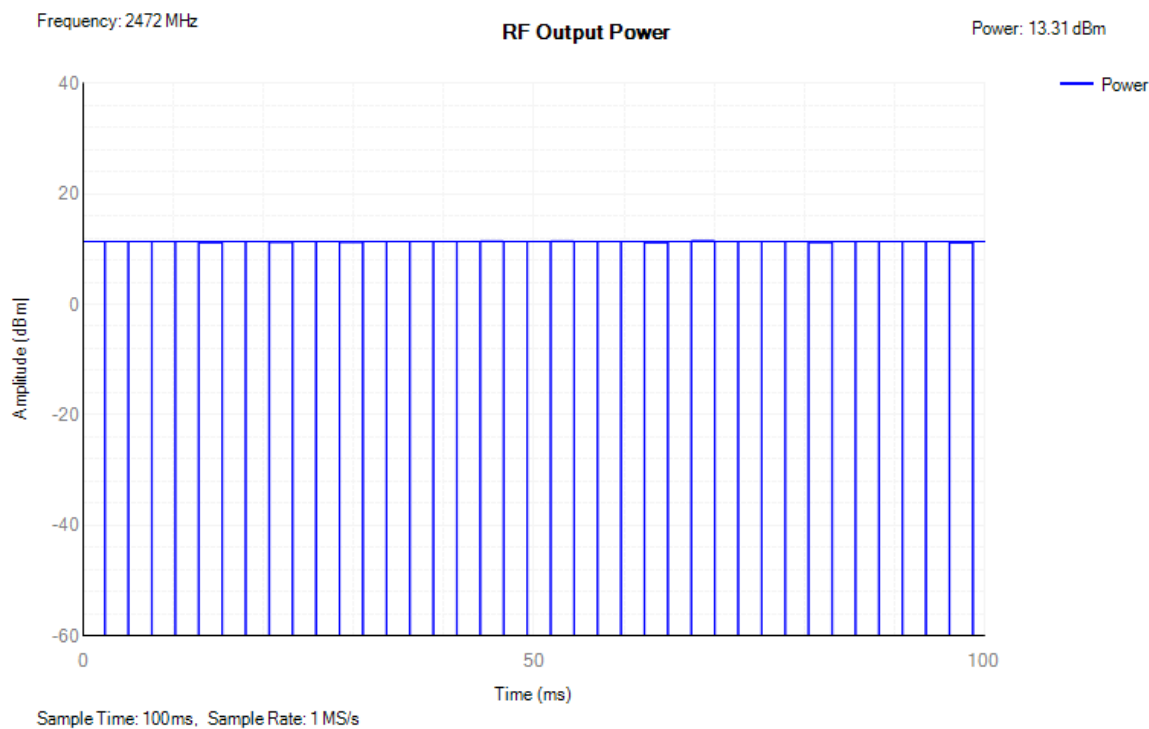


Power NVNT n20 2412MHz Ant1

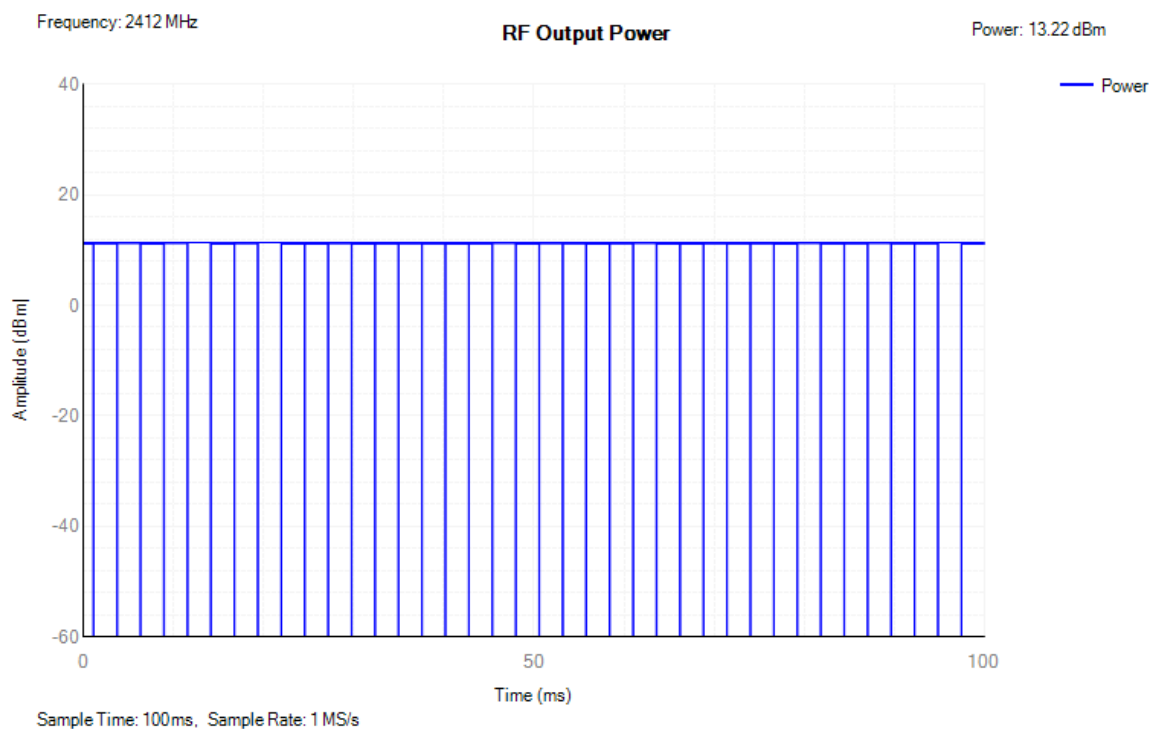


Power NVNT n20 2442MHz Ant1

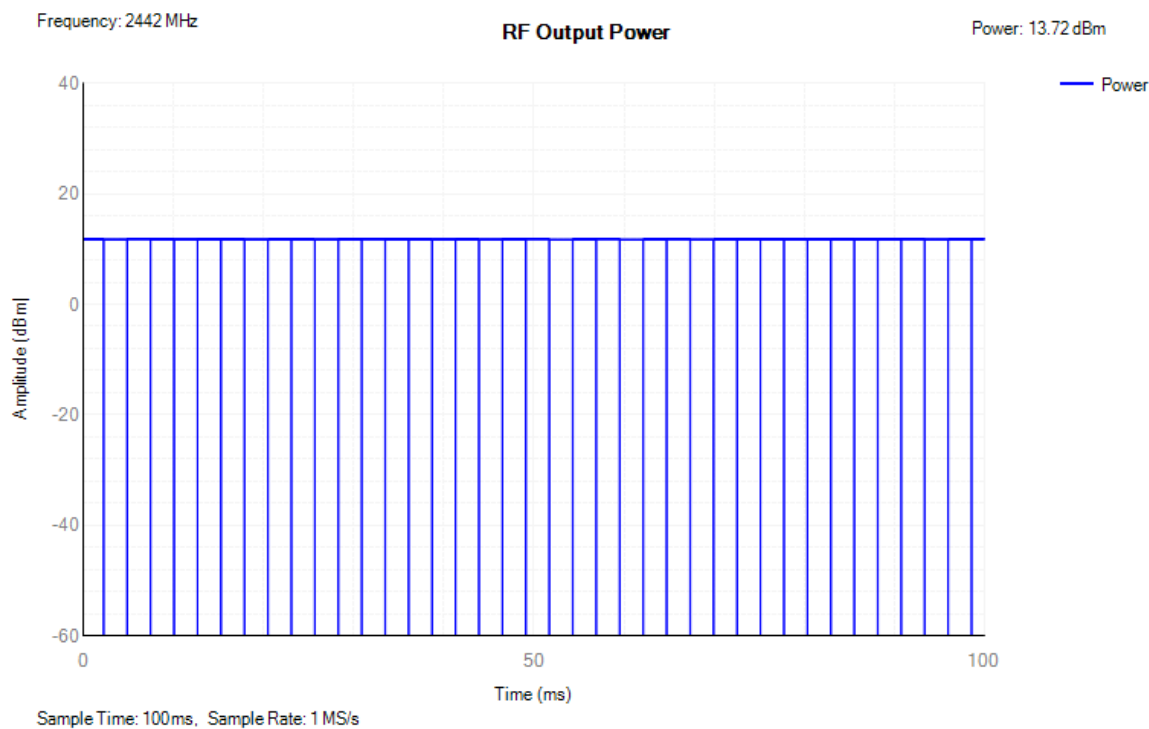


Power NVNT n20 2472MHz Ant1

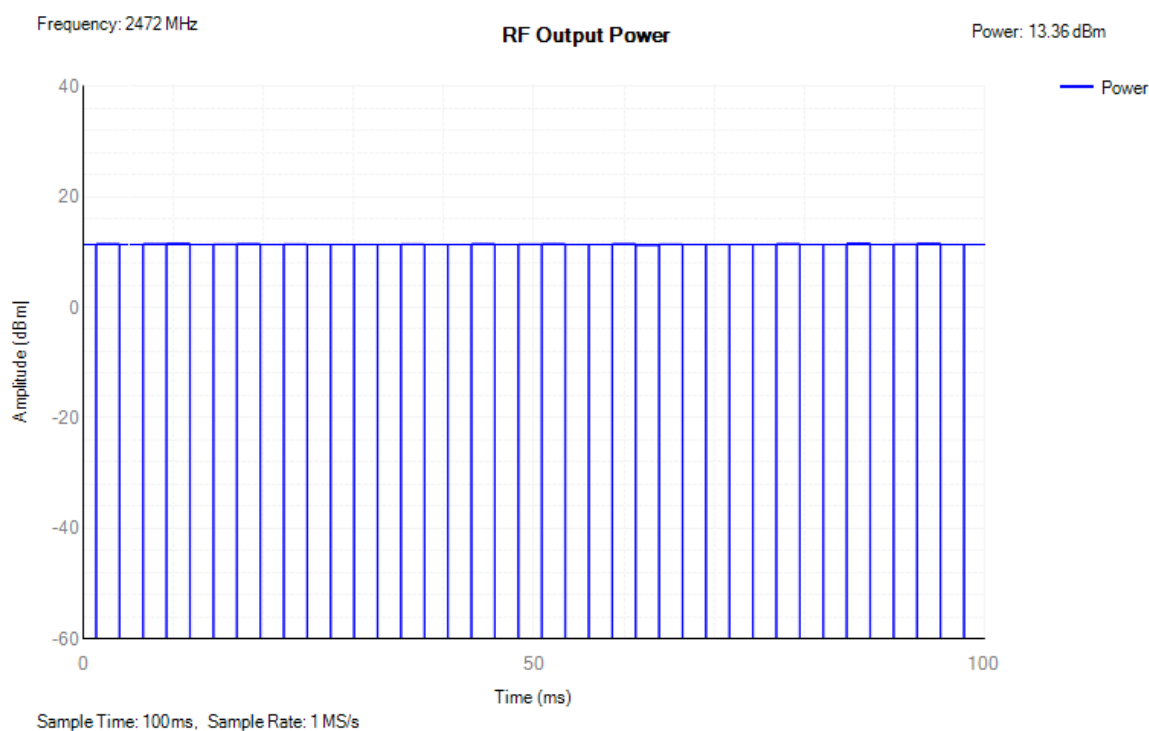


Power NVHT n40 2422MHz Ant1

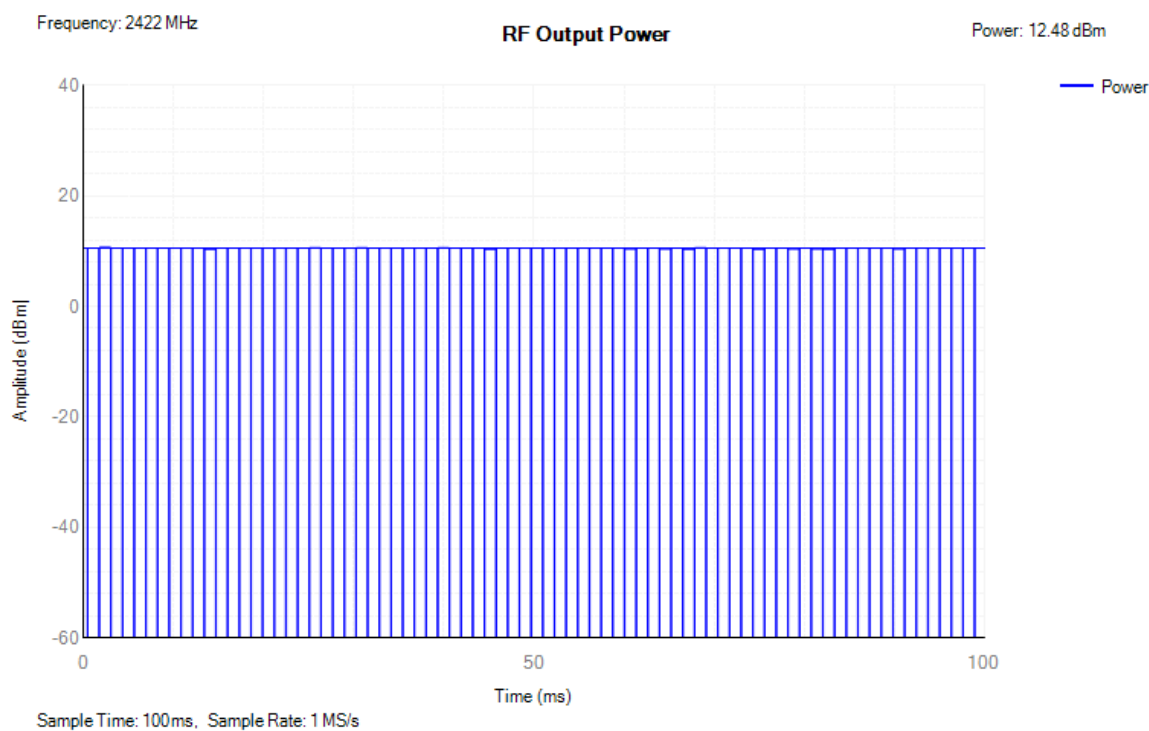

Power NVHT n40 2442MHz Ant1

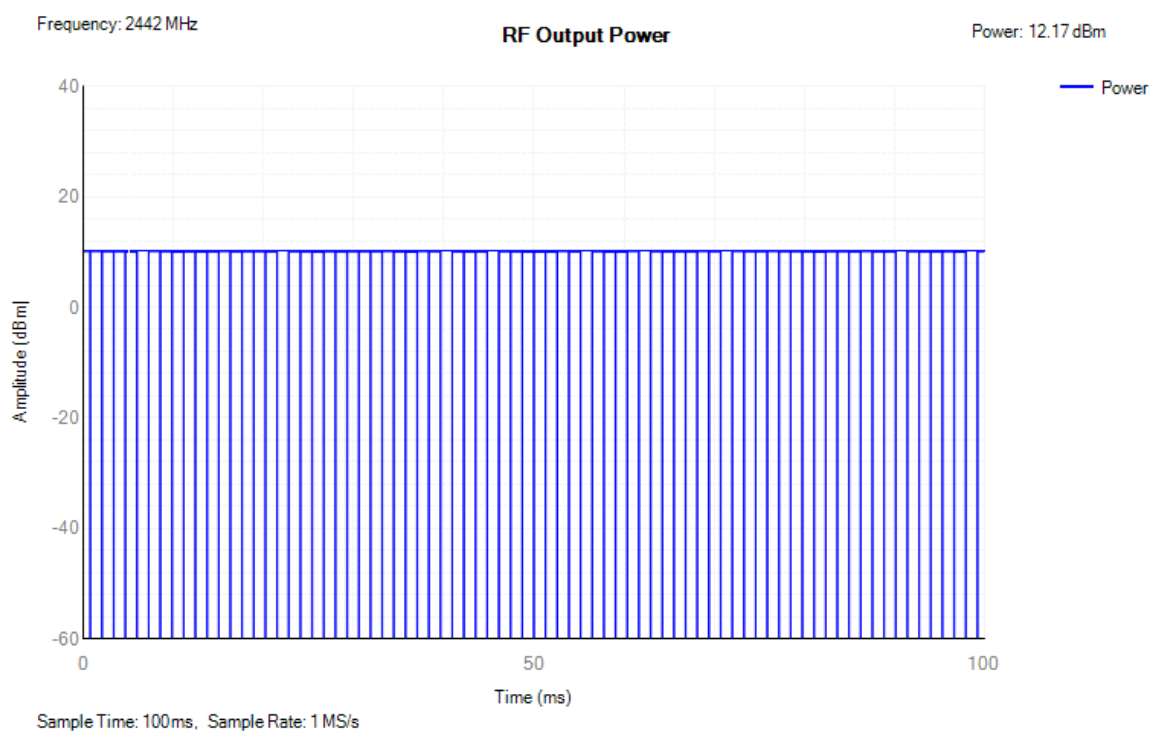


Power NVHT n40 2483MHz Ant1

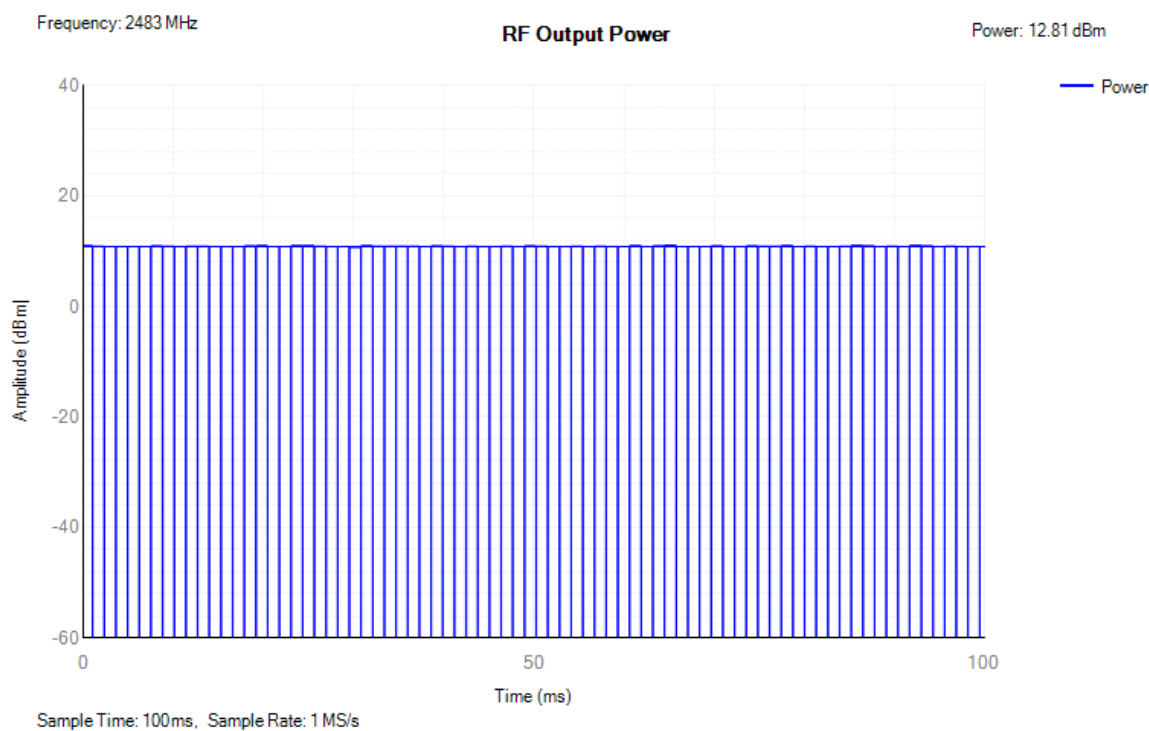





Power NVLT n40 2422MHz Ant1

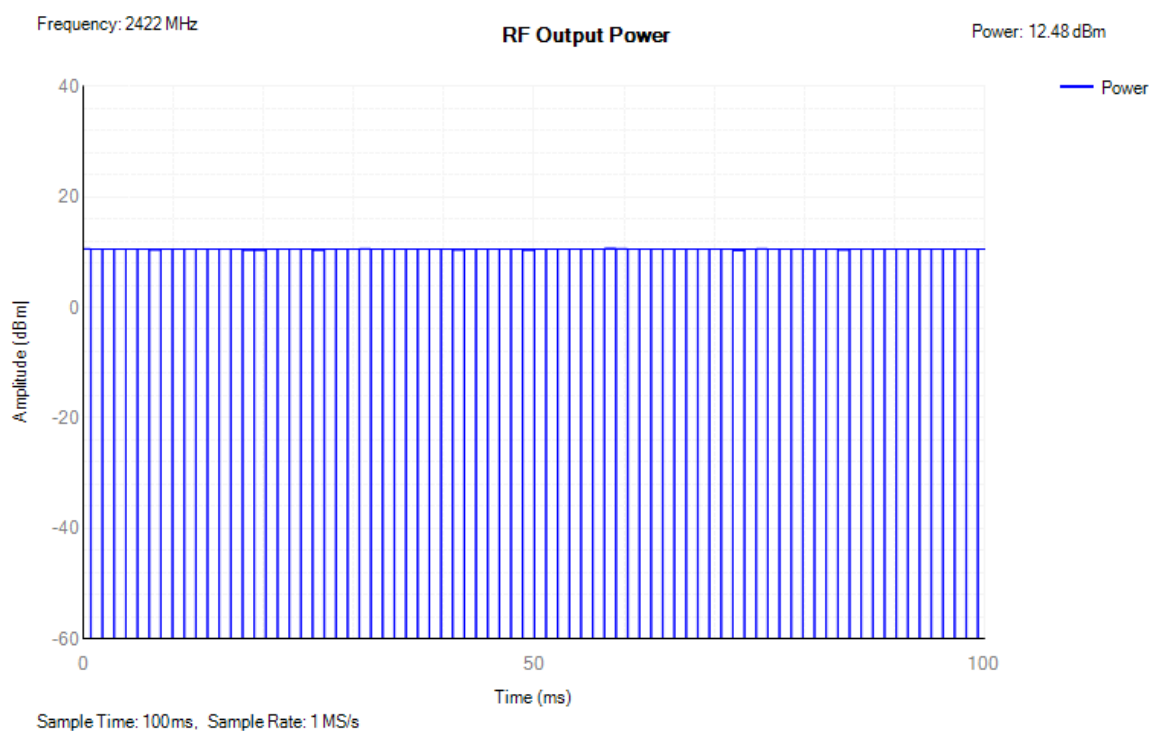


Power NVLT n40 2442MHz Ant1

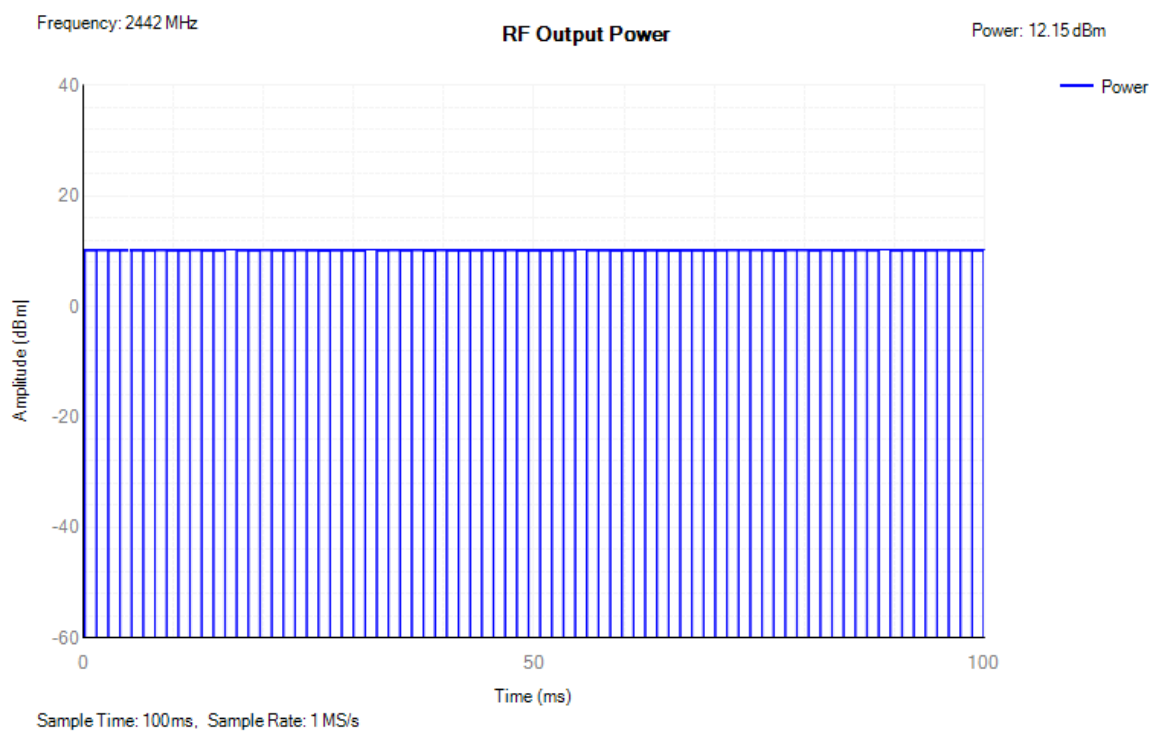


Power NVLT n40 2495MHz Ant1

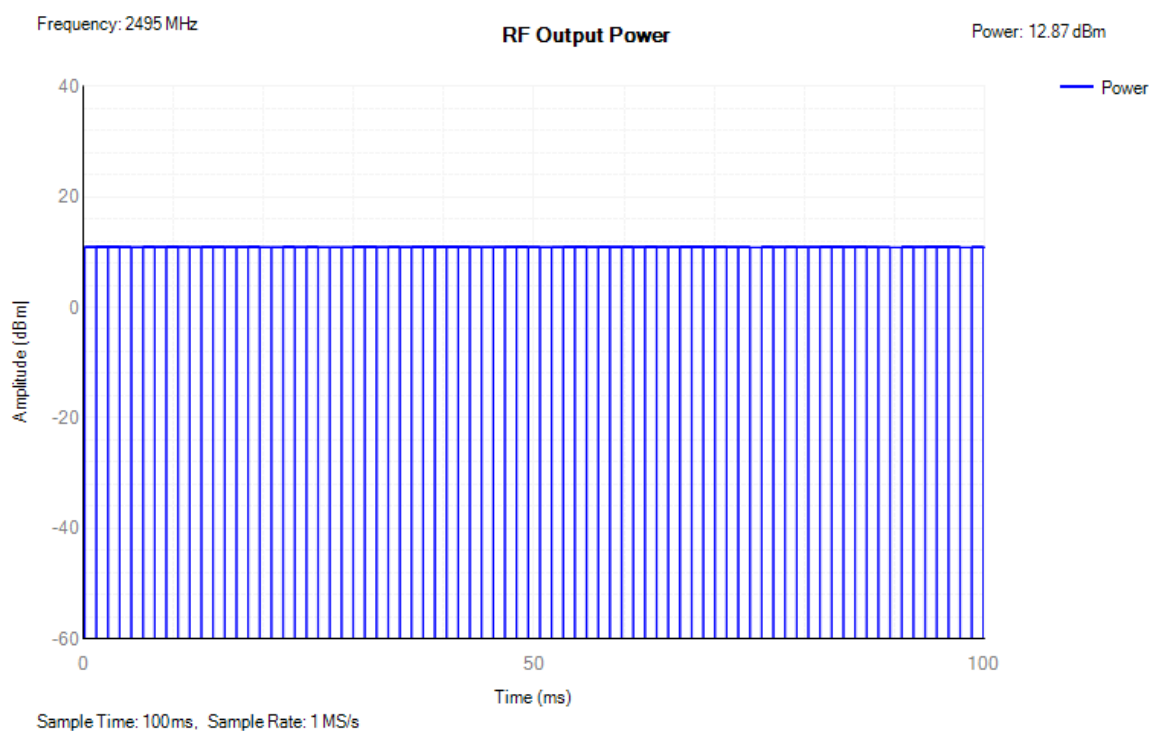


Power NVNT n40 2422MHz Ant1

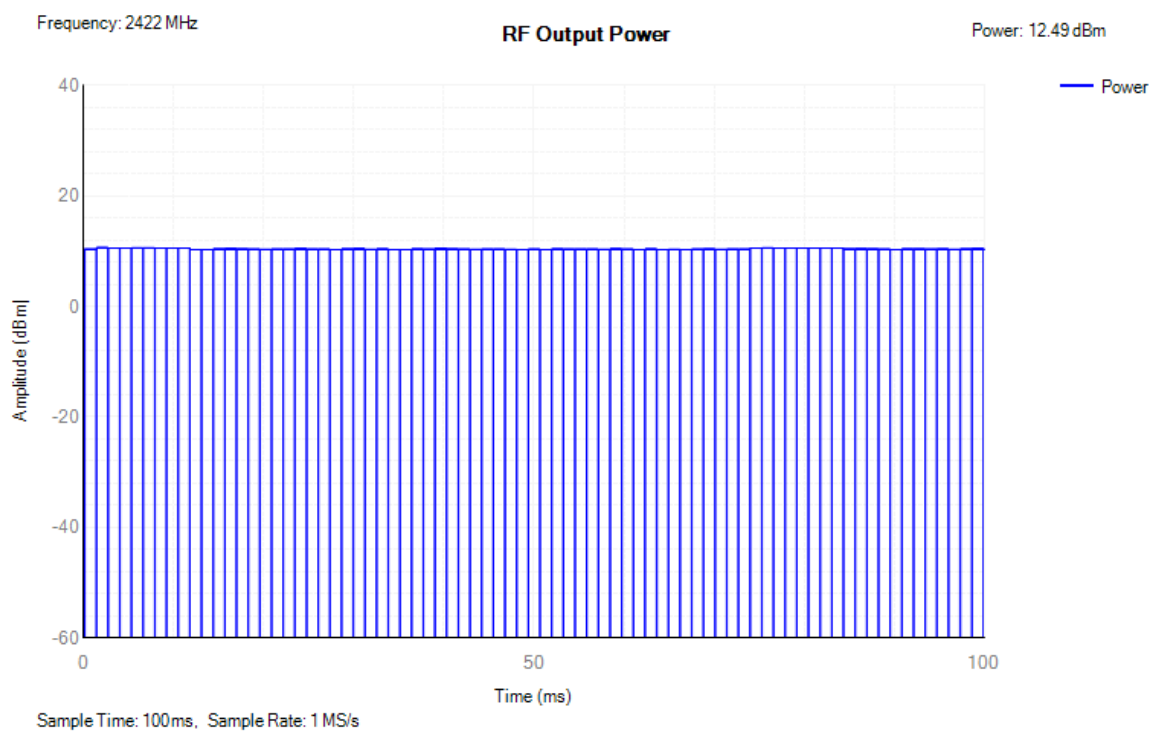

Power NVNT n40 2442MHz Ant1

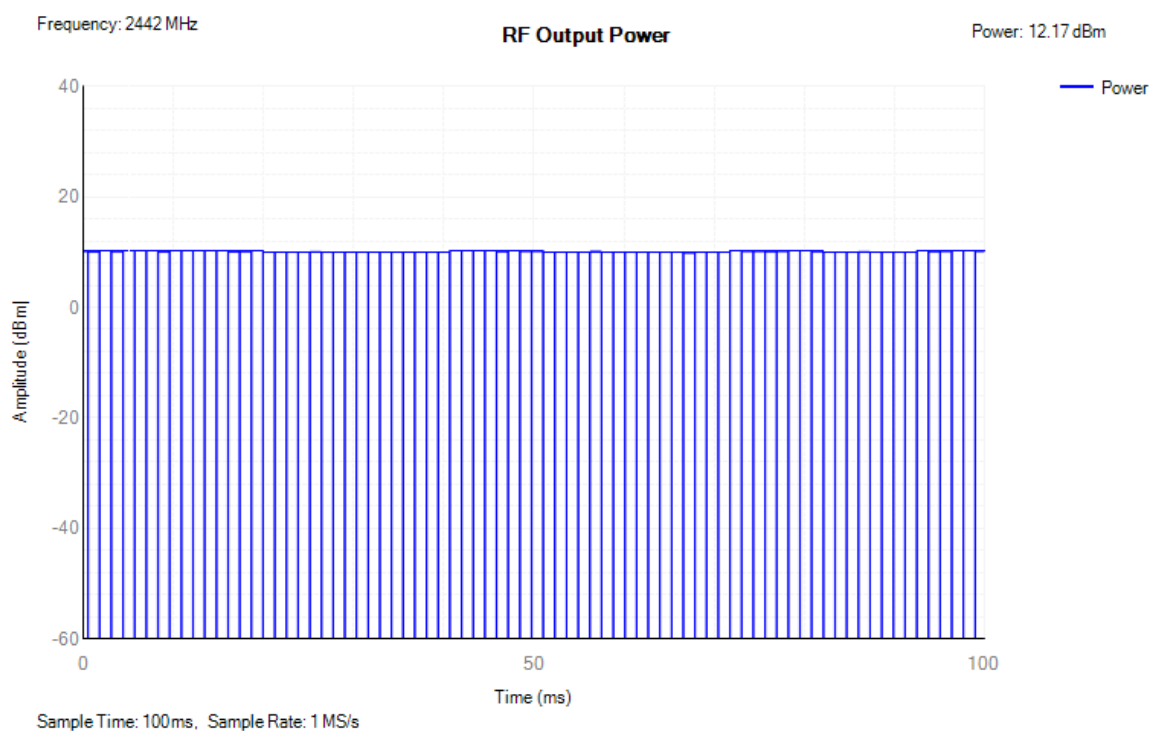


Power NVNT n40 2462MHz Ant1

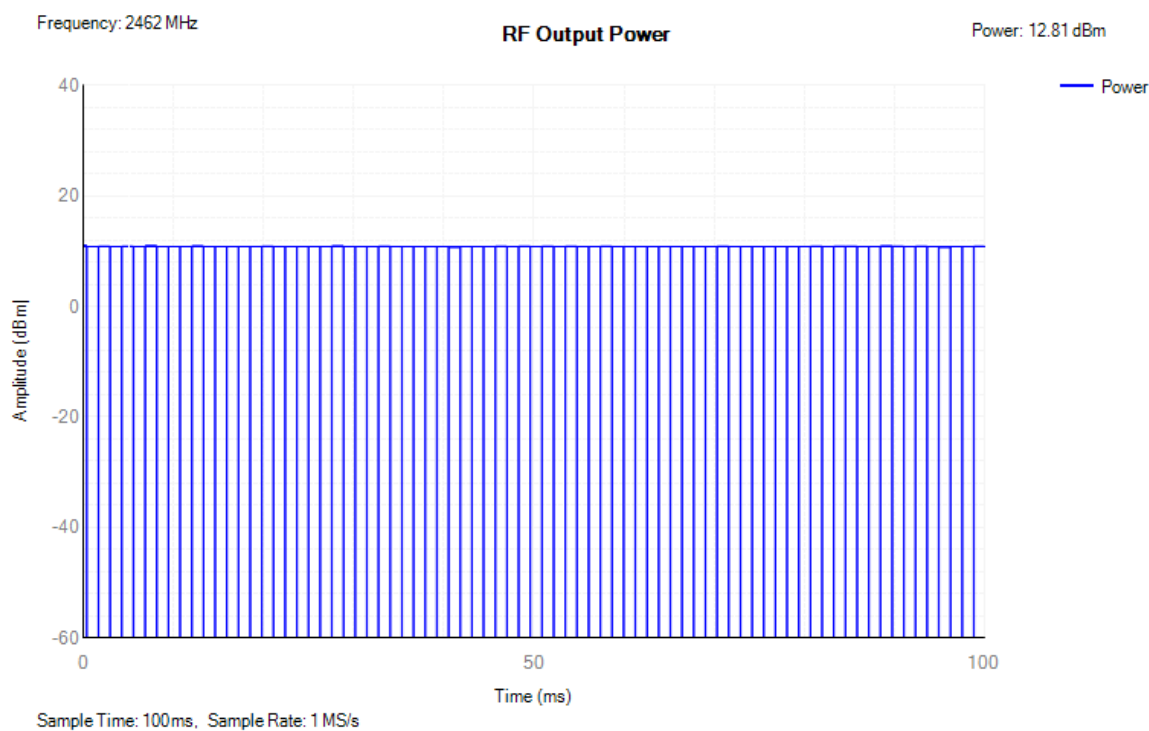


## 5.4.3 Power Spectral Density

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	7.19	10	Pass
NVNT	b	2442	Ant1	7.46	10	Pass
NVNT	b	2472	Ant1	7.38	10	Pass
NVNT	g	2412	Ant1	3.67	10	Pass
NVNT	g	2442	Ant1	3.8	10	Pass
NVNT	g	2472	Ant1	3.87	10	Pass
NVNT	n20	2412	Ant1	2.31	10	Pass
NVNT	n20	2442	Ant1	2.84	10	Pass
NVNT	n20	2472	Ant1	2.51	10	Pass
NVNT	n40	2422	Ant1	-1.36	10	Pass
NVNT	n40	2442	Ant1	-1.74	10	Pass
NVNT	n40	2462	Ant1	-1.18	10	Pass


PSD NVNT b 2412MHz Ant1

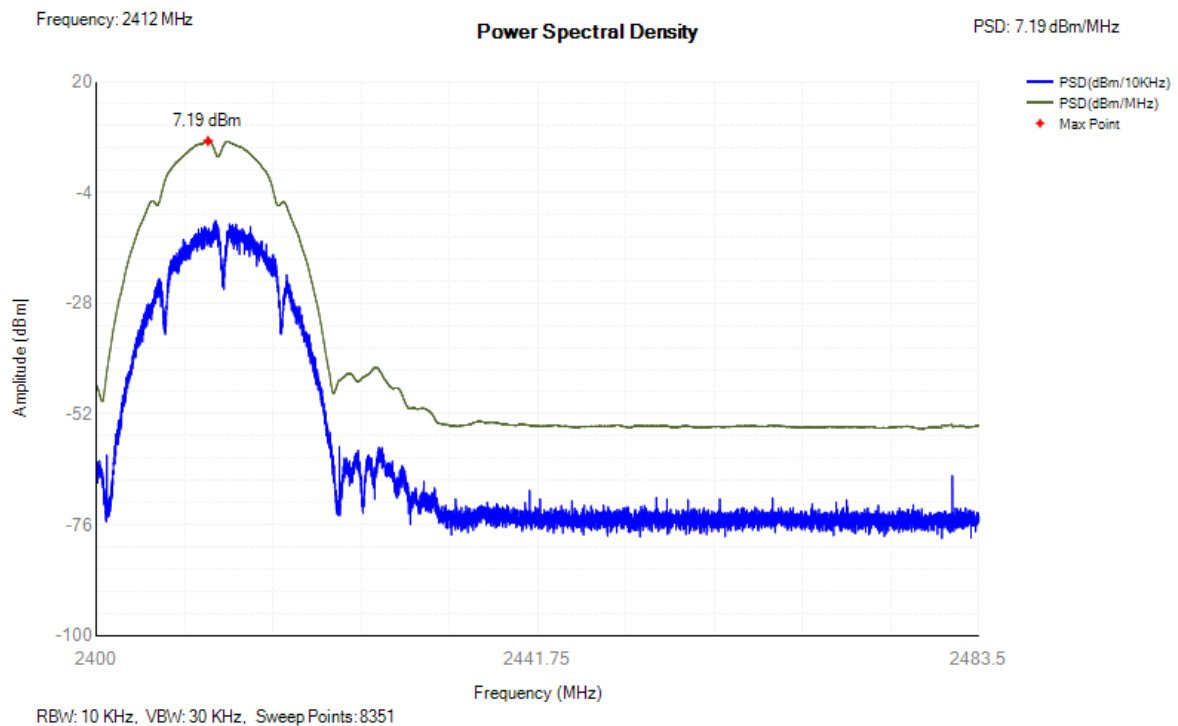


PSD NVNT b 2442MHz Ant1

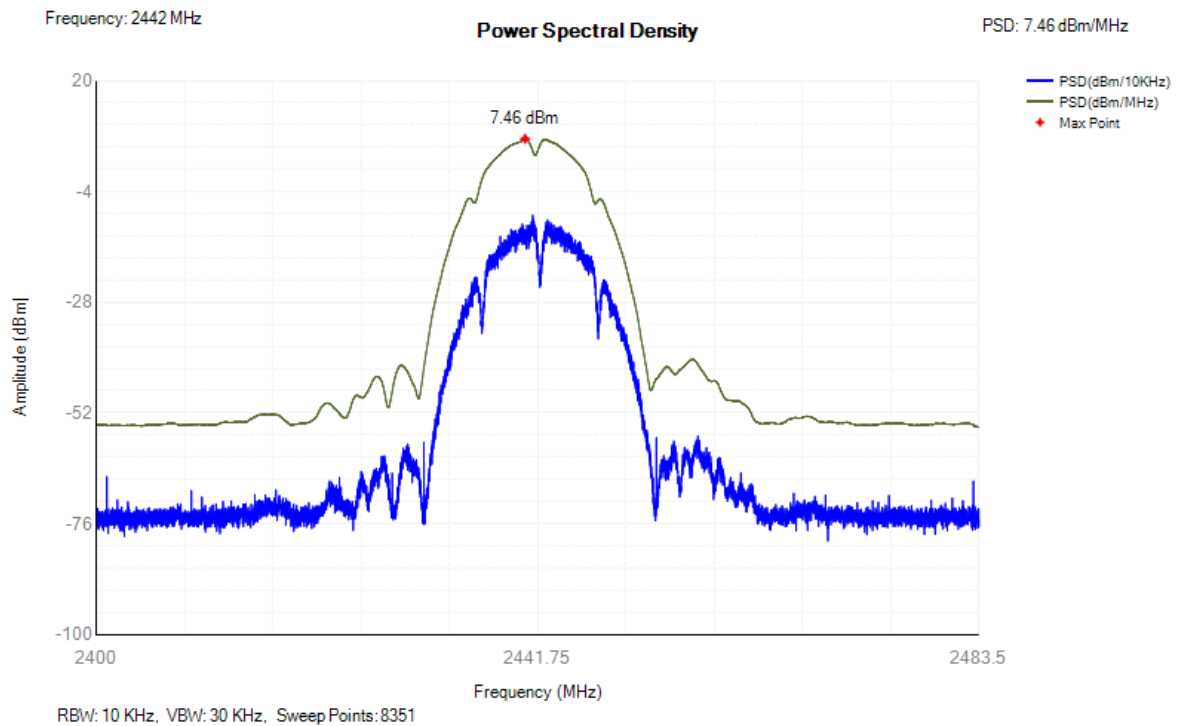


PSD NVNT b 2472MHz Ant1

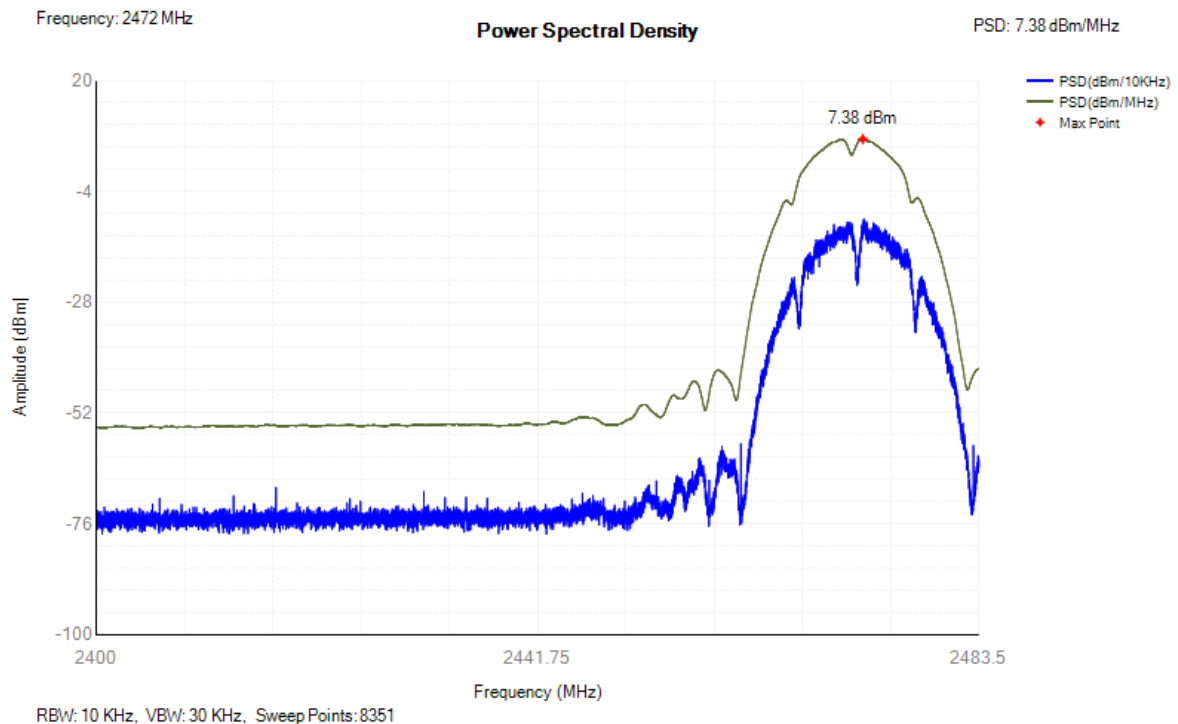


## PSD NVNT g 2412MHz Ant1

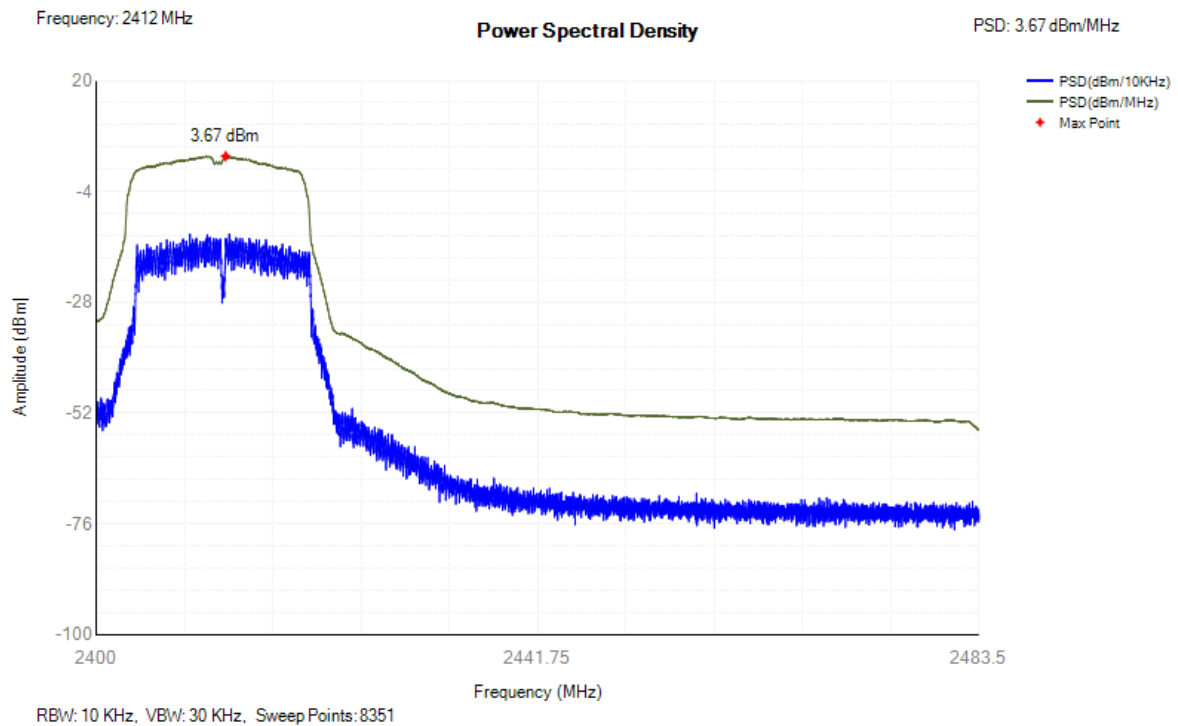


## PSD NVNT g 2442MHz Ant1

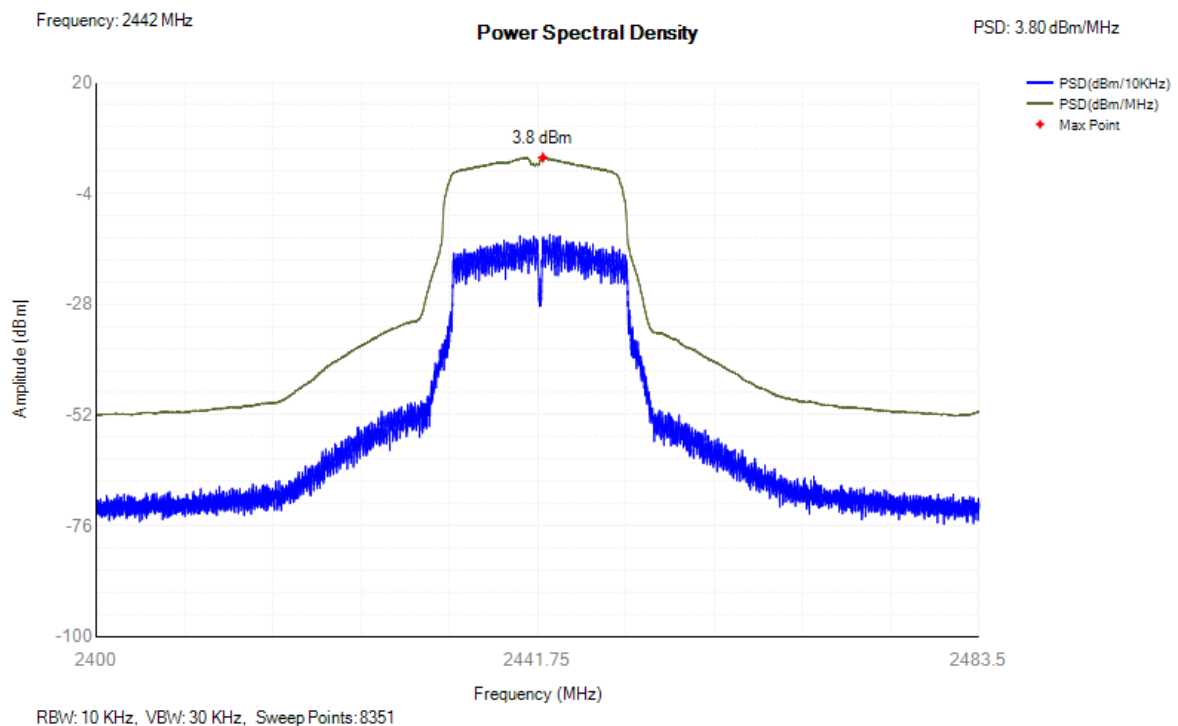


## PSD NVNT g 2472MHz Ant1

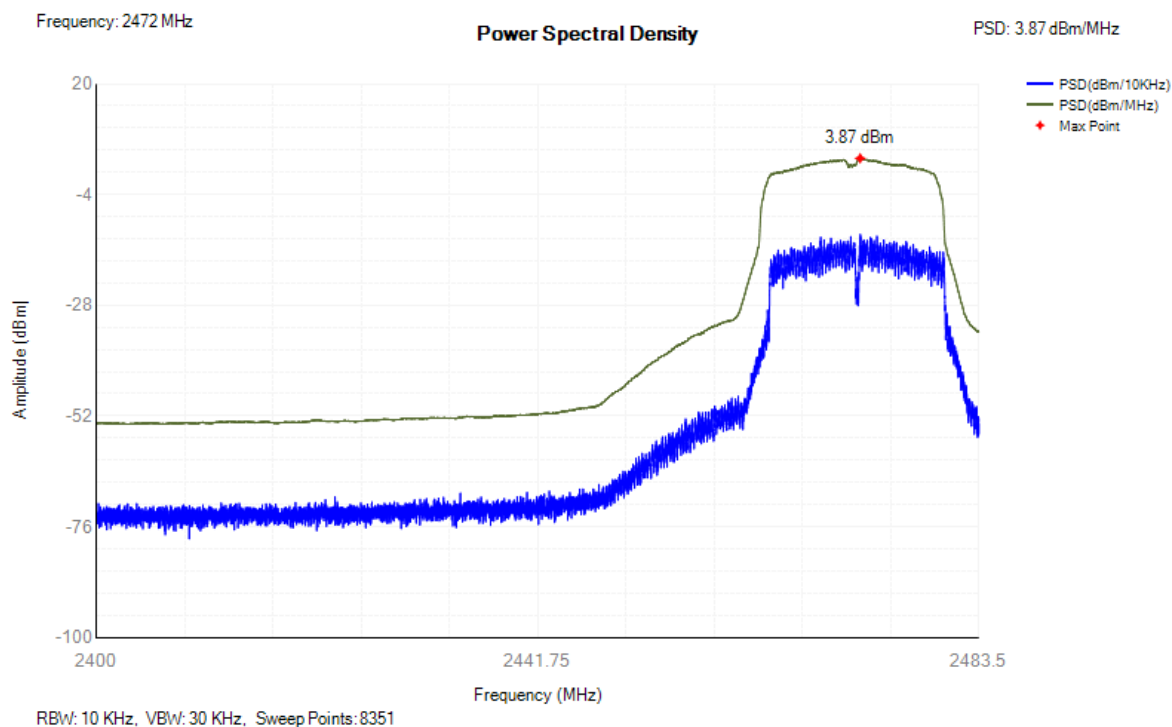


## PSD NVNT n20 2412MHz Ant1

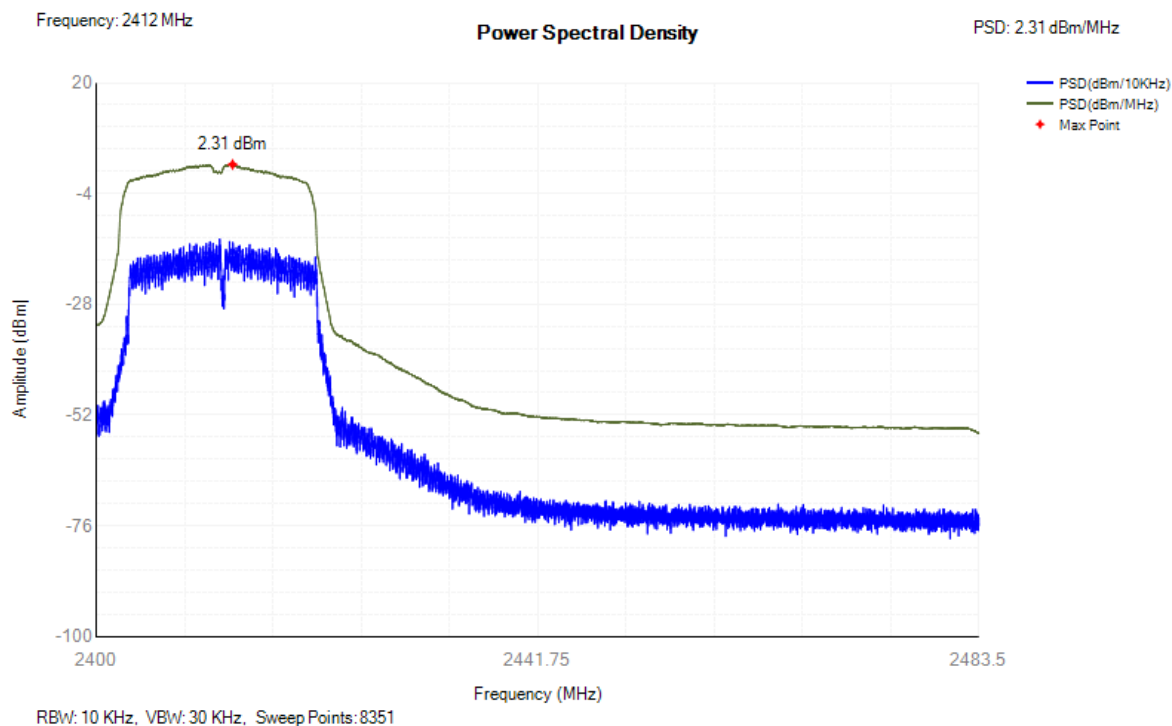

PSD NVNT n20 2442MHz Ant1

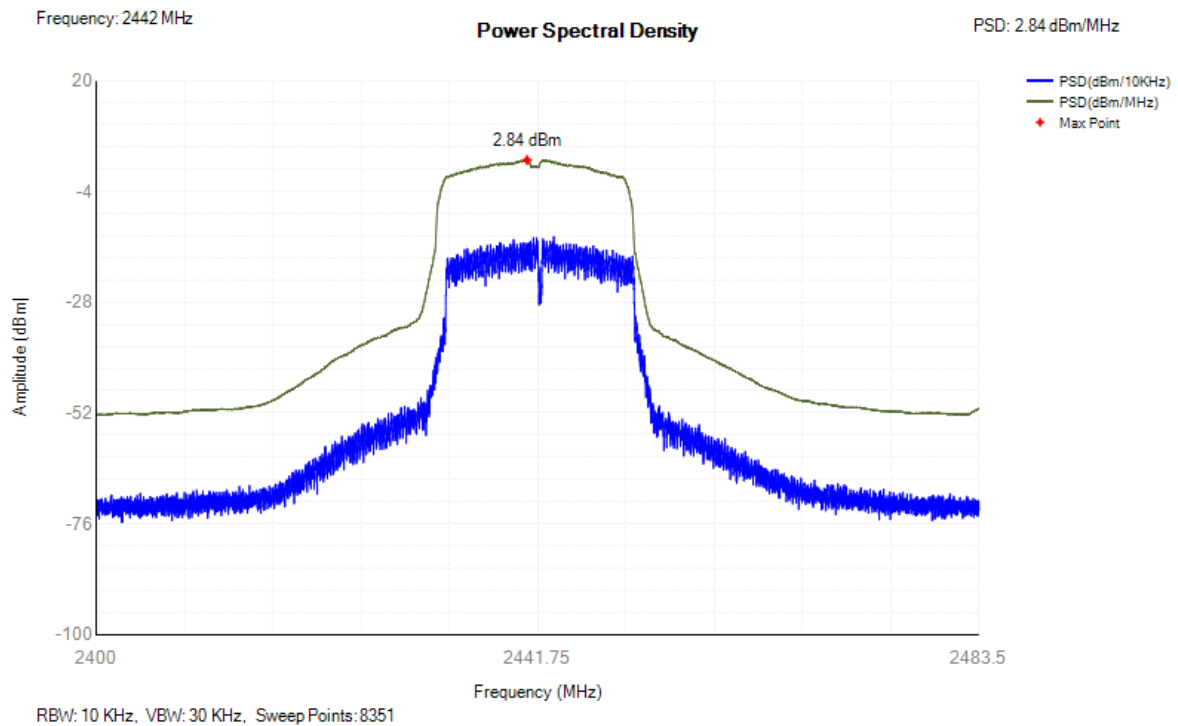


PSD NVNT n20 2472MHz Ant1

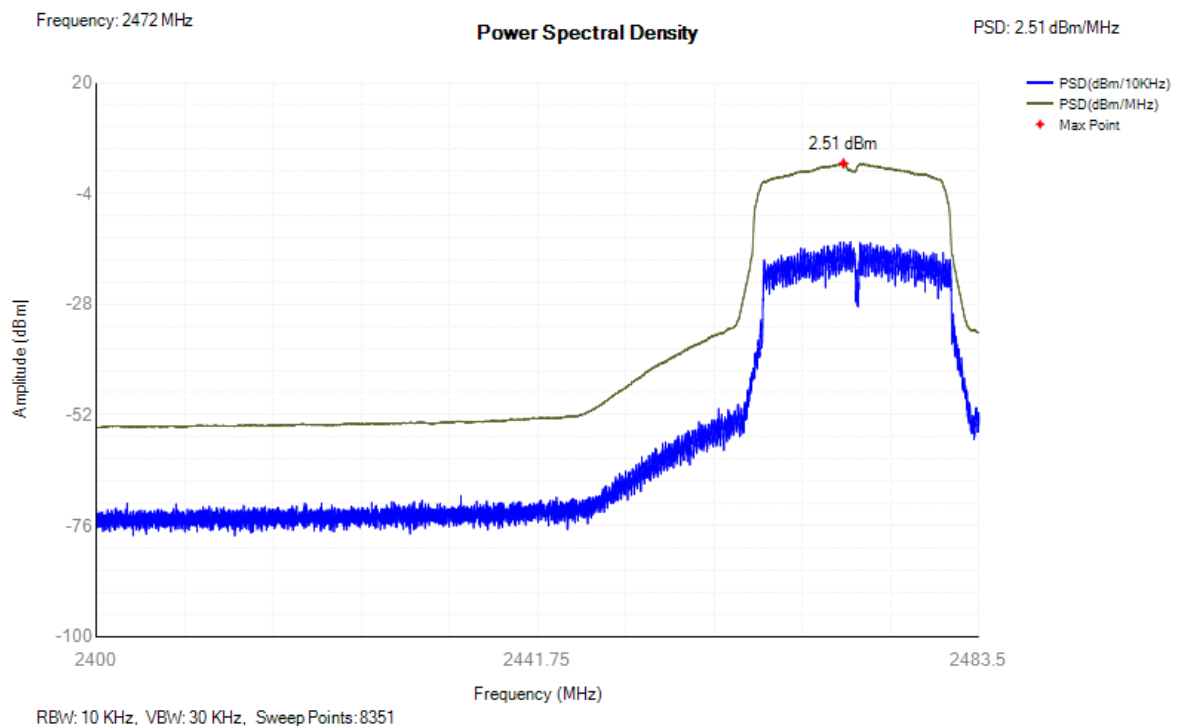





PSD NVNT n40 2422MHz Ant1

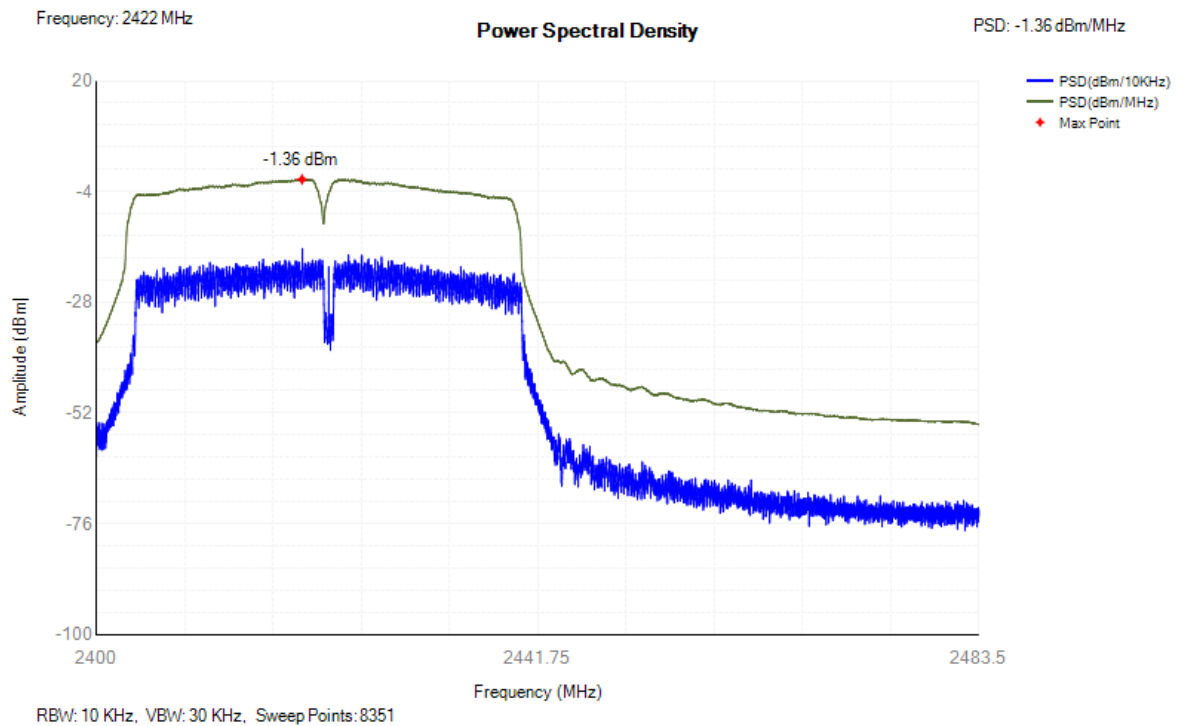

PSD NVNT n40 2442MHz Ant1

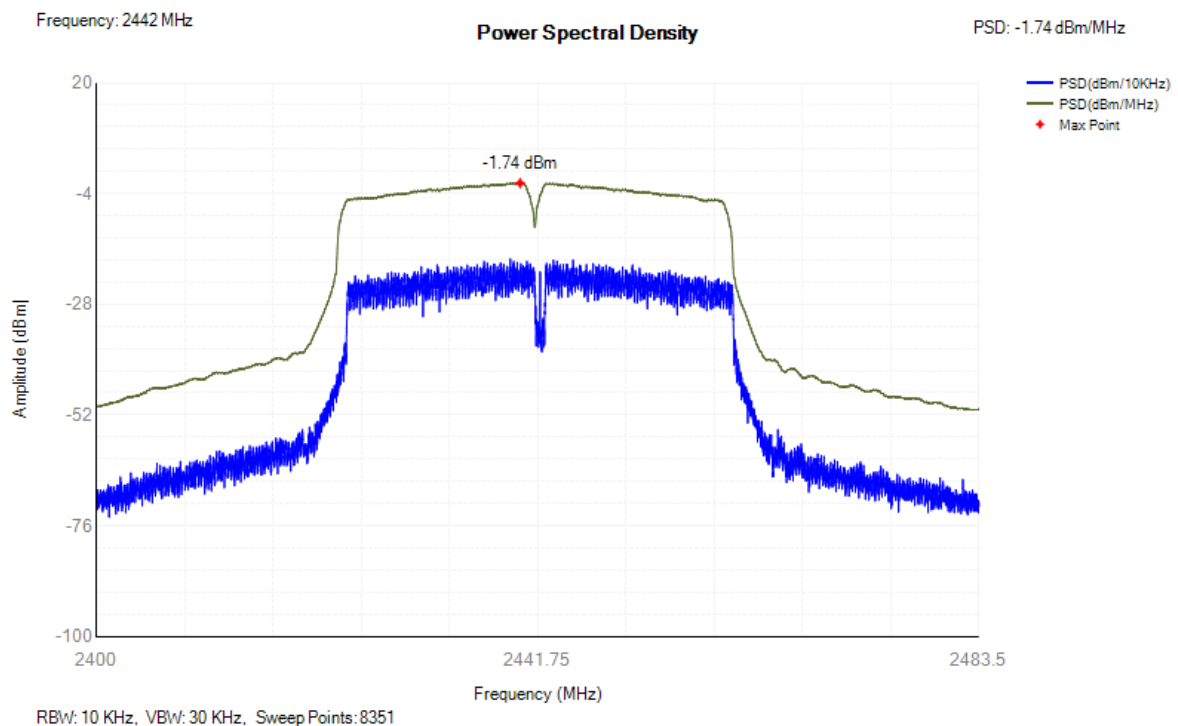


PSD NVNT n40 2462MHz Ant1

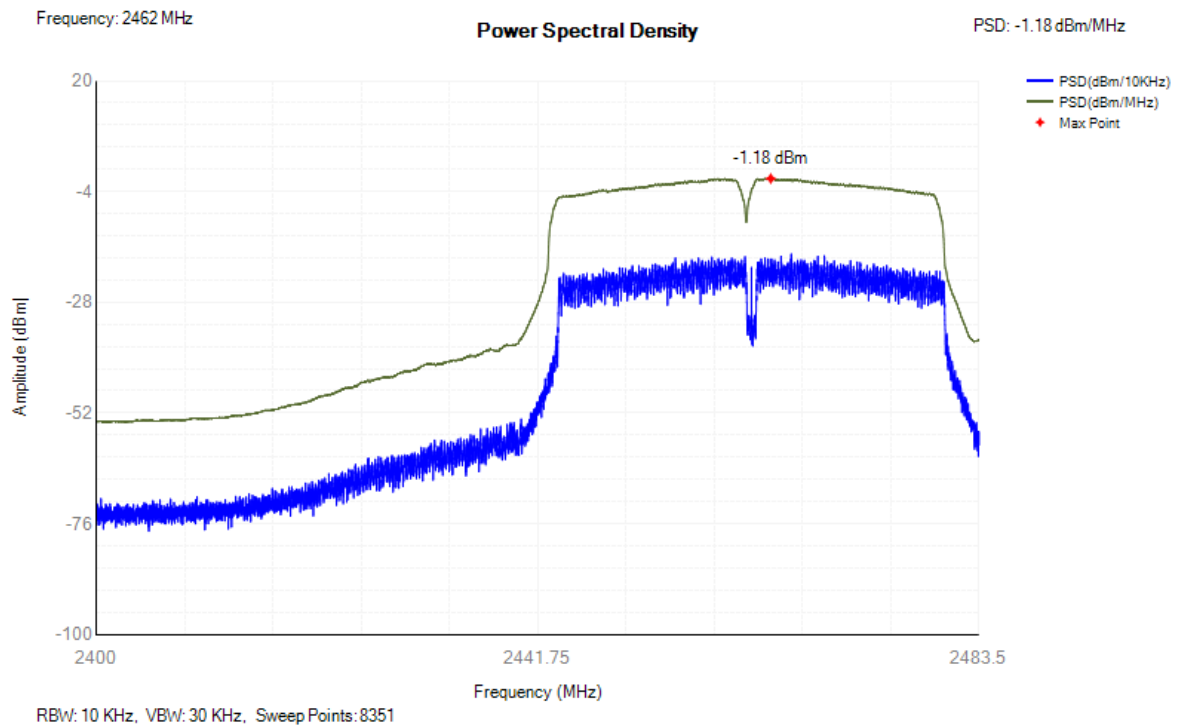


## 5.4.6 Adaptivity

Condition	Mode	Frequency (MHz)	Antenna	AWGN Level (dBm)	CW Level (dBm)	Short Control Width (ms)	Short Control Ratio(%)	Limit (%)	Verdict
NVNT	b	2412	Ant1	-65.42	-35	1.3	2.6	$\leq 10$	Pass
NVNT	b	2472	Ant1	-65.35	-35	1.3	2.6	$\leq 10$	Pass
NVNT	g	2412	Ant1	-64.37	-35	0	0	$\leq 10$	Pass
NVNT	g	2472	Ant1	-64.47	-35	0	0	$\leq 10$	Pass
NVNT	n20	2412	Ant1	-63.22	-35	0	0	$\leq 10$	Pass
NVNT	n20	2472	Ant1	-63.36	-35	0	0	$\leq 10$	Pass
NVNT	n40	2422	Ant1	-62.49	-35	0	0	$\leq 10$	Pass
NVNT	n40	2462	Ant1	-62.81	-35	0	0	$\leq 10$	Pass


Adaptivity NVNT b 2412MHz

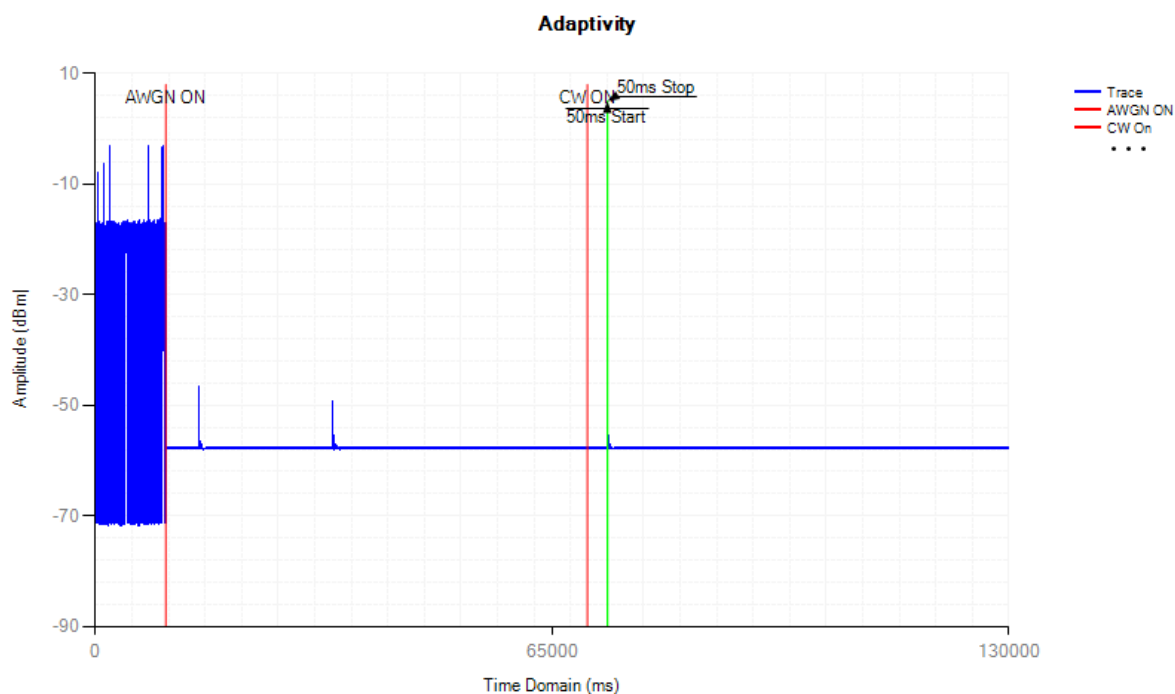


## Control Signal NVNT b 2412MHz

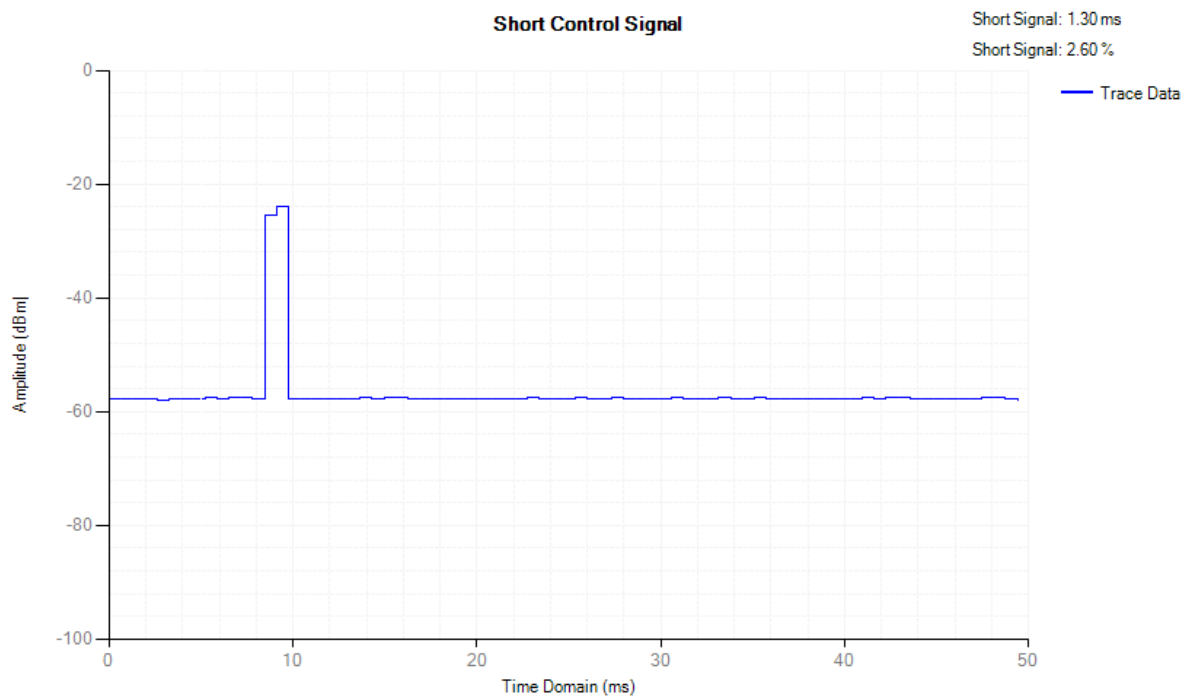


## Adaptivity NVNT b 2472MHz

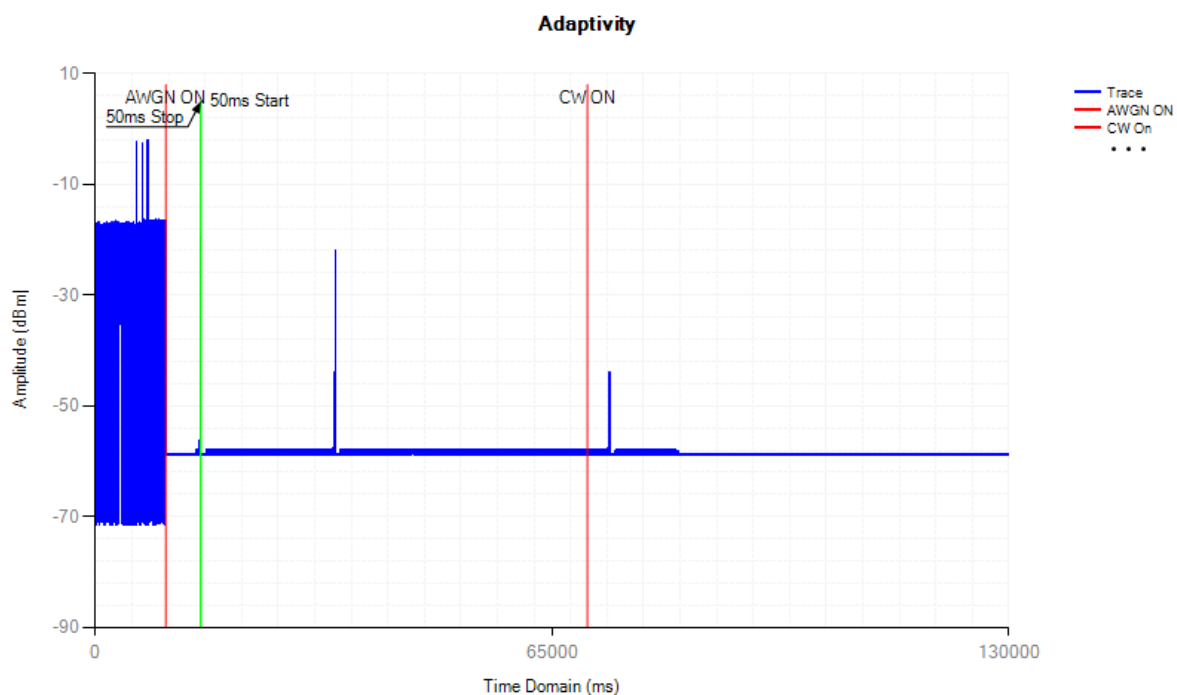


## Control Signal NVNT b 2472MHz

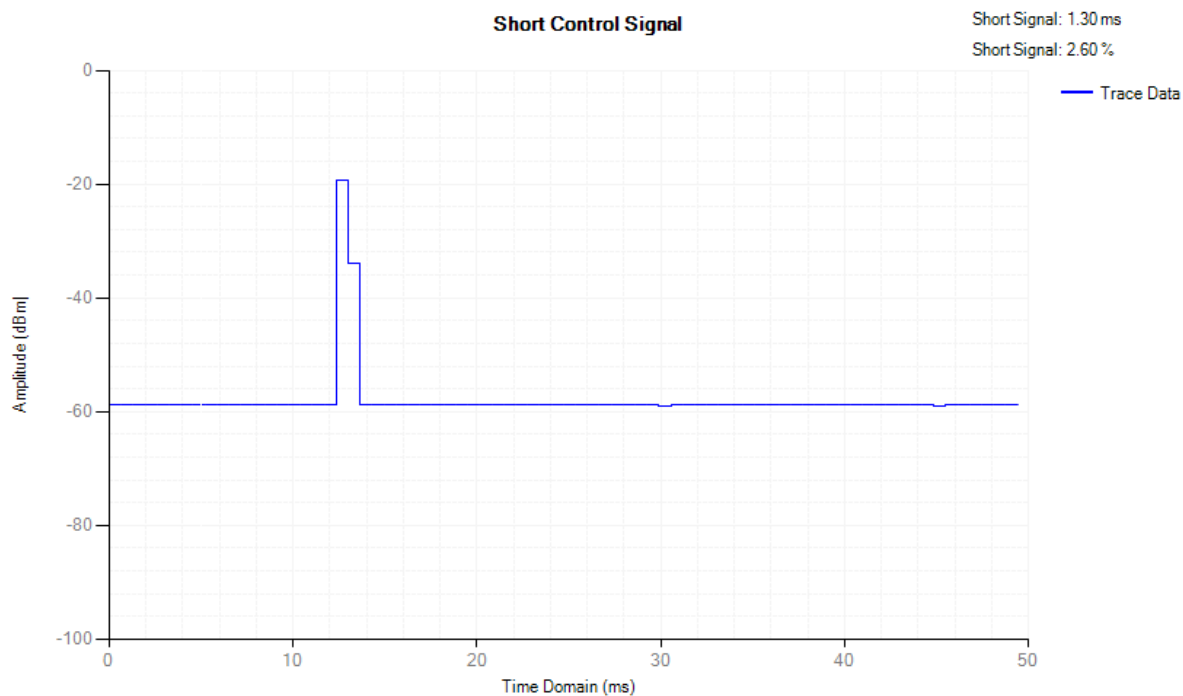


## Adaptivity NVNT g 2412MHz

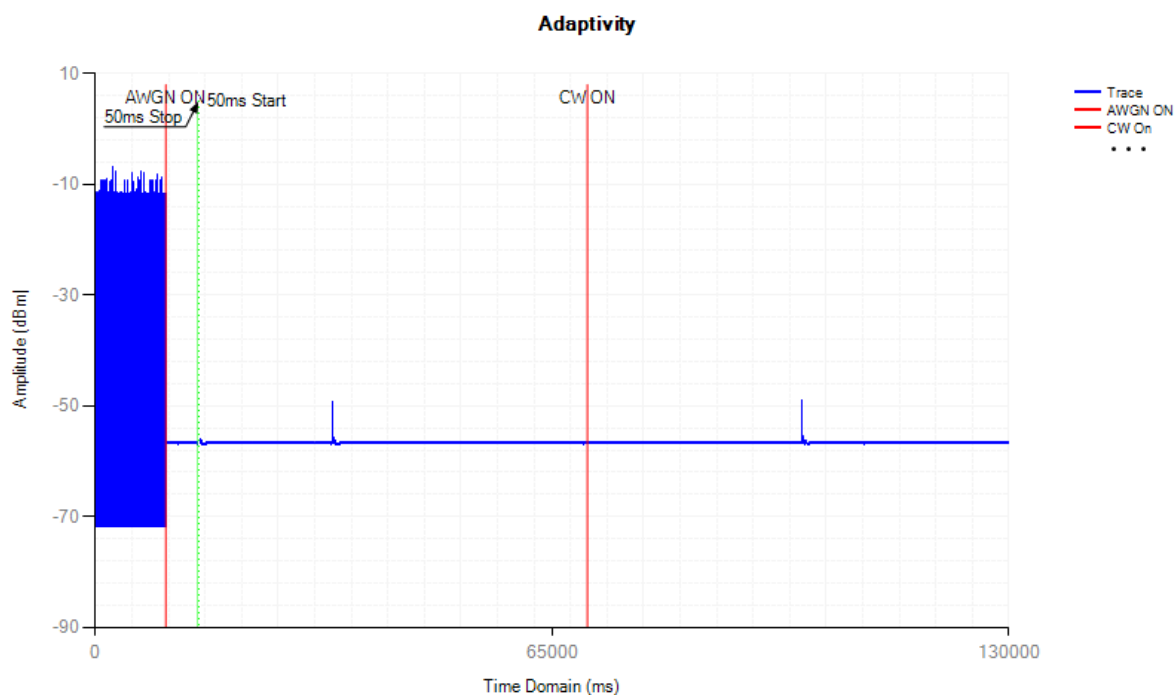


## Control Signal NVNT g 2412MHz

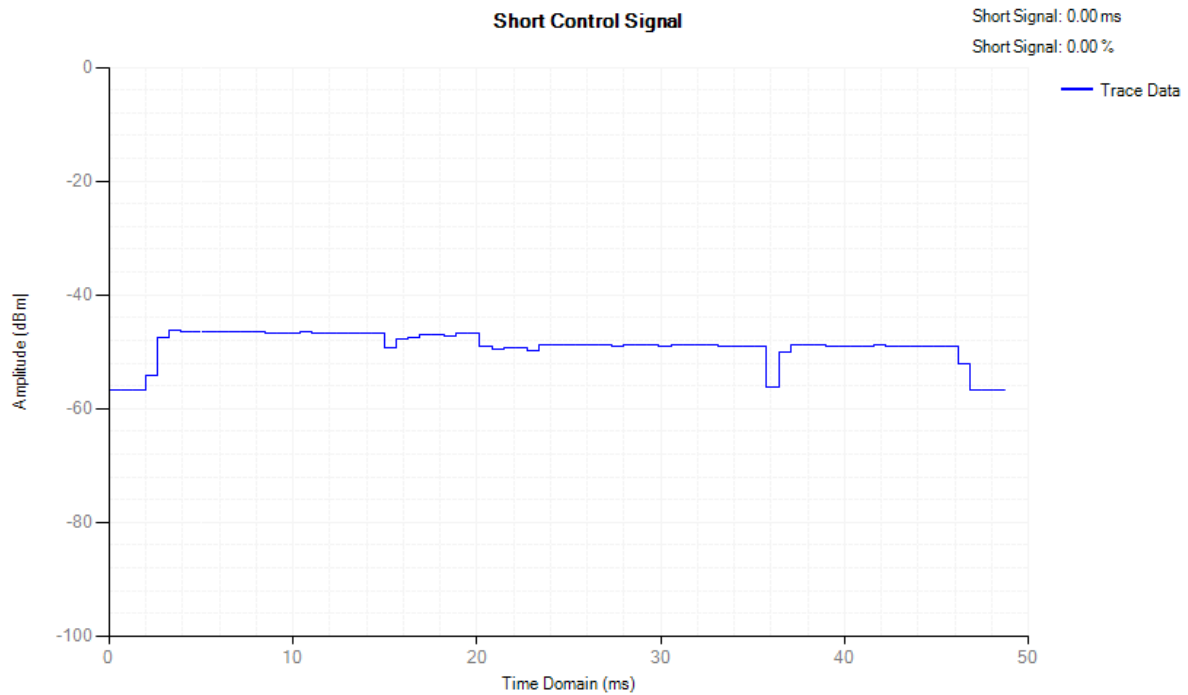


## Adaptivity NVNT g 2472MHz

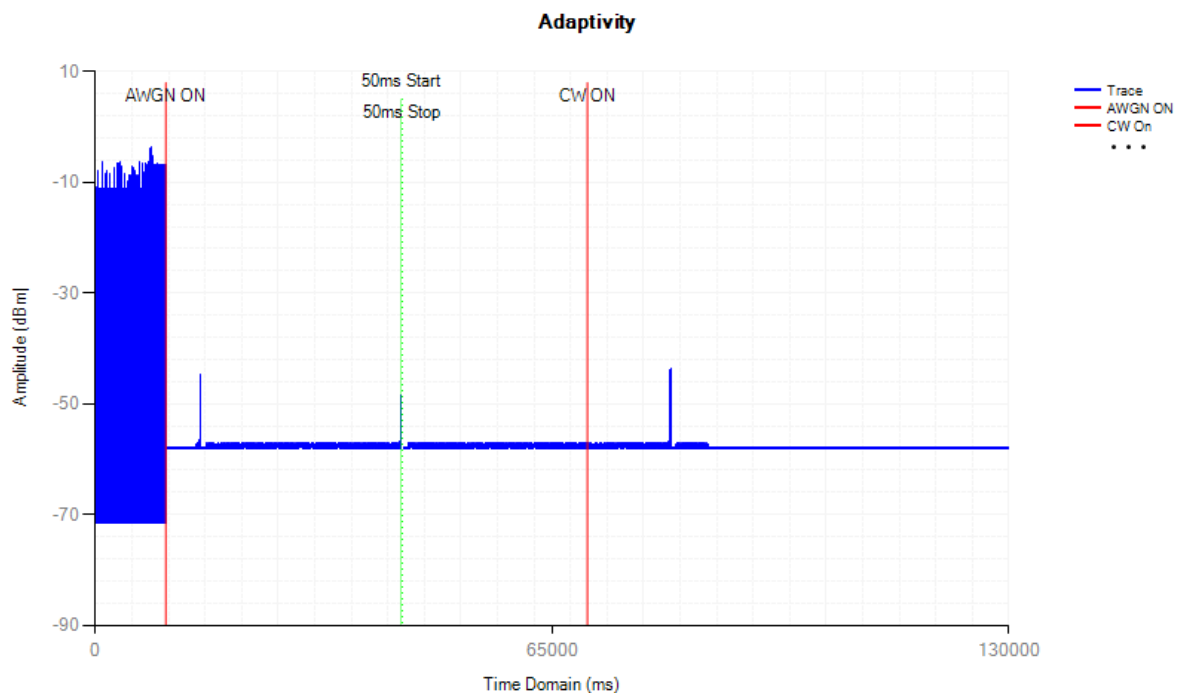


## Control Signal NVNT g 2472MHz

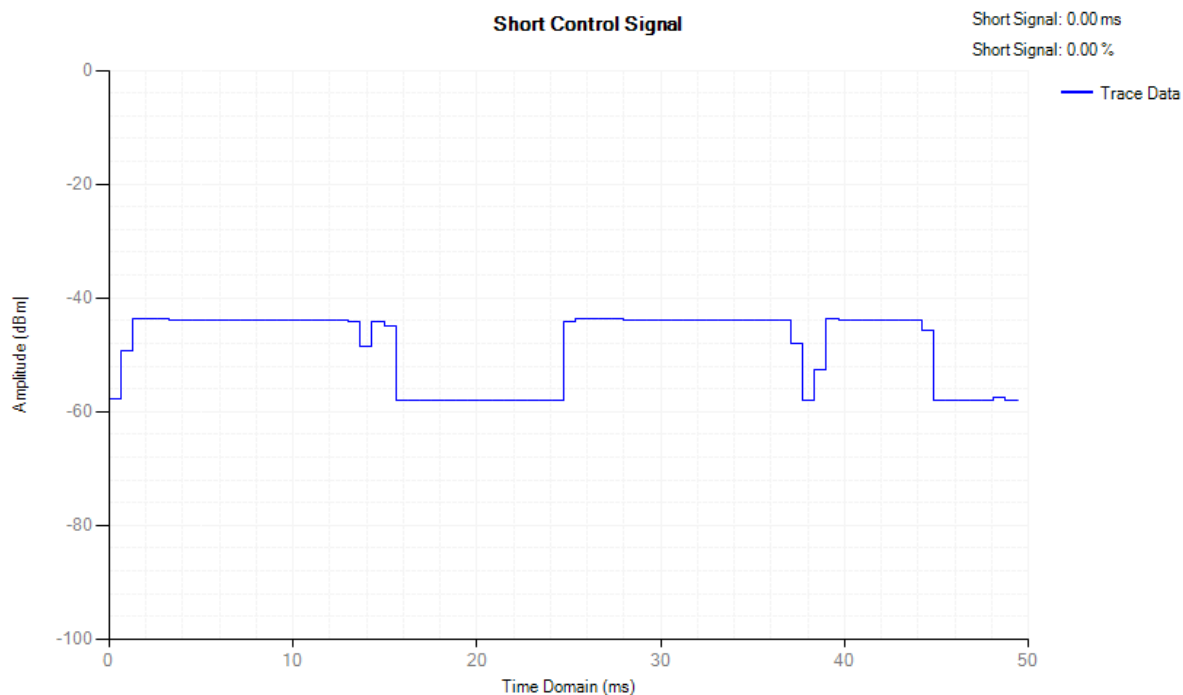


Adaptivity NVNT n20 2412MHz

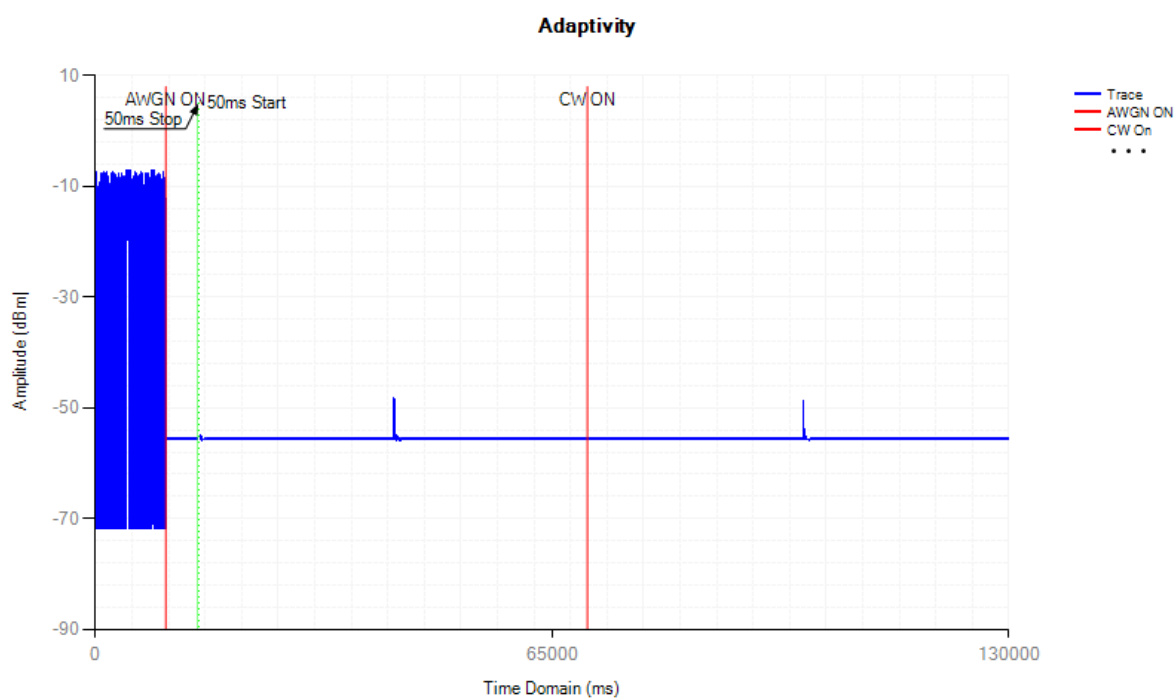

Control Signal NVNT n20 2412MHz

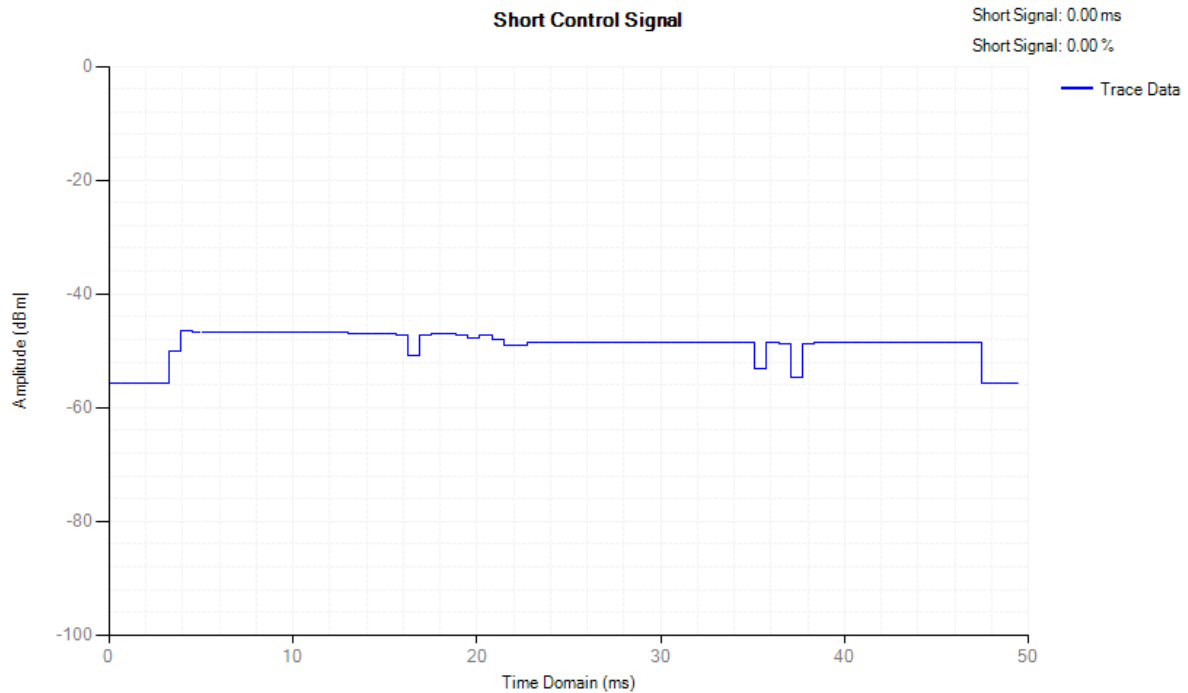


Adaptivity NVNT n20 2472MHz

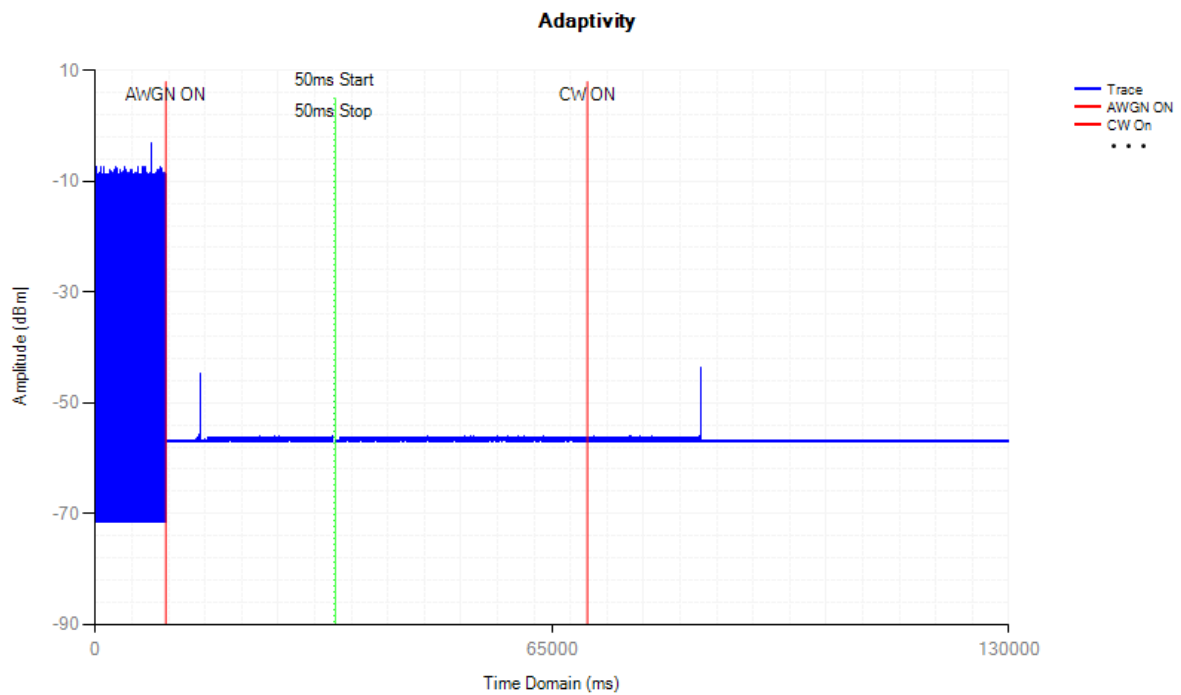


Control Signal NVNT n20 2472MHz




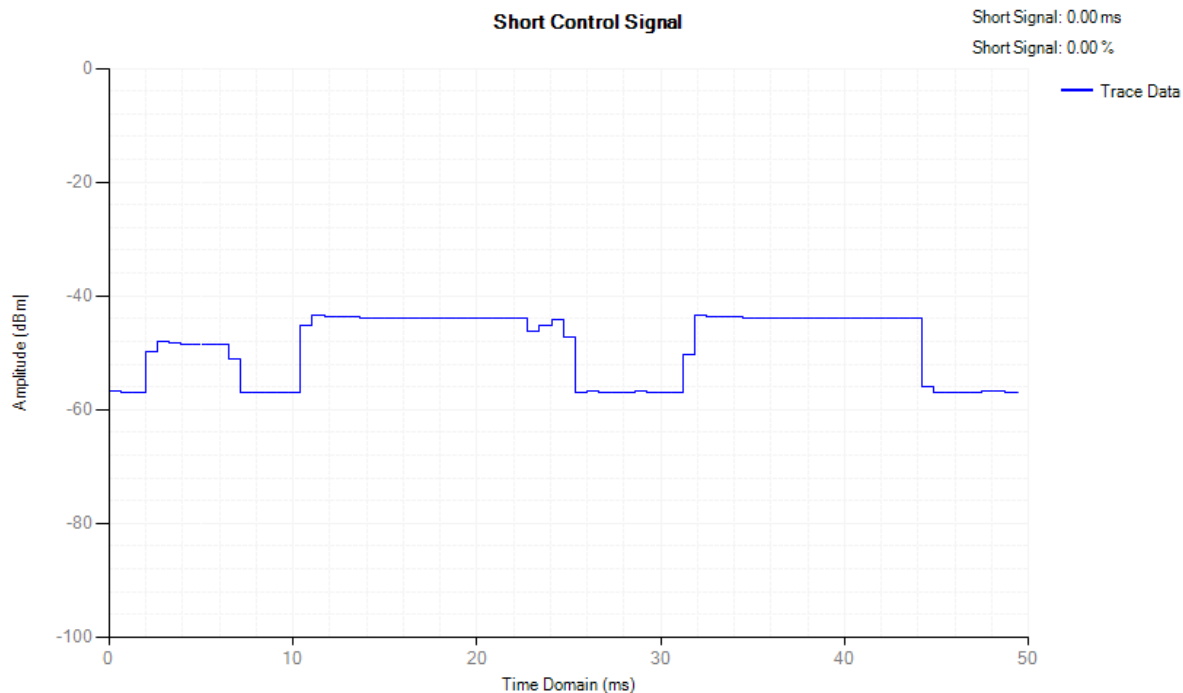


Adaptivity NVNT n40 2422MHz

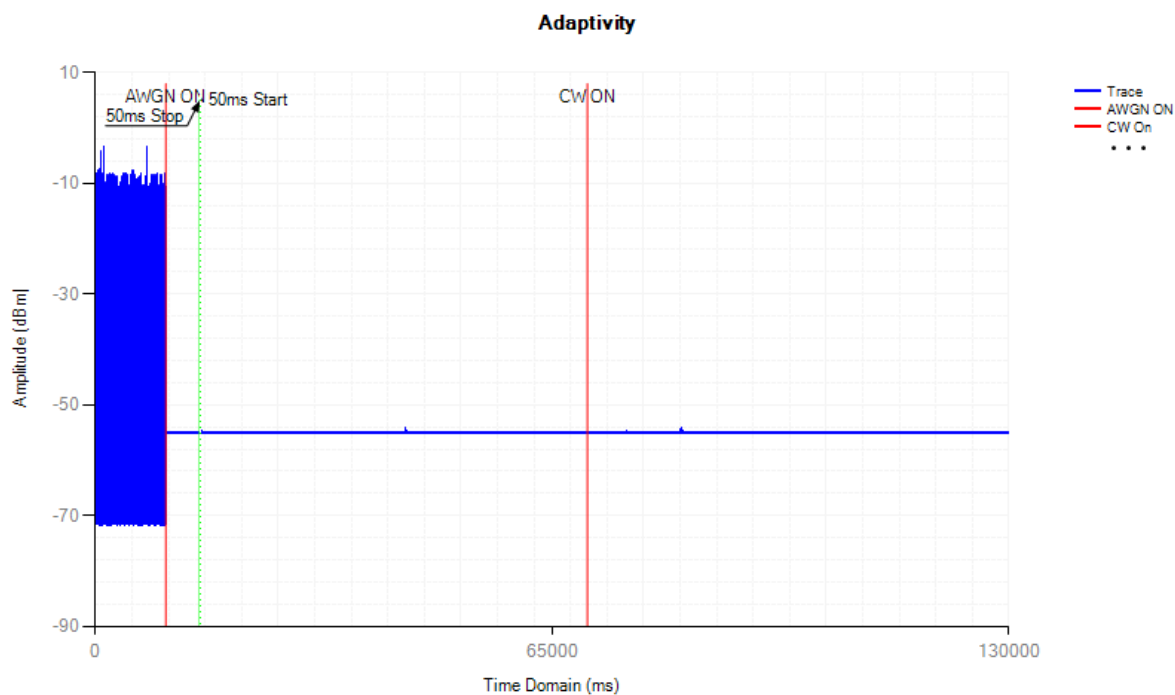


Control Signal NVNT n40 2422MHz

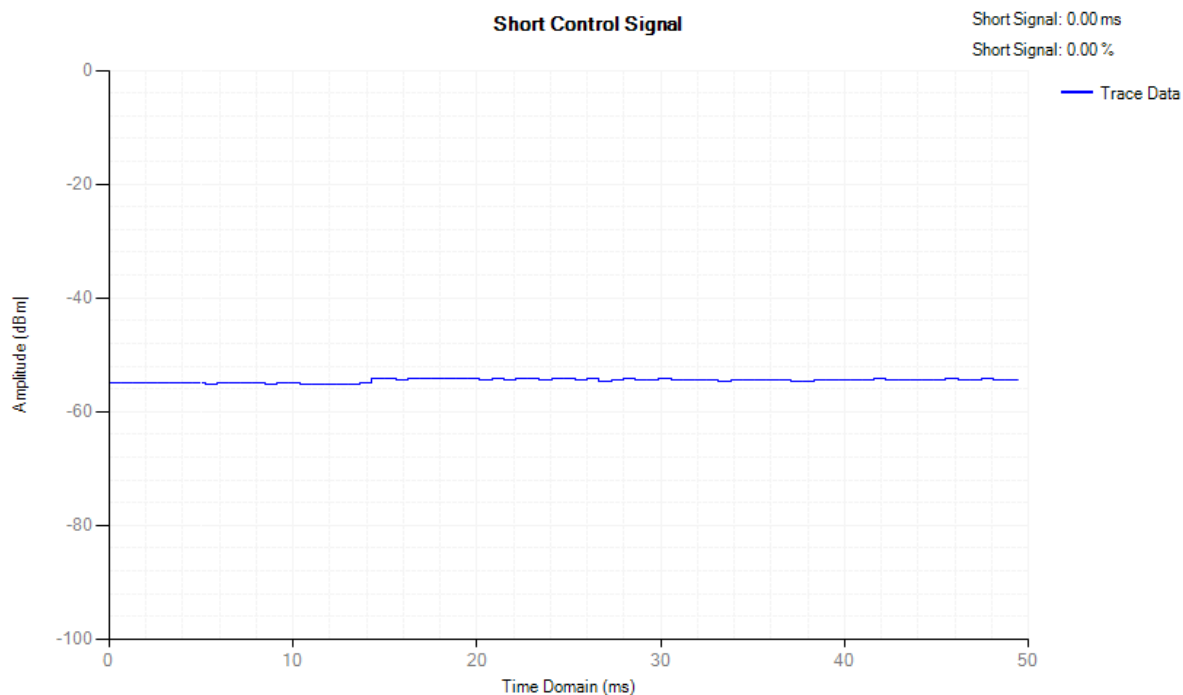

Adaptivity NVNT n40 2462MHz

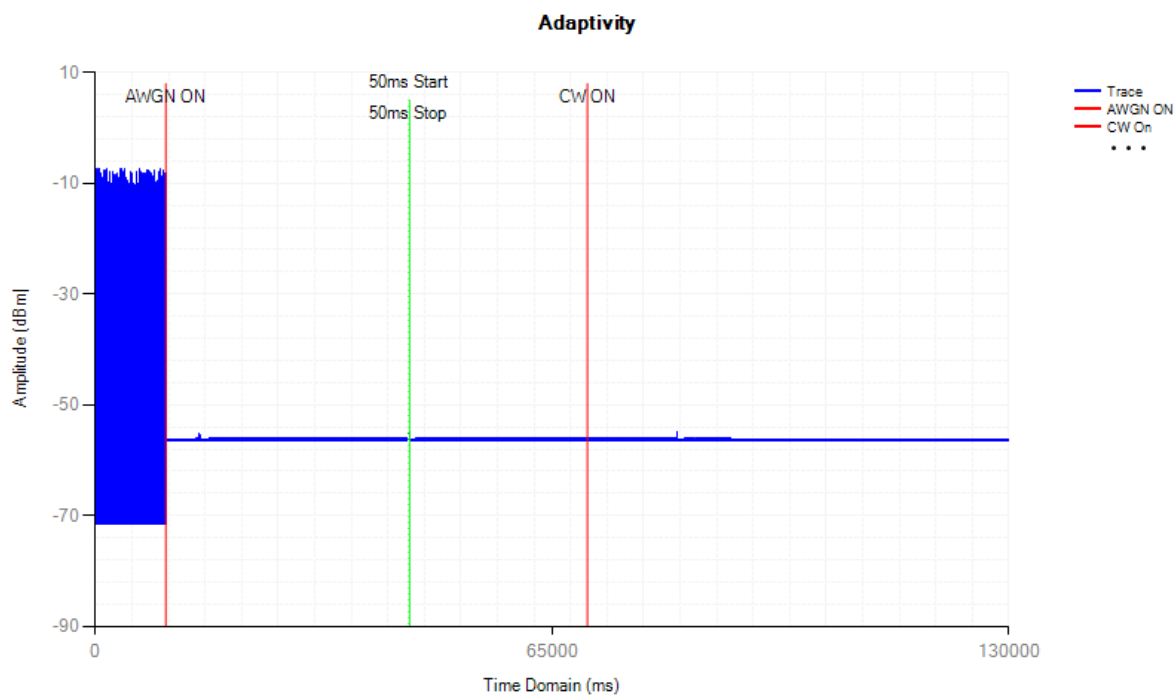


Control Signal NVNT n40 2462MHz

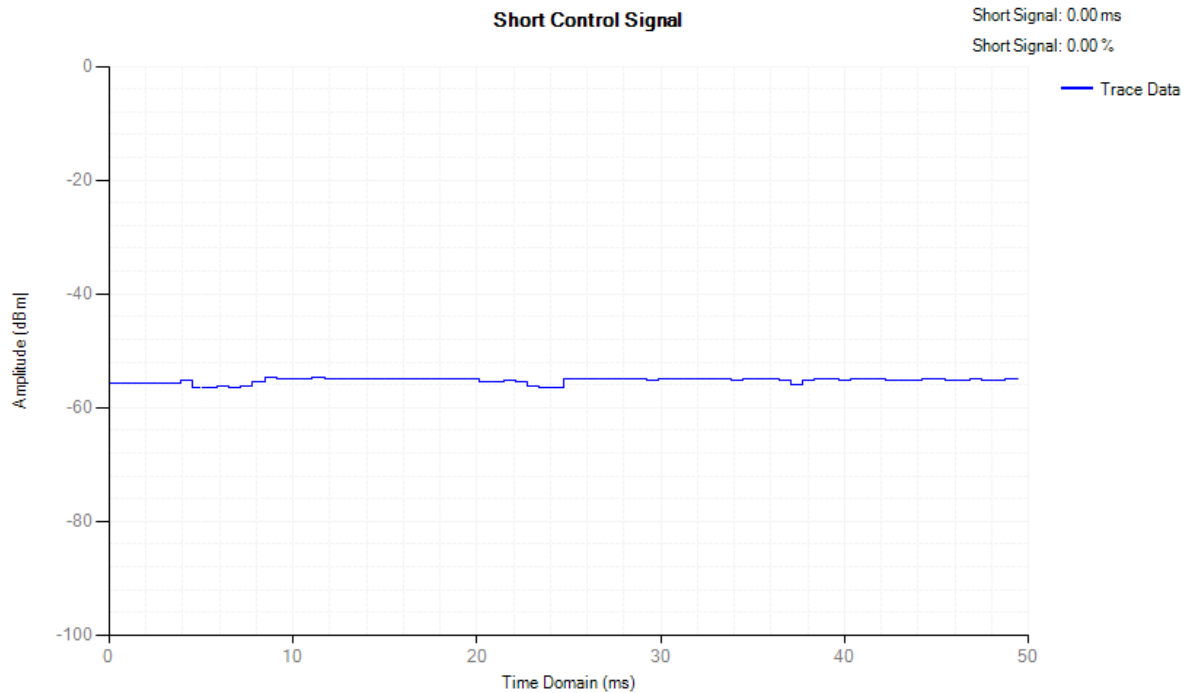


#### 5.4.6 Adaptivity COT

Condition	Mode	Frequency (MHz)	Antenna	Max COT (ms)	Limit COT (ms)	Min Idle Time (ms)	Limit Idle Time (ms)	Verdict
NV/NT	b	2412	Ant1	2.45	$\leq 13$	0.16	$> 0.018$	Pass
NV/NT	b	2472	Ant1	6.4	$\leq 13$	0.1	$> 0.018$	Pass
NV/NT	g	2412	Ant1	0.369	$\leq 13$	0.076	$> 0.018$	Pass
NV/NT	g	2472	Ant1	2.098	$\leq 13$	0.076	$> 0.018$	Pass
NV/NT	n20	2412	Ant1	2.018	$\leq 13$	0.089	$> 0.018$	Pass
NV/NT	n20	2472	Ant1	0.676	$\leq 13$	0.089	$> 0.018$	Pass
NV/NT	n40	2422	Ant1	0.516	$\leq 13$	0.089	$> 0.018$	Pass
NV/NT	n40	2462	Ant1	1.316	$\leq 13$	0.089	$> 0.018$	Pass


COT NVNT b 2412MHz

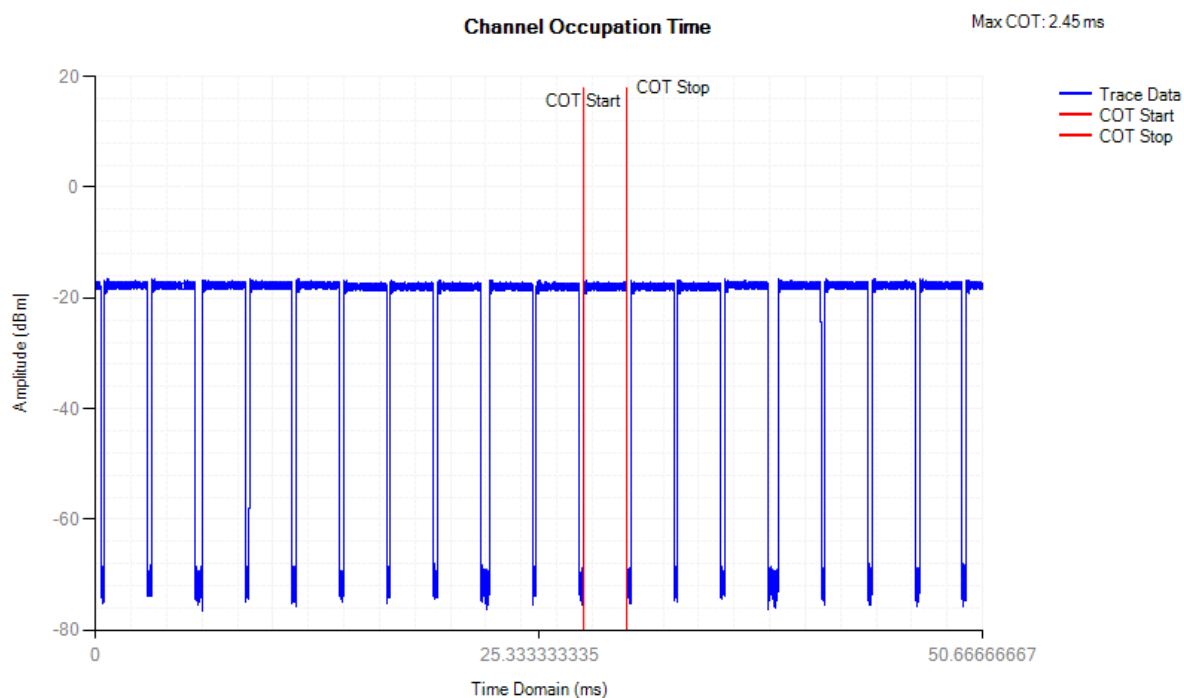


Idle NVNT b 2412MHz

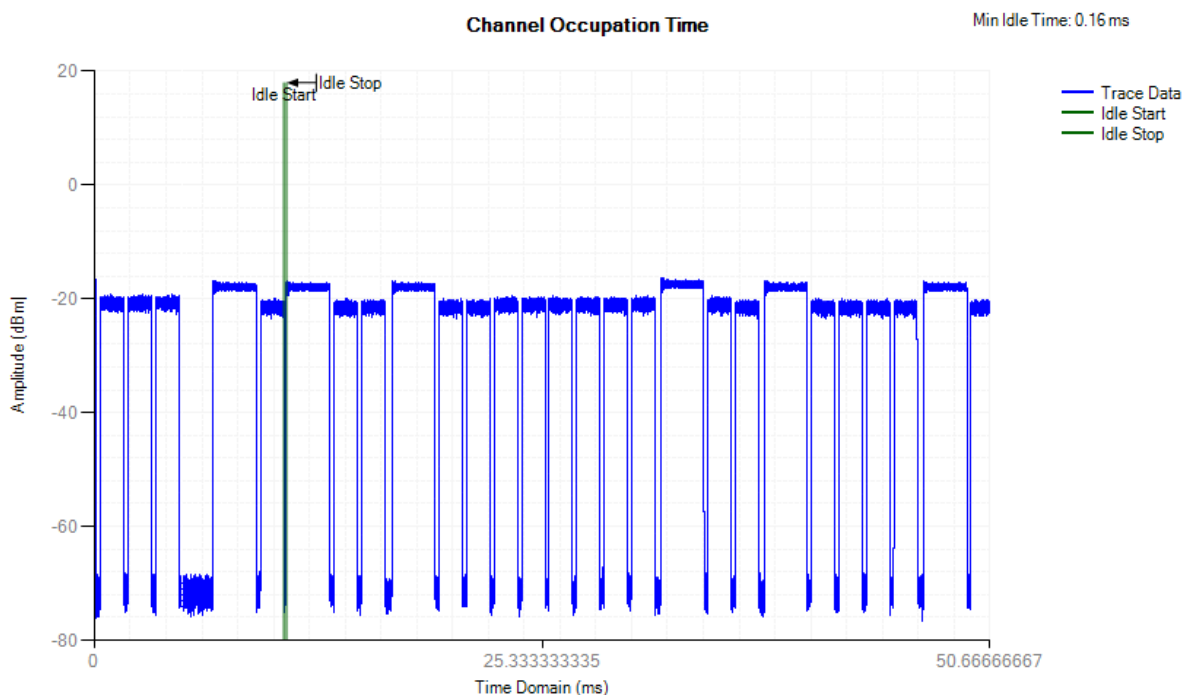


COT NVNT b 2472MHz

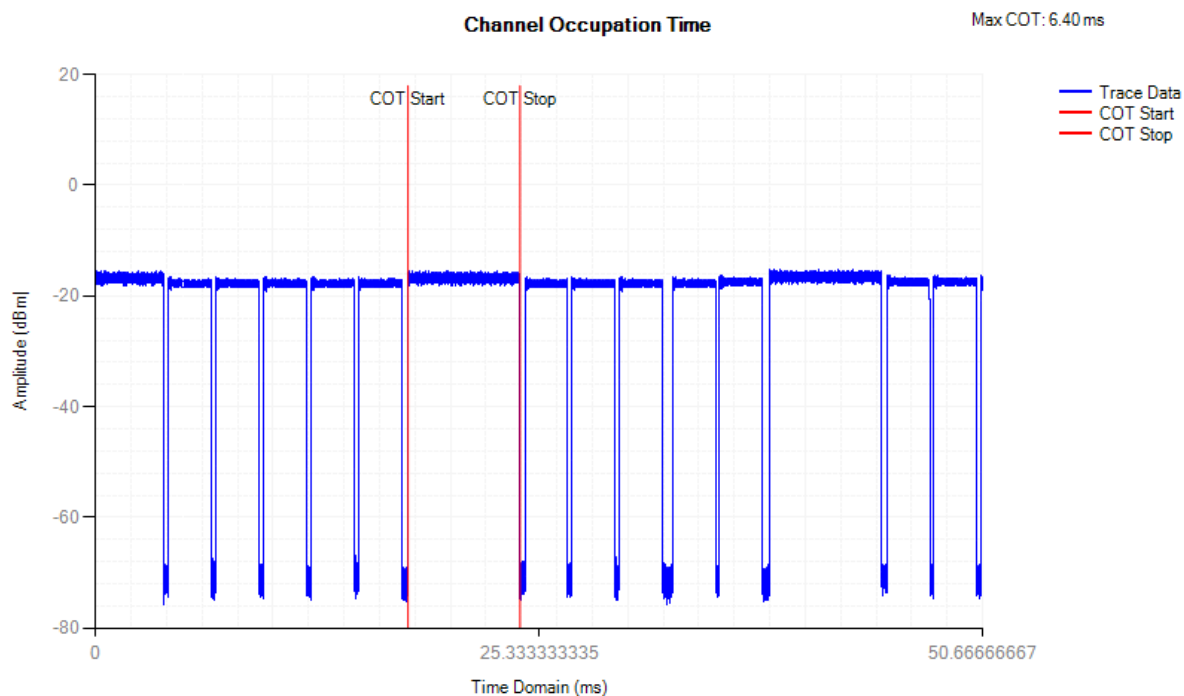


Idle NVNT b 2472MHz

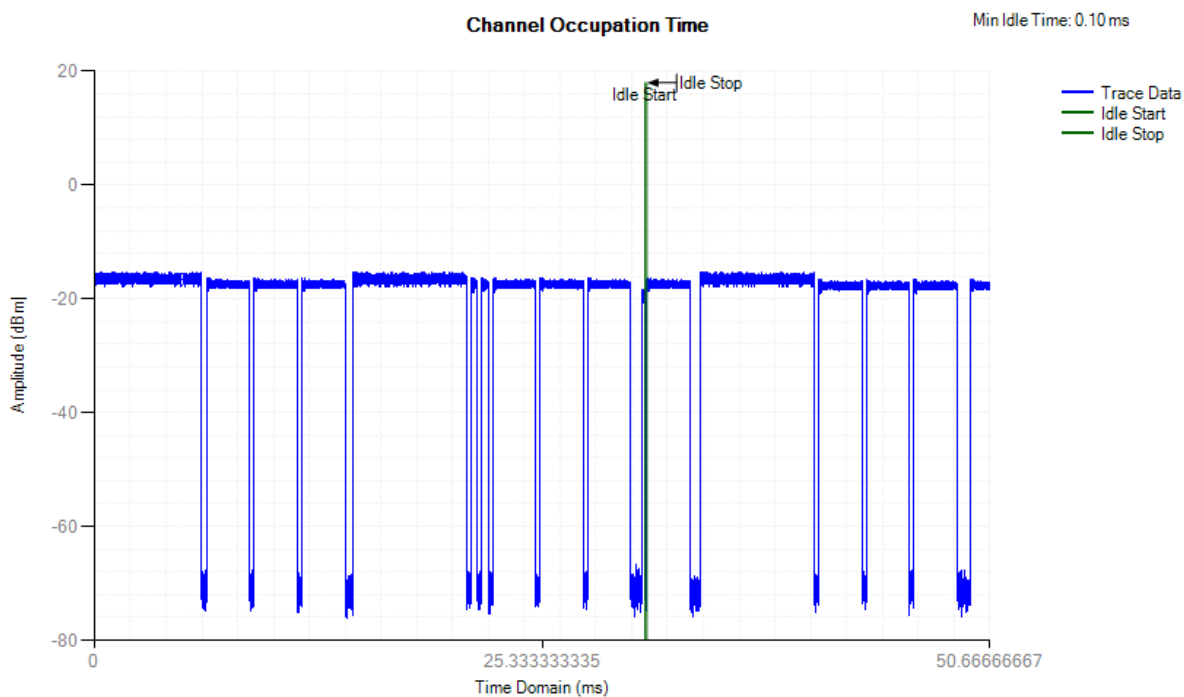


COT NVNT g 2412MHz

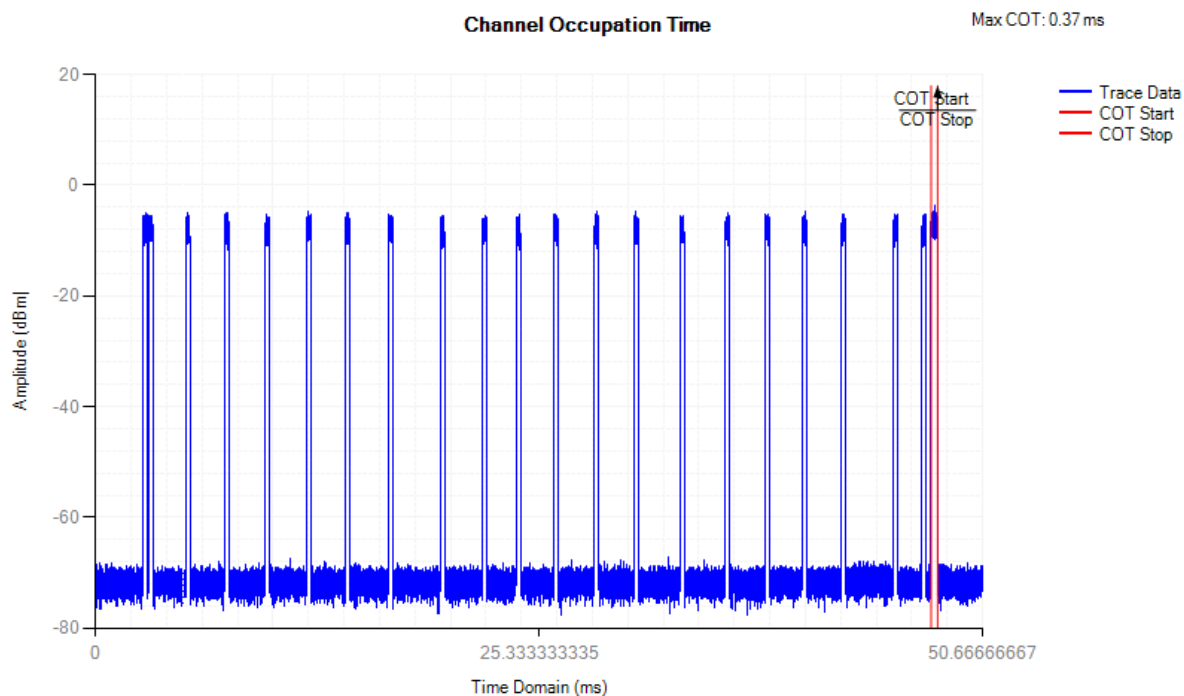


Idle NVNT g 2412MHz

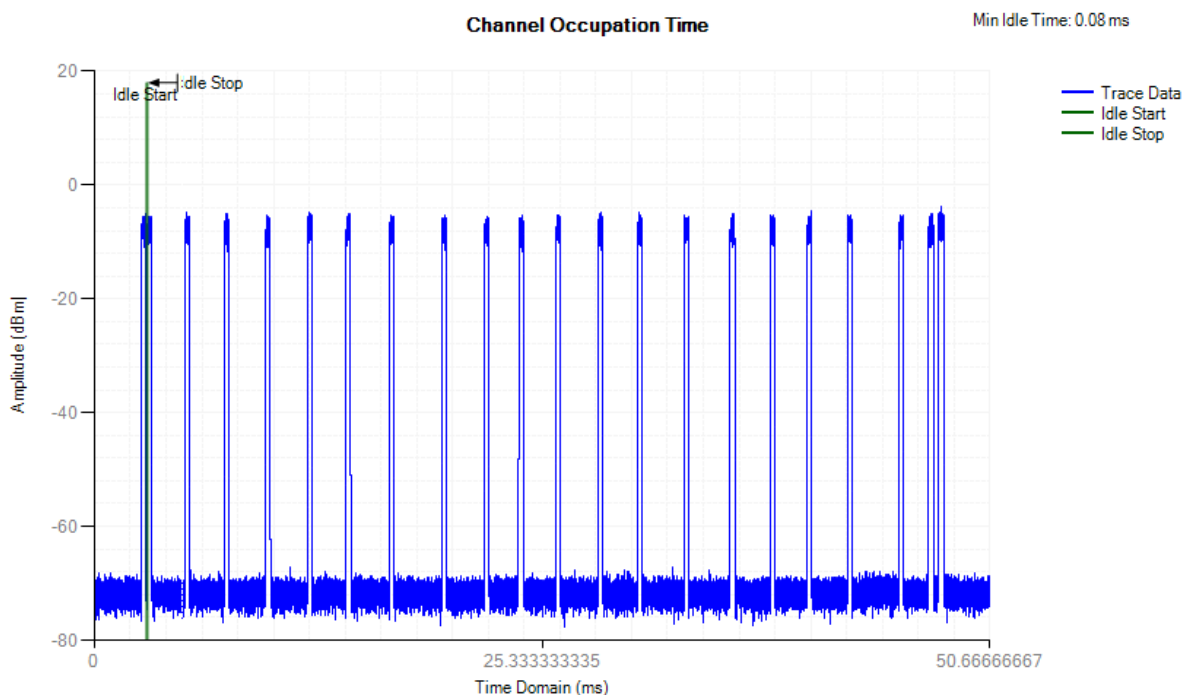


COT NVNT g 2472MHz

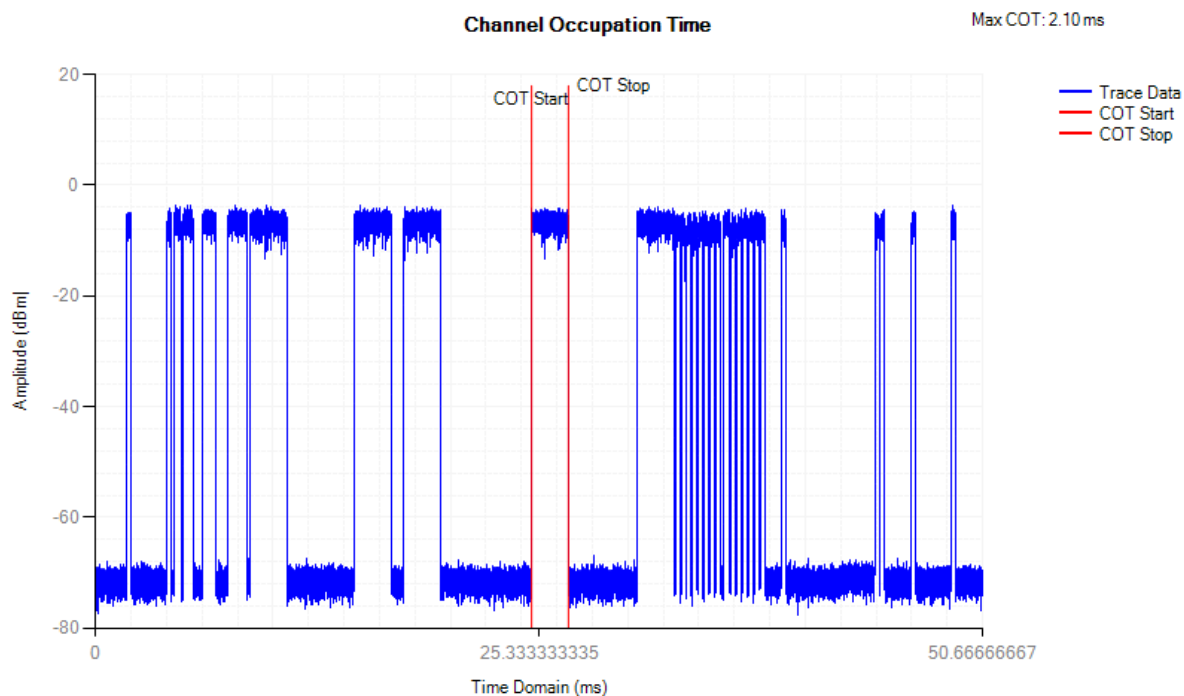


Idle NVNT g 2472MHz

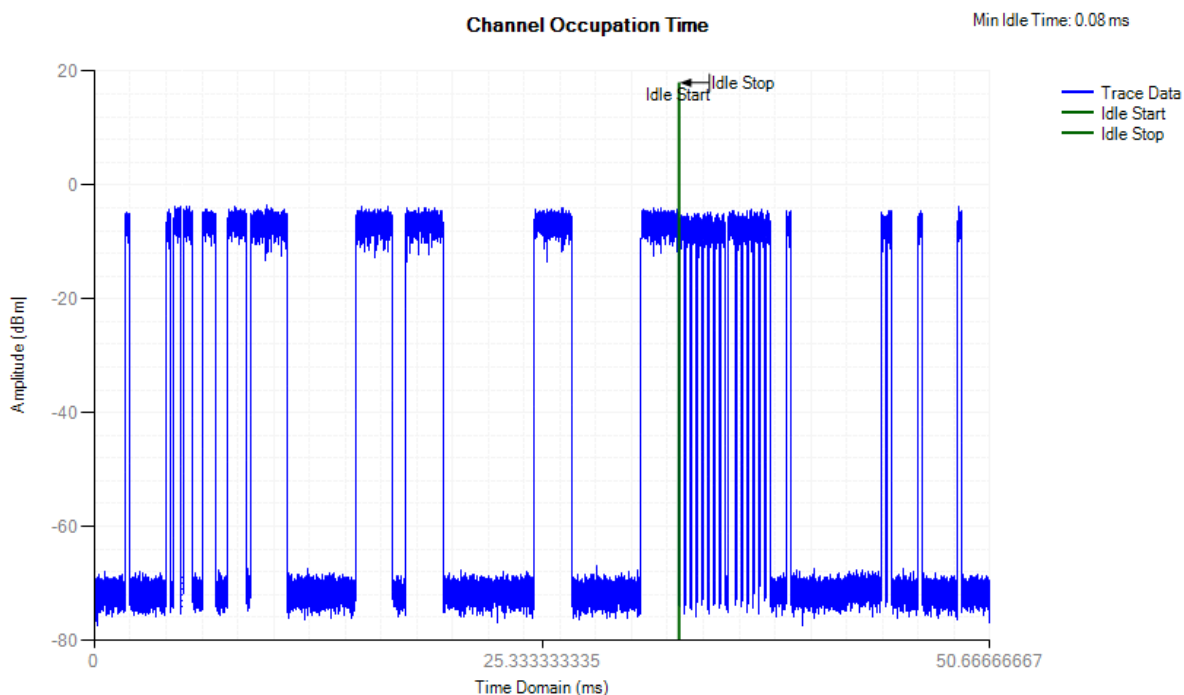

COT NVNT n20 2412MHz

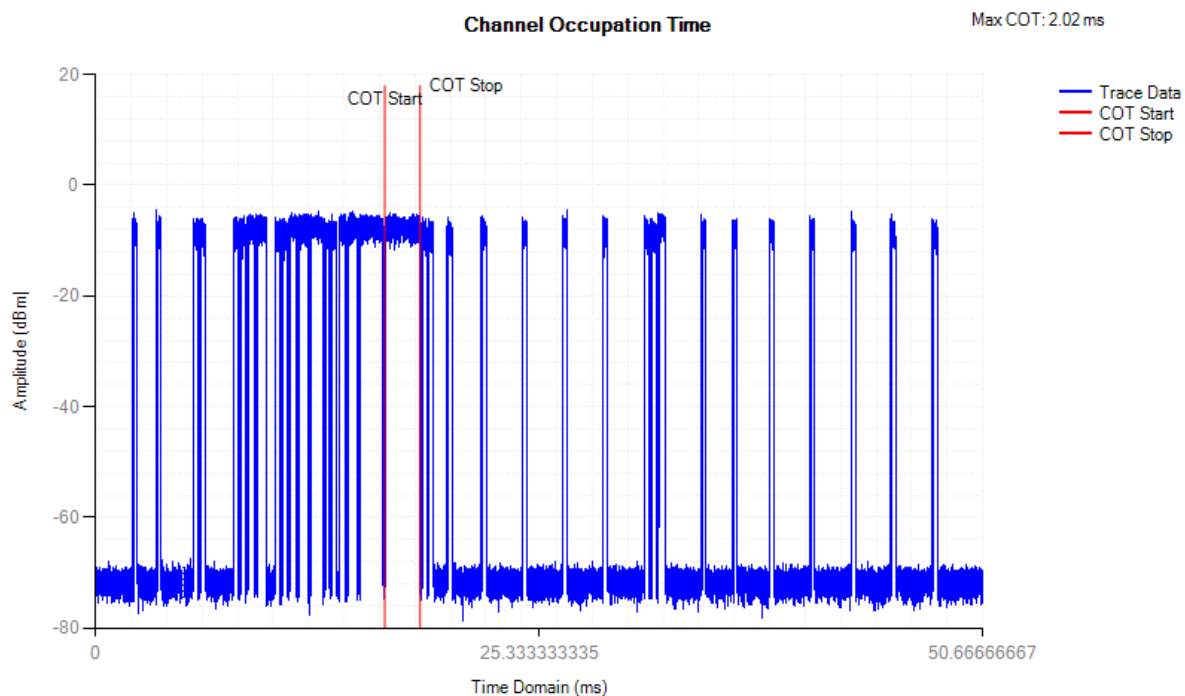


Idle NVNT n20 2412MHz

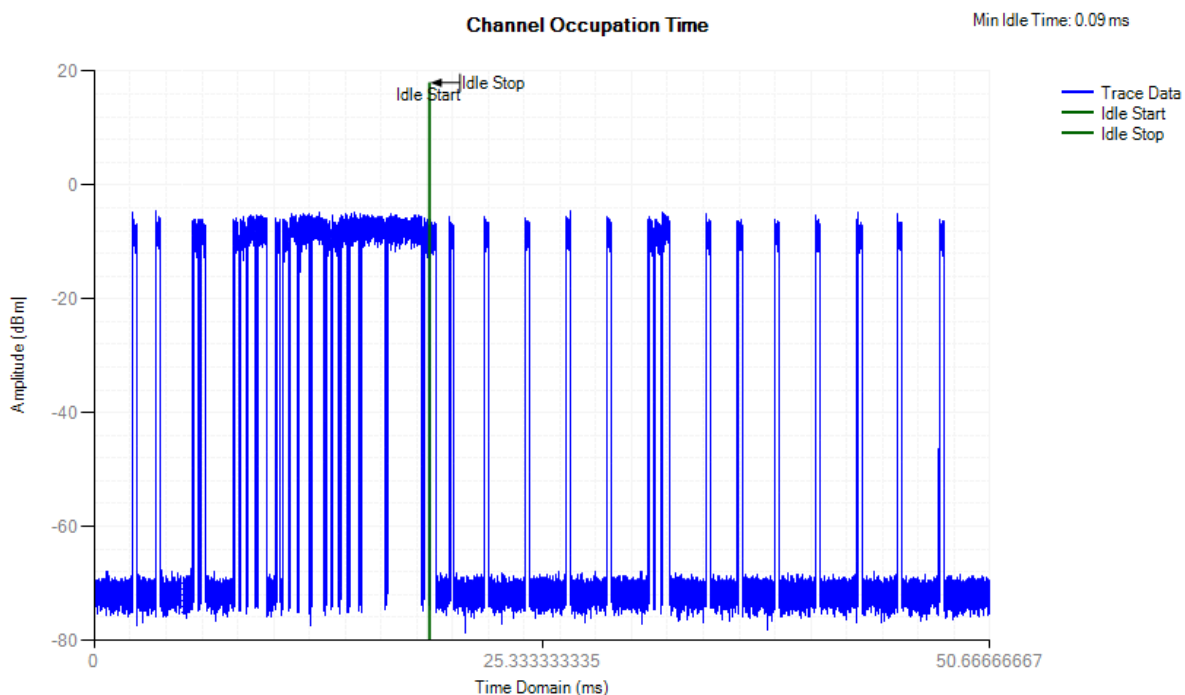





COT NVNT n20 2472MHz

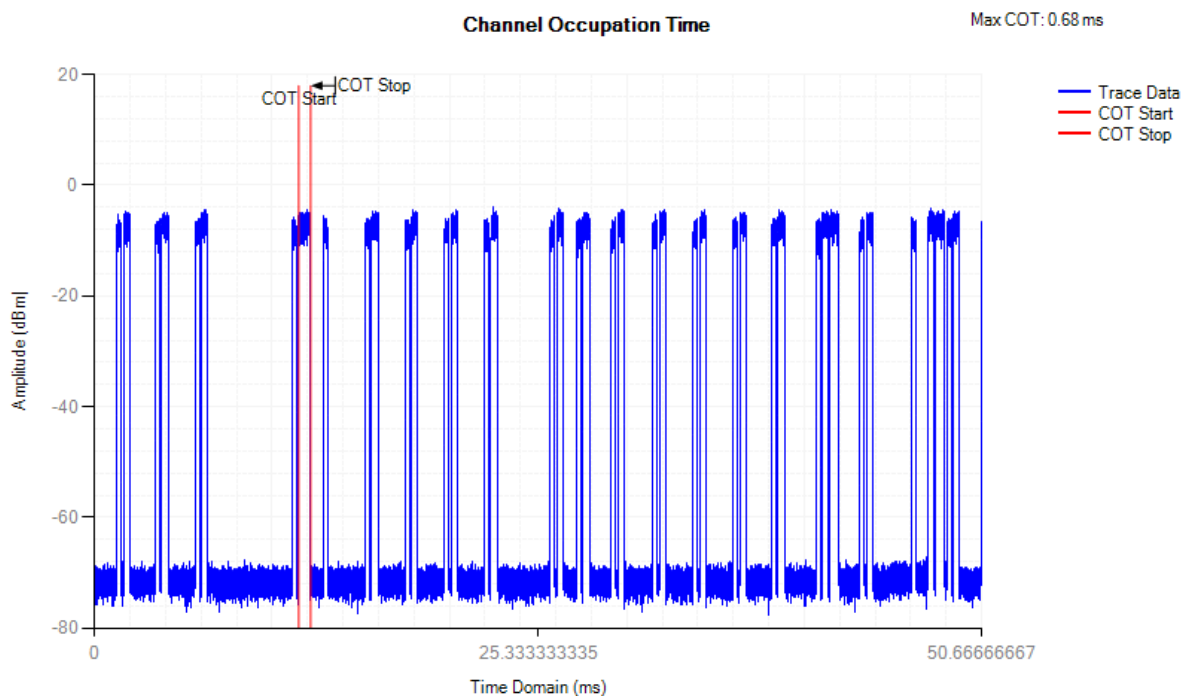


Idle NVNT n20 2472MHz

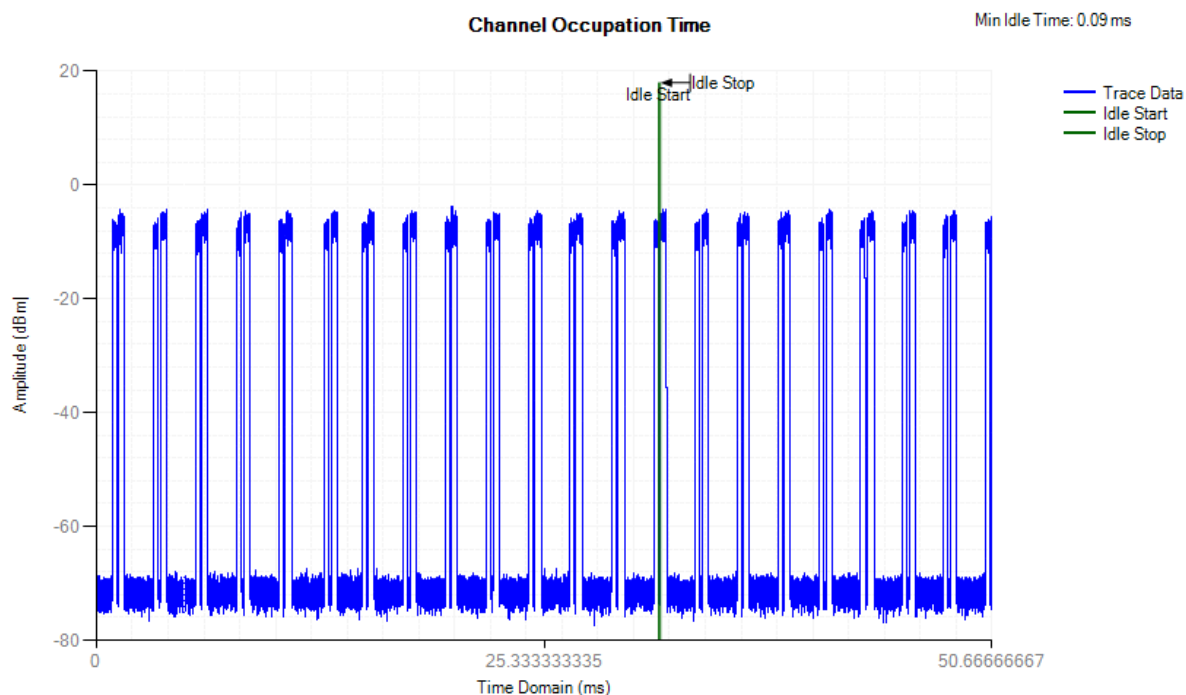

COT NVNT n40 2422MHz

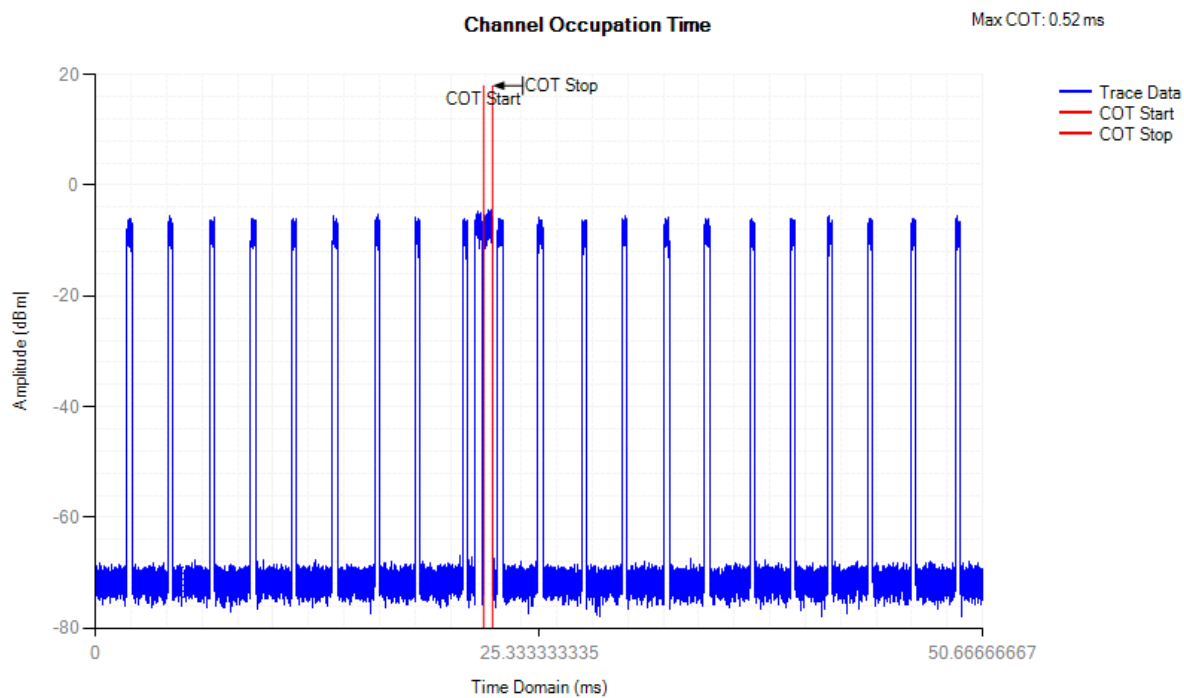


Idle NVNT n40 2422MHz

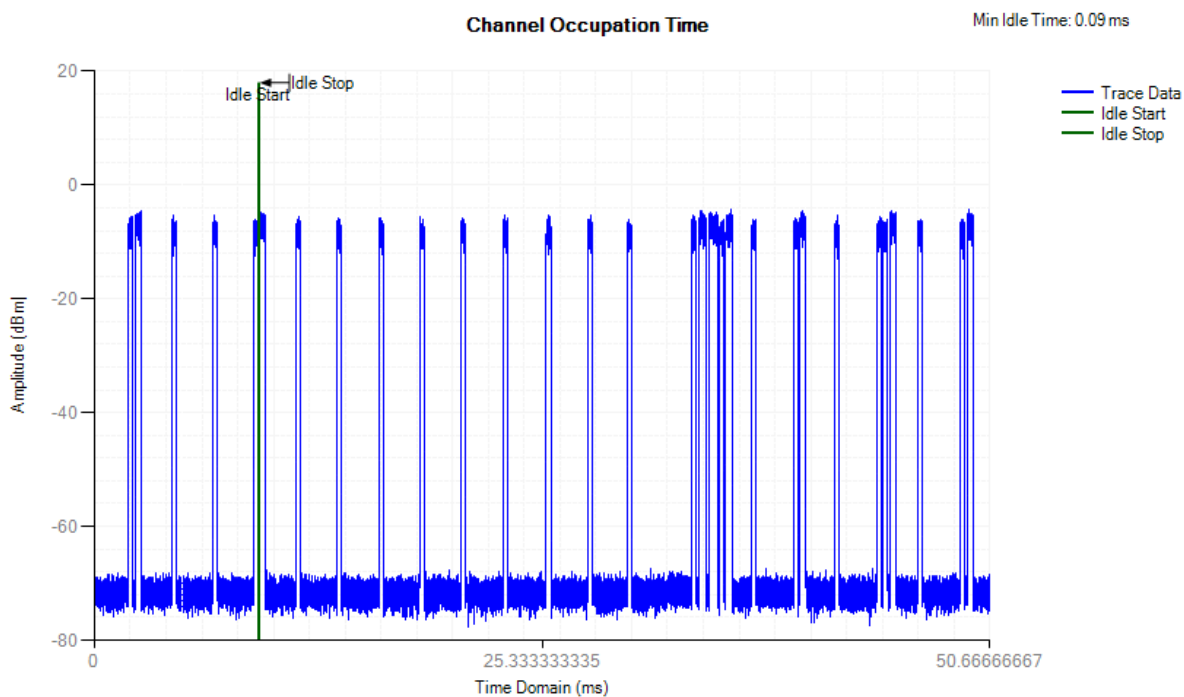

COT NVNT n40 2462MHz

Channel Occupation Time


Max COT: 1.32 ms

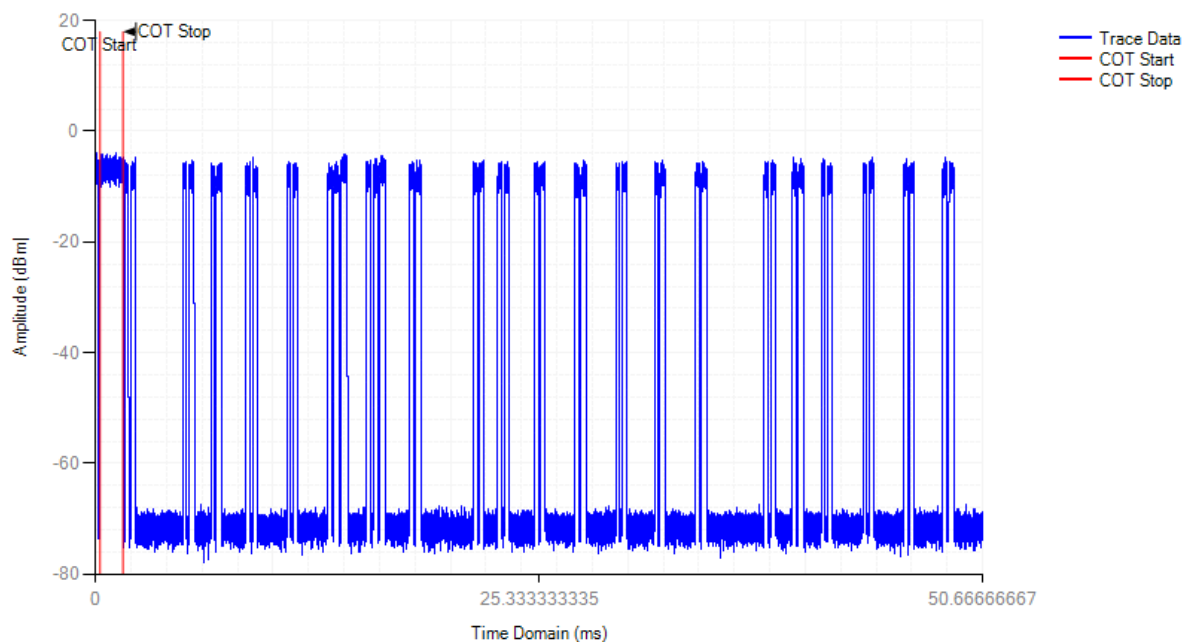

Idle NVNT n40 2462MHz

Channel Occupation Time


Min Idle Time: 0.09 ms

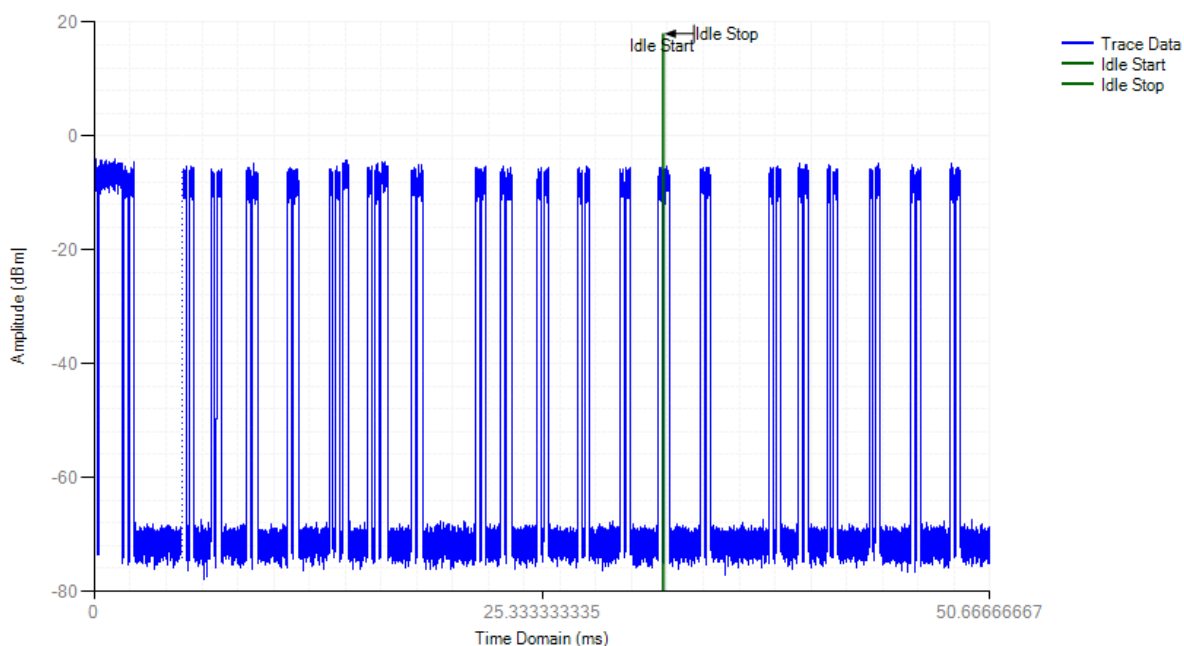


## 5.4.7 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	b	2412	Ant1	2411.961	12.873	2405.525	2418.398	2400 - 2483.5MHz	Pass
NVNT	b	2472	Ant1	2472.025	12.875	2465.587	2478.462	2400 - 2483.5MHz	Pass
NVNT	g	2412	Ant1	2411.978	16.472	2403.742	2420.214	2400 - 2483.5MHz	Pass
NVNT	g	2472	Ant1	2472.004	16.478	2463.765	2480.243	2400 - 2483.5MHz	Pass
NVNT	n20	2412	Ant1	2411.978	17.652	2403.153	2420.804	2400 - 2483.5MHz	Pass
NVNT	n20	2472	Ant1	2472.004	17.654	2463.177	2480.831	2400 - 2483.5MHz	Pass
NVNT	n40	2422	Ant1	2421.952	36.079	2403.912	2439.991	2400 - 2483.5MHz	Pass
NVNT	n40	2462	Ant1	2462.02	36.102	2443.969	2480.071	2400 - 2483.5MHz	Pass


OBW NVNT b 2412MHz Ant1

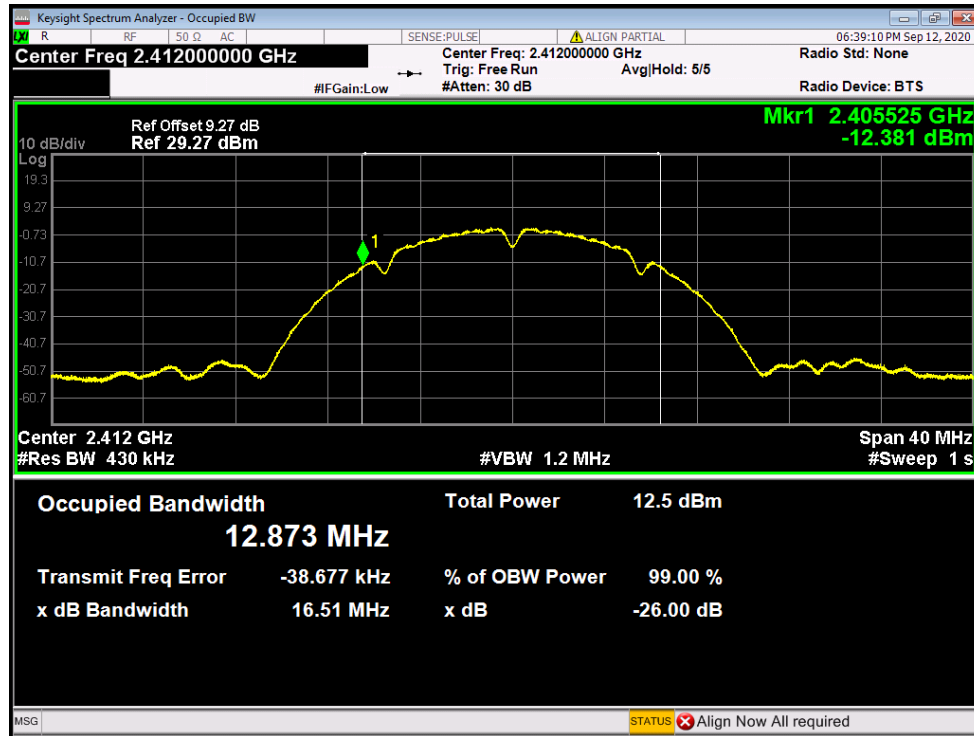


OBW NVNT b 2472MHz Ant1

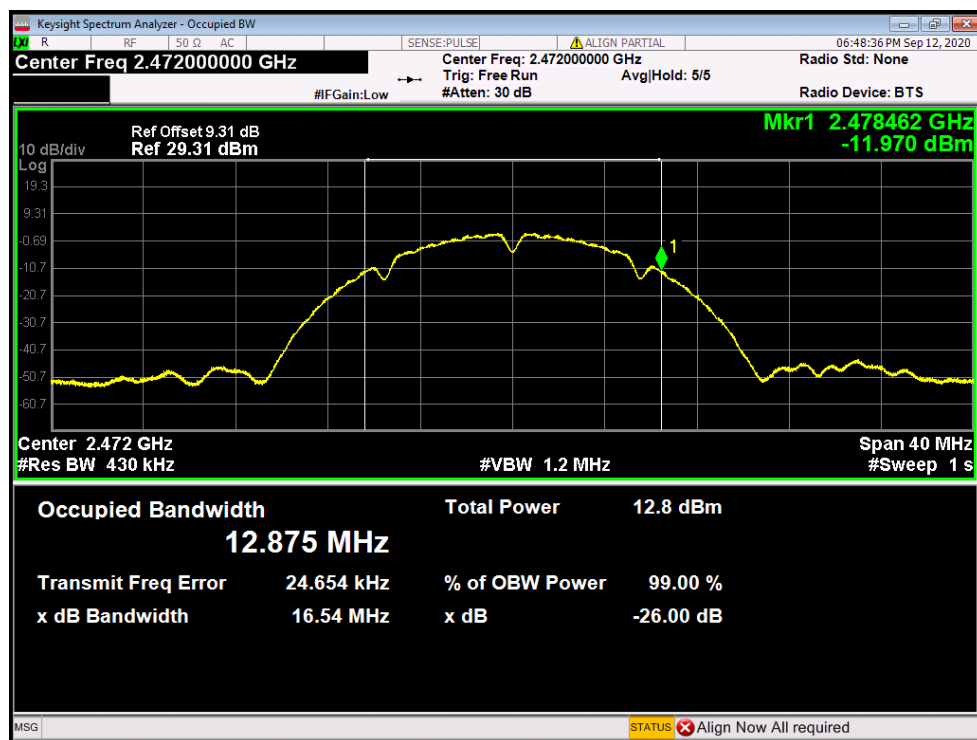


OBW NVNT g 2412MHz Ant1

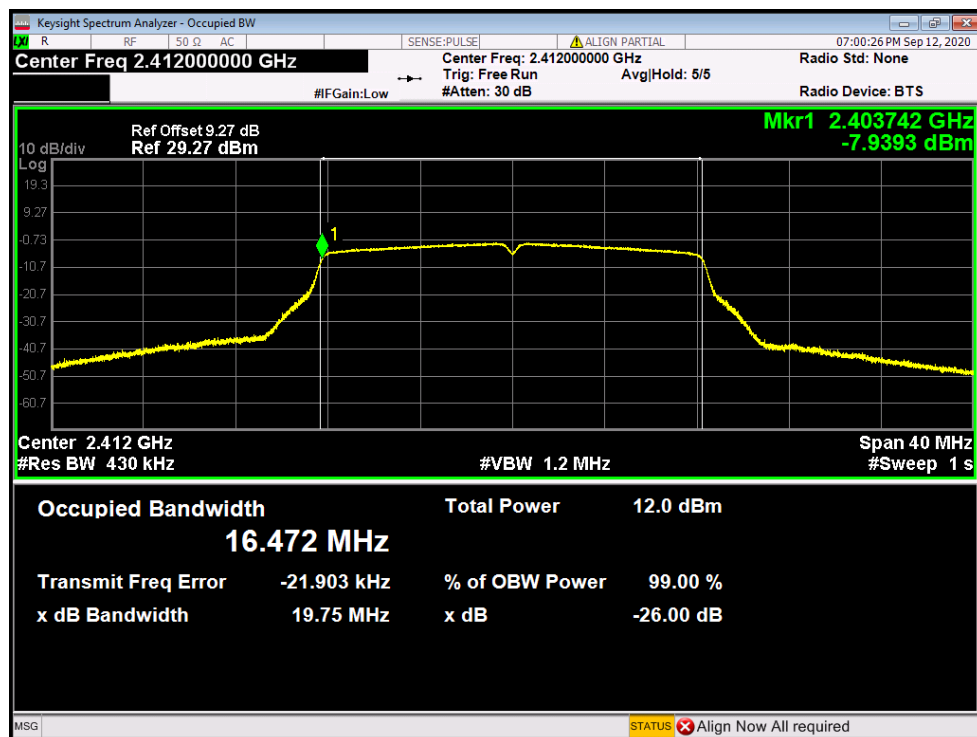


OBW NVNT g 2472MHz Ant1

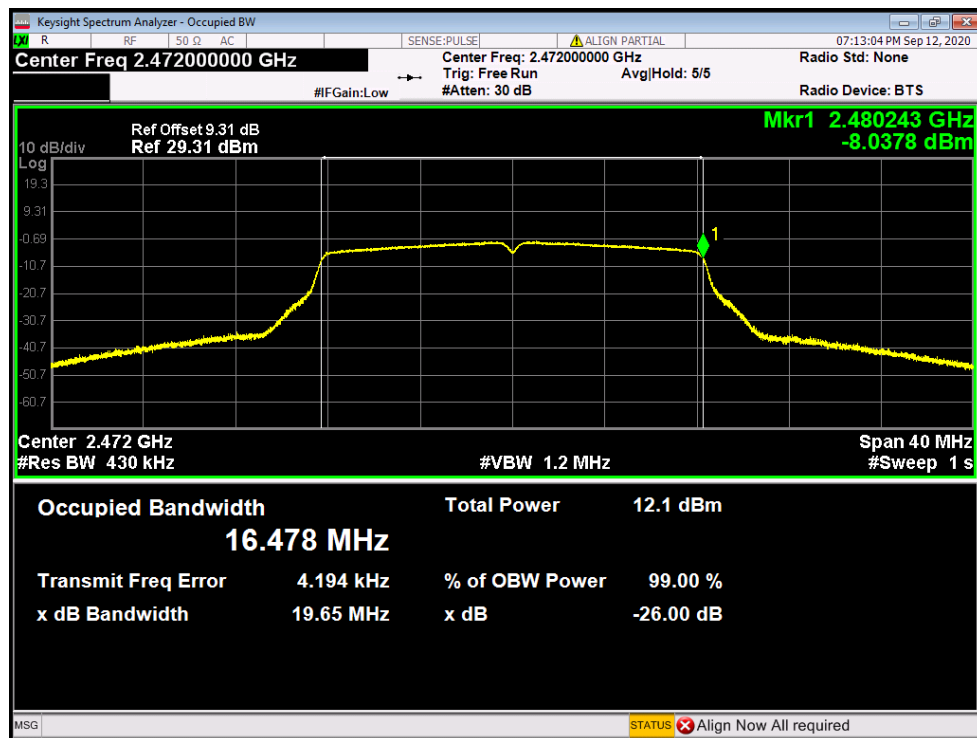


OBW NVNT n20 2412MHz Ant1

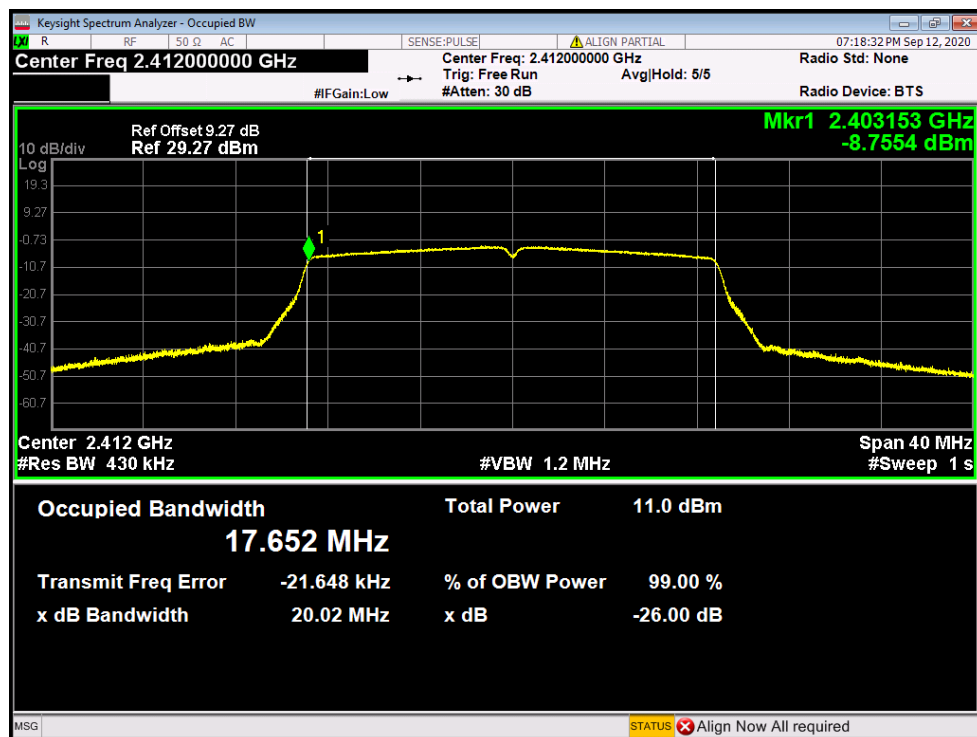


OBW NVNT n20 2472MHz Ant1

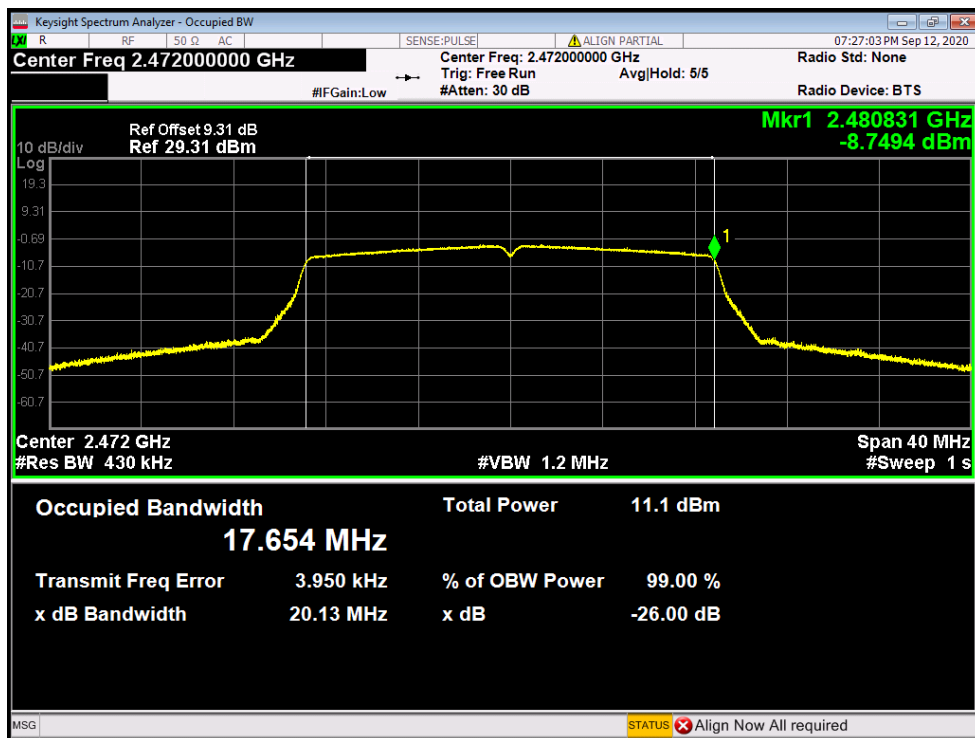

OBW NVNT n40 2422MHz Ant1

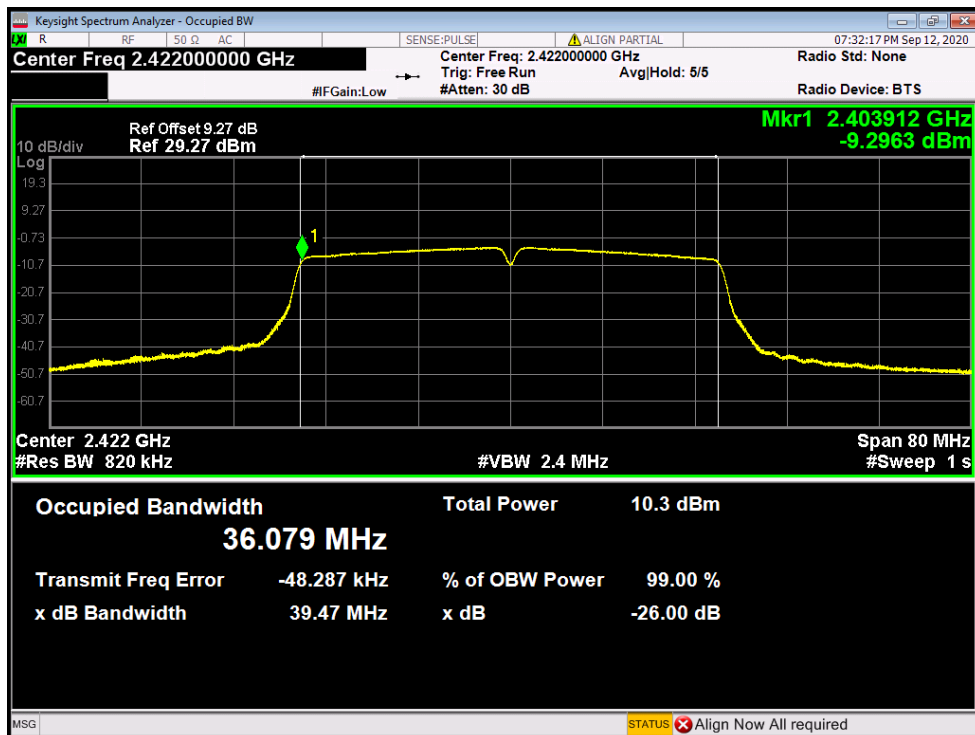

OBW NVNT n40 2462MHz Ant1

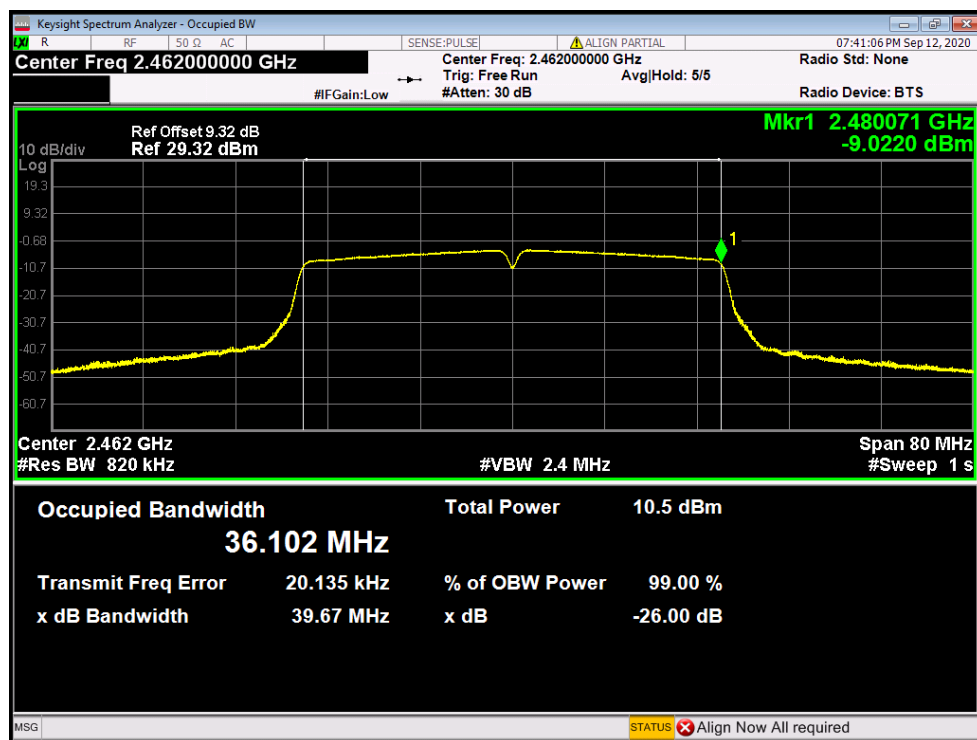



## 5.4.8 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	Antenna	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	b	2412	Ant1	2399.5	-45.99	-10	Pass
NVNT	b	2412	Ant1	2398.5	-50.2	-10	Pass
NVNT	b	2412	Ant1	2397.5	-49.65	-10	Pass
NVNT	b	2412	Ant1	2396.5	-50.3	-10	Pass
NVNT	b	2412	Ant1	2395.5	-51.98	-10	Pass
NVNT	b	2412	Ant1	2394.5	-53.9	-10	Pass
NVNT	b	2412	Ant1	2393.5	-56.25	-10	Pass
NVNT	b	2412	Ant1	2392.5	-54.17	-10	Pass
NVNT	b	2412	Ant1	2391.5	-55.67	-10	Pass
NVNT	b	2412	Ant1	2390.5	-57.75	-10	Pass
NVNT	b	2412	Ant1	2389.5	-58.04	-10	Pass
NVNT	b	2412	Ant1	2388.5	-57.9	-10	Pass
NVNT	b	2412	Ant1	2387.627	-57.1	-10	Pass
NVNT	b	2412	Ant1	2386.627	-57.06	-20	Pass
NVNT	b	2412	Ant1	2385.627	-57.29	-20	Pass
NVNT	b	2412	Ant1	2384.627	-57.63	-20	Pass
NVNT	b	2412	Ant1	2383.627	-57.89	-20	Pass
NVNT	b	2412	Ant1	2382.627	-57.84	-20	Pass
NVNT	b	2412	Ant1	2381.627	-58.15	-20	Pass
NVNT	b	2412	Ant1	2380.627	-58.27	-20	Pass
NVNT	b	2412	Ant1	2379.627	-58.3	-20	Pass
NVNT	b	2412	Ant1	2378.627	-58.31	-20	Pass
NVNT	b	2412	Ant1	2377.627	-58.25	-20	Pass
NVNT	b	2412	Ant1	2376.627	-58.15	-20	Pass
NVNT	b	2412	Ant1	2375.627	-58.14	-20	Pass
NVNT	b	2412	Ant1	2374.754	-58.11	-20	Pass
NVNT	b	2472	Ant1	2484	-45.3	-10	Pass
NVNT	b	2472	Ant1	2485	-45.59	-10	Pass
NVNT	b	2472	Ant1	2486	-44.47	-10	Pass
NVNT	b	2472	Ant1	2487	-43.39	-10	Pass
NVNT	b	2472	Ant1	2488	-45.56	-10	Pass
NVNT	b	2472	Ant1	2489	-47.34	-10	Pass
NVNT	b	2472	Ant1	2490	-51.17	-10	Pass
NVNT	b	2472	Ant1	2491	-52.33	-10	Pass
NVNT	b	2472	Ant1	2492	-53.37	-10	Pass
NVNT	b	2472	Ant1	2493	-56.85	-10	Pass
NVNT	b	2472	Ant1	2494	-57.68	-10	Pass
NVNT	b	2472	Ant1	2495	-57.81	-10	Pass
NVNT	b	2472	Ant1	2495.875	-56.9	-10	Pass

NVNT	b	2472	Ant1	2496.875	-56.38	-20	Pass
NVNT	b	2472	Ant1	2497.875	-56.21	-20	Pass
NVNT	b	2472	Ant1	2498.875	-57.02	-20	Pass
NVNT	b	2472	Ant1	2499.875	-57.2	-20	Pass
NVNT	b	2472	Ant1	2500.875	-57.45	-20	Pass
NVNT	b	2472	Ant1	2501.875	-57.42	-20	Pass
NVNT	b	2472	Ant1	2502.875	-57.47	-20	Pass
NVNT	b	2472	Ant1	2503.875	-57.72	-20	Pass
NVNT	b	2472	Ant1	2504.875	-57.83	-20	Pass
NVNT	b	2472	Ant1	2505.875	-57.71	-20	Pass
NVNT	b	2472	Ant1	2506.875	-57.47	-20	Pass
NVNT	b	2472	Ant1	2507.875	-57.4	-20	Pass
NVNT	b	2472	Ant1	2508.75	-57.34	-20	Pass
NVNT	g	2412	Ant1	2399.5	-34.91	-10	Pass
NVNT	g	2412	Ant1	2398.5	-36.07	-10	Pass
NVNT	g	2412	Ant1	2397.5	-37.04	-10	Pass
NVNT	g	2412	Ant1	2396.5	-38.29	-10	Pass
NVNT	g	2412	Ant1	2395.5	-39.62	-10	Pass
NVNT	g	2412	Ant1	2394.5	-41.06	-10	Pass
NVNT	g	2412	Ant1	2393.5	-42.39	-10	Pass
NVNT	g	2412	Ant1	2392.5	-44.15	-10	Pass
NVNT	g	2412	Ant1	2391.5	-46	-10	Pass
NVNT	g	2412	Ant1	2390.5	-47.71	-10	Pass
NVNT	g	2412	Ant1	2389.5	-49.58	-10	Pass
NVNT	g	2412	Ant1	2388.5	-51.13	-10	Pass
NVNT	g	2412	Ant1	2387.5	-52.19	-10	Pass
NVNT	g	2412	Ant1	2386.5	-52.35	-10	Pass
NVNT	g	2412	Ant1	2385.5	-52.78	-10	Pass
NVNT	g	2412	Ant1	2384.5	-52.86	-10	Pass
NVNT	g	2412	Ant1	2384.028	-53.12	-10	Pass
NVNT	g	2412	Ant1	2383.028	-53.23	-20	Pass
NVNT	g	2412	Ant1	2382.028	-53.38	-20	Pass
NVNT	g	2412	Ant1	2381.028	-53.42	-20	Pass
NVNT	g	2412	Ant1	2380.028	-53.67	-20	Pass
NVNT	g	2412	Ant1	2379.028	-53.96	-20	Pass
NVNT	g	2412	Ant1	2378.028	-54.07	-20	Pass
NVNT	g	2412	Ant1	2377.028	-53.94	-20	Pass
NVNT	g	2412	Ant1	2376.028	-54.2	-20	Pass
NVNT	g	2412	Ant1	2375.028	-54.28	-20	Pass
NVNT	g	2412	Ant1	2374.028	-54.31	-20	Pass
NVNT	g	2412	Ant1	2373.028	-54.41	-20	Pass
NVNT	g	2412	Ant1	2372.028	-54.39	-20	Pass

NVNT	g	2412	Ant1	2371.028	-54.57	-20	Pass
NVNT	g	2412	Ant1	2370.028	-54.54	-20	Pass
NVNT	g	2412	Ant1	2369.028	-54.75	-20	Pass
NVNT	g	2412	Ant1	2368.028	-54.83	-20	Pass
NVNT	g	2412	Ant1	2367.556	-54.81	-20	Pass
NVNT	g	2472	Ant1	2484	-34.45	-10	Pass
NVNT	g	2472	Ant1	2485	-35.8	-10	Pass
NVNT	g	2472	Ant1	2486	-37.03	-10	Pass
NVNT	g	2472	Ant1	2487	-37.98	-10	Pass
NVNT	g	2472	Ant1	2488	-39.71	-10	Pass
NVNT	g	2472	Ant1	2489	-40.77	-10	Pass
NVNT	g	2472	Ant1	2490	-42.56	-10	Pass
NVNT	g	2472	Ant1	2491	-43.85	-10	Pass
NVNT	g	2472	Ant1	2492	-45.57	-10	Pass
NVNT	g	2472	Ant1	2493	-47.39	-10	Pass
NVNT	g	2472	Ant1	2494	-48.77	-10	Pass
NVNT	g	2472	Ant1	2495	-49.88	-10	Pass
NVNT	g	2472	Ant1	2496	-50.98	-10	Pass
NVNT	g	2472	Ant1	2497	-51.52	-10	Pass
NVNT	g	2472	Ant1	2498	-51.58	-10	Pass
NVNT	g	2472	Ant1	2499	-52.03	-10	Pass
NVNT	g	2472	Ant1	2499.478	-52.35	-10	Pass
NVNT	g	2472	Ant1	2500.478	-52.53	-20	Pass
NVNT	g	2472	Ant1	2501.478	-52.66	-20	Pass
NVNT	g	2472	Ant1	2502.478	-53.03	-20	Pass
NVNT	g	2472	Ant1	2503.478	-53.24	-20	Pass
NVNT	g	2472	Ant1	2504.478	-53.22	-20	Pass
NVNT	g	2472	Ant1	2505.478	-53.32	-20	Pass
NVNT	g	2472	Ant1	2506.478	-53.66	-20	Pass
NVNT	g	2472	Ant1	2507.478	-53.5	-20	Pass
NVNT	g	2472	Ant1	2508.478	-53.51	-20	Pass
NVNT	g	2472	Ant1	2509.478	-53.93	-20	Pass
NVNT	g	2472	Ant1	2510.478	-53.9	-20	Pass
NVNT	g	2472	Ant1	2511.478	-54.05	-20	Pass
NVNT	g	2472	Ant1	2512.478	-54.11	-20	Pass
NVNT	g	2472	Ant1	2513.478	-54.01	-20	Pass
NVNT	g	2472	Ant1	2514.478	-54.12	-20	Pass
NVNT	g	2472	Ant1	2515.478	-54.18	-20	Pass
NVNT	g	2472	Ant1	2515.956	-54.16	-20	Pass
NVNT	n20	2412	Ant1	2399.5	-36.99	-10	Pass
NVNT	n20	2412	Ant1	2398.5	-38.11	-10	Pass
NVNT	n20	2412	Ant1	2397.5	-39.1	-10	Pass

NVNT	n20	2412	Ant1	2396.5	-40.31	-10	Pass
NVNT	n20	2412	Ant1	2395.5	-41.6	-10	Pass
NVNT	n20	2412	Ant1	2394.5	-42.97	-10	Pass
NVNT	n20	2412	Ant1	2393.5	-44	-10	Pass
NVNT	n20	2412	Ant1	2392.5	-45.16	-10	Pass
NVNT	n20	2412	Ant1	2391.5	-46.89	-10	Pass
NVNT	n20	2412	Ant1	2390.5	-48.77	-10	Pass
NVNT	n20	2412	Ant1	2389.5	-50.33	-10	Pass
NVNT	n20	2412	Ant1	2388.5	-51.84	-10	Pass
NVNT	n20	2412	Ant1	2387.5	-53.22	-10	Pass
NVNT	n20	2412	Ant1	2386.5	-54.03	-10	Pass
NVNT	n20	2412	Ant1	2385.5	-54.57	-10	Pass
NVNT	n20	2412	Ant1	2384.5	-54.85	-10	Pass
NVNT	n20	2412	Ant1	2383.5	-55.03	-10	Pass
NVNT	n20	2412	Ant1	2382.848	-55.15	-10	Pass
NVNT	n20	2412	Ant1	2381.848	-55.16	-20	Pass
NVNT	n20	2412	Ant1	2380.848	-55.38	-20	Pass
NVNT	n20	2412	Ant1	2379.848	-55.5	-20	Pass
NVNT	n20	2412	Ant1	2378.848	-55.67	-20	Pass
NVNT	n20	2412	Ant1	2377.848	-55.54	-20	Pass
NVNT	n20	2412	Ant1	2376.848	-55.68	-20	Pass
NVNT	n20	2412	Ant1	2375.848	-55.72	-20	Pass
NVNT	n20	2412	Ant1	2374.848	-55.68	-20	Pass
NVNT	n20	2412	Ant1	2373.848	-55.87	-20	Pass
NVNT	n20	2412	Ant1	2372.848	-55.89	-20	Pass
NVNT	n20	2412	Ant1	2371.848	-55.94	-20	Pass
NVNT	n20	2412	Ant1	2370.848	-56.06	-20	Pass
NVNT	n20	2412	Ant1	2369.848	-56.13	-20	Pass
NVNT	n20	2412	Ant1	2368.848	-56.18	-20	Pass
NVNT	n20	2412	Ant1	2367.848	-56.25	-20	Pass
NVNT	n20	2412	Ant1	2366.848	-56.36	-20	Pass
NVNT	n20	2412	Ant1	2365.848	-56.36	-20	Pass
NVNT	n20	2412	Ant1	2365.196	-56.34	-20	Pass
NVNT	n20	2472	Ant1	2484	-36.79	-10	Pass
NVNT	n20	2472	Ant1	2485	-37.9	-10	Pass
NVNT	n20	2472	Ant1	2486	-39.11	-10	Pass
NVNT	n20	2472	Ant1	2487	-40.1	-10	Pass
NVNT	n20	2472	Ant1	2488	-41.21	-10	Pass
NVNT	n20	2472	Ant1	2489	-42.87	-10	Pass
NVNT	n20	2472	Ant1	2490	-43.99	-10	Pass
NVNT	n20	2472	Ant1	2491	-45.22	-10	Pass
NVNT	n20	2472	Ant1	2492	-46.95	-10	Pass

NVNT	n20	2472	Ant1	2493	-48.11	-10	Pass
NVNT	n20	2472	Ant1	2494	-49.42	-10	Pass
NVNT	n20	2472	Ant1	2495	-50.79	-10	Pass
NVNT	n20	2472	Ant1	2496	-51.96	-10	Pass
NVNT	n20	2472	Ant1	2497	-52.89	-10	Pass
NVNT	n20	2472	Ant1	2498	-53.11	-10	Pass
NVNT	n20	2472	Ant1	2499	-53.54	-10	Pass
NVNT	n20	2472	Ant1	2500	-53.85	-10	Pass
NVNT	n20	2472	Ant1	2500.654	-54.02	-10	Pass
NVNT	n20	2472	Ant1	2501.654	-54.31	-20	Pass
NVNT	n20	2472	Ant1	2502.654	-54.58	-20	Pass
NVNT	n20	2472	Ant1	2503.654	-54.67	-20	Pass
NVNT	n20	2472	Ant1	2504.654	-54.75	-20	Pass
NVNT	n20	2472	Ant1	2505.654	-55.2	-20	Pass
NVNT	n20	2472	Ant1	2506.654	-55.13	-20	Pass
NVNT	n20	2472	Ant1	2507.654	-55.26	-20	Pass
NVNT	n20	2472	Ant1	2508.654	-55.39	-20	Pass
NVNT	n20	2472	Ant1	2509.654	-55.42	-20	Pass
NVNT	n20	2472	Ant1	2510.654	-55.43	-20	Pass
NVNT	n20	2472	Ant1	2511.654	-55.54	-20	Pass
NVNT	n20	2472	Ant1	2512.654	-55.56	-20	Pass
NVNT	n20	2472	Ant1	2513.654	-55.66	-20	Pass
NVNT	n20	2472	Ant1	2514.654	-55.67	-20	Pass
NVNT	n20	2472	Ant1	2515.654	-55.62	-20	Pass
NVNT	n20	2472	Ant1	2516.654	-55.55	-20	Pass
NVNT	n20	2472	Ant1	2517.654	-55.7	-20	Pass
NVNT	n20	2472	Ant1	2518.308	-55.69	-20	Pass
NVNT	n40	2422	Ant1	2399.5	-40.08	-10	Pass
NVNT	n40	2422	Ant1	2398.5	-41.85	-10	Pass
NVNT	n40	2422	Ant1	2397.5	-41.22	-10	Pass
NVNT	n40	2422	Ant1	2396.5	-42.33	-10	Pass
NVNT	n40	2422	Ant1	2395.5	-42.61	-10	Pass
NVNT	n40	2422	Ant1	2394.5	-44	-10	Pass
NVNT	n40	2422	Ant1	2393.5	-44.12	-10	Pass
NVNT	n40	2422	Ant1	2392.5	-44.43	-10	Pass
NVNT	n40	2422	Ant1	2391.5	-44.92	-10	Pass
NVNT	n40	2422	Ant1	2390.5	-45.48	-10	Pass
NVNT	n40	2422	Ant1	2389.5	-46.03	-10	Pass
NVNT	n40	2422	Ant1	2388.5	-46.44	-10	Pass
NVNT	n40	2422	Ant1	2387.5	-47.31	-10	Pass
NVNT	n40	2422	Ant1	2386.5	-48.1	-10	Pass
NVNT	n40	2422	Ant1	2385.5	-48.34	-10	Pass

NV/NT	n40	2422	Ant1	2384.5	-49.41	-10	Pass
NV/NT	n40	2422	Ant1	2383.5	-49.96	-10	Pass
NV/NT	n40	2422	Ant1	2382.5	-51.15	-10	Pass
NV/NT	n40	2422	Ant1	2381.5	-51.58	-10	Pass
NV/NT	n40	2422	Ant1	2380.5	-52.03	-10	Pass
NV/NT	n40	2422	Ant1	2379.5	-53.08	-10	Pass
NV/NT	n40	2422	Ant1	2378.5	-53.02	-10	Pass
NV/NT	n40	2422	Ant1	2377.5	-53.53	-10	Pass
NV/NT	n40	2422	Ant1	2376.5	-53.99	-10	Pass
NV/NT	n40	2422	Ant1	2375.5	-54.46	-10	Pass
NV/NT	n40	2422	Ant1	2374.5	-55.09	-10	Pass
NV/NT	n40	2422	Ant1	2373.5	-55.34	-10	Pass
NV/NT	n40	2422	Ant1	2372.5	-55.52	-10	Pass
NV/NT	n40	2422	Ant1	2371.5	-55.5	-10	Pass
NV/NT	n40	2422	Ant1	2370.5	-55.75	-10	Pass
NV/NT	n40	2422	Ant1	2369.5	-55.91	-10	Pass
NV/NT	n40	2422	Ant1	2368.5	-56.01	-10	Pass
NV/NT	n40	2422	Ant1	2367.5	-56.16	-10	Pass
NV/NT	n40	2422	Ant1	2366.5	-56.19	-10	Pass
NV/NT	n40	2422	Ant1	2365.5	-56.26	-10	Pass
NV/NT	n40	2422	Ant1	2364.5	-56.38	-10	Pass
NV/NT	n40	2422	Ant1	2364.421	-56.49	-10	Pass
NV/NT	n40	2422	Ant1	2363.421	-56.41	-20	Pass
NV/NT	n40	2422	Ant1	2362.421	-56.71	-20	Pass
NV/NT	n40	2422	Ant1	2361.421	-56.51	-20	Pass
NV/NT	n40	2422	Ant1	2360.421	-56.73	-20	Pass
NV/NT	n40	2422	Ant1	2359.421	-56.71	-20	Pass
NV/NT	n40	2422	Ant1	2358.421	-56.53	-20	Pass
NV/NT	n40	2422	Ant1	2357.421	-56.8	-20	Pass
NV/NT	n40	2422	Ant1	2356.421	-56.9	-20	Pass
NV/NT	n40	2422	Ant1	2355.421	-57.05	-20	Pass
NV/NT	n40	2422	Ant1	2354.421	-56.88	-20	Pass
NV/NT	n40	2422	Ant1	2353.421	-57.05	-20	Pass
NV/NT	n40	2422	Ant1	2352.421	-57.11	-20	Pass
NV/NT	n40	2422	Ant1	2351.421	-57.02	-20	Pass
NV/NT	n40	2422	Ant1	2350.421	-57.11	-20	Pass
NV/NT	n40	2422	Ant1	2349.421	-57.15	-20	Pass
NV/NT	n40	2422	Ant1	2348.421	-57.35	-20	Pass
NV/NT	n40	2422	Ant1	2347.421	-57.58	-20	Pass
NV/NT	n40	2422	Ant1	2346.421	-57.35	-20	Pass
NV/NT	n40	2422	Ant1	2345.421	-57.53	-20	Pass
NV/NT	n40	2422	Ant1	2344.421	-57.33	-20	Pass


NV/NT	n40	2422	Ant1	2343.421	-57.39	-20	Pass
NV/NT	n40	2422	Ant1	2342.421	-57.52	-20	Pass
NV/NT	n40	2422	Ant1	2341.421	-57.58	-20	Pass
NV/NT	n40	2422	Ant1	2340.421	-57.58	-20	Pass
NV/NT	n40	2422	Ant1	2339.421	-57.84	-20	Pass
NV/NT	n40	2422	Ant1	2338.421	-57.68	-20	Pass
NV/NT	n40	2422	Ant1	2337.421	-57.81	-20	Pass
NV/NT	n40	2422	Ant1	2336.421	-57.75	-20	Pass
NV/NT	n40	2422	Ant1	2335.421	-57.99	-20	Pass
NV/NT	n40	2422	Ant1	2334.421	-57.96	-20	Pass
NV/NT	n40	2422	Ant1	2333.421	-58.2	-20	Pass
NV/NT	n40	2422	Ant1	2332.421	-58.07	-20	Pass
NV/NT	n40	2422	Ant1	2331.421	-58.09	-20	Pass
NV/NT	n40	2422	Ant1	2330.421	-58.07	-20	Pass
NV/NT	n40	2422	Ant1	2329.421	-58.05	-20	Pass
NV/NT	n40	2422	Ant1	2328.421	-58.15	-20	Pass
NV/NT	n40	2422	Ant1	2328.342	-58.44	-20	Pass
NV/NT	n40	2462	Ant1	2484	-40.43	-10	Pass
NV/NT	n40	2462	Ant1	2485	-41.23	-10	Pass
NV/NT	n40	2462	Ant1	2486	-42.13	-10	Pass
NV/NT	n40	2462	Ant1	2487	-42.78	-10	Pass
NV/NT	n40	2462	Ant1	2488	-43.45	-10	Pass
NV/NT	n40	2462	Ant1	2489	-44.41	-10	Pass
NV/NT	n40	2462	Ant1	2490	-44.89	-10	Pass
NV/NT	n40	2462	Ant1	2491	-45.66	-10	Pass
NV/NT	n40	2462	Ant1	2492	-45.72	-10	Pass
NV/NT	n40	2462	Ant1	2493	-46.63	-10	Pass
NV/NT	n40	2462	Ant1	2494	-46.47	-10	Pass
NV/NT	n40	2462	Ant1	2495	-47.16	-10	Pass
NV/NT	n40	2462	Ant1	2496	-47.89	-10	Pass
NV/NT	n40	2462	Ant1	2497	-48.37	-10	Pass
NV/NT	n40	2462	Ant1	2498	-48.71	-10	Pass
NV/NT	n40	2462	Ant1	2499	-49.17	-10	Pass
NV/NT	n40	2462	Ant1	2500	-49.82	-10	Pass
NV/NT	n40	2462	Ant1	2501	-50.28	-10	Pass
NV/NT	n40	2462	Ant1	2502	-50.86	-10	Pass
NV/NT	n40	2462	Ant1	2503	-51.05	-10	Pass
NV/NT	n40	2462	Ant1	2504	-51.79	-10	Pass
NV/NT	n40	2462	Ant1	2505	-52	-10	Pass
NV/NT	n40	2462	Ant1	2506	-51.99	-10	Pass
NV/NT	n40	2462	Ant1	2507	-52.38	-10	Pass
NV/NT	n40	2462	Ant1	2508	-52.72	-10	Pass

NV/NT	n40	2462	Ant1	2509	-53.22	-10	Pass
NV/NT	n40	2462	Ant1	2510	-53.22	-10	Pass
NV/NT	n40	2462	Ant1	2511	-53.96	-10	Pass
NV/NT	n40	2462	Ant1	2512	-53.99	-10	Pass
NV/NT	n40	2462	Ant1	2513	-54.76	-10	Pass
NV/NT	n40	2462	Ant1	2514	-54.2	-10	Pass
NV/NT	n40	2462	Ant1	2515	-54.53	-10	Pass
NV/NT	n40	2462	Ant1	2516	-54.84	-10	Pass
NV/NT	n40	2462	Ant1	2517	-55.15	-10	Pass
NV/NT	n40	2462	Ant1	2518	-55.13	-10	Pass
NV/NT	n40	2462	Ant1	2519	-54.73	-10	Pass
NV/NT	n40	2462	Ant1	2519.102	-55.32	-10	Pass
NV/NT	n40	2462	Ant1	2520.102	-54.91	-20	Pass
NV/NT	n40	2462	Ant1	2521.102	-55.53	-20	Pass
NV/NT	n40	2462	Ant1	2522.102	-55.37	-20	Pass
NV/NT	n40	2462	Ant1	2523.102	-55.37	-20	Pass
NV/NT	n40	2462	Ant1	2524.102	-55.54	-20	Pass
NV/NT	n40	2462	Ant1	2525.102	-55.53	-20	Pass
NV/NT	n40	2462	Ant1	2526.102	-55.53	-20	Pass
NV/NT	n40	2462	Ant1	2527.102	-55.45	-20	Pass
NV/NT	n40	2462	Ant1	2528.102	-55.6	-20	Pass
NV/NT	n40	2462	Ant1	2529.102	-55.73	-20	Pass
NV/NT	n40	2462	Ant1	2530.102	-55.59	-20	Pass
NV/NT	n40	2462	Ant1	2531.102	-55.62	-20	Pass
NV/NT	n40	2462	Ant1	2532.102	-55.56	-20	Pass
NV/NT	n40	2462	Ant1	2533.102	-55.8	-20	Pass
NV/NT	n40	2462	Ant1	2534.102	-55.82	-20	Pass
NV/NT	n40	2462	Ant1	2535.102	-55.77	-20	Pass
NV/NT	n40	2462	Ant1	2536.102	-56.01	-20	Pass
NV/NT	n40	2462	Ant1	2537.102	-55.8	-20	Pass
NV/NT	n40	2462	Ant1	2538.102	-55.96	-20	Pass
NV/NT	n40	2462	Ant1	2539.102	-55.79	-20	Pass
NV/NT	n40	2462	Ant1	2540.102	-55.87	-20	Pass
NV/NT	n40	2462	Ant1	2541.102	-55.67	-20	Pass
NV/NT	n40	2462	Ant1	2542.102	-56.09	-20	Pass
NV/NT	n40	2462	Ant1	2543.102	-55.84	-20	Pass
NV/NT	n40	2462	Ant1	2544.102	-55.92	-20	Pass
NV/NT	n40	2462	Ant1	2545.102	-55.85	-20	Pass
NV/NT	n40	2462	Ant1	2546.102	-55.91	-20	Pass
NV/NT	n40	2462	Ant1	2547.102	-56	-20	Pass
NV/NT	n40	2462	Ant1	2548.102	-56.1	-20	Pass
NV/NT	n40	2462	Ant1	2549.102	-55.91	-20	Pass




NVNT	n40	2462	Ant1	2550.102	-56.21	-20	Pass
NVNT	n40	2462	Ant1	2551.102	-56.06	-20	Pass
NVNT	n40	2462	Ant1	2552.102	-56.07	-20	Pass
NVNT	n40	2462	Ant1	2553.102	-56.03	-20	Pass
NVNT	n40	2462	Ant1	2554.102	-56.05	-20	Pass
NVNT	n40	2462	Ant1	2555.102	-56.18	-20	Pass
NVNT	n40	2462	Ant1	2555.204	-56.27	-20	Pass


Tx. Emissions OOB NVNT b 2412MHz Ant1

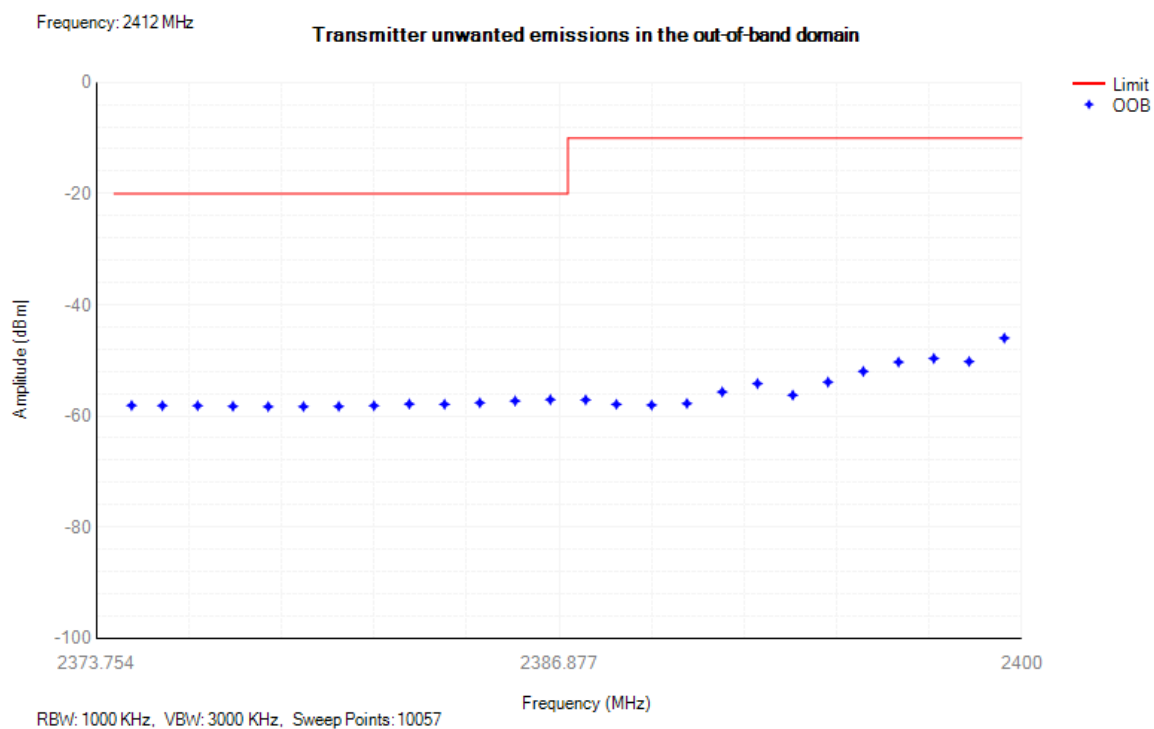


Tx. Emissions OOB NVNT b 2472MHz Ant1

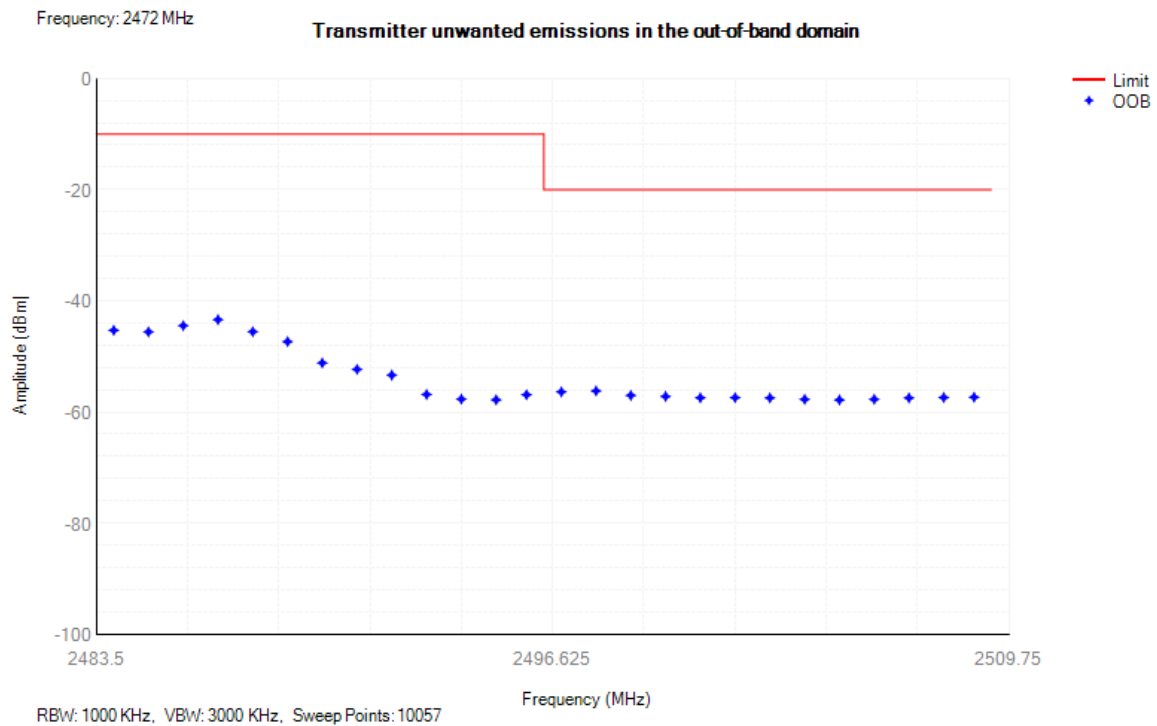


Tx. Emissions OOB NVNT g 2412MHz Ant1

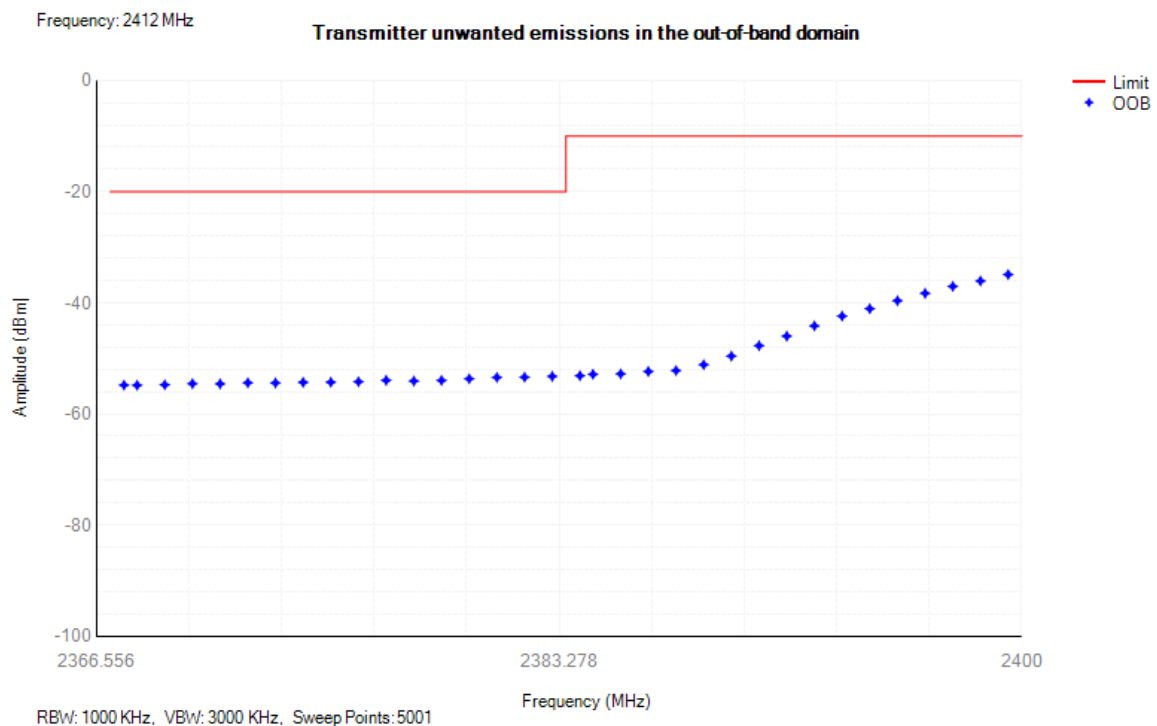


Tx. Emissions OOB NVNT g 2472MHz Ant1

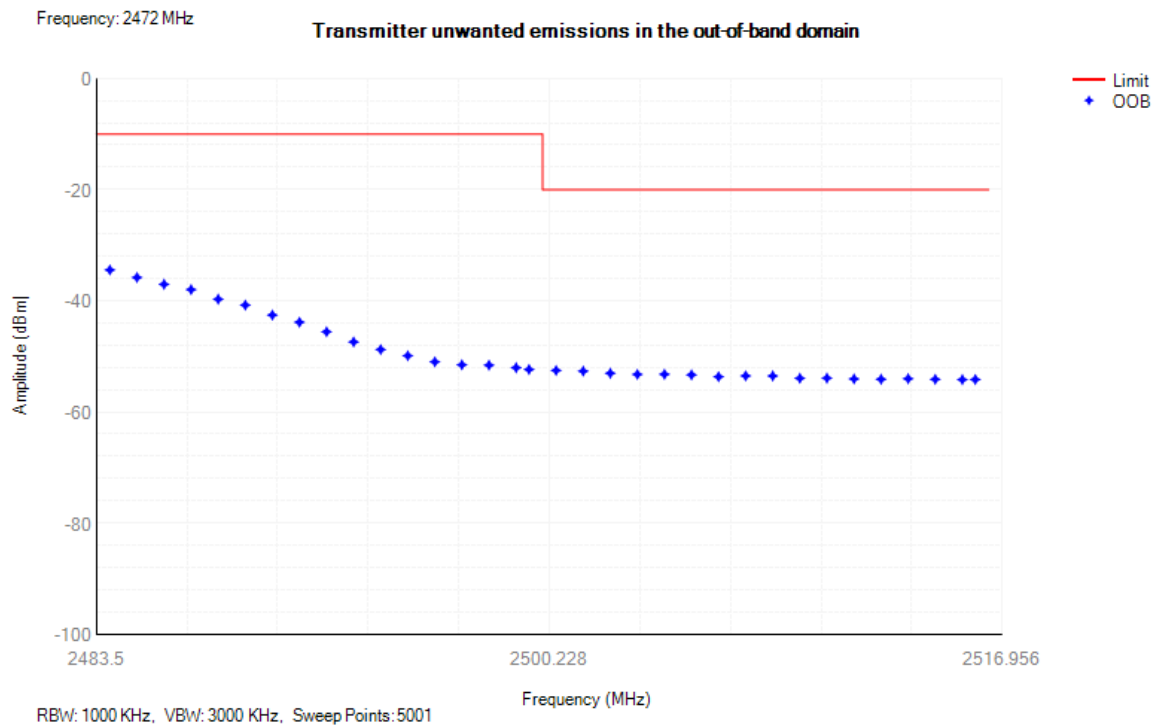


Tx. Emissions OOB NVNT n20 2412MHz Ant1

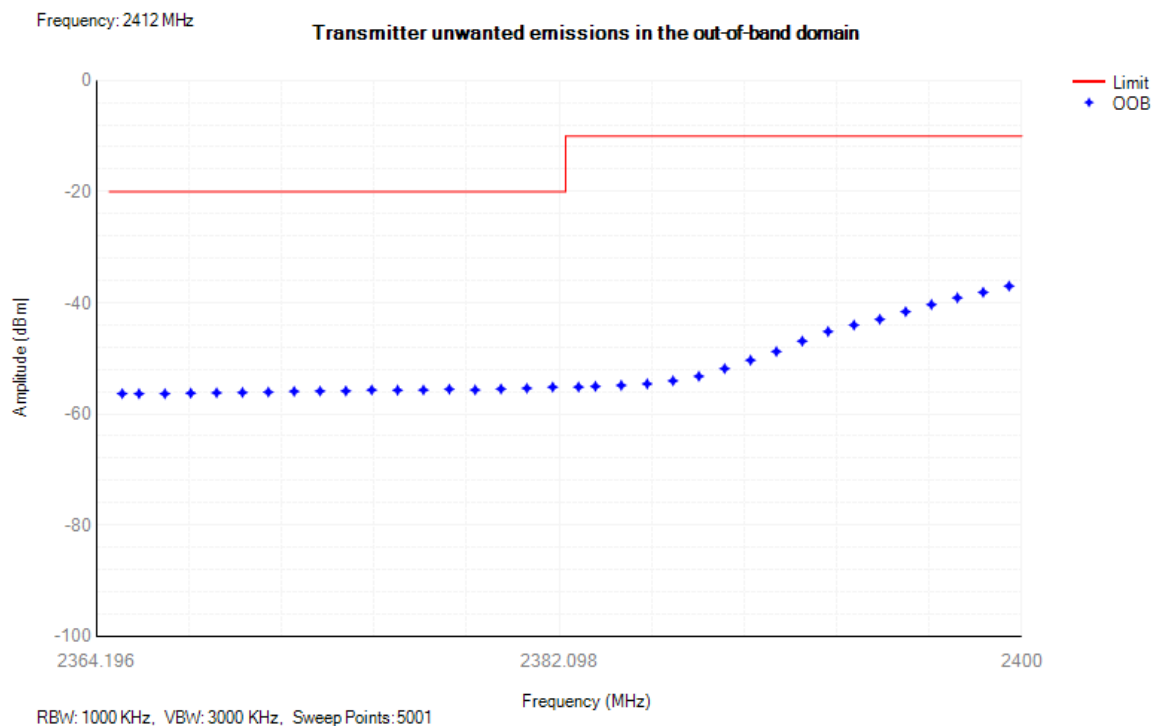


Tx. Emissions OOB NVNT n20 2472MHz Ant1

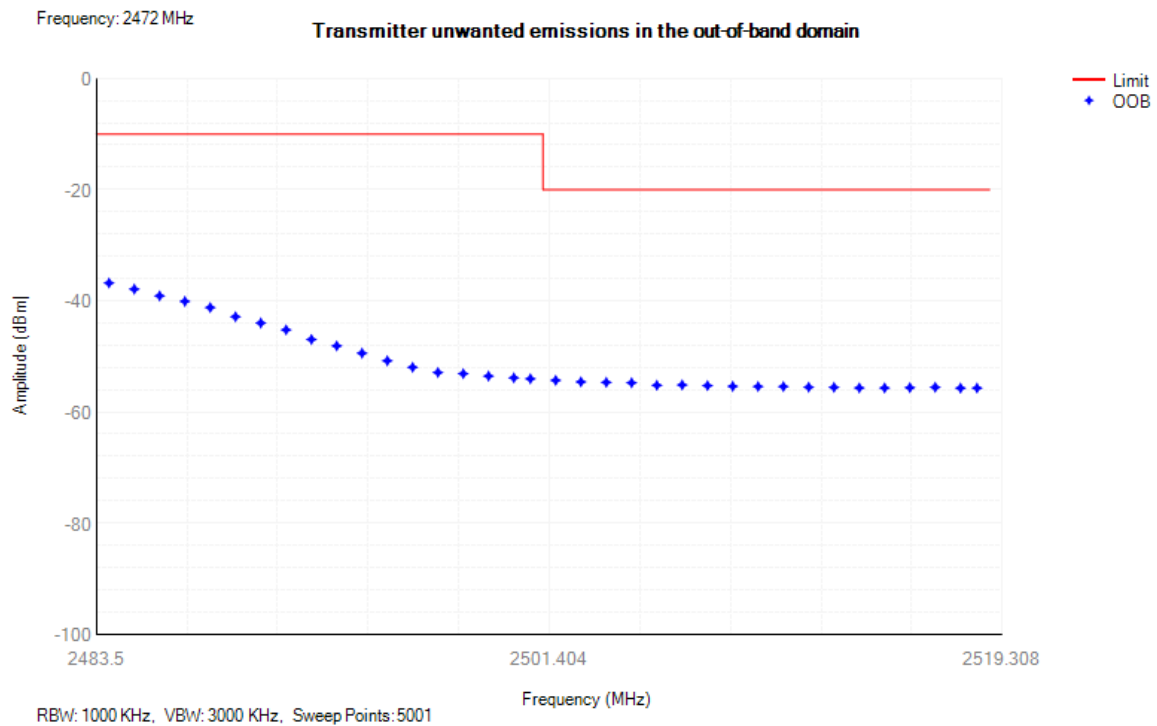

Tx. Emissions OOB NVNT n40 2422MHz Ant1

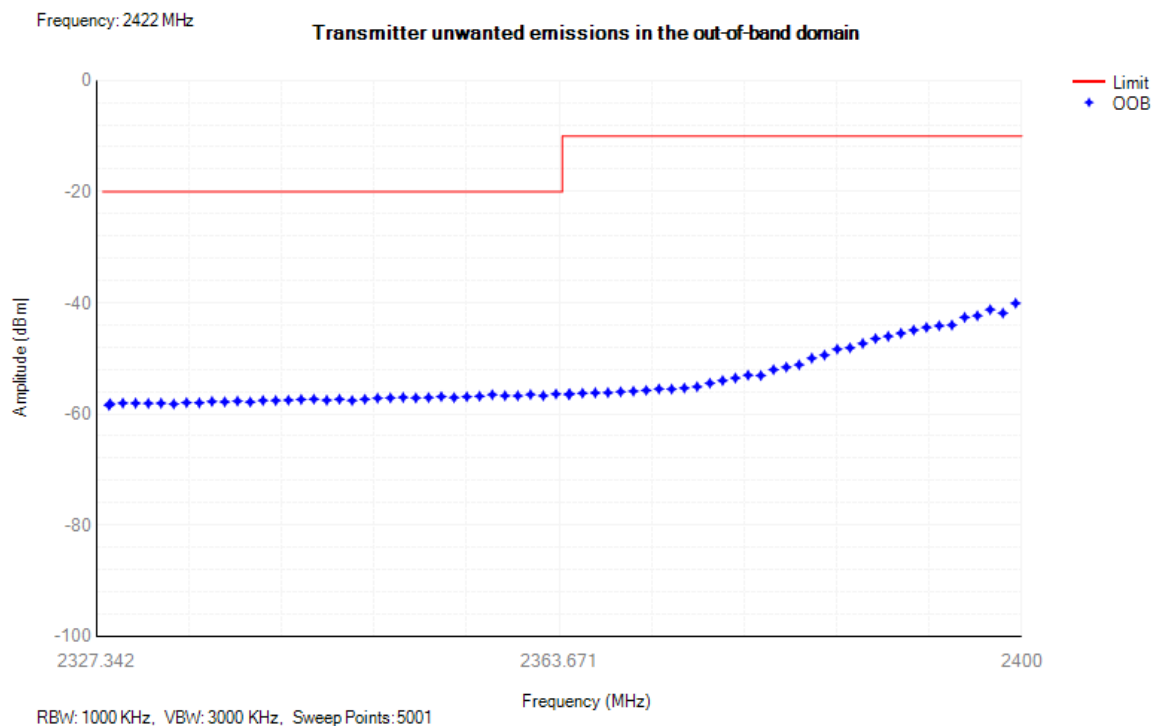

Tx. Emissions OOB NVNT n40 2462MHz Ant1

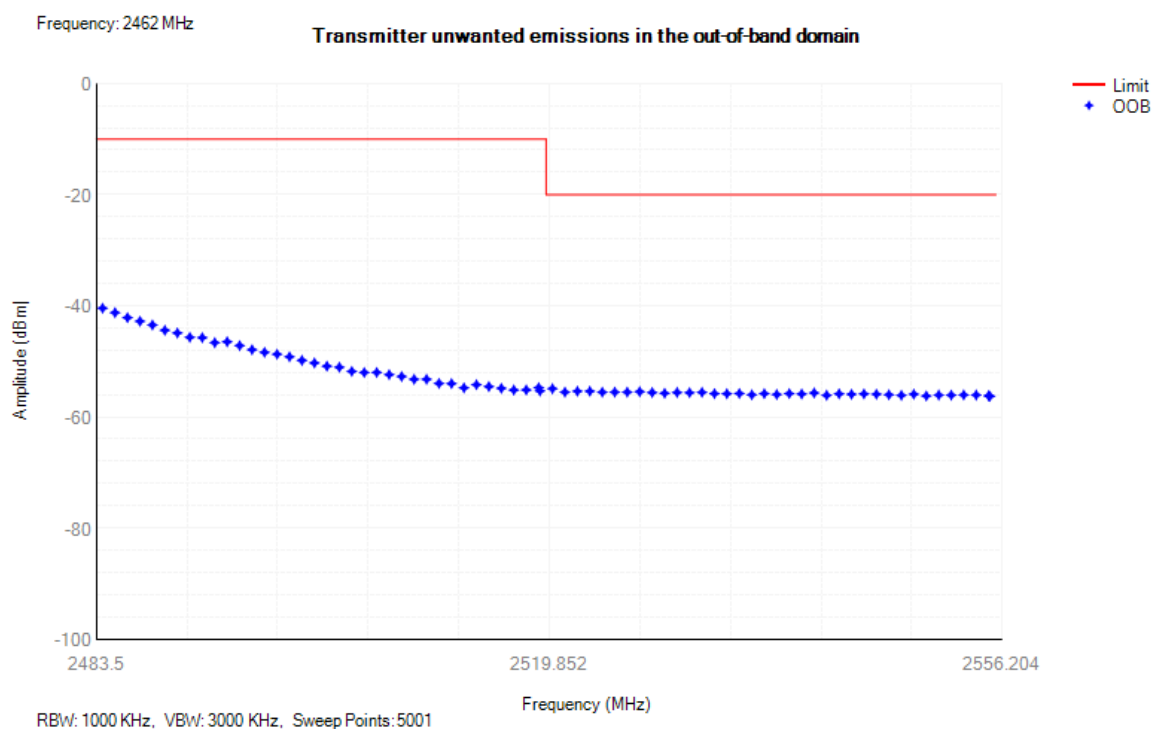


## 5.4.11 Receiver Blocking


Condition	Mode	Frequency (MHz)	Antenna	Wanted Power (dBm)	Blocking Frequency (MHz)	Blocking Power (dBm)	PER (%)	Limit (%)	Verdict
NVNT	b	2412	Ant1	-68	2380	-32.2	1.55	10	Pass
NVNT	b	2412	Ant1	-68	2504	-32.2	3.2	10	Pass
NVNT	b	2412	Ant1	-74	2300	-32.2	4.82	10	Pass
NVNT	b	2412	Ant1	-74	2330	-32.2	2.54	10	Pass
NVNT	b	2412	Ant1	-74	2360	-32.2	3.22	10	Pass
NVNT	b	2412	Ant1	-74	2524	-32.2	2.69	10	Pass
NVNT	b	2412	Ant1	-74	2584	-32.2	5.28	10	Pass
NVNT	b	2412	Ant1	-74	2674	-32.2	3.54	10	Pass
NVNT	b	2472	Ant1	-68	2380	-32.2	5.36	10	Pass
NVNT	b	2472	Ant1	-68	2504	-32.2	2.62	10	Pass
NVNT	b	2472	Ant1	-74	2300	-32.2	5.21	10	Pass
NVNT	b	2472	Ant1	-74	2330	-32.2	3.25	10	Pass
NVNT	b	2472	Ant1	-74	2360	-32.2	1.42	10	Pass
NVNT	b	2472	Ant1	-74	2524	-32.2	3.22	10	Pass
NVNT	b	2472	Ant1	-74	2584	-32.2	4.21	10	Pass
NVNT	b	2472	Ant1	-74	2674	-32.2	1.88	10	Pass
NVNT	g	2412	Ant1	-68	2380	-32.2	2.41	10	Pass
NVNT	g	2412	Ant1	-68	2504	-32.2	3.24	10	Pass
NVNT	g	2412	Ant1	-74	2300	-32.2	2.41	10	Pass
NVNT	g	2412	Ant1	-74	2330	-32.2	3.24	10	Pass
NVNT	g	2412	Ant1	-74	2360	-32.2	4.36	10	Pass
NVNT	g	2412	Ant1	-74	2524	-32.2	1.58	10	Pass
NVNT	g	2412	Ant1	-74	2584	-32.2	1.62	10	Pass
NVNT	g	2412	Ant1	-74	2674	-32.2	3.22	10	Pass
NVNT	g	2472	Ant1	-68	2380	-32.2	1.25	10	Pass
NVNT	g	2472	Ant1	-68	2504	-32.2	7.16	10	Pass
NVNT	g	2472	Ant1	-74	2300	-32.2	1.35	10	Pass
NVNT	g	2472	Ant1	-74	2330	-32.2	4.57	10	Pass
NVNT	g	2472	Ant1	-74	2360	-32.2	1.93	10	Pass
NVNT	g	2472	Ant1	-74	2524	-32.2	7.88	10	Pass
NVNT	g	2472	Ant1	-74	2584	-32.2	2.5	10	Pass
NVNT	g	2472	Ant1	-74	2674	-32.2	2.91	10	Pass
NVNT	n20	2412	Ant1	-68	2380	-32.2	1.52	10	Pass
NVNT	n20	2412	Ant1	-68	2504	-32.2	2.63	10	Pass
NVNT	n20	2412	Ant1	-74	2300	-32.2	4.86	10	Pass
NVNT	n20	2412	Ant1	-74	2330	-32.2	1.35	10	Pass
NVNT	n20	2412	Ant1	-74	2360	-32.2	1.62	10	Pass
NVNT	n20	2412	Ant1	-74	2524	-32.2	5.68	10	Pass

NVNT	n20	2412	Ant1	-74	2584	-32.2	5.41	10	Pass
NVNT	n20	2412	Ant1	-74	2674	-32.2	1.17	10	Pass
NVNT	n20	2472	Ant1	-68	2380	-32.2	5.79	10	Pass
NVNT	n20	2472	Ant1	-68	2504	-32.2	1.41	10	Pass
NVNT	n20	2472	Ant1	-74	2300	-32.2	3.23	10	Pass
NVNT	n20	2472	Ant1	-74	2330	-32.2	1.47	10	Pass
NVNT	n20	2472	Ant1	-74	2360	-32.2	3.13	10	Pass
NVNT	n20	2472	Ant1	-74	2524	-32.2	2.97	10	Pass
NVNT	n20	2472	Ant1	-74	2584	-32.2	5.17	10	Pass
NVNT	n20	2472	Ant1	-74	2674	-32.2	6.37	10	Pass
NVNT	n40	2422	Ant1	-68	2380	-32.2	3.79	10	Pass
NVNT	n40	2422	Ant1	-68	2504	-32.2	3.28	10	Pass
NVNT	n40	2422	Ant1	-74	2300	-32.2	7.13	10	Pass
NVNT	n40	2422	Ant1	-74	2330	-32.2	1.17	10	Pass
NVNT	n40	2422	Ant1	-74	2360	-32.2	2.78	10	Pass
NVNT	n40	2422	Ant1	-74	2524	-32.2	3.67	10	Pass
NVNT	n40	2422	Ant1	-74	2584	-32.2	4.57	10	Pass
NVNT	n40	2422	Ant1	-74	2674	-32.2	1.35	10	Pass
NVNT	n40	2462	Ant1	-68	2380	-32.2	1.31	10	Pass
NVNT	n40	2462	Ant1	-68	2504	-32.2	1.31	10	Pass
NVNT	n40	2462	Ant1	-74	2300	-32.2	1.26	10	Pass
NVNT	n40	2462	Ant1	-74	2330	-32.2	3.35	10	Pass
NVNT	n40	2462	Ant1	-74	2360	-32.2	1.14	10	Pass
NVNT	n40	2462	Ant1	-74	2524	-32.2	4.65	10	Pass
NVNT	n40	2462	Ant1	-74	2584	-32.2	1.28	10	Pass
NVNT	n40	2462	Ant1	-74	2674	-32.2	1.47	10	Pass

## Rx. Blockings NVNT b 2412MHz Ant1

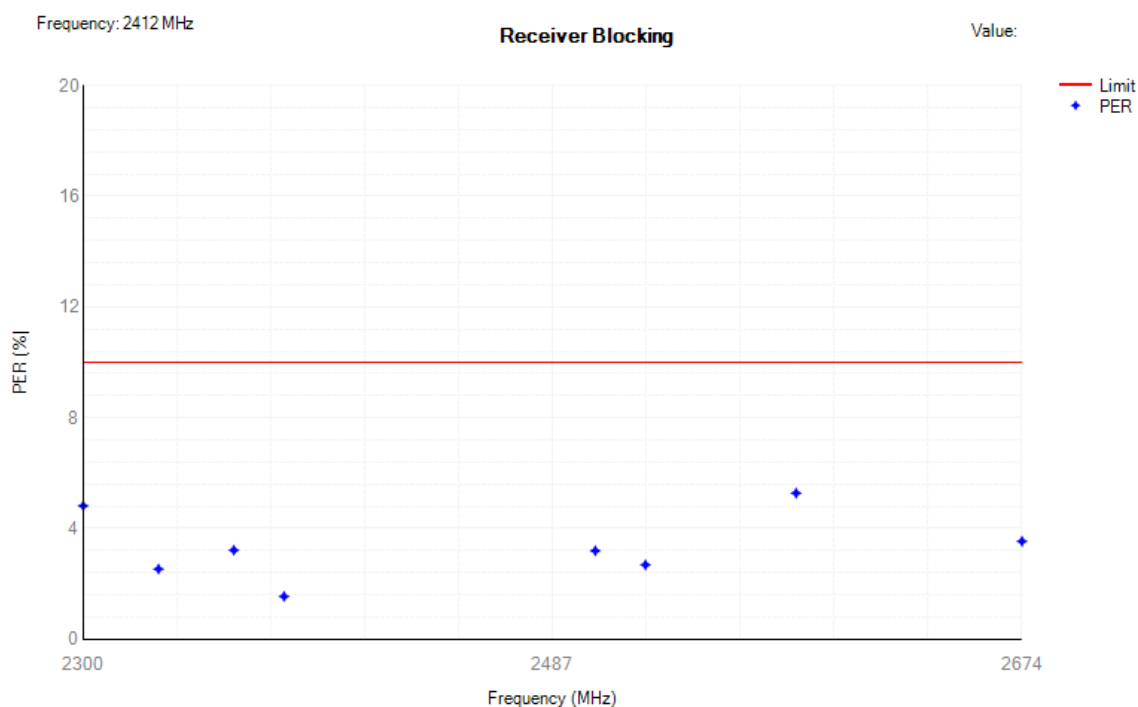


## Rx. Blockings NVNT b 2472MHz Ant1

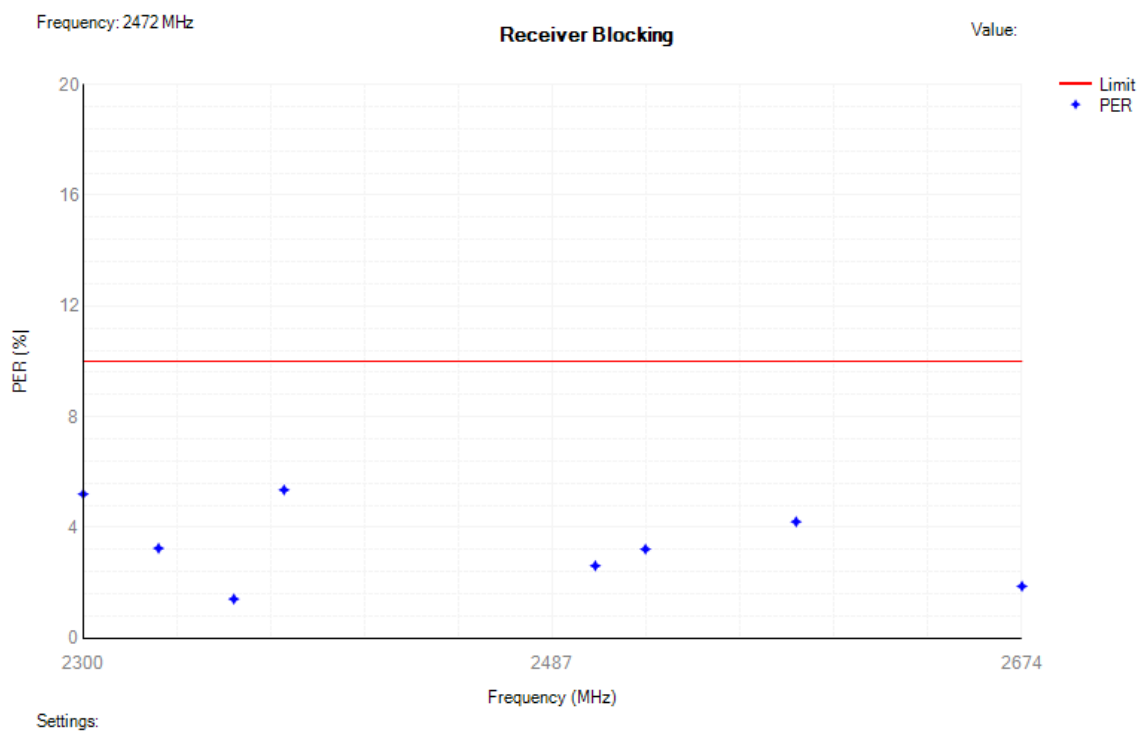





## Rx. Blockings NVNT g 2412MHz Ant1

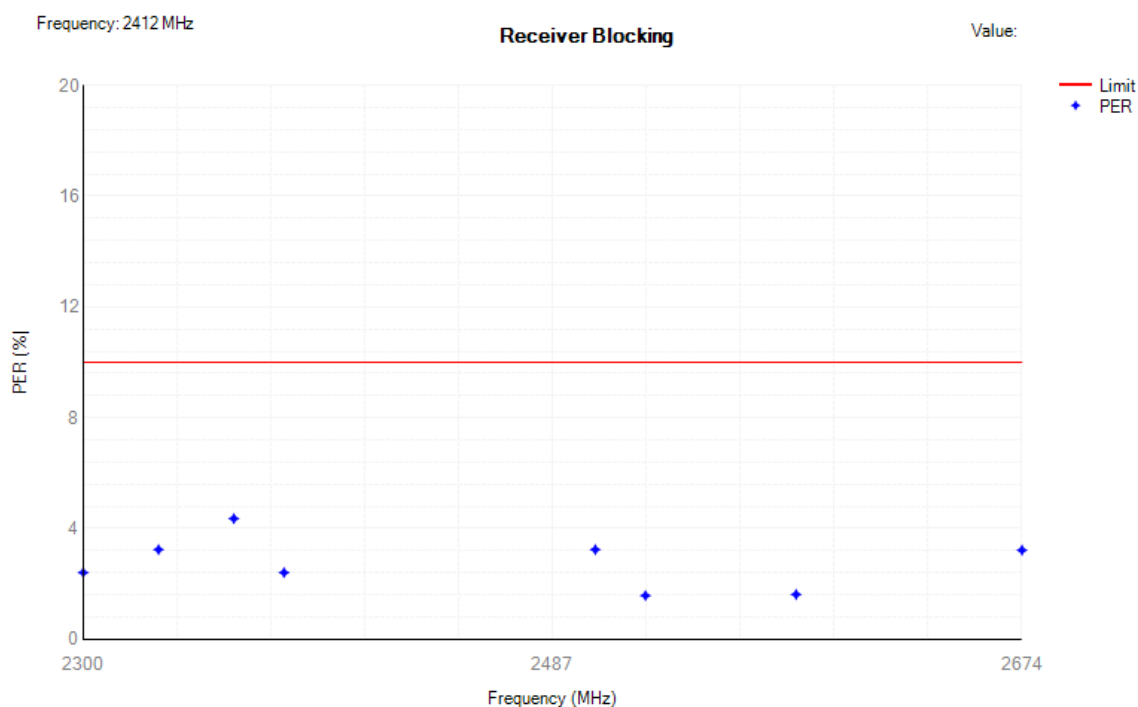


## Rx. Blockings NVNT g 2472MHz Ant1

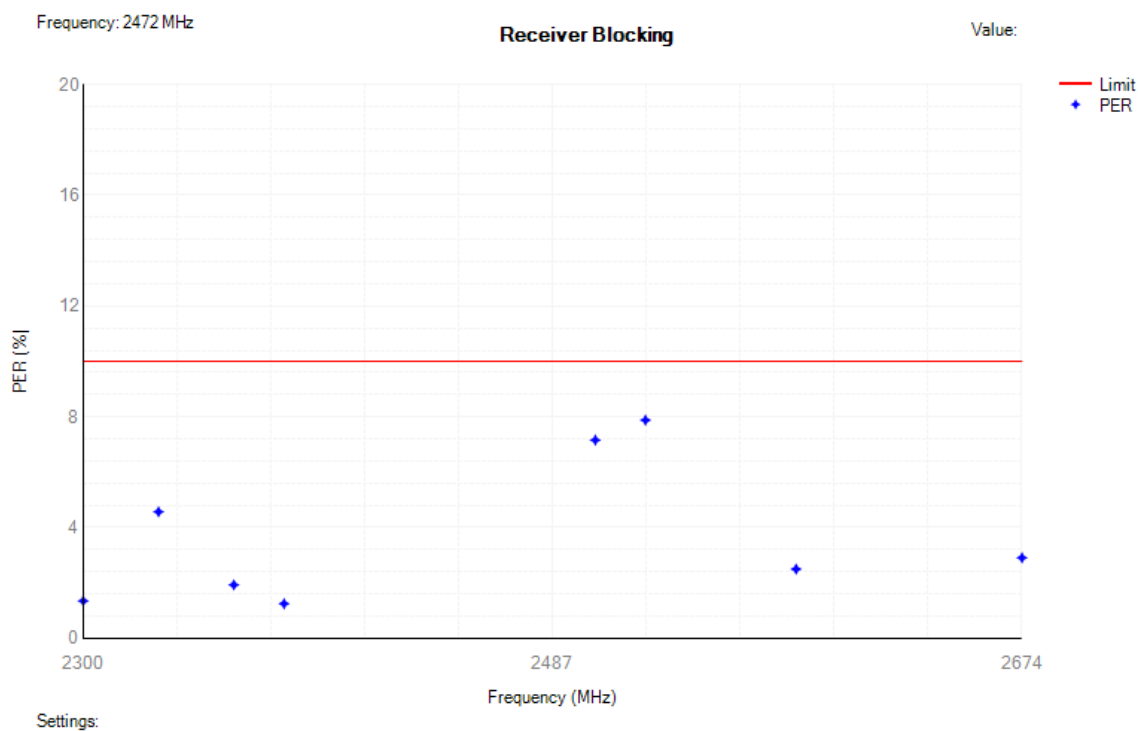


Rx. Blockings NVNT n20 2412MHz Ant1

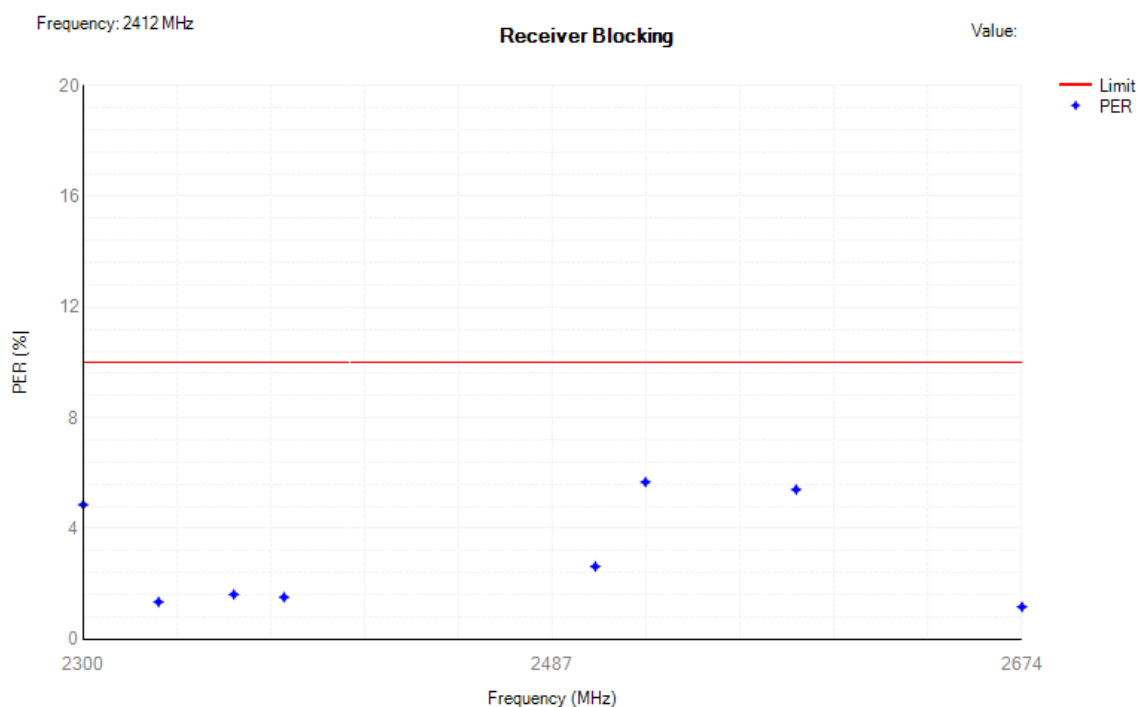

Rx. Blockings NVNT n20 2472MHz Ant1

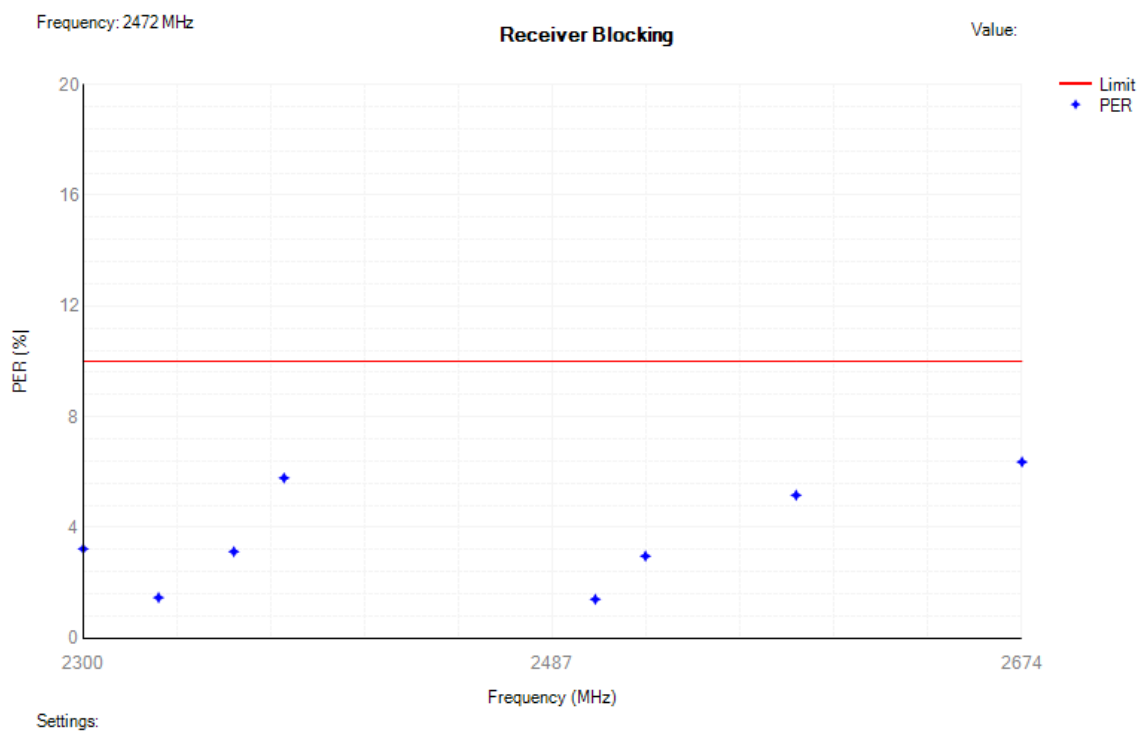

Rx. Blockings NVNT n40 2422MHz Ant1

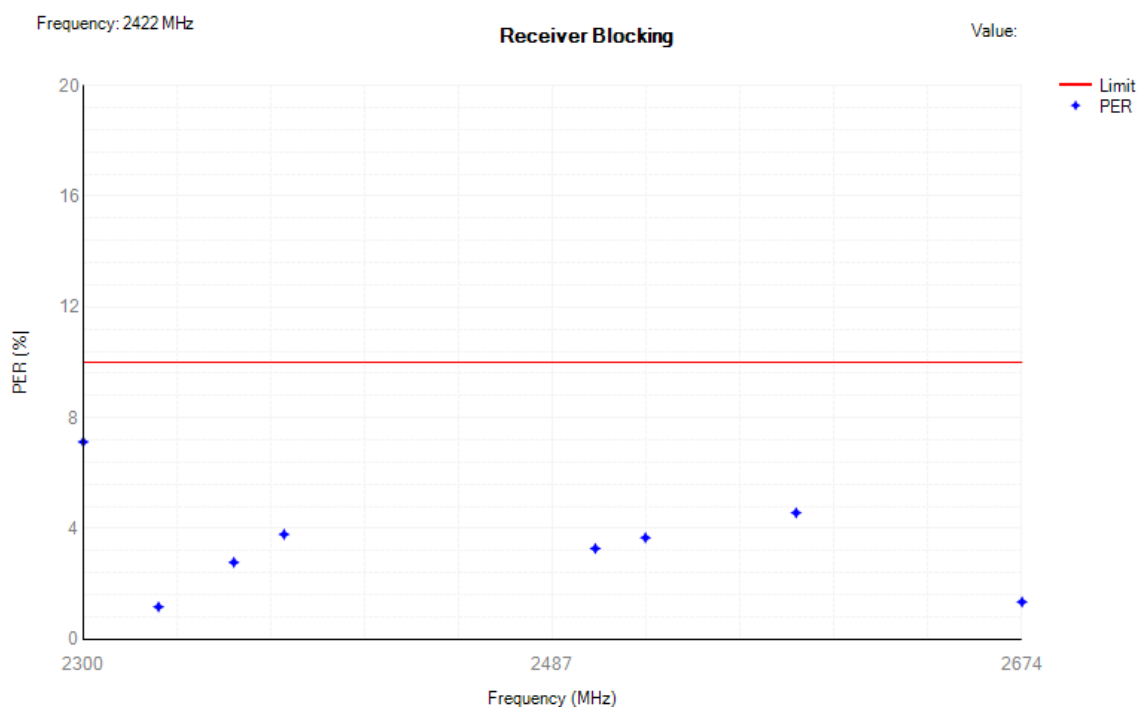

Rx. Blockings NVNT n40 2462MHz Ant1

