

---

# Safety Test Report

---

Report No.: AGC00552180301ES02




**PRODUCT DESIGNATION** : AC Power Adapter  
**BRAND NAME** : CUBOT  
**MODEL NAME** : POWER  
**CLIENT** : Shenzhen Huafurui Technology Co., Ltd.  
**DATE OF ISSUE** : Apr. 17, 2018  
**STANDARD(S)** : EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



<b>TEST REPORT</b>	
<b>EN 60950-1</b>	
<b>Information technology equipment-Safety-</b>	
<b>Part 1: General requirements</b>	
Report Reference No.....	AGC00552180301ES02
Tested by (+ signature) .....	Richie Fan 
Reviewed by (+ signature) .....	Jenny Li 
Approved by (+signature) .....	Matte He (Authorized Officer) 
Date of issue .....	Apr. 17, 2018
Contents.....	Total 50 pages
<b>Testing laboratory</b>	
Name.....	Attestation of Global Compliance (Shenzhen) Co., Ltd.
Address .....	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China
Testing location.....	Same as above.
<b>Manufacturer</b>	
Name.....	Shenzhen HuaJin Electronics Co., Ltd.
Address .....	Block E, Xinzhong Qiao Industrial Park, Baolong Six Road, Baolong Industrial City, Longgang District, Shenzhen, P.R.China.
<b>Factory</b>	
Name.....	Shenzhen HuaJin Electronics Co., Ltd.
Address .....	Block E, Xinzhong Qiao Industrial Park, Baolong Six Road, Baolong Industrial City, Longgang District, Shenzhen, P.R.China.
<b>Test specification</b>	
Standard.....	EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013
Test procedure .....	Type test
Procedure deviation.....	N/A
Non-standard test method.....	N/A
<b>Test Report Form/blank test report</b>	
Test Report Form No.....	AGC60950A8
Test Report Form(s) Originator .....	AGC
Master TRF .....	Dated 2017-01

### Test item

Product designation .....: AC Power Adapter  
Brand name .....: CUBOT  
Test model .....: POWER  
Series model .....: N/A  
Rating(s).....: Input: 100-240V~, 50/60Hz, 0.3A  
Output: 5.0V  $\equiv$ , 2000mA

### Test item particulars

Equipment mobility .....: ☐movable ☐ hand-held ☐transportable  
☐stationary ☐for building-in ☒direct plug-in  
Connection to the mains.....: ☒pluggable equipment ☒type A ☐type B  
☐permanent connection  
☐detachable power supply cord  
☐non-detachable power supply cord  
☐not directly connected to the mains  
Operating condition .....: ☒continuous  
☐rated operating/ resting time:  
Access location.....: ☒operator accessible  
☐restricted access location  
Over voltage category(OVC) .....: ☐OVC I ☒OVC II ☐OVC III ☐OVC IV ☐other  
Mains supply tolerance(%) or absolute mains supply values.....:  $\pm 10\%$   
Tested for IT power systems.....: ☐Yes ☒No  
IT testing, phase-phase voltage(V) .....: N/A  
Class of Equipment .....: ☐Class I ☒Class II ☐Class III  
☐not classified  
Considered current rating of protective device as part of the building installation (A) .....: 16A  
Pollution degree(PD) .....: ☐PD 1 ☒PD2 ☐PD3  
Protection against ingress of water .....: IPX0  
Altitude during operation (m) .....: 2000m  
Altitude of test laboratory (m) .....: <500m  
Mass of equipment (kg) .....: <1 Kg

### Test case verdicts

Test case does not apply to the test object .....: N (/A)  
Test item does meet the requirement .....: P (ass)  
Test item does not meet the requirement.....: F (ail)

### Testing

Date of receipt of test item .....: Mar. 28, 2018  
Date(s) of performance of test .....: Mar. 28 – Apr. 08, 2018

## Attachment

Attachment A..... : Photos of product

## General remarks

This report shall not be reproduced except in full without the written approval of the testing laboratory.

The test results presented in this report relate only to the item tested.

“(See remark #)” refers to a remark appended to the report.

“(See appended table)” refers to a table appended to the report.

Throughout this report a comma is used as the decimal separator.

### Report Revise Record:

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 17, 2018	Valid	Initial release

## General product information

The AC Power Adapter is direct plug-in type with integrated EN50075 plug and Class II product with plastic enclosure. It is intended for dry location use only.

Instructions and equipment marking related to safety is applied in the language that is acceptable in the country in which the equipment is to be sold.


The product was submitted and tested for use at the manufacturer's recommended ambient temperature (Tma) of 40 °C.

## Summary of testing

The test item passed.

## Copy of marking plates

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

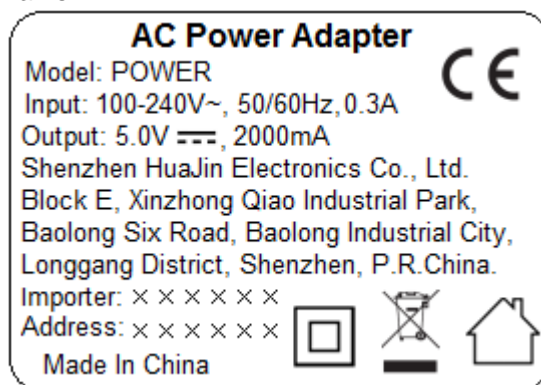

Remark:

- 1) The CE marking and WEEE symbol (if any) should be at least 5mm and 7mm respectively in height.
- 2) The markings and instructions are the minimum requirements required by safety standard. For final production samples, the additional markings which do not give rise to misunderstanding may be added.
- 3) As declared by the applicant, the importer (and manufacturer, if it is different)'s name, registered trade name or mark and the postal address will be marked on the products before being place on the market.
- 4) Marking on the packaging or in a document accompanying the electrical equipment is only acceptable if it is not possible to place such markings on the product.


EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict

<b>1</b>	<b>GENERAL</b>		<b>P</b>
----------	----------------	--	----------

<b>1.5</b>	<b>Components</b>		<b>P</b>
1.5.1	General		<b>P</b>
	Comply with IEC 60950 or relevant component standard	Components which were found to affect safety aspects comply with the requirements of this standard or with the safety aspects of the relevant IEC/EN component standards. (see appended table 1.5.1)	<b>P</b>
1.5.2	Evaluation and testing of components	Components which are certified to IEC/EN and/or national standards are used correctly within their ratings. Components not covered by IEC/EN standards are tested under the conditions present in the equipment.	<b>P</b>
1.5.3	Thermal controls	No any thermal controls.	<b>N</b>
1.5.4	Transformers	Transformer used is suitable for their intended application and comply with the relevant requirements of the standard.	<b>P</b>
1.5.5	Interconnecting cables		<b>P</b>
1.5.6	Capacitors bridging insulation	Capacitors used in accordance with their rating and complied with subclasses of IEC 60384-14 with at least 21 days damp heat test.	<b>P</b>
1.5.7	Resistors bridging insulation	No such components.	<b>N</b>
1.5.7.1	Resistors bridging functional, basic or supplementary insulation		<b>N</b>
1.5.7.2	Resistors bridging double or reinforced insulation between a.c. mains and other circuits		<b>N</b>
1.5.7.3	Resistors bridging double or reinforced insulation between a.c. mains antenna or coaxial cable		<b>N</b>
1.5.8	Components in equipment for IT power systems		<b>N</b>
1.5.9	Surge suppressors	No such parts.	<b>N</b>
1.5.9.1	General		<b>N</b>
1.5.9.2	Protection of VDRs		<b>N</b>
1.5.9.3	Bridging of functional insulation by a VDR		<b>N</b>
1.5.9.4	Bridging of basic insulation by a VDR		<b>N</b>

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1.5.9.5	Bridging of supplementary, double or reinforced insulation by a VDR		N

<b>1.6</b>	<b>Power interface</b>		<b>P</b>
1.6.1	AC power distribution systems	TN power system for adaptor	P
1.6.2	Input current	Within limits	P
1.6.3	Voltage limit of hand-held equipment	Not a hand-held equipment.	N
1.6.4	Neutral conductor		N

<b>1.7</b>	<b>Marking and instructions</b>		<b>P</b>
1.7.1	Power rating	See below	P
	Rated voltage(s) or voltage range(s) (V) .....	Input:100-240V a.c ,Output:5.0V d.c	--
	Symbol for nature of supply, for d.c. only .....	~	--
	Rated frequency or rated frequency range (Hz) ..	50/60Hz	--
	Rated current (mA or A) .....	Input :0.3A, output: 2000mA	--
1.7.1.2	Identification markings		P
	Manufacturer's name or trademark or identification mark .....	See marking plate.	--
	Type/model or type reference.....	See marking plate.	--
	Symbol for Class II equipment only .....		--
	Other marking and symbols .....	See marking plate.	--
1.7.1.3	Use of graphical symbols		P
1.7.2	Safety instructions and marking	Provided	P
1.7.2.1	General	See below.	P
1.7.2.2	Disconnect devices	No such devices	N
1.7.2.3	Overcurrent protective device		N
1.7.2.4	IT power distribution systems		N
1.7.2.5	Operator access with a tool		N
1.7.2.6	Ozone		N
1.7.3	Short duty cycles	Equipment is designed for continuous operation.	N
1.7.4	Supply voltage adjustment .....	Single supply.	N
	Methods and means of adjustment; reference to installation instructions .....		N
1.7.5	Power outlets on the equipment .....		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1.7.6	Fuse identification (marking, special fusing characteristics, cross-reference) .....	Fusible resistor, FR1, 2.2ohm, 1W	P
1.7.7	Wiring terminals		N
1.7.7.1	Protective earthing and bonding terminals .....		N
1.7.7.2	Terminal for a.c. mains supply conductors		N
1.7.7.3	Terminals for d.c. mains supply conductors		N
1.7.8	Controls and indicators		N
1.7.8.1	Identification, location and marking .....		N
1.7.8.2	Colours .....		N
1.7.8.3	Symbols according to IEC 60417 .....		N
1.7.8.4	Markings using figures .....		N
1.7.9	Isolation of multiple power sources .....	Single power sources.	N
1.7.10	Thermostats and other regulating devices	No such devices.	N
1.7.11	Durability	The marking with stands required tests.	P
1.7.12	Removable parts	No such parts	N
1.7.13	Replaceable batteries	No batteries.	N
	Language(s).....		--
1.7.14	Equipment for restricted access locations .....		N

<b>2</b>	<b>PROTECTION FROM HAZARDS</b>		<b>P</b>
2.1	Protection from electric shock and energy hazards	No hazardous parts in operator access areas.	P
2.1.1	Protection in operator access areas		P
2.1.1.1	Access to energized parts	Energized parts are not accessible.	P
	Test by inspection .....	Compliance	P
	Test with test finger(Figure 2A) .....	Compliance	P
	Test with test pin (Figure 2B).....	Compliance	P
	Test with test probe (Figure 2C) .....		N
2.1.1.2	Battery compartments .....		N
2.1.1.3	Access to ELV wiring		N
	Working voltage (Vpeak or Vrms); minimum distance (mm) through insulation	(see appended table 2.10.5)	--
2.1.1.4	Access to hazardous voltage circuit wiring		N
2.1.1.5	Energy hazards .....	No energy hazard in operator access area	P
2.1.1.6	Manual controls		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.1.1.7	Discharge of capacitors in equipment		N
	Time-constant (s); measured voltage (V) .....		--
2.1.1.8	Energy hazards – d.c. mains supply	No d.c. mains supply	N
	a)Capacitor connected to the d.c. mains supply ...:		N
	b)Internal battery connected to the d.c. mains supply.....:		N
2.1.1.9	Audio amplifiers .....	No any amplifiers	N
2.1.2	Protection in service access areas		N
2.1.3	Protection in restricted access locations		N

<b>2.2</b>	<b>SELV circuits</b>		<b>P</b>
2.2.1	General requirements	42.4V peak or 60VDC are not exceeded in SELV circuit under normal operation or single fault condition.	P
2.2.2	Voltages under normal conditions (V) .....	(see appended table 2.2)	P
2.2.3	Voltages under fault conditions (V).....	(see appended table 2.2)	P
2.2.4	Connection of SELV circuits to other circuits.....	Compliance	P

<b>2.3</b>	<b>TNV circuits</b>		<b>N</b>
2.3.1	Limits	No TNV circuits.	N
	Type of TNV circuits .....		N
2.3.2	Separation from other circuits and from accessible parts		N
2.3.2.1	General requirements		N
2.3.2.2	Protection by basic insulation		N
2.3.2.3	Protection by earthing		N
2.3.2.4	Protection by other constructions .....		N
2.3.3	Separation from hazardous voltages		N
	Insulation employed.....		N
2.3.4	Connection of TNV circuits to other circuits		N
	Insulation employed.....		N
2.3.5	Test for operating voltages generated externally		N

<b>2.4</b>	<b>Limited current circuits</b>		<b>P</b>
2.4.1	General requirements	Annex D used.	P
2.4.2	Limit values	0.7mA	--



EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Frequency (Hz) .....		--
	Measured current (mA).....	0.05mA	--
	Measured voltage (V) .....		--
	Measured capacitance (nF or $\mu$ F) .....		--
2.4.3	Connection of limited current circuits to other circuits		N

<b>2.5</b>	<b>Limited power sources</b>		<b>P</b>
	a)Inherently limited output		N
	b)Impedance limited output		N
	c)Regulating network limited output under normal operating and single fault condition	See appended table 2.5.	P
	d)Overcurrent protective device limited output		N
	Max. output voltage (V), max. output current (A), max. apparent power (VA) .....	See appended table 2.5.	--
	Current rating of overcurrent protective device (A)		N
	Use of integrated circuit (IC) current limited		N

<b>2.6</b>	<b>Provisions for earthing and bonding</b>		<b>N</b>
2.6.1	Protective earthing	Class II equipment.	N
2.6.2	Functional earthing		N
	Use of symbol for functional earthing .....		N
2.6.3	Protective earthing and protective bonding conductors		N
2.6.3.1	General		N
2.6.3.2	Size of protective earthing conductors		N
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		N
2.6.3.3	Size of protective bonding conductors		N
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		N
2.6.3.4	Resistance of earthing conductors and their terminations, resistance( $\Omega$ ), voltage drop(V),test current (A), duration(min).....		N
2.6.3.5	Colour of insulation .....		N
2.6.4	Terminals		N
2.6.4.1	General		N
2.6.4.2	Protective earthing and bonding terminals		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Rated current (A), type and nominal thread diameter (mm) .....		N
2.6.4.3	Separation of the protective earthing conductor from protective bonding conductors		N
2.6.5	Integrity of protective earthing		N
2.6.5.1	Interconnection of equipment		N
2.6.5.2	Components in protective earthing conductors and protective bonding conductors		N
2.6.5.3	Disconnection of protective earth		N
2.6.5.4	Parts that can be removed by an operator		N
2.6.5.5	Parts removed during servicing		N
2.6.5.6	Corrosion resistance		N
2.6.5.7	Screws for protective bonding		N
2.6.5.8	Reliance on telecommunication network or cable distribution system		N

<b>2.7</b>	<b>Overcurrent and earth fault protection in primary circuits</b>		<b>P</b>
2.7.1	Basic requirements	Protection against overcurrent and short-circuits is provided as an integral part of the equipment. Protection against earth faults is provided as part of the building installation.	P
	Instructions when protection relies on building installation		N
2.7.2	Faults not covered in 5.3.7	Considered	P
2.7.3	Short-circuit backup protection	The building installation is considered as providing short circuit backup protection.	P
2.7.4	Number and location of protective devices .....	Over current protection by fusible resistor.	P
2.7.5	Protection by several devices		N
2.7.6	Warning to service personnel .....		N

<b>2.8</b>	<b>Safety interlocks</b>		<b>N</b>
2.8.1	General principles	No safety interlocks	N
2.8.2	Protection requirements		N
2.8.3	Inadvertent reactivation		N
2.8.4	Fail-safe operation		N
	Protection against extreme hazard		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.8.5	Moving parts		N
2.8.6	Overriding		N
2.8.7	Switches and relays		N
2.8.7.1	Contact gaps (mm) .....		N
2.8.7.2	Overload test		N
2.8.7.3	Endurance test		N
2.8.7.4	Electric strength test		N
2.8.8	Mechanical actuators		N

<b>2.9</b>	<b>Electrical insulation</b>		P
2.9.1	Properties of insulating materials		P
2.9.2	Humidity conditioning		P
	Humidity (%),temperature (°C) .....	120h, 93%RH, 40.0°C	P
2.9.3	Grade of insulation		P
2.9.4	Separation from hazardous voltages		P
	Method(s) used .....	Method 1 used.	P

<b>2.10</b>	<b>Clearances, creepage distances and distances through insulation</b>		P
2.10.1	General		P
	Frequency .....	50/60Hz	P
	Pollution degrees .....	Pollution degrees 2	P
	Reduced values for functional insulation		P
	Intervening unconnected conductive parts		P
	Insulation with varying dimensions		P
	Special separation requirements		N
	Insulation in circuits generating starting pulses		N
2.10.2	Determination of working voltage		P
2.10.3	Clearances		P
2.10.3.1	General		P
2.10.3.2	Mains transient voltages		P
	a)AC mains supply .....	2500V peak	P
	b)Earthed d.c. mains supplies .....		N
	c)Unearthed d.c. main supplies .....		N
	d)Battery operation .....		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
2.10.3.3	Clearances in primary circuits	(See appended table 2.10.3 and 2.10.4)	P
2.10.3.4	Clearances in secondary circuits	(See appended table 2.10.3 and 2.10.4)	P
2.10.3.5	Clearances in circuits having starting pulses		N
2.10.3.6	Transients from a.c. mains supply..... :	Secondary circuit 1500Vpeak	P
2.10.3.7	Transients from d.c. mains supply..... :		N
2.10.3.8	Transients from telecommunication networks and cable distribution systems..... :		N
2.10.3.9	Measurement of transient voltage levels		N
	a)Transients from a mains supply		N
	For a.c. mains supply..... :		N
	For d.c. mains supply..... :		N
	b)Transients from		N
2.10.4	Creepage distances		P
2.10.4.1	General		P
2.10.4.2	Material group and comparative tracking index		P
	CTI tests..... :	Material group IIIb is assumed to be used	P
2.10.4.3	Minimum creepage distances	(see appended table 2.10.3 and 2.10.4)	P
2.10.5	Solid insulation		P
2.10.5.1	General		P
2.10.5.2	Distances through insulation	(See appended table 2.10.5)	P
2.10.5.3	Insulation compound as solid insulation		N
2.10.5.4	Semiconductor device		N
2.10.5.5	Cemented joints		N
2.10.5.6	Thin sheet material - General		P
2.10.5.7	Separable thin sheet material		P
	Number or layers(pcs) ..... :	3 layers	--
2.10.5.8	Non-separable thin sheet material		N
2.10.5.9	Thin sheet material – standard test procedure		N
	Electric strength test		N
2.10.5.10	Thin sheet material – alternative test procedure		P
	Electric strength test	(See appended table 2.10.5)	--
2.10.5.11	Insulation in wound components		P
2.10.5.12	Wire in wound components		P

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Working voltage .....		P
	a)Basic insulation not under stress.....		N
	b)Basic, supplementary, reinforced insulation.....		P
	c)Compliance with Annex U.....	(See appended table 1.5.1)	P
	Two wires in contact inside wound component; angle between 45° and 90° .....	Tubing used.	P
2.10.5.13	Wire with solvent-based enamel in wound components		N
	Electric strength test		N
	Routine test		N
2.10.5.14	Additional insulation in wound components		N
	Working voltage .....		N
	-basic insulation not under stress .....		N
	-Supplementary, reinforced insulation .....		N
2.10.6	Construction of printed boards		P
2.10.6.1	Uncoated printed boards	(See appended table 2.10.3 and 2.10.4)	P
2.10.6.2	Coated printed boards		N
2.10.6.3	Insulation between conductors on the same inner surface of a printed board		N
2.10.6.4	Insulation between conductors on different layers of a printed board		N
	Distance through insulation		N
	Number of insulation layers(pcs) .....		N
2.10.7	Component external terminations		N
2.10.8	Tests on coated printed boards and coated components		N
2.10.8.1	Sample preparation and preliminary inspection		N
2.10.8.2	Thermal conditioning		N
2.10.8.3	Electric strength test		N
2.10.8.4	Abrasion resistance test		N
2.10.9	Thermal cycling		N
2.10.10	Test for Pollution Degree 1 environment and insulating compound		N
2.10.11	Test for semiconductor devices and cemented joints		N
2.10.12	Enclosed and sealed parts		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
<b>3</b>	<b>WIRING, CONNECTIONS AND SUPPLY</b>		<b>P</b>
<b>3.1</b>	<b>General</b>		<b>P</b>
3.1.1	Current rating and overcurrent protection	Adequate cross sectional areas on internal wiring.	P
3.1.2	Protection against mechanical damage	Wire do not touch sharp edges and heat sinks which could damage the insulation and cause hazard	P
3.1.3	Securing of internal wiring	Internal wiring is reliable secured	P
3.1.4	Insulation of conductors	Insulation on internal conductors is considered to be of adequate quality and suitable for the application and the working voltage involved.	P
3.1.5	Beads and ceramic insulators	No such insulators provided.	N
3.1.6	Screws for electrical contact pressure		N
3.1.7	Insulating materials in electrical connections		N
3.1.8	Self-tapping and spaced thread screws		N
3.1.9	Termination of conductors		P
	10 N pull test		P
3.1.10	Sleeving on wiring		N

<b>3.2</b>	<b>Connection to a mains supply</b>		<b>P</b>
3.2.1	Means of connection .....		P
3.2.1.1	Connection to an a.c. mains supply	Integrated plug	P
3.2.1.2	Connection to a d.c. mains supply		N
3.2.2	Multiple supply connections		N
3.2.3	Permanently connected equipment		N
	Number of conductors, diameter (mm) of cable and conduits .....		--
3.2.4	Appliance inlets		N
3.2.5	Power supply cords		N
3.2.5.1	AC power supply cords		N
	Type .....		--
	Rated current (A), cross-sectional area (mm <sup>2</sup> ), AWG .....		--
3.2.5.2	DC power supply cords		N
3.2.6	Cord anchorages and strain relief		N
	Mass of equipment (kg), pull (N) .....		--
	Longitudinal displacement (mm) .....		--

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
3.2.7	Protection against mechanical damage		N
3.2.8	Cord guards		N
	D (mm); test mass (g) .....		--
	Radius of curvature of cord (mm) .....		--
3.2.9	Supply wiring space		N

<b>3.3</b>	<b>Wiring terminals for connection of external conductors</b>		<b>N</b>
3.3.1	Wiring terminals		N
3.3.2	Connection of non-detachable power supply cords		N
3.3.3	Screw terminals		N
3.3.4	Conductor sizes to be connected		N
	Rated current (A), cord/cable type, cross-sectional area (mm <sup>2</sup> ) .....		--
3.3.5	Wiring terminal sizes		N
	Rated current (A), type and nominal thread diameter (mm) .....		--
3.3.6	Wiring terminals design		N
3.3.7	Grouping of wiring terminals		N
3.3.8	Stranded wire		N

<b>3.4</b>	<b>Disconnection from the mains supply</b>		<b>P</b>
3.4.1	General requirement	Integrated plug	P
3.4.2	Disconnect devices		P
3.4.3	Permanently connected equipment		N
3.4.4	Parts which remain energized		P
3.4.5	Switches in flexible cords		N
3.4.6	Single-phase equipment and d.c. equipment		P
3.4.7	Three-phase equipment		N
3.4.8	Switches as disconnect devices	No such devices	N
3.4.9	Plugs as disconnect devices		N
3.4.10	Interconnected equipment		N
3.4.11	Multiple power sources		N

<b>3.5</b>	<b>Interconnection of equipment</b>		<b>P</b>
3.5.1	General requirements		P

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
3.5.2	Types of interconnection circuits .....	SELV circuit only.	P
3.5.3	ELV circuits as interconnection circuits	No ELV circuits.	N
3.5.4	Data ports for additional equipment		N

<b>4</b>	<b>PHYSICAL REQUIREMENTS</b>		<b>P</b>
<b>4.1</b>	<b>Stability</b>	Direct plug-in equipment	N
	Angle of 10°		N
	Test: force (N) .....		N

<b>4.2</b>	<b>Mechanical strength</b>		<b>P</b>
4.2.1	General	See below	P
	Rack-mounted equipment.		N
4.2.2	Steady force test, 10 N	No energy or other hazards.	P
4.2.3	Steady force test, 30 N		N
4.2.4	Steady force test, 250 N	250N applied to outer enclosure. No energy or other hazards.	P
4.2.5	Impact test		N
	Fall test		N
	Swing test		N
4.2.6	Drop test; height(m) .....	Direct plug-in equipment (1m)	P
4.2.7	Stress relief test	91.7°C, 7 hours, no hazard	P
4.2.8	Cathode ray tubes	No cathode ray tube.	N
	Picture tube separately certified .....		N
4.2.9	High pressure lamps	No high pressure lamp	N
4.2.10	Wall or ceiling mounted equipment; force (N) .....	Direct plug-in equipment	N

<b>4.3</b>	<b>Design and construction</b>		<b>P</b>
4.3.1	Edges and corners	Edges and corners are rounded.	P
4.3.2	Handles and manual controls; force (N) .....		N
4.3.3	Adjustable controls		N
4.3.4	Securing of parts		P
4.3.5	Connection of plugs and sockets		P
4.3.6	Direct plug-in equipment		P
	Torque.....	0.03 N.m max	P
	Compliance with the relevant mains plug standard .....	EN 50075	--



EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
4.3.7	Heating elements in earthed equipment	No heating elements.	N
4.3.8	Batteries	No battery	N
	-Overcharging of a rechargeable battery		N
	-Unintentional charging of a non-rechargeable battery		N
	-Reverse charging of a rechargeable battery		N
	-Excessive discharging rate for any battery		N
4.3.9	Oil and grease	No Oil and grease.	N
4.3.10	Dust, powders, liquids and gases	Equipment in intended use not considered to be exposed to these.	N
4.3.11	Containers for liquids or gases	No containers for liquids or gases	N
4.3.12	Flammable liquids .....	The equipment does not contain flammable liquid.	N
	Quantity of liquid (l) .....		N
	Flash point (°C) .....		N
4.3.13	Radiation; type of radiation .....		N
4.3.13.1	General		N
4.3.13.2	Ionizing radiation		N
	Measured radiation (pA/kg) .....		--
	Measured high-voltage (kV) .....		--
	Measured focus voltage (kV) .....		--
	CRT markings .....		--
4.3.13.3	Effect of ultraviolet (UV) radiation on materials		N
	Part, property, retention after test, flammability classification .....		N
4.3.13.4	Human exposure to ultraviolet (UV) radiation .....		N
4.3.13.5	Lasers (including laser diodes) and LEDs		N
4.3.13.5.1	Lasers (including laser diodes)		N
	Laser class .....		--
4.3.13.5.2	Light emitting diodes (LEDs)		N
4.3.13.6	Other types .....		N

<b>4.4</b>	<b>Protection against hazardous moving parts</b>		N
4.4.1	General	No hazardous moving parts.	N
4.4.2	Protection in operator access areas		N
4.4.3	Protection in restricted access locations		N
4.4.4	Protection in service access areas		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
4.4.5	Protection against moving fan blades		N
4.4.5.1	General		N
	Not considered to cause pain or injury. a) .....		N
	Is considered to cause pain, not injury. b) .....		N
	Considered to cause injury. c) .....		N
4.4.5.2	Protection for users		N
	Use of symbol or warning .....		N
4.4.5.3	Protection for service persons		N
	Use of symbol or warning .....		N

<b>4.5</b>	<b>Thermal requirements</b>		P
4.5.1	General		P
4.5.2	Temperature tests	(see appended table 4.5)	P
	Normal load condition per Annex L .....		--
4.5.3	Temperature limits for materials	(see appended table 4.5)	P
4.5.4	Touch temperature limits	(see appended table 4.5)	P
4.5.5	Resistance to abnormal heat	(see appended table 4.5)	P

<b>4.6</b>	<b>Openings in enclosures</b>		N
4.6.1	Top and side openings	No opening	N
	Dimensions (mm) .....		--
4.6.2	Bottoms of fire enclosures		N
	Construction of the bottom.....		--
4.6.3	Doors or covers in fire enclosures		N
4.6.4	Openings in transportable equipment		N
4.6.4.1	Constructional design measures		N
	Dimensions(mm).....		N
4.6.4.2	Evaluation measures for larger openings		N
4.6.4.3	Use of metallized parts		N
4.6.5	Adhesives for constructional purposes		N
	Conditioning temperature (°C), time (weeks) .....		--

<b>4.7</b>	<b>Resistance to fire</b>		P
4.7.1	Reducing the risk of ignition and spread of flame	Use of materials with the required flammability classes.	P

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Method 1, selection and application of components wiring and materials	Method 1 used	P
	Method 2, application of all of simulated fault condition tests		N
4.7.2	Conditions for a fire enclosure	With having the following parts: - components in primary - components in secondary circuits - insulated wiring the fire enclosure is required.	P
4.7.2.1	Parts requiring a fire enclosure	The fire enclosure prevent the fire spread	P
4.7.2.2	Parts not requiring a fire enclosure		N
4.7.3	Materials		P
4.7.3.1	General	PCB rated V-0, fire enclosure used	P
4.7.3.2	Materials for fire enclosures	(See appended table 1.5.1)	P
4.7.3.3	Materials for components and other parts outside fire enclosures		N
4.7.3.4	Materials for components and other parts inside fire enclosures	Internal components except small parts are V-2 or better.	P
4.7.3.5	Materials for air filter assemblies	No air filter assemblies	N
4.7.3.6	Materials used in high-voltage components	No high voltage components.	N

<b>5</b>	<b>ELECTRICAL REQUIREMENTS AND SIMULATED ABNORMAL CONDITIONS</b>		<b>P</b>
<b>5.1</b>	<b>Touch current and protective conductor current</b>		<b>P</b>
5.1.1	General		P
5.1.2	Equipment under test (EUT)		P
5.1.2.1	Single connection to an a.c. mains supply		P
5.1.2.2	Redundant multiple connections to an a.c. mains supply		N
5.1.2.3	Simultaneous multiple connections to an a.c. mains supply		N
5.1.3	Test circuit		P
5.1.4	Application of measuring instrument		P
5.1.5	Test procedure		P
5.1.6	Test measurements		P
	Test voltage (V) .....	264V/60Hz	--
	Measured touch current (mA) .....	(see appended table 5.1)	--
	Max. allowed touch current (mA) .....	(see appended table 5.1)	--
	Measured protective conductor current (mA) .....		--

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	Max. allowed protective conductor current (mA) ∴		--
5.1.7	Equipment with touch current exceeding 3.5 mA ∴		N
5.1.7.1	General .....		N
5.1.7.2	Simultaneous multiple connections to the supply		N
5.1.8	Touch currents to and from telecommunication networks and cable distribution systems and from telecommunication networks		N
5.1.8.1	Limitation of the touch current to a telecommunication network and a cable distribution system		N
	Test voltage (V) .....		N
	Measured touch current (mA) .....		N
	Max. allowed touch current (mA) .....		N
5.1.8.2	Summation of touch currents from telecommunication networks		N
	a)EUT with earthed telecommunication ports.....		N
	b)EUT whose telecommunication ports have no reference to protective earth		N

<b>5.2</b>	<b>Electric strength</b>		P
5.2.1	General	(see appended table 5.2)	P
5.2.2	Test procedure		P

<b>5.3</b>	<b>Abnormal operating and fault conditions</b>		P
5.3.1	Protection against overload and abnormal operation	(see appended table 5.3)	P
5.3.2	Motors		N
5.3.3	Transformers	(See appended Annex C)	P
5.3.4	Functional insulation .....	Functional insulation complied with the requirements c).	P
5.3.5	Electromechanical components	No such components	N
5.3.6	Audio amplifiers in ITE .....		N
5.3.7	Simulation of faults	Result see appended table 5.3.	P
5.3.8	Unattended equipment		N
5.3.9	Compliance criteria for abnormal operating and fault conditions	See below	P
5.3.9.1	During the tests	Neither fire burns the equipment nor molten metal.	P
5.3.9.2	After the tests	No hazards	P

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
<b>6</b>	<b>CONNECTION TO TELECOMMUNICATION NETWORKS</b>		<b>N</b>
<b>6.1</b>	<b>Protection of telecommunication network service persons, and users of other equipment connected to the network, from hazards in the equipment</b>		<b>N</b>
6.1.1	Protection from hazardous voltages		N
6.1.2	Separation of the telecommunication network from earth		N
6.1.2.1	Requirements		N
	Test voltage (V) .....		--
	Current in the test circuit (mA) .....		--
6.1.2.2	Exclusions.....		N
<b>6.2</b>	<b>Protection of equipment users from overvoltages on telecommunication networks</b>		<b>N</b>
6.2.1	Separation requirements		N
6.2.2	Electric strength test procedure		N
6.2.2.1	Impulse test		N
6.2.2.2	Steady-state test		N
6.2.2.3	Compliance criteria		N
<b>6.3</b>	<b>Protection of the telecommunication wiring system from overheating</b>		<b>N</b>
	Max. output current (A) .....		--
	Current limiting method.....		--
<b>7</b>	<b>CONNECTION TO CABLE DISTRIBUTION SYSTEMS</b>		<b>N</b>
<b>7.1</b>	<b>General</b>		<b>N</b>
7.2	Protection of cable distribution system service persons, and users of other equipment connected to the system, from hazardous voltages in the equipment		N
7.3	Protection of equipment users from overvoltages on the cable distribution system		N
7.4	Insulation between primary circuits and cable distribution systems		N
7.4.1	General		N
7.4.2	Voltage surge test		N
7.4.3	Impulse test		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
<b>A</b>	<b>ANNEX A, TESTS FOR RESISTANCE TO HEAT AND FIRE</b>		<b>N</b>
A.1	Flammability test for fire enclosures of movable equipment having a total mass exceeding 18 kg, and of stationary equipment (see 4.7.3.2)		N
A.1.1	Samples .....		--
	Wall thickness (mm) .....		--
A.1.2	Conditioning of samples; temperature (°C) .....		N
A.1.3	Mounting of samples.....		N
A.1.4	Test flame (see IEC 60695-11-3)		N
	Flame A, B, C or D .....		--
A.1.5	Test procedure		N
A.1.6	Compliance criteria		N
	Sample 1 burning time (s).....		--
	Sample 2 burning time (s).....		--
	Sample 3 burning time (s).....		--
A.2	Flammability test for fire enclosures of movable equipment having a total mass not exceeding 18 kg, and for material and components located inside fire enclosures (see 4.7.3.2 and 4.7.3.4)		N
A.2.1	Samples, material .....		--
	Wall thickness (mm) .....		--
A.2.2	Conditioning of samples		N
A.2.3	Mounting of samples .....		N
A.2.4	Test flame (see IEC 60695-11-4)		N
	Flame A, B or C .....		--
A.2.5	Test procedure		N
A.2.6	Compliance criteria		N
	Sample 1 burning time (s).....		--
	Sample 2 burning time (s).....		--
	Sample 3 burning time (s).....		--
A.2.7	Alternative test acc. To IEC 60695-2-2, cl. 4 and 8		N
	Sample 1 burning time (s).....		--
	Sample 2 burning time (s).....		--
	Sample 3 burning time (s).....		--
A.3	Hot flaming oil test (see 4.6.2)		N
A.3.1	Mounting of samples		N
A.3.2	Test procedure		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
A.3.3	Compliance criterion		N

<b>B</b>	<b>ANNEX B, MOTOR TESTS UNDER ABNORMAL CONDITIONS (see 4.7.2.2 and 5.3.2)</b>		<b>N</b>
B.1	General requirements	No motor	N
	Position .....		--
	Manufacturer .....		--
	Type .....		--
	Rated values .....		--
B.2	Test conditions		N
B.3	Maximum temperatures		N
B.4	Running overload test		N
B.5	Locked-rotor overload test		N
	Test duration (days) .....		--
	Electric strength test: test voltage (V) .....		--
B.6	Running overload test for d.c. motors in secondary circuits		N
B.6.1	General		N
B.6.2	Test procedure		N
B.6.3	Alternative test procedure		N
B.6.4	Electric strength test; test voltage (V)		N
B.7	Locked-rotor overload test for d.c. motors in secondary circuits		N
B.7.1	Test procedure		N
B.7.2	Alternative test procedure; test time (h) .....		N
B.7.3	Electric strength test		N
B.8	Test for motors with capacitors		N
B.9	Test for three-phase motors		N
B.10	Test for series motors		N
	Operating voltage (V) .....		--

<b>C</b>	<b>ANNEX C, TRANSFORMERS (see 1.5.4 and 5.3.3)</b>		<b>P</b>
	Position .....	Soldered on PCB (T1)	--
	Manufacturer .....	See components list.	--
	Type .....	Ditto	--
	Rated values .....		--
	Method of protection .....	Protective circuit	--

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
C.1	Overload test	Transformers for switch mode power supply units are tested in the complete power unit or in the complete equipment .test load are applied to the output of the power supply unit	P
C.2	Insulation	(see appended table 5.2)	P
	Protection from displacement of windings ..... :		P

<b>D</b>	<b>ANNEX D, MEASURING INSTRUMENTS FOR TOUCH-CURRENT TESTS (see 5.1.4)</b>		<b>P</b>
D.1	Measuring instrument		P
D.2	Alternative measuring instrument		N

<b>E</b>	<b>ANNEX E, TEMPERATURE RISE OF A WINDING (see 1.4.13)</b>		<b>N</b>
----------	--	--	----------

<b>F</b>	<b>ANNEX F, MEASUREMENT OF CLEARANCES AND CREEPAGE DISTANCES (see 2.10)</b>		<b>P</b>
----------	---	--	----------

<b>G</b>	<b>ANNEX G, ALTERNATIVE METHOD FOR DETERMINING MINIMUM CLEARANCES</b>		<b>N</b>
G.1	Clearances		N
G.1.1	General		N
G.1.2	Summary of the procedure for determining minimum clearances		N
G.2	Determination of mains transient voltage (V)..... :		N
G.2.1	AC mains supply		N
G.2.2	DC mains supply		N
G.2.3	Unearthed DC mains supply ..... :		N
G.2.4	Battery operation..... :		N
G.3	Determination of telecommunication network transient voltage (V) ..... :		N
G.4	Determination of required withstand voltage (V).. :		N
G.4.1	Mains transients and internal repetitive peaks..... :		N
G.4.2	Transients from telecommunication networks ..... :		N
G.4.3	Combination of transients		N
G.4.4	Transients from cable distribution systems		N
G.5	Measurement of transient levels (V) ..... :		N
	a) Transients from a mains supply		N
	For an a.c. mains supply		N



EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	For a d.c. mains supply		N
	b) Transients from a telecommunication network		N
G.6	Determination of minimum clearances ..... :		N

<b>H</b>	<b>ANNEX H, IONIZING RADIATION (see 4.3.13)</b>	<b>N</b>
----------	---	----------

<b>J</b>	<b>ANNEX J, TABLE OF ELECTROCHEMICAL POTENTIALS (see 2.6.5.6)</b>	<b>N</b>
	Metal used ..... :	--

<b>K</b>	<b>ANNEX K, THERMAL CONTROLS (see 1.5.3 and 5.3.7)</b>	<b>N</b>
K.1	Making and breaking capacity	N
K.2	Thermostat reliability; operating voltage (V) ..... :	N
K.3	Thermostat endurance test; operating voltage (V) ..... :	N
K.4	Temperature limiter endurance; operating voltage (V) ..... :	N
K.5	Thermal cut-out reliability	N
K.6	Stability of operation	N

<b>L</b>	<b>ANNEX L, NORMAL LOAD CONDITIONS FOR SOME TYPES OF ELECTRICAL BUSINESS EQUIPMENT (see 1.2.2.1 and 4.5.1)</b>	<b>P</b>
L.1	Typewriters	N
L.2	Adding machines and cash registers	N
L.3	Erasers	N
L.4	Pencil sharpeners	N
L.5	Duplicators and copy machines	N
L.6	Motor-operated files	N
L.7	Other business equipment	P

<b>M</b>	<b>ANNEX M, CRITERIA FOR TELEPHONE RINGING SIGNALS (see 2.3.1)</b>	<b>N</b>
M.1	Introduction	N
M.2	Method A	N
M.3	Method B	N
M.3.1	Ringing signal	N
M.3.1.1	Frequency (Hz) ..... :	--
M.3.1.2	Voltage (V) ..... :	--

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
M.3.1.3	Cadence; time (s), voltage (V) .....		--
M.3.1.4	Single fault current (mA) .....		--
M.3.2	Tripping device and monitoring voltage .....		N
M.3.2.1	Conditions for use of a tripping device or a monitoring voltage		N
M.3.2.2	Tripping device		N
M.3.2.3	Monitoring voltage (V) .....		N

<b>N</b>	<b>ANNEX N, IMPULSE TEST GENERATORS (see 2.10.3.4, 6.2.2.1, 7.3.2 and clause G.5)</b>		<b>N</b>
N.1	ITU-T impulse test generators		N
N.2	IEC 60065 impulse test generator		N

<b>P</b>	<b>ANNEX P, NORMATIVE REFERENCES</b>		<b>N</b>
----------	--------------------------------------	--	----------

<b>Q</b>	<b>ANNEX Q, Voltage dependent resisters (VDRS) (see 1.5.9.1)</b>		<b>N</b>
	-Preferred climatic categories .....	No VDR used	N
	-Maximum continuous voltage .....		N
	-Combination pulse current .....		N
	Body of the VDR Test according to IEC 60695-11-5 .....		N
	Body of the VDR. Flammability class of material ( min V-1).....		N

<b>R</b>	<b>ANNEX R, EXAMPLES OF REQUIREMENTS FOR QUALITY CONTROL PROGRAMMES</b>		<b>N</b>
R.1	Minimum separation distances for unpopulated coated printed boards (see 2.10.6)		N
R.2	Reduced clearances (see 2.10.3)		N

<b>S</b>	<b>ANNEX S, PROCEDURE FOR IMPULSE TESTING (see 6.2.2.3)</b>		<b>N</b>
S.1	Test equipment		N
S.2	Test procedure		N
S.3	Examples of waveforms during impulse testing		N

<b>T</b>	<b>ANNEX T, GUIDANCE ON PROTECTION AGAINST INGRESS OF WATER (see 1.1.2)</b>		<b>N</b>
----------	---	--	----------

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
<b>U</b>	<b>ANNEX U, INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION (see 2.10.5.4)</b>		<b>P</b>
<b>V</b>	<b>ANNEX V, AC POWER DISTRIBUTION SYSTEMS (see 1.6.1)</b>		<b>P</b>
V.1	Introduction		P
V.2	TN power distribution systems		P
<b>W</b>	<b>ANNEX W, SUMMATION OF TOUCH CURRENTS</b>		<b>N</b>
W.1	Touch current from electronic circuits		N
W.1.2	Earthed circuits		N
W.2	Interconnection of several equipments		N
W.2.1	Isolation		N
W.2.2	Common return, isolated from earth		N
W.2.3	Common return, connected to protective earth		N
<b>X</b>	<b>ANNEX X, MAXIMUM HEATING EFFECT IN TRANSFORMER TESTS (see clause C.1)</b>		<b>N</b>
X.1	Determination of maximum input current		N
X.2	Overload test procedure		N
<b>Y</b>	<b>ANNEX Y, ULTRAVIOLET LIGHT CONDITIONING TEST (see 4.3.13.3)</b>		<b>N</b>
Y.1	Test apparatus .....		N
Y.2	Mounting of test samples .....		N
Y.3	Carbon-arc light-exposure apparatus .....		N
Y.4	Xenon-arc light exposure apparatus .....		N
<b>Z</b>	<b>ANNEX Z, OVERVOLTAGE CATEGORIES(see2.10.3.2 and Clause G.2)</b>		<b>N</b>
<b>AA</b>	<b>ANNEX AA, MANDREL TEST (see 2.10.5.8)</b>		<b>N</b>
<b>BB</b>	<b>ANNEX BB, CHANGES IN THE SECOND EDITION</b>		--
<b>CC</b>	<b>ANNEX CC, Evaluation of integrated circuit (IC) circuit limiters</b>		<b>N</b>
CC.1	General		N
CC.2	Test program 1.....		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
CC.3	Test program 2..... :		N
CC.4	Test program 3..... :		N
CC.5	Compliance ..... :		N

<b>DD</b>	<b>ANNEX DD, requirements for the mounting means of rack-mounted equipment</b>		<b>N</b>
DD.1	General		N
DD.2	Mechanical strength test, variable N..... :		N
DD.3	Mechanical strength test, 250N, including end stops..... :		N
DD.4	Compliance ..... :		N

<b>EE</b>	<b>ANNEX EE, Household and home/office document/media shredders</b>		<b>N</b>
EE.1	General		N
EE.2	Marking and instructions		N
	Use of markings or symbols..... :		N
	Information of user instructions, maintenance and/or servicing instructions ..... :		N
EE.3	Compliance ..... :		N
EE.4	Disconnection of power to hazardous moving parts ..... :		N
	Use of markings or symbols..... :		N
EE.5	Protection against hazardous moving parts		N
	Test with test finger (figure 2A) ..... :		N
	Test with wedge probe (figure EE1 and EE2)..... :		N


EN 60950-1																																																																															
Clause	Requirement – Test				Result – Remark		Verdict																																																																								
EN 60950-1:2006/A11:2009/A1:2010/A12:2011 – CENELEC COMMON MODIFICATIONS																																																																															
	Clauses, subclauses, notes, tables and figures which are additional to those in IEC60950-1 and it’s amendmets are prefixed “Z”						--																																																																								
Contents (A2:2013)	Add the following annexes: Annex ZA (normative) Normative references to international publications with their corresponding European publications Annex ZB (normative) Special national conditions Annex ZD (informative) IEC and CENELEC code designations for flexible cords						P																																																																								
General	Delete all the —countryll notes in the reference document (IEC 60950-1:2005) according to the following list: <table><tr><td>1.4.8</td><td>Note 2</td><td>1.5.1</td><td>Note 2 &amp; 3</td><td>1.5.7.1</td><td>Note</td></tr><tr><td>1.5.8</td><td>Note 2</td><td>1.5.9.4</td><td>Note</td><td>1.7.2.1</td><td>Note 4, 5 &amp; 6</td></tr><tr><td>2.2.3</td><td>Note</td><td>2.2.4</td><td>Note</td><td>2.3.2</td><td>Note</td></tr><tr><td>2.3.2.1</td><td>Note 2</td><td>2.3.4</td><td>Note 2</td><td>2.6.3.3</td><td>Note 2 &amp; 3</td></tr><tr><td>2.7.1</td><td>Note</td><td>2.10.3.2</td><td>Note 2</td><td>2.10.5.13</td><td>Note 3</td></tr><tr><td>3.2.1.1</td><td>Note</td><td>3.2.4</td><td>Note 3</td><td>2.5.1</td><td>Note 2</td></tr><tr><td>4.3.6</td><td>Note 1 &amp; 2</td><td>4.7</td><td>Note 4</td><td>4.7.2.2</td><td>Note</td></tr><tr><td>4.7.3.1</td><td>Note 2</td><td>5.1.7.1</td><td>Note 3 &amp; 4</td><td>5.3.7</td><td>Note 1</td></tr><tr><td>6</td><td>Note 2 &amp; 5</td><td>6.1.2.1</td><td>Note 2</td><td>6.1.2.2</td><td>Note</td></tr><tr><td>6.2.2</td><td>Note</td><td>6.2.2.1</td><td>Note 2</td><td>6.2.2.2</td><td>Note</td></tr><tr><td>7.1</td><td>Note 3</td><td>7.2</td><td>Note</td><td>7.3</td><td>Note 1 &amp; 2</td></tr><tr><td>G.2.1</td><td>Note 2</td><td>Annex H</td><td>Note 2</td><td></td><td></td></tr></table>						1.4.8	Note 2	1.5.1	Note 2 & 3	1.5.7.1	Note	1.5.8	Note 2	1.5.9.4	Note	1.7.2.1	Note 4, 5 & 6	2.2.3	Note	2.2.4	Note	2.3.2	Note	2.3.2.1	Note 2	2.3.4	Note 2	2.6.3.3	Note 2 & 3	2.7.1	Note	2.10.3.2	Note 2	2.10.5.13	Note 3	3.2.1.1	Note	3.2.4	Note 3	2.5.1	Note 2	4.3.6	Note 1 & 2	4.7	Note 4	4.7.2.2	Note	4.7.3.1	Note 2	5.1.7.1	Note 3 & 4	5.3.7	Note 1	6	Note 2 & 5	6.1.2.1	Note 2	6.1.2.2	Note	6.2.2	Note	6.2.2.1	Note 2	6.2.2.2	Note	7.1	Note 3	7.2	Note	7.3	Note 1 & 2	G.2.1	Note 2	Annex H	Note 2			P
1.4.8	Note 2	1.5.1	Note 2 & 3	1.5.7.1	Note																																																																										
1.5.8	Note 2	1.5.9.4	Note	1.7.2.1	Note 4, 5 & 6																																																																										
2.2.3	Note	2.2.4	Note	2.3.2	Note																																																																										
2.3.2.1	Note 2	2.3.4	Note 2	2.6.3.3	Note 2 & 3																																																																										
2.7.1	Note	2.10.3.2	Note 2	2.10.5.13	Note 3																																																																										
3.2.1.1	Note	3.2.4	Note 3	2.5.1	Note 2																																																																										
4.3.6	Note 1 & 2	4.7	Note 4	4.7.2.2	Note																																																																										
4.7.3.1	Note 2	5.1.7.1	Note 3 & 4	5.3.7	Note 1																																																																										
6	Note 2 & 5	6.1.2.1	Note 2	6.1.2.2	Note																																																																										
6.2.2	Note	6.2.2.1	Note 2	6.2.2.2	Note																																																																										
7.1	Note 3	7.2	Note	7.3	Note 1 & 2																																																																										
G.2.1	Note 2	Annex H	Note 2																																																																												
General (A1:2010)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A1:2010) according to the following list: <table><tr><td>1.5.7.1</td><td>Note</td><td></td><td>6.1.2.1</td><td>Note 2</td><td></td></tr><tr><td>6.2.2.1</td><td>Note 2</td><td></td><td>EE.3</td><td>Note</td><td></td></tr></table>						1.5.7.1	Note		6.1.2.1	Note 2		6.2.2.1	Note 2		EE.3	Note		P																																																												
1.5.7.1	Note		6.1.2.1	Note 2																																																																											
6.2.2.1	Note 2		EE.3	Note																																																																											
General (A2:2013)	Delete all the “country” notes in the reference document (IEC 60950-1:2005/A2:2013) according to the following list: <table><tr><td>2.7.1</td><td>Note *</td><td></td><td>2.10.3.1</td><td>Note 2</td><td></td></tr><tr><td>6.2.2.</td><td>Note</td><td></td><td></td><td></td><td></td></tr></table> * Note of secretary: Text of Common Modification remains unchanged.						2.7.1	Note *		2.10.3.1	Note 2		6.2.2.	Note					--																																																												
2.7.1	Note *		2.10.3.1	Note 2																																																																											
6.2.2.	Note																																																																														
1.1.1 (A1:2010)	Replace the text of NOTE 3 by the following. NOTE 3 The requirements of EN 60065 may also be used to meet safety requirements for multimedia equipment. See IEC Guide 112, Guide on the safety of multimedia equipment. For television sets EN 60065 applies.						--																																																																								

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
1.3.Z1	<p>Add the following subclause:</p> <p>1.3.Z1 Exposure to excessive sound pressure</p> <p>The apparatus shall be so designed and constructed as to present no danger when used for its intended purpose, either in normal operating conditions or under fault conditions, particularly providing protection against exposure to excessive sound pressures from headphones or earphones.</p> <p>NOTE Z1 A new method of measurement is described in EN 50332-1, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 1: General method for “one package equipment”, and in EN 50332-2, Sound system equipment: Headphones and earphones associated with portable audio equipment - Maximum sound pressure level measurement methodology and limit considerations - Part 2: Guidelines to associate sets with headphones coming from different manufacturers.</p>		N
(A12:2011)	<p>In EN 60950-1:2006/A12:2011</p> <p>Delete the addition of 1.3.Z1 / EN 60950-1:2006</p> <p>Delete the definition 1.2.3.Z1 / EN 60950-1:2006 /A1:2010</p>		N
1.5.1 (Added info*)	<p>Add the following NOTE:</p> <p>NOTE Z1 The use of certain substances in electrical and electronic equipment is restricted within the EU: see Directive 2002/95/EC.</p> <p>New Directive 2011/65/11 *</p>		N
1.7.2.1 (A1:2010)	<p>In addition, for a PORTABLE SOUND SYSTEM, the instructions shall include a warning that excessive sound pressure from earphones and headphones can cause hearing loss.</p>		N
1.7.2.1 (A12:2011)	<p>In EN 60950-1:2006/A12:2011</p> <p>Delete NOTE Z1 and the addition for Portable Sound System.</p> <p>Add the following clause and annex to the existing standard and amendments.</p>		N
	<b>Zx Protection against excessive sound pressure from personal music players</b>		--
	<p><b>Zx.1 General</b></p> <p>This sub-clause specifies requirements for protection against excessive sound pressure from personal music players that are closely coupled to the ear. It also specifies requirements for earphones and headphones intended for use with personal music players.</p> <p>A personal music player is a portable equipment for personal use, that:</p> <ul style="list-style-type: none"> <li>- is designed to allow the user to listen to recorded or broadcast sound or video; and</li> <li>- primarily uses headphones or earphones that can be worn in or on or around the ears;</li> <li>- allows the user to walk around while in use.</li> </ul>		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p><i>NOTE 1 Examples are hand-held or body-worn portable CD players, MP3 audio players, mobile phones with MP3 type features, PDA's or similar equipment.</i></p> <p>A personal music player and earphones or headphones intended to be used with personal music players shall comply with the requirements of this sub-clause.</p> <p>The requirements in this sub-clause are valid for music or video mode only.</p> <p>The requirements do not apply:</p> <ul style="list-style-type: none"> <li>- while the personal music player is connected to an external amplifier; or</li> <li>- while the headphones or earphones are not used.</li> </ul> <p><i>NOTE 2 An external amplifier is an amplifier which is not part of the personal music player or the listening device, but which is intended to play the music as a standalone music player.</i></p> <p>The requirements do not apply to:</p> <ul style="list-style-type: none"> <li>hearing aid equipment and professional equipment;</li> </ul> <p><i>NOTE 3 Professional equipment is equipment sold through special sales channels. All products sold through normal electronics stores are considered not to be professional equipment.</i></p> <ul style="list-style-type: none"> <li>- analogue personal music players (personal music players without any kind of digital processing of the sound signal) that are brought to the market before the end of 2015.</li> </ul> <p><i>NOTE 4 This exemption has been allowed because this technology is falling out of use and it is expected that within a few years it will no longer exist. This exemption will not be extended to other technologies.</i></p> <p>For equipment which is clearly designed or intended for use by young children, the limits of EN 71-1 apply.</p>		N
	<p><b>Zx.2 Equipment requirements</b></p> <p>No safety provision is required for equipment that complies with the following:</p> <ul style="list-style-type: none"> <li>- equipment provided as a package (personal music player with its listening device), where the acoustic output <math>L_{Aeq,T}</math> is <math>\leq 85</math> dBA measured while playing the fixed "programme simulation noise" as described in EN 50332-1; and</li> <li>- a personal music player provided with an analogue electrical output socket for a listening device, where the electrical output is <math>\leq 27</math> mV measured as described in EN 50332-2, while playing the fixed "programme simulation noise" as described in EN 50332-1.</li> </ul> <p><i>NOTE 1 Wherever the term acoustic output is used in this clause, the 30 s A-weighted equivalent sound pressure level <math>L_{Aeq,T}</math> is meant. See also Zx.5 and Annex Zx.</i></p>		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p>All other equipment shall:</p> <p>a) protect the user from unintentional acoustic outputs exceeding those mentioned above; and</p> <p>b) have a standard acoustic output level not exceeding those mentioned above, and automatically return to an output level not exceeding those mentioned above when the power is switched off; and</p> <p>c) provide a means to actively inform the user of the increased sound pressure when the equipment is operated with an acoustic output exceeding those mentioned above. Any means used shall be acknowledged by the user before activating a mode of operation which allows for an acoustic output exceeding those mentioned above. The acknowledgement does not need to be repeated more than once every 20 h of cumulative listening time; and</p> <p><i>NOTE 2 Examples of means include visual or audible signals. Action from the user is always required.</i></p> <p><i>NOTE 3 The 20 h listening time is the accumulative listening time, independent how often and how long the personal music player has been switched off.</i></p> <p>d) have a warning as specified in Zx.3; and</p> <p>e) not exceed the following:</p> <p>1) equipment provided as a package (player with its listening device), the acoustic output shall be <math>\leq 100</math> dBA measured while playing the fixed “programme simulation noise” described in EN 50332-1; and</p> <p>2) a personal music player provided with an analogue electrical output socket for a listening device, the electrical output shall be <math>\leq 150</math> mV measured as described in EN 50332-2, while playing the fixed “programme simulation noise” described in EN 50332-1.</p> <p>For music where the average sound pressure (long term LAeq,T) measured over the duration of the song is lower than the average produced by the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA. In this case T becomes the duration of the song.</p> <p><i>NOTE 4 Classical music typically has an average sound pressure (long term LAeq,T) which is much lower than the average programme simulation noise. Therefore, if the player is capable to analyse the song and compare it with the programme simulation noise, the warning does not need to be given as long as the average sound pressure of the song is below the basic limit of 85 dBA.</i></p> <p><i>For example, if the player is set with the programme simulation noise to 85 dBA, but the average music level of the song is only 65 dBA, there is no need to give a warning or ask an acknowledgement as long as the average sound level of the song is not above the basic limit of 85 dBA.</i></p>		N



EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p><b>Zx.3 Warning</b></p> <p>The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:</p> <ul style="list-style-type: none"> <li>- the symbol of Figure 1 with a minimum height of 5 mm; and</li> <li>- the following wording, or similar:</li> </ul> <p>“To prevent possible hearing damage, do not listen at high volume levels for long periods.”</p>  <p><b>Figure 1 – Warning label (IEC 60417-6044)</b></p> <p>Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.</p>		N
	<b>Zx.4 Requirements for listening devices (headphones and earphones)</b>		N
	<p><b>Zx.4.1 Wired listening devices with analogue input</b></p> <p>With 94 dBA sound pressure output LAeq,T, the input voltage of the fixed “programme simulation noise” described in EN 50332-2 shall be <math>\geq 75</math> mV.</p> <p>This requirement is applicable in any mode where the headphones can operate (active or passive), including any available setting (for example built-in volume level control).</p> <p><i>NOTE The values of 94 dBA – 75 mV correspond with 85dBA – 27 mV and 100 dBA – 150 mV.</i></p>		N
	<p><b>Zx.4.2 Wired listening devices with digital input</b></p> <p>With any playing device playing the fixed “programme simulation noise” described in EN 50332-1 (and respecting the digital interface standards, where a digital interface standard exists that specifies the equivalent acoustic level), the acoustic output LAeq,T of the listening device shall be <math>\leq 100</math> dBA.</p> <p>This requirement is applicable in any mode where the headphones can operate, including any available setting (for example built-in volume level control, additional sound feature like equalization, etc.).</p> <p><i>NOTE An example of a wired listening device with digital input is a USB headphone.</i></p>		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
	<p><b>Zx.4.3 Wireless listening devices</b></p> <p>In wireless mode:</p> <ul style="list-style-type: none"> <li>- with any playing and transmitting device playing the fixed programme simulation noise described in EN 50332-1; and</li> <li>- respecting the wireless transmission standards, where an air interface standard exists that specifies the equivalent acoustic level; and</li> <li>- with volume and sound settings in the listening device (for example built-in volume level control, additional sound feature like equalization, etc.) set to the combination of positions that maximize the measured acoustic output for the abovementioned programme simulation noise, the acoustic output LAeq,T of the listening device shall be ≤ 100 dBA.</li> </ul> <p><i>NOTE An example of a wireless listening device is a Bluetooth headphone.</i></p>		N
	<p><b>Zx.5 Measurement methods</b></p> <p>Measurements shall be made in accordance with EN 50332-1 or EN 50332-2 as applicable. Unless stated otherwise, the time interval T shall be 30 s.</p> <p><i>NOTE Test method for wireless equipment provided without listening device should be defined.</i></p>		N
2.7.1	<p>Replace the subclause as follows:</p> <p>Basic requirements</p> <p>To protect against excessive current, short-circuits and earth faults in PRIMARY CIRCUITS, protective devices shall be included either as integral parts of the equipment or as parts of the building installation, subject to the following, a), b) and c):</p> <p>a) except as detailed in b) and c), protective devices necessary to comply with the requirements of 5.3 shall be included as parts of the equipment;</p>		P
	<p>b) for components in series with the mains input to the equipment such as the supply cord, appliance coupler, r.f.i. filter and switch, short-circuit and earth fault protection may be provided by protective devices in the building installation;</p> <p>c) it is permitted for PLUGGABLE EQUIPMENT TYPE B or PERMANENTLY CONNECTED EQUIPMENT, to rely on dedicated overcurrent and short-circuit protection in the building installation, provided that the means of protection, e.g. fuses or circuit breakers, is fully specified in the installation instructions.</p> <p>If reliance is placed on protection in the building installation, the installation instructions shall so state, except that for PLUGGABLE EQUIPMENT TYPE A the building installation shall be regarded as providing protection in accordance with the rating of the wall socket outlet.</p>		N
2.7.2	This subclause has been declared 'void'.		N
3.2.3	Delete the NOTE in Table 3A, and delete also in this table the conduit sizes in parentheses.		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
3.2.5.1	<p>Replace “60245 IEC 53” by “H05 RR-F”;  “60227 IEC 52” by “H03 VV-F or H03 VVH2-F”;  “60227 IEC 53” by “H05 VV-F or H05 VVH2-F2”.</p> <p>In Table 3B, replace the first four lines by the following:  Up to and including 6   0,75 <sup>a)</sup>    Over 6 up to and including 10   (0,75) <sup>b)</sup> 1,0    Over 10 up to and including 16   (1,0) <sup>c)</sup> 1,5  </p> <p>In the conditions applicable to Table 3B delete the words “in some countries” in condition <sup>a)</sup>.</p> <p>In NOTE 1, applicable to Table 3B, delete the second sentence.</p>		N
3.2.5.1 (A2:2013)	NOTE Z1 The harmonised code designations corresponding to the IEC cord types are given in Annex ZD		P
3.3.4	<p>In Table 3D, delete the fourth line: conductor sizes for 10 to 13 A, and replace with the following:  Over 10 up to and including 16   1,5 to 2,5   1,5 to 4  </p> <p>Delete the fifth line: conductor sizes for 13 to 16 A</p>		N
4.3.13.6 (A1:2010)	<p>Replace the existing NOTE by the following:  NOTE Z1 Attention is drawn to:  1999/519/EC: Council Recommendation on the limitation of exposure of the general public to electromagnetic fields 0 Hz to 300 GHz, and  2006/25/EC: Directive on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).</p>		P
	Standards taking into account mentioned Recommendation and Directive which demonstrate compliance with the applicable EU Directive are indicated in the OJEC.		P
Annex H	<p>Replace the last paragraph of this annex by:  At any point 10 cm from the surface of the OPERATOR ACCESS AREA, the dose rate shall not exceed 1 µSv/h (0,1 mR/h) (see NOTE). Account is taken of the background level.</p> <p>Replace the notes as follows:  NOTE These values appear in Directive 96/29/Euratom.  Delete NOTE 2.</p>		N
Bibliography	Additional EN standards.		—
<b>ZA</b>	<b>NORMATIVE REFERENCES TO INTERNATIONAL PUBLICATIONS WITH THEIR CORRESPONDING EUROPEAN PUBLICATIONS</b>		—

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
1.2.4.1	In <b>Denmark</b> , certain types of Class I appliances (see 3.2.1.1) may be provided with a plug not establishing earthing conditions when inserted into Danish socket-outlets.		N
1.2.13.14	In <b>Norway</b> and <b>Sweden</b> , for requirements see 1.7.2.1 and 7.3 of this annex.		N
1.5.7.1	In <b>Finland</b> , <b>Norway</b> and <b>Sweden</b> , resistors bridging BASIC INSULATION in CLASS I PLUGGABLE EQUIPMENT TYPE A must comply with the requirements in 1.5.7.1. In addition when a single resistor is used, the resistor must withstand the resistor test in 1.5.7.2.		N
1.5.8	In <b>Norway</b> , due to the IT power system used (see annex V, Figure V.7), capacitors are required to be rated for the applicable line-to-line voltage (230 V).		P
1.5.9.4	In <b>Finland</b> , <b>Norway</b> and <b>Sweden</b> , the third dashed sentence is applicable only to equipment as defined in 6.1.2.2 of this annex.		N
1.7.2.1	In <b>Finland</b> , <b>Norway</b> and <b>Sweden</b> , CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.  The marking text in the applicable countries shall be as follows:  In Finland: "Laite on liitettävä suojakoskettimilla varustettuun pistorasiaan" In Norway: "Apparatet må tilkoples jordet stikkontakt"		N
1.7.2.1 (A11:2009)	In Sweden: "Apparaten skall anslutas till jordat uttag" In <b>Norway</b> and <b>Sweden</b> , the screen of the cable distribution system is normally not earthed at the entrance of the building and there is normally no equipotential bonding system within the building. Therefore the protective earthing of the building installation need to be isolated from the screen of a cable distribution system.  It is however accepted to provide the insulation external to the equipment by an adapter or an interconnection cable with galvanic isolator, which may be provided by e.g. a retailer.  The user manual shall then have the following or similar information in Norwegian and Swedish language respectively, depending on in what country the equipment is intended to be used in:		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
	<p>“Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing – and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11).”</p> <p><i>NOTE In Norway, due to regulation for installations of cable distribution systems, and in Sweden, a galvanic isolator shall provide electrical insulation below 5 MHz. The insulation shall withstand a dielectric strength of 1,5 kV r.m.s., 50 Hz or 60 Hz, for 1 min.</i></p> <p>Translation to Norwegian (the Swedish text will also be accepted in Norway):</p> <p>“Utstyr som er koplet til beskyttelsesjord via nettplugg og/eller via annet jordtilkoplet utstyr – og er tilkoplet et kabel-TV nett, kan forårsake brannfare. For å unngå dette skal det ved tilkopling av utstyret til kabel-TV nettet installeres en galvanisk isolator mellom utstyret og kabel- TV nettet.”</p> <p>Translation to Swedish:</p> <p>”Utrustning som är kopplad till skyddsjord via jordat vägguttag och/eller via annan utrustning och samtidigt är kopplad till kabel-TV nät kan i vissa fall medföra risk för brand. För att undvika detta skall vid anslutning av utrustningen till kabel-TV nät alvanisk isolator finnas mellan utrustningen och kabel-TV nätet.”</p>		N
1.7.2.1 (A2:2013)	<p>In <b>Denmark</b>, CLASS I PLUGGABLE EQUIPMENT TYPE A intended for connection to other equipment or a network shall, if safety relies on connection to protective earth or if surge suppressors are connected between the network terminals and accessible parts, have a marking stating that the equipment must be connected to an earthed mains socket-outlet.</p> <p>The marking text in <b>Denmark</b> shall be as follows: In <b>Denmark</b>: “Apparatets stikprop skal tilsluttes en stikkontakt med jord, som giver forbindelse til stikproppens jord.”</p>		N
1.7.5	<p>In <b>Denmark</b>, socket-outlets for providing power to other equipment shall be in accordance with the Heavy Current Regulations, Section 107-2-D1, Standard Sheet DK 1-3a, DK 1-5a or DK 1-7a, when used on Class I equipment. For STATIONARY EQUIPMENT the socket-outlet shall be in accordance with Standard Sheet DK 1-1b or DK 1-5a.</p> <p>For <b>CLASS II EQUIPMENT</b> the socket outlet shall be in accordance with Standard Sheet DKA 1-4a.</p>		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
1.7.5 (A2:2013)	<p>In <b>Denmark</b>, socket-outlets for providing power to other equipment shall be in accordance with the DS 60884-2-D1:2011.</p> <p>For class I equipment the following Standard Sheets are applicable: DK 1-3a, DK 1-1c, DK 1-1d, DK 1-5a or DK 1-7a, with the exception for STATIONARY EQUIPMENT where the socket-outlets shall be in accordance with Standard Sheet DK 1-1b, DK 1-1c, DK 1-1d or DK 1-5a.</p> <p>Socket outlets intended for providing power to Class II apparatus with a rated current of 2,5 A shall be in accordance with DS 60884-2-D1 standard sheet DKA 1-4a. Other current rating socket outlets shall be in compliance with by DS 60884-2-D1 Standard Sheet DKA 1-3a or DKA 1-3b.</p> <p>Justification the Heavy Current Regulations, 6c</p>		N
2.2.4	In <b>Norway</b> , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N
2.3.2	In <b>Finland, Norway and Sweden</b> there are additional requirements for the insulation. See 6.1.2.1 and 6.1.2.2 of this annex.		N
2.3.4	In <b>Norway</b> , for requirements see 1.7.2.1, 6.1.2.1 and 6.1.2.2 of this annex.		N
2.6.3.3	In the <b>United Kingdom</b> , the current rating of the circuit shall be taken as 13 A, not 16 A.		P
2.7.1	In the <b>United Kingdom</b> , to protect against excessive currents and short-circuits in the PRIMARY CIRCUIT of DIRECT PLUG-IN EQUIPMENT, tests according to 5.3 shall be conducted, using an external protective device rated 30 A or 32 A. If these tests fail, suitable protective devices shall be included as integral parts of the DIRECT PLUG-IN EQUIPMENT, so that the requirements of 5.3 are met.		N
2.10.5.13	In <b>Finland, Norway and Sweden</b> , there are additional requirements for the insulation, see 6.1.2.1 and 6.1.2.2 of this annex.		N
3.2.1.1	<p>In <b>Switzerland</b>, supply cords of equipment having a RATED CURRENT not exceeding 10 A shall be provided with a plug complying with SEV 1011 or IEC 60884-1 and one of the following dimension sheets:</p> <p>SEV 6532-2.1991 Plug Type 15 3P+N+PE 250/400 V, 10 A SEV 6533-2.1991 Plug Type 11 L+N 250 V, 10 A SEV 6534-2.1991 Plug Type 12 L+N+PE 250 V, 10 A</p> <p>In general, EN 60309 applies for plugs for currents exceeding 10 A. However, a 16 A plug and socket-outlet system is being introduced in Switzerland, the plugs of which are according to the following dimension sheets, published in February 1998:</p> <p>SEV 5932-2.1998: Plug Type 25 , 3L+N+PE 230/400 V, 16 A SEV 5933-2.1998: Plug Type 21, L+N, 250 V, 16A SEV 5934-2.1998: Plug Type 23, L+N+PE 250 V, 16 A</p>		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
3.2.1.1	<p>In <b>Denmark</b>, supply cords of single-phase equipment having a rated current not exceeding 13 A shall be provided with a plug according to the Heavy Current Regulations, Section 107-2-D1.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules shall be provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.</p> <p>If poly-phase equipment and single-phase equipment having a RATED CURRENT exceeding 13 A is provided with a supply cord with a plug, this plug shall be in accordance with the Heavy Current Regulations, Section 107-2-D1 or EN 60309-2.</p>		N
3.2.1.1	<p>In <b>Spain</b>, supply cords of single-phase equipment having a rated current not exceeding 10 A shall be provided with a plug according to UNE 20315:1994.</p> <p>Supply cords of single-phase equipment having a rated current not exceeding 2,5 A shall be provided with a plug according to UNE-EN 50075:1993.</p> <p>CLASS I EQUIPMENT provided with socket-outlets with earth contacts or which are intended to be used in locations where protection against indirect contact is required according to the wiring rules, shall be provided with a plug in accordance with standard UNE 20315:1994.</p> <p>If poly-phase equipment is provided with a supply cord with a plug, this plug shall be in accordance with UNE-EN 60309-2.</p>		N
3.2.1.1	<p>In the <b>United Kingdom</b>, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to BS 1363 by means of that flexible cable or cord and plug, shall be fitted with a 'standard plug' in accordance with Statutory Instrument 1768:1994 - The Plugs and Sockets etc. (Safety) Regulations 1994, unless exempted by those regulations.</p> <p>NOTE 'Standard plug' is defined in SI 1768:1994 and essentially means an approved plug conforming to BS 1363 or an approved conversion plug.</p>		N
3.2.1.1	<p>In <b>Ireland</b>, apparatus which is fitted with a flexible cable or cord and is designed to be connected to a mains socket conforming to I.S. 411 by means of that flexible cable or cord and plug, shall be fitted with a 13 A plug in accordance with Statutory Instrument 525:1997 - National Standards Authority of Ireland (section 28) (13 A Plugs and Conversion Adaptors for Domestic Use) Regulations 1997.</p>		N
3.2.4	In <b>Switzerland</b> , for requirements see 3.2.1.1 of this annex.		N
3.2.5.1	In the <b>United Kingdom</b> , a power supply cord with conductor of 1,25 mm <sup>2</sup> is allowed for equipment with a rated current over 10 A and up to and including 13 A.		N

EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
3.3.4	In the <b>United Kingdom</b> , the range of conductor sizes of flexible cords to be accepted by terminals for equipment with a RATED CURRENT of over 10 A up to and including 13 A is: • 1,25 mm <sup>2</sup> to 1,5 mm <sup>2</sup> nominal cross-sectional area.		N
4.3.6	In the <b>United Kingdom</b> , the torque test is performed using a socket outlet complying with BS 1363 part 1:1995, including Amendment 1:1997 and Amendment 2:2003 and the plug part of DIRECT PLUG-IN EQUIPMENT shall be assessed to BS 1363: Part 1, 12.1, 12.2, 12.3, 12.9, 12.11, 12.12, 12.13, 12.16 and 12.17, except that the test of 12.17 is performed at not less than 125 °C. Where the metal earth pin is replaced by an Insulated Shutter Opening Device (ISOD), the requirements of clauses 22.2 and 23 also apply.		N
4.3.6	In <b>Ireland</b> , DIRECT PLUG-IN EQUIPMENT is known as plug similar devices. Such devices shall comply with Statutory Instrument 526:1997 - National Standards Authority of Ireland (Section 28) (Electrical plugs, plug similar devices and sockets for domestic use) Regulations, 1997.		N
5.1.7.1	In <b>Finland, Norway and Sweden</b> TOUCH CURRENT measurement results exceeding 3,5 mA r.m.s. are permitted only for the following equipment: • STATIONARY PLUGGABLE EQUIPMENT TYPE A that is intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, for example, in a telecommunication centre; and has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR; and is provided with instructions for the installation of that conductor by a SERVICE PERSON; • STATIONARY PLUGGABLE EQUIPMENT TYPE B; • STATIONARY PERMANENTLY CONNECTED EQUIPMENT.		N
6.1.2.1 (A1:2010)	In <b>Finland, Norway and Sweden</b> , add the following text between the first and second paragraph of the compliance clause: If this insulation is solid, including insulation forming part of a component, it shall at least consist of either - two layers of thin sheet material, each of which shall pass the electric strength test below, or - one layer having a distance through insulation of at least 0,4 mm, which shall pass the electric strength test below. Alternatively for components, there is no distance through insulation requirements for the insulation consisting of an insulating compound completely filling the casing, so that CLEARANCES and CREEPAGE DISTANCES do not exist, if the component passes the electric strength test in accordance with the compliance clause below and in addition		N



EN 60950-1			
Clause	Requirement – Test	Result – Remark	Verdict
ZB ANNEX (normative) SPECIAL NATIONAL CONDITIONS (EN)			
	<p>- passes the tests and inspection criteria of 2.10.11 with an electric strength test of 1,5 kV multiplied by 1,6 (the electric strength test of 2.10.10 shall be performed using 1,5 kV), and</p> <p>- is subject to ROUTINE TESTING for electric strength during manufacturing, using a test voltage of 1,5 kV.</p> <p>It is permitted to bridge this insulation with an optocoupler complying with 2.10.5.4 b).</p> <p>It is permitted to bridge this insulation with a capacitor complying with EN 60384-14:2005, subclass Y2.</p> <p>A capacitor classified Y3 according to EN 60384-14:2005, may bridge this insulation under the following conditions:</p> <ul style="list-style-type: none"> <li>- the insulation requirements are satisfied by having a capacitor classified Y3 as defined by EN 60384-14, which in addition to the Y3 testing, is tested with an impulse test of 2,5 kV defined in EN 60950-1:2006, 6.2.2.1;</li> <li>- the additional testing shall be performed on all the test specimens as described in EN 60384-14:</li> <li>- the impulse test of 2,5 kV is to be performed before the endurance test in EN 60384-14, in the sequence of tests as described in EN 60384-14.</li> </ul>		N
6.1.2.2	In <b>Finland, Norway</b> and <b>Sweden</b> , the exclusions are applicable for PERMANENTLY CONNECTED EQUIPMENT, PLUGGABLE EQUIPMENT TYPE B and equipment intended to be used in a RESTRICTED ACCESS LOCATION where equipotential bonding has been applied, e.g. in a telecommunication centre, and which has provision for a permanently connected PROTECTIVE EARTHING CONDUCTOR and is provided with instructions for the installation of that conductor by a SERVICE PERSON.		N
7.2	In <b>Finland, Norway</b> and <b>Sweden</b> , for requirements see 6.1.2.1 and 6.1.2.2 of this annex. The term TELECOMMUNICATION NETWORK in 6.1.2 being replaced by the term CABLE DISTRIBUTION SYSTEM.		N
7.3	In <b>Norway</b> and <b>Sweden</b> , for requirements see 1.2.13.14 and 1.7.2.1 of this annex.		N
7.3	In <b>Norway</b> , for installation conditions see EN 60728-11:2005.		N

1.5.1	TABLE: list of critical components				P
Object/part no.	Manufacturer/ trademark	Type/model	Technical data	Standard	Mark(s) of conformity
Fusible resister (FR1)	SHI MENG ELECTRONIC (SHENZHEN) CO LTD	FKN	2.2ohm, 1W	EN60950-1	Tested with appliance
Heat shrinkable tube (cover FR1)	CHANGYUAN ELECTRONICS GROUP CO LTD	CYG-ZHP	125°C, 600V, VW-1	UL224	UL E180908
Electrical capacitor (C1, C2)	Interchangeable	Interchangeable	400V, 10uF, 105°C	--	--
Transformer (T1 )	SHENZHEN TRANSFORMER ELECTRONICS CO LTD	HJ-0502000W2XC	Class B	EN60950-1	Tested with appliance
-Bobbin	CHANG CHUN CHEMICAL (ZHANGZHOU) CO LTD	T375J	Min. 0.45mm, V-0,150°C	UL94	UL E304813
-Tape	SHENZHEN CITY WEICHUANGDA MATERIAL TECHNOLOGY CO LTD	W-001	130°C	UL510	UL E333581
- Magnet Wire	DONGGUANG DELU ENAMELLED WIRE CO LTD	MW 5-C	155°C	UL1446	UL E177138
-Triple Insulation wire	SHENZHEN JIUDING NEW MATERIAL CO., LTD.	DTIW-B	130°C	IEC/EN60950-1	VDE 40037495
Adhesive Glue	CHEMTROS CO LTD	508	V-0	UL94, UL746	UL E108491
Y capacitor (CY1)	Shenzhen Haotian Electronic Co., Ltd.	HT	Y1 type, 470pF, 400V, 125°C	EN 60384-14	VDE 40029300
Mylar (between pri. and sec.)	SABIC INNOVATIVE PLASTICS US L L C	XH2315	0.75mm, V-0, 105°C	UL94, UL746	UL E121562
Electrical capacitor (C7)	Interchangeable	Interchangeable	6.3V, 220uF, 105°C	--	--
Electrical capacitor (C8)	Interchangeable	Interchangeable	6.3V, 470uF, 105°C	--	--
PCB	Interchangeable	Interchangeable	V-0, 130°C	UL94, UL796	UL ZPMV2
Enclosure	NAN YA PLASTICS (HUI ZHOU) CORP LTD	5410G1	Min. 1.5mm, V-0,120°C	UL94	UL E235269
Enclosure (plug holder)	NAN YA PLASTICS (HUI ZHOU) CORP LTD	5410G1	Min. 1.5mm, V-0,120°C	UL94	UL E235269
Note(s):--					

1.6.2	TABLE: electrical data (in normal conditions)					P
U (V)	I (A)	I rated (A)	P (W)	Fuse #	I fuse (A)	Condition/status
90V/50Hz	0.245	--	13.92	FR1	0.245	Maximum normal load.
90V/60Hz	0.246	--	13.90	FR1	0.246	Maximum normal load.
100V/50Hz	0.225	0.3	13.78	FR1	0.225	Maximum normal load.
100V/60Hz	0.225	0.3	13.74	FR1	0.225	Maximum normal load.
240V/50Hz	0.113	0.3	13.72	FR1	0.113	Maximum normal load.
240V/60Hz	0.112	0.3	13.73	FR1	0.112	Maximum normal load.
264V/50Hz	0.106	--	13.65	FR1	0.106	Maximum normal load.
264V/60Hz	0.106	--	13.64	FR1	0.106	Maximum normal load.
Note(s): --						

2.1.1.5c)1)	TABLE: max. V, A, VA test				P
Voltage (rated) (V)	Current (rated) (A)	Voltage (max.) (V)	Current (max.) (A)	VA (max.) (VA)	
5.0	2.0	5.26	2.21	11.62	
Note(s):--					

2.1.1.5c)2)	TABLE: stored energy		N
Capacitance C (μF)		Voltage U (V)	Energy E (J)
--		--	--
Note(s):--			

2.2	TABLE: evaluation of voltage limiting components in SELV circuits				P
Component (measured between)		max. voltage (V) (normal operation)		Voltage Limiting Components	
		Vpeak	Vd.c.		
T1		28.6	--	--	
Fault test performed on voltage limiting components		Voltage measured (V) in SELV circuits (V peak or V d.c.)			
--		--			
Note(s):--					

2.5	TABLE: limited power source measurement				P
Measured Uoc (V) with all load circuits disconnected:		Isc (A)		VA	
		Meas.	Limit	Meas.	Limit
Normal		2.21	8	11.62	100
D3, S-C		0	8	0	100

Note(s): S-C=Short circuit

2.10.2	TABLE: Working voltage measurement			P
Location		RMS voltage (V)	Peak voltage (V)	Comments
T1: pin 1 to pin 5		198	345	--
T1: pin 2 to pin 5		195	338	--
T1: pin 3 to pin 5		242	438	Max. $V_{RMS}$ and $V_{peak}$
T1: pin 4 to pin 5		199	340	--
T1: pin 1 to pin 6		196	344	--
T1: pin 2 to pin 6		195	342	--
T1: pin 3 to pin 6		236	412	--
T1: pin 4 to pin 6		200	341	--
CY1: primary to secondary		198	340	--
Note(s): --				

2.10.3 and 2.10.4	TABLE: clearance and creepage distance measurements					P
Clearance cl and creepage distance dcr at/of:	U p (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	Required dcr (mm)	dcr (mm)
Primary traces of different polarity before Fusible resister	<420	<250	1.5	>2.9	2.5	>2.9
Trace under fusible resister	<420	<250	1.5	2.9	2.5	2.9
Trace under T1	438	242	4.2	>7.5	5.0	>7.5
Trace under CY1	340	198	4.0	7.5	5.0	7.5
Note(s): --						

2.10.5	TABLE: distance through insulation measurements				P
Distance through insulation di at/of:	U r.m.s. (V)	Test voltage (V)	Required di (mm)	di (mm)	
Enclosure	240	3000	0.4	Min. 1.50	
Bobbin	240	3000	0.4	Min. 0.45	
2 layers of insulating tape	240	3000	3 layers	3 layers	
Mylar	240	3000	0.4	Min. 0.75	
Note(s): --					

4.3.8	TABLE: Batteries		N
The tests of 4.3.8 are applicable only when appropriate battery data is not available			N

Is it possible to install the battery in a reverse polarity position?								N	
	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Uninten- tional charging	Charging		Discharging		Reverse Charging	
	Meas. Current	Manuf. Specs.		Meas. Current	Manuf. Specs.	Meas. Current	Manuf. Specs.	Meas. Current	Manuf. Specs.
Max. current during normal condition	--	--	--	--	--	--	--	--	--
Max. current during fault condition	--	--	--	--	--	--	--	--	--
Test results:									Verdict
- Chemical leaks						--		--	
- Explosion of the battery						--		--	
- Emission of flame or expulsion of molten metal						--		--	
- Electric strength tests of equipment after completion of tests						--		--	
Note(s):--									

4.3.8	TABLE: Batteries		N
Battery category .....	--		
Manufacturer .....	--		
Type/model .....	--		
Voltage, Capacity .....	--		
Circuit protection diagram .....	--		
--			
MARKINGS AND INSTRUCTIONS (1.7.12, 1.7.15)			
Location of replaceable battery	--		
Language(s) .....	--		
Close to the battery .....	--		
In the servicing instructions.....	--		
In the operating instructions .....	--		
Note(s):--			

4.5	TABLE: maximum temperatures			P
	Test voltage (V) ..... :	a):100V×0.9/60Hz b):240V×1.1/50Hz;		--
maximum temperature T of part/at:		T (°C)		allowed Tmax (°C)
		a)	b)	

C1 body			92.2		84.7		105
C2 body			94.5		81.4		105
T1 winding			106.7		101.2		110
T1 bobbin			105.2		98.8		110
CY1			96.3		92.1		125
Mylar			92.4		88.5		105
PCB near T1			110.4		99.3		130
C7 body			101.4		98.6		105
Internal enclosure near T1			81.7		75.0		120
External enclosure near T1			72.5		64.7		95
Ambient			40.0		40.0		--
Temperature T of winding	t <sub>1</sub> (°C)	R <sub>1</sub> (Ω)	t <sub>2</sub> (°C)	R <sub>2</sub> (Ω)	T (°C)	Allowed T <sub>max</sub> (°C)	Insulation Class
--	--	--	--	--	--	--	--
Note : Having a specified maximum ambient temperature of 40°C							

4.5.5	TABLE: ball pressure test of thermoplastic parts					P
	allowed impression diameter (mm) ..... :				≤ 2 mm	--
Part				Test temperature(°C)	Impression diameter (mm)	
Plug hold of enclosure				125	0.9	
Note(s): --						

4.7	TABLE: Resistance to fire					P
Part	Manufacturer of material	Type of material	Thickness (mm)	Flammability class	Evidence	
--	--	--	--	--	--	--
Note(s): Refer to table 1.5.1						

5.1	TABLE: touch current measurement				P
Measured between:		Measured(mA)	Limit(mA)	Comments/conditions	
L/N and output		0.01	0.25	--	
L/N and enclosure		0.005	0.25	--	
Note(s):--					

5.2	TABLE: electric strength tests and impulse tests				P
Test voltage applied between:			Test voltage (V)	Breakdown	
L/N and AC Power Adapter enclosure			3000	No breakdown	

L/N and output	3000	No breakdown
T1 primary to secondary	3000	No breakdown
T1 core to secondary	3000	No breakdown
Mylar	3000	No breakdown
Note(s): --		

5.3	TABLE: fault condition tests				P
	ambient temperature (°C) .....	25.4			--
	rated markings of power supply .....				--
Component no.	Fault	Test voltage (V)	Test time	Fuse no.	Result
Output	S-C	264V	5min	FR1	Unit shutdown immediately, no hazards.
Output	O-L	264V	3.0h	FR1	Until unit shutdown. Max. Temperature T1 coil=102.4°C, no hazards.
T1 ,output	S-C	264V	5min	FR1	Unit shutdown immediately, no hazards.
T1, output	O-L	264V	2.5h	FR1	Unit run into cycle protect, Max. Temperature T1 coil=106.3°C, no hazards.
C1	S-C	264V	3min	FR1	FR1 opened immediately, no hazards.
U3	Pin 2-4, S-C	264V	3min	FR1	FR1 opened immediately, no hazards.
U1	Pin 1-6, S-C	264V	3min	FR1	FR1 opened immediately, no hazards.
D3	S-C	264V	3min	FR1	Unit shutdown immediately, no hazards.
Fault: S-C = short circuit, O-C = open circuit, O-L= overload					
Note: For the test with FR1 opened condition have been repeated ten times with same result.					

**Attachment A**  
**Photos of product**



Fig.1 - overview



Fig.2 - overview



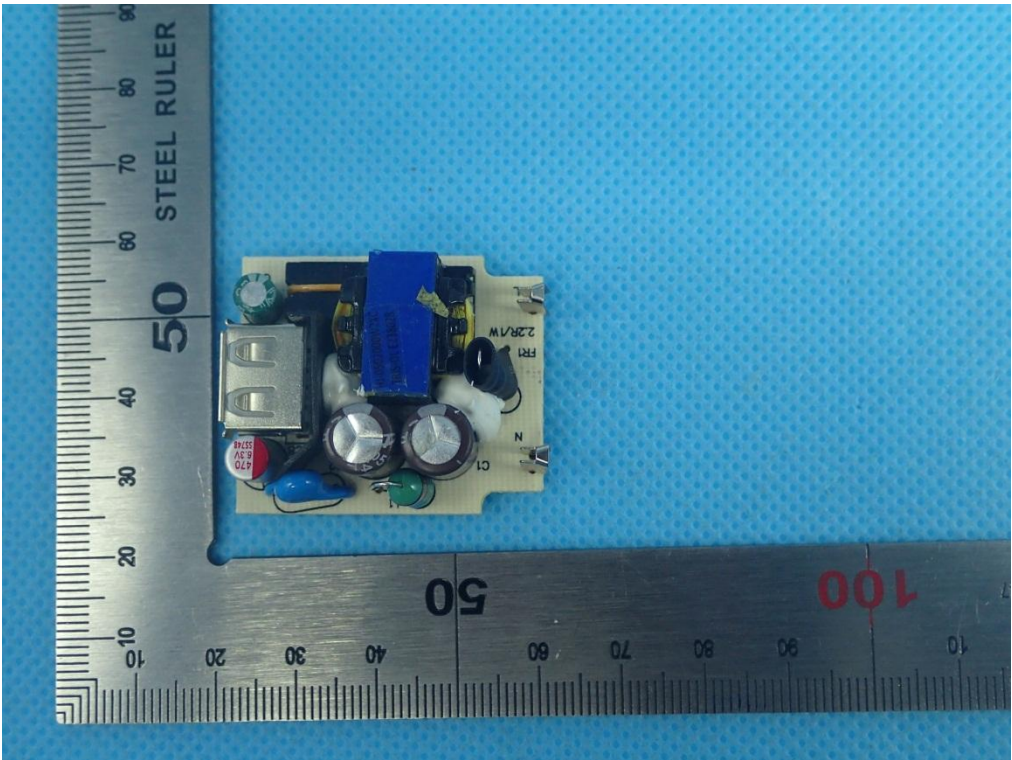


Fig.3 - Above circuit

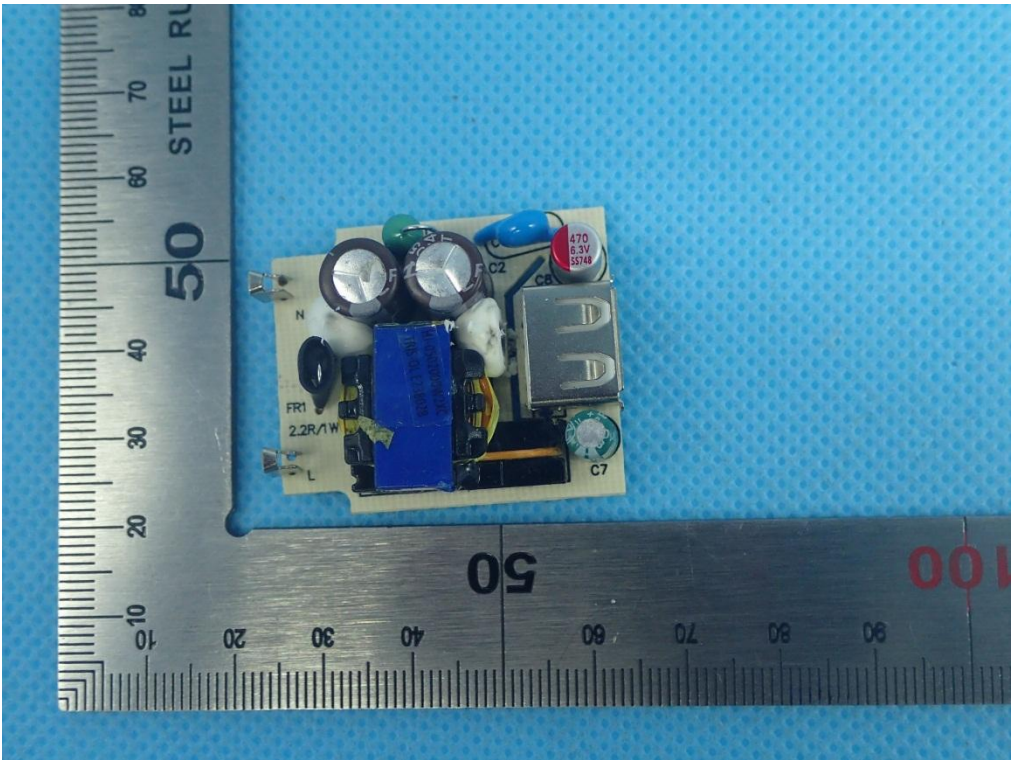


Fig.4 - Above circuit



Fig.5 - Bottom circuit

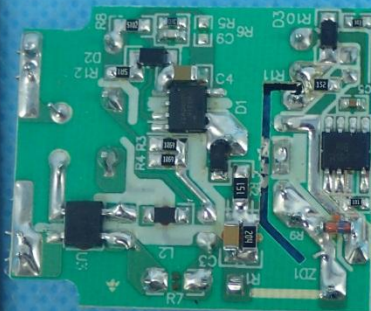


Fig.6 - Bottom circuit

----- END OF REPORT-----