



Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

| Band | Channel | Frequency (MHz) | Gamma | Type | Result | Low Limit | high Limit | Verdict |
|----------|---------|-----------------|-------------|---------------------------|--------|-----------|------------|---------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | Frequency Error (Hz) | 0.55 | -174.74 | 174.74 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | RMS Phase Error (Degree) | 0.53 | 0 | 5 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | Peak Phase Error (Degree) | 1.66 | 0 | 20 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | Frequency Error (Hz) | 0.29 | -174.74 | 174.74 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | RMS Phase Error (Degree) | 0.51 | 0 | 5 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | Peak Phase Error (Degree) | 1.62 | 0 | 20 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | Frequency Error (Hz) | -5.65 | -89.76 | 89.76 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | RMS Phase Error (Degree) | 0.30 | 0 | 5 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | Peak Phase Error (Degree) | 0.91 | 0 | 20 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | Frequency Error (Hz) | 3.03 | -89.76 | 89.76 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | RMS Phase Error (Degree) | 0.32 | 0 | 5 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | Peak Phase Error (Degree) | 1.02 | 0 | 20 | PASS |


GPRS1800 Channel=698 Gamma=3;3;3;3

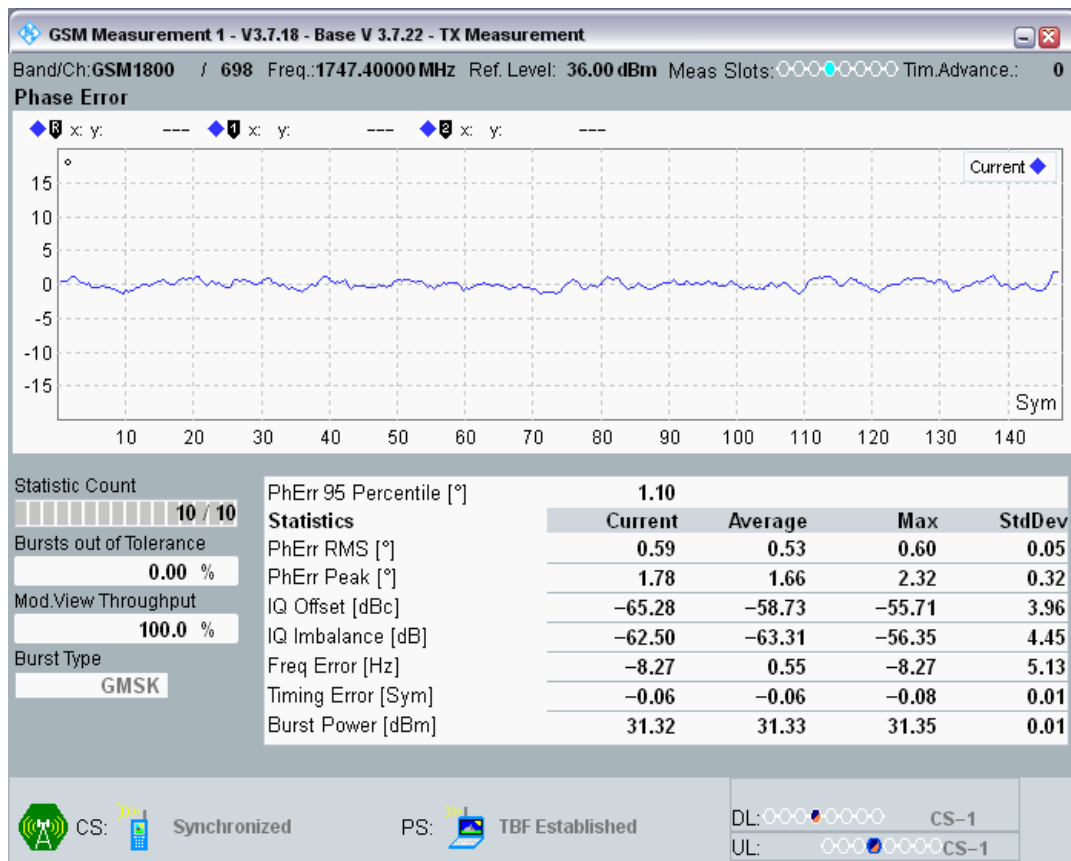


GPRS1800 Channel=698 Gamma=18;18;18;18

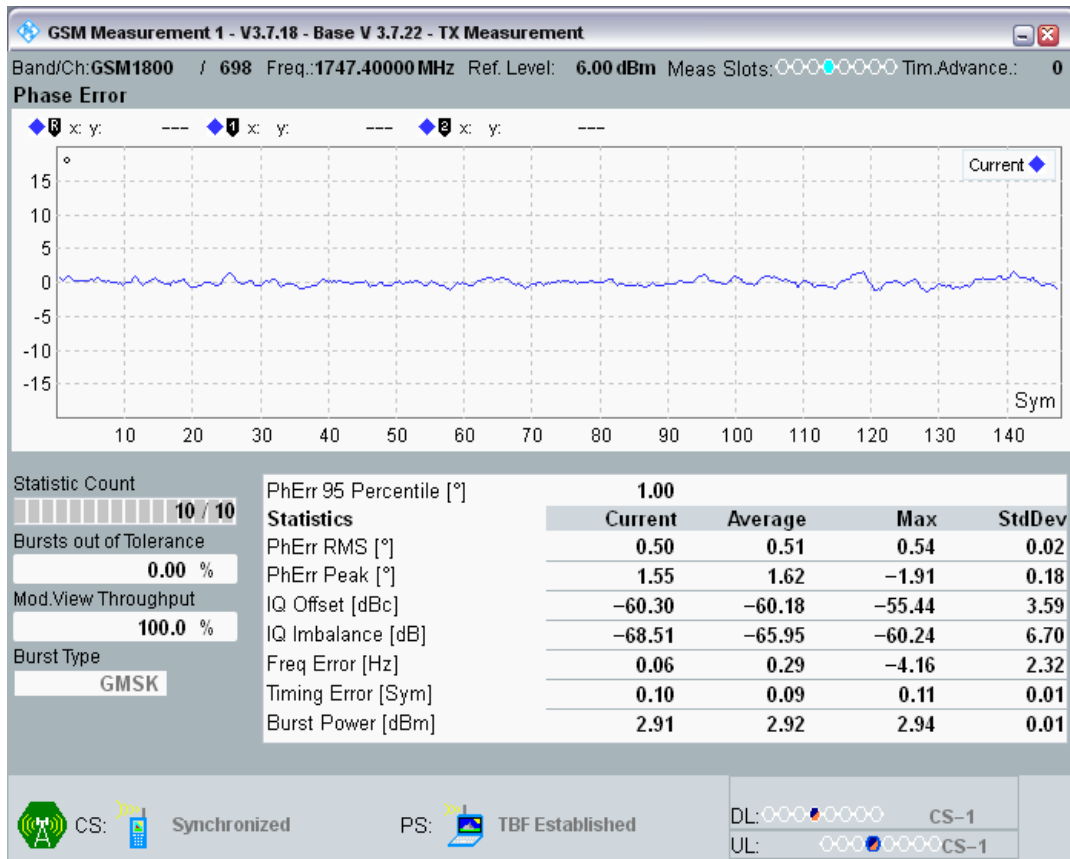

GPRS900 Channel=38 Gamma=3;3;3;3

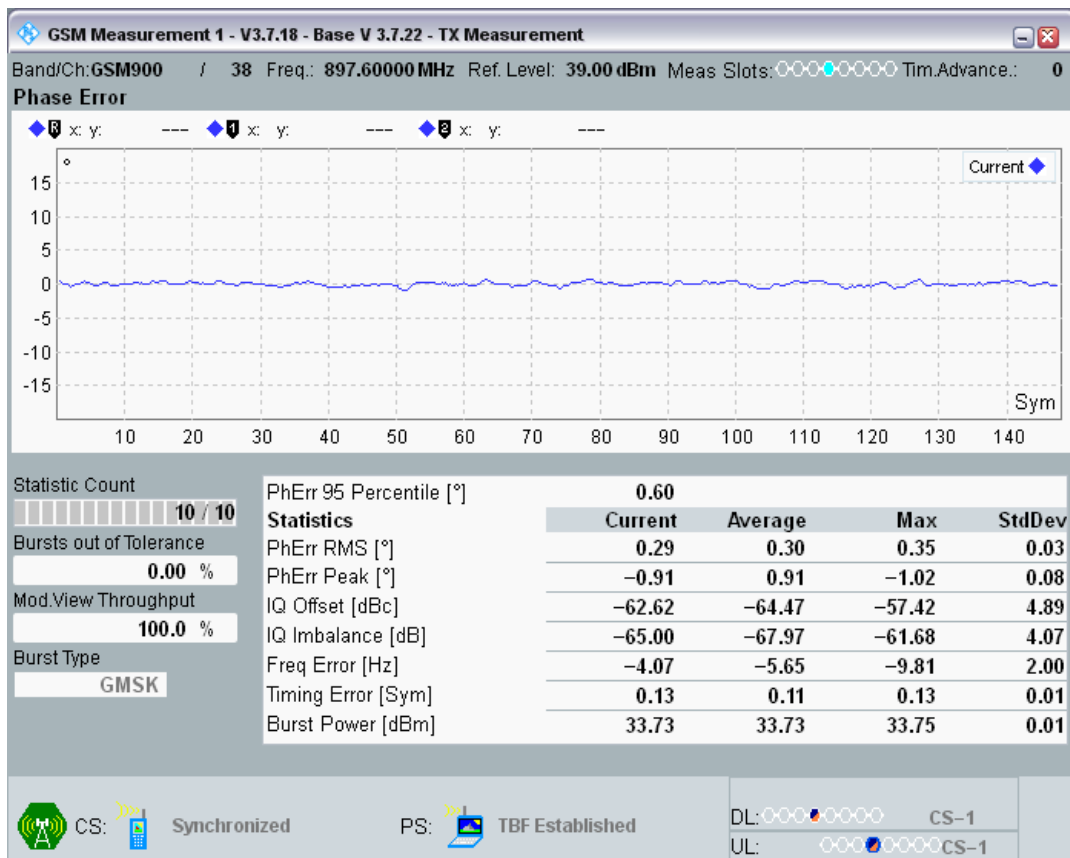

GPRS900 Channel=38 Gamma=17;17;17;17

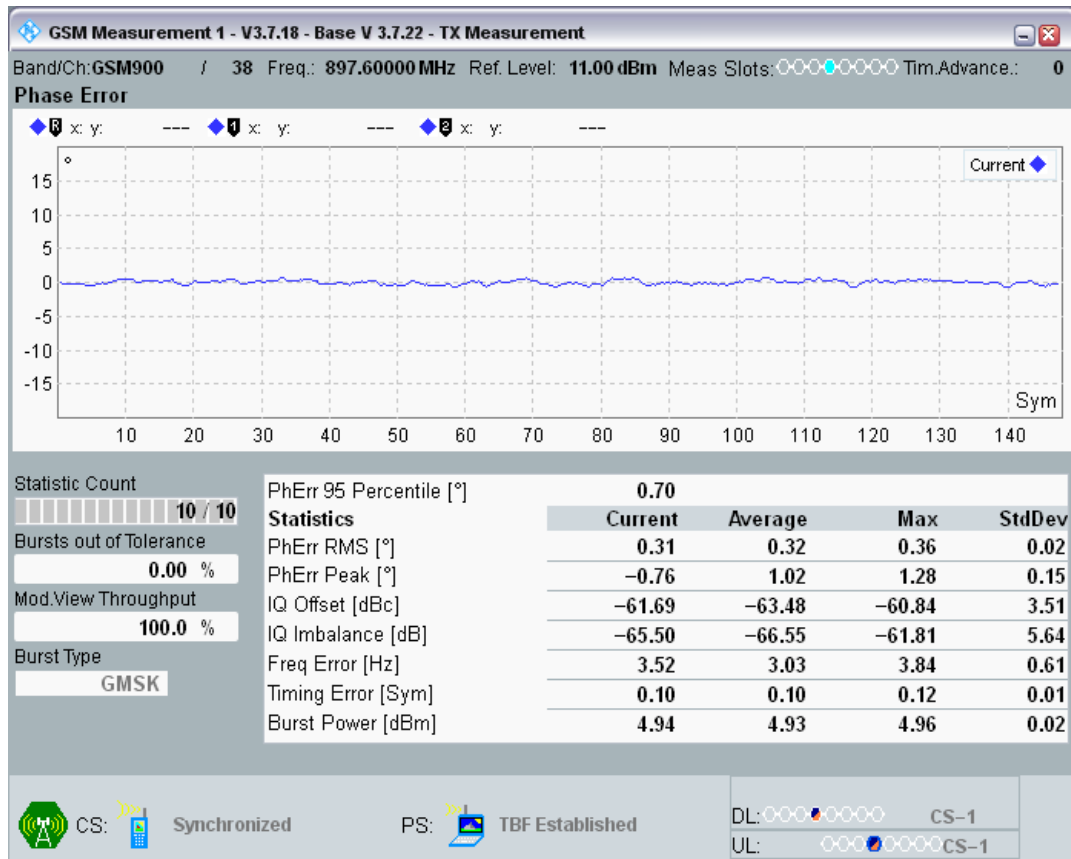

Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

| Band | Channel | Frequency (MHz) | Gamma | Slot | Result | Low Limit | high Limit | Verdict |
|----------|---------|-----------------|-------------|-------------|--------|-----------|------------|---------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | Power slot1 | 30.82 | 28 | 32 | PASS |
| GPRS1800 | 512 | 1710.2 | 4;4;4;4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 4;4;4;4 | Power slot1 | 28.97 | 25 | 31 | PASS |
| GPRS1800 | 512 | 1710.2 | 5;5;5;5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 5;5;5;5 | Power slot1 | 26.97 | 23 | 29 | PASS |
| GPRS1800 | 512 | 1710.2 | 6;6;6;6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 6;6;6;6 | Power slot1 | 24.98 | 21 | 27 | PASS |
| GPRS1800 | 512 | 1710.2 | 7;7;7;7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 7;7;7;7 | Power slot1 | 22.94 | 19 | 25 | PASS |
| GPRS1800 | 512 | 1710.2 | 8;8;8;8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 8;8;8;8 | Power slot1 | 20.88 | 17 | 23 | PASS |
| GPRS1800 | 512 | 1710.2 | 9;9;9;9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 9;9;9;9 | Power slot1 | 18.76 | 15 | 21 | PASS |
| GPRS1800 | 512 | 1710.2 | 10;10;10;10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 10;10;10;10 | Power slot1 | 16.74 | 13 | 19 | PASS |
| GPRS1800 | 512 | 1710.2 | 11;11;11;11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 11;11;11;11 | Power slot1 | 14.82 | 11 | 17 | PASS |
| GPRS1800 | 512 | 1710.2 | 12;12;12;12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 12;12;12;12 | Power slot1 | 12.59 | 8 | 16 | PASS |
| GPRS1800 | 512 | 1710.2 | 13;13;13;13 | PvT(%) | 0.00 | 0 | 0 | PASS |


| | | | | | | | | |
|----------|-----|--------|-------------|-------------|-------|----|----|------|
| GPRS1800 | 512 | 1710.2 | 13;13;13;13 | Power slot1 | 10.51 | 6 | 14 | PASS |
| GPRS1800 | 512 | 1710.2 | 14;14;14;14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 14;14;14;14 | Power slot1 | 8.33 | 4 | 12 | PASS |
| GPRS1800 | 512 | 1710.2 | 15;15;15;15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 15;15;15;15 | Power slot1 | 7.58 | 2 | 10 | PASS |
| GPRS1800 | 512 | 1710.2 | 16;16;16;16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 16;16;16;16 | Power slot1 | 5.38 | 0 | 8 | PASS |
| GPRS1800 | 512 | 1710.2 | 17;17;17;17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 17;17;17;17 | Power slot1 | 3.93 | -3 | 7 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | Power slot1 | 2.27 | -5 | 5 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | Power slot1 | 31.23 | 28 | 32 | PASS |
| GPRS1800 | 698 | 1747.4 | 4;4;4;4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 4;4;4;4 | Power slot1 | 29.41 | 25 | 31 | PASS |
| GPRS1800 | 698 | 1747.4 | 5;5;5;5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 5;5;5;5 | Power slot1 | 27.46 | 23 | 29 | PASS |
| GPRS1800 | 698 | 1747.4 | 6;6;6;6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 6;6;6;6 | Power slot1 | 25.52 | 21 | 27 | PASS |
| GPRS1800 | 698 | 1747.4 | 7;7;7;7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 7;7;7;7 | Power slot1 | 23.56 | 19 | 25 | PASS |
| GPRS1800 | 698 | 1747.4 | 8;8;8;8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 8;8;8;8 | Power slot1 | 21.45 | 17 | 23 | PASS |
| GPRS1800 | 698 | 1747.4 | 9;9;9;9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 9;9;9;9 | Power slot1 | 19.52 | 15 | 21 | PASS |
| GPRS1800 | 698 | 1747.4 | 10;10;10;10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 10;10;10;10 | Power slot1 | 17.58 | 13 | 19 | PASS |
| GPRS1800 | 698 | 1747.4 | 11;11;11;11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 11;11;11;11 | Power slot1 | 15.68 | 11 | 17 | PASS |
| GPRS1800 | 698 | 1747.4 | 12;12;12;12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 12;12;12;12 | Power slot1 | 13.54 | 8 | 16 | PASS |
| GPRS1800 | 698 | 1747.4 | 13;13;13;13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 13;13;13;13 | Power slot1 | 11.58 | 6 | 14 | PASS |
| GPRS1800 | 698 | 1747.4 | 14;14;14;14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 14;14;14;14 | Power slot1 | 9.52 | 4 | 12 | PASS |
| GPRS1800 | 698 | 1747.4 | 15;15;15;15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 15;15;15;15 | Power slot1 | 8.12 | 2 | 10 | PASS |
| GPRS1800 | 698 | 1747.4 | 16;16;16;16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 16;16;16;16 | Power slot1 | 5.93 | 0 | 8 | PASS |
| GPRS1800 | 698 | 1747.4 | 17;17;17;17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 17;17;17;17 | Power slot1 | 4.49 | -3 | 7 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | Power slot1 | 2.83 | -5 | 5 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | PvT(%) | 0.00 | 0 | 0 | PASS |

| | | | | | | | | |
|----------|-----|--------|-------------|-------------|-------|----|----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | Power slot1 | 31.88 | 28 | 32 | PASS |
| GPRS1800 | 885 | 1784.8 | 4;4;4;4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 4;4;4;4 | Power slot1 | 30.11 | 25 | 31 | PASS |
| GPRS1800 | 885 | 1784.8 | 5;5;5;5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 5;5;5;5 | Power slot1 | 28.14 | 23 | 29 | PASS |
| GPRS1800 | 885 | 1784.8 | 6;6;6;6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 6;6;6;6 | Power slot1 | 26.21 | 21 | 27 | PASS |
| GPRS1800 | 885 | 1784.8 | 7;7;7;7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 7;7;7;7 | Power slot1 | 24.40 | 19 | 25 | PASS |
| GPRS1800 | 885 | 1784.8 | 8;8;8;8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 8;8;8;8 | Power slot1 | 22.41 | 17 | 23 | PASS |
| GPRS1800 | 885 | 1784.8 | 9;9;9;9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 9;9;9;9 | Power slot1 | 20.50 | 15 | 21 | PASS |
| GPRS1800 | 885 | 1784.8 | 10;10;10;10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 10;10;10;10 | Power slot1 | 18.59 | 13 | 19 | PASS |
| GPRS1800 | 885 | 1784.8 | 11;11;11;11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 11;11;11;11 | Power slot1 | 16.88 | 11 | 17 | PASS |
| GPRS1800 | 885 | 1784.8 | 12;12;12;12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 12;12;12;12 | Power slot1 | 15.01 | 8 | 16 | PASS |
| GPRS1800 | 885 | 1784.8 | 13;13;13;13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 13;13;13;13 | Power slot1 | 13.14 | 6 | 14 | PASS |
| GPRS1800 | 885 | 1784.8 | 14;14;14;14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 14;14;14;14 | Power slot1 | 11.30 | 4 | 12 | PASS |
| GPRS1800 | 885 | 1784.8 | 15;15;15;15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 15;15;15;15 | Power slot1 | 8.36 | 2 | 10 | PASS |
| GPRS1800 | 885 | 1784.8 | 16;16;16;16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 17;17;17;17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 17;17;17;17 | Power slot1 | 4.79 | -3 | 7 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | Power slot1 | 3.16 | -5 | 5 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | Power slot1 | 33.97 | 31 | 35 | PASS |
| GPRS900 | 975 | 880.2 | 4;4;4;4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 4;4;4;4 | Power slot1 | 32.09 | 28 | 34 | PASS |
| GPRS900 | 975 | 880.2 | 5;5;5;5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 5;5;5;5 | Power slot1 | 30.09 | 26 | 32 | PASS |
| GPRS900 | 975 | 880.2 | 6;6;6;6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 6;6;6;6 | Power slot1 | 28.16 | 24 | 30 | PASS |
| GPRS900 | 975 | 880.2 | 7;7;7;7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 7;7;7;7 | Power slot1 | 26.11 | 22 | 28 | PASS |
| GPRS900 | 975 | 880.2 | 8;8;8;8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 8;8;8;8 | Power slot1 | 24.19 | 20 | 26 | PASS |
| GPRS900 | 975 | 880.2 | 9;9;9;9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 9;9;9;9 | Power slot1 | 22.10 | 18 | 24 | PASS |

| | | | | | | | | |
|---------|-----|-------|-------------|-------------|-------|----|----|------|
| GPRS900 | 975 | 880.2 | 10;10;10;10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 10;10;10;10 | Power slot1 | 20.15 | 16 | 22 | PASS |
| GPRS900 | 975 | 880.2 | 11;11;11;11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 11;11;11;11 | Power slot1 | 18.30 | 14 | 20 | PASS |
| GPRS900 | 975 | 880.2 | 12;12;12;12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 12;12;12;12 | Power slot1 | 16.27 | 12 | 18 | PASS |
| GPRS900 | 975 | 880.2 | 13;13;13;13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 13;13;13;13 | Power slot1 | 14.19 | 10 | 16 | PASS |
| GPRS900 | 975 | 880.2 | 14;14;14;14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 14;14;14;14 | Power slot1 | 12.05 | 6 | 16 | PASS |
| GPRS900 | 975 | 880.2 | 15;15;15;15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 15;15;15;15 | Power slot1 | 9.64 | 4 | 14 | PASS |
| GPRS900 | 975 | 880.2 | 16;16;16;16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 16;16;16;16 | Power slot1 | 7.19 | 2 | 12 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | Power slot1 | 5.43 | 0 | 10 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | Power slot1 | 33.63 | 31 | 35 | PASS |
| GPRS900 | 38 | 897.6 | 4;4;4;4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 4;4;4;4 | Power slot1 | 31.72 | 28 | 34 | PASS |
| GPRS900 | 38 | 897.6 | 5;5;5;5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 5;5;5;5 | Power slot1 | 29.63 | 26 | 32 | PASS |
| GPRS900 | 38 | 897.6 | 6;6;6;6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 6;6;6;6 | Power slot1 | 27.68 | 24 | 30 | PASS |
| GPRS900 | 38 | 897.6 | 7;7;7;7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 7;7;7;7 | Power slot1 | 25.71 | 22 | 28 | PASS |
| GPRS900 | 38 | 897.6 | 8;8;8;8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 8;8;8;8 | Power slot1 | 23.68 | 20 | 26 | PASS |
| GPRS900 | 38 | 897.6 | 9;9;9;9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 9;9;9;9 | Power slot1 | 21.53 | 18 | 24 | PASS |
| GPRS900 | 38 | 897.6 | 10;10;10;10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 10;10;10;10 | Power slot1 | 19.60 | 16 | 22 | PASS |
| GPRS900 | 38 | 897.6 | 11;11;11;11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 11;11;11;11 | Power slot1 | 17.73 | 14 | 20 | PASS |
| GPRS900 | 38 | 897.6 | 12;12;12;12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 12;12;12;12 | Power slot1 | 15.68 | 12 | 18 | PASS |
| GPRS900 | 38 | 897.6 | 13;13;13;13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 13;13;13;13 | Power slot1 | 13.62 | 10 | 16 | PASS |
| GPRS900 | 38 | 897.6 | 14;14;14;14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 14;14;14;14 | Power slot1 | 11.42 | 6 | 16 | PASS |
| GPRS900 | 38 | 897.6 | 15;15;15;15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 15;15;15;15 | Power slot1 | 9.06 | 4 | 14 | PASS |
| GPRS900 | 38 | 897.6 | 16;16;16;16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 16;16;16;16 | Power slot1 | 6.58 | 2 | 12 | PASS |

| | | | | | | | | |
|---------|-----|-------|-------------|-------------|-------|----|----|------|
| GPRS900 | 38 | 897.6 | 17;17;17;17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | Power slot1 | 4.86 | 0 | 10 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | Power slot1 | 33.62 | 31 | 35 | PASS |
| GPRS900 | 124 | 914.8 | 4;4;4;4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 4;4;4;4 | Power slot1 | 31.67 | 28 | 34 | PASS |
| GPRS900 | 124 | 914.8 | 5;5;5;5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 5;5;5;5 | Power slot1 | 29.57 | 26 | 32 | PASS |
| GPRS900 | 124 | 914.8 | 6;6;6;6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 6;6;6;6 | Power slot1 | 27.67 | 24 | 30 | PASS |
| GPRS900 | 124 | 914.8 | 7;7;7;7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 7;7;7;7 | Power slot1 | 25.68 | 22 | 28 | PASS |
| GPRS900 | 124 | 914.8 | 8;8;8;8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 8;8;8;8 | Power slot1 | 23.65 | 20 | 26 | PASS |
| GPRS900 | 124 | 914.8 | 9;9;9;9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 9;9;9;9 | Power slot1 | 21.51 | 18 | 24 | PASS |
| GPRS900 | 124 | 914.8 | 10;10;10;10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 10;10;10;10 | Power slot1 | 19.61 | 16 | 22 | PASS |
| GPRS900 | 124 | 914.8 | 11;11;11;11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 11;11;11;11 | Power slot1 | 17.66 | 14 | 20 | PASS |
| GPRS900 | 124 | 914.8 | 12;12;12;12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 12;12;12;12 | Power slot1 | 15.63 | 12 | 18 | PASS |
| GPRS900 | 124 | 914.8 | 13;13;13;13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 13;13;13;13 | Power slot1 | 13.58 | 10 | 16 | PASS |
| GPRS900 | 124 | 914.8 | 14;14;14;14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 14;14;14;14 | Power slot1 | 11.80 | 6 | 16 | PASS |
| GPRS900 | 124 | 914.8 | 15;15;15;15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 16;16;16;16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 16;16;16;16 | Power slot1 | 7.28 | 2 | 12 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | Power slot1 | 5.69 | 0 | 10 | PASS |


GPRS1800 Channel=512 Gamma=3;3;3;3

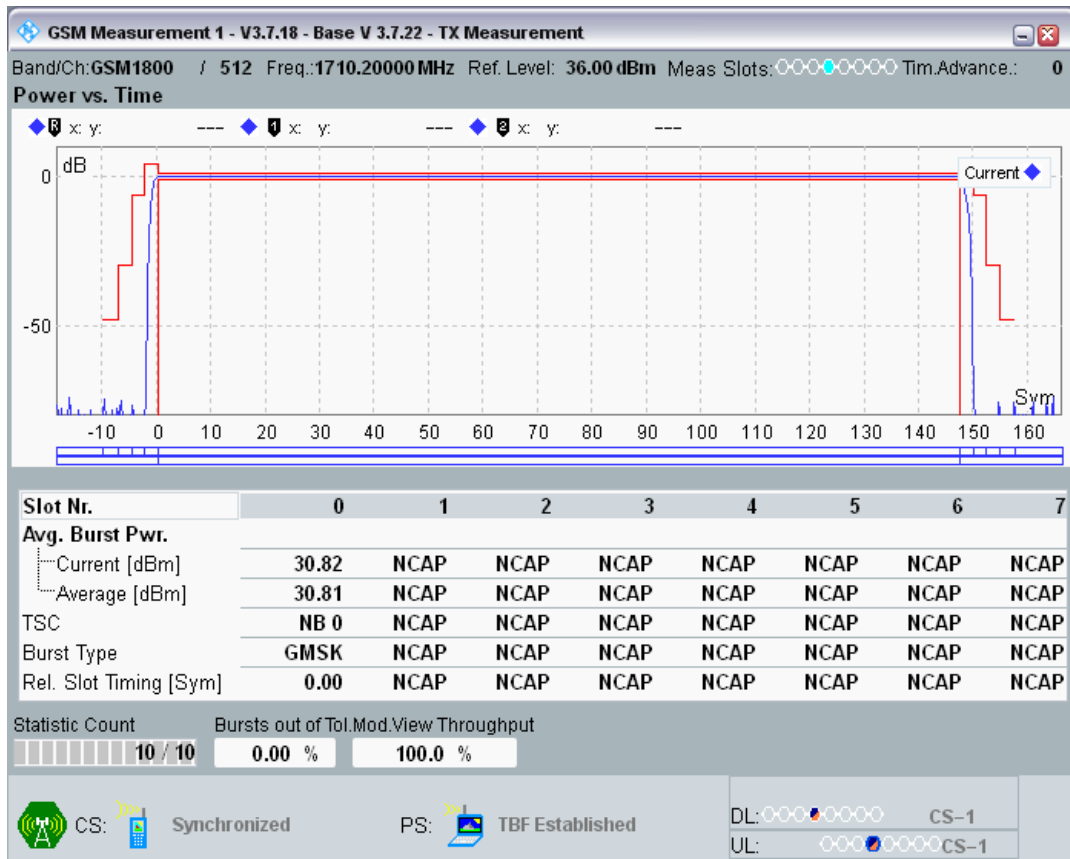


GPRS1800 Channel=512 Gamma=4;4;4;4




GPRS1800 Channel=512 Gamma=5;5;5;5

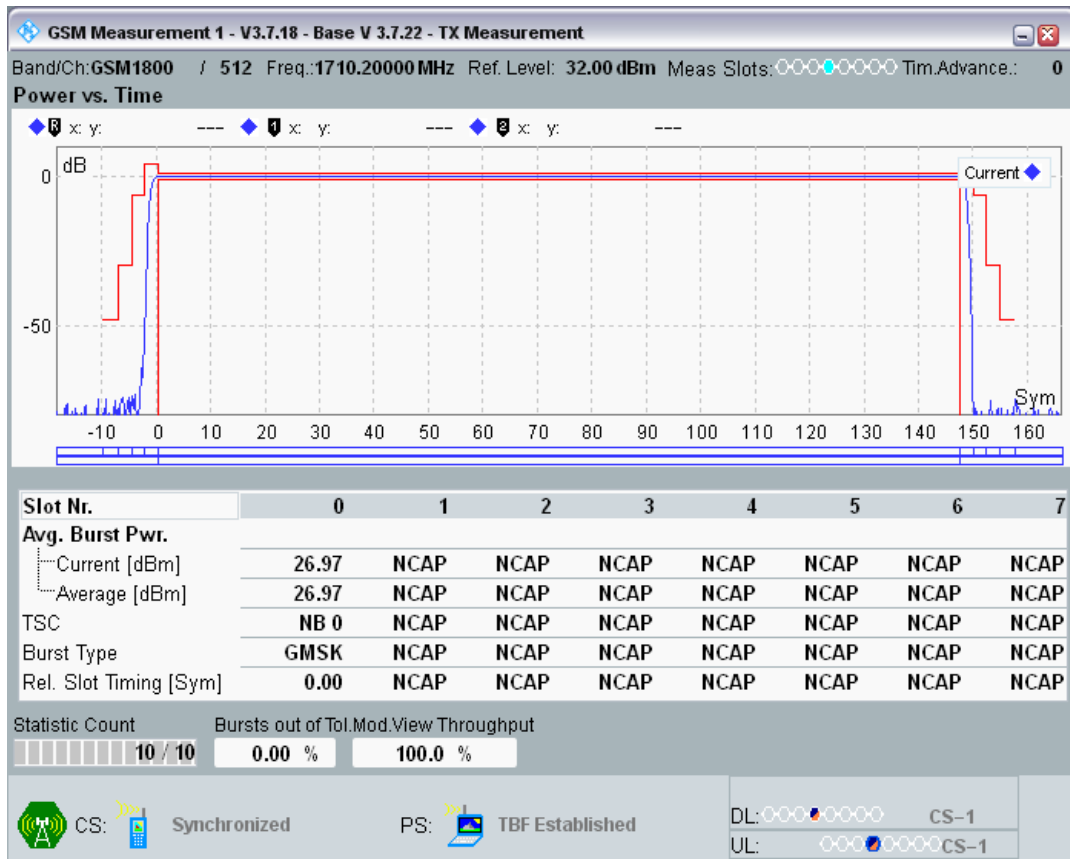

GPRS1800 Channel=512 Gamma=6;6;6;6

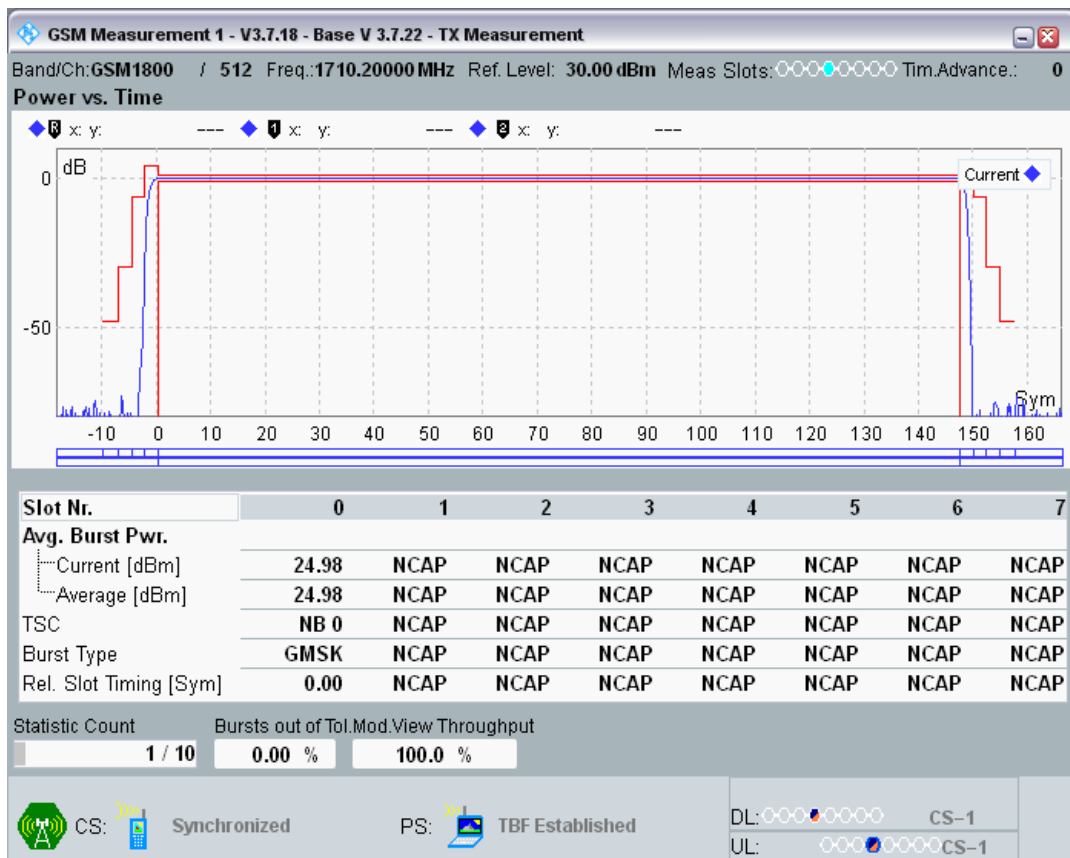


GPRS1800 Channel=512 Gamma=7;7;7;7

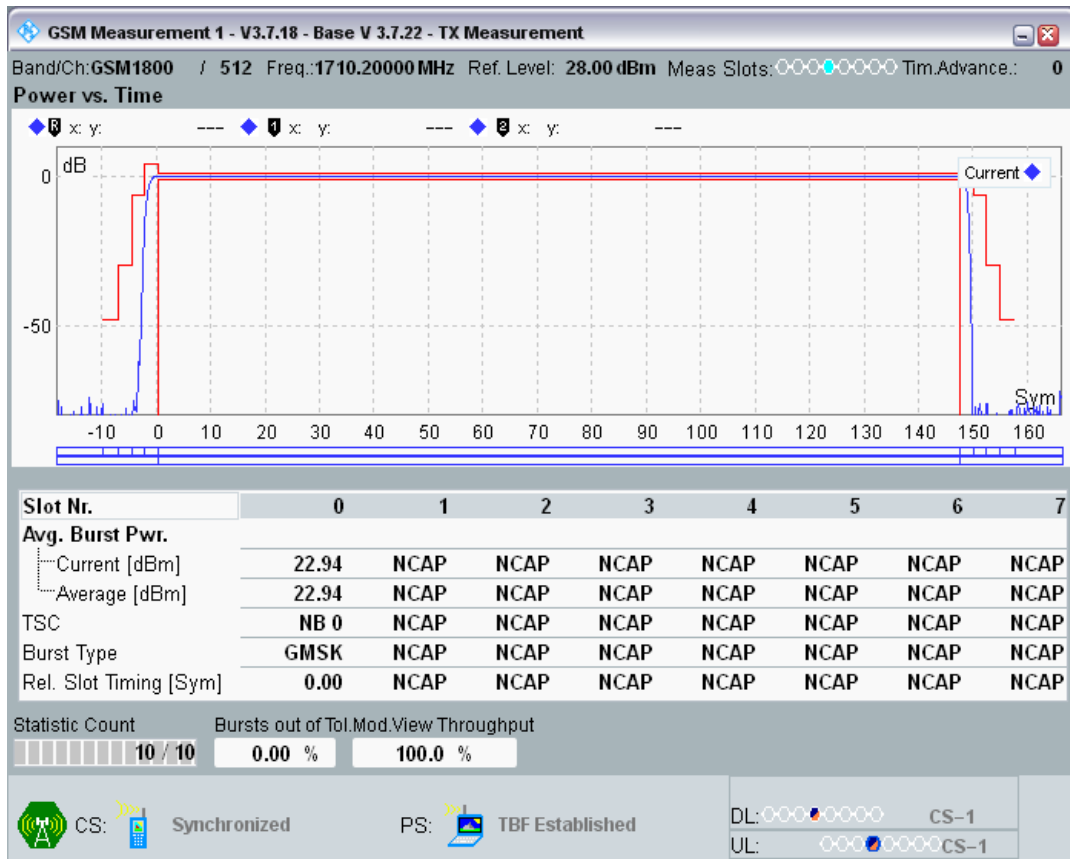


GPRS1800 Channel=512 Gamma=8;8;8;8




GPRS1800 Channel=512 Gamma=9;9;9;9

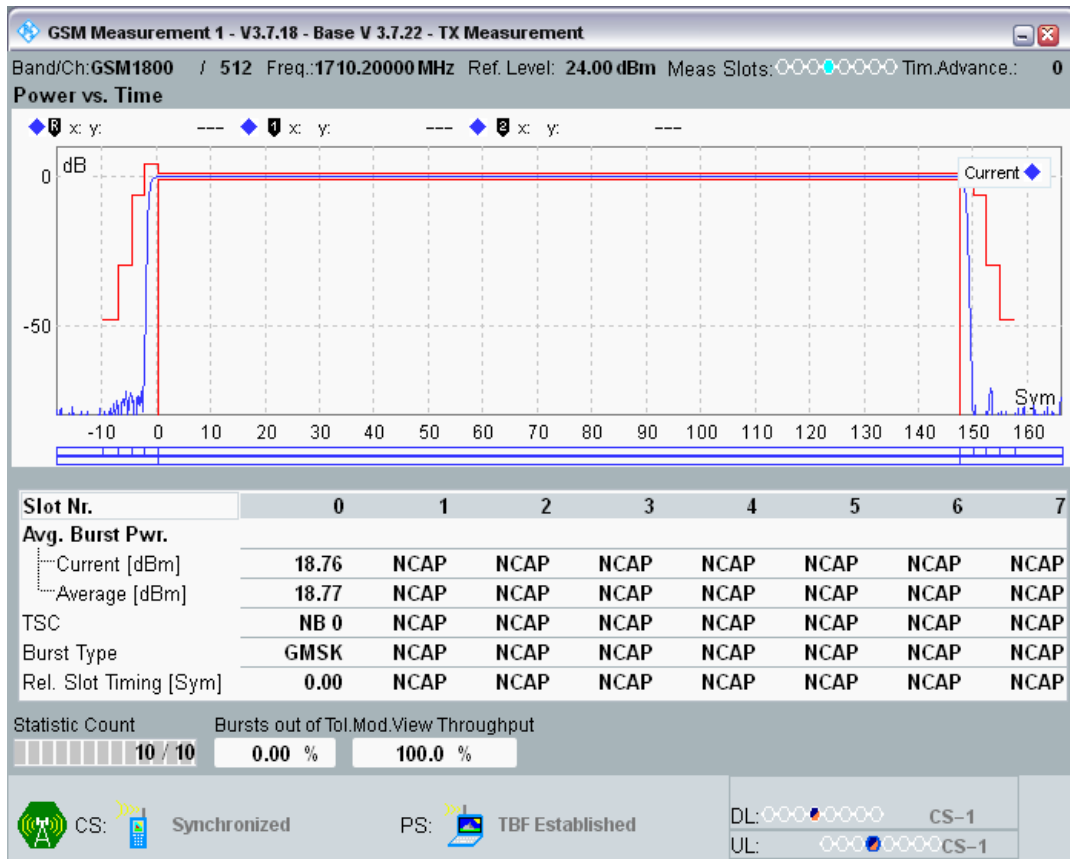

GPRS1800 Channel=512 Gamma=10;10;10;10

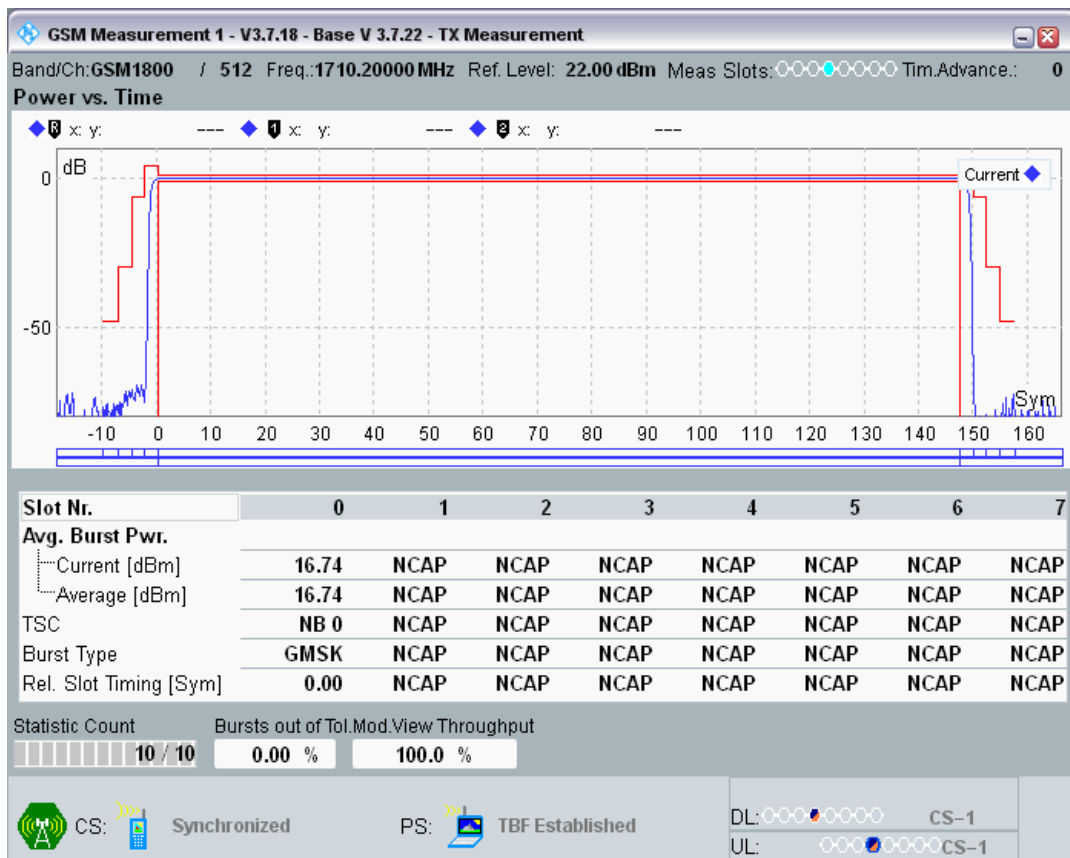


GPRS1800 Channel=512 Gamma=11;11;11;11

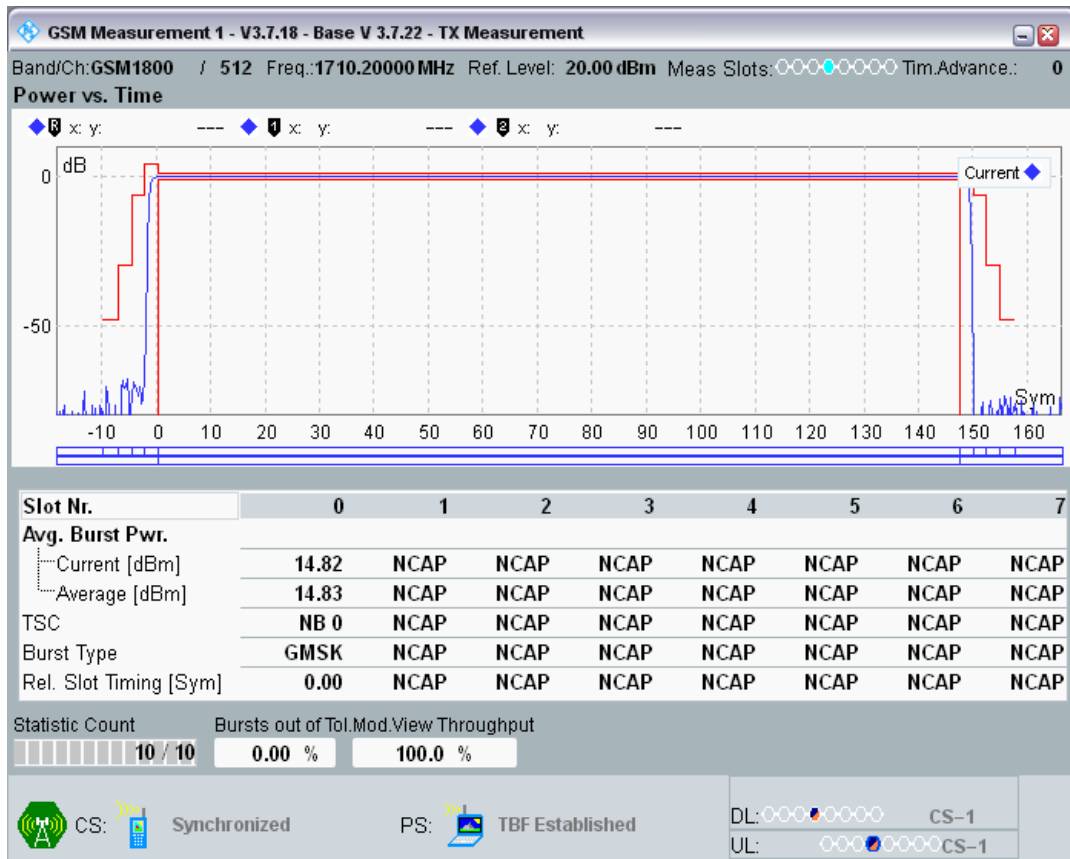


GPRS1800 Channel=512 Gamma=12;12;12;12




GPRS1800 Channel=512 Gamma=13;13;13;13

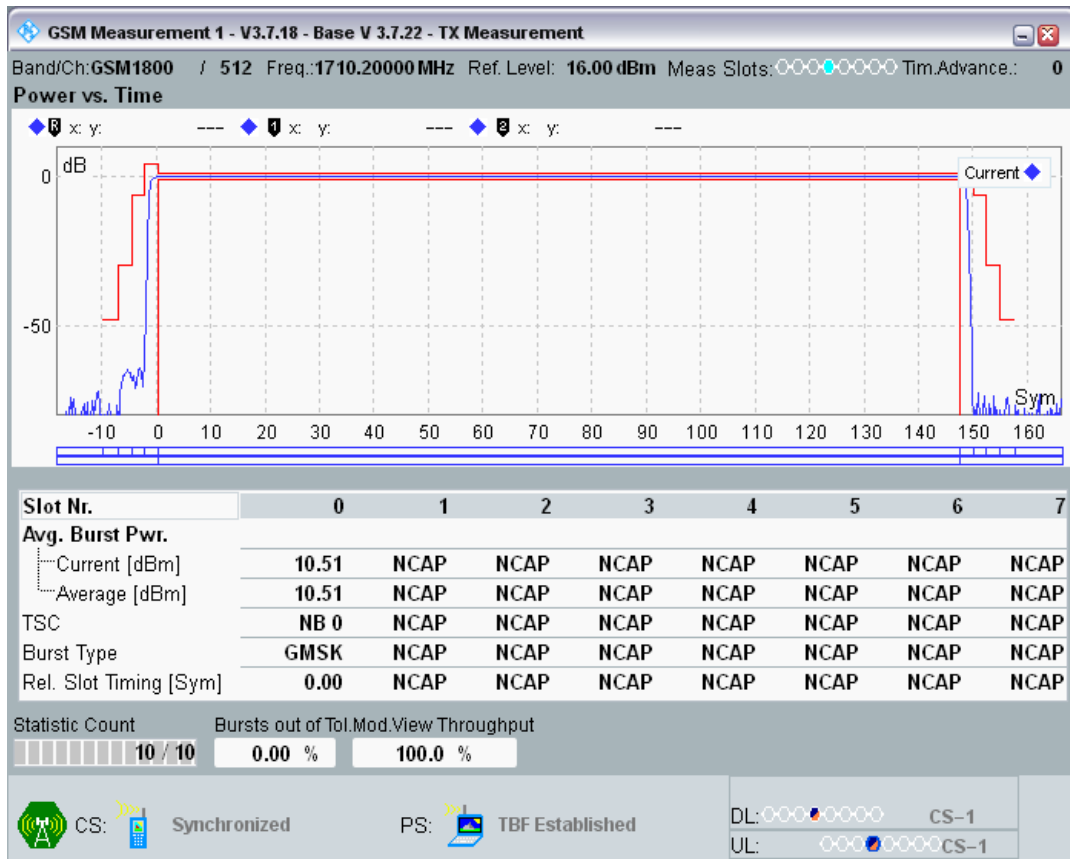


GPRS1800 Channel=512 Gamma=14;14;14;14

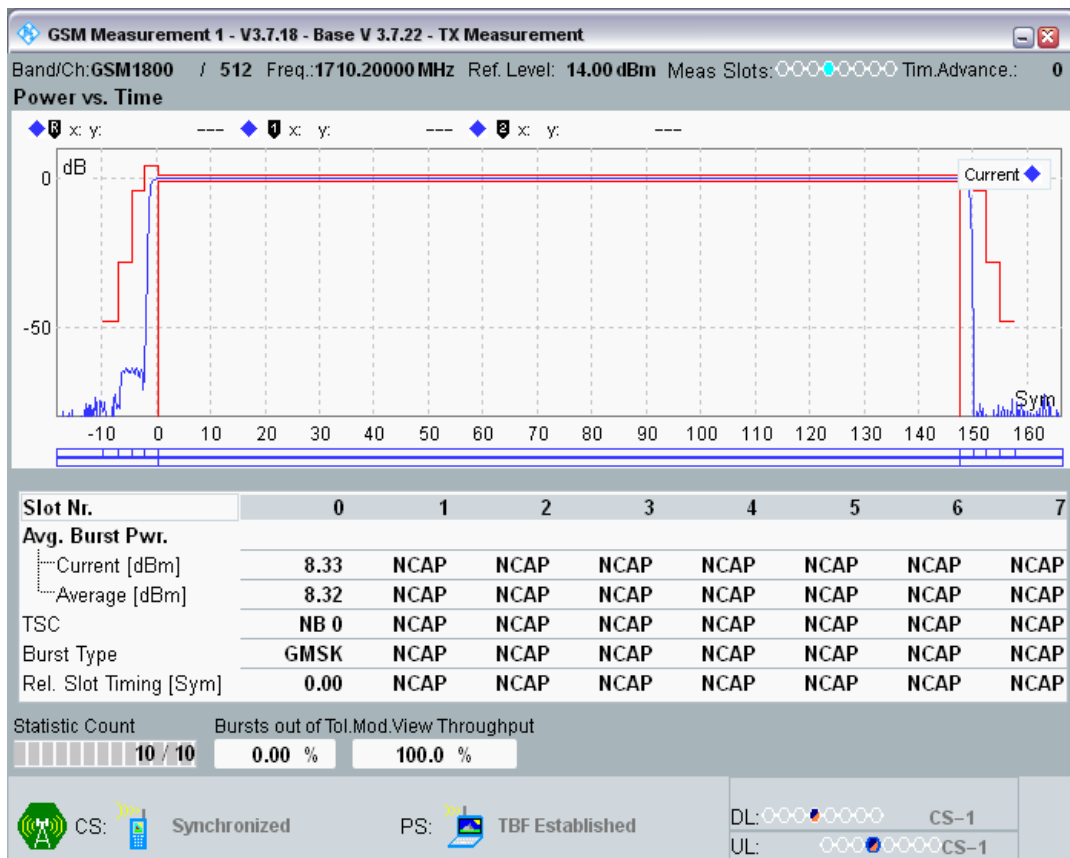


GPRS1800 Channel=512 Gamma=15;15;15;15

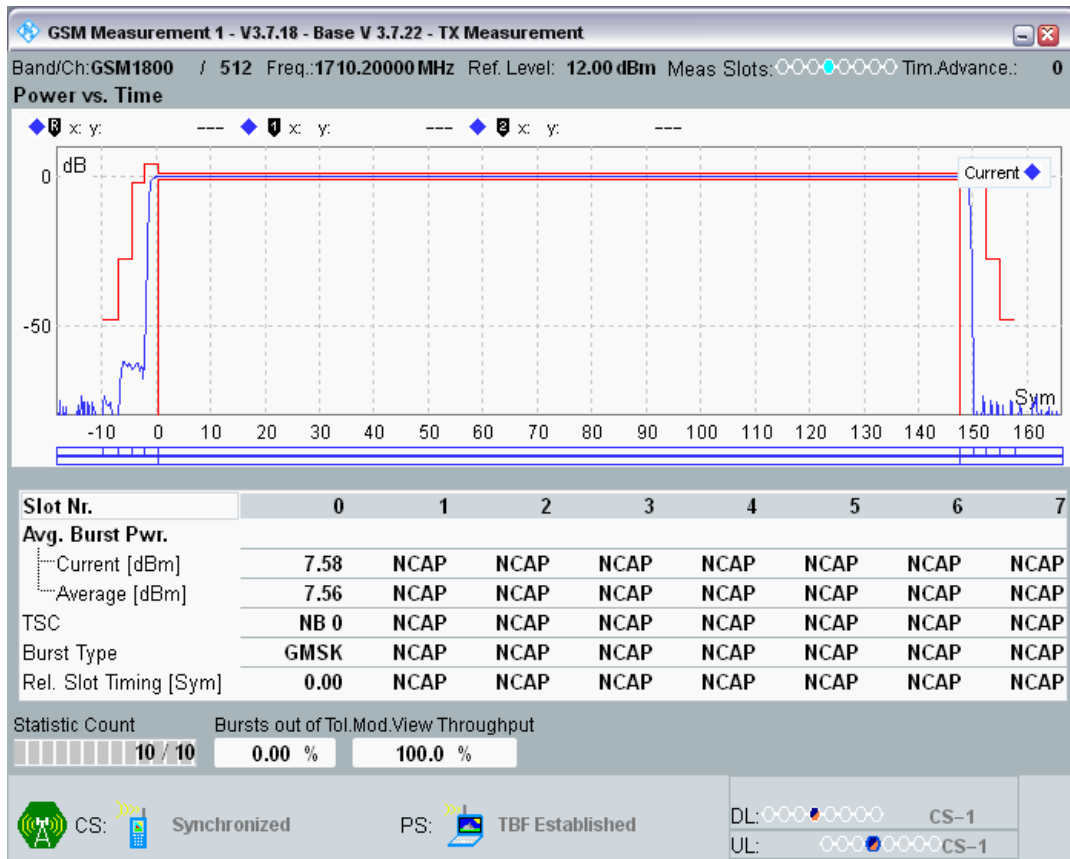


GPRS1800 Channel=512 Gamma=16;16;16;16

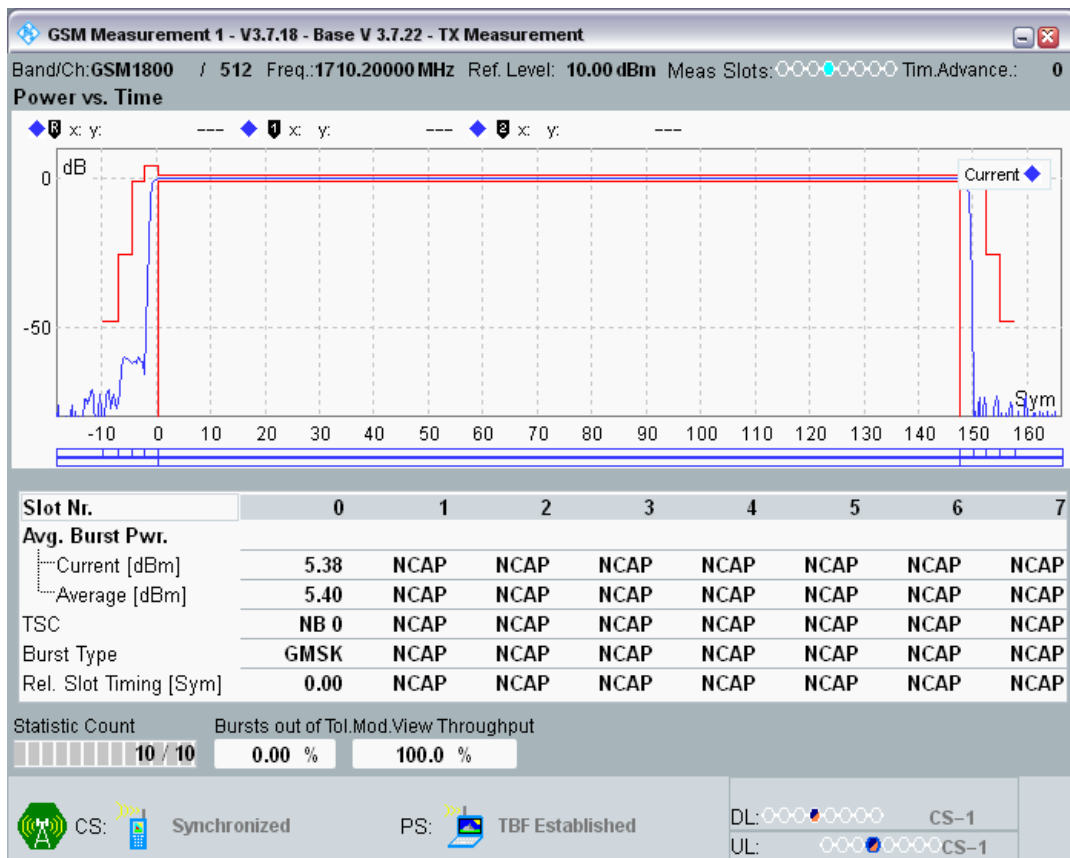

GPRS1800 Channel=512 Gamma=17;17;17;17

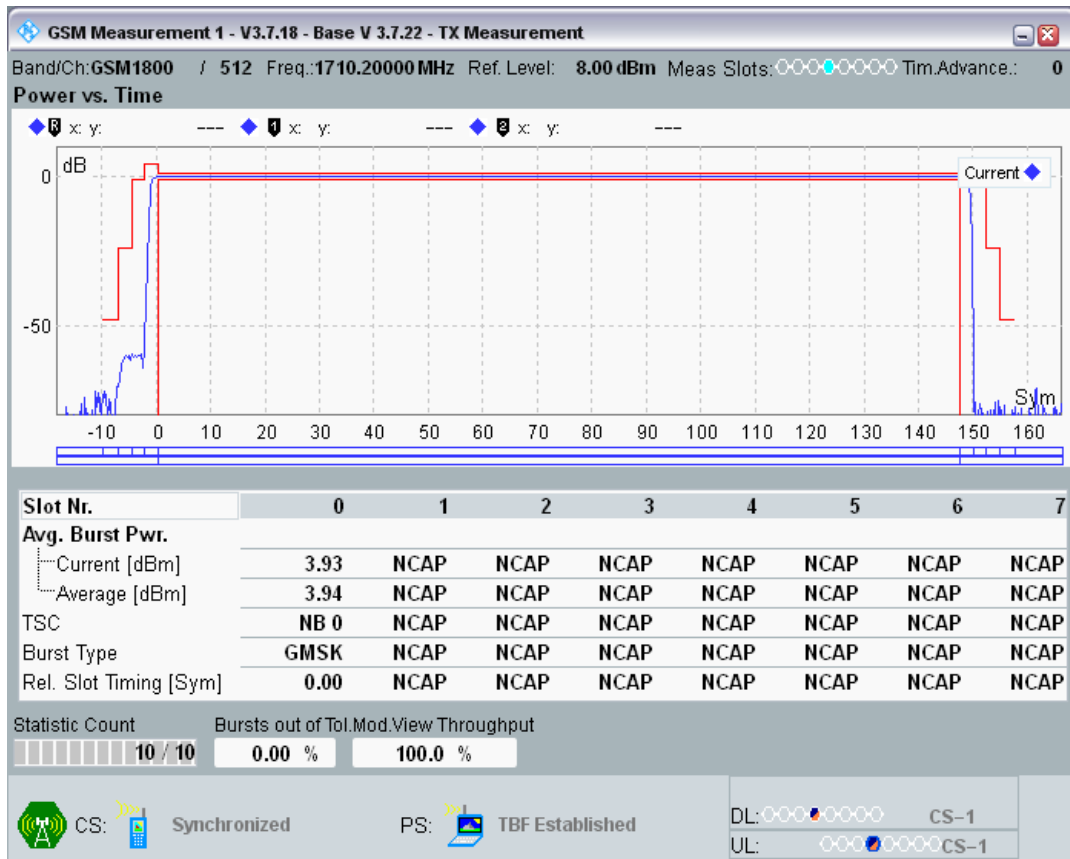


GPRS1800 Channel=512 Gamma=18;18;18;18

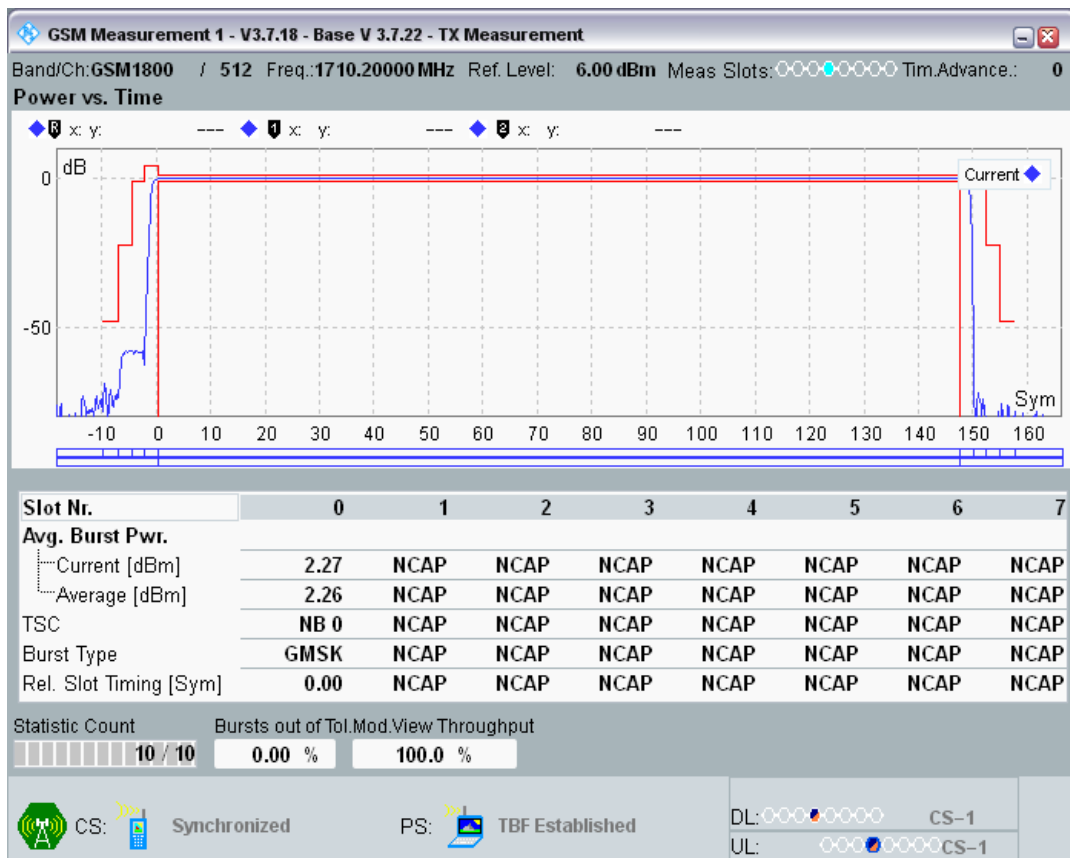


GPRS1800 Channel=698 Gamma=4;4;4;4




GPRS1800 Channel=698 Gamma=3;3;3;3

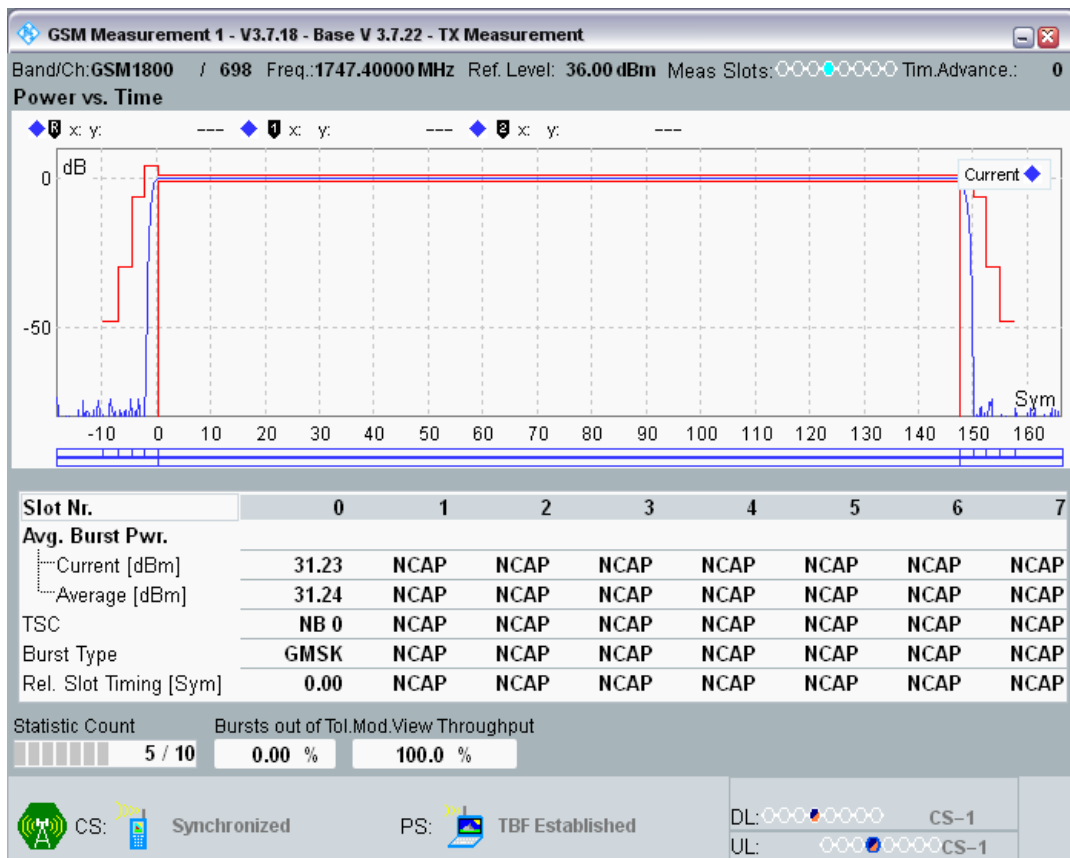


GPRS1800 Channel=698 Gamma=5;5;5;5

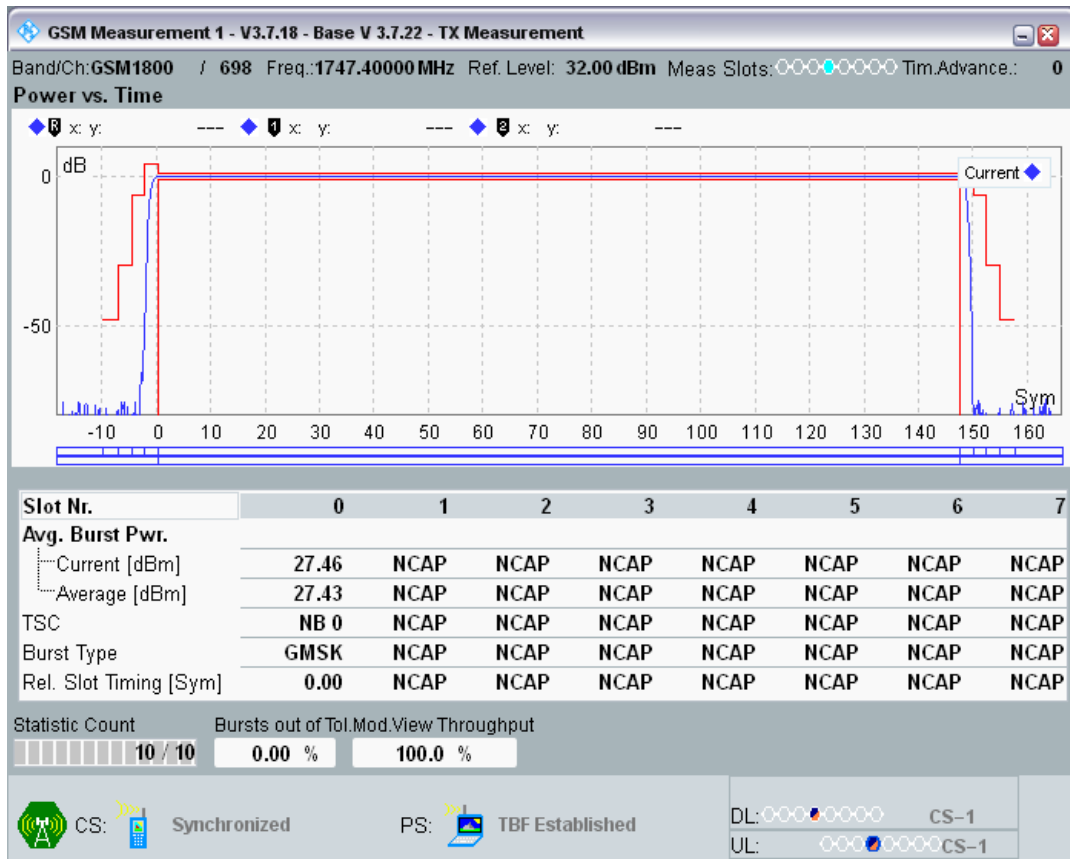


GPRS1800 Channel=698 Gamma=6;6;6;6

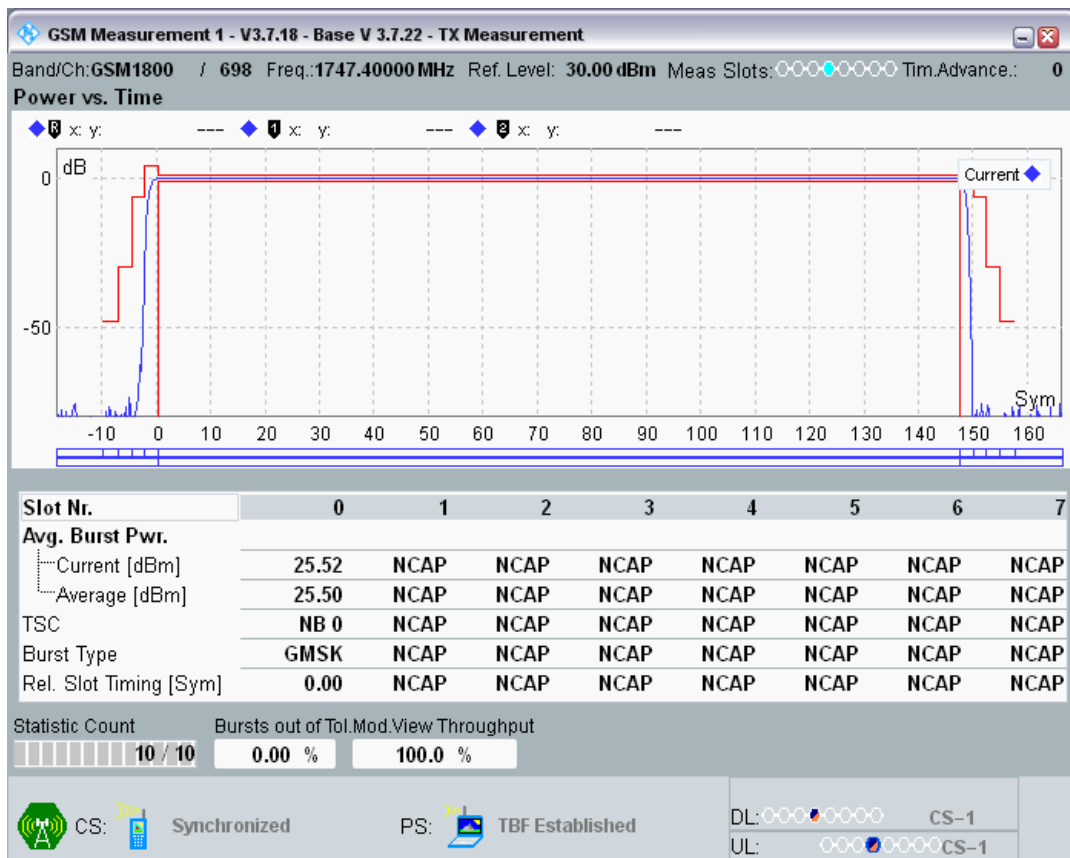


GPRS1800 Channel=698 Gamma=7;7;7;7

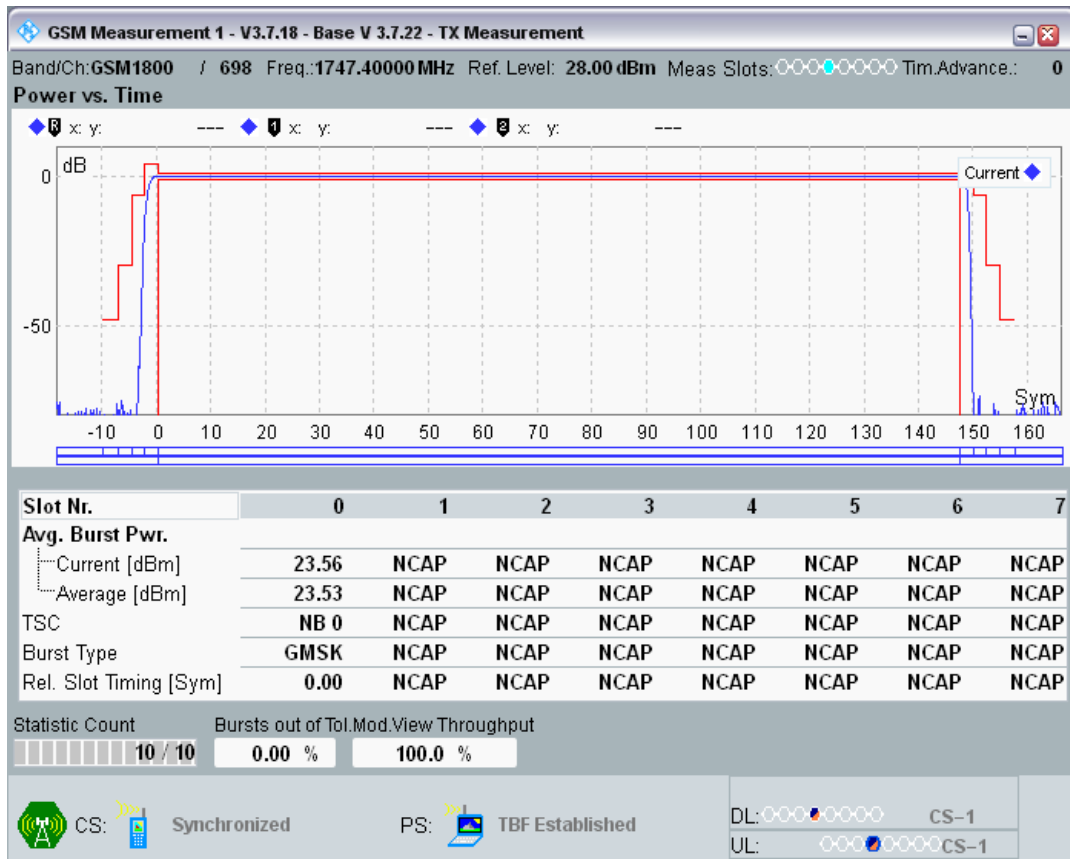


GPRS1800 Channel=698 Gamma=8;8;8;8

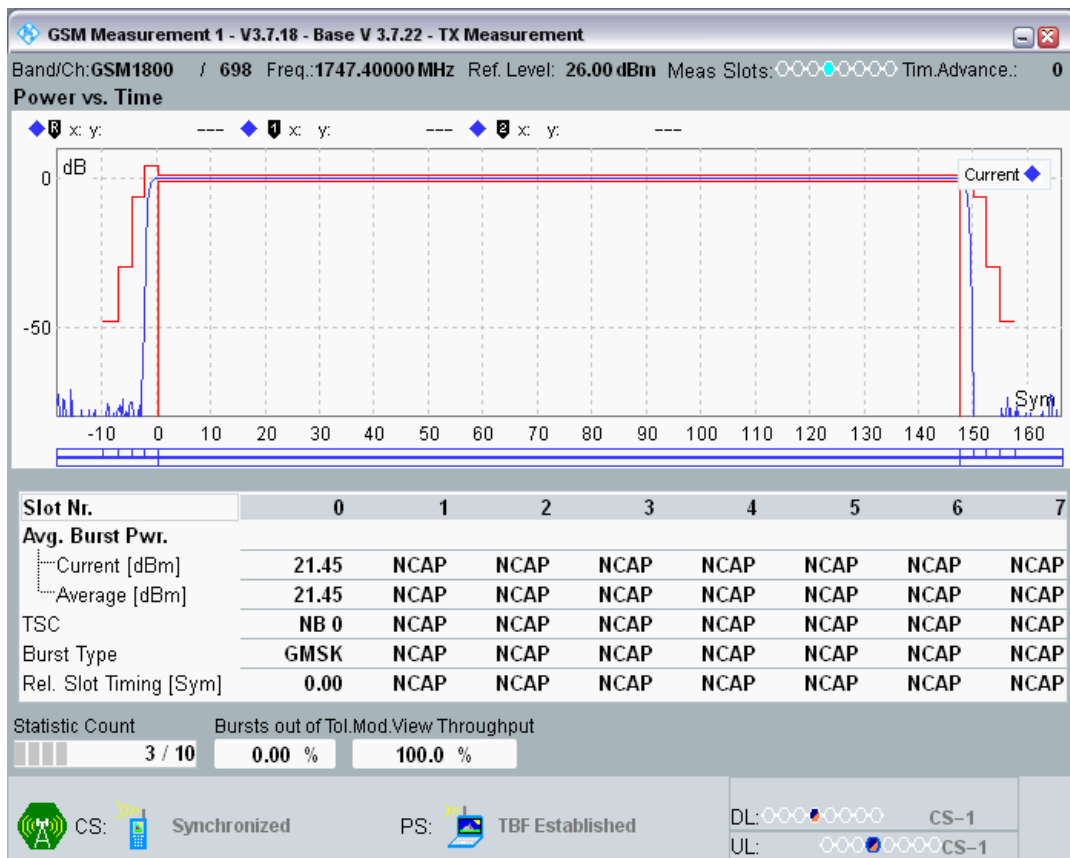


GPRS1800 Channel=698 Gamma=9;9;9;9

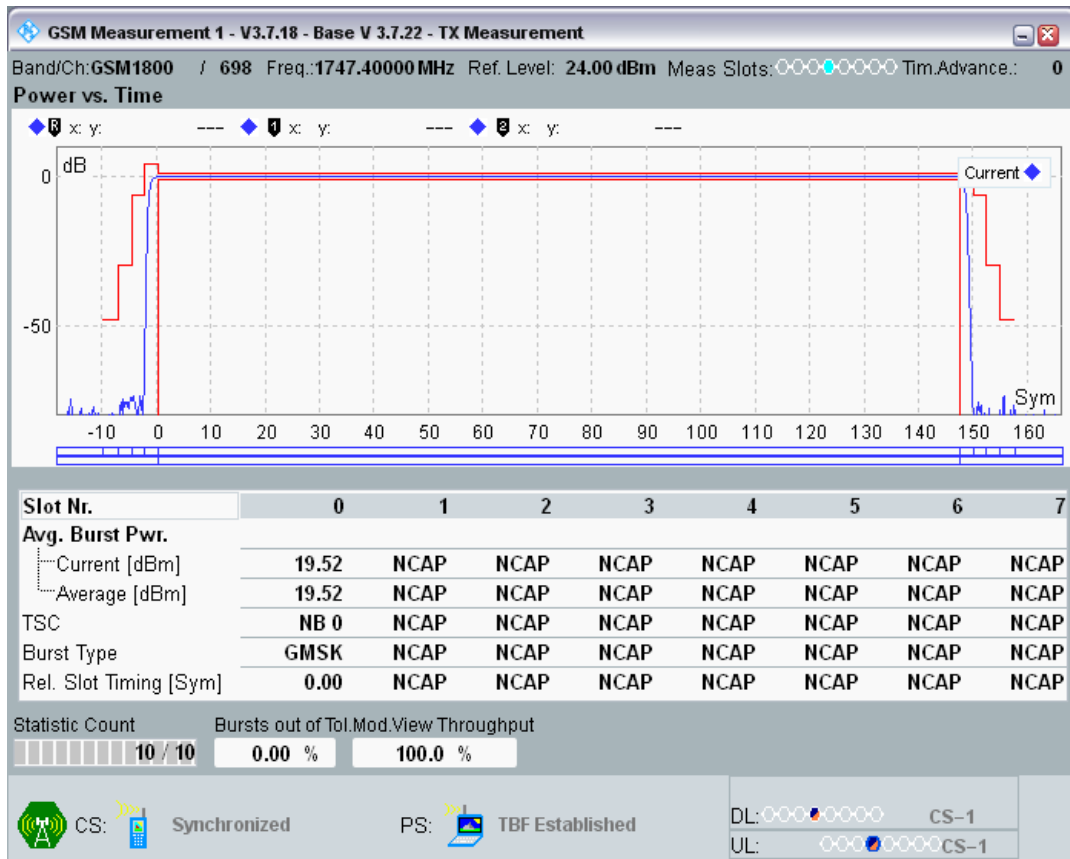

GPRS1800 Channel=698 Gamma=10;10;10;10

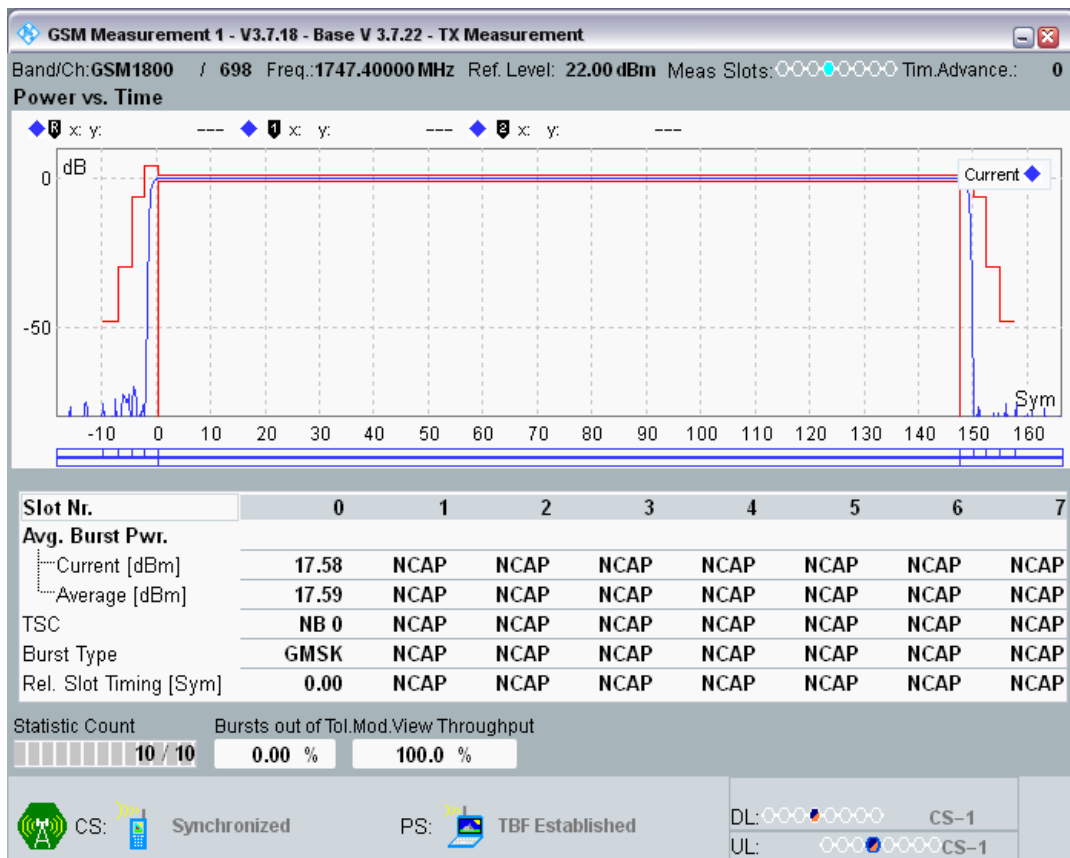

GPRS1800 Channel=698 Gamma=11;11;11;11

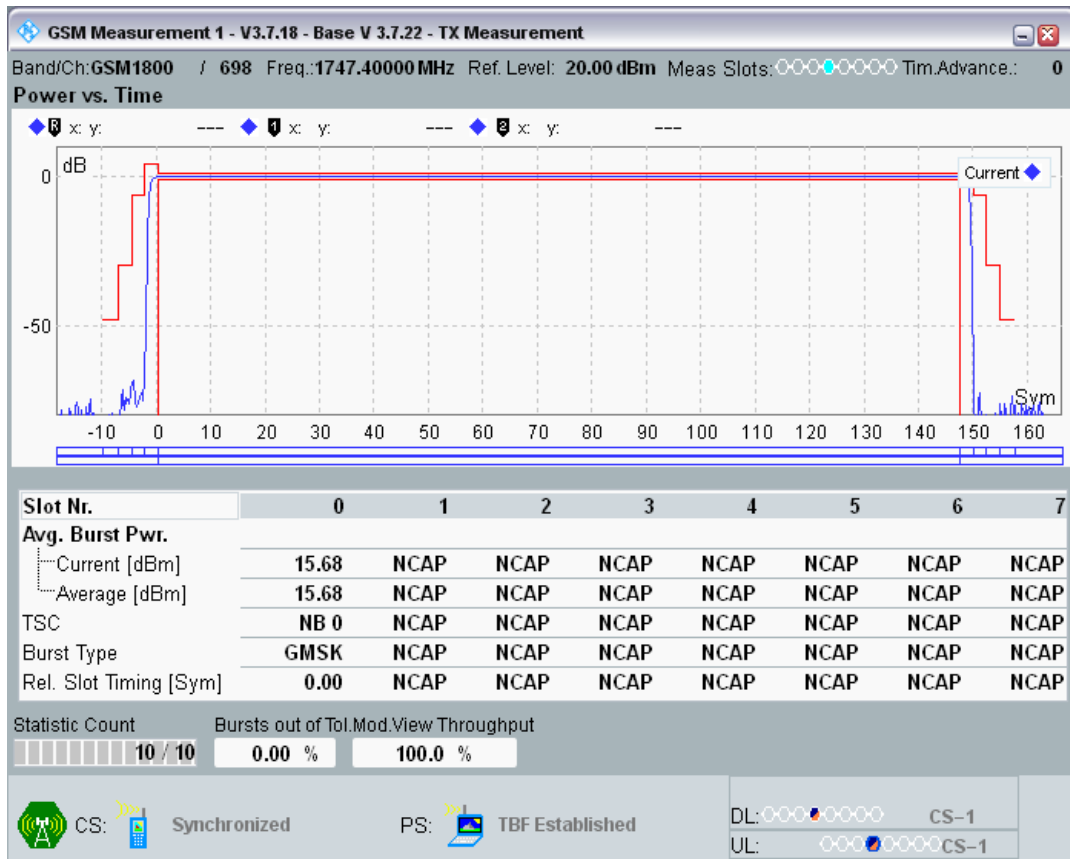

GPRS1800 Channel=698 Gamma=12;12;12;12




GPRS1800 Channel=698 Gamma=13;13;13;13




GPRS1800 Channel=698 Gamma=14;14;14;14




GPRS1800 Channel=698 Gamma=15;15;15;15

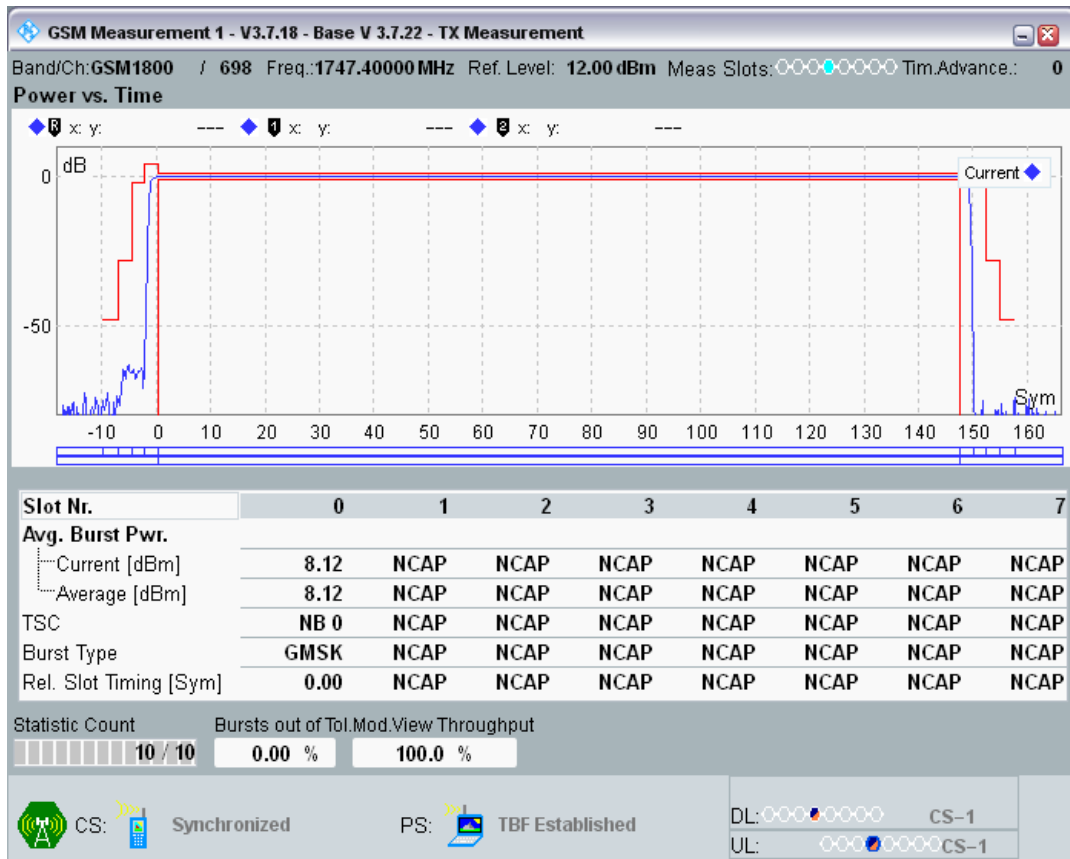


GPRS1800 Channel=698 Gamma=16;16;16;16

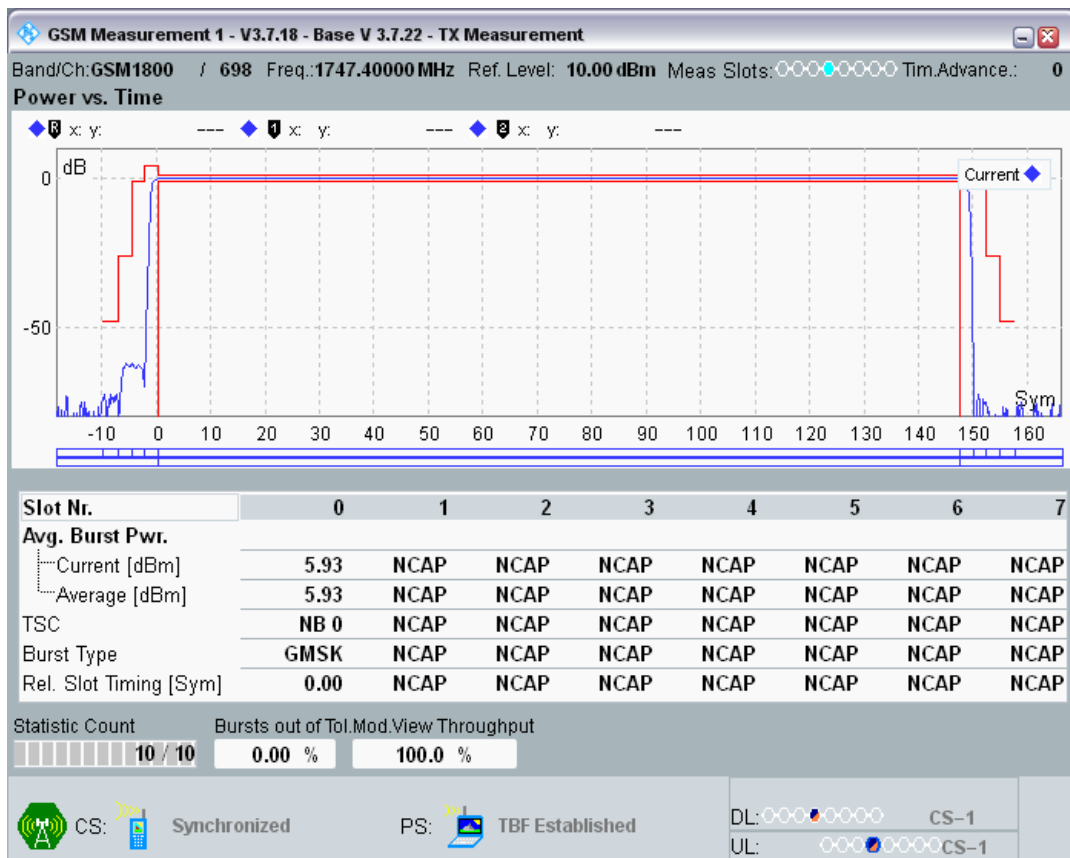

GPRS1800 Channel=698 Gamma=17;17;17;17

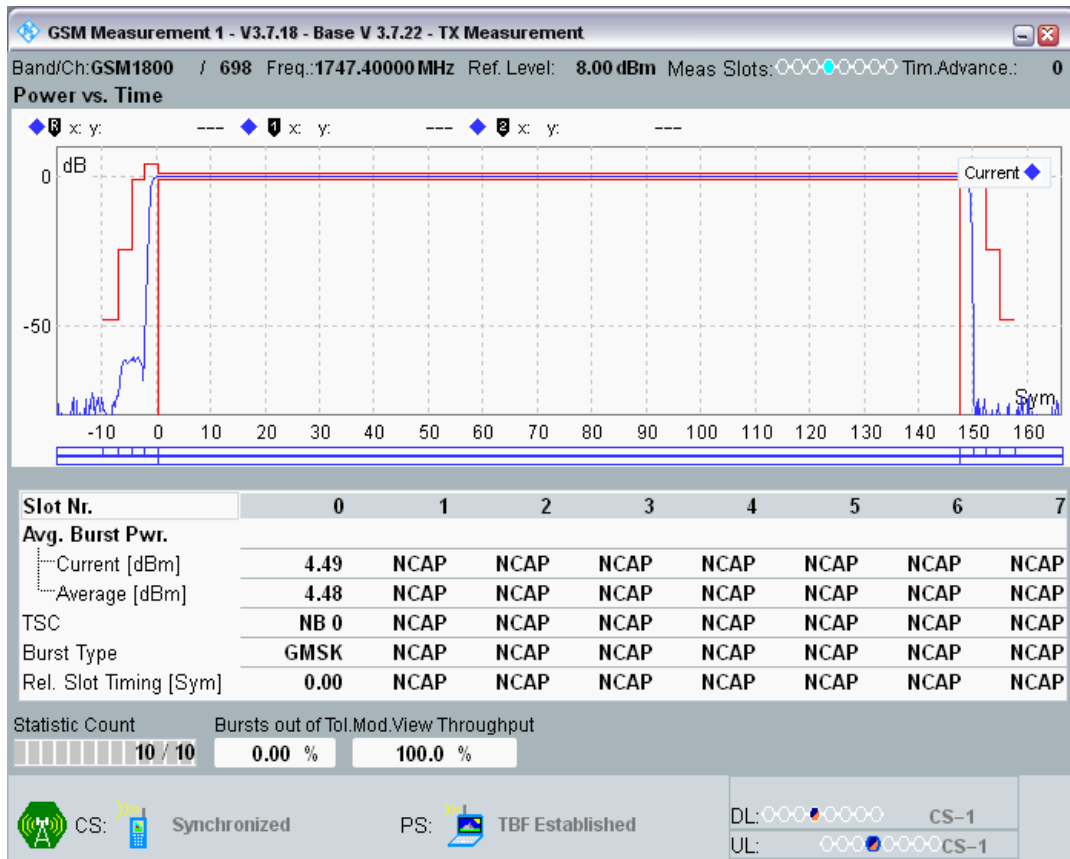


GPRS1800 Channel=698 Gamma=18;18;18;18

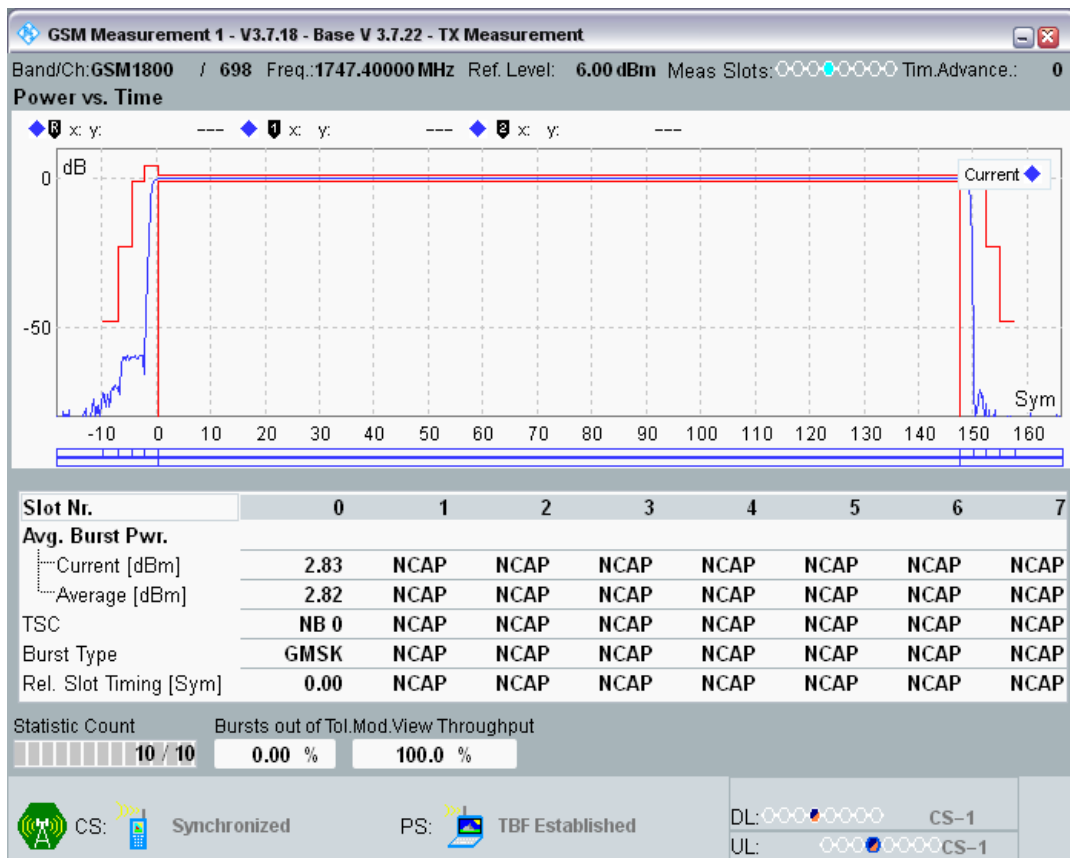


GPRS1800 Channel=885 Gamma=3;3;3;3




GPRS1800 Channel=885 Gamma=4;4;4;4

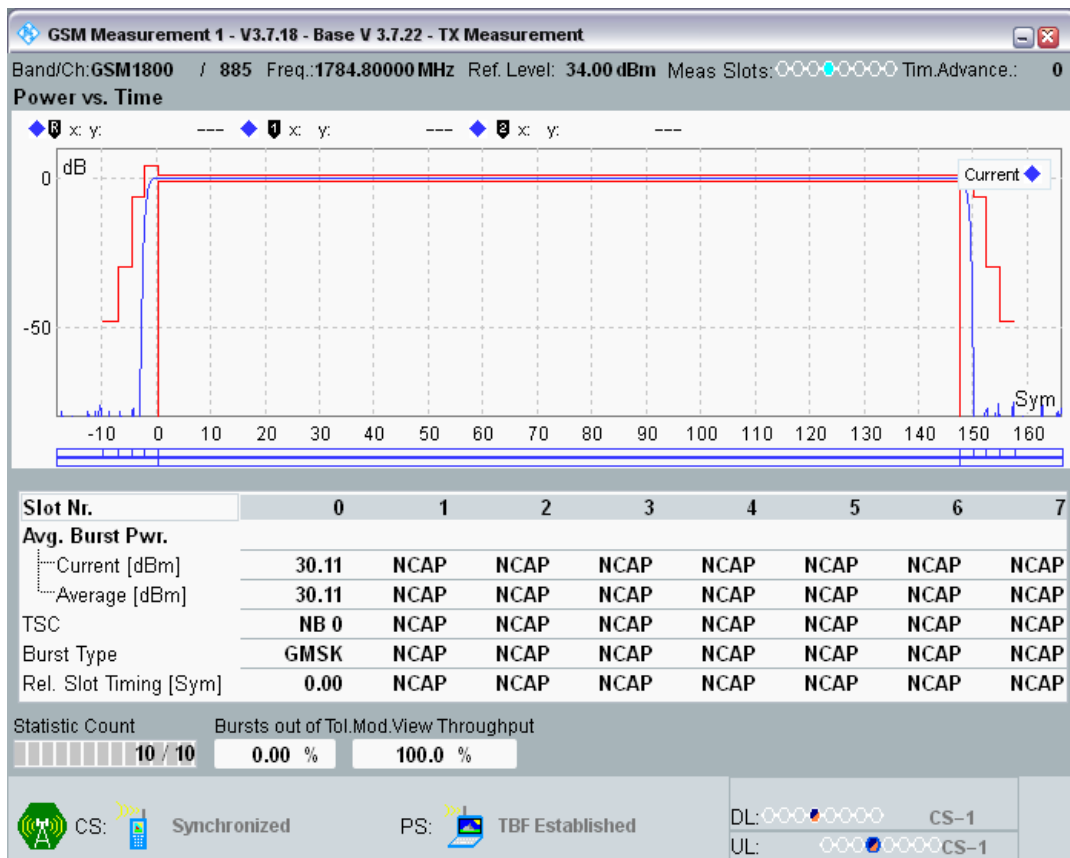


GPRS1800 Channel=885 Gamma=5;5;5;5

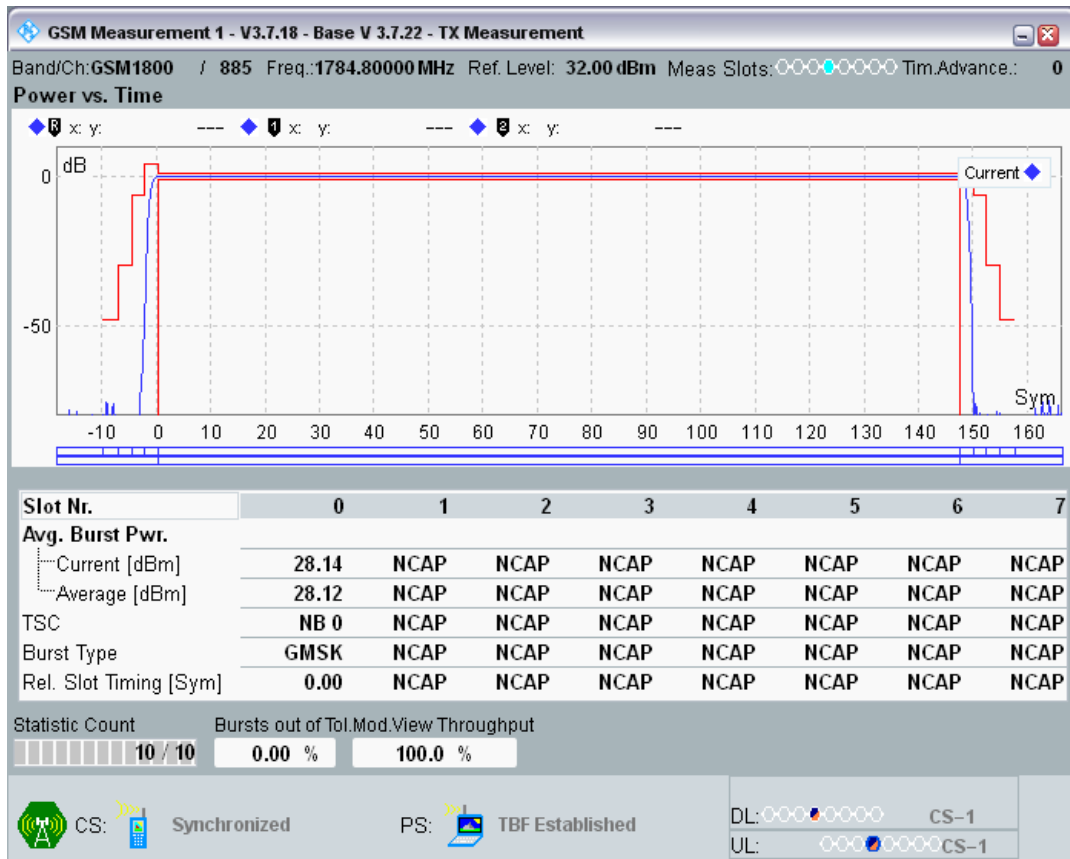


GPRS1800 Channel=885 Gamma=6;6;6;6

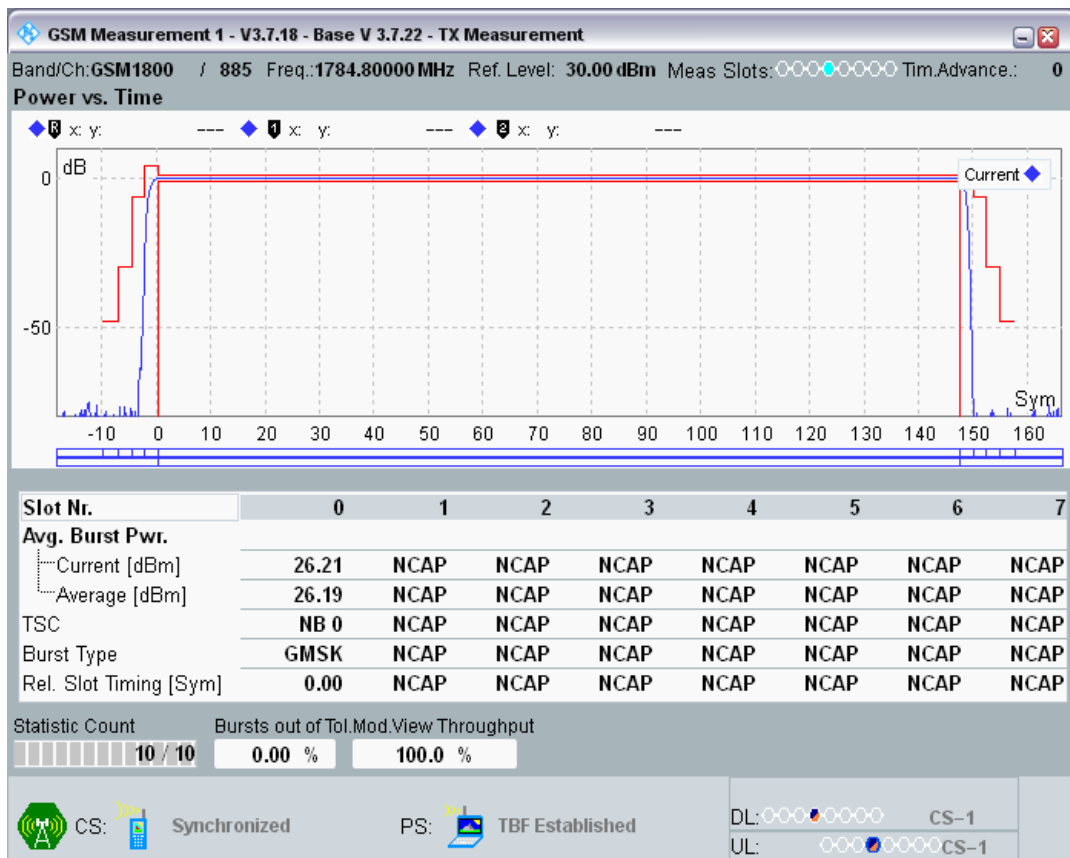


GPRS1800 Channel=885 Gamma=7;7;7;7

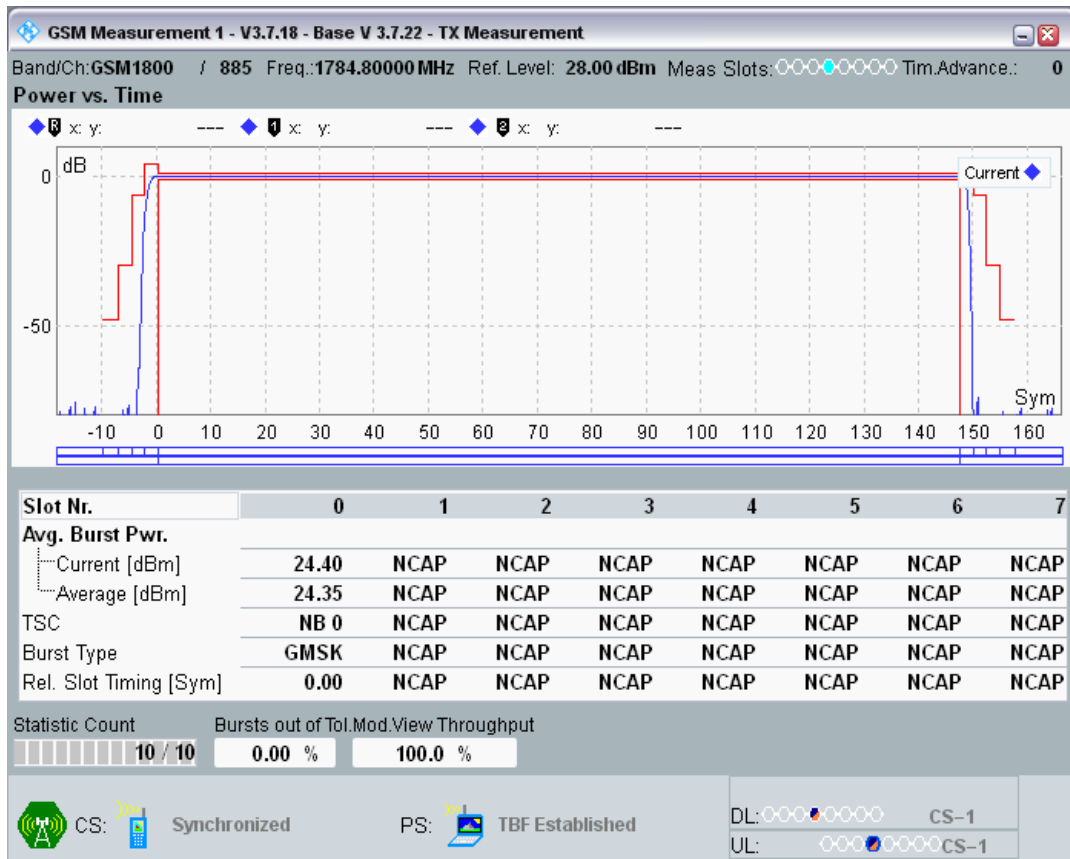


GPRS1800 Channel=885 Gamma=8;8;8;8

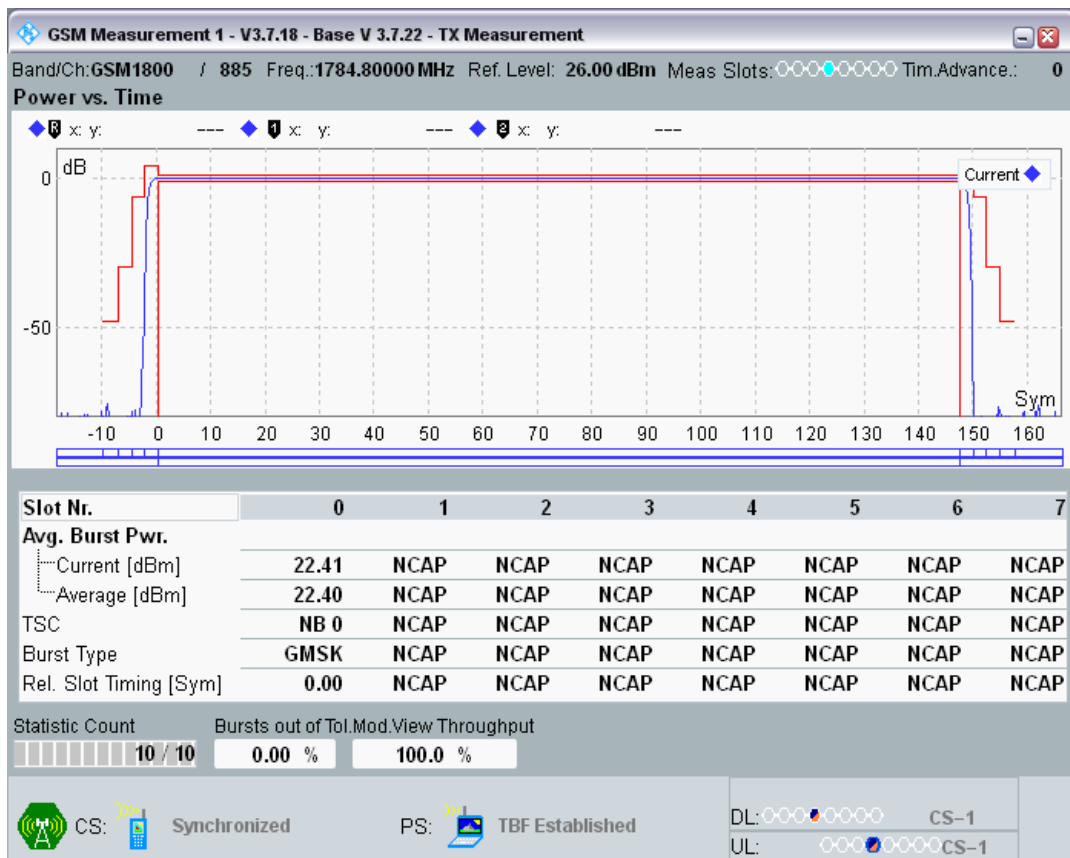


GPRS1800 Channel=885 Gamma=9;9;9;9

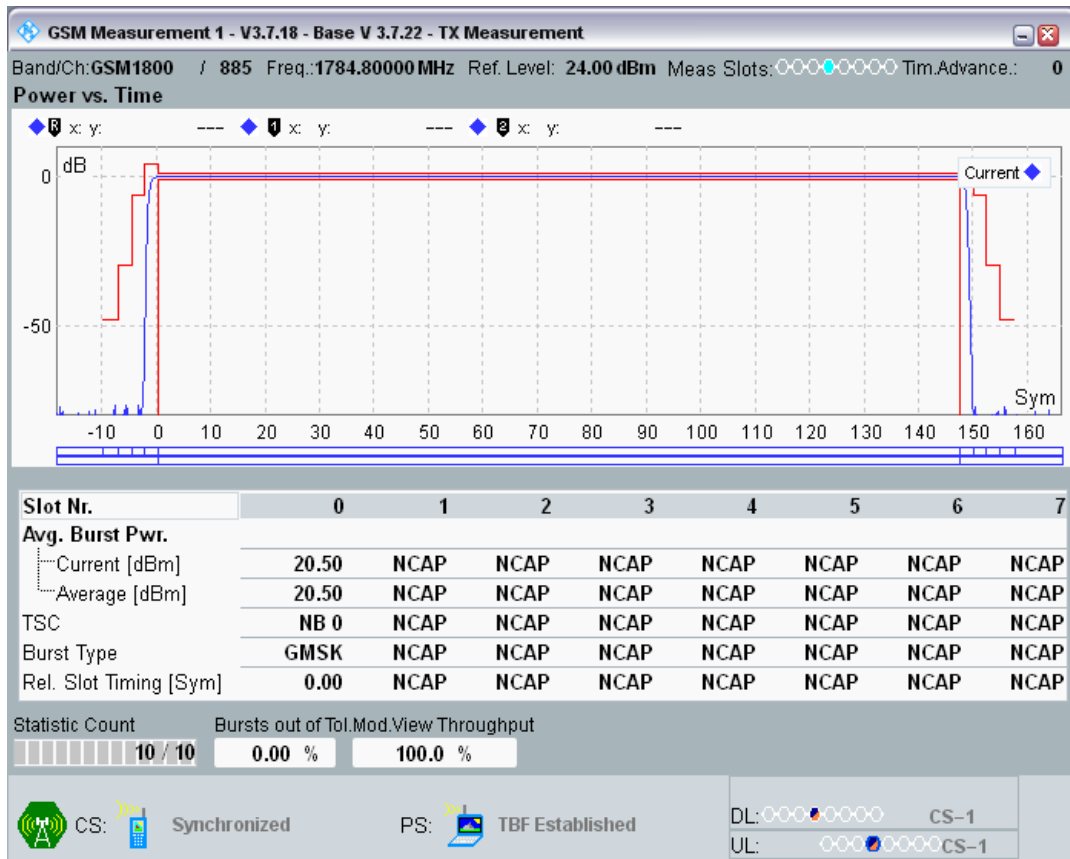


GPRS1800 Channel=885 Gamma=10;10;10;10

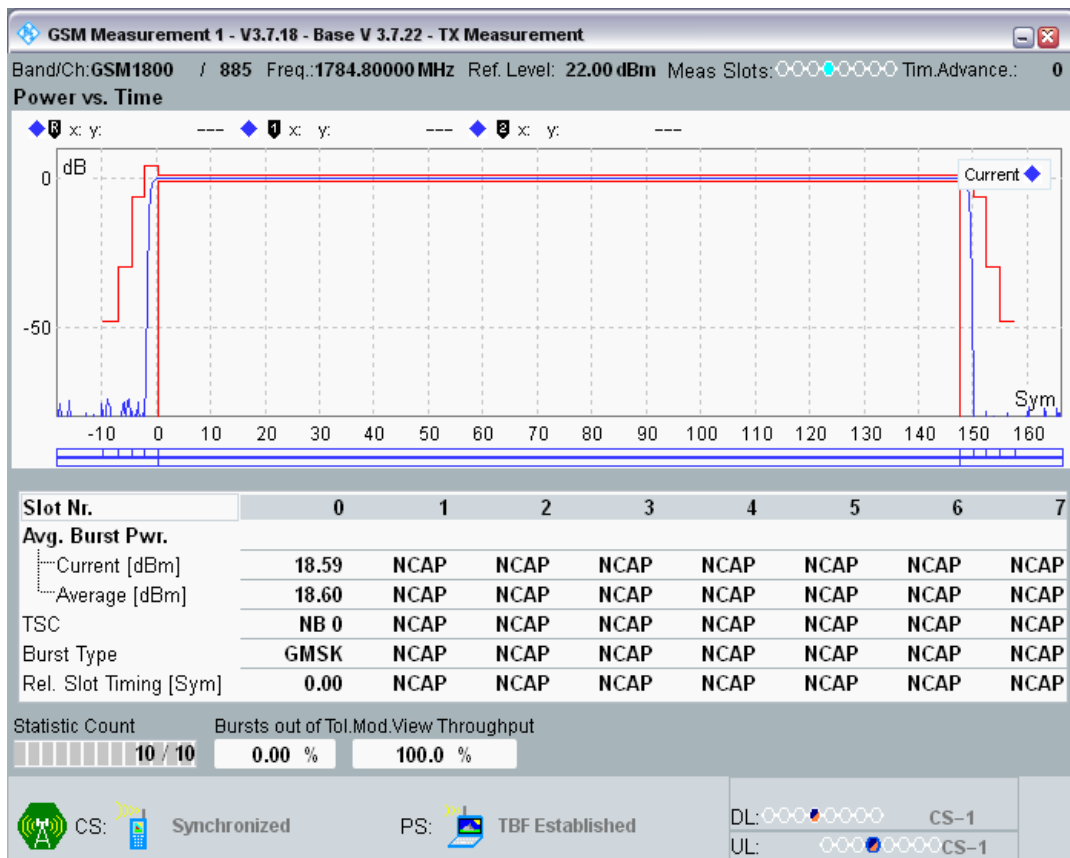


GPRS1800 Channel=885 Gamma=11;11;11;11

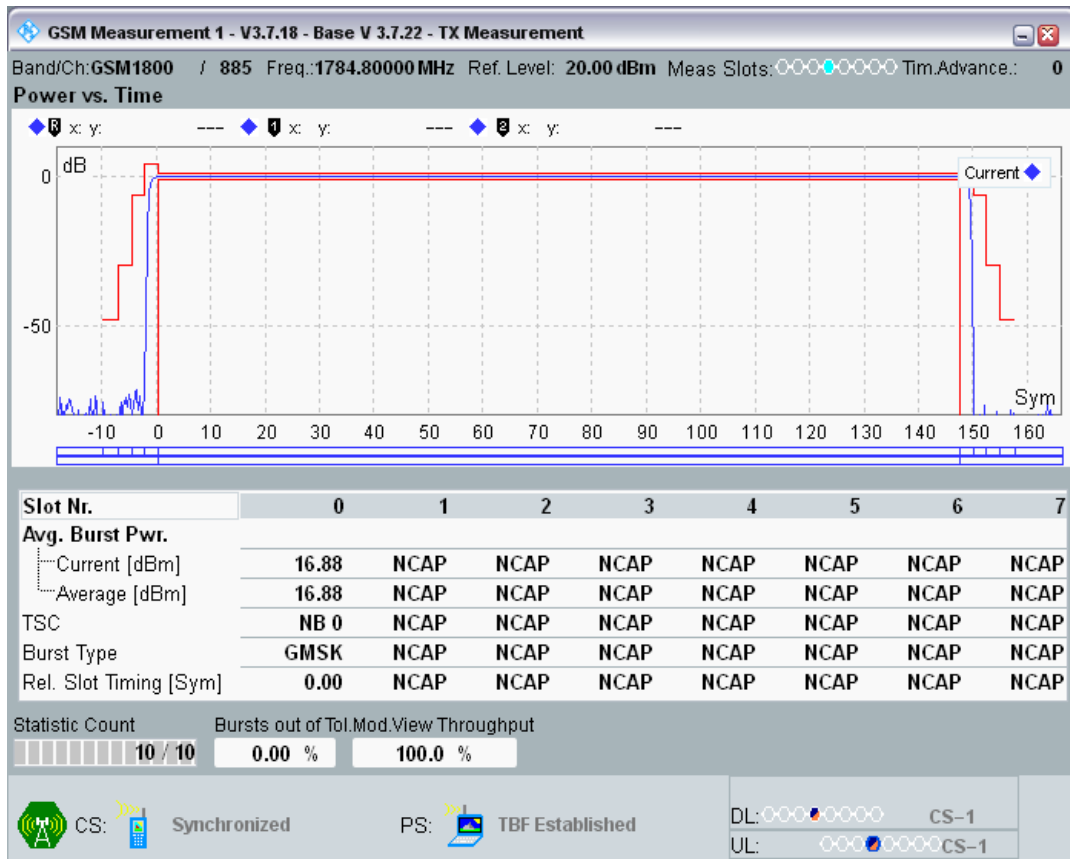


GPRS1800 Channel=885 Gamma=12;12;12;12

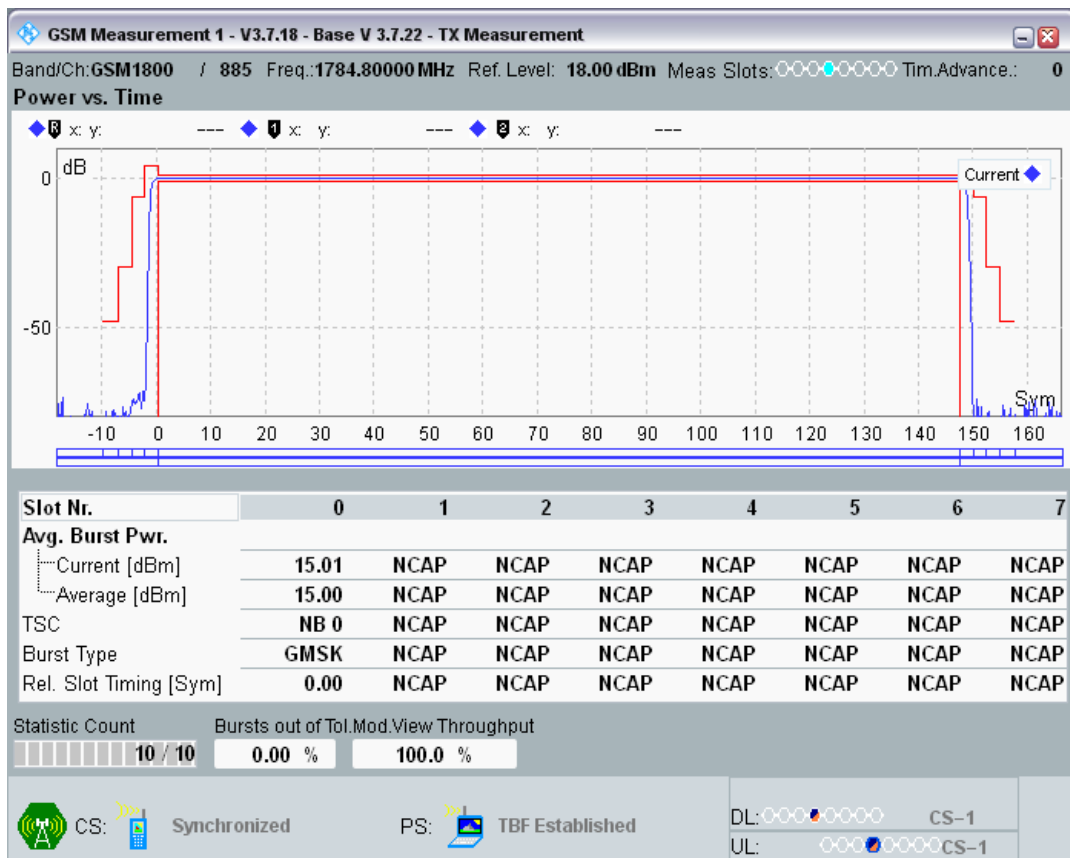


GPRS1800 Channel=885 Gamma=13;13;13;13

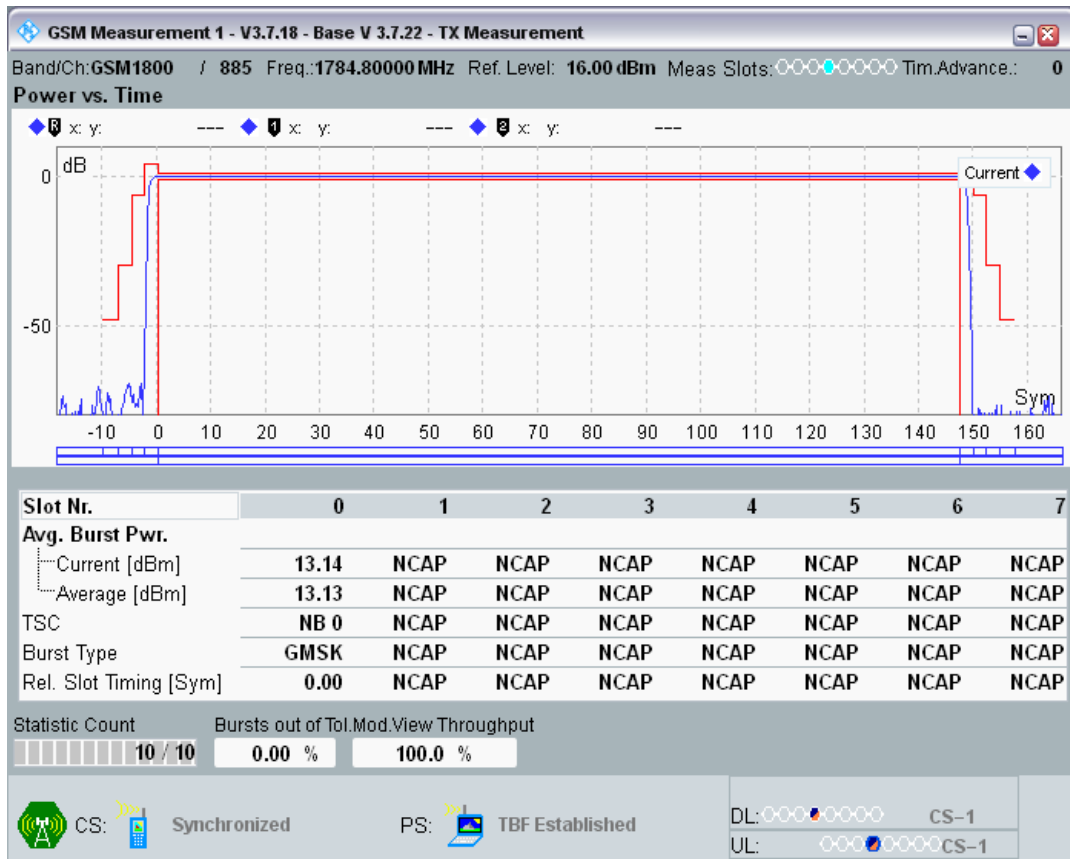


GPRS1800 Channel=885 Gamma=14;14;14;14

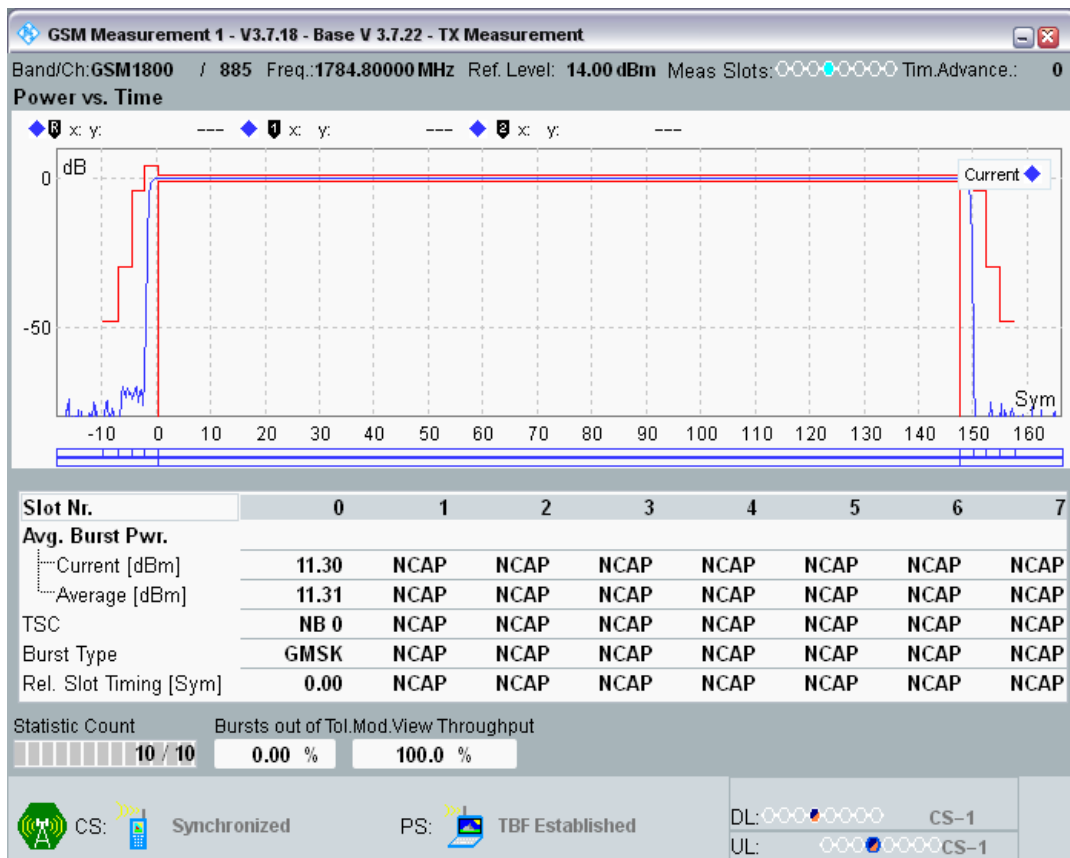


GPRS1800 Channel=885 Gamma=15;15;15;15

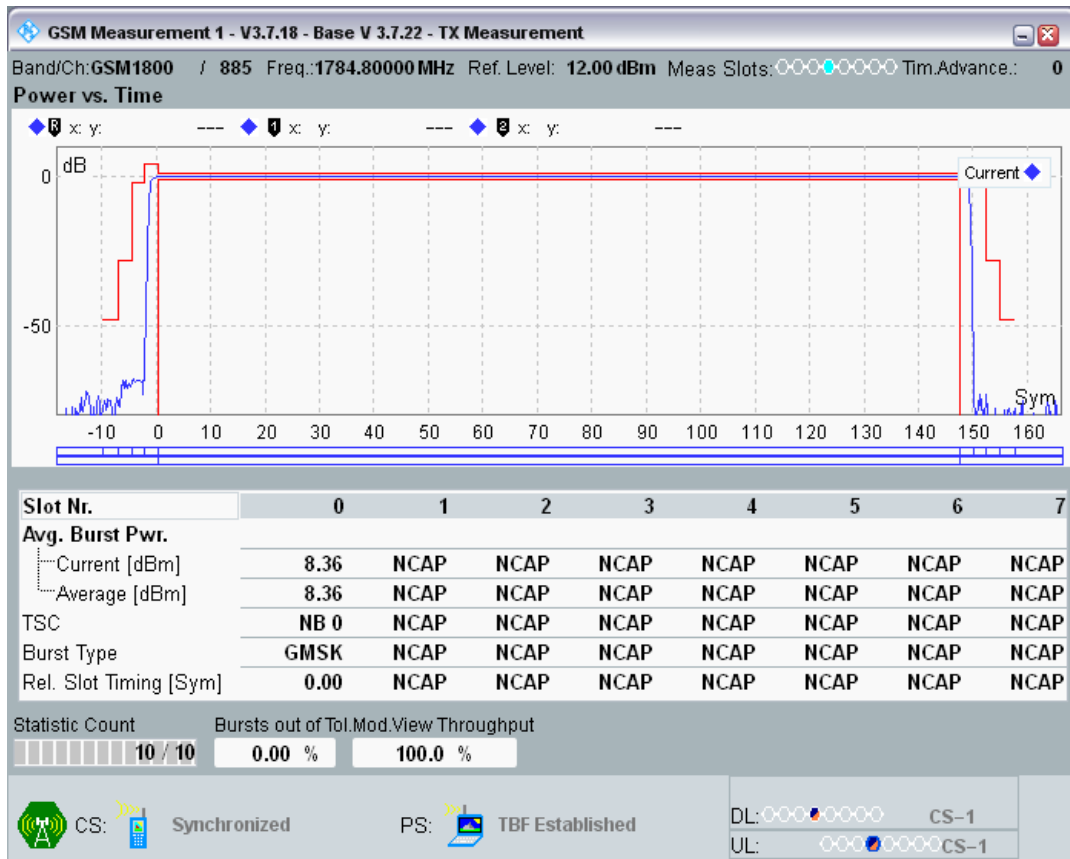


GPRS1800 Channel=885 Gamma=16;16;16;16

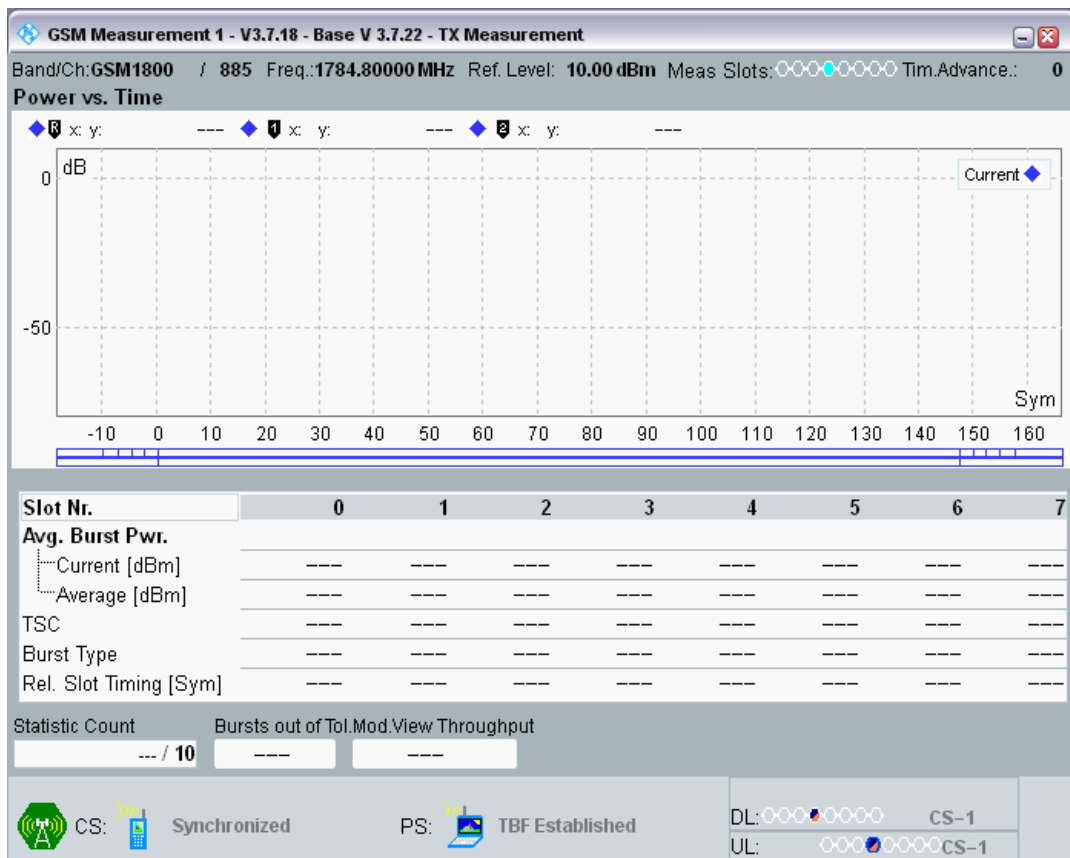

GPRS1800 Channel=885 Gamma=17;17;17;17

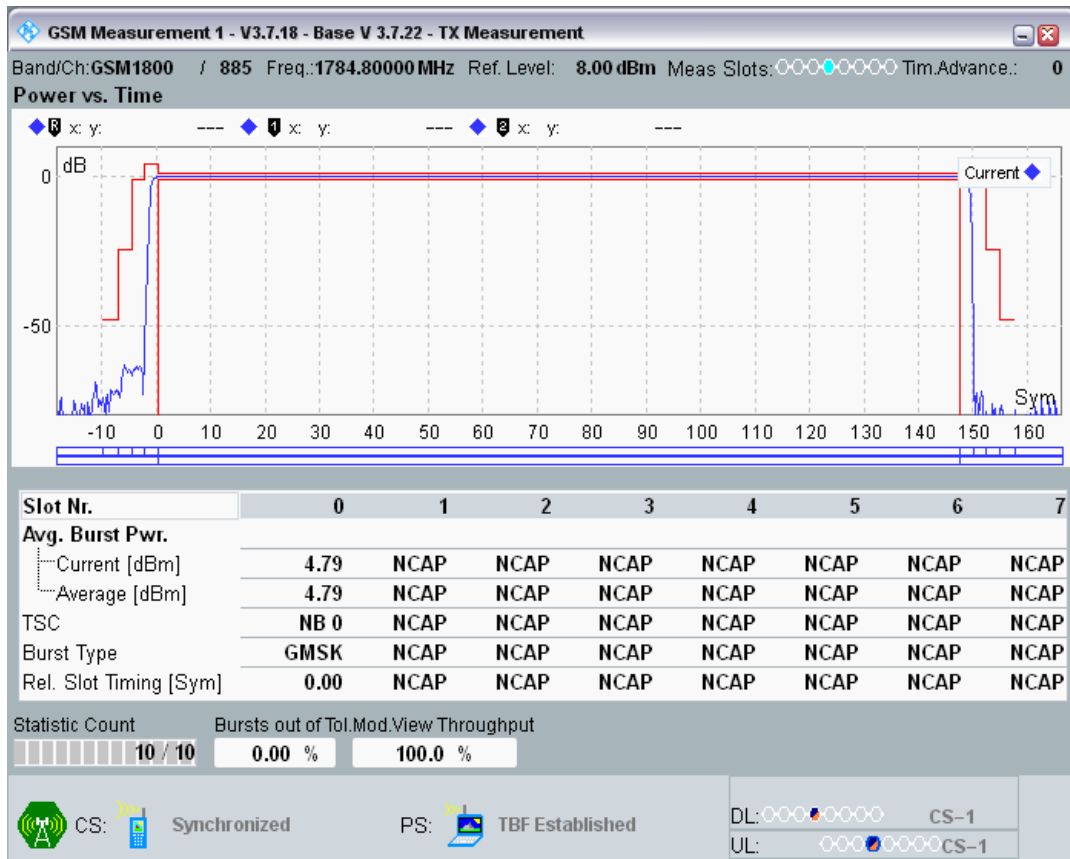


GPRS1800 Channel=885 Gamma=18;18;18;18

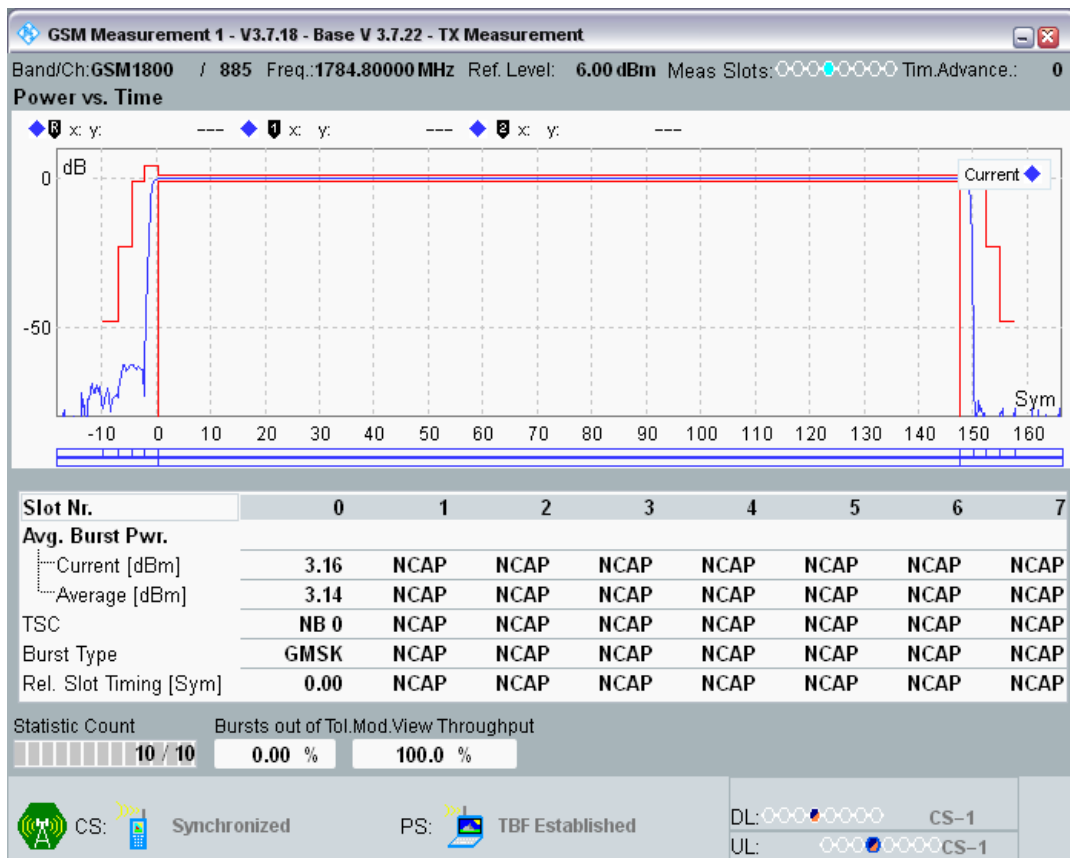


GPRS900 Channel=975 Gamma=3;3;3;3



GPRS900 Channel=975 Gamma=4;4;4;4

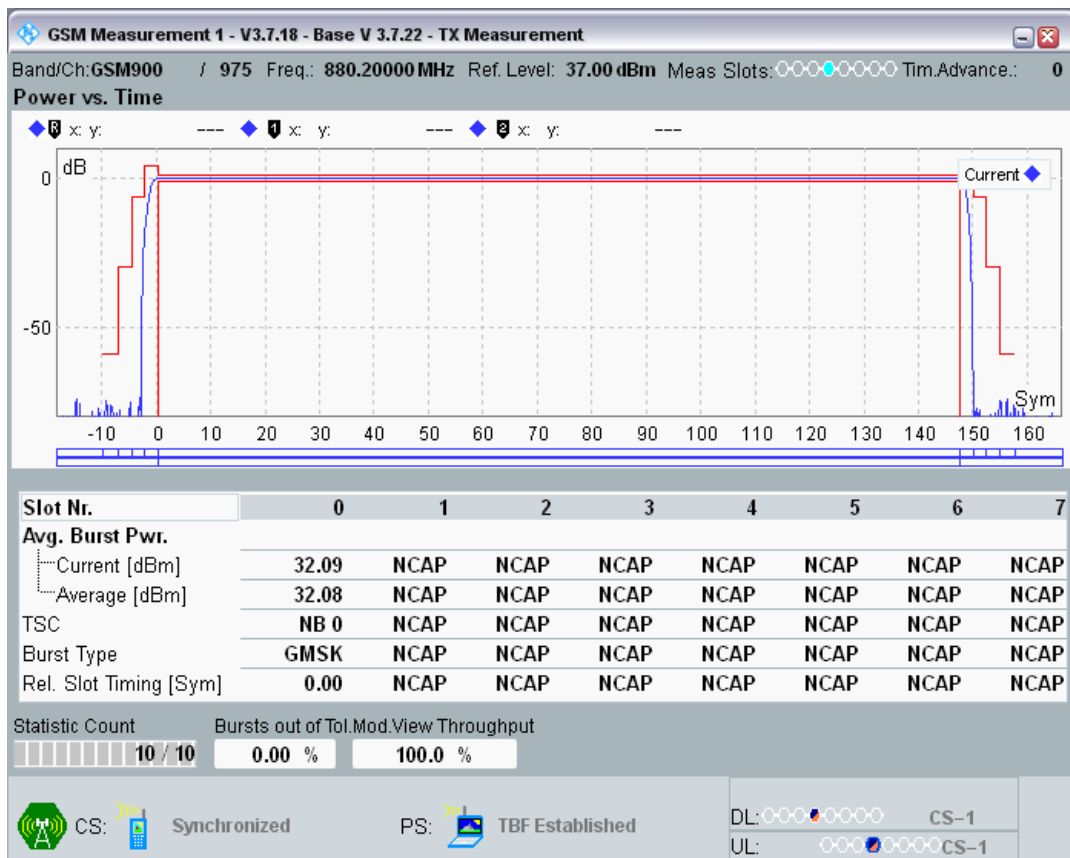

GPRS900 Channel=975 Gamma=5;5;5;5

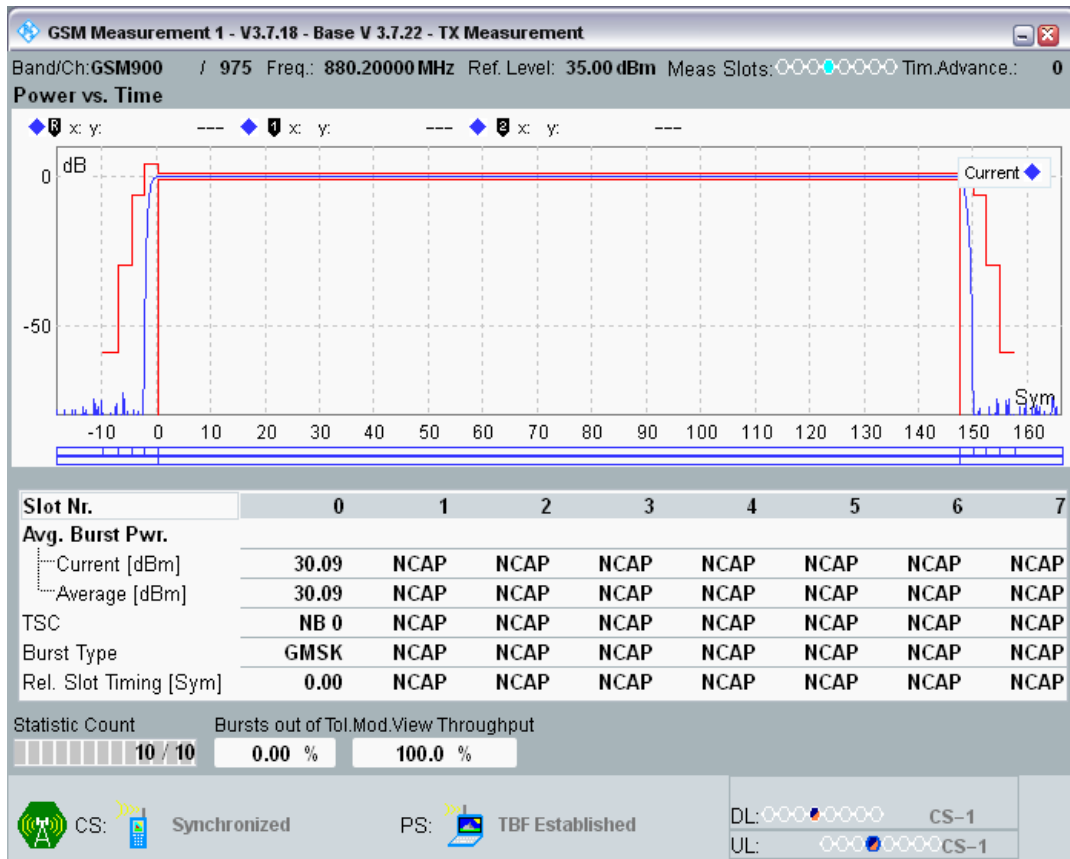


GPRS900 Channel=975 Gamma=6;6;6;6



GPRS900 Channel=975 Gamma=7;7;7;7




GPRS900 Channel=975 Gamma=8;8;8;8

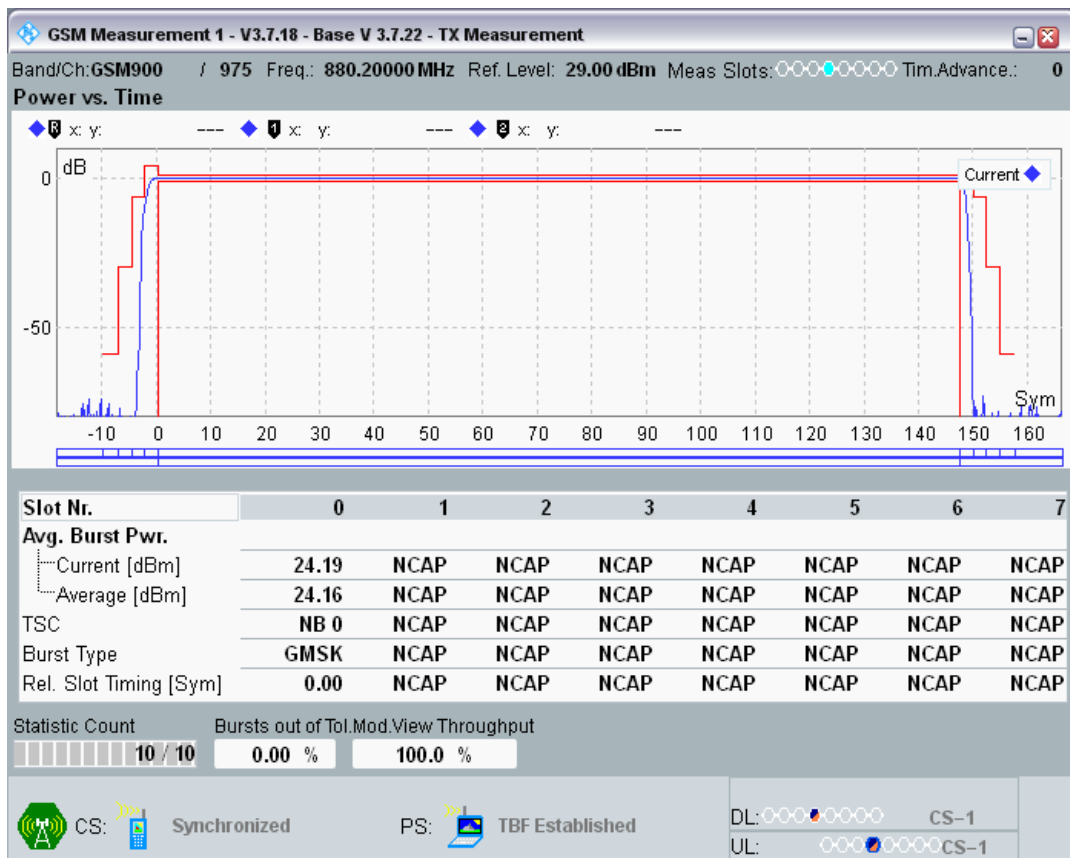

GPRS900 Channel=975 Gamma=9;9;9;9




GPRS900 Channel=975 Gamma=10;10;10;10

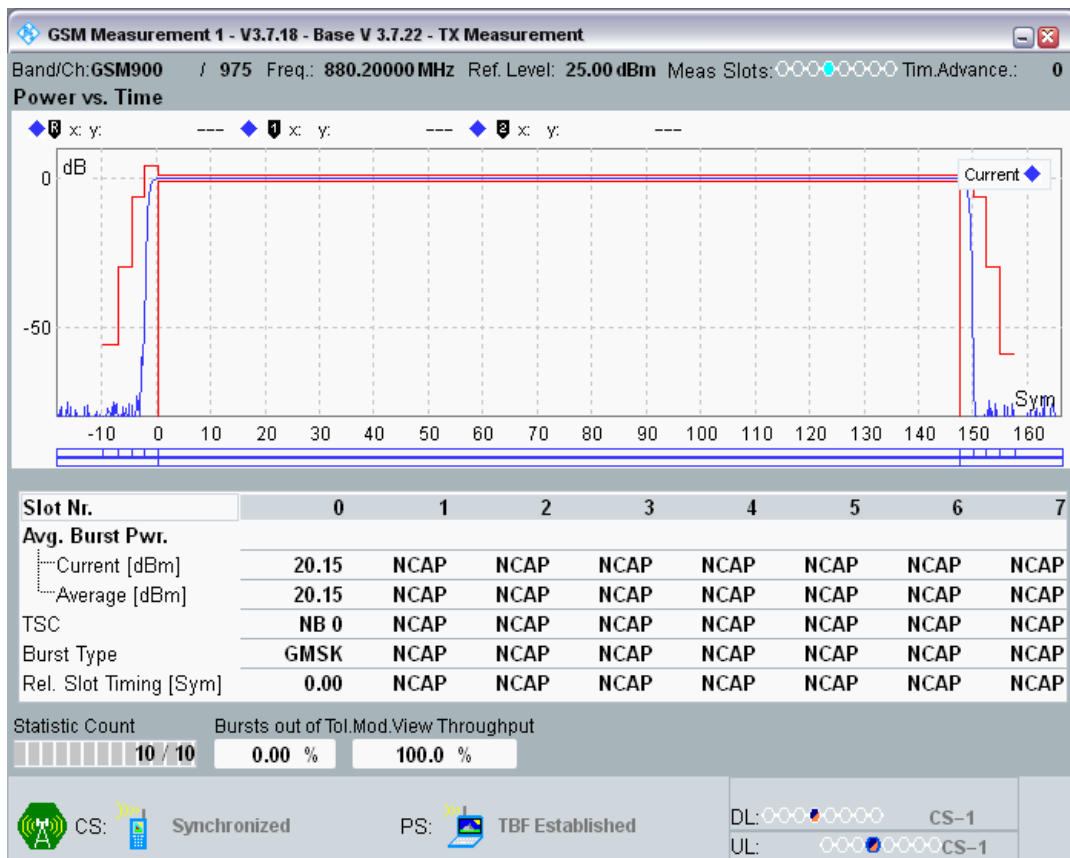

GPRS900 Channel=975 Gamma=12;12;12;12




GPRS900 Channel=975 Gamma=11;11;11;11

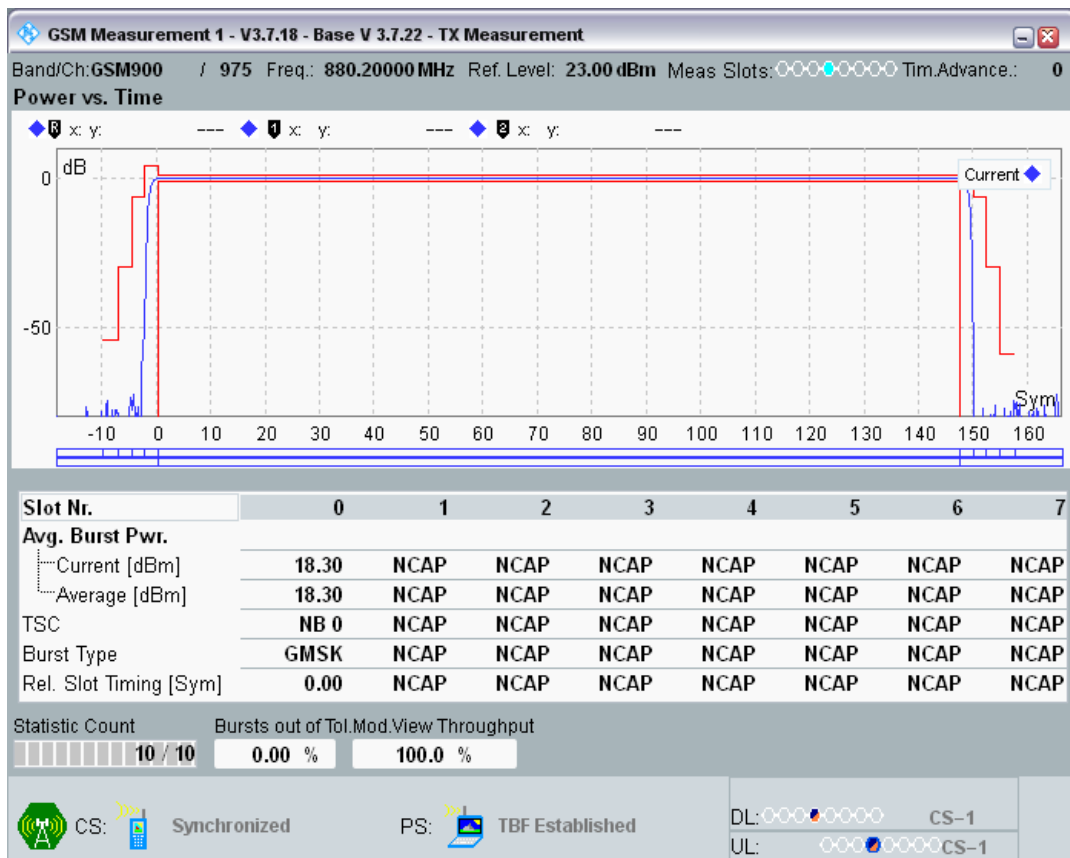


GPRS900 Channel=975 Gamma=13;13;13;13




GPRS900 Channel=975 Gamma=14;14;14;14

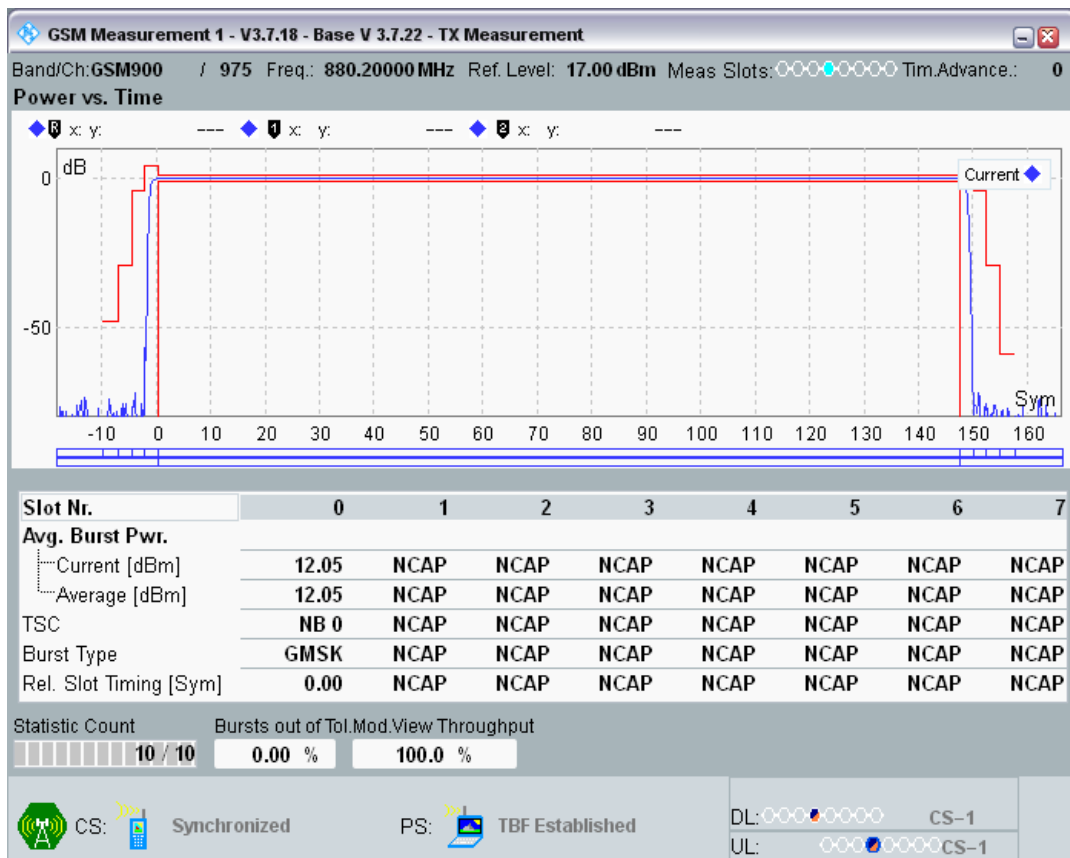

GPRS900 Channel=975 Gamma=15;15;15;15

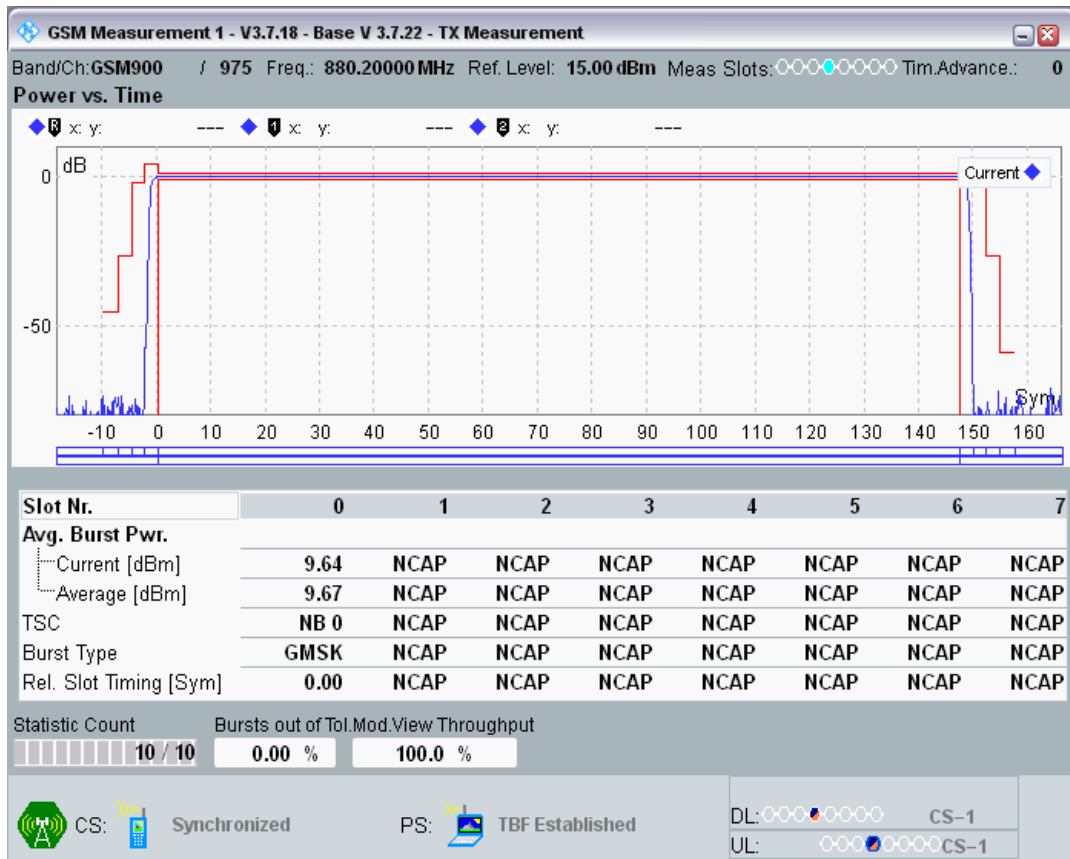


GPRS900 Channel=975 Gamma=16;16;16;16

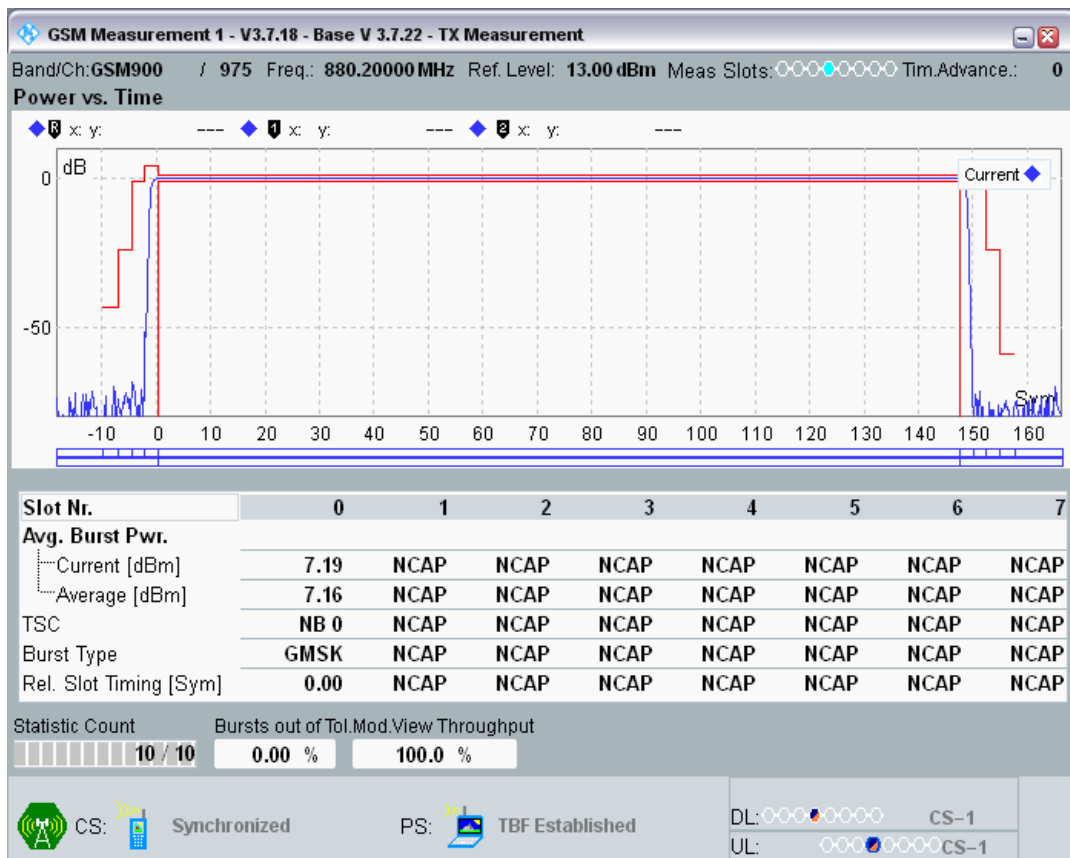

GPRS900 Channel=38 Gamma=3;3;3;3




GPRS900 Channel=975 Gamma=17;17;17;17

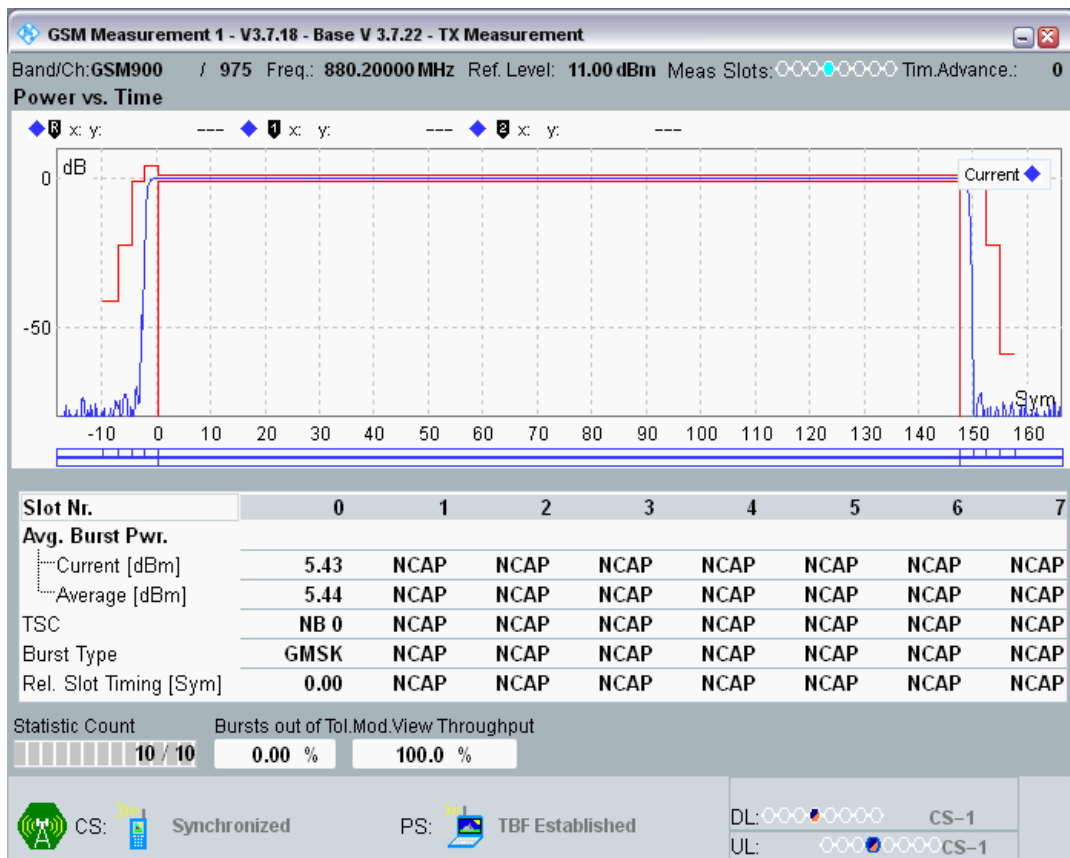


GPRS900 Channel=38 Gamma=4;4;4;4




GPRS900 Channel=38 Gamma=6;6;6;6

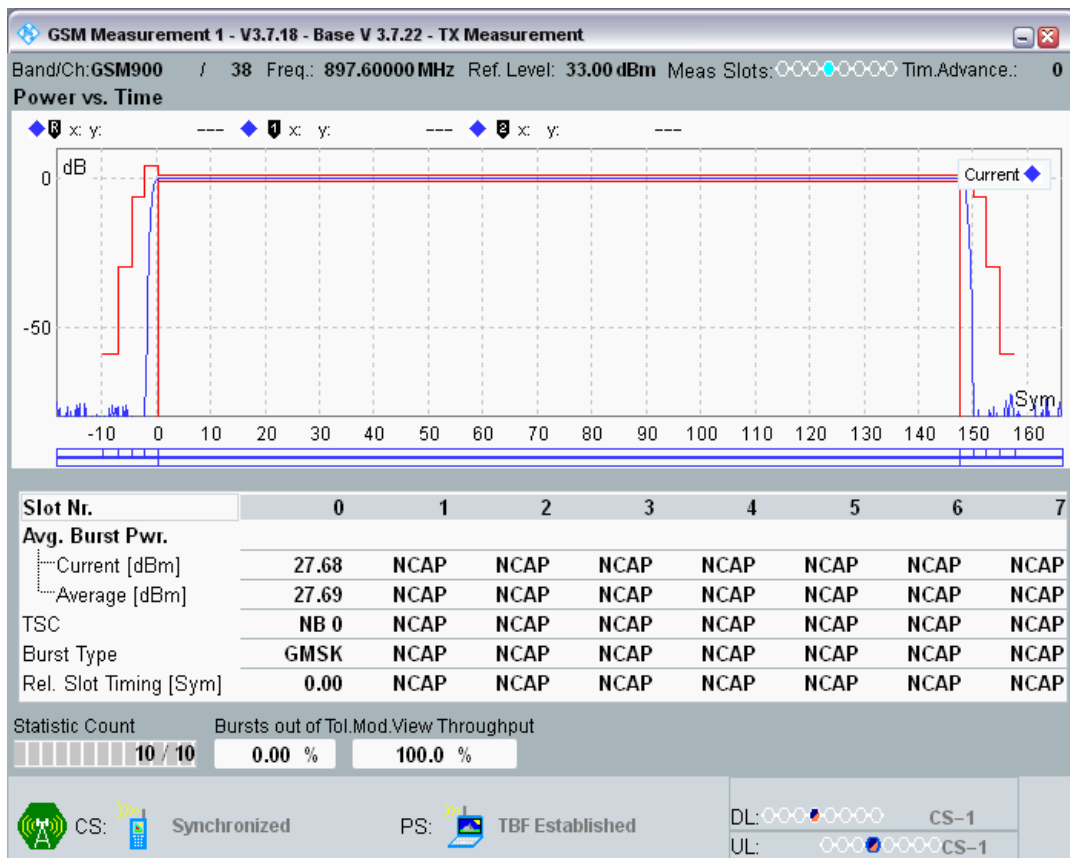

GPRS900 Channel=38 Gamma=5;5;5;5

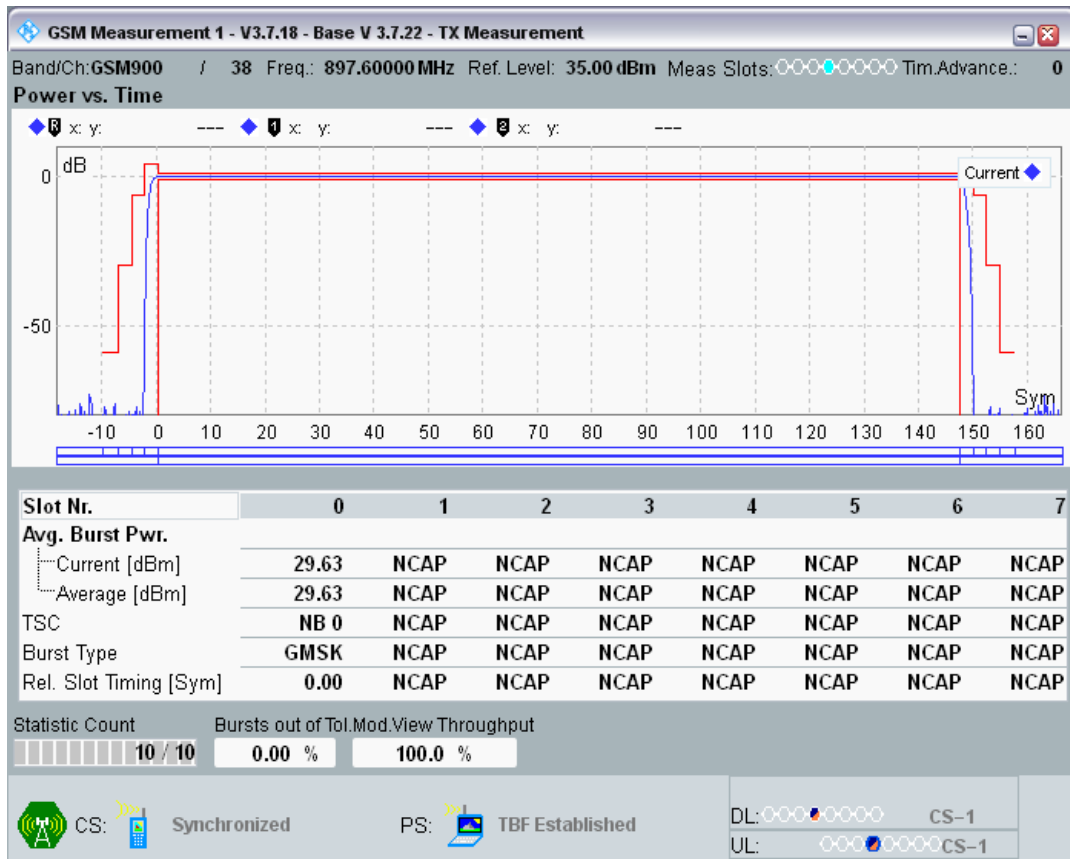

GPRS900 Channel=38 Gamma=7;7;7;7

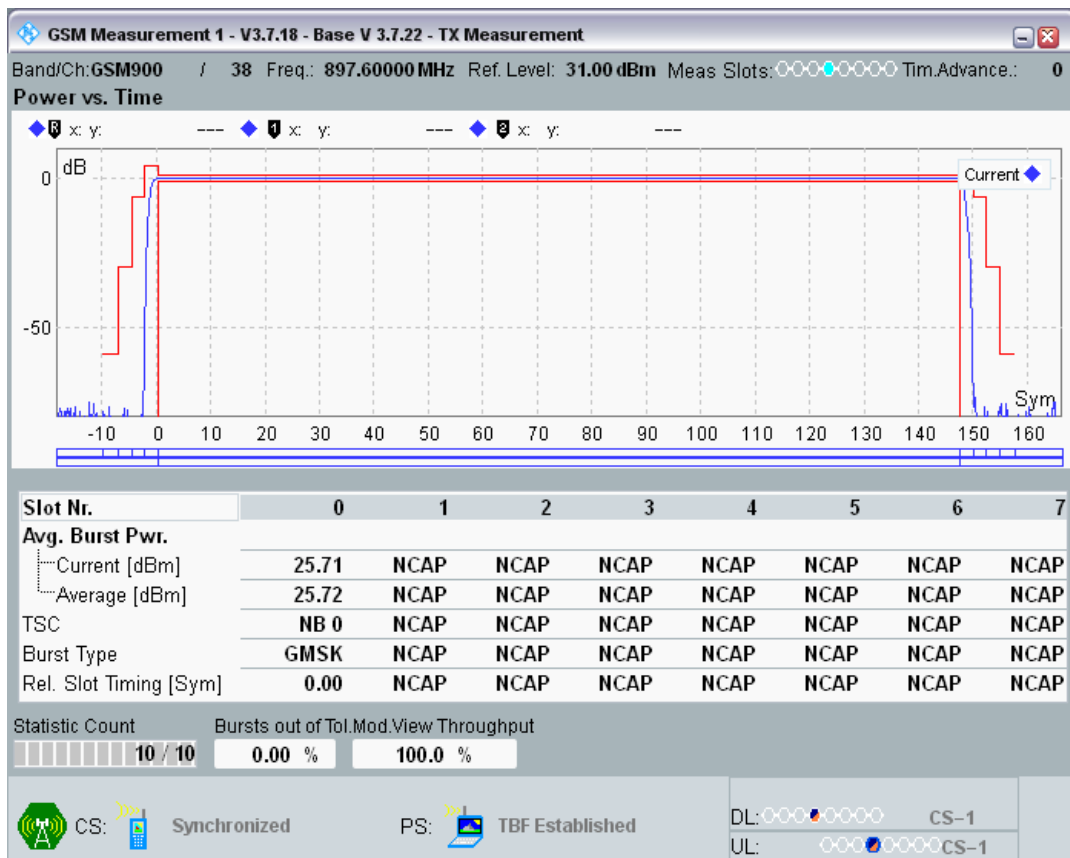


GPRS900 Channel=38 Gamma=8;8;8;8




GPRS900 Channel=38 Gamma=9;9;9;9




GPRS900 Channel=38 Gamma=10;10;10;10

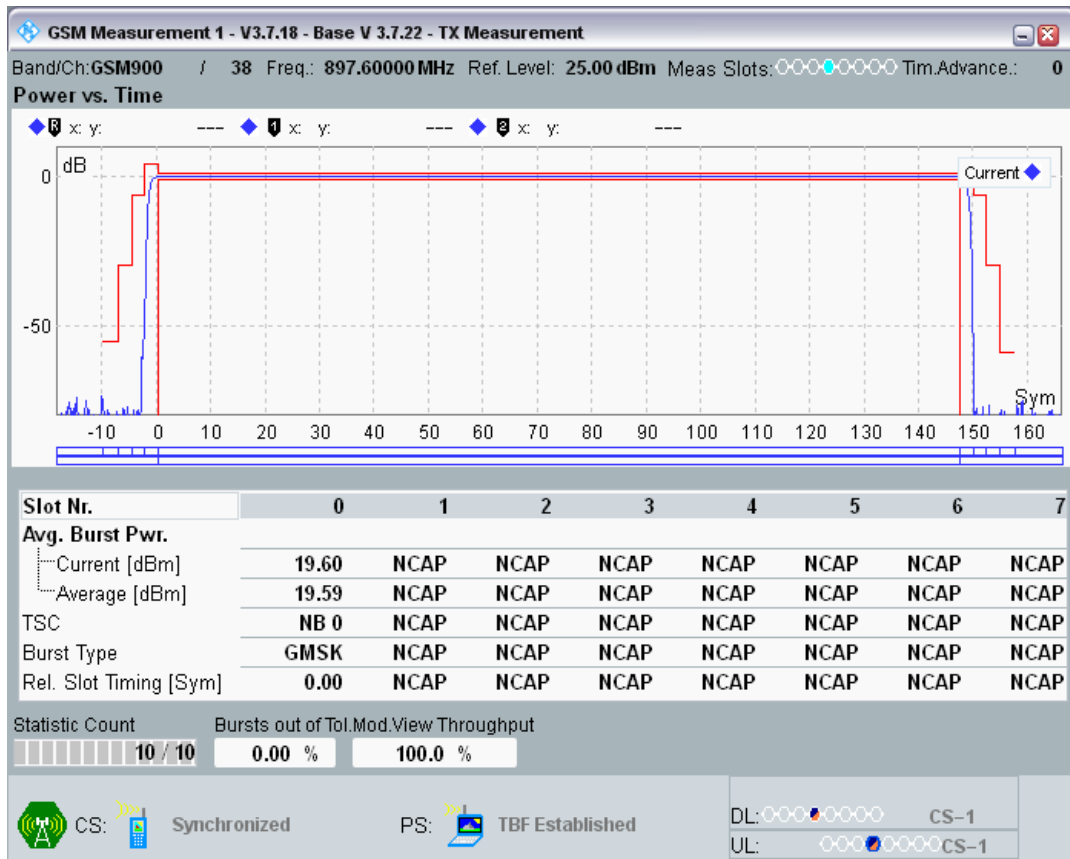


GPRS900 Channel=38 Gamma=11;11;11;11

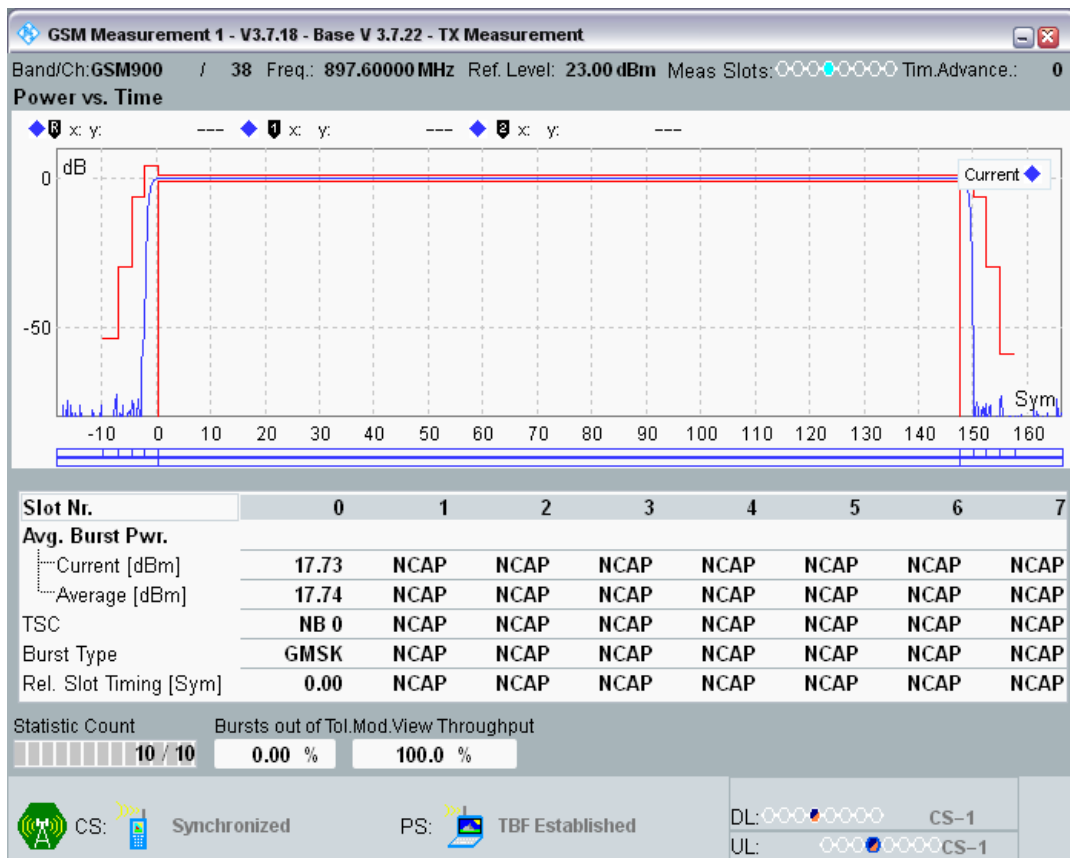


GPRS900 Channel=38 Gamma=12;12;12;12

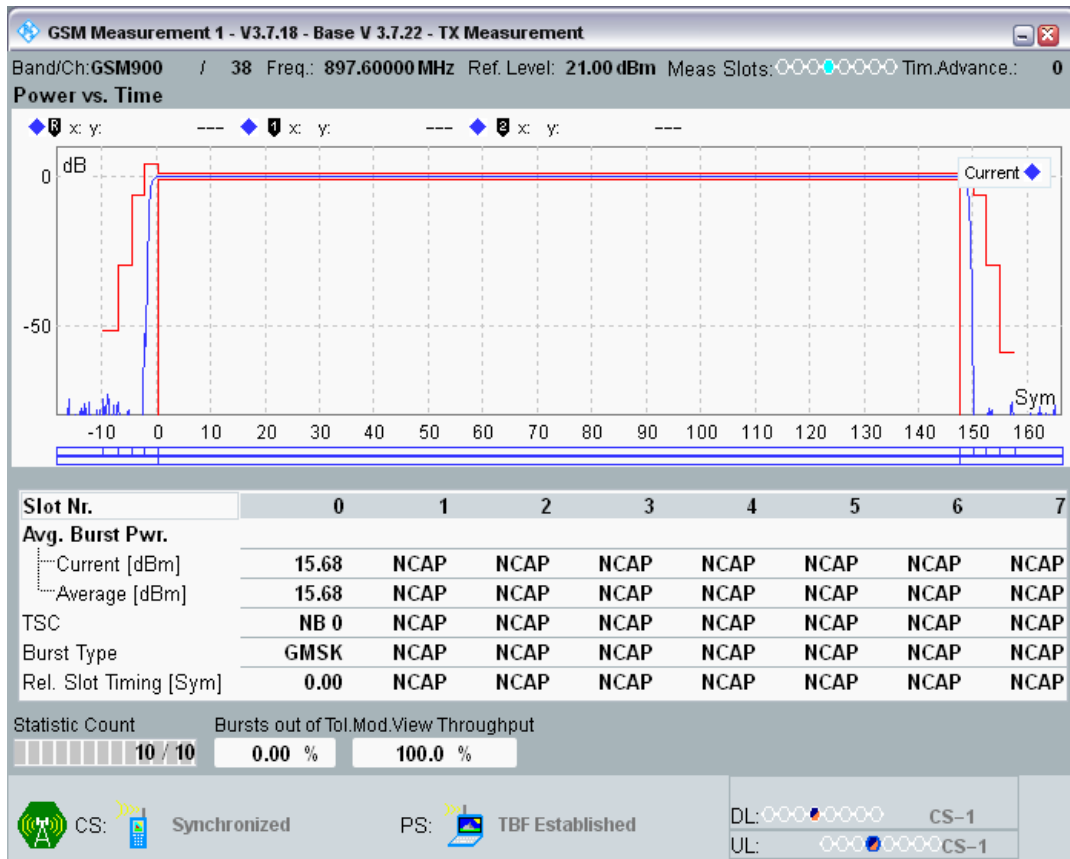


GPRS900 Channel=38 Gamma=13;13;13;13

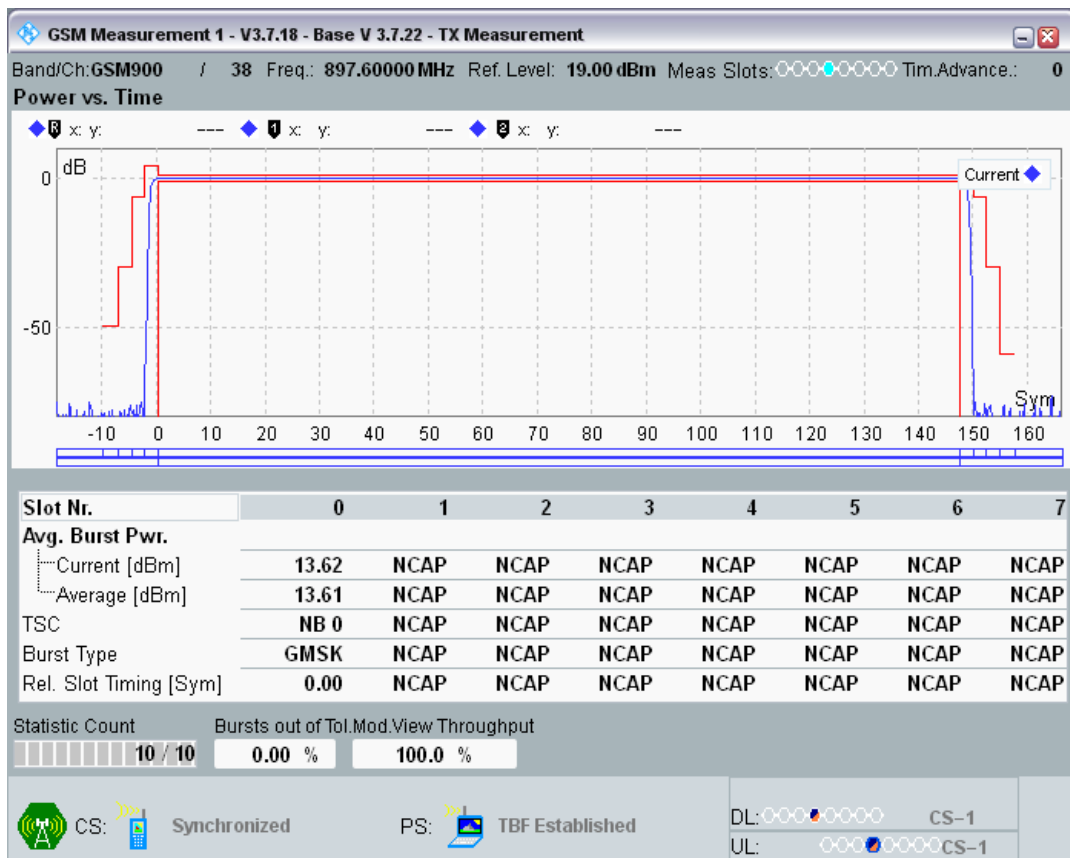


GPRS900 Channel=38 Gamma=14;14;14;14

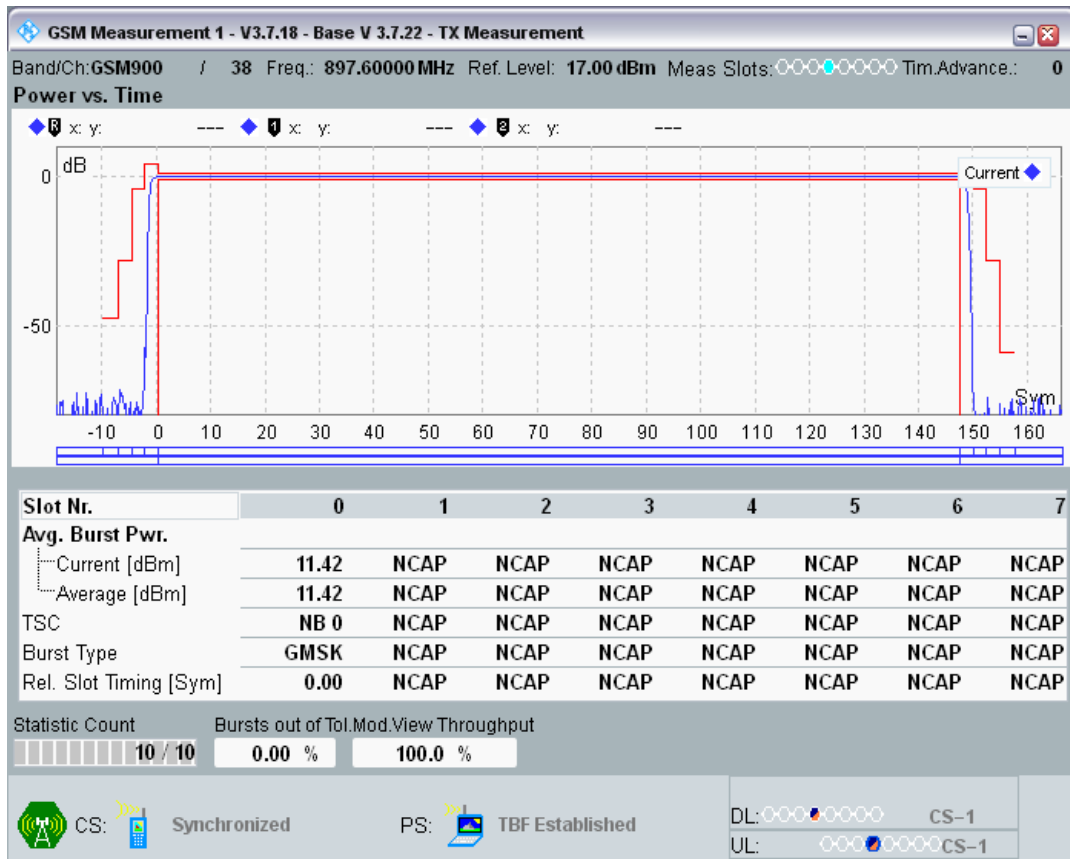


GPRS900 Channel=38 Gamma=15;15;15;15

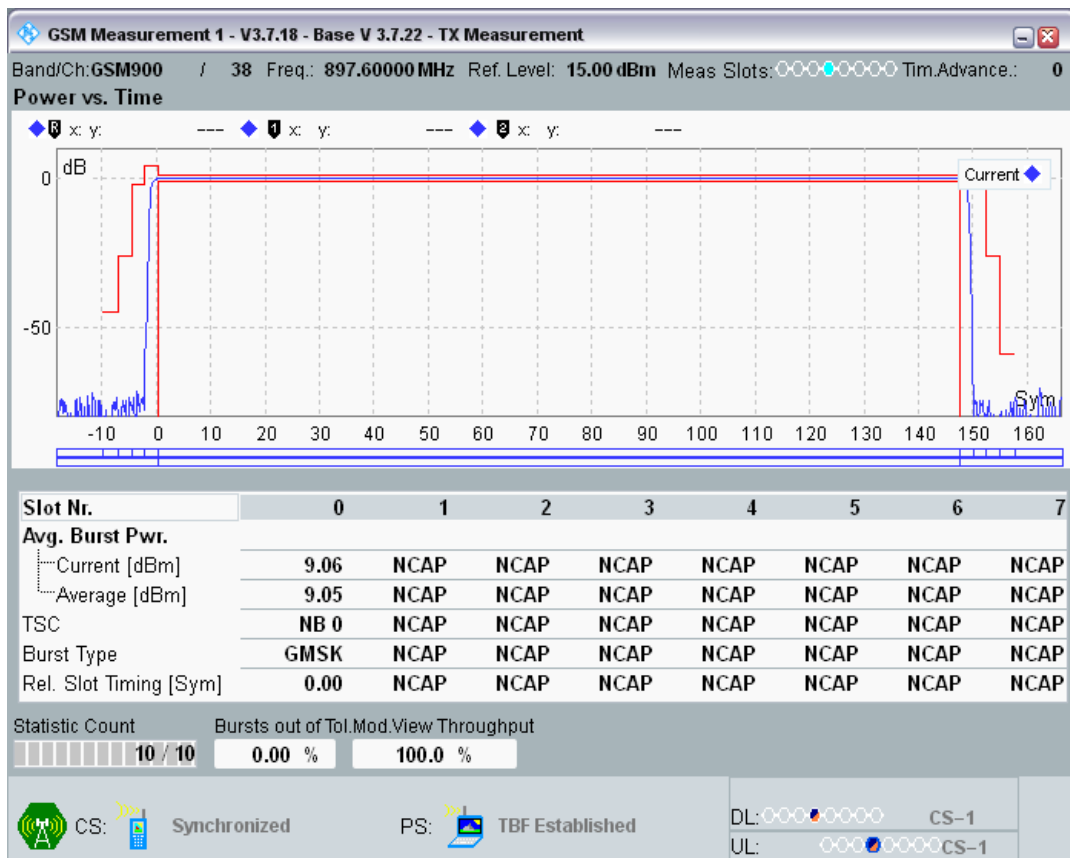


GPRS900 Channel=38 Gamma=16;16;16;16

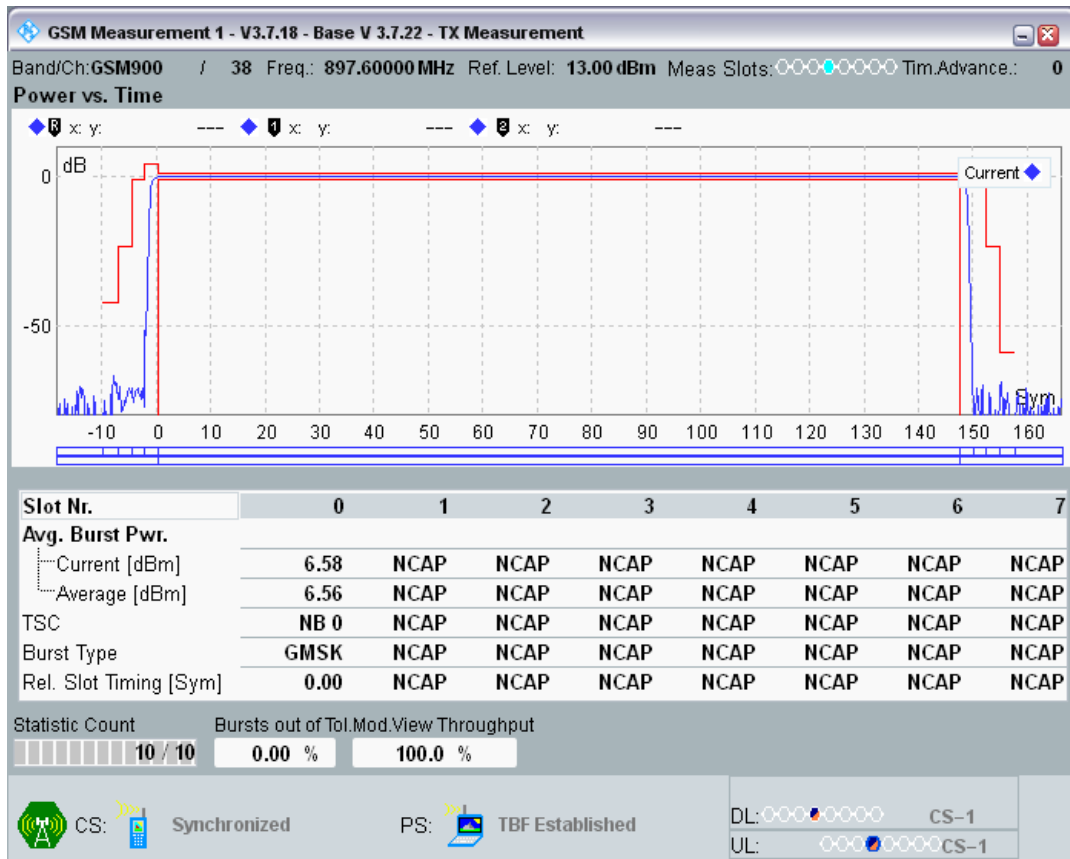


GPRS900 Channel=38 Gamma=17;17;17;17

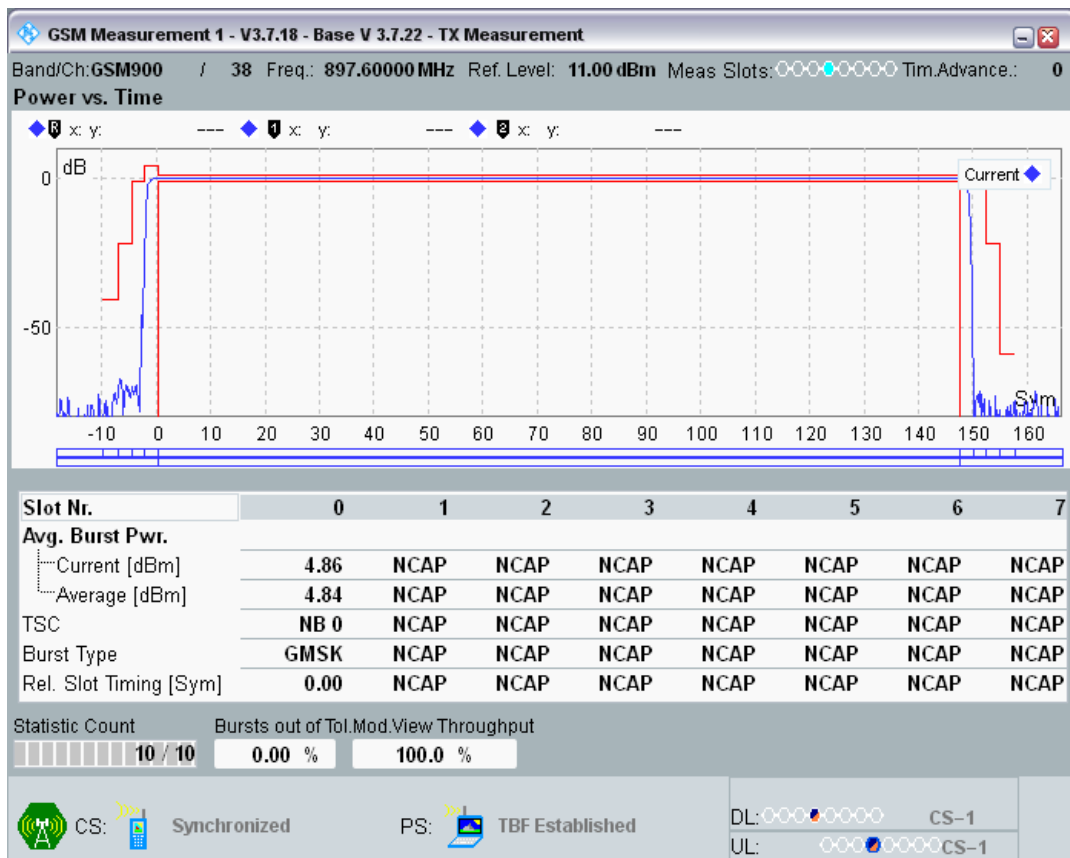

GPRS900 Channel=124 Gamma=3;3;3;3

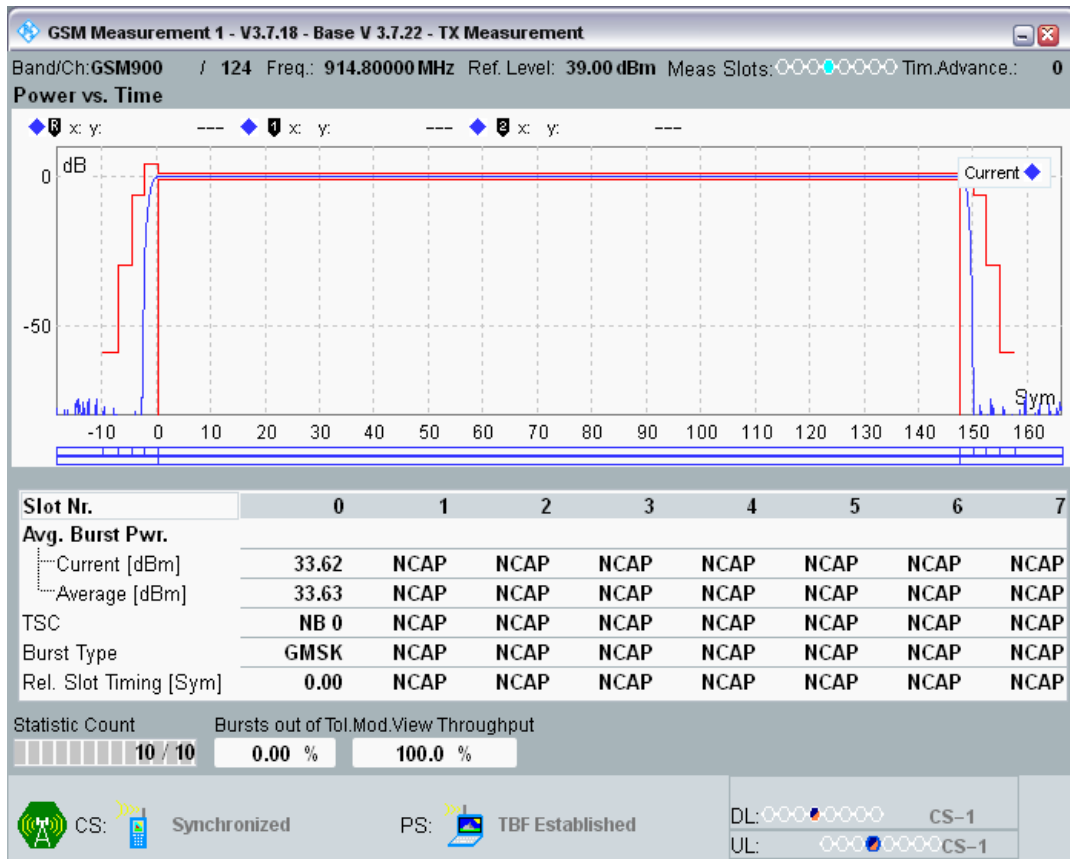


GPRS900 Channel=124 Gamma=4;4;4;4

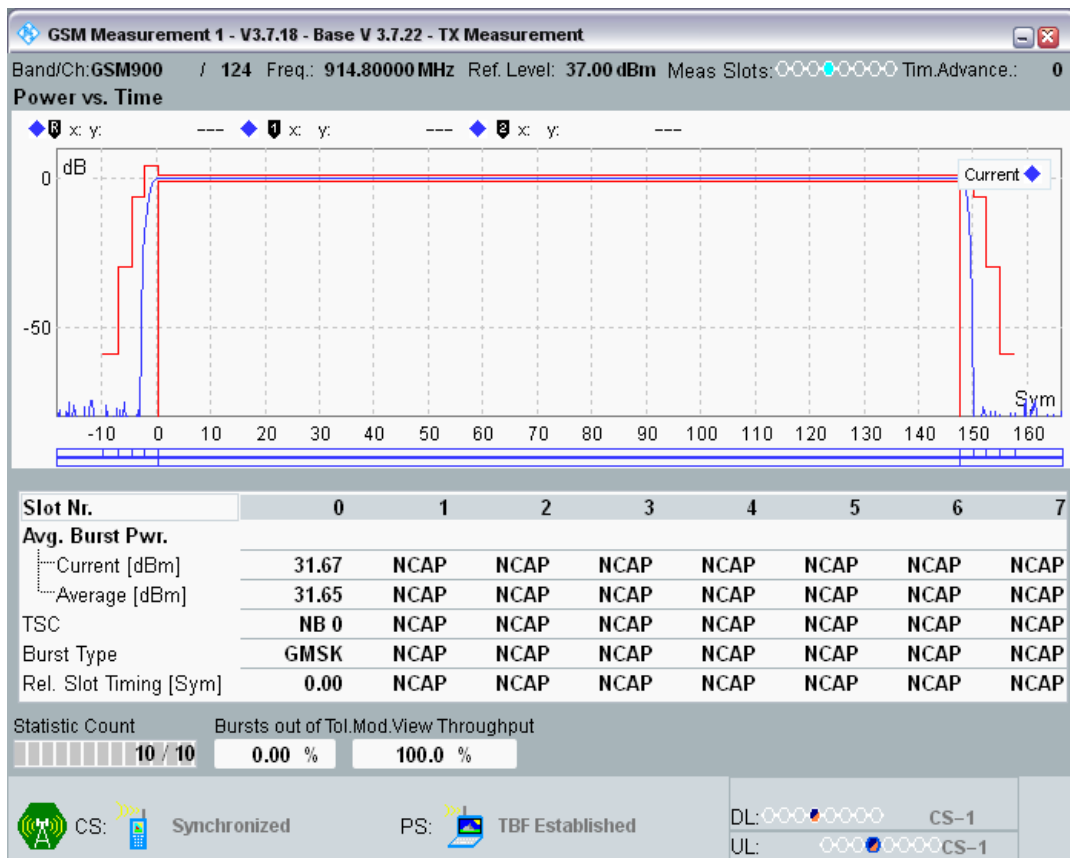


GPRS900 Channel=124 Gamma=5;5;5;5




GPRS900 Channel=124 Gamma=6;6;6;6

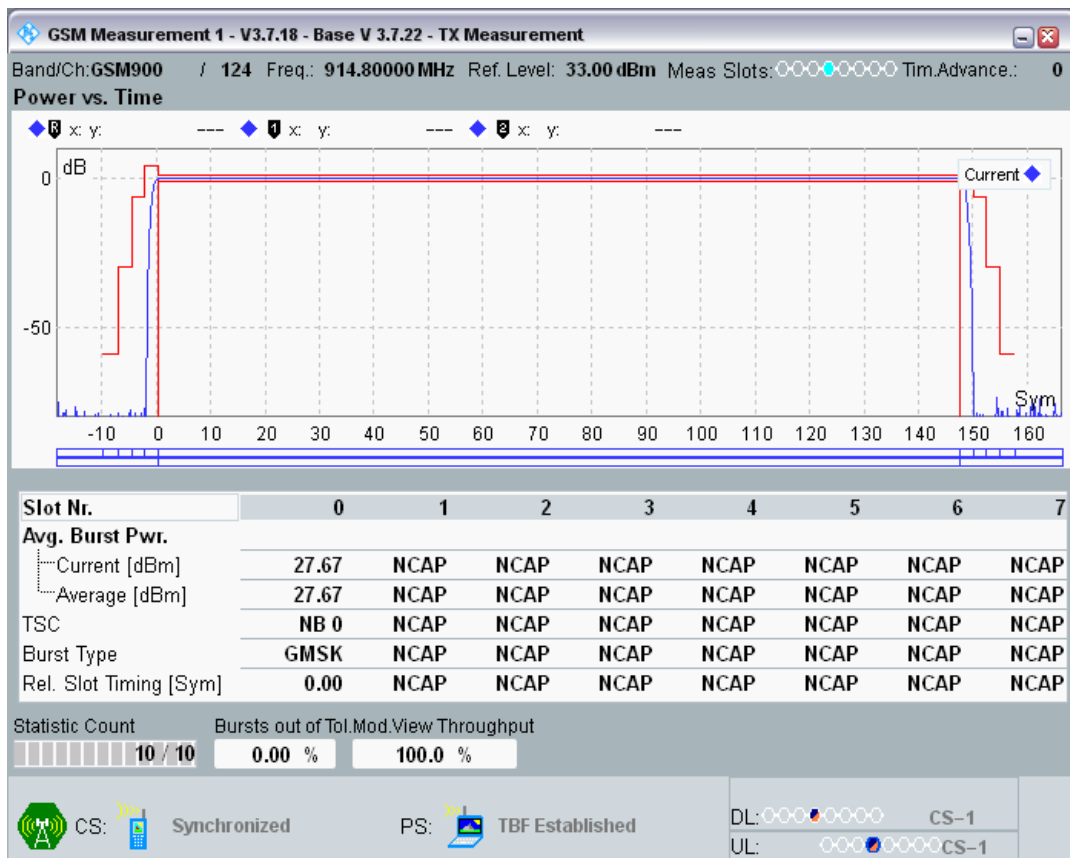

GPRS900 Channel=124 Gamma=7;7;7;7

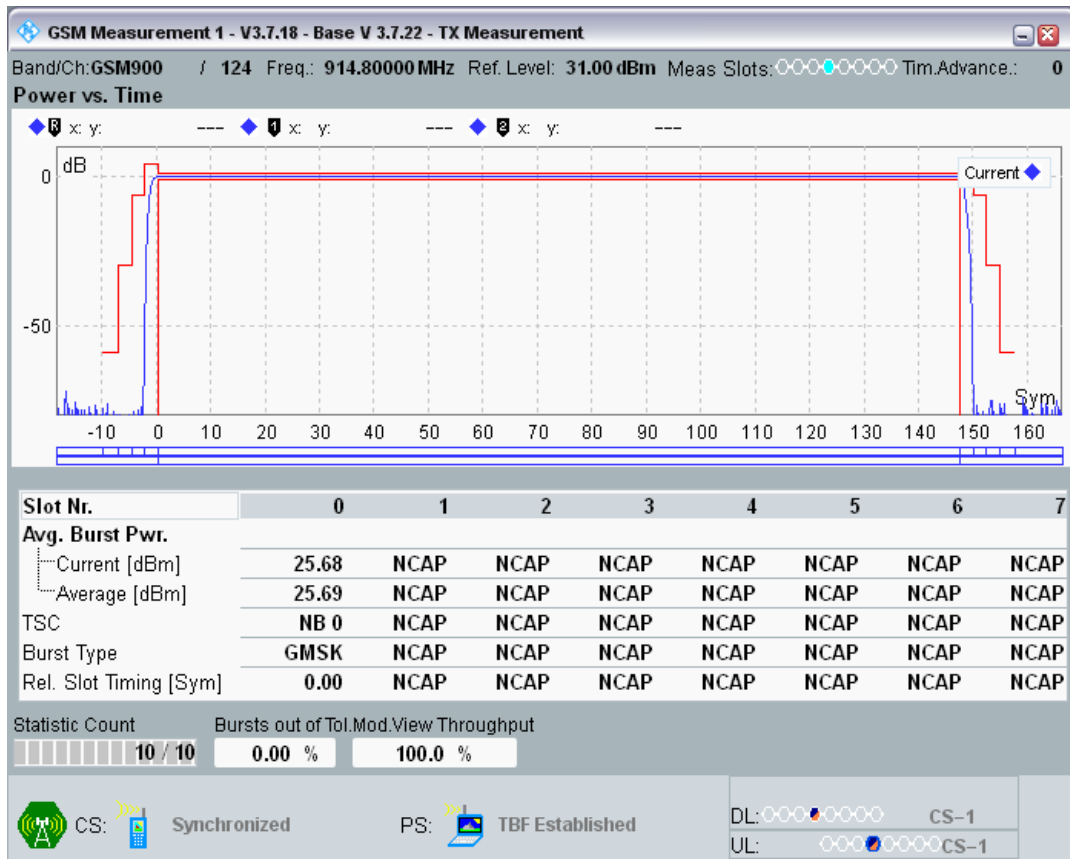


GPRS900 Channel=124 Gamma=8;8;8;8

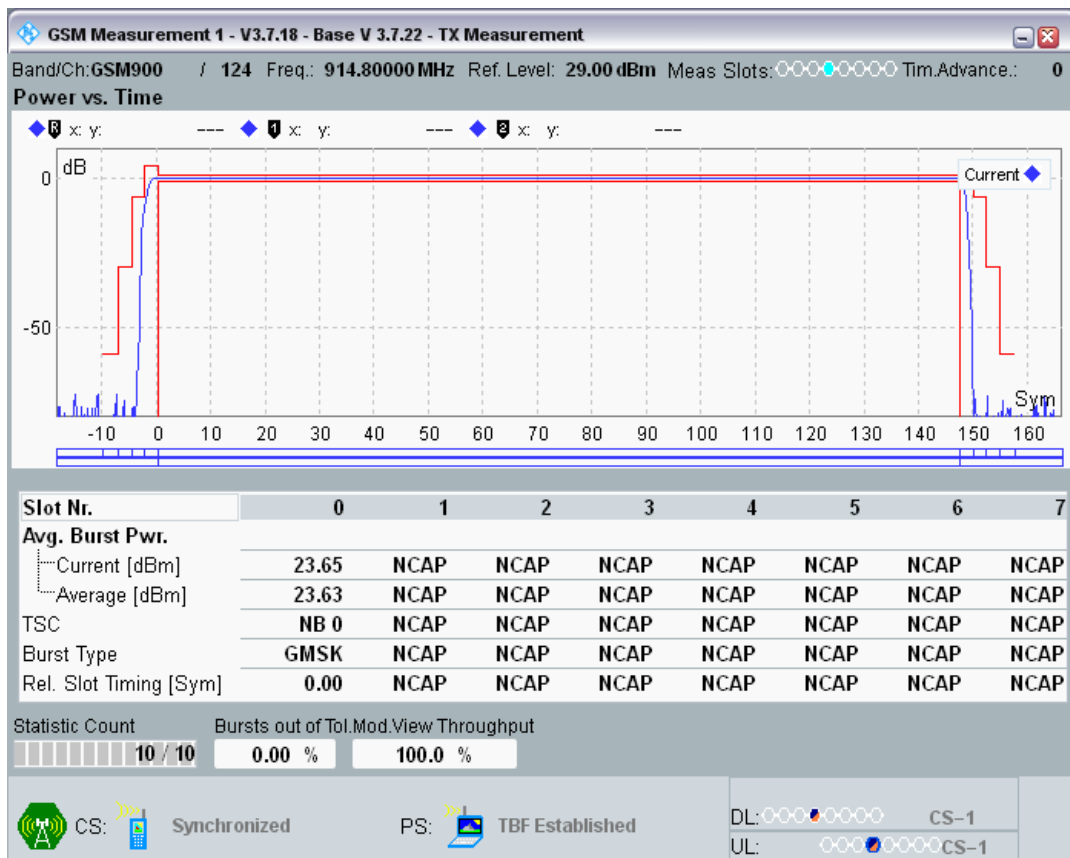


GPRS900 Channel=124 Gamma=9;9;9;9



GPRS900 Channel=124 Gamma=10;10;10;10

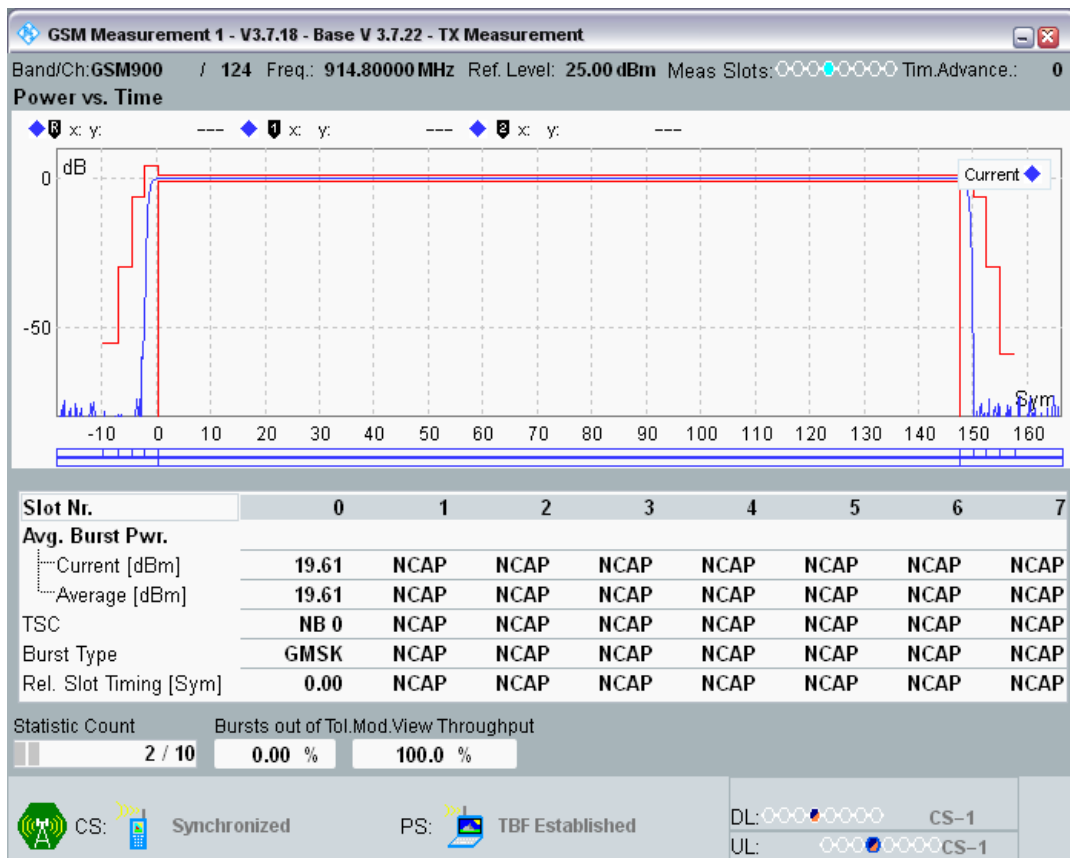

GPRS900 Channel=124 Gamma=11;11;11;11

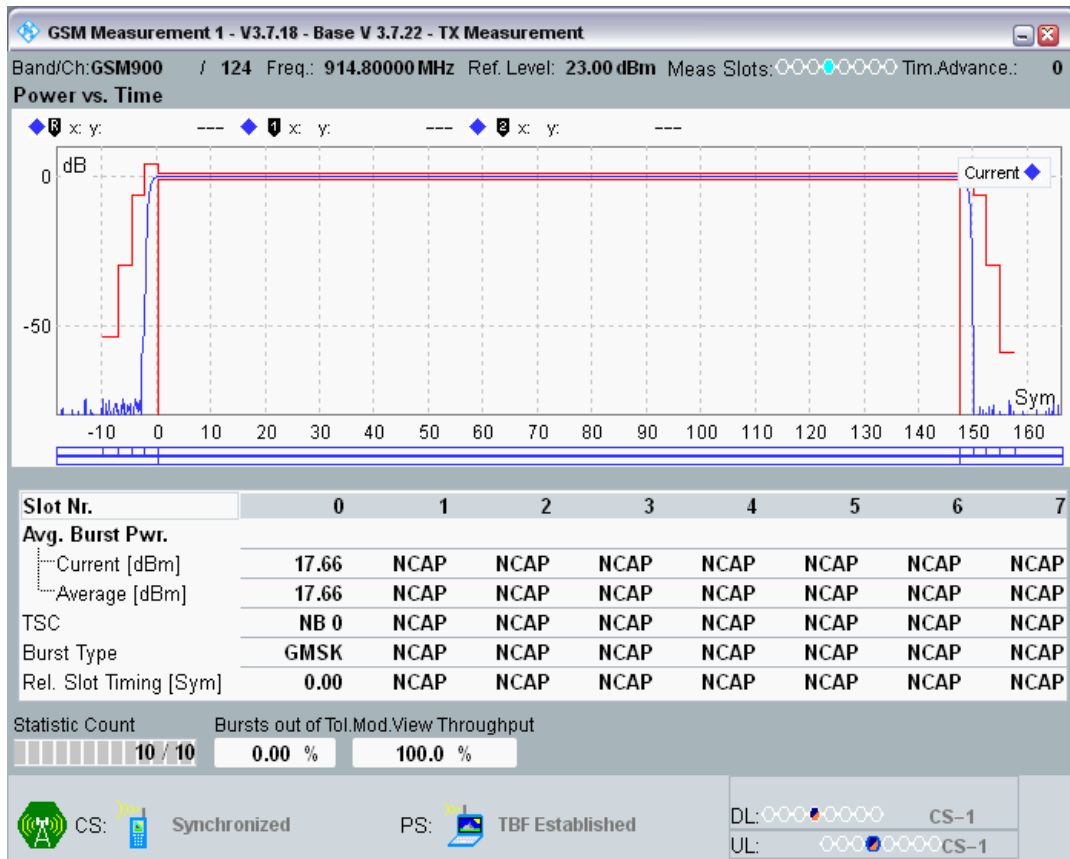

GPRS900 Channel=124 Gamma=12;12;12;12




GPRS900 Channel=124 Gamma=13;13;13;13




GPRS900 Channel=124 Gamma=14;14;14;14




GPRS900 Channel=124 Gamma=15;15;15;15

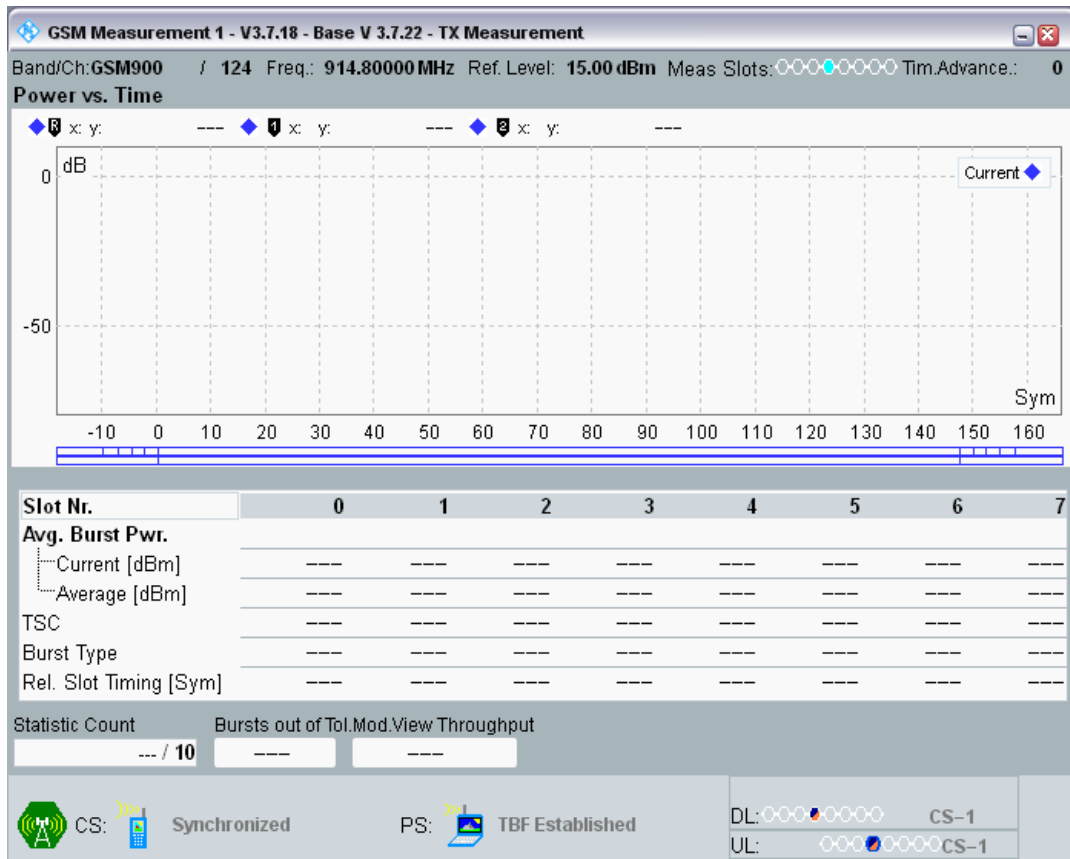

GPRS900 Channel=124 Gamma=16;16;16;16

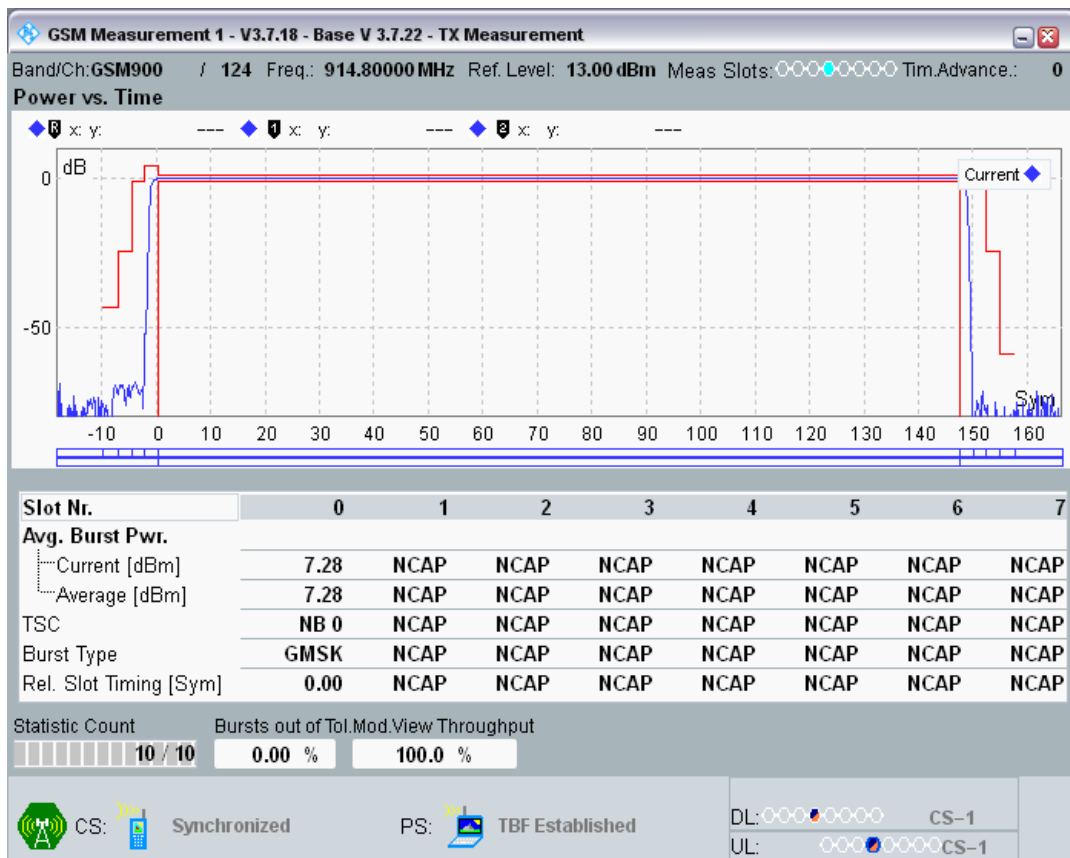

GPRS900 Channel=124 Gamma=17;17;17;17

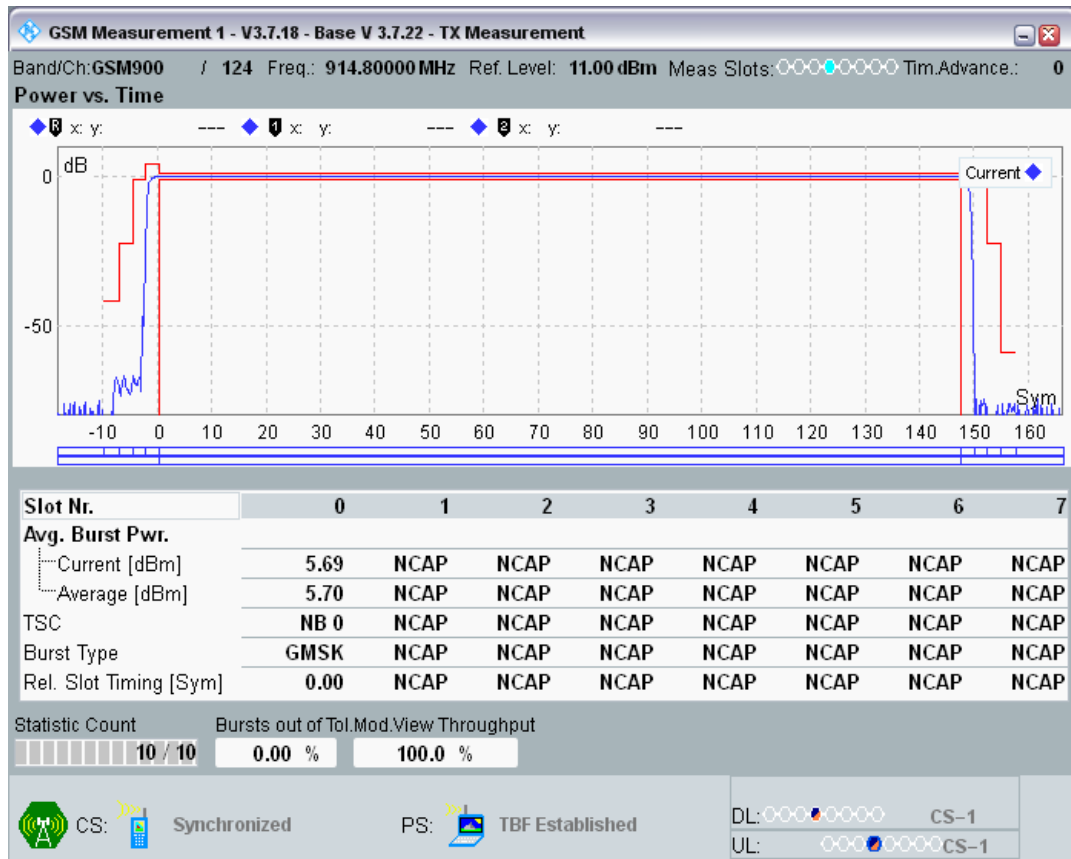

Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

| Band | Channel | Frequency (MHz) | Gamma | Offset (kHz) | Relative Result (dB) | Relative Limit (dB) | Absolute Result (dBm) | Absolute Limit (dBm) | Verdict |
|----------|---------|-----------------|---------|--------------|----------------------|---------------------|-----------------------|----------------------|---------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1800 | -76.92 | -60 | -56.09 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1600 | -77.38 | -60 | -56.56 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1400 | -77.22 | -60 | -56.40 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1200 | -75.74 | -60 | -54.92 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1000 | -75.60 | -60 | -54.78 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -800 | -72.77 | -60 | -51.94 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -600 | -70.81 | -60 | -49.98 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -400 | -65.90 | -60 | -45.08 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -250 | -41.63 | -33 | -20.80 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -200 | -35.00 | -30 | -14.17 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -100 | -7.79 | 0.5 | 13.04 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | -6.48 | 0.5 | 14.35 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 200 | -34.35 | -30 | -13.53 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 250 | -39.60 | -33 | -18.77 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 400 | -66.95 | -60 | -46.12 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 600 | -70.34 | -60 | -49.52 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 800 | -70.91 | -60 | -50.08 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1000 | -75.41 | -60 | -54.58 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1200 | -78.09 | -60 | -57.26 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1400 | -78.06 | -60 | -57.24 | -55 | PASS |

| | | | | | | | | | |
|----------|-----|--------|-------------|-------|--------|-----|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1600 | -78.64 | -60 | -57.81 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1800 | -78.02 | -60 | -57.20 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1800 | -75.59 | -60 | -80.64 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1600 | -75.23 | -60 | -80.28 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1400 | -73.47 | -60 | -78.52 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1200 | -72.37 | -60 | -77.42 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1000 | -71.16 | -60 | -76.22 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -800 | -70.56 | -60 | -75.62 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -600 | -68.40 | -60 | -73.46 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -400 | -64.88 | -60 | -69.94 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -250 | -41.65 | -33 | -46.71 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -200 | -36.58 | -30 | -41.64 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -100 | -10.54 | 0.5 | -15.60 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 100 | -8.52 | 0.5 | -13.58 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 200 | -37.48 | -30 | -42.53 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 250 | -41.32 | -33 | -46.37 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 400 | -63.86 | -60 | -68.92 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 600 | -68.44 | -60 | -73.50 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 800 | -70.32 | -60 | -75.38 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1000 | -72.43 | -60 | -77.49 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1200 | -73.31 | -60 | -78.37 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1400 | -73.35 | -60 | -78.40 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1600 | -73.89 | -60 | -78.95 | -55 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1800 | -74.86 | -60 | -79.91 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1800 | -79.54 | -60 | -56.11 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1600 | -80.25 | -60 | -56.82 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1400 | -79.64 | -60 | -56.21 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1200 | -77.83 | -60 | -54.39 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1000 | -76.74 | -60 | -53.31 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -800 | -74.99 | -60 | -51.56 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -600 | -73.16 | -60 | -49.72 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -400 | -68.32 | -60 | -44.88 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -250 | -40.34 | -33 | -16.91 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -200 | -37.32 | -30 | -13.88 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -100 | -9.22 | 0.5 | 14.21 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | -8.89 | 0.5 | 14.54 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 200 | -37.32 | -30 | -13.89 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 250 | -40.98 | -33 | -17.54 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 400 | -68.56 | -60 | -45.13 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 600 | -72.59 | -60 | -49.16 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 800 | -74.90 | -60 | -51.47 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1000 | -77.72 | -60 | -54.29 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1200 | -78.09 | -60 | -54.66 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1400 | -78.79 | -60 | -55.36 | -55 | PASS |

| | | | | | | | | | |
|----------|-----|--------|-------------|-------|--------|-----|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1600 | -80.17 | -60 | -56.74 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1800 | -80.39 | -60 | -56.95 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1800 | -73.50 | -60 | -78.91 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1600 | -73.66 | -60 | -79.07 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1400 | -72.59 | -60 | -78.00 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1200 | -71.75 | -60 | -77.16 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1000 | -70.59 | -60 | -76.00 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -800 | -68.97 | -60 | -74.37 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -600 | -66.83 | -60 | -72.24 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -400 | -63.45 | -60 | -68.86 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -250 | -40.81 | -33 | -46.21 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -200 | -36.76 | -30 | -42.17 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -100 | -7.75 | 0.5 | -13.16 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 100 | -9.19 | 0.5 | -14.60 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 200 | -36.12 | -30 | -41.53 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 250 | -41.63 | -33 | -47.04 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 400 | -63.60 | -60 | -69.01 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 600 | -67.10 | -60 | -72.51 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 800 | -69.59 | -60 | -75.00 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1000 | -70.87 | -60 | -76.28 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1200 | -71.43 | -60 | -76.83 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1400 | -73.29 | -60 | -78.69 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1600 | -73.31 | -60 | -78.71 | -55 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1800 | -74.48 | -60 | -79.89 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1800 | -81.53 | -60 | -56.55 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1600 | -80.67 | -60 | -55.69 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1400 | -80.13 | -60 | -55.15 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1200 | -78.74 | -60 | -53.76 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1000 | -77.93 | -60 | -52.94 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -800 | -75.74 | -60 | -50.76 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -600 | -73.35 | -60 | -48.37 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -400 | -68.60 | -60 | -43.62 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -250 | -41.51 | -33 | -16.53 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -200 | -38.18 | -30 | -13.20 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -100 | -9.31 | 0.5 | 15.67 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | -10.33 | 0.5 | 14.65 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 200 | -38.38 | -30 | -13.40 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 250 | -41.59 | -33 | -16.61 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 400 | -68.48 | -60 | -43.49 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 600 | -73.89 | -60 | -48.91 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 800 | -76.20 | -60 | -51.22 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1000 | -78.25 | -60 | -53.27 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1200 | -78.98 | -60 | -53.99 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1400 | -80.28 | -60 | -55.30 | -55 | PASS |


| | | | | | | | | | |
|----------|-----|--------|-------------|-------|--------|-----|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1600 | -81.53 | -60 | -56.55 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1800 | -81.14 | -60 | -56.16 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1800 | -73.64 | -60 | -79.16 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1600 | -72.99 | -60 | -78.51 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1400 | -72.99 | -60 | -78.51 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1200 | -70.37 | -60 | -75.89 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1000 | -70.63 | -60 | -76.15 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -800 | -70.01 | -60 | -75.53 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -600 | -66.37 | -60 | -71.89 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -400 | -63.53 | -60 | -69.05 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -250 | -40.77 | -33 | -46.29 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -200 | -36.19 | -30 | -41.71 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -100 | -7.88 | 0.5 | -13.40 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 100 | -8.06 | 0.5 | -13.58 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 200 | -35.96 | -30 | -41.48 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 250 | -41.78 | -33 | -47.30 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 400 | -63.65 | -60 | -69.17 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 600 | -67.38 | -60 | -72.90 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 800 | -68.78 | -60 | -74.30 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1000 | -71.05 | -60 | -76.57 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1200 | -72.66 | -60 | -78.18 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1400 | -72.47 | -60 | -77.99 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1600 | -72.76 | -60 | -78.28 | -55 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1800 | -74.06 | -60 | -79.57 | -55 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1800 | -81.63 | -60 | -55.64 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1600 | -81.48 | -60 | -55.50 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1400 | -80.77 | -60 | -54.79 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1200 | -79.29 | -60 | -53.31 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1000 | -78.15 | -60 | -52.17 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -800 | -77.94 | -60 | -51.96 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -600 | -75.92 | -60 | -49.94 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -400 | -70.34 | -60 | -44.36 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -250 | -40.92 | -33 | -14.94 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -200 | -36.90 | -30 | -10.91 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -100 | -8.81 | 0.5 | 17.18 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | -9.13 | 0.5 | 16.85 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 200 | -36.66 | -30 | -10.68 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 250 | -41.79 | -33 | -15.81 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 400 | -70.01 | -60 | -44.03 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 600 | -75.44 | -60 | -49.46 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 800 | -77.79 | -60 | -51.81 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1000 | -78.37 | -60 | -52.38 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1200 | -80.38 | -60 | -54.40 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1400 | -79.78 | -60 | -53.80 | -51 | PASS |

| | | | | | | | | | |
|---------|-----|-------|-------------|-------|--------|-----|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1600 | -81.18 | -60 | -55.20 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1800 | -82.06 | -60 | -56.08 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1800 | -74.41 | -60 | -77.36 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1600 | -74.26 | -60 | -77.21 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1400 | -72.78 | -60 | -75.72 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1200 | -71.98 | -60 | -74.92 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1000 | -71.17 | -60 | -74.12 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -800 | -70.24 | -60 | -73.19 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -600 | -68.33 | -60 | -71.27 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -400 | -65.52 | -60 | -68.46 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -250 | -41.07 | -33 | -44.02 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -200 | -36.60 | -30 | -39.54 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -100 | -7.47 | 0.5 | -10.42 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 100 | -9.09 | 0.5 | -12.04 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 200 | -36.67 | -30 | -39.62 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 250 | -40.84 | -33 | -43.79 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 400 | -64.75 | -60 | -67.70 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 600 | -68.38 | -60 | -71.33 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 800 | -70.43 | -60 | -73.38 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1000 | -72.12 | -60 | -75.07 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1200 | -73.41 | -60 | -76.35 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1400 | -73.11 | -60 | -76.05 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1600 | -73.92 | -60 | -76.87 | -51 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1800 | -74.55 | -60 | -77.50 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1800 | -81.56 | -60 | -55.37 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1600 | -82.44 | -60 | -56.25 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1400 | -80.74 | -60 | -54.54 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1200 | -80.69 | -60 | -54.50 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1000 | -79.30 | -60 | -53.10 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -800 | -78.07 | -60 | -51.88 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -600 | -76.25 | -60 | -50.06 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -400 | -71.36 | -60 | -45.16 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -250 | -41.95 | -33 | -15.75 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -200 | -37.06 | -30 | -10.87 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -100 | -9.56 | 0.5 | 16.63 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | -8.80 | 0.5 | 17.39 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 200 | -37.59 | -30 | -11.40 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 250 | -41.91 | -33 | -15.72 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 400 | -72.20 | -60 | -46.01 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 600 | -75.66 | -60 | -49.47 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 800 | -78.09 | -60 | -51.90 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1000 | -78.82 | -60 | -52.63 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1200 | -80.15 | -60 | -53.96 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1400 | -81.25 | -60 | -55.06 | -51 | PASS |


| | | | | | | | | | |
|---------|-----|-------|-------------|-------|--------|-----|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1600 | -81.76 | -60 | -55.57 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1800 | -82.11 | -60 | -55.91 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1800 | -75.96 | -60 | -79.12 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1600 | -74.47 | -60 | -77.63 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1400 | -72.98 | -60 | -76.14 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1200 | -72.52 | -60 | -75.68 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1000 | -71.52 | -60 | -74.68 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -800 | -69.64 | -60 | -72.80 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -600 | -68.22 | -60 | -71.38 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -400 | -64.65 | -60 | -67.81 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -250 | -41.45 | -33 | -44.61 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -200 | -36.43 | -30 | -39.59 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -100 | -8.74 | 0.5 | -11.90 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 100 | -8.09 | 0.5 | -11.25 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 200 | -36.55 | -30 | -39.71 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 250 | -41.87 | -33 | -45.02 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 400 | -65.98 | -60 | -69.14 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 600 | -68.83 | -60 | -71.99 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 800 | -71.27 | -60 | -74.43 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1000 | -72.03 | -60 | -75.19 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1200 | -73.09 | -60 | -76.25 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1400 | -73.84 | -60 | -77.00 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1600 | -75.15 | -60 | -78.31 | -51 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1800 | -76.06 | -60 | -79.22 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1800 | -80.90 | -60 | -55.58 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1600 | -81.40 | -60 | -56.08 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1400 | -80.26 | -60 | -54.93 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1200 | -80.08 | -60 | -54.76 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1000 | -78.95 | -60 | -53.63 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -800 | -78.00 | -60 | -52.68 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -600 | -75.71 | -60 | -50.39 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -400 | -70.22 | -60 | -44.90 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -250 | -40.60 | -33 | -15.28 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -200 | -36.56 | -30 | -11.24 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -100 | -8.35 | 0.5 | 16.97 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | -8.66 | 0.5 | 16.66 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 200 | -36.56 | -30 | -11.23 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 250 | -40.80 | -33 | -15.48 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 400 | -70.43 | -60 | -45.11 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 600 | -76.19 | -60 | -50.87 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 800 | -78.47 | -60 | -53.15 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1000 | -78.41 | -60 | -53.09 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1200 | -80.23 | -60 | -54.91 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1400 | -80.20 | -60 | -54.87 | -51 | PASS |

| | | | | | | | | | |
|---------|-----|-------|-------------|-------|--------|-----|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1600 | -81.68 | -60 | -56.36 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1800 | -80.24 | -60 | -54.92 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1800 | -75.75 | -60 | -78.21 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1600 | -74.53 | -60 | -76.99 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1400 | -73.66 | -60 | -76.12 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1200 | -72.91 | -60 | -75.36 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1000 | -71.64 | -60 | -74.09 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -800 | -70.99 | -60 | -73.44 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -600 | -68.01 | -60 | -70.47 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -400 | -65.84 | -60 | -68.30 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -250 | -40.90 | -33 | -43.36 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -200 | -36.30 | -30 | -38.75 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -100 | -9.13 | 0.5 | -11.59 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 100 | -7.91 | 0.5 | -10.37 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 200 | -35.68 | -30 | -38.13 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 250 | -42.26 | -33 | -44.71 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 400 | -65.93 | -60 | -68.39 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 600 | -68.13 | -60 | -70.59 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 800 | -71.06 | -60 | -73.51 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1000 | -72.14 | -60 | -74.60 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1200 | -73.91 | -60 | -76.36 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1400 | -73.96 | -60 | -76.42 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1600 | -75.32 | -60 | -77.78 | -51 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1800 | -75.26 | -60 | -77.72 | -51 | PASS |


GPRS1800 Channel=512 Gamma=3;3;3;3

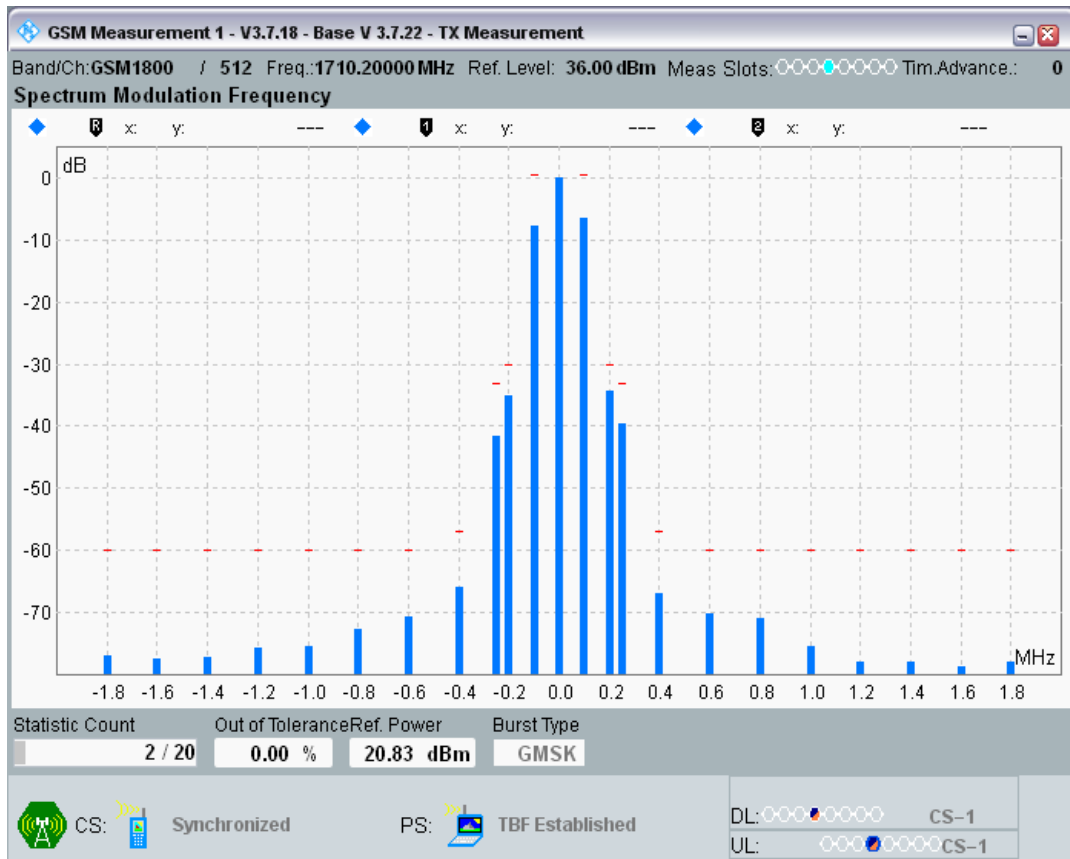


GPRS1800 Channel=512 Gamma=18;18;18;18

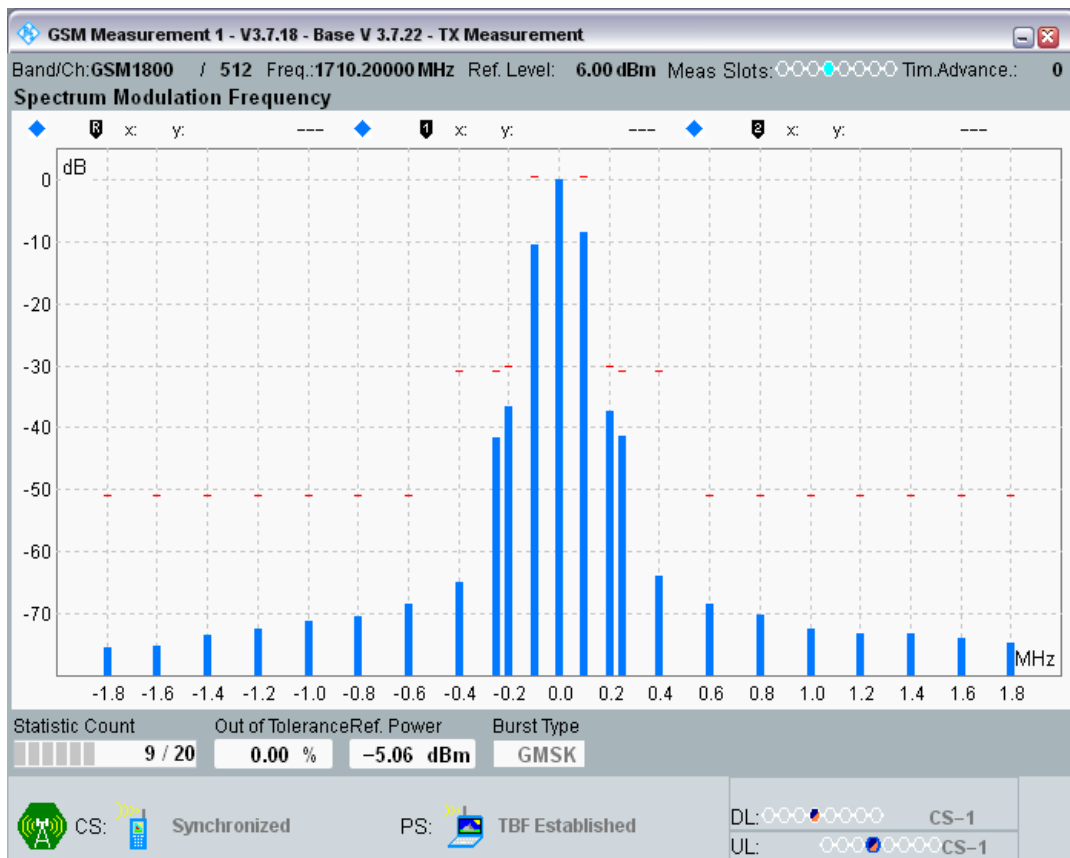


GPRS1800 Channel=698 Gamma=3;3;3;3

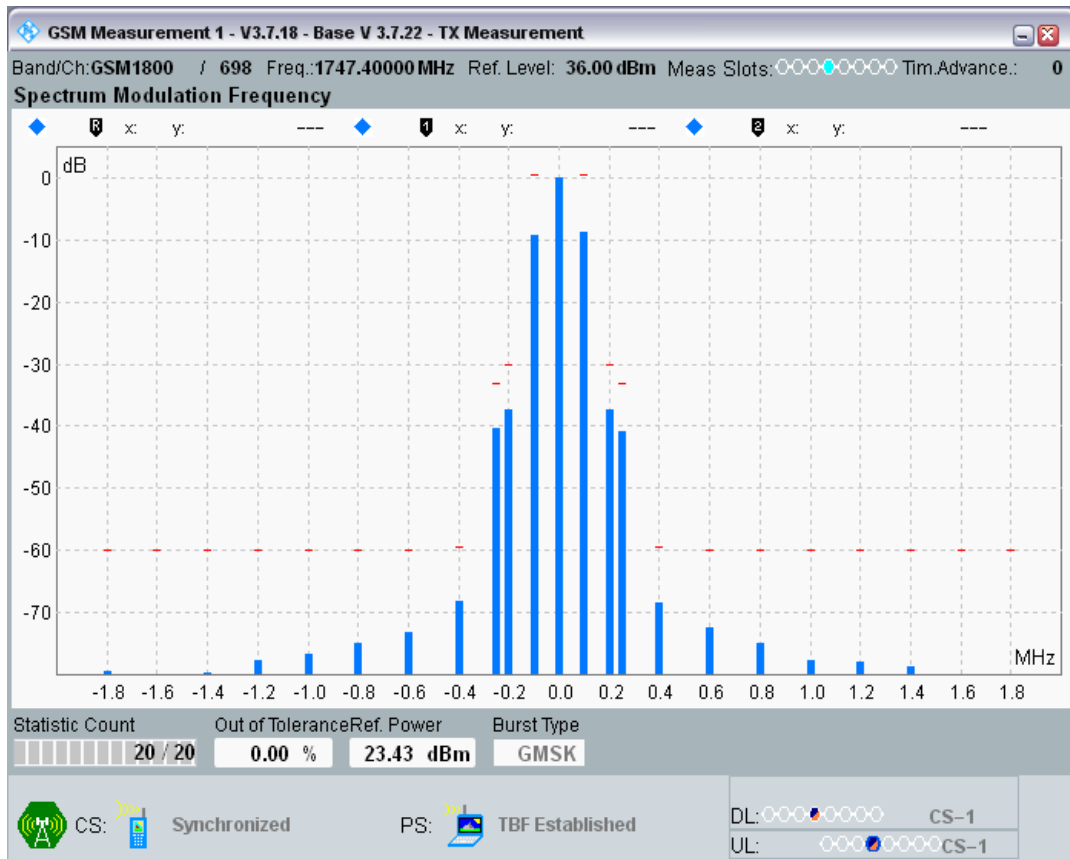


GPRS1800 Channel=698 Gamma=18;18;18;18

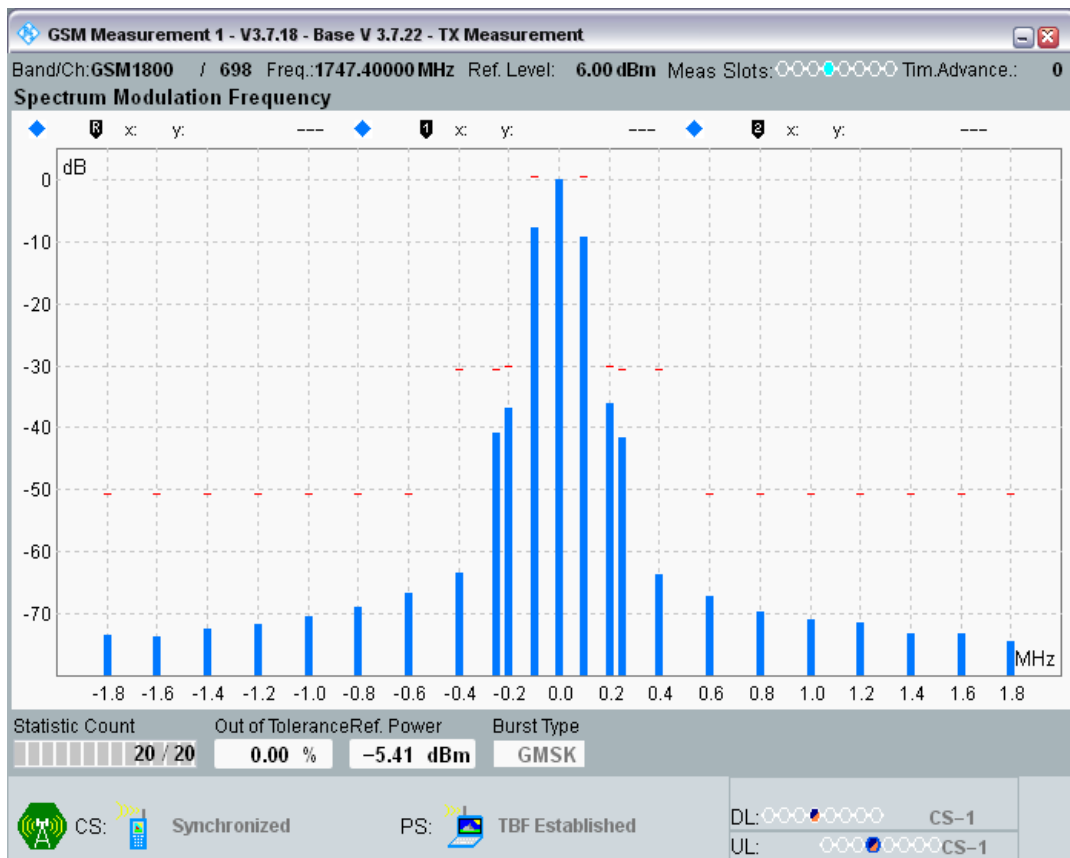


GPRS1800 Channel=885 Gamma=3;3;3;3

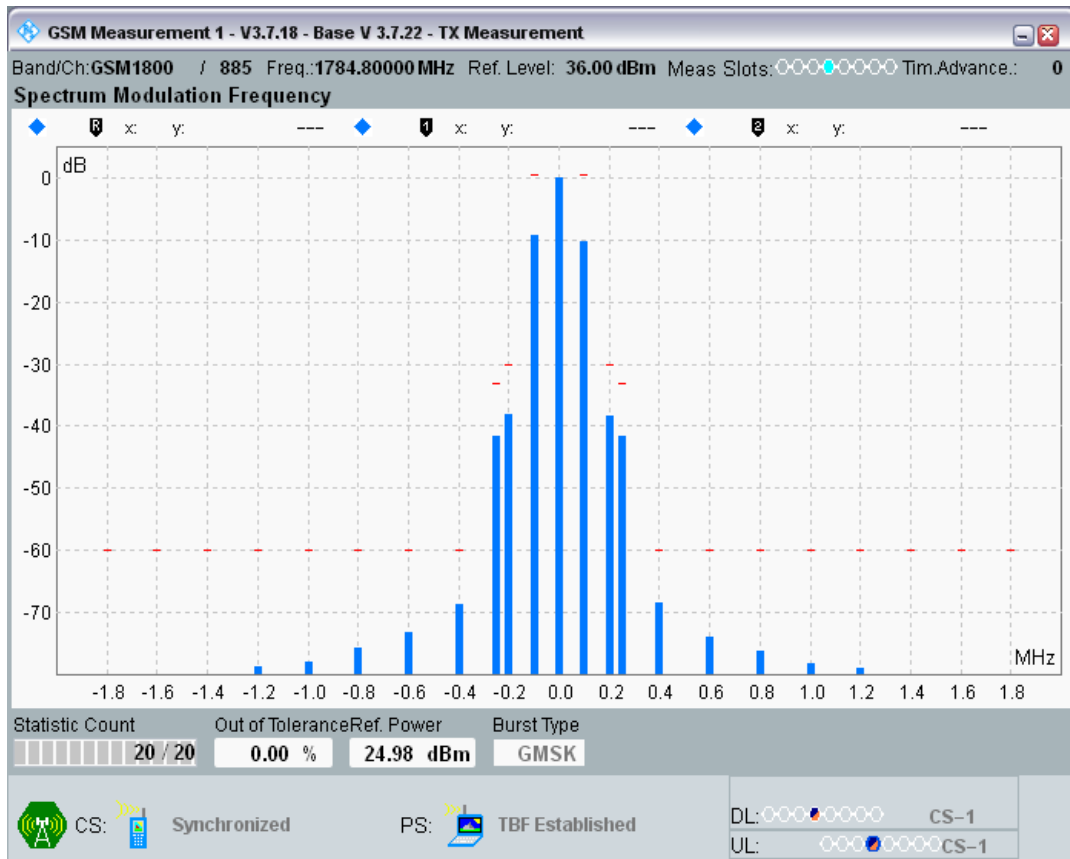


GPRS1800 Channel=885 Gamma=18;18;18;18

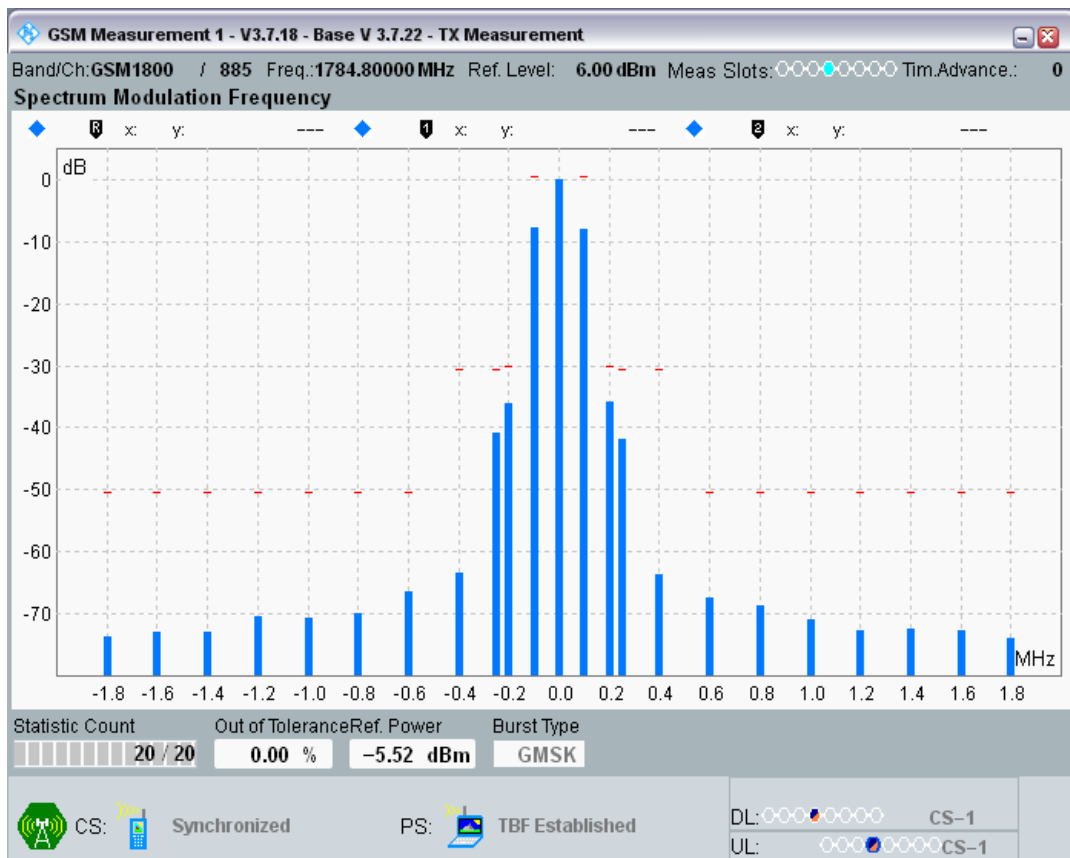


GPRS900 Channel=975 Gamma=3;3;3;3

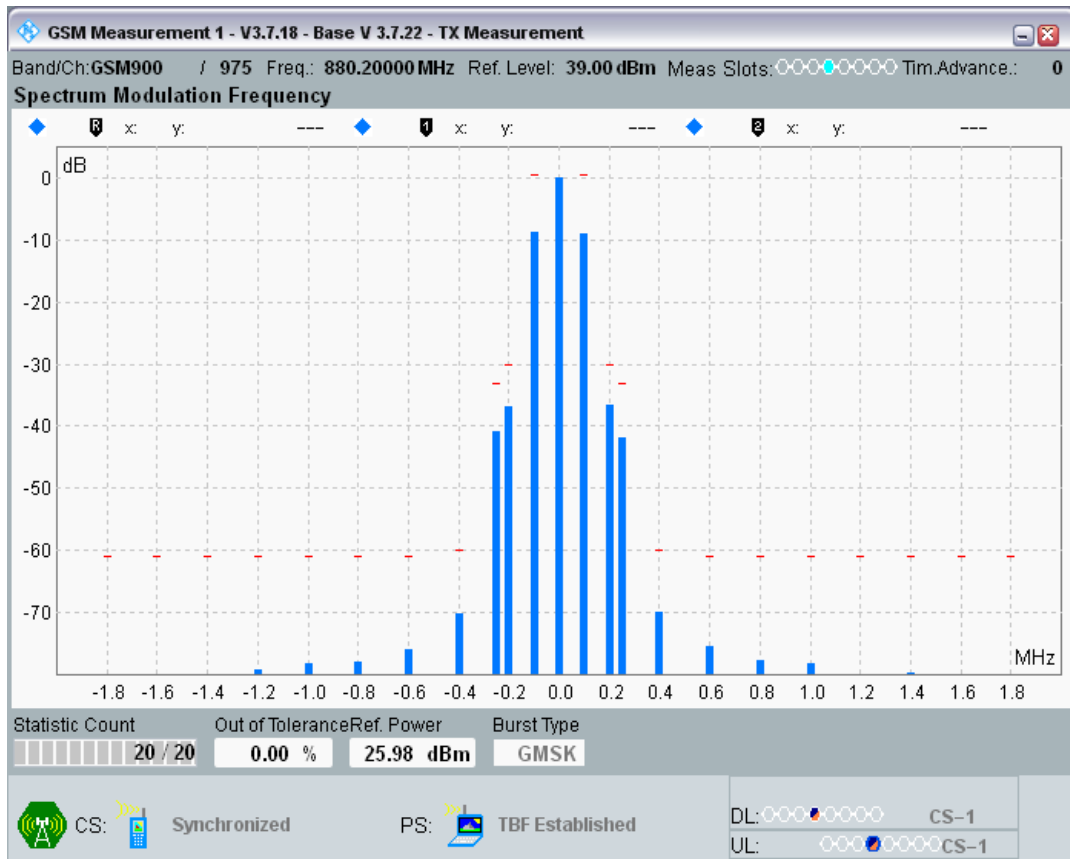


GPRS900 Channel=975 Gamma=17;17;17;17

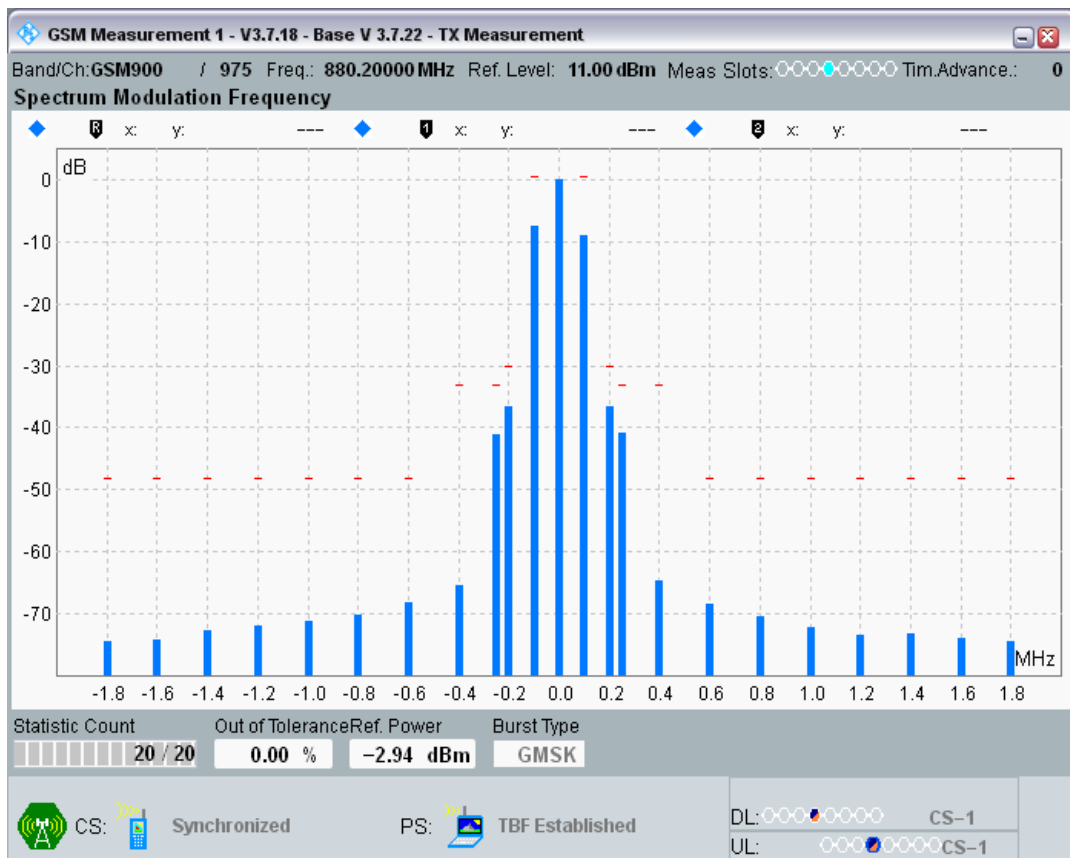


GPRS900 Channel=38 Gamma=3;3;3;3

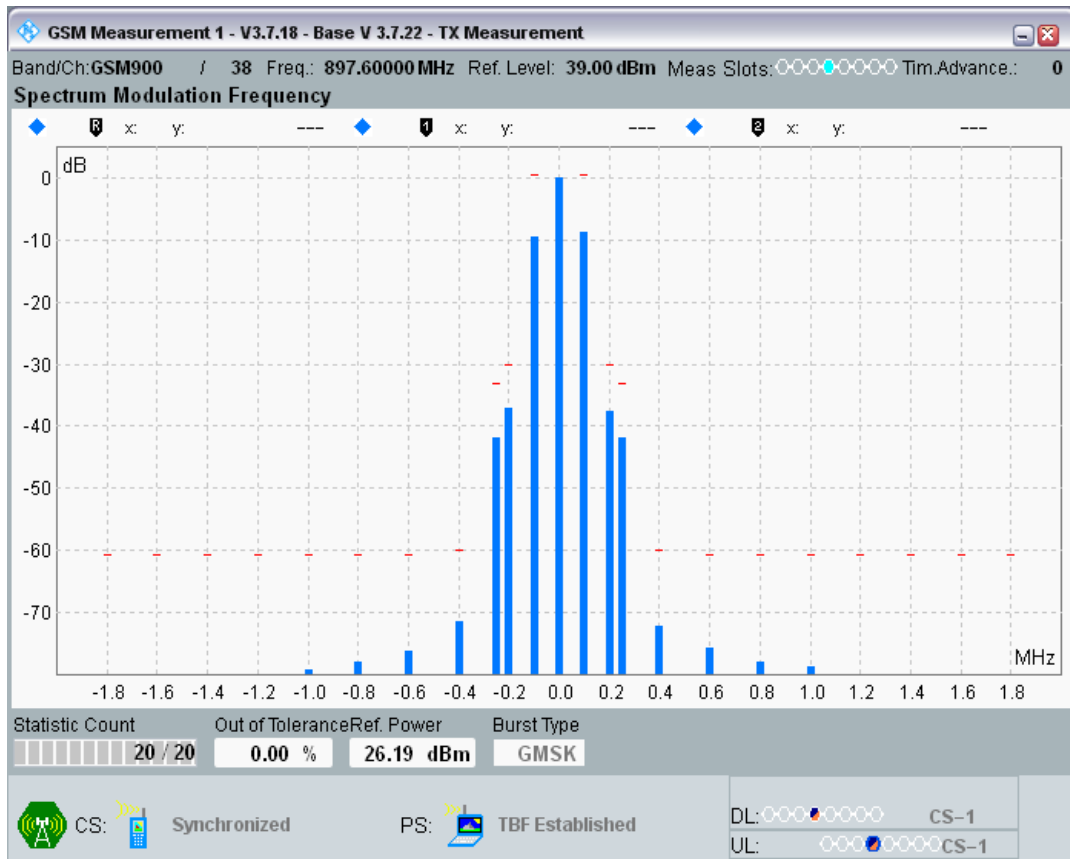


GPRS900 Channel=38 Gamma=17;17;17;17

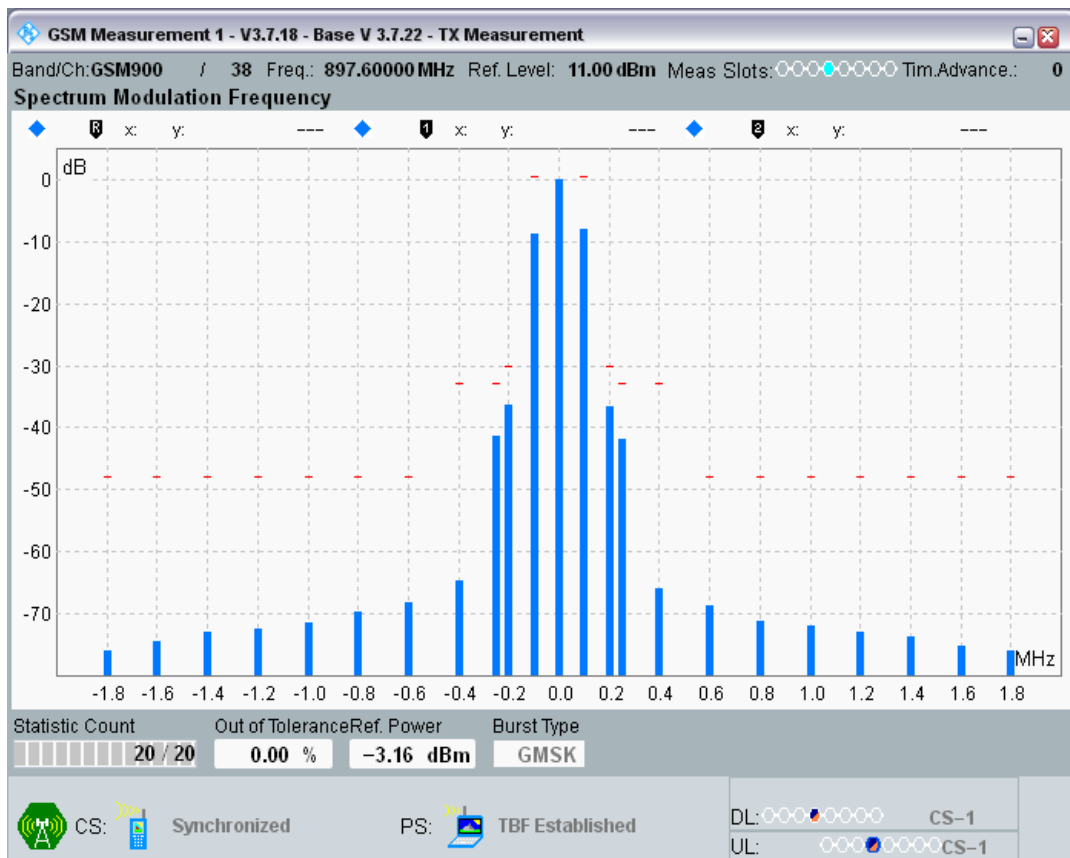

GPRS900 Channel=124 Gamma=3;3;3;3

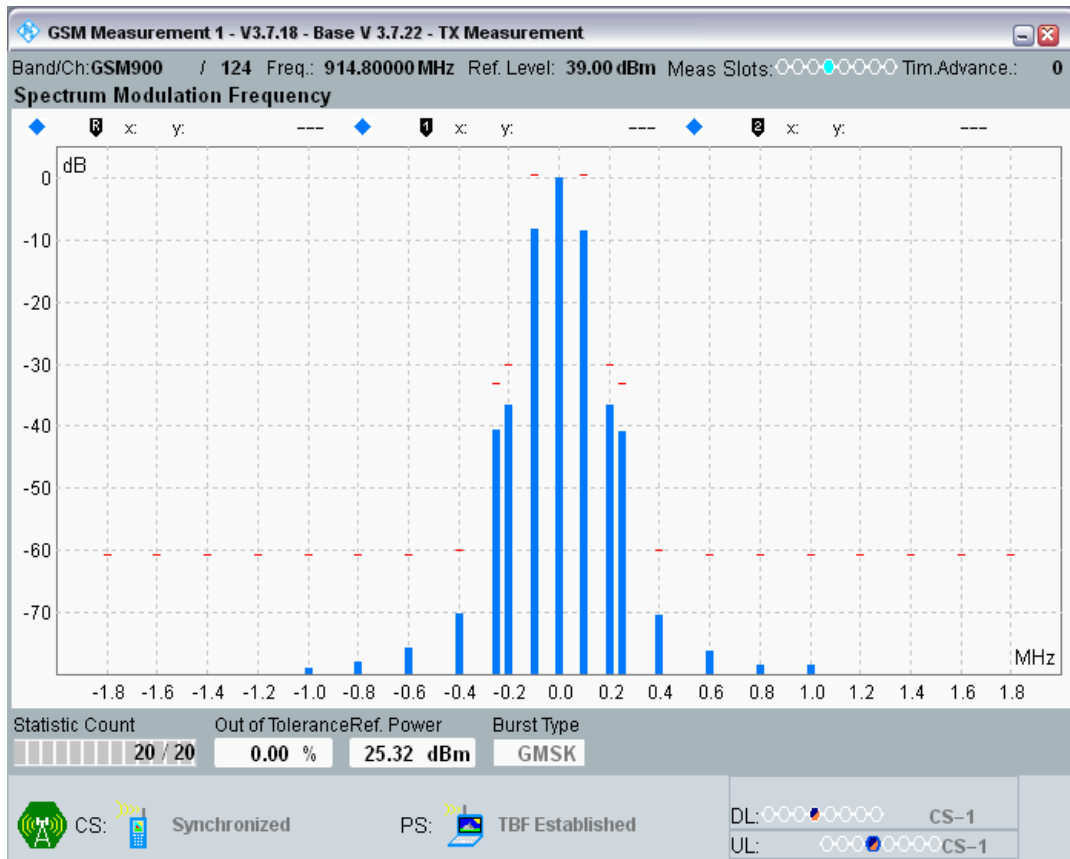

GPRS900 Channel=124 Gamma=17;17;17;17

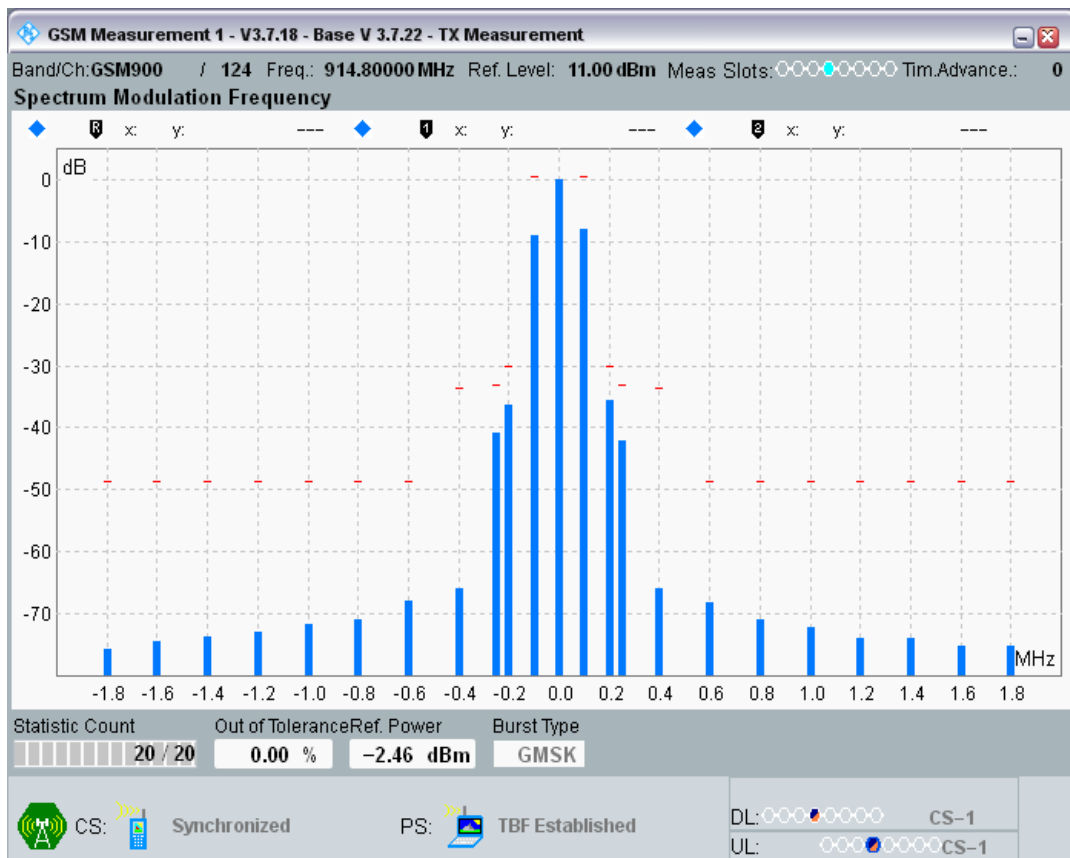

Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration

| Band | Channel | Frequency (MHz) | Gamma | Offset (kHz) | Result (dBm) | Limit (dBm) | Verdict |
|----------|---------|-----------------|-------------|--------------|--------------|-------------|---------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | Ref Power | 30.91 | | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1800 | -46.49 | -26.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -1200 | -42.24 | -23.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -600 | -32.87 | -23.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | -400 | -24.93 | -21.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 400 | -23.88 | -21.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 600 | -34.34 | -23.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1200 | -42.76 | -23.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 1800 | -46.57 | -26.09 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | Ref Power | 2.40 | | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1800 | -54.61 | -36 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -1200 | -50.96 | -32 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -600 | -45.35 | -26 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | -400 | -41.64 | -23 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 400 | -39.92 | -23 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 600 | -43.50 | -26 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1200 | -50.65 | -32 | PASS |
| GPRS1800 | 512 | 1710.2 | 18;18;18;18 | 1800 | -54.06 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | Ref Power | 31.32 | | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1800 | -46.00 | -25.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -1200 | -43.32 | -22.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -600 | -32.28 | -22.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | -400 | -25.01 | -20.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 400 | -22.29 | -20.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 600 | -32.68 | -22.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1200 | -42.28 | -22.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 1800 | -46.46 | -25.68 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | Ref Power | 2.96 | | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1800 | -53.89 | -36 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -1200 | -50.13 | -32 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -600 | -45.12 | -26 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | -400 | -41.01 | -23 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 400 | -38.95 | -23 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 600 | -42.80 | -26 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1200 | -49.81 | -32 | PASS |
| GPRS1800 | 698 | 1747.4 | 18;18;18;18 | 1800 | -53.54 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | Ref Power | 31.98 | | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1800 | -43.22 | -25.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -1200 | -41.13 | -22.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -600 | -32.28 | -22.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | -400 | -23.28 | -20.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 400 | -20.17 | -20.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 600 | -31.85 | -22.02 | PASS |


| | | | | | | | |
|----------|-----|--------|-------------|-----------|--------|--------|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1200 | -39.97 | -22.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 1800 | -43.75 | -25.02 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | Ref Power | 3.26 | | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1800 | -53.52 | -36 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -1200 | -50.05 | -32 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -600 | -44.84 | -26 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | -400 | -40.70 | -23 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 400 | -38.84 | -23 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 600 | -42.50 | -26 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1200 | -49.58 | -32 | PASS |
| GPRS1800 | 885 | 1784.8 | 18;18;18;18 | 1800 | -53.09 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | Ref Power | 34.05 | | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1800 | -44.71 | -24 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -1200 | -40.96 | -21 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -600 | -30.47 | -21 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | -400 | -22.34 | -17.95 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 400 | -23.72 | -17.95 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 600 | -28.06 | -21 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1200 | -40.52 | -21 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 1800 | -44.91 | -24 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | Ref Power | 5.60 | | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1800 | -66.86 | -36 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -1200 | -62.33 | -32 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -600 | -52.26 | -26 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | -400 | -40.03 | -23 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 400 | -36.22 | -23 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 600 | -46.13 | -26 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1200 | -63.69 | -32 | PASS |
| GPRS900 | 975 | 880.2 | 17;17;17;17 | 1800 | -67.29 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | Ref Power | 33.73 | | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1800 | -43.00 | -24 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -1200 | -40.67 | -21 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -600 | -30.68 | -21 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | -400 | -22.79 | -18.27 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 400 | -24.87 | -18.27 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 600 | -28.19 | -21 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1200 | -40.27 | -21 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 1800 | -44.79 | -24 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | Ref Power | 4.98 | | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1800 | -67.01 | -36 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -1200 | -63.49 | -32 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -600 | -52.85 | -26 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | -400 | -40.61 | -23 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 400 | -37.01 | -23 | PASS |

| | | | | | | | |
|---------|-----|-------|-------------|-----------|--------|-------|------|
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 600 | -46.91 | -26 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1200 | -63.75 | -32 | PASS |
| GPRS900 | 38 | 897.6 | 17;17;17;17 | 1800 | -67.41 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | Ref Power | 33.70 | | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1800 | -43.13 | -24 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -1200 | -42.96 | -21 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -600 | -30.57 | -21 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | -400 | -22.92 | -18.3 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 400 | -24.65 | -18.3 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 600 | -27.57 | -21 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1200 | -39.51 | -21 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 1800 | -42.94 | -24 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | Ref Power | 5.81 | | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1800 | -66.71 | -36 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -1200 | -61.39 | -32 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -600 | -50.73 | -26 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | -400 | -39.08 | -23 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 400 | -36.13 | -23 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 600 | -45.81 | -26 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1200 | -61.05 | -32 | PASS |
| GPRS900 | 124 | 914.8 | 17;17;17;17 | 1800 | -67.55 | -36 | PASS |

GPRS1800 Channel=512 Gamma=3;3;3;3




GPRS1800 Channel=512 Gamma=18;18;18;18

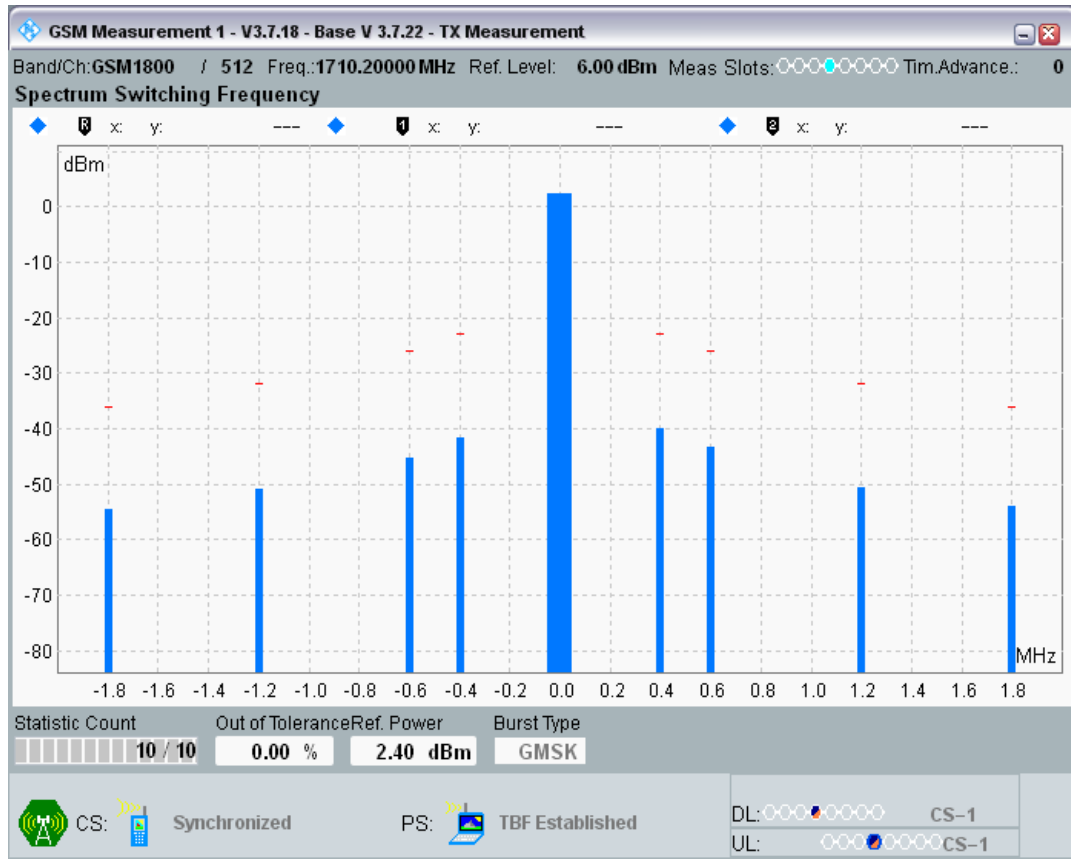


GPRS1800 Channel=698 Gamma=3;3;3;3




GPRS1800 Channel=698 Gamma=18;18;18;18

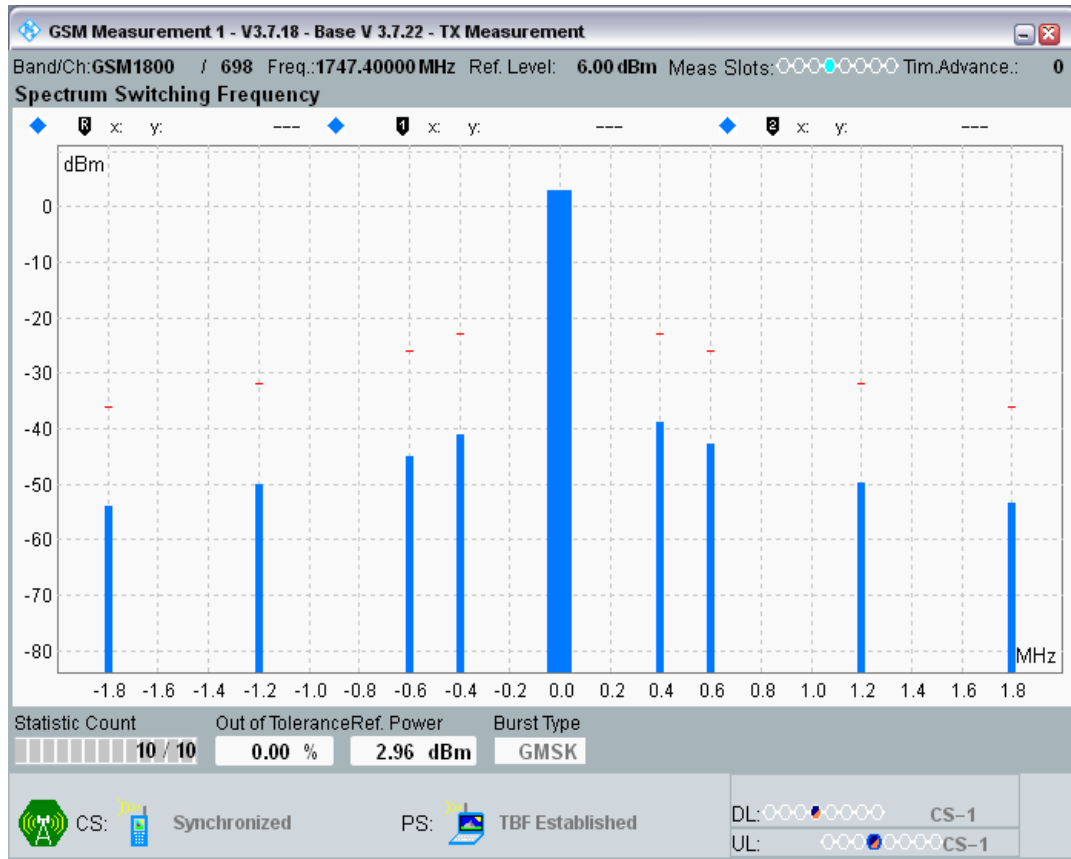


GPRS1800 Channel=885 Gamma=3;3;3;3

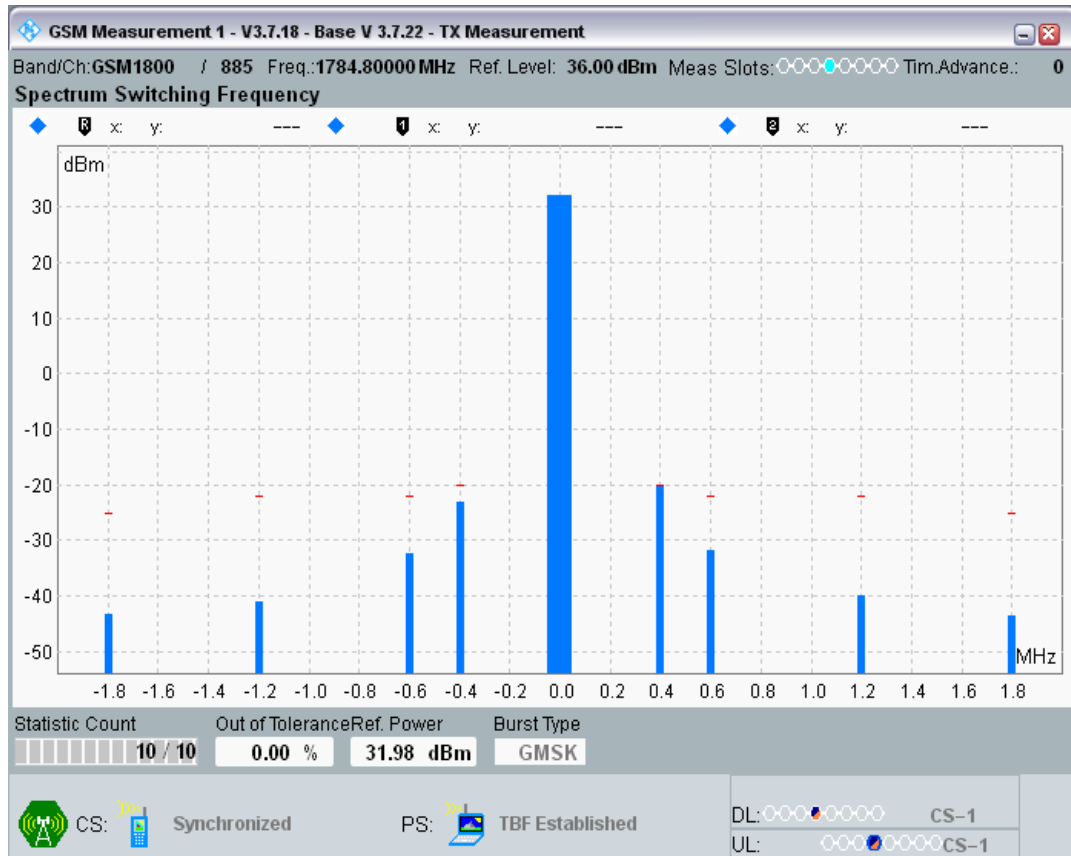


GPRS1800 Channel=885 Gamma=18;18;18;18

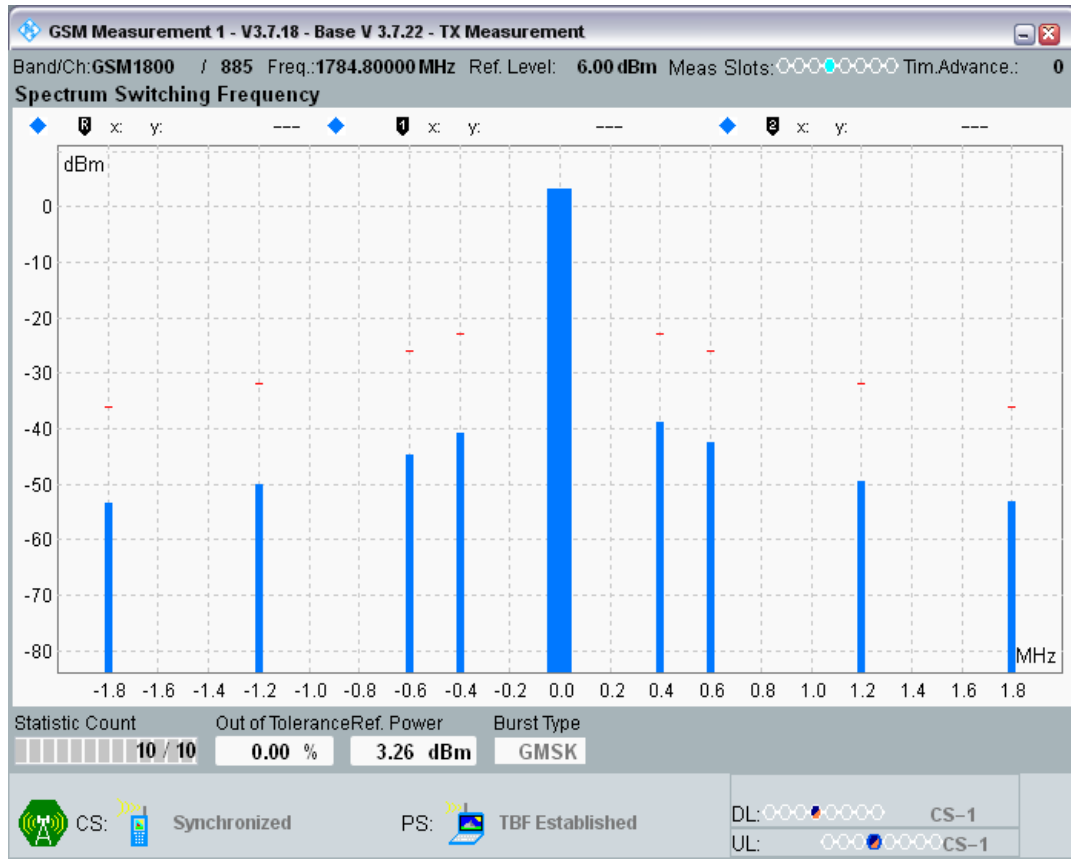

GPRS900 Channel=975 Gamma=3;3;3;3

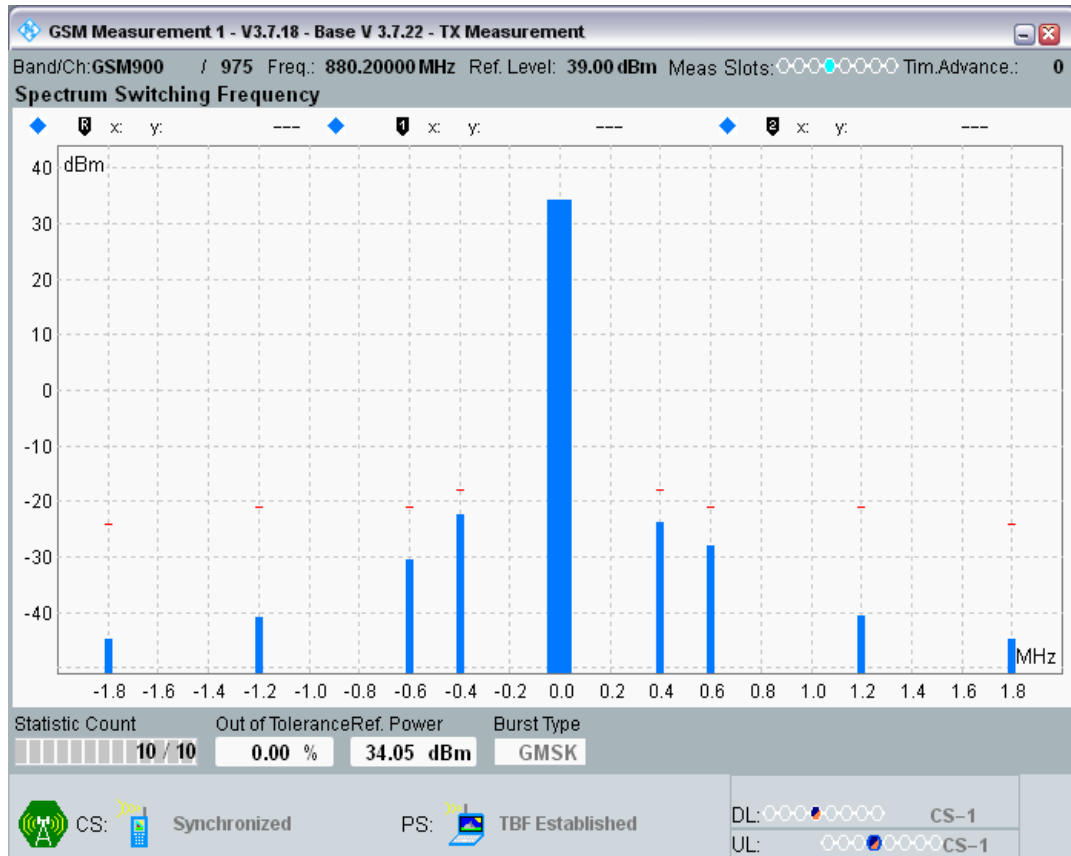


GPRS900 Channel=975 Gamma=17;17;17;17

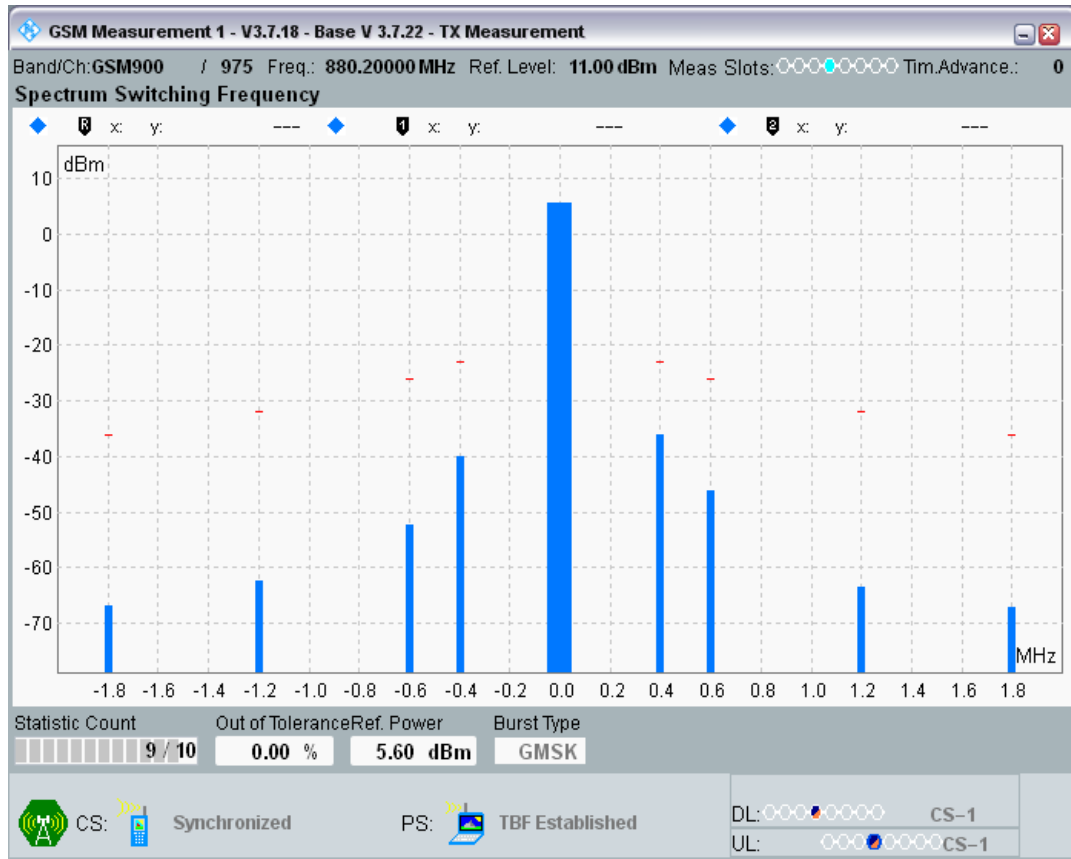


GPRS900 Channel=38 Gamma=3;3;3;3




GPRS900 Channel=38 Gamma=17;17;17;17

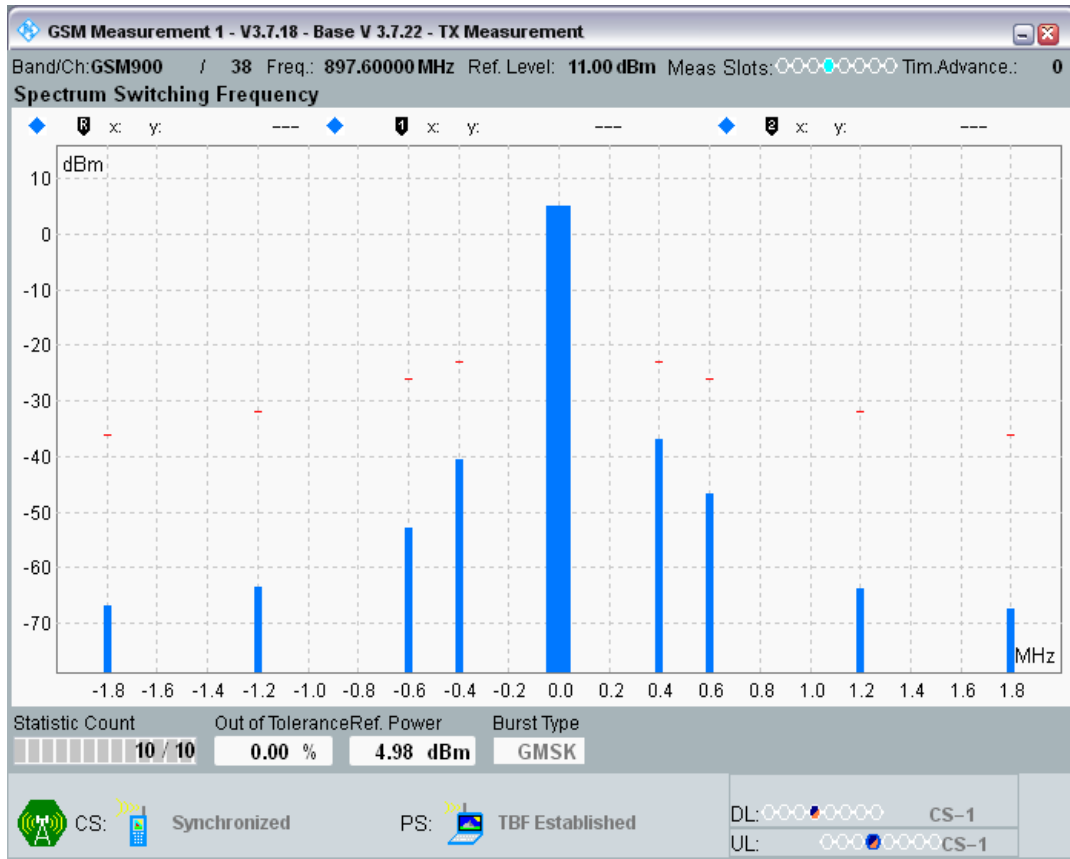

GPRS900 Channel=124 Gamma=3;3;3;3

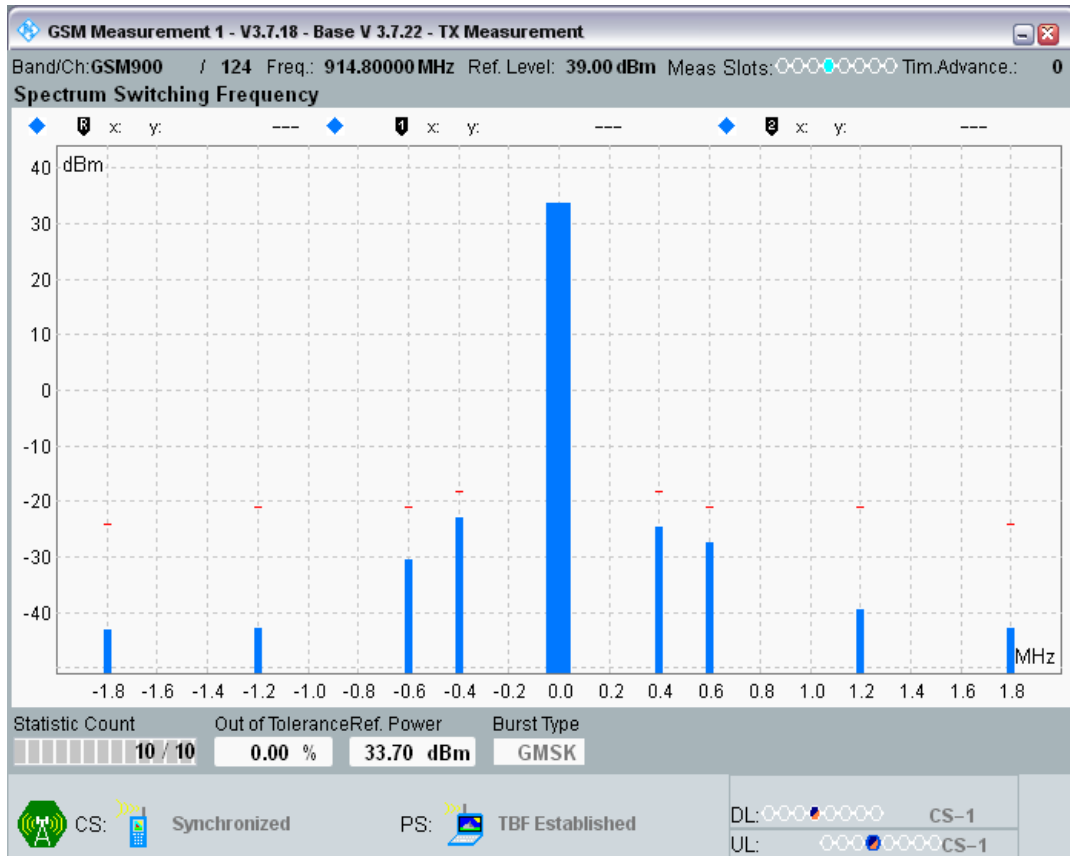

GPRS900 Channel=124 Gamma=17;17;17;17

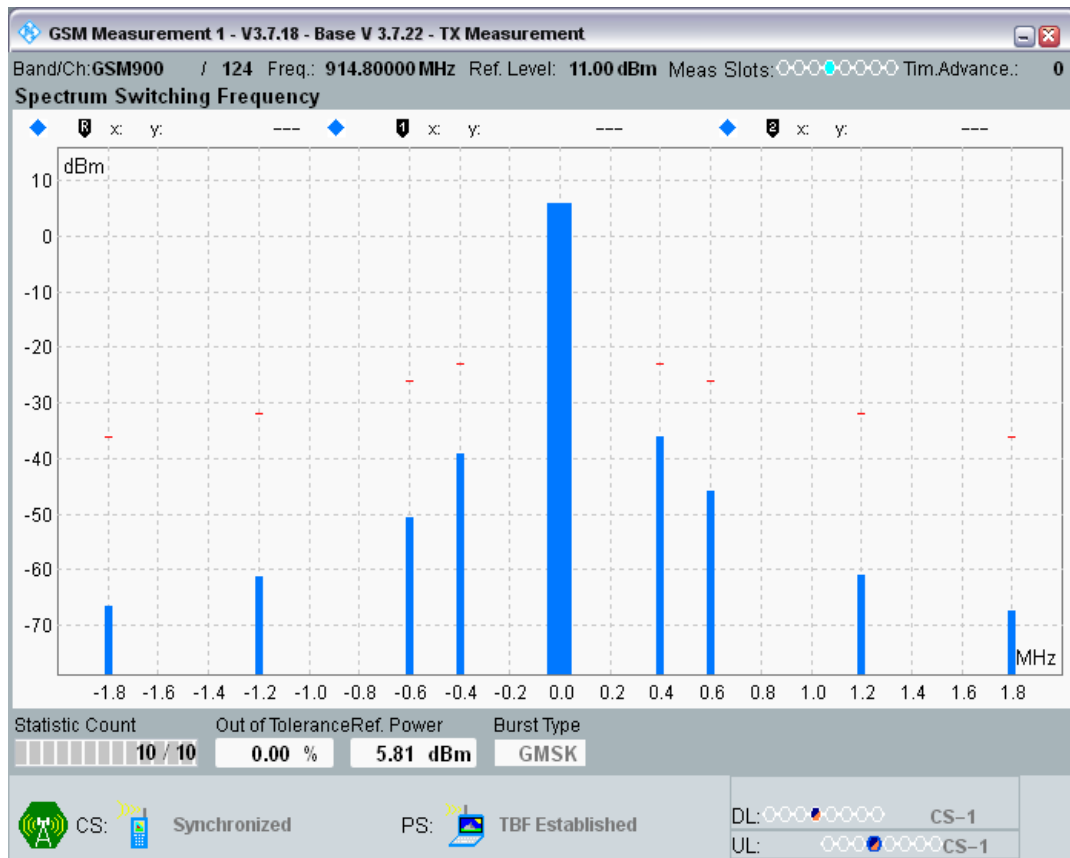

Clause 4.2.44 Minimum Input level for Reference Performance - GPRS PDTCH

| Band | Channel | UL Frequency (MHz) | DL Frequency (MHz) | Type | Ref Sensitivity Level (dBm) | BLER (%) | Limit (%) | Verdict |
|----------|---------|--------------------|--------------------|---------------------|-----------------------------|----------|-----------|---------|
| GPRS1800 | Hopping | - | - | PDTCH CS3 Static FH | -101 | 0.00 | 10 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | PDTCH CS3 TU50 | -95 | 0.00 | 10 | PASS |
| GPRS1800 | Hopping | - | - | PDTCH CS3 TU50 FH | -95 | 0.00 | 10 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | PDTCH CS3 RA250 | -95 | 0.00 | 10 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | PDTCH CS3 HT100 | -91 | 0.00 | 10 | PASS |
| GPRS1800 | Hopping | - | - | PDTCH CS4 Static FH | -98 | 0.00 | 10 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | PDTCH CS4 TU50 | -85 | 0.00 | 10 | PASS |
| GPRS1800 | Hopping | - | - | PDTCH CS4 TU50 FH | -85 | 0.00 | 10 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | PDTCH CS3 TU50 | -95 | 0.00 | 10 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | PDTCH CS3 | -95 | 0.00 | 10 | PASS |

| | | | | | | | | |
|----------|---------|--------|--------|------------------------|------|------|----|------|
| | | | | RA250 | | | | |
| GPRS1800 | 698 | 1747.4 | 1842.4 | PDTCH CS3 HT100 | -91 | 0.00 | 10 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | PDTCH CS4 TU50 | -85 | 0.00 | 10 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | PDTCH CS3 TU50 | -95 | 0.00 | 10 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | PDTCH CS3 RA250 | -95 | 0.00 | 10 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | PDTCH CS3 HT100 | -91 | 0.00 | 10 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | PDTCH CS4 TU50 | -85 | 0.00 | 10 | PASS |
| GPRS900 | Hopping | - | - | PDTCH CS3 Static FH | -101 | 0.00 | 10 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | PDTCH CS3 TU50 | -95 | 0.00 | 10 | PASS |
| GPRS900 | Hopping | - | - | PDTCH CS3 TU50 FH | -96 | 1.00 | 10 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | PDTCH CS3 RA250 | -95 | 0.00 | 10 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | PDTCH CS3 HT100 | -93 | 0.00 | 10 | PASS |
| GPRS900 | Hopping | - | - | PDTCH CS4 Static FH | -98 | 0.00 | 10 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | PDTCH CS4 TU50 | -87 | 0.00 | 10 | PASS |
| GPRS900 | Hopping | - | - | PDTCH CS4 TU50 FH | -87 | 0.10 | 10 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | PDTCH CS3 TU50 | -95 | 0.00 | 10 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | PDTCH CS3 RA250 | -95 | 0.00 | 10 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | PDTCH CS3 HT100 | -93 | 0.00 | 10 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | PDTCH CS4 TU50 | -87 | 0.00 | 10 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | PDTCH CS3 TU50 | -95 | 0.00 | 10 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | PDTCH CS3 RA250 | -95 | 0.00 | 10 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | PDTCH CS3 HT100 | -93 | 0.00 | 10 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | PDTCH CS4 | -87 | 0.00 | 10 | PASS |

| | | | | | | | | |
|--|--|--|--|------|--|--|--|--|
| | | | | TU50 | | | | |
|--|--|--|--|------|--|--|--|--|

Clause 4.2.44 Minimum Input level for Reference Performance - GPRS USF

| Band | Channel | UL Frequency (MHz) | DL Frequency (MHz) | Type | Ref Sensitivity Level (dBm) | BLER (%) | Limit (%) | Verdict |
|----------|---------|-----------------------|-----------------------|-------------------|--------------------------------|-------------|--------------|---------|
| GPRS1800 | 512 | 1710.2 | 1805.2 | USF CS1 HT100 | -98 | 0.00 | 1 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | USF CS2 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | USF CS3 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | USF CS4 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 512 | 1710.2 | 1805.2 | USF CS1 Static | -105 | 0.00 | 1 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | USF CS1 HT100 | -98 | 0.00 | 1 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | USF CS2 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | USF CS3 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | USF CS4 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 698 | 1747.4 | 1842.4 | USF CS1 Static | -105 | 0.00 | 1 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | USF CS1 HT100 | -98 | 0.00 | 1 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | USF CS2 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | USF CS3 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | USF CS4 HT100 | -100 | 0.00 | 1 | PASS |
| GPRS1800 | 885 | 1784.8 | 1879.8 | USF CS1 Static | -105 | 0.00 | 1 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | USF CS1 HT100 | -98 | 0.00 | 1 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | USF CS2 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | USF CS3 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | USF CS4 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 975 | 880.2 | 915.2 | USF CS1 | -105 | 0.00 | 1 | PASS |

| | | | | Static | | | | |
|---------|-----|-------|-------|-------------------|------|------|---|------|
| GPRS900 | 38 | 897.6 | 942.6 | USF CS1 HT100 | -98 | 0.00 | 1 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | USF CS2 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | USF CS3 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | USF CS4 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 38 | 897.6 | 942.6 | USF CS1 Static | -105 | 0.40 | 1 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | USF CS1 HT100 | -98 | 0.00 | 1 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | USF CS2 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | USF CS3 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | USF CS4 HT100 | -101 | 0.00 | 1 | PASS |
| GPRS900 | 124 | 914.8 | 959.8 | USF CS1 Static | -105 | 0.00 | 1 | PASS |

Clause 4.2.11 Spurious emissions in the MS receive bands

| Band | Channel | Frequency (MHz) | Gamma | RBW (KHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|----------|---------|-----------------|---------|-----------|-----------------|------------------|-------------|---------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 925.00 | -90.98 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 925.20 | -91.37 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 925.40 | -91.12 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 925.60 | -90.87 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 925.80 | -90.9 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 926.00 | -91.21 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 926.20 | -91.02 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 926.40 | -91.17 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 926.60 | -90.96 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 926.80 | -90.51 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 927.00 | -91.17 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 927.20 | -91.11 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 927.40 | -90.93 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 927.60 | -90.68 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 927.80 | -91.07 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 928.00 | -91.2 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 928.20 | -91.23 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 928.40 | -91.18 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 928.60 | -90.93 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 928.80 | -90.98 | -67 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 929.00 | -90.64 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 929.20 | -91.09 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 929.40 | -91.31 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 929.60 | -91.1 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 929.80 | -91.35 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 930.00 | -91.04 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 930.20 | -91.05 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 930.40 | -91.38 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 930.60 | -91 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 930.80 | -91.16 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 931.00 | -90.97 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 931.20 | -90.97 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 931.40 | -91.29 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 931.60 | -91.16 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 931.80 | -90.88 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 932.00 | -91.36 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 932.20 | -91.21 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 932.40 | -91.27 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 932.60 | -90.83 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 932.80 | -91.05 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 933.00 | -91.32 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 933.20 | -91.08 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 933.40 | -91.23 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 933.60 | -91.08 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 933.80 | -90.97 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 934.00 | -91.12 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 934.20 | -91.29 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 934.40 | -91.28 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 934.60 | -91.11 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 934.80 | -91.3 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 935.00 | -90.96 | -67 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 935.00 | -91.16 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 935.20 | -90.95 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 935.40 | -91.18 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 935.60 | -90.98 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 935.80 | -91.44 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 936.00 | -91.23 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 936.20 | -90.94 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 936.40 | -91.2 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 936.60 | -90.95 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 936.80 | -91.11 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 937.00 | -91.28 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 937.20 | -91.19 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 937.40 | -91.05 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 937.60 | -91.05 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 937.80 | -91.34 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 938.00 | -91.03 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 938.20 | -91.14 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 938.40 | -90.88 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 938.60 | -91 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 938.80 | -91.18 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 939.00 | -91.2 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 939.20 | -91.13 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 939.40 | -91.14 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 939.60 | -91.14 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 939.80 | -90.81 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 940.00 | -90.95 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 940.20 | -91.28 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 940.40 | -90.92 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 940.60 | -91.37 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 940.80 | -90.75 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 941.00 | -90.75 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 941.20 | -91.35 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 941.40 | -91.23 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 941.60 | -91.36 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 941.80 | -90.96 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 942.00 | -91.41 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 942.20 | -91.06 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 942.40 | -91.06 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 942.60 | -91.29 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 942.80 | -91.02 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 943.00 | -91.31 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 943.20 | -91 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 943.40 | -91.51 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 943.60 | -91.22 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 943.80 | -90.97 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 944.00 | -91.28 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 944.20 | -90.45 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 944.40 | -90.82 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 944.60 | -91.07 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 944.80 | -91.05 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 945.00 | -91.1 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 945.20 | -90.85 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 945.40 | -91.13 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 945.60 | -91.12 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 945.80 | -91.21 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 946.00 | -91.21 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 946.20 | -91.27 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 946.40 | -90.53 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 946.60 | -91.13 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 946.80 | -91.08 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 947.00 | -91.12 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 947.20 | -91.33 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 947.40 | -90.93 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 947.60 | -91.23 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 947.80 | -91.05 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 948.00 | -91.11 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 948.20 | -90.97 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 948.40 | -91.22 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 948.60 | -91.13 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 948.80 | -90.34 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 949.00 | -91.34 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 949.20 | -90.93 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 949.40 | -90.79 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 949.60 | -91.15 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 949.80 | -91.11 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 950.00 | -91.5 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 950.20 | -91.22 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 950.40 | -90.96 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 950.60 | -91.51 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 950.80 | -91.34 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 951.00 | -90.59 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 951.20 | -91.12 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 951.40 | -91.19 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 951.60 | -91.32 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 951.80 | -91.09 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 952.00 | -91.46 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 952.20 | -91.32 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 952.40 | -91.2 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 952.60 | -91.12 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 952.80 | -91.43 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 953.00 | -91.46 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 953.20 | -91.07 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 953.40 | -91.48 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 953.60 | -91.02 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 953.80 | -91.46 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 954.00 | -90.98 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 954.20 | -90.26 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 954.40 | -91.11 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 954.60 | -91.21 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 954.80 | -91.31 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 955.00 | -91.05 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 955.20 | -91.33 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 955.40 | -91.3 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 955.60 | -91.39 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 955.80 | -91.06 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 956.00 | -91.18 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 956.20 | -90.66 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 956.40 | -91.19 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 956.60 | -91.08 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 956.80 | -91.34 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 957.00 | -90.91 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 957.20 | -91.01 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 957.40 | -91.21 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 957.60 | -91.27 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 957.80 | -91.47 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 958.00 | -91.23 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 958.20 | -91.42 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 958.40 | -91.41 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 958.60 | -90.97 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 958.80 | -90.92 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 959.00 | -91.02 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 959.20 | -91.33 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 959.40 | -91.28 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 959.60 | -91.09 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 959.80 | -91.32 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 960.00 | -91.43 | -79 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1805.00 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1805.20 | -90.47 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1805.40 | -90.59 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1805.60 | -91.15 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1805.80 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1806.00 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1806.20 | -90.83 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1806.40 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1806.60 | -90.94 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1806.80 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1807.00 | -90.94 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1807.20 | -91.15 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1807.40 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1807.60 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1807.80 | -90.77 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1808.00 | -90.96 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1808.20 | -90.89 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1808.40 | -90.75 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1808.60 | -91.09 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1808.80 | -91.21 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1809.00 | -90.61 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1809.20 | -90.79 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1809.40 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1809.60 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1809.80 | -90.89 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1810.00 | -91.08 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1810.20 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1810.40 | -90.98 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1810.60 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1810.80 | -91.06 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1811.00 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1811.20 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1811.40 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1811.60 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1811.80 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1812.00 | -91.13 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1812.20 | -91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1812.40 | -90.79 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1812.60 | -90.47 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1812.80 | -90.7 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1813.00 | -91.03 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1813.20 | -91.16 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1813.40 | -90.35 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1813.60 | -90.76 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1813.80 | -90.66 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1814.00 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1814.20 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1814.40 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1814.60 | -90.78 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1814.80 | -90.77 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1815.00 | -90.83 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1815.20 | -91.07 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1815.40 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1815.60 | -90.91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1815.80 | -91.11 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1816.00 | -90.84 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1816.20 | -90.71 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1816.40 | -91.1 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1816.60 | -91.07 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1816.80 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1817.00 | -91.18 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1817.20 | -91.03 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1817.40 | -91.01 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1817.60 | -91.18 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1817.80 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1818.00 | -90.83 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1818.20 | -91.02 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1818.40 | -90.77 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1818.60 | -90.91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1818.80 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1819.00 | -90.99 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1819.20 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1819.40 | -91.16 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1819.60 | -90.98 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1819.80 | -90.69 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1820.00 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1820.20 | -91.06 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1820.40 | -90.79 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1820.60 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1820.80 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1821.00 | -90.83 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1821.20 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1821.40 | -90.66 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1821.60 | -90.69 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1821.80 | -90.68 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1822.00 | -90.79 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1822.20 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1822.40 | -90.65 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1822.60 | -91.09 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1822.80 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1823.00 | -90.33 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1823.20 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1823.40 | -90.76 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1823.60 | -91.11 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1823.80 | -90.76 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1824.00 | -90.48 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1824.20 | -90.98 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1824.40 | -90.97 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1824.60 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1824.80 | -90.66 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1825.00 | -90.84 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1825.20 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1825.40 | -91.04 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1825.60 | -90.71 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1825.80 | -91.13 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1826.00 | -91.01 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1826.20 | -91.09 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1826.40 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1826.60 | -90.61 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1826.80 | -91.02 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1827.00 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1827.20 | -91.03 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1827.40 | -90.43 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1827.60 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1827.80 | -91.09 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1828.00 | -90.7 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1828.20 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1828.40 | -90.94 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1828.60 | -91.08 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1828.80 | -90.68 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1829.00 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1829.20 | -90.89 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1829.40 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1829.60 | -90.91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1829.80 | -91.21 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1830.00 | -91.13 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1830.20 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1830.40 | -91.05 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1830.60 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1830.80 | -90.83 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1831.00 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1831.20 | -91.08 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1831.40 | -90.69 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1831.60 | -91.07 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1831.80 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1832.00 | -90.57 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1832.20 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1832.40 | -90.5 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1832.60 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1832.80 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1833.00 | -90.76 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1833.20 | -91.01 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1833.40 | -91.14 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1833.60 | -90.94 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1833.80 | -91.1 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1834.00 | -90.47 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1834.20 | -90.7 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1834.40 | -90.97 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1834.60 | -90.3 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1834.80 | -90.83 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1835.00 | -90.97 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1835.20 | -91.2 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1835.40 | -91.25 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1835.60 | -91.03 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1835.80 | -91.11 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1836.00 | -90.67 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1836.20 | -90.9 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1836.40 | -90.75 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1836.60 | -90.78 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1836.80 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1837.00 | -91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1837.20 | -90.77 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1837.40 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1837.60 | -91.12 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1837.80 | -90.9 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1838.00 | -91.06 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1838.20 | -90.7 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1838.40 | -90.9 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1838.60 | -91.23 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1838.80 | -90.41 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1839.00 | -90.66 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1839.20 | -90.67 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1839.40 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1839.60 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1839.80 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1840.00 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1840.20 | -90.96 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1840.40 | -90.97 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1840.60 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1840.80 | -90.67 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1841.00 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1841.20 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1841.40 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1841.60 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1841.80 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1842.00 | -90.64 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1842.20 | -90.9 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1842.40 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1842.60 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1842.80 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1843.00 | -90.65 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1843.20 | -90.49 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1843.40 | -91.05 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1843.60 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1843.80 | -90.79 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1844.00 | -91.08 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1844.20 | -90.57 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1844.40 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1844.60 | -90.89 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1844.80 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1845.00 | -90.69 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1845.20 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1845.40 | -90.66 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1845.60 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1845.80 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1846.00 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1846.20 | -90.31 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1846.40 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1846.60 | -91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1846.80 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1847.00 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1847.20 | -91.05 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1847.40 | -91.03 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1847.60 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1847.80 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1848.00 | -90.52 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1848.20 | -90.89 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1848.40 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1848.60 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1848.80 | -91.04 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1849.00 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1849.20 | -90.56 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1849.40 | -90.75 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1849.60 | -90.84 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1849.80 | -90.93 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1850.00 | -90.32 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1850.20 | -90.63 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1850.40 | -90.88 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1850.60 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1850.80 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1851.00 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1851.20 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1851.40 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1851.60 | -90.44 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1851.80 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1852.00 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1852.20 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1852.40 | -90.46 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1852.60 | -90.75 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1852.80 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1853.00 | -90.59 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1853.20 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1853.40 | -90.63 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1853.60 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1853.80 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1854.00 | -91.06 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1854.20 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1854.40 | -90.46 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1854.60 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1854.80 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1855.00 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1855.20 | -90.4 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1855.40 | -90.61 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1855.60 | -90.77 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1855.80 | -90.91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1856.00 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1856.20 | -90.79 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1856.40 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1856.60 | -90.36 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1856.80 | -90.71 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1857.00 | -90.91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1857.20 | -90.51 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1857.40 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1857.60 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1857.80 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1858.00 | -90.61 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1858.20 | -90.58 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1858.40 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1858.60 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1858.80 | -90.75 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1859.00 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1859.20 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1859.40 | -90.57 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1859.60 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1859.80 | -90.5 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1860.00 | -90.48 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1860.20 | -90.56 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1860.40 | -90.86 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1860.60 | -90.7 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1860.80 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1861.00 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1861.20 | -90.87 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1861.40 | -90.52 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1861.60 | -90.58 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1861.80 | -90.55 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1862.00 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1862.20 | -90.71 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1862.40 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1862.60 | -90.37 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1862.80 | -90.94 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1863.00 | -90.53 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1863.20 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1863.40 | -90.64 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1863.60 | -90.42 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1863.80 | -90.65 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1864.00 | -90.55 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1864.20 | -90.96 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1864.40 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1864.60 | -90.17 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1864.80 | -90.99 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1865.00 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1865.20 | -90.51 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1865.40 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1865.60 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1865.80 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1866.00 | -90.63 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1866.20 | -90.59 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1866.40 | -90.79 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1866.60 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1866.80 | -90.53 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1867.00 | -89.91 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1867.20 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1867.40 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1867.60 | -90.92 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1867.80 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1868.00 | -90.49 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1868.20 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1868.40 | -90.57 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1868.60 | -90.63 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1868.80 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1869.00 | -90.69 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1869.20 | -90.64 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1869.40 | -90.7 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1869.60 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1869.80 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1870.00 | -90.51 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1870.20 | -90.85 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1870.40 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1870.60 | -90.61 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1870.80 | -90.5 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1871.00 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1871.20 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1871.40 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1871.60 | -90.42 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1871.80 | -90.8 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1872.00 | -90.85 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1872.20 | -90.59 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1872.40 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1872.60 | -90.52 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1872.80 | -90.25 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1873.00 | -90.71 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1873.20 | -90.41 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1873.40 | -90.66 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1873.60 | -90.38 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1873.80 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1874.00 | -90.68 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1874.20 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1874.40 | -90.51 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1874.60 | -90.72 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1874.80 | -90.57 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1875.00 | -90.6 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1875.20 | -90.64 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1875.40 | -90.55 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1875.60 | -90.52 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1875.80 | -90.51 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1876.00 | -90.73 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1876.20 | -90.76 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1876.40 | -90.64 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1876.60 | -90.75 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1876.80 | -90.68 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1877.00 | -90.47 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1877.20 | -90.95 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1877.40 | -90.62 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1877.60 | -90.5 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1877.80 | -90.81 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1878.00 | -90.36 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1878.20 | -90.61 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1878.40 | -90.51 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1878.60 | -90.35 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1878.80 | -90.37 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1879.00 | -90.69 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1879.20 | -90.74 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1879.40 | -90.78 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1879.60 | -90.57 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1879.80 | -90.82 | -71 | PASS |
| GPRS1800 | 512 | 1710.2 | 3;3;3;3 | 100 | 1880.00 | -90.22 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 925.00 | -91.44 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 925.20 | -90.76 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 925.40 | -91.09 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 925.60 | -90.81 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 925.80 | -90.79 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 926.00 | -91.14 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 926.20 | -91.04 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 926.40 | -90.66 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 926.60 | -91.07 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 926.80 | -90.97 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 927.00 | -90.7 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 927.20 | -91.13 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 927.40 | -91.05 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 927.60 | -91.22 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 927.80 | -91.03 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 928.00 | -91.17 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 928.20 | -91.02 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 928.40 | -91.03 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 928.60 | -91.19 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 928.80 | -91.06 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 929.00 | -91.22 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 929.20 | -91.32 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 929.40 | -91.06 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 929.60 | -91.37 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 929.80 | -91.3 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 930.00 | -91.34 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 930.20 | -91.01 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 930.40 | -90.8 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 930.60 | -90.98 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 930.80 | -91.13 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 931.00 | -91.05 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 931.20 | -90.88 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 931.40 | -91.03 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 931.60 | -91.18 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 931.80 | -90.84 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 932.00 | -90.66 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 932.20 | -91.3 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 932.40 | -91 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 932.60 | -91.13 | -67 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 932.80 | -91.4 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 933.00 | -90.96 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 933.20 | -91.19 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 933.40 | -90.87 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 933.60 | -90.93 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 933.80 | -90.89 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 934.00 | -91.01 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 934.20 | -90.97 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 934.40 | -91.23 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 934.60 | -90.86 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 934.80 | -90.48 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 935.00 | -91.26 | -67 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 935.00 | -90.95 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 935.20 | -90.97 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 935.40 | -91.12 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 935.60 | -91.18 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 935.80 | -90.81 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 936.00 | -91.33 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 936.20 | -91.18 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 936.40 | -91.24 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 936.60 | -91.05 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 936.80 | -91.09 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 937.00 | -91.22 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 937.20 | -90.95 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 937.40 | -91.05 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 937.60 | -91.04 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 937.80 | -91.21 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 938.00 | -90.93 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 938.20 | -91 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 938.40 | -91.2 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 938.60 | -91.16 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 938.80 | -91.31 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 939.00 | -91.07 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 939.20 | -91.18 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 939.40 | -90.6 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 939.60 | -90.83 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 939.80 | -91.17 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 940.00 | -91.13 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 940.20 | -91.17 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 940.40 | -91.06 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 940.60 | -91.25 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 940.80 | -91.26 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 941.00 | -91.15 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 941.20 | -90.98 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 941.40 | -91.39 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 941.60 | -91.17 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 941.80 | -90.82 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 942.00 | -90.95 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 942.20 | -91.01 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 942.40 | -91.29 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 942.60 | -90.94 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 942.80 | -90.97 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 943.00 | -91.31 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 943.20 | -91.26 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 943.40 | -91.05 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 943.60 | -91.2 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 943.80 | -91.08 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 944.00 | -91.13 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 944.20 | -90.61 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 944.40 | -91.13 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 944.60 | -91.03 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 944.80 | -91.32 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 945.00 | -91.04 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 945.20 | -91.08 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 945.40 | -91.42 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 945.60 | -91.18 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 945.80 | -91.29 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 946.00 | -91.17 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 946.20 | -91.04 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 946.40 | -90.88 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 946.60 | -91.15 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 946.80 | -91.3 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 947.00 | -90.76 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 947.20 | -90.95 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 947.40 | -91.06 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 947.60 | -90.92 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 947.80 | -90.86 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 948.00 | -91.33 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 948.20 | -91.15 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 948.40 | -91.22 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 948.60 | -91.34 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 948.80 | -91.04 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 949.00 | -91.41 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 949.20 | -91.18 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 949.40 | -91.09 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 949.60 | -91.33 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 949.80 | -90.91 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 950.00 | -91.43 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 950.20 | -91.32 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 950.40 | -91.16 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 950.60 | -91.14 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 950.80 | -91.17 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 951.00 | -90.82 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 951.20 | -91.13 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 951.40 | -91.31 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 951.60 | -91.15 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 951.80 | -91.27 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 952.00 | -91.23 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 952.20 | -91 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 952.40 | -91.4 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 952.60 | -90.87 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 952.80 | -91.33 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 953.00 | -91.13 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 953.20 | -91.42 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 953.40 | -91.28 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 953.60 | -91.28 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 953.80 | -90.98 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 954.00 | -91.04 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 954.20 | -91.2 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 954.40 | -90.97 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 954.60 | -90.97 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 954.80 | -91.33 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 955.00 | -91.2 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 955.20 | -91.19 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 955.40 | -90.94 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 955.60 | -91.19 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 955.80 | -91.06 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 956.00 | -91.14 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 956.20 | -91.11 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 956.40 | -91.19 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 956.60 | -91.14 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 956.80 | -91.02 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 957.00 | -91.16 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 957.20 | -91.57 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 957.40 | -91.35 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 957.60 | -90.91 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 957.80 | -91.13 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 958.00 | -91.3 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 958.20 | -91.42 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 958.40 | -91.17 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 958.60 | -91.4 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 958.80 | -91.23 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 959.00 | -91.46 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 959.20 | -91.03 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 959.40 | -90.94 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 959.60 | -91.36 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 959.80 | -91.43 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 960.00 | -91.23 | -79 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1805.00 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1805.20 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1805.40 | -90.99 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1805.60 | -91.19 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1805.80 | -91.11 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1806.00 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1806.20 | -91.16 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1806.40 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1806.60 | -91.23 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1806.80 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1807.00 | -90.7 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1807.20 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1807.40 | -91.01 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1807.60 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1807.80 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1808.00 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1808.20 | -91.03 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1808.40 | -90.92 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1808.60 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1808.80 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1809.00 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1809.20 | -90.87 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1809.40 | -91.06 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1809.60 | -90.75 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1809.80 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1810.00 | -90.95 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1810.20 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1810.40 | -91.23 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1810.60 | -91.1 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1810.80 | -91.13 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1811.00 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1811.20 | -91.08 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1811.40 | -90.71 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1811.60 | -90.46 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1811.80 | -91.01 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1812.00 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1812.20 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1812.40 | -90.73 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1812.60 | -90.58 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1812.80 | -91.12 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1813.00 | -90.52 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1813.20 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1813.40 | -91.03 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1813.60 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1813.80 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1814.00 | -90.92 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1814.20 | -91.15 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1814.40 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1814.60 | -90.95 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1814.80 | -90.97 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1815.00 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1815.20 | -91.05 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1815.40 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1815.60 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1815.80 | -90.47 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1816.00 | -91.11 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1816.20 | -90.86 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1816.40 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1816.60 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1816.80 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1817.00 | -90.92 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1817.20 | -91.22 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1817.40 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1817.60 | -90.51 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1817.80 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1818.00 | -90.44 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1818.20 | -91.14 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1818.40 | -90.94 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1818.60 | -91.12 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1818.80 | -91.09 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1819.00 | -90.86 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1819.20 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1819.40 | -90.75 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1819.60 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1819.80 | -90.86 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1820.00 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1820.20 | -90.98 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1820.40 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1820.60 | -90.94 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1820.80 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1821.00 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1821.20 | -91.11 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1821.40 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1821.60 | -90.56 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1821.80 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1822.00 | -91.1 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1822.20 | -90.69 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1822.40 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1822.60 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1822.80 | -91.1 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1823.00 | -91.31 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1823.20 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1823.40 | -91.05 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1823.60 | -90.51 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1823.80 | -90.94 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1824.00 | -90.57 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1824.20 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1824.40 | -90.98 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1824.60 | -90.78 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1824.80 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1825.00 | -91.08 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1825.20 | -91.05 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1825.40 | -90.94 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1825.60 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1825.80 | -91.1 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1826.00 | -90.95 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1826.20 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1826.40 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1826.60 | -90.85 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1826.80 | -90.41 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1827.00 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1827.20 | -90.99 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1827.40 | -91.18 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1827.60 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1827.80 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1828.00 | -90.92 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1828.20 | -90.91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1828.40 | -90.62 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1828.60 | -91.17 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1828.80 | -91.17 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1829.00 | -90.95 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1829.20 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1829.40 | -90.57 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1829.60 | -90.75 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1829.80 | -91.01 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1830.00 | -90.8 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1830.20 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1830.40 | -90.94 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1830.60 | -91.21 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1830.80 | -90.91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1831.00 | -90.56 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1831.20 | -90.61 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1831.40 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1831.60 | -90.61 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1831.80 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1832.00 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1832.20 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1832.40 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1832.60 | -90.5 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1832.80 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1833.00 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1833.20 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1833.40 | -91.04 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1833.60 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1833.80 | -90.87 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1834.00 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1834.20 | -90.48 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1834.40 | -90.92 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1834.60 | -91.07 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1834.80 | -90.95 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1835.00 | -90.87 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1835.20 | -90.69 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1835.40 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1835.60 | -91.1 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1835.80 | -91.01 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1836.00 | -90.52 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1836.20 | -90.74 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1836.40 | -90.71 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1836.60 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1836.80 | -91.04 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1837.00 | -90.61 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1837.20 | -91.18 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1837.40 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1837.60 | -91.14 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1837.80 | -90.69 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1838.00 | -90.56 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1838.20 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1838.40 | -90.58 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1838.60 | -90.7 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1838.80 | -90.92 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1839.00 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1839.20 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1839.40 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1839.60 | -91.01 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1839.80 | -91.04 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1840.00 | -91.11 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1840.20 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1840.40 | -91.19 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1840.60 | -90.68 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1840.80 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1841.00 | -91.15 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1841.20 | -90.74 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1841.40 | -91.04 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1841.60 | -90.94 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1841.80 | -90.41 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1842.00 | -91.06 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1842.20 | -90.63 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1842.40 | -90.7 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1842.60 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1842.80 | -90.75 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1843.00 | -90.86 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1843.20 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1843.40 | -91.03 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1843.60 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1843.80 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1844.00 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1844.20 | -90.86 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1844.40 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1844.60 | -90.42 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1844.80 | -90.86 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1845.00 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1845.20 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1845.40 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1845.60 | -90.56 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1845.80 | -91.06 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1846.00 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1846.20 | -90.85 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1846.40 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1846.60 | -90.62 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1846.80 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1847.00 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1847.20 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1847.40 | -90.78 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1847.60 | -90.99 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1847.80 | -90.95 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1848.00 | -90.59 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1848.20 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1848.40 | -90.87 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1848.60 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1848.80 | -90.63 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1849.00 | -91.13 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1849.20 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1849.40 | -91.01 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1849.60 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1849.80 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1850.00 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1850.20 | -90.93 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1850.40 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1850.60 | -90.91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1850.80 | -90.73 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1851.00 | -90.98 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1851.20 | -91.05 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1851.40 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1851.60 | -90.47 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1851.80 | -91.04 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1852.00 | -90.87 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1852.20 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1852.40 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1852.60 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1852.80 | -90.99 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1853.00 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1853.20 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1853.40 | -90.45 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1853.60 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1853.80 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1854.00 | -90.71 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1854.20 | -91.02 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1854.40 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1854.60 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1854.80 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1855.00 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1855.20 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1855.40 | -90.6 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1855.60 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1855.80 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1856.00 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1856.20 | -91.08 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1856.40 | -91.02 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1856.60 | -90.74 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1856.80 | -90.74 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1857.00 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1857.20 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1857.40 | -90.71 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1857.60 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1857.80 | -91.16 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1858.00 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1858.20 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1858.40 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1858.60 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1858.80 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1859.00 | -91.06 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1859.20 | -90.6 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1859.40 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1859.60 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1859.80 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1860.00 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1860.20 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1860.40 | -91.22 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1860.60 | -90.99 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1860.80 | -90.51 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1861.00 | -90.36 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1861.20 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1861.40 | -90.37 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1861.60 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1861.80 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1862.00 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1862.20 | -90.61 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1862.40 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1862.60 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1862.80 | -90.51 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1863.00 | -90.75 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1863.20 | -90.89 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1863.40 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1863.60 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1863.80 | -90.63 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1864.00 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1864.20 | -90.87 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1864.40 | -90.92 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1864.60 | -91.04 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1864.80 | -90.68 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1865.00 | -90.82 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1865.20 | -90.91 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1865.40 | -90.79 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1865.60 | -90.65 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1865.80 | -90.96 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1866.00 | -90.88 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1866.20 | -90.78 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1866.40 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1866.60 | -90.57 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1866.80 | -90.68 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1867.00 | -90.5 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1867.20 | -90.75 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1867.40 | -90.7 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1867.60 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1867.80 | -90.61 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1868.00 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1868.20 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1868.40 | -90.83 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1868.60 | -90.74 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1868.80 | -90.69 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1869.00 | -90.53 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1869.20 | -90.31 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1869.40 | -90.72 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1869.60 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1869.80 | -91 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1870.00 | -90.61 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1870.20 | -90.47 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1870.40 | -90.74 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1870.60 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1870.80 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1871.00 | -90.8 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1871.20 | -90.65 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1871.40 | -90.4 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1871.60 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1871.80 | -90.6 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1872.00 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1872.20 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1872.40 | -90.81 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1872.60 | -90.58 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1872.80 | -90.68 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1873.00 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1873.20 | -90.47 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1873.40 | -90.42 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1873.60 | -90.59 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1873.80 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1874.00 | -90.92 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1874.20 | -90.48 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1874.40 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1874.60 | -90.6 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1874.80 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1875.00 | -90.85 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1875.20 | -90.59 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1875.40 | -90.33 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1875.60 | -90.65 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1875.80 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1876.00 | -90.66 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1876.20 | -90.34 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1876.40 | -90.52 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1876.60 | -90.51 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1876.80 | -90.58 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1877.00 | -90.58 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1877.20 | -90.64 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1877.40 | -90.34 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1877.60 | -90.62 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1877.80 | -90.77 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1878.00 | -90.67 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1878.20 | -90.76 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1878.40 | -90.55 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1878.60 | -90.54 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1878.80 | -90.56 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1879.00 | -90.65 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1879.20 | -90.27 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1879.40 | -90.84 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1879.60 | -90.68 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1879.80 | -90.9 | -71 | PASS |
| GPRS1800 | 698 | 1747.4 | 3;3;3;3 | 100 | 1880.00 | -90.45 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 925.00 | -90.57 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 925.20 | -90.81 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 925.40 | -90.74 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 925.60 | -90.48 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 925.80 | -90.7 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 926.00 | -91.07 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 926.20 | -90.48 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 926.40 | -91.22 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 926.60 | -90.68 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 926.80 | -91.28 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 927.00 | -91.05 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 927.20 | -90.94 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 927.40 | -91.3 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 927.60 | -90.85 | -67 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 927.80 | -91.17 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 928.00 | -90.62 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 928.20 | -90.74 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 928.40 | -91.17 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 928.60 | -91.27 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 928.80 | -91.03 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 929.00 | -91.17 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 929.20 | -90.79 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 929.40 | -91.27 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 929.60 | -91.47 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 929.80 | -91.07 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 930.00 | -91.27 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 930.20 | -91.1 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 930.40 | -90.78 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 930.60 | -91.04 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 930.80 | -90.96 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 931.00 | -91.07 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 931.20 | -91.16 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 931.40 | -91.21 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 931.60 | -91.22 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 931.80 | -91.18 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 932.00 | -91.02 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 932.20 | -91.35 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 932.40 | -91.06 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 932.60 | -91.07 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 932.80 | -91.22 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 933.00 | -91.1 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 933.20 | -91.06 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 933.40 | -91.13 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 933.60 | -91.09 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 933.80 | -91.39 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 934.00 | -90.9 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 934.20 | -90.92 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 934.40 | -91.21 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 934.60 | -91.13 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 934.80 | -90.95 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 935.00 | -91.15 | -67 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 935.00 | -91.16 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 935.20 | -91.05 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 935.40 | -91.37 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 935.60 | -91.05 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 935.80 | -91.16 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 936.00 | -91.05 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 936.20 | -91.02 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 936.40 | -91.06 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 936.60 | -90.99 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 936.80 | -91.08 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 937.00 | -91.11 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 937.20 | -90.93 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 937.40 | -91.24 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 937.60 | -91.29 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 937.80 | -91.07 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 938.00 | -91.03 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 938.20 | -91.17 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 938.40 | -91.13 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 938.60 | -91.04 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 938.80 | -90.96 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 939.00 | -91.41 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 939.20 | -91.24 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 939.40 | -91.15 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 939.60 | -91.17 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 939.80 | -91.35 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 940.00 | -91.1 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 940.20 | -90.52 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 940.40 | -91.17 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 940.60 | -91.18 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 940.80 | -90.75 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 941.00 | -91.07 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 941.20 | -91.05 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 941.40 | -90.87 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 941.60 | -91.13 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 941.80 | -91.16 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 942.00 | -90.88 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 942.20 | -90.61 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 942.40 | -91.03 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 942.60 | -90.97 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 942.80 | -90.97 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 943.00 | -91.27 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 943.20 | -91.27 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 943.40 | -91.09 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 943.60 | -91.22 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 943.80 | -91.14 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 944.00 | -90.74 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 944.20 | -90.99 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 944.40 | -90.79 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 944.60 | -91.36 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 944.80 | -90.88 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 945.00 | -91.29 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|--------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 945.20 | -91.34 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 945.40 | -91 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 945.60 | -90.88 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 945.80 | -91.2 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 946.00 | -91.22 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 946.20 | -91.29 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 946.40 | -90.99 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 946.60 | -91.3 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 946.80 | -91.13 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 947.00 | -91.25 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 947.20 | -91.05 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 947.40 | -91.14 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 947.60 | -91.08 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 947.80 | -91.28 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 948.00 | -91.19 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 948.20 | -91.18 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 948.40 | -91.2 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 948.60 | -91.12 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 948.80 | -91.17 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 949.00 | -90.95 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 949.20 | -90.92 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 949.40 | -90.9 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 949.60 | -90.97 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 949.80 | -90.98 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 950.00 | -91.32 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 950.20 | -91.07 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 950.40 | -90.95 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 950.60 | -91.12 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 950.80 | -90.95 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 951.00 | -91.2 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 951.20 | -91.22 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 951.40 | -91.06 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 951.60 | -91.45 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 951.80 | -91.25 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 952.00 | -91.28 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 952.20 | -91.06 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 952.40 | -91.21 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 952.60 | -91.3 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 952.80 | -91.1 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 953.00 | -91.42 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 953.20 | -91.29 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 953.40 | -90.81 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 953.60 | -91.05 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 953.80 | -90.97 | -79 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 954.00 | -91.31 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 954.20 | -91.16 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 954.40 | -91.38 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 954.60 | -91.12 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 954.80 | -91.39 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 955.00 | -91.15 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 955.20 | -90.95 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 955.40 | -91.15 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 955.60 | -90.93 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 955.80 | -90.77 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 956.00 | -90.96 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 956.20 | -91.03 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 956.40 | -90.74 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 956.60 | -91.25 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 956.80 | -91.38 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 957.00 | -91.3 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 957.20 | -91.18 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 957.40 | -91.42 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 957.60 | -91.3 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 957.80 | -91.41 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 958.00 | -91.29 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 958.20 | -91.25 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 958.40 | -91.03 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 958.60 | -91.08 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 958.80 | -91.23 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 959.00 | -91.38 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 959.20 | -91.18 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 959.40 | -90.62 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 959.60 | -91.06 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 959.80 | -90.93 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 960.00 | -91.46 | -79 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1805.00 | -91.09 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1805.20 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1805.40 | -90.92 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1805.60 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1805.80 | -90.8 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1806.00 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1806.20 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1806.40 | -91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1806.60 | -90.79 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1806.80 | -91.07 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1807.00 | -91.12 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1807.20 | -90.7 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1807.40 | -91.08 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1807.60 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1807.80 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1808.00 | -91.2 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1808.20 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1808.40 | -91.06 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1808.60 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1808.80 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1809.00 | -90.64 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1809.20 | -91.08 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1809.40 | -90.62 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1809.60 | -91.05 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1809.80 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1810.00 | -90.68 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1810.20 | -91.06 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1810.40 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1810.60 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1810.80 | -90.45 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1811.00 | -91.06 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1811.20 | -91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1811.40 | -91.12 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1811.60 | -90.7 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1811.80 | -91.06 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1812.00 | -91.08 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1812.20 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1812.40 | -90.86 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1812.60 | -91.05 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1812.80 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1813.00 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1813.20 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1813.40 | -91.22 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1813.60 | -90.95 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1813.80 | -91.06 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1814.00 | -91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1814.20 | -90.96 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1814.40 | -90.86 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1814.60 | -90.59 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1814.80 | -91.05 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1815.00 | -91.12 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1815.20 | -90.98 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1815.40 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1815.60 | -91.02 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1815.80 | -90.9 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1816.00 | -91.04 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1816.20 | -91.06 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1816.40 | -91.23 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1816.60 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1816.80 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1817.00 | -91.1 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1817.20 | -90.93 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1817.40 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1817.60 | -91.02 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1817.80 | -91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1818.00 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1818.20 | -90.49 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1818.40 | -91.03 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1818.60 | -91.05 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1818.80 | -91.12 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1819.00 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1819.20 | -90.72 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1819.40 | -91.19 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1819.60 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1819.80 | -90.86 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1820.00 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1820.20 | -91.03 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1820.40 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1820.60 | -90.77 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1820.80 | -91.12 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1821.00 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1821.20 | -91.03 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1821.40 | -90.19 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1821.60 | -90.82 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1821.80 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1822.00 | -91.1 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1822.20 | -91.15 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1822.40 | -90.79 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1822.60 | -90.98 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1822.80 | -90.97 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1823.00 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1823.20 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1823.40 | -91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1823.60 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1823.80 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1824.00 | -91.08 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1824.20 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1824.40 | -90.82 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1824.60 | -90.69 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1824.80 | -90.8 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1825.00 | -90.92 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1825.20 | -90.92 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1825.40 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1825.60 | -90.37 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1825.80 | -91.1 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1826.00 | -90.88 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1826.20 | -90.62 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1826.40 | -90.94 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1826.60 | -90.55 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1826.80 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1827.00 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1827.20 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1827.40 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1827.60 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1827.80 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1828.00 | -90.91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1828.20 | -90.56 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1828.40 | -91.02 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1828.60 | -90.7 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1828.80 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1829.00 | -90.79 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1829.20 | -90.92 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1829.40 | -90.98 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1829.60 | -91.11 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1829.80 | -90.68 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1830.00 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1830.20 | -90.9 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1830.40 | -90.95 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1830.60 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1830.80 | -91.04 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1831.00 | -91.07 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1831.20 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1831.40 | -91.11 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1831.60 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1831.80 | -90.93 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1832.00 | -90.92 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1832.20 | -90.68 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1832.40 | -90.6 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1832.60 | -90.73 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1832.80 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1833.00 | -91.23 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1833.20 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1833.40 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1833.60 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1833.80 | -90.96 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1834.00 | -90.95 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1834.20 | -90.98 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1834.40 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1834.60 | -91.04 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1834.80 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1835.00 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1835.20 | -91.04 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1835.40 | -90.86 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1835.60 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1835.80 | -90.87 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1836.00 | -90.7 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1836.20 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1836.40 | -91.09 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1836.60 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1836.80 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1837.00 | -91.16 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1837.20 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1837.40 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1837.60 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1837.80 | -90.95 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1838.00 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1838.20 | -90.5 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1838.40 | -90.88 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1838.60 | -91.08 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1838.80 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1839.00 | -90.4 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1839.20 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1839.40 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1839.60 | -91.01 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1839.80 | -91.17 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1840.00 | -90.73 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1840.20 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1840.40 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1840.60 | -90.63 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1840.80 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1841.00 | -90.47 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1841.20 | -90.97 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1841.40 | -91.22 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1841.60 | -90.82 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1841.80 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1842.00 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1842.20 | -90.95 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1842.40 | -90.98 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1842.60 | -90.84 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1842.80 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1843.00 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1843.20 | -90.8 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1843.40 | -91.08 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1843.60 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1843.80 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1844.00 | -90.39 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1844.20 | -90.63 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1844.40 | -90.63 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1844.60 | -90.57 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1844.80 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1845.00 | -90.48 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1845.20 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1845.40 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1845.60 | -91.05 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1845.80 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1846.00 | -90.86 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1846.20 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1846.40 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1846.60 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1846.80 | -90.94 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1847.00 | -90.66 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1847.20 | -90.37 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1847.40 | -91.16 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1847.60 | -91.06 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1847.80 | -90.94 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1848.00 | -90.38 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1848.20 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1848.40 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1848.60 | -90.72 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1848.80 | -91 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1849.00 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1849.20 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1849.40 | -90.93 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1849.60 | -91.09 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1849.80 | -90.8 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1850.00 | -90.55 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1850.20 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1850.40 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1850.60 | -90.64 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1850.80 | -90.99 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1851.00 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1851.20 | -90.97 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1851.40 | -90.8 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1851.60 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1851.80 | -90.69 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1852.00 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1852.20 | -90.77 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1852.40 | -90.77 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1852.60 | -90.34 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1852.80 | -90.68 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1853.00 | -90.58 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1853.20 | -90.88 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1853.40 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1853.60 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1853.80 | -90.79 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1854.00 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1854.20 | -90.57 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1854.40 | -90.63 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1854.60 | -90.77 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1854.80 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1855.00 | -90.72 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1855.20 | -90.6 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1855.40 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1855.60 | -90.9 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1855.80 | -90.63 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1856.00 | -90.51 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1856.20 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1856.40 | -90.53 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1856.60 | -90.55 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1856.80 | -91.03 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1857.00 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1857.20 | -90.73 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1857.40 | -90.99 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1857.60 | -90.64 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1857.80 | -90.97 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1858.00 | -90.36 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1858.20 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1858.40 | -90.52 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1858.60 | -90.58 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1858.80 | -90.53 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1859.00 | -90.59 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1859.20 | -90.64 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1859.40 | -90.73 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1859.60 | -90.68 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1859.80 | -90.89 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1860.00 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1860.20 | -90.95 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1860.40 | -91.16 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1860.60 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1860.80 | -90.79 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1861.00 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1861.20 | -90.87 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1861.40 | -90.25 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1861.60 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1861.80 | -90.83 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1862.00 | -90.85 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1862.20 | -90.53 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1862.40 | -90.8 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1862.60 | -90.98 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1862.80 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1863.00 | -90.37 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1863.20 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1863.40 | -90.34 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1863.60 | -90.86 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1863.80 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1864.00 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1864.20 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1864.40 | -90.46 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1864.60 | -90.64 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1864.80 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1865.00 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1865.20 | -90.51 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1865.40 | -90.48 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1865.60 | -90.92 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1865.80 | -90.9 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1866.00 | -90.42 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1866.20 | -90.6 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1866.40 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1866.60 | -90.94 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1866.80 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1867.00 | -90.39 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1867.20 | -90.67 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1867.40 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1867.60 | -90.44 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1867.80 | -90.54 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1868.00 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1868.20 | -90.62 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1868.40 | -90.32 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1868.60 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1868.80 | -90.42 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1869.00 | -90.84 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1869.20 | -90.94 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1869.40 | -91.02 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1869.60 | -90.32 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1869.80 | -90.64 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1870.00 | -90.71 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1870.20 | -90.4 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1870.40 | -90.55 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1870.60 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1870.80 | -90.58 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1871.00 | -90.52 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1871.20 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1871.40 | -90.54 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1871.60 | -90.48 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1871.80 | -90.63 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1872.00 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1872.20 | -90.77 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1872.40 | -90.65 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1872.60 | -90.77 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1872.80 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1873.00 | -90.6 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1873.20 | -90.82 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1873.40 | -90.43 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1873.60 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1873.80 | -90.72 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1874.00 | -90.79 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1874.20 | -90.59 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1874.40 | -90.47 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1874.60 | -90.58 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1874.80 | -90.76 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1875.00 | -90.4 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1875.20 | -90.66 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1875.40 | -90.58 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1875.60 | -90.68 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1875.80 | -90.39 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1876.00 | -90.8 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1876.20 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1876.40 | -90.7 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1876.60 | -90.75 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1876.80 | -90.51 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1877.00 | -90.74 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1877.20 | -90.81 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1877.40 | -90.51 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1877.60 | -90.78 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1877.80 | -90.48 | -71 | PASS |

| | | | | | | | | |
|----------|-----|--------|---------|-----|---------|--------|-----|------|
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1878.00 | -90.46 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1878.20 | -90.61 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1878.40 | -90.47 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1878.60 | -90.45 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1878.80 | -90.84 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1879.00 | -90.43 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1879.20 | -90.56 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1879.40 | -90.26 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1879.60 | -90.66 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1879.80 | -90.17 | -71 | PASS |
| GPRS1800 | 885 | 1784.8 | 3;3;3;3 | 100 | 1880.00 | -90.84 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 925.00 | -93.73 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 925.20 | -93.56 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 925.40 | -93.72 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 925.60 | -93.86 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 925.80 | -93.81 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 926.00 | -93.65 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 926.20 | -93.69 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 926.40 | -93.53 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 926.60 | -93.92 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 926.80 | -93.8 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 927.00 | -93.79 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 927.20 | -93.71 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 927.40 | -93.81 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 927.60 | -93.7 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 927.80 | -93.71 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 928.00 | -93.58 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 928.20 | -93.73 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 928.40 | -93.73 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 928.60 | -93.58 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 928.80 | -93.77 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 929.00 | -93.81 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 929.20 | -93.68 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 929.40 | -93.82 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 929.60 | -93.64 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 929.80 | -93.79 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 930.00 | -93.68 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 930.20 | -93.6 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 930.40 | -93.89 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 930.60 | -93.76 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 930.80 | -93.77 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 931.00 | -93.62 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 931.20 | -93.7 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 931.40 | -93.75 | -67 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 931.60 | -93.49 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 931.80 | -93.72 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 932.00 | -93.59 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 932.20 | -93.67 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 932.40 | -93.62 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 932.60 | -93.62 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 932.80 | -93.67 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 933.00 | -93.53 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 933.20 | -93.73 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 933.40 | -93.89 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 933.60 | -93.7 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 933.80 | -93.79 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 934.00 | -93.79 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 934.20 | -93.74 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 934.40 | -93.54 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 934.60 | -93.62 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 934.80 | -93.6 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 935.00 | -93.73 | -67 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 935.00 | -93.71 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 935.20 | -93.77 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 935.40 | -93.82 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 935.60 | -93.7 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 935.80 | -93.64 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 936.00 | -93.68 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 936.20 | -93.5 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 936.40 | -93.66 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 936.60 | -93.69 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 936.80 | -93.72 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 937.00 | -93.67 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 937.20 | -93.67 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 937.40 | -93.69 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 937.60 | -93.61 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 937.80 | -93.66 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 938.00 | -93.63 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 938.20 | -93.74 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 938.40 | -93.87 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 938.60 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 938.80 | -93.85 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 939.00 | -93.82 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 939.20 | -93.7 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 939.40 | -93.6 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 939.60 | -93.51 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 939.80 | -93.62 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 940.00 | -93.74 | -79 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 940.20 | -93.58 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 940.40 | -93.65 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 940.60 | -93.95 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 940.80 | -93.82 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 941.00 | -93.63 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 941.20 | -93.78 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 941.40 | -93.65 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 941.60 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 941.80 | -93.86 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 942.00 | -93.77 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 942.20 | -93.77 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 942.40 | -93.65 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 942.60 | -93.83 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 942.80 | -93.87 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 943.00 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 943.20 | -93.66 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 943.40 | -93.66 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 943.60 | -93.69 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 943.80 | -93.6 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 944.00 | -93.67 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 944.20 | -93.84 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 944.40 | -93.7 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 944.60 | -93.61 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 944.80 | -93.78 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 945.00 | -93.73 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 945.20 | -93.41 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 945.40 | -93.85 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 945.60 | -93.68 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 945.80 | -93.76 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 946.00 | -93.81 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 946.20 | -93.7 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 946.40 | -93.68 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 946.60 | -93.9 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 946.80 | -93.67 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 947.00 | -93.86 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 947.20 | -93.73 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 947.40 | -93.68 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 947.60 | -93.9 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 947.80 | -93.81 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 948.00 | -93.71 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 948.20 | -93.9 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 948.40 | -93.85 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 948.60 | -93.72 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 948.80 | -93.92 | -79 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 949.00 | -93.71 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 949.20 | -93.76 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 949.40 | -93.65 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 949.60 | -93.82 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 949.80 | -93.6 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 950.00 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 950.20 | -93.89 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 950.40 | -93.86 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 950.60 | -93.73 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 950.80 | -93.88 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 951.00 | -93.82 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 951.20 | -93.69 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 951.40 | -93.66 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 951.60 | -93.81 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 951.80 | -93.96 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 952.00 | -93.8 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 952.20 | -93.87 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 952.40 | -93.65 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 952.60 | -93.89 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 952.80 | -93.85 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 953.00 | -93.87 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 953.20 | -93.88 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 953.40 | -93.81 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 953.60 | -93.95 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 953.80 | -93.91 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 954.00 | -93.69 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 954.20 | -93.96 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 954.40 | -93.77 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 954.60 | -93.91 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 954.80 | -93.89 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 955.00 | -93.9 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 955.20 | -93.85 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 955.40 | -93.83 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 955.60 | -93.84 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 955.80 | -93.87 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 956.00 | -93.86 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 956.20 | -94.04 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 956.40 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 956.60 | -93.91 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 956.80 | -93.83 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 957.00 | -93.84 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 957.20 | -93.78 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 957.40 | -93.97 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 957.60 | -93.86 | -79 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 957.80 | -93.86 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 958.00 | -93.67 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 958.20 | -93.97 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 958.40 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 958.60 | -94.04 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 958.80 | -93.87 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 959.00 | -93.85 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 959.20 | -93.84 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 959.40 | -93.79 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 959.60 | -93.89 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 959.80 | -93.92 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 960.00 | -93.99 | -79 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1805.00 | -93.55 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1805.20 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1805.40 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1805.60 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1805.80 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1806.00 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1806.20 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1806.40 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1806.60 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1806.80 | -93.45 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1807.00 | -93.64 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1807.20 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1807.40 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1807.60 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1807.80 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1808.00 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1808.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1808.40 | -93.52 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1808.60 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1808.80 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1809.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1809.20 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1809.40 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1809.60 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1809.80 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1810.00 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1810.20 | -93.52 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1810.40 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1810.60 | -93.68 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1810.80 | -93.67 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1811.00 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1811.20 | -93.49 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1811.40 | -93.6 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1811.60 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1811.80 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1812.00 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1812.20 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1812.40 | -93.68 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1812.60 | -93.45 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1812.80 | -93.56 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1813.00 | -93.58 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1813.20 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1813.40 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1813.60 | -93.63 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1813.80 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1814.00 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1814.20 | -93.72 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1814.40 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1814.60 | -93.63 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1814.80 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1815.00 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1815.20 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1815.40 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1815.60 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1815.80 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1816.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1816.20 | -93.45 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1816.40 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1816.60 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1816.80 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1817.00 | -93.35 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1817.20 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1817.40 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1817.60 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1817.80 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1818.00 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1818.20 | -93.55 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1818.40 | -93.63 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1818.60 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1818.80 | -93.52 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1819.00 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1819.20 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1819.40 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1819.60 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1819.80 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1820.00 | -93.45 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1820.20 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1820.40 | -93.58 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1820.60 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1820.80 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1821.00 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1821.20 | -93.69 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1821.40 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1821.60 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1821.80 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1822.00 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1822.20 | -93.61 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1822.40 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1822.60 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1822.80 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1823.00 | -93.65 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1823.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1823.40 | -93.64 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1823.60 | -93.45 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1823.80 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1824.00 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1824.20 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1824.40 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1824.60 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1824.80 | -93.64 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1825.00 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1825.20 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1825.40 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1825.60 | -93.63 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1825.80 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1826.00 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1826.20 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1826.40 | -93.7 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1826.60 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1826.80 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1827.00 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1827.20 | -93.69 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1827.40 | -93.65 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1827.60 | -93.61 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1827.80 | -93.6 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1828.00 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1828.20 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1828.40 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1828.60 | -93.35 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1828.80 | -93.49 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1829.00 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1829.20 | -93.56 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1829.40 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1829.60 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1829.80 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1830.00 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1830.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1830.40 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1830.60 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1830.80 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1831.00 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1831.20 | -93.55 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1831.40 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1831.60 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1831.80 | -93.63 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1832.00 | -93.64 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1832.20 | -93.61 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1832.40 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1832.60 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1832.80 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1833.00 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1833.20 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1833.40 | -93.58 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1833.60 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1833.80 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1834.00 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1834.20 | -93.64 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1834.40 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1834.60 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1834.80 | -93.34 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1835.00 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1835.20 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1835.40 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1835.60 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1835.80 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1836.00 | -93.52 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1836.20 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1836.40 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1836.60 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1836.80 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1837.00 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1837.20 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1837.40 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1837.60 | -93.42 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1837.80 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1838.00 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1838.20 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1838.40 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1838.60 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1838.80 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1839.00 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1839.20 | -93.61 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1839.40 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1839.60 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1839.80 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1840.00 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1840.20 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1840.40 | -93.63 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1840.60 | -93.62 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1840.80 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1841.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1841.20 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1841.40 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1841.60 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1841.80 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1842.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1842.20 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1842.40 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1842.60 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1842.80 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1843.00 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1843.20 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1843.40 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1843.60 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1843.80 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1844.00 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1844.20 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1844.40 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1844.60 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1844.80 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1845.00 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1845.20 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1845.40 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1845.60 | -93.27 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1845.80 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1846.00 | -93.58 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1846.20 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1846.40 | -93.47 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1846.60 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1846.80 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1847.00 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1847.20 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1847.40 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1847.60 | -93.22 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1847.80 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1848.00 | -93.56 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1848.20 | -93.28 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1848.40 | -93.51 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1848.60 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1848.80 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1849.00 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1849.20 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1849.40 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1849.60 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1849.80 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1850.00 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1850.20 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1850.40 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1850.60 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1850.80 | -93.54 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1851.00 | -93.24 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1851.20 | -93.6 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1851.40 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1851.60 | -93.57 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1851.80 | -93.61 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1852.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1852.20 | -93.27 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1852.40 | -93.59 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1852.60 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1852.80 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1853.00 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1853.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1853.40 | -93.49 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1853.60 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1853.80 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1854.00 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1854.20 | -93.19 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1854.40 | -93.27 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1854.60 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1854.80 | -93.55 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1855.00 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1855.20 | -93.46 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1855.40 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1855.60 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1855.80 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1856.00 | -93.5 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1856.20 | -93.34 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1856.40 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1856.60 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1856.80 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1857.00 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1857.20 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1857.40 | -93.29 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1857.60 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1857.80 | -93.21 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1858.00 | -93.45 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1858.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1858.40 | -93.48 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1858.60 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1858.80 | -93.34 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1859.00 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1859.20 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1859.40 | -93.52 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1859.60 | -93.46 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1859.80 | -93.17 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1860.00 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1860.20 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1860.40 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1860.60 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1860.80 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1861.00 | -93.53 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1861.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1861.40 | -93.35 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1861.60 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1861.80 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1862.00 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1862.20 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1862.40 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1862.60 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1862.80 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1863.00 | -93.52 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1863.20 | -93.25 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1863.40 | -93.35 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1863.60 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1863.80 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1864.00 | -93.4 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1864.20 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1864.40 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1864.60 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1864.80 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1865.00 | -93.47 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1865.20 | -93.4 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1865.40 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1865.60 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1865.80 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1866.00 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1866.20 | -93.08 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1866.40 | -93.35 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1866.60 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1866.80 | -93.2 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1867.00 | -93.23 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1867.20 | -93.23 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1867.40 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1867.60 | -93.23 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1867.80 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1868.00 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1868.20 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1868.40 | -93.55 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1868.60 | -93.26 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1868.80 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1869.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1869.20 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1869.40 | -93.23 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1869.60 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1869.80 | -93.45 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1870.00 | -93.11 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1870.20 | -93.17 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1870.40 | -93.16 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1870.60 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1870.80 | -93.44 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1871.00 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1871.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1871.40 | -93.2 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1871.60 | -93.04 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1871.80 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1872.00 | -93.22 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1872.20 | -93.43 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1872.40 | -93.17 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1872.60 | -93.38 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1872.80 | -93.35 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1873.00 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1873.20 | -93.31 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1873.40 | -93.13 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1873.60 | -93.19 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1873.80 | -93.24 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1874.00 | -93.33 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1874.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1874.40 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1874.60 | -93.24 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1874.80 | -93.28 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1875.00 | -93.25 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1875.20 | -93.37 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1875.40 | -93.13 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1875.60 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1875.80 | -93.23 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1876.00 | -93.39 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1876.20 | -93.27 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1876.40 | -93.36 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1876.60 | -93.32 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1876.80 | -93.12 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1877.00 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1877.20 | -93.09 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1877.40 | -93.08 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1877.60 | -93.05 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1877.80 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1878.00 | -93.22 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1878.20 | -93.13 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1878.40 | -93.16 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1878.60 | -93.16 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1878.80 | -93.13 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1879.00 | -93.41 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1879.20 | -93.23 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1879.40 | -93.3 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1879.60 | -93.22 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1879.80 | -93.42 | -71 | PASS |
| GPRS900 | 975 | 880.2 | 3;3;3;3 | 100 | 1880.00 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 925.00 | -93.54 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 925.20 | -93.37 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 925.40 | -93.45 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 925.60 | -93.59 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 925.80 | -93.55 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 926.00 | -93.58 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 926.20 | -93.52 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 926.40 | -93.58 | -67 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 926.60 | -93.68 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 926.80 | -93.8 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 927.00 | -93.61 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 927.20 | -93.79 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 927.40 | -93.66 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 927.60 | -93.6 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 927.80 | -93.67 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 928.00 | -93.63 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 928.20 | -93.51 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 928.40 | -93.84 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 928.60 | -93.63 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 928.80 | -93.68 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 929.00 | -93.67 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 929.20 | -93.56 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 929.40 | -93.69 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 929.60 | -93.64 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 929.80 | -93.59 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 930.00 | -93.56 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 930.20 | -93.65 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 930.40 | -93.73 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 930.60 | -93.77 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 930.80 | -93.63 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 931.00 | -93.65 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 931.20 | -93.6 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 931.40 | -93.76 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 931.60 | -93.65 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 931.80 | -93.68 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 932.00 | -93.89 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 932.20 | -93.75 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 932.40 | -93.58 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 932.60 | -93.62 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 932.80 | -93.89 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 933.00 | -93.57 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 933.20 | -93.63 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 933.40 | -93.85 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 933.60 | -93.79 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 933.80 | -93.85 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 934.00 | -93.64 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 934.20 | -93.72 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 934.40 | -93.78 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 934.60 | -93.66 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 934.80 | -93.95 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 935.00 | -93.66 | -67 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 935.00 | -93.65 | -79 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 935.20 | -93.89 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 935.40 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 935.60 | -93.79 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 935.80 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 936.00 | -93.96 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 936.20 | -93.84 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 936.40 | -93.63 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 936.60 | -93.59 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 936.80 | -93.92 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 937.00 | -93.77 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 937.20 | -93.82 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 937.40 | -93.81 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 937.60 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 937.80 | -93.62 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 938.00 | -93.76 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 938.20 | -93.65 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 938.40 | -93.8 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 938.60 | -93.56 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 938.80 | -93.7 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 939.00 | -93.84 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 939.20 | -93.9 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 939.40 | -93.77 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 939.60 | -93.87 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 939.80 | -93.82 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 940.00 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 940.20 | -93.67 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 940.40 | -93.81 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 940.60 | -93.74 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 940.80 | -93.81 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 941.00 | -93.71 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 941.20 | -93.64 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 941.40 | -93.93 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 941.60 | -93.89 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 941.80 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 942.00 | -93.62 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 942.20 | -94 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 942.40 | -93.8 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 942.60 | -93.79 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 942.80 | -93.94 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 943.00 | -93.74 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 943.20 | -93.85 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 943.40 | -93.97 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 943.60 | -93.86 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 943.80 | -93.91 | -79 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 944.00 | -93.69 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 944.20 | -93.67 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 944.40 | -93.64 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 944.60 | -93.85 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 944.80 | -93.82 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 945.00 | -93.85 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 945.20 | -93.78 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 945.40 | -93.81 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 945.60 | -93.77 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 945.80 | -93.66 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 946.00 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 946.20 | -93.69 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 946.40 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 946.60 | -93.85 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 946.80 | -93.91 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 947.00 | -93.73 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 947.20 | -93.61 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 947.40 | -93.79 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 947.60 | -93.67 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 947.80 | -93.7 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 948.00 | -93.74 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 948.20 | -93.88 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 948.40 | -93.74 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 948.60 | -93.71 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 948.80 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 949.00 | -93.84 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 949.20 | -93.76 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 949.40 | -93.83 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 949.60 | -93.73 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 949.80 | -93.56 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 950.00 | -93.79 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 950.20 | -93.87 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 950.40 | -93.77 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 950.60 | -93.84 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 950.80 | -93.67 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 951.00 | -93.89 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 951.20 | -93.76 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 951.40 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 951.60 | -93.67 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 951.80 | -93.87 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 952.00 | -93.73 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 952.20 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 952.40 | -93.59 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 952.60 | -93.79 | -79 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 952.80 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 953.00 | -93.83 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 953.20 | -93.77 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 953.40 | -93.56 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 953.60 | -93.72 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 953.80 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 954.00 | -93.71 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 954.20 | -93.78 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 954.40 | -93.69 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 954.60 | -93.65 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 954.80 | -93.5 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 955.00 | -93.77 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 955.20 | -93.86 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 955.40 | -93.61 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 955.60 | -93.57 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 955.80 | -93.7 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 956.00 | -93.79 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 956.20 | -93.89 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 956.40 | -93.89 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 956.60 | -93.81 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 956.80 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 957.00 | -93.8 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 957.20 | -93.87 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 957.40 | -93.86 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 957.60 | -93.84 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 957.80 | -93.82 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 958.00 | -93.75 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 958.20 | -93.76 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 958.40 | -93.92 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 958.60 | -93.65 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 958.80 | -93.69 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 959.00 | -93.93 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 959.20 | -93.89 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 959.40 | -93.88 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 959.60 | -93.91 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 959.80 | -93.79 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 960.00 | -93.7 | -79 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1805.00 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1805.20 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1805.40 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1805.60 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1805.80 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1806.00 | -93.61 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1806.20 | -93.59 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1806.40 | -93.65 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1806.60 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1806.80 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1807.00 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1807.20 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1807.40 | -93.27 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1807.60 | -93.21 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1807.80 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1808.00 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1808.20 | -93.6 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1808.40 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1808.60 | -93.59 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1808.80 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1809.00 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1809.20 | -93.62 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1809.40 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1809.60 | -93.63 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1809.80 | -93.6 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1810.00 | -93.62 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1810.20 | -93.65 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1810.40 | -93.5 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1810.60 | -93.61 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1810.80 | -93.38 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1811.00 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1811.20 | -93.49 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1811.40 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1811.60 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1811.80 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1812.00 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1812.20 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1812.40 | -93.6 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1812.60 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1812.80 | -93.68 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1813.00 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1813.20 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1813.40 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1813.60 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1813.80 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1814.00 | -93.49 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1814.20 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1814.40 | -93.3 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1814.60 | -93.67 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1814.80 | -93.49 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1815.00 | -93.56 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1815.20 | -93.58 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1815.40 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1815.60 | -93.64 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1815.80 | -93.66 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1816.00 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1816.20 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1816.40 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1816.60 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1816.80 | -93.64 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1817.00 | -93.38 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1817.20 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1817.40 | -93.64 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1817.60 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1817.80 | -93.64 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1818.00 | -93.57 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1818.20 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1818.40 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1818.60 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1818.80 | -93.6 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1819.00 | -93.61 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1819.20 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1819.40 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1819.60 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1819.80 | -93.61 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1820.00 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1820.20 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1820.40 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1820.60 | -93.66 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1820.80 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1821.00 | -93.63 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1821.20 | -93.6 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1821.40 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1821.60 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1821.80 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1822.00 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1822.20 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1822.40 | -93.57 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1822.60 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1822.80 | -93.69 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1823.00 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1823.20 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1823.40 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1823.60 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1823.80 | -93.53 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1824.00 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1824.20 | -93.25 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1824.40 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1824.60 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1824.80 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1825.00 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1825.20 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1825.40 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1825.60 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1825.80 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1826.00 | -93.59 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1826.20 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1826.40 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1826.60 | -93.61 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1826.80 | -93.38 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1827.00 | -93.38 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1827.20 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1827.40 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1827.60 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1827.80 | -93.57 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1828.00 | -93.5 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1828.20 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1828.40 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1828.60 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1828.80 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1829.00 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1829.20 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1829.40 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1829.60 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1829.80 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1830.00 | -93.63 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1830.20 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1830.40 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1830.60 | -93.61 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1830.80 | -93.32 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1831.00 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1831.20 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1831.40 | -93.24 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1831.60 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1831.80 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1832.00 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1832.20 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1832.40 | -93.62 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1832.60 | -93.49 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1832.80 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1833.00 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1833.20 | -93.32 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1833.40 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1833.60 | -93.68 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1833.80 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1834.00 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1834.20 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1834.40 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1834.60 | -93.32 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1834.80 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1835.00 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1835.20 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1835.40 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1835.60 | -93.25 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1835.80 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1836.00 | -93.3 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1836.20 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1836.40 | -93.62 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1836.60 | -93.64 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1836.80 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1837.00 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1837.20 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1837.40 | -93.3 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1837.60 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1837.80 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1838.00 | -93.28 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1838.20 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1838.40 | -93.58 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1838.60 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1838.80 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1839.00 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1839.20 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1839.40 | -93.56 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1839.60 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1839.80 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1840.00 | -93.28 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1840.20 | -93.53 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1840.40 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1840.60 | -93.57 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1840.80 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1841.00 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1841.20 | -93.5 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1841.40 | -93.3 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1841.60 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1841.80 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1842.00 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1842.20 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1842.40 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1842.60 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1842.80 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1843.00 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1843.20 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1843.40 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1843.60 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1843.80 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1844.00 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1844.20 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1844.40 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1844.60 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1844.80 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1845.00 | -93.51 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1845.20 | -93.5 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1845.40 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1845.60 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1845.80 | -93.38 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1846.00 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1846.20 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1846.40 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1846.60 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1846.80 | -93.41 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1847.00 | -93.49 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1847.20 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1847.40 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1847.60 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1847.80 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1848.00 | -93.38 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1848.20 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1848.40 | -93.24 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1848.60 | -93.48 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1848.80 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1849.00 | -93.31 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1849.20 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1849.40 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1849.60 | -93.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1849.80 | -93.5 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1850.00 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1850.20 | -93.44 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1850.40 | -93.59 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1850.60 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1850.80 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1851.00 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1851.20 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1851.40 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1851.60 | -93.6 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1851.80 | -93.23 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1852.00 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1852.20 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1852.40 | -93.24 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1852.60 | -93.47 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1852.80 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1853.00 | -93.19 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1853.20 | -93.54 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1853.40 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1853.60 | -93.52 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1853.80 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1854.00 | -93.43 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1854.20 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1854.40 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1854.60 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1854.80 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1855.00 | -93.44 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1855.20 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1855.40 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1855.60 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1855.80 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1856.00 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1856.20 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1856.40 | -93.4 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1856.60 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1856.80 | -93.31 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1857.00 | -93.32 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1857.20 | -93.46 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1857.40 | -93.35 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1857.60 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1857.80 | -93.39 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1858.00 | -93.24 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1858.20 | -93.23 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1858.40 | -93.25 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1858.60 | -93.31 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1858.80 | -93.45 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1859.00 | -93.23 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1859.20 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1859.40 | -93.31 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1859.60 | -93.07 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1859.80 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1860.00 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1860.20 | -93.27 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1860.40 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1860.60 | -93.21 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1860.80 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1861.00 | -93.06 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1861.20 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1861.40 | -92.96 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1861.60 | -93.2 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1861.80 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1862.00 | -93.21 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1862.20 | -93.33 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1862.40 | -93.24 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1862.60 | -93.34 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1862.80 | -93.01 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1863.00 | -93.32 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1863.20 | -93.22 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1863.40 | -93.22 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1863.60 | -93.17 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1863.80 | -93.28 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1864.00 | -93.12 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1864.20 | -93.22 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1864.40 | -93.37 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1864.60 | -93.14 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1864.80 | -93.36 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1865.00 | -93.42 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1865.20 | -93.21 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1865.40 | -93.16 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1865.60 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1865.80 | -93.24 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1866.00 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1866.20 | -93.19 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1866.40 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1866.60 | -92.89 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1866.80 | -92.94 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1867.00 | -92.86 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1867.20 | -93.01 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1867.40 | -93.18 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1867.60 | -93.01 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1867.80 | -92.91 | -71 | PASS |

| | | | | | | | | |
|---------|----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1868.00 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1868.20 | -93.04 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1868.40 | -93.27 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1868.60 | -93.22 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1868.80 | -93.17 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1869.00 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1869.20 | -93.29 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1869.40 | -93.2 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1869.60 | -93.15 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1869.80 | -93.19 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1870.00 | -93.04 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1870.20 | -93.03 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1870.40 | -92.95 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1870.60 | -93.07 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1870.80 | -93.08 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1871.00 | -93.05 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1871.20 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1871.40 | -93.1 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1871.60 | -92.97 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1871.80 | -93.09 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1872.00 | -93.2 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1872.20 | -93.25 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1872.40 | -92.82 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1872.60 | -92.55 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1872.80 | -92.69 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1873.00 | -92.77 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1873.20 | -92.83 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1873.40 | -92.99 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1873.60 | -92.76 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1873.80 | -92.89 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1874.00 | -92.68 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1874.20 | -93.12 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1874.40 | -93.22 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1874.60 | -92.88 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1874.80 | -92.88 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1875.00 | -93.21 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1875.20 | -93.18 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1875.40 | -93.09 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1875.60 | -93.1 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1875.80 | -93.13 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1876.00 | -93.18 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1876.20 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1876.40 | -93.19 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1876.60 | -93.27 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1876.80 | -93.15 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1877.00 | -92.97 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1877.20 | -93.04 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1877.40 | -93.16 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1877.60 | -93.19 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1877.80 | -93.11 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1878.00 | -93.21 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1878.20 | -93.17 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1878.40 | -93.09 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1878.60 | -92.99 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1878.80 | -93.17 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1879.00 | -93.27 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1879.20 | -93.26 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1879.40 | -93.2 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1879.60 | -93.25 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1879.80 | -93.2 | -71 | PASS |
| GPRS900 | 38 | 897.6 | 3;3;3;3 | 100 | 1880.00 | -93.18 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 925.00 | -93.62 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 925.20 | -93.59 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 925.40 | -93.79 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 925.60 | -93.67 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 925.80 | -93.63 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 926.00 | -93.55 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 926.20 | -93.65 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 926.40 | -93.66 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 926.60 | -93.8 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 926.80 | -93.43 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 927.00 | -93.54 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 927.20 | -93.76 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 927.40 | -93.76 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 927.60 | -93.78 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 927.80 | -93.75 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 928.00 | -93.65 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 928.20 | -93.55 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 928.40 | -93.52 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 928.60 | -93.63 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 928.80 | -93.66 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 929.00 | -93.5 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 929.20 | -93.79 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 929.40 | -93.59 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 929.60 | -93.76 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 929.80 | -93.62 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 930.00 | -93.63 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 930.20 | -93.74 | -67 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 930.40 | -93.66 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 930.60 | -93.61 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 930.80 | -93.64 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 931.00 | -93.5 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 931.20 | -93.7 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 931.40 | -93.78 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 931.60 | -93.61 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 931.80 | -93.62 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 932.00 | -93.6 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 932.20 | -93.62 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 932.40 | -93.48 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 932.60 | -93.78 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 932.80 | -93.63 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 933.00 | -93.66 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 933.20 | -93.56 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 933.40 | -93.7 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 933.60 | -93.71 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 933.80 | -93.72 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 934.00 | -93.73 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 934.20 | -93.65 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 934.40 | -93.66 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 934.60 | -93.81 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 934.80 | -93.89 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 935.00 | -93.68 | -67 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 935.00 | -93.63 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 935.20 | -93.64 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 935.40 | -93.65 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 935.60 | -93.84 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 935.80 | -93.63 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 936.00 | -93.72 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 936.20 | -93.87 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 936.40 | -93.71 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 936.60 | -93.61 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 936.80 | -93.69 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 937.00 | -93.74 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 937.20 | -93.7 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 937.40 | -93.87 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 937.60 | -93.74 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 937.80 | -93.99 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 938.00 | -93.74 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 938.20 | -93.63 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 938.40 | -93.72 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 938.60 | -93.74 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 938.80 | -93.57 | -79 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 939.00 | -93.64 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 939.20 | -93.68 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 939.40 | -93.88 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 939.60 | -93.71 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 939.80 | -93.52 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 940.00 | -93.7 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 940.20 | -93.6 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 940.40 | -93.83 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 940.60 | -93.64 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 940.80 | -93.59 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 941.00 | -93.64 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 941.20 | -93.83 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 941.40 | -93.81 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 941.60 | -93.78 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 941.80 | -93.7 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 942.00 | -93.65 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 942.20 | -93.62 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 942.40 | -93.56 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 942.60 | -93.82 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 942.80 | -93.83 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 943.00 | -93.6 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 943.20 | -93.59 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 943.40 | -93.68 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 943.60 | -93.73 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 943.80 | -93.8 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 944.00 | -93.65 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 944.20 | -89.5 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 944.40 | -93.78 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 944.60 | -93.83 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 944.80 | -93.76 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 945.00 | -93.9 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 945.20 | -93.76 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 945.40 | -92.3 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 945.60 | -93.72 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 945.80 | -93.72 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 946.00 | -93.76 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 946.20 | -93.74 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 946.40 | -90.06 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 946.60 | -93.77 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 946.80 | -93.87 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 947.00 | -93.64 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 947.20 | -93.79 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 947.40 | -93.84 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 947.60 | -93.68 | -79 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|--------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 947.80 | -93.62 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 948.00 | -93.76 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 948.20 | -93.7 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 948.40 | -93.67 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 948.60 | -93.63 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 948.80 | -93.72 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 949.00 | -93.75 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 949.20 | -93.7 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 949.40 | -93.66 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 949.60 | -93.67 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 949.80 | -93.75 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 950.00 | -93.94 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 950.20 | -93.96 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 950.40 | -93.71 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 950.60 | -93.79 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 950.80 | -93.89 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 951.00 | -93.83 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 951.20 | -93.76 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 951.40 | -93.82 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 951.60 | -93.92 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 951.80 | -93.83 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 952.00 | -93.89 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 952.20 | -93.9 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 952.40 | -93.71 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 952.60 | -93.82 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 952.80 | -93.77 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 953.00 | -93.89 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 953.20 | -93.73 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 953.40 | -93.84 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 953.60 | -93.77 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 953.80 | -93.64 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 954.00 | -93.81 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 954.20 | -93.67 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 954.40 | -93.79 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 954.60 | -93.93 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 954.80 | -93.76 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 955.00 | -93.79 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 955.20 | -93.84 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 955.40 | -93.85 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 955.60 | -93.72 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 955.80 | -93.87 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 956.00 | -93.91 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 956.20 | -93.79 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 956.40 | -94.01 | -79 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 956.60 | -93.67 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 956.80 | -93.65 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 957.00 | -93.74 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 957.20 | -93.67 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 957.40 | -93.89 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 957.60 | -93.7 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 957.80 | -93.88 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 958.00 | -93.87 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 958.20 | -93.96 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 958.40 | -93.86 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 958.60 | -93.85 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 958.80 | -93.88 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 959.00 | -93.65 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 959.20 | -93.99 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 959.40 | -93.86 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 959.60 | -93.79 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 959.80 | -93.92 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 960.00 | -93.89 | -79 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1805.00 | -93.61 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1805.20 | -93.68 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1805.40 | -93.5 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1805.60 | -93.56 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1805.80 | -93.58 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1806.00 | -93.09 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1806.20 | -93.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1806.40 | -92.95 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1806.60 | -92.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1806.80 | -93.06 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1807.00 | -92.79 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1807.20 | -93.22 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1807.40 | -93.31 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1807.60 | -92.85 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1807.80 | -92.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1808.00 | -92.67 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1808.20 | -92.6 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1808.40 | -92.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1808.60 | -92.69 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1808.80 | -92.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1809.00 | -90.17 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1809.20 | -92.53 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1809.40 | -92.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1809.60 | -92.57 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1809.80 | -91.97 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1810.00 | -92.46 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1810.20 | -91.94 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1810.40 | -92.06 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1810.60 | -91.62 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1810.80 | -91.89 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1811.00 | -92.06 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1811.20 | -92.11 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1811.40 | -91.63 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1811.60 | -91.67 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1811.80 | -91.2 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1812.00 | -90.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1812.20 | -91.77 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1812.40 | -91.75 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1812.60 | -91.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1812.80 | -91.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1813.00 | -90.73 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1813.20 | -92.03 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1813.40 | -90.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1813.60 | -89.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1813.80 | -89.05 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1814.00 | -89.67 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1814.20 | -89.84 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1814.40 | -90.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1814.60 | -90.86 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1814.80 | -90.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1815.00 | -90.6 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1815.20 | -90.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1815.40 | -91.01 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1815.60 | -90.5 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1815.80 | -90.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1816.00 | -90.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1816.20 | -90.07 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1816.40 | -90.84 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1816.60 | -91.11 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1816.80 | -90.94 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1817.00 | -91.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1817.20 | -92.04 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1817.40 | -91.63 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1817.60 | -92.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1817.80 | -92.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1818.00 | -91.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1818.20 | -90.76 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1818.40 | -90.84 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1818.60 | -90.63 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1818.80 | -90.43 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1819.00 | -91.87 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1819.20 | -91.13 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1819.40 | -91.6 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1819.60 | -91.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1819.80 | -91.77 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1820.00 | -92.55 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1820.20 | -92.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1820.40 | -91.66 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1820.60 | -91.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1820.80 | -90.81 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1821.00 | -90.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1821.20 | -91.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1821.40 | -91.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1821.60 | -91.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1821.80 | -91.11 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1822.00 | -91.22 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1822.20 | -90.94 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1822.40 | -90.39 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1822.60 | -90.94 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1822.80 | -89.89 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1823.00 | -90.8 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1823.20 | -90.62 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1823.40 | -91.08 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1823.60 | -90.95 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1823.80 | -91.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1824.00 | -91.54 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1824.20 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1824.40 | -93.62 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1824.60 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1824.80 | -93.47 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1825.00 | -93.49 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1825.20 | -93.44 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1825.40 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1825.60 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1825.80 | -93.69 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1826.00 | -93.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1826.20 | -93.44 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1826.40 | -93.49 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1826.60 | -93.35 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1826.80 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1827.00 | -93.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1827.20 | -93.54 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1827.40 | -93.47 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1827.60 | -93.54 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1827.80 | -93.49 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1828.00 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1828.20 | -92.72 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1828.40 | -93.62 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1828.60 | -93.56 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1828.80 | -93.54 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1829.00 | -93.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1829.20 | -93.5 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1829.40 | -93.15 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1829.60 | -93.53 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1829.80 | -93.61 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1830.00 | -93.53 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1830.20 | -93.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1830.40 | -93.38 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1830.60 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1830.80 | -93.52 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1831.00 | -93.35 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1831.20 | -93.66 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1831.40 | -93.7 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1831.60 | -93.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1831.80 | -93.65 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1832.00 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1832.20 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1832.40 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1832.60 | -93.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1832.80 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1833.00 | -93.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1833.20 | -93.49 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1833.40 | -93.57 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1833.60 | -93.6 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1833.80 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1834.00 | -93.54 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1834.20 | -93.49 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1834.40 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1834.60 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1834.80 | -93.52 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1835.00 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1835.20 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1835.40 | -93.56 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1835.60 | -93.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1835.80 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1836.00 | -93.61 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1836.20 | -93.44 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1836.40 | -93.44 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1836.60 | -93.52 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1836.80 | -93.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1837.00 | -93.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1837.20 | -93.39 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1837.40 | -93.31 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1837.60 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1837.80 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1838.00 | -93.5 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1838.20 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1838.40 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1838.60 | -93.47 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1838.80 | -93.63 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1839.00 | -93.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1839.20 | -93.62 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1839.40 | -93.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1839.60 | -93.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1839.80 | -93.53 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1840.00 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1840.20 | -93.58 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1840.40 | -93.35 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1840.60 | -93.59 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1840.80 | -93.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1841.00 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1841.20 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1841.40 | -93.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1841.60 | -93.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1841.80 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1842.00 | -93.6 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1842.20 | -93.53 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1842.40 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1842.60 | -93.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1842.80 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1843.00 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1843.20 | -93.56 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1843.40 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1843.60 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1843.80 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1844.00 | -93.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1844.20 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1844.40 | -93.57 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1844.60 | -93.42 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1844.80 | -93.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1845.00 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1845.20 | -93.32 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1845.40 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1845.60 | -93.35 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1845.80 | -93.59 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1846.00 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1846.20 | -93.61 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1846.40 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1846.60 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1846.80 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1847.00 | -93.45 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1847.20 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1847.40 | -93.55 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1847.60 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1847.80 | -93.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1848.00 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1848.20 | -93.49 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1848.40 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1848.60 | -93.39 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1848.80 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1849.00 | -93.39 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1849.20 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1849.40 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1849.60 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1849.80 | -93.38 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1850.00 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1850.20 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1850.40 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1850.60 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1850.80 | -93.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1851.00 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1851.20 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1851.40 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1851.60 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1851.80 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1852.00 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1852.20 | -93.47 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1852.40 | -93.23 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1852.60 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1852.80 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1853.00 | -93.31 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1853.20 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1853.40 | -93.47 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1853.60 | -93.44 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1853.80 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1854.00 | -93.4 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1854.20 | -93.56 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1854.40 | -93.15 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1854.60 | -93.46 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1854.80 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1855.00 | -93.38 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1855.20 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1855.40 | -93.23 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1855.60 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1855.80 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1856.00 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1856.20 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1856.40 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1856.60 | -93.31 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1856.80 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1857.00 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1857.20 | -93.58 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1857.40 | -93.23 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1857.60 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1857.80 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1858.00 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1858.20 | -93.52 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1858.40 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1858.60 | -93.23 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1858.80 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1859.00 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1859.20 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1859.40 | -93.62 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1859.60 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1859.80 | -93.48 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1860.00 | -93.47 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1860.20 | -93.44 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1860.40 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1860.60 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1860.80 | -93.5 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1861.00 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1861.20 | -93.31 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1861.40 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1861.60 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1861.80 | -93.19 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1862.00 | -93.35 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1862.20 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1862.40 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1862.60 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1862.80 | -93.3 | -71 | PASS |


| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1863.00 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1863.20 | -93.41 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1863.40 | -93.16 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1863.60 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1863.80 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1864.00 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1864.20 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1864.40 | -93.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1864.60 | -93.37 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1864.80 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1865.00 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1865.20 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1865.40 | -92.99 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1865.60 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1865.80 | -93.38 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1866.00 | -93.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1866.20 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1866.40 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1866.60 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1866.80 | -93.43 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1867.00 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1867.20 | -93.23 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1867.40 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1867.60 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1867.80 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1868.00 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1868.20 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1868.40 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1868.60 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1868.80 | -93.16 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1869.00 | -93.39 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1869.20 | -93.16 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1869.40 | -93.38 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1869.60 | -93.2 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1869.80 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1870.00 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1870.20 | -93.17 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1870.40 | -93.22 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1870.60 | -93.51 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1870.80 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1871.00 | -93.33 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1871.20 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1871.40 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1871.60 | -93.38 | -71 | PASS |

| | | | | | | | | |
|---------|-----|-------|---------|-----|---------|--------|-----|------|
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1871.80 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1872.00 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1872.20 | -93.22 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1872.40 | -93.36 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1872.60 | -93.24 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1872.80 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1873.00 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1873.20 | -93.09 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1873.40 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1873.60 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1873.80 | -93.18 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1874.00 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1874.20 | -93.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1874.40 | -93.4 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1874.60 | -93.23 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1874.80 | -93.18 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1875.00 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1875.20 | -93.1 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1875.40 | -93.31 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1875.60 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1875.80 | -93.34 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1876.00 | -93.28 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1876.20 | -93.44 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1876.40 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1876.60 | -93.32 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1876.80 | -93.38 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1877.00 | -93.3 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1877.20 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1877.40 | -93.25 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1877.60 | -93.11 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1877.80 | -93.14 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1878.00 | -93.27 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1878.20 | -93.01 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1878.40 | -93.14 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1878.60 | -93.17 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1878.80 | -93.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1879.00 | -93.29 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1879.20 | -93.21 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1879.40 | -93 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1879.60 | -93.26 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1879.80 | -93.06 | -71 | PASS |
| GPRS900 | 124 | 914.8 | 3;3;3;3 | 100 | 1880.00 | -93.25 | -71 | PASS |


Clause 4.2.1 Transmitter-Frequency error and phase error

| Band | Channel | Frequency (MHz) | PCL | Type | Result | Low Limit | high Limit | Verdict |
|---------|---------|-----------------|-----|---------------------------|--------|-----------|------------|---------|
| GSM1800 | 698 | 1747.4 | 0 | Frequency Error (Hz) | 2.26 | -174.74 | 174.74 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | RMS Phase Error (Degree) | 0.53 | 0 | 5 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | Peak Phase Error (Degree) | 1.67 | 0 | 20 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | Frequency Error (Hz) | -0.71 | -174.74 | 174.74 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | RMS Phase Error (Degree) | 0.50 | 0 | 5 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | Peak Phase Error (Degree) | 1.44 | 0 | 20 | PASS |
| GSM900 | 38 | 897.6 | 5 | Frequency Error (Hz) | -1.23 | -89.76 | 89.76 | PASS |
| GSM900 | 38 | 897.6 | 5 | RMS Phase Error (Degree) | 0.34 | 0 | 5 | PASS |
| GSM900 | 38 | 897.6 | 5 | Peak Phase Error (Degree) | 1.01 | 0 | 20 | PASS |
| GSM900 | 38 | 897.6 | 19 | Frequency Error (Hz) | 4.68 | -89.76 | 89.76 | PASS |
| GSM900 | 38 | 897.6 | 19 | RMS Phase Error (Degree) | 0.30 | 0 | 5 | PASS |
| GSM900 | 38 | 897.6 | 19 | Peak Phase Error (Degree) | 0.91 | 0 | 20 | PASS |


GSM1800 Channel=698 PCL=0

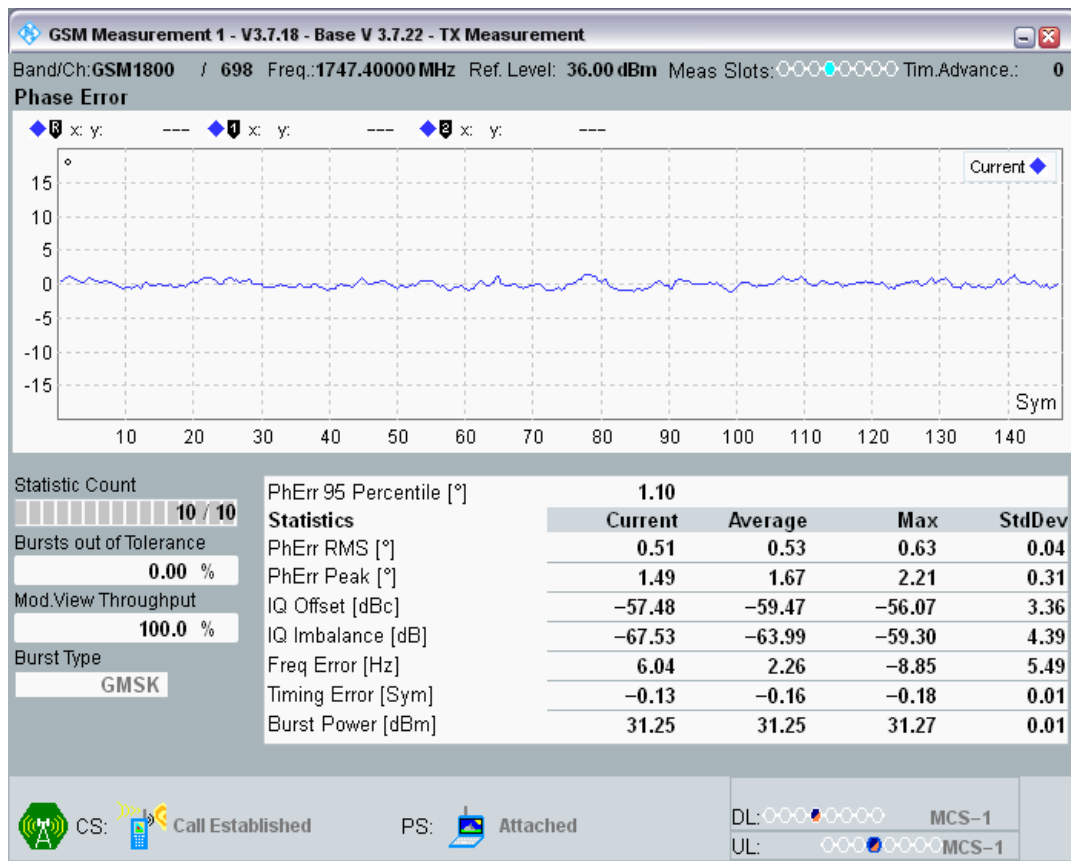


GSM1800 Channel=698 PCL=15

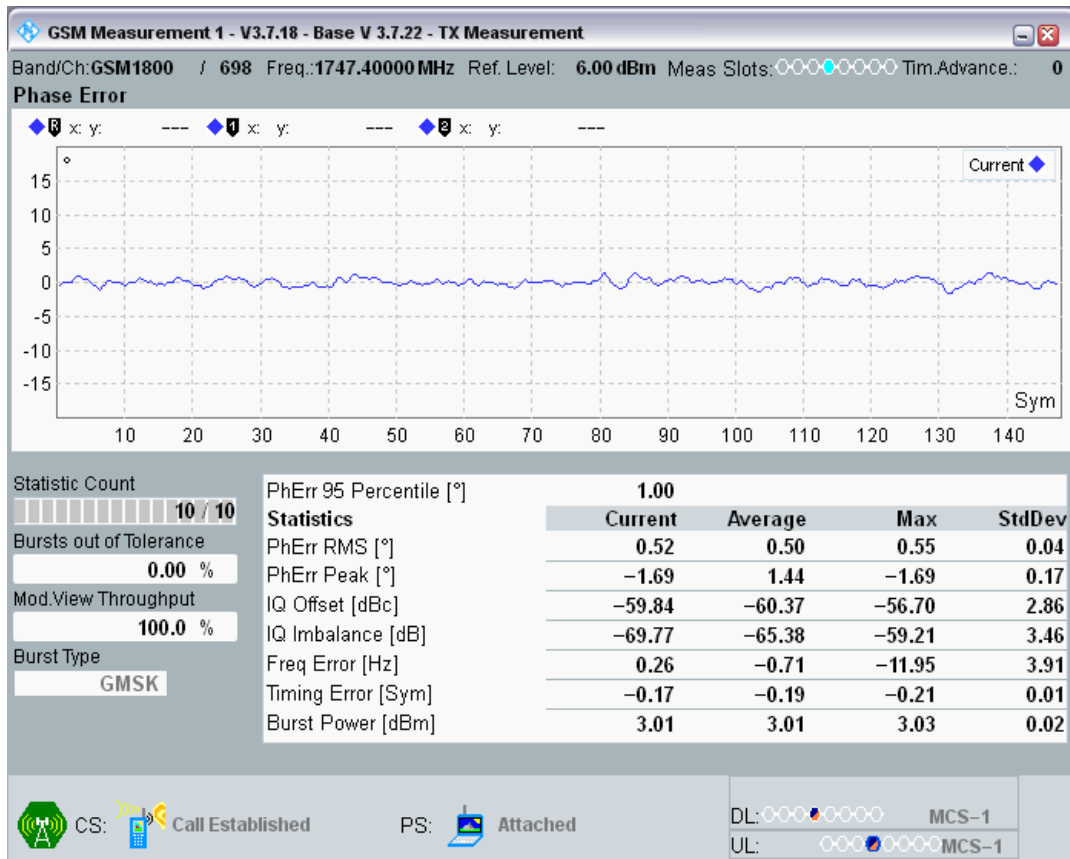

GSM900 Channel=38 PCL=5

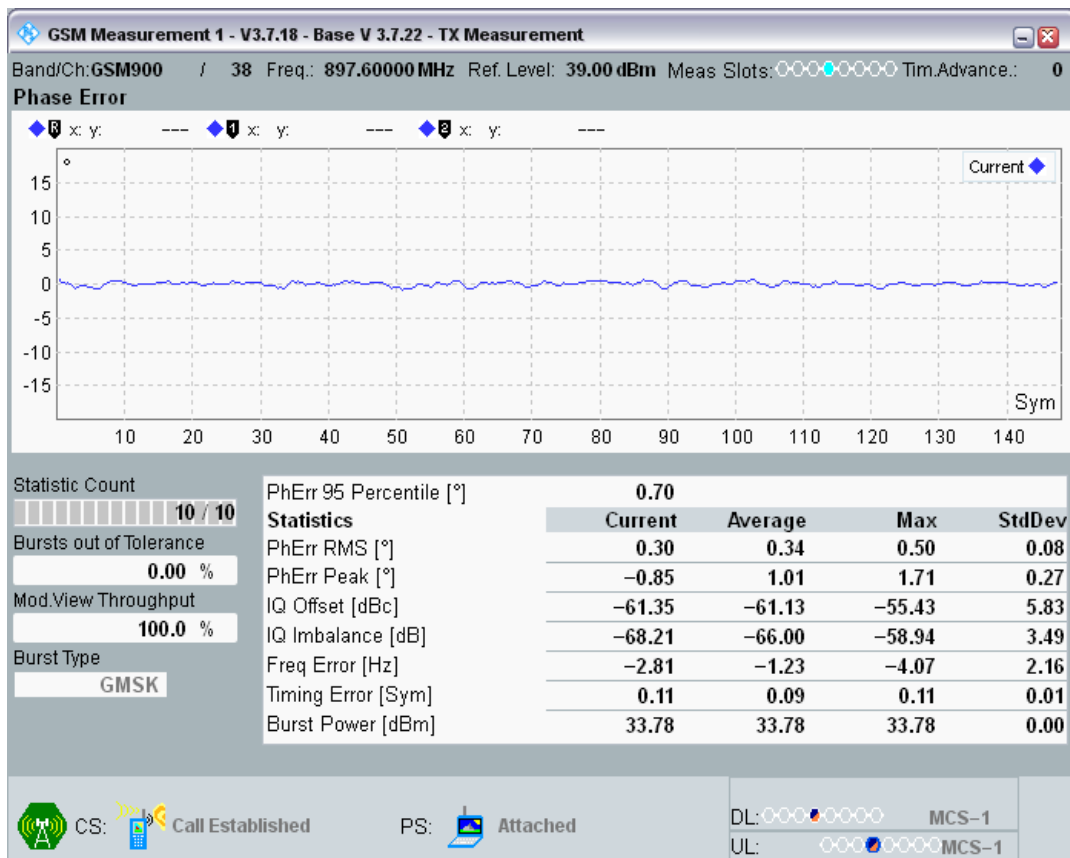

GSM900 Channel=38 PCL=19

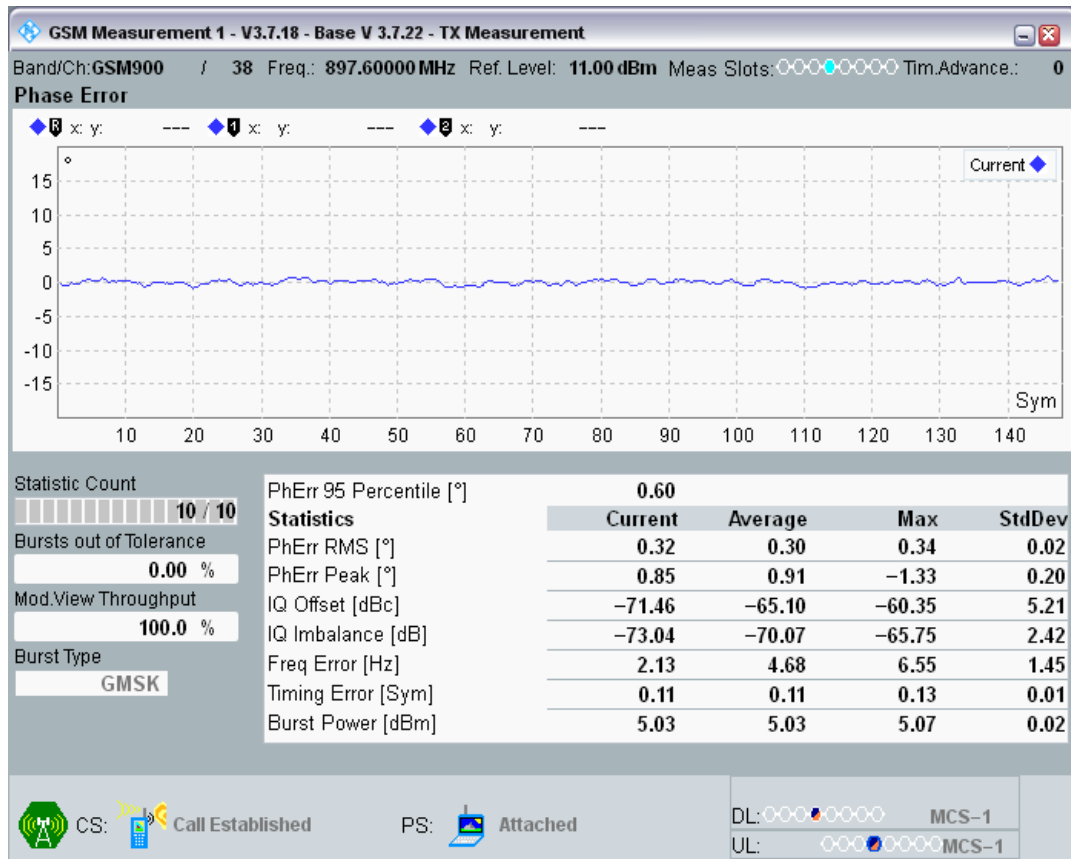


Clause 4.2.2 Transmitter-Frequency error under multi path

| Band | Type | Channel | Frequency (MHz) | PCL | Result (Hz) | Low Limit (Hz) | high Limit (Hz) | Verdict |
|---------|--------------|---------|-----------------|-----|-------------|----------------|-----------------|---------|
| GSM1800 | RA130 @RACH | 698 | 1747.4 | 0 | 2.58 | -574.74 | 574.74 | PASS |
| GSM1800 | RA130 @Sens1 | 698 | 1747.4 | 0 | 0.26 | -574.74 | 574.74 | PASS |
| GSM1800 | RA130 @Sens2 | 698 | 1747.4 | 0 | -2.94 | -574.74 | 574.74 | PASS |
| GSM1800 | RA130 @Sens3 | 698 | 1747.4 | 0 | -3.00 | -574.74 | 574.74 | PASS |
| GSM1800 | RA130 @Sens4 | 698 | 1747.4 | 0 | -3.65 | -574.74 | 574.74 | PASS |
| GSM1800 | RA130 @Sens5 | 698 | 1747.4 | 0 | -0.97 | -574.74 | 574.74 | PASS |
| GSM1800 | HT100 @RACH | 698 | 1747.4 | 0 | 2.45 | -524.74 | 524.74 | PASS |
| GSM1800 | HT100 @Sens1 | 698 | 1747.4 | 0 | -2.03 | -524.74 | 524.74 | PASS |
| GSM1800 | HT100 @Sens2 | 698 | 1747.4 | 0 | 8.04 | -524.74 | 524.74 | PASS |
| GSM1800 | HT100 @Sens3 | 698 | 1747.4 | 0 | 21.70 | -524.74 | 524.74 | PASS |
| GSM1800 | HT100 @Sens4 | 698 | 1747.4 | 0 | 18.73 | -524.74 | 524.74 | PASS |
| GSM1800 | HT100 @Sens5 | 698 | 1747.4 | 0 | 8.91 | -524.74 | 524.74 | PASS |
| GSM1800 | TU50 @RACH | 698 | 1747.4 | 0 | 9.20 | -434.74 | 434.74 | PASS |
| GSM1800 | TU50 @Sens1 | 698 | 1747.4 | 0 | 11.78 | -434.74 | 434.74 | PASS |
| GSM1800 | TU50 @Sens2 | 698 | 1747.4 | 0 | 6.75 | -434.74 | 434.74 | PASS |
| GSM1800 | TU50 @Sens3 | 698 | 1747.4 | 0 | 10.88 | -434.74 | 434.74 | PASS |
| GSM1800 | TU50 @Sens4 | 698 | 1747.4 | 0 | 4.88 | -434.74 | 434.74 | PASS |
| GSM1800 | TU50 @Sens5 | 698 | 1747.4 | 0 | 12.40 | -434.74 | 434.74 | PASS |
| GSM1800 | TU1_5 @RACH | 698 | 1747.4 | 0 | 4.88 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @1 | 698 | 1747.4 | 0 | 4.62 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @2 | 698 | 1747.4 | 0 | 7.36 | -494.74 | 494.74 | PASS |


| | | | | | | | | |
|---------|--------------|-----|--------|---|--------|---------|--------|------|
| GSM1800 | TU1_5 @3 | 698 | 1747.4 | 0 | 3.84 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @4 | 698 | 1747.4 | 0 | 7.23 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @5 | 698 | 1747.4 | 0 | 7.01 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @6 | 698 | 1747.4 | 0 | 0.42 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @7 | 698 | 1747.4 | 0 | 2.81 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @8 | 698 | 1747.4 | 0 | 1.42 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @9 | 698 | 1747.4 | 0 | 2.91 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @10 | 698 | 1747.4 | 0 | -1.10 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @11 | 698 | 1747.4 | 0 | -0.90 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @12 | 698 | 1747.4 | 0 | 5.68 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @13 | 698 | 1747.4 | 0 | -3.97 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @14 | 698 | 1747.4 | 0 | -4.65 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @15 | 698 | 1747.4 | 0 | -1.26 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @16 | 698 | 1747.4 | 0 | 2.26 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @17 | 698 | 1747.4 | 0 | -0.26 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @18 | 698 | 1747.4 | 0 | -4.29 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @19 | 698 | 1747.4 | 0 | -0.29 | -494.74 | 494.74 | PASS |
| GSM1800 | TU1_5 @20 | 698 | 1747.4 | 0 | -2.13 | -494.74 | 494.74 | PASS |
| GSM900 | RA250 @RACH | 38 | 897.6 | 5 | -13.46 | -389.76 | 389.76 | PASS |
| GSM900 | RA250 @Sens1 | 38 | 897.6 | 5 | 9.88 | -389.76 | 389.76 | PASS |
| GSM900 | RA250 @Sens2 | 38 | 897.6 | 5 | 19.57 | -389.76 | 389.76 | PASS |
| GSM900 | RA250 @Sens3 | 38 | 897.6 | 5 | 8.27 | -389.76 | 389.76 | PASS |
| GSM900 | RA250 @Sens4 | 38 | 897.6 | 5 | -5.52 | -389.76 | 389.76 | PASS |
| GSM900 | RA250 @Sens5 | 38 | 897.6 | 5 | -15.08 | -389.76 | 389.76 | PASS |
| GSM900 | HT100 @RACH | 38 | 897.6 | 5 | -0.48 | -269.76 | 269.76 | PASS |
| GSM900 | HT100 @Sens1 | 38 | 897.6 | 5 | -6.72 | -269.76 | 269.76 | PASS |
| GSM900 | HT100 @Sens2 | 38 | 897.6 | 5 | 2.29 | -269.76 | 269.76 | PASS |
| GSM900 | HT100 @Sens3 | 38 | 897.6 | 5 | -9.81 | -269.76 | 269.76 | PASS |
| GSM900 | HT100 @Sens4 | 38 | 897.6 | 5 | -8.10 | -269.76 | 269.76 | PASS |
| GSM900 | HT100 @Sens5 | 38 | 897.6 | 5 | -7.75 | -269.76 | 269.76 | PASS |
| GSM900 | TU50 @RACH | 38 | 897.6 | 5 | -7.26 | -249.76 | 249.76 | PASS |
| GSM900 | TU50 @Sens1 | 38 | 897.6 | 5 | -1.68 | -249.76 | 249.76 | PASS |
| GSM900 | TU50 @Sens2 | 38 | 897.6 | 5 | 3.91 | -249.76 | 249.76 | PASS |
| GSM900 | TU50 @Sens3 | 38 | 897.6 | 5 | -1.39 | -249.76 | 249.76 | PASS |
| GSM900 | TU50 @Sens4 | 38 | 897.6 | 5 | 7.59 | -249.76 | 249.76 | PASS |
| GSM900 | TU50 @Sens5 | 38 | 897.6 | 5 | -1.07 | -249.76 | 249.76 | PASS |
| GSM900 | TU3 @RACH | 38 | 897.6 | 5 | -6.10 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @1 | 38 | 897.6 | 5 | -7.17 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @2 | 38 | 897.6 | 5 | -19.15 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @3 | 38 | 897.6 | 5 | -17.92 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @4 | 38 | 897.6 | 5 | -11.69 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @5 | 38 | 897.6 | 5 | -7.52 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @6 | 38 | 897.6 | 5 | -1.55 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @7 | 38 | 897.6 | 5 | -0.29 | -319.76 | 319.76 | PASS |

| | | | | | | | | |
|--------|---------|----|-------|---|-------|---------|--------|------|
| GSM900 | TU3 @8 | 38 | 897.6 | 5 | -3.36 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @9 | 38 | 897.6 | 5 | -1.26 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @10 | 38 | 897.6 | 5 | -1.36 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @11 | 38 | 897.6 | 5 | -3.52 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @12 | 38 | 897.6 | 5 | -4.52 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @13 | 38 | 897.6 | 5 | -0.74 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @14 | 38 | 897.6 | 5 | -1.19 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @15 | 38 | 897.6 | 5 | -2.45 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @16 | 38 | 897.6 | 5 | -3.91 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @17 | 38 | 897.6 | 5 | -6.78 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @18 | 38 | 897.6 | 5 | -3.26 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @19 | 38 | 897.6 | 5 | -5.91 | -319.76 | 319.76 | PASS |
| GSM900 | TU3 @20 | 38 | 897.6 | 5 | -3.07 | -319.76 | 319.76 | PASS |


GSM1800 Channel=698 PCL=0 RA130 @Sens1

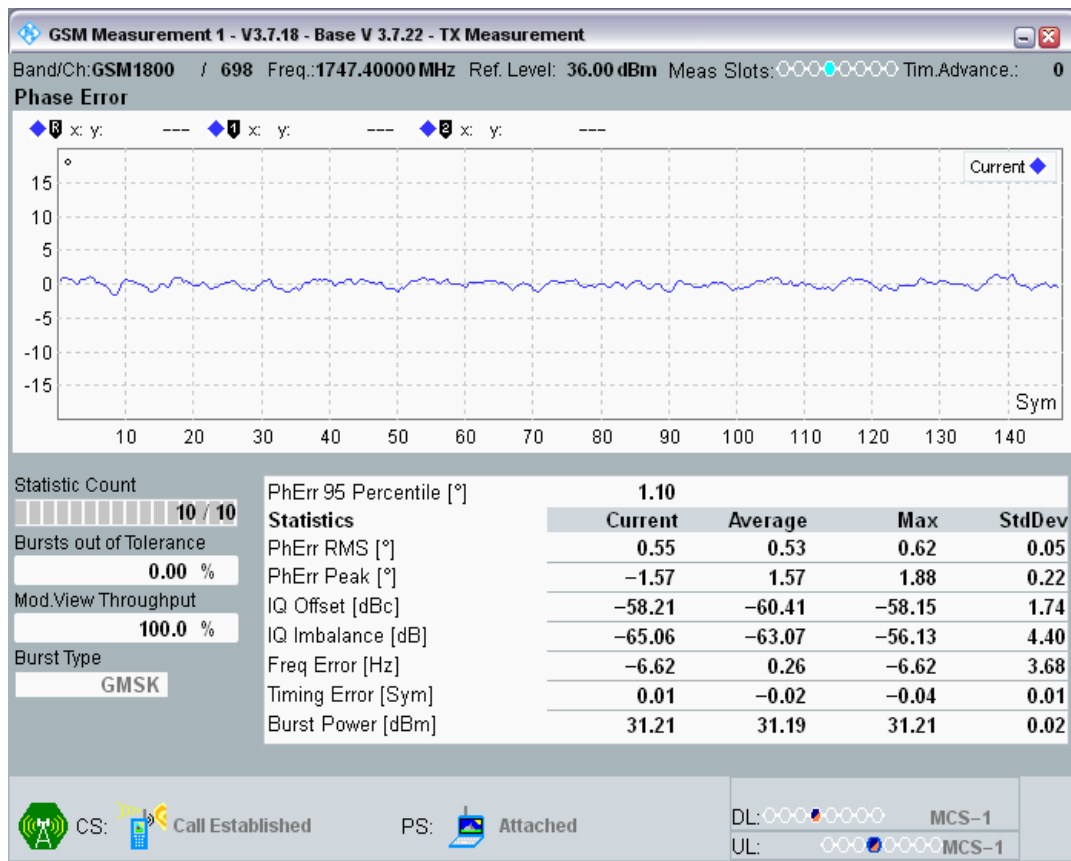


GSM1800 Channel=698 PCL=0 RA130 @RACH

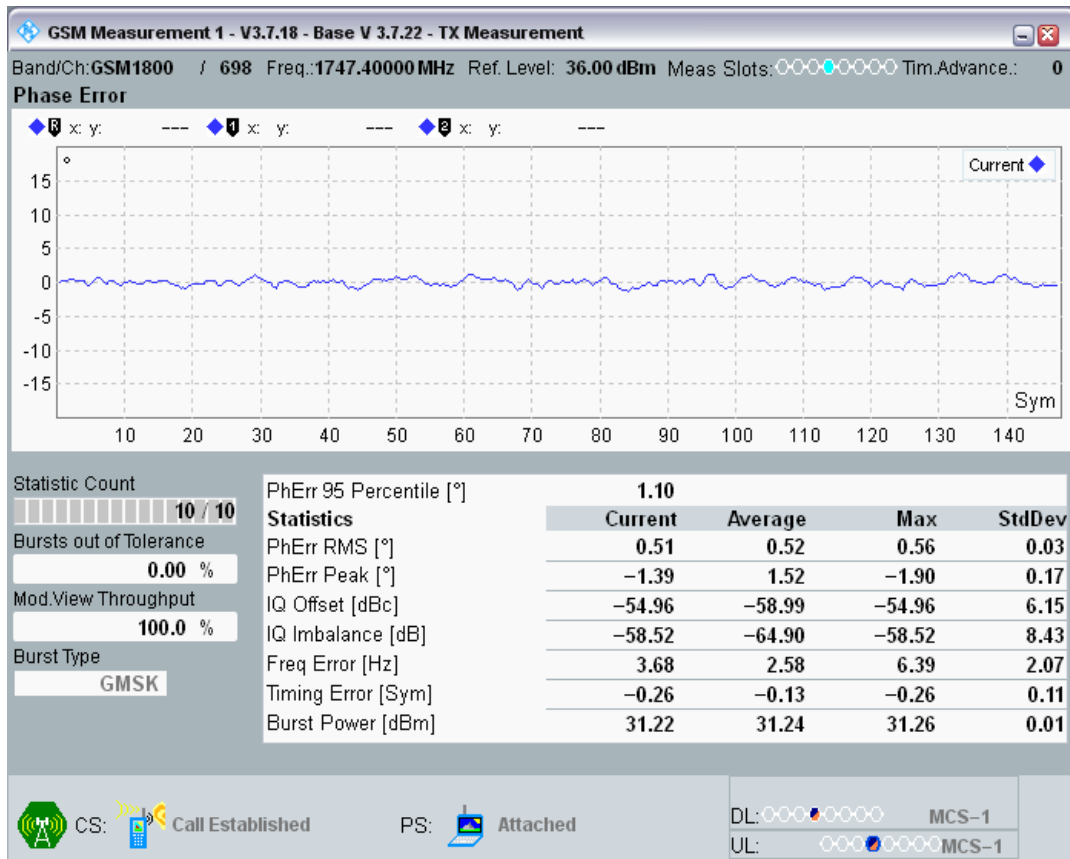


GSM1800 Channel=698 PCL=0 RA130 @Sens2

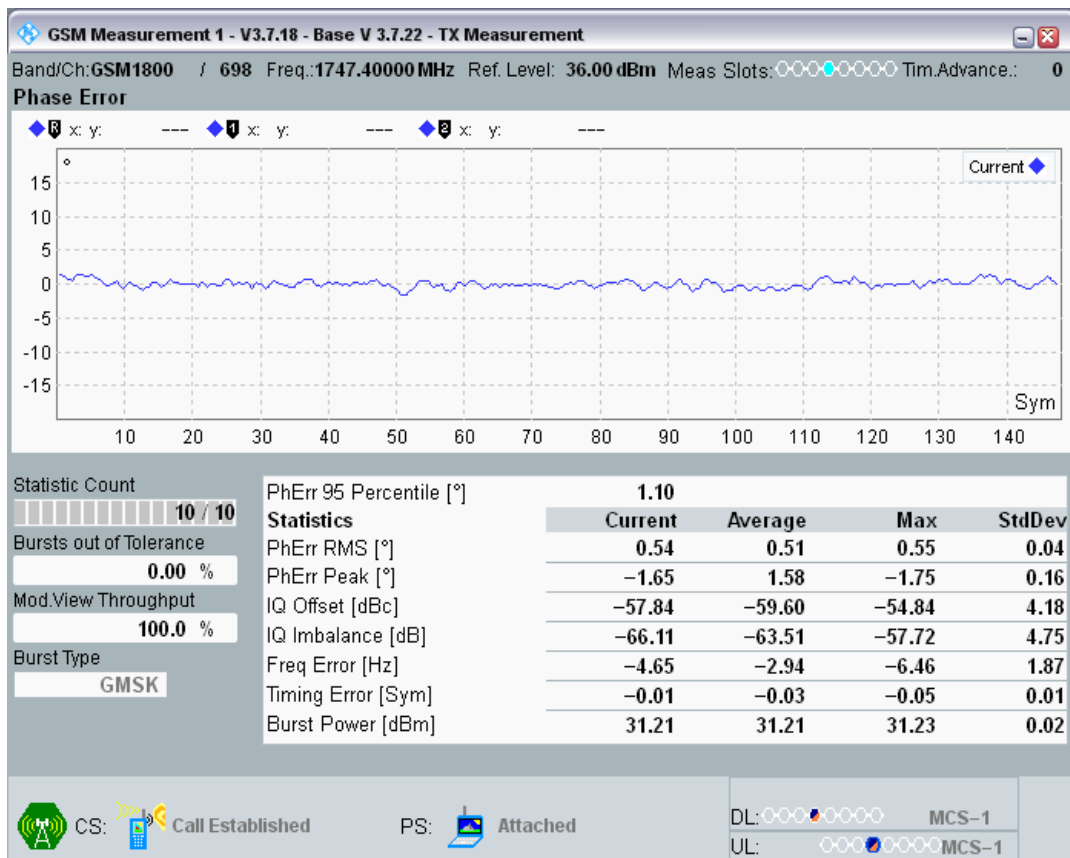


GSM1800 Channel=698 PCL=0 RA130 @Sens3

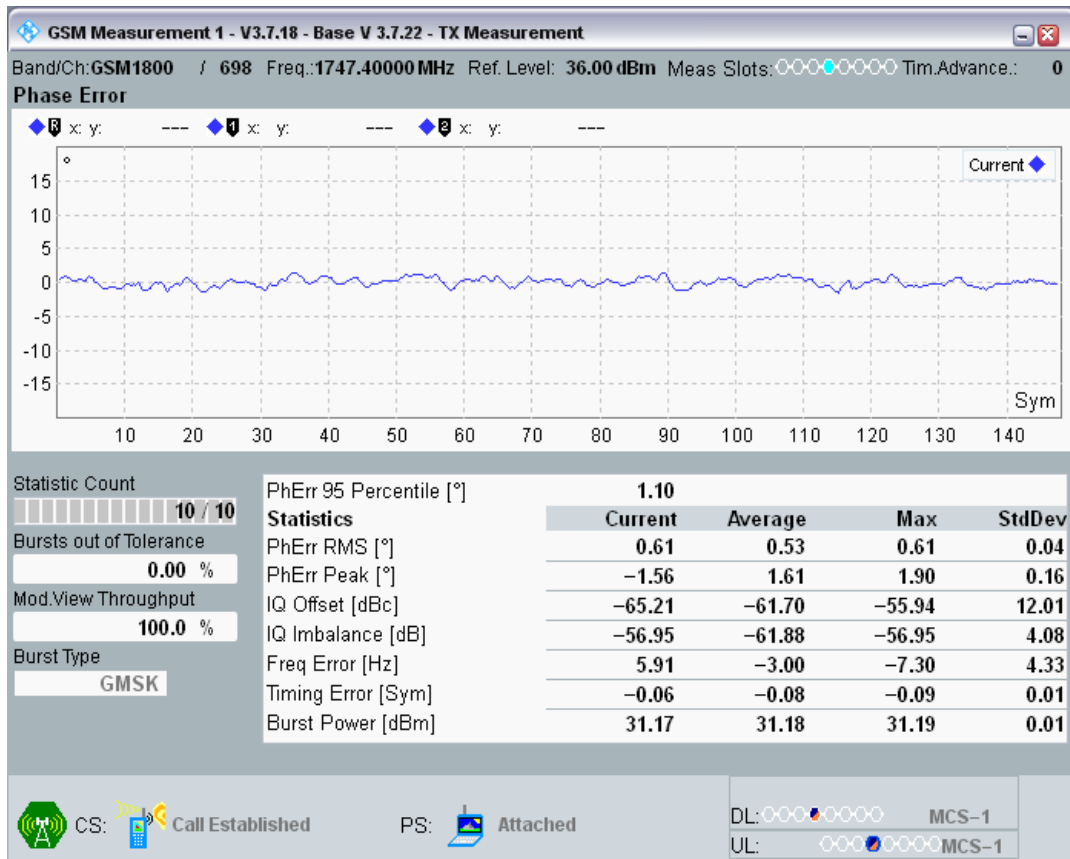


GSM1800 Channel=698 PCL=0 RA130 @Sens4

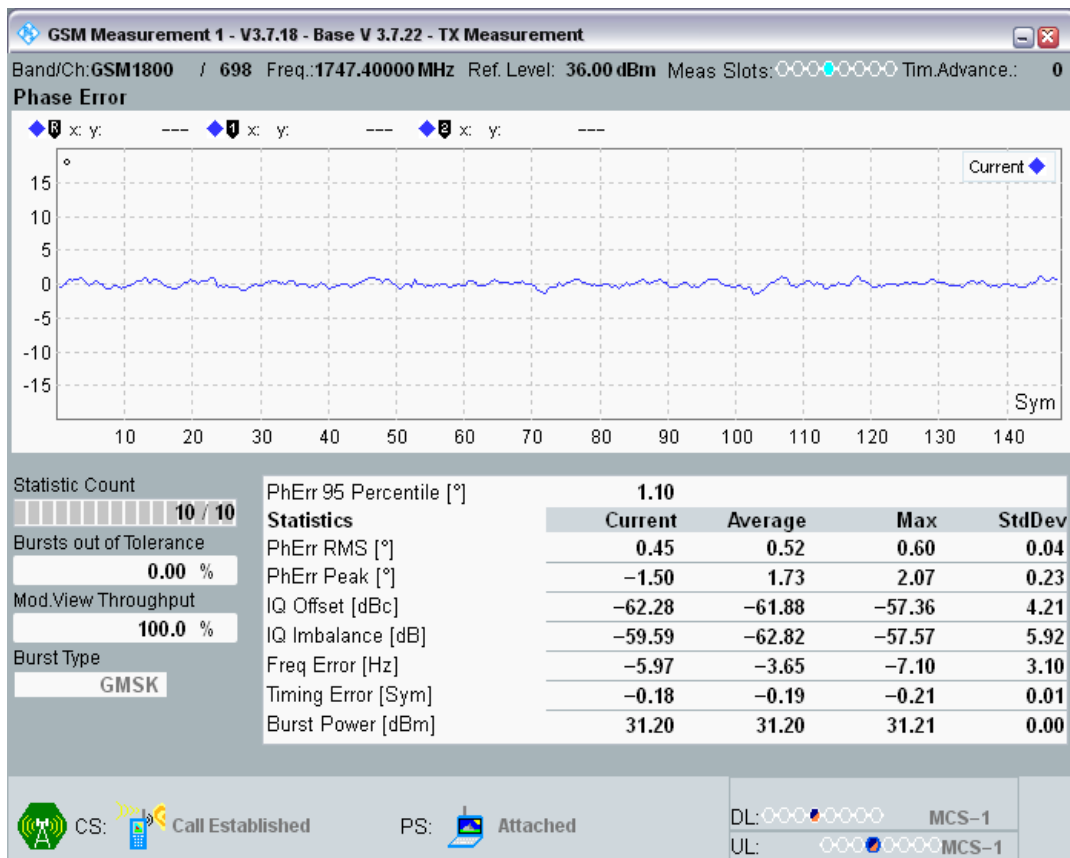


GSM1800 Channel=698 PCL=0 RA130 @Sens5

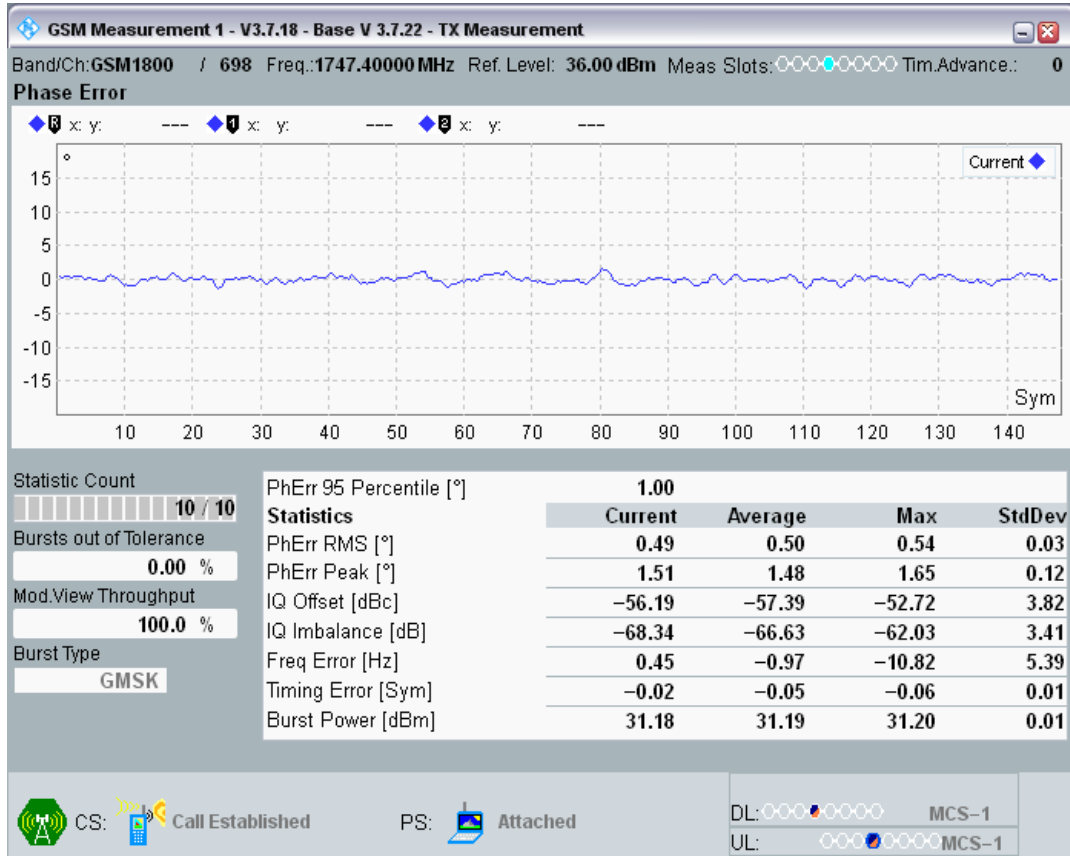


GSM1800 Channel=698 PCL=0 HT100 @RACH

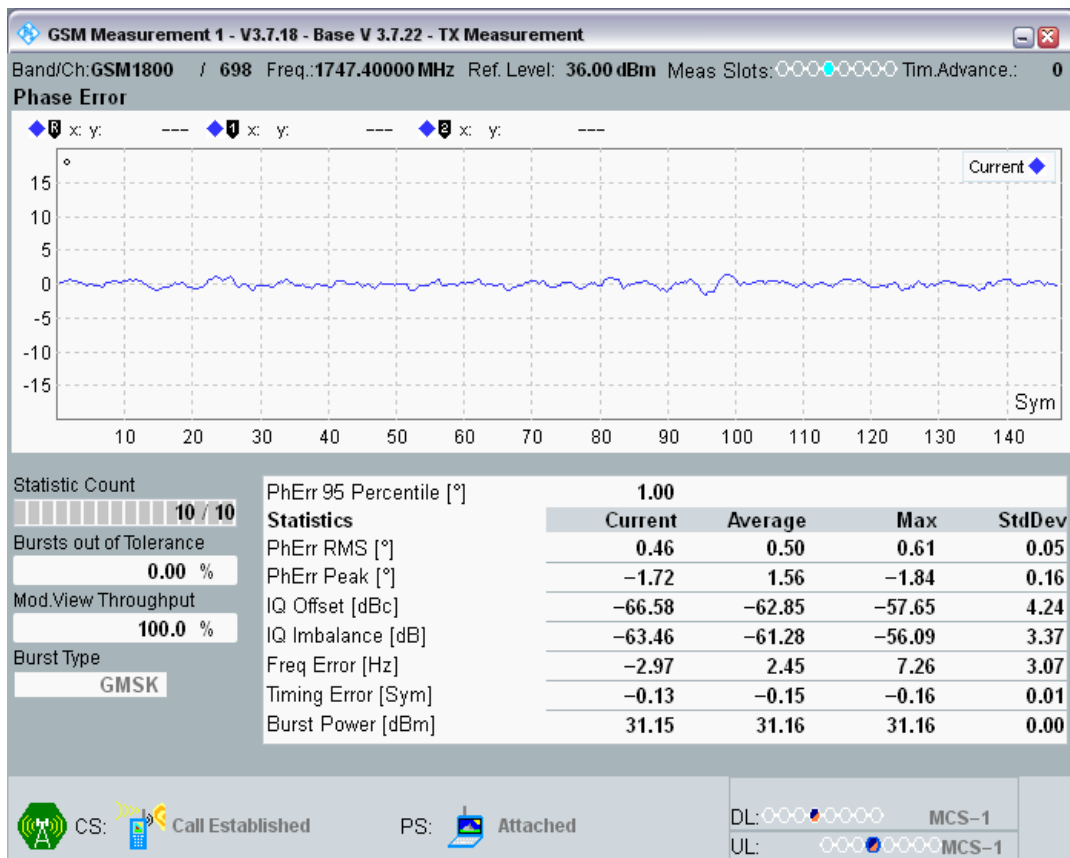


GSM1800 Channel=698 PCL=0 HT100 @Sens2

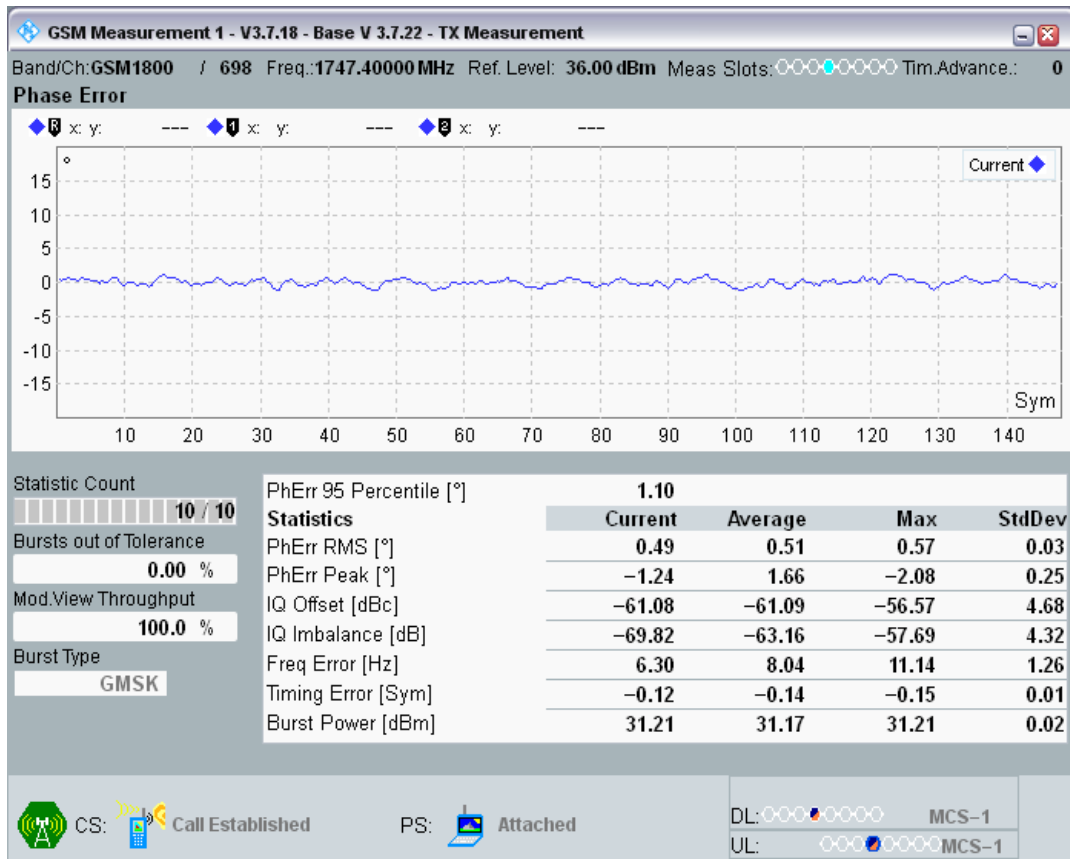


GSM1800 Channel=698 PCL=0 HT100 @Sens1

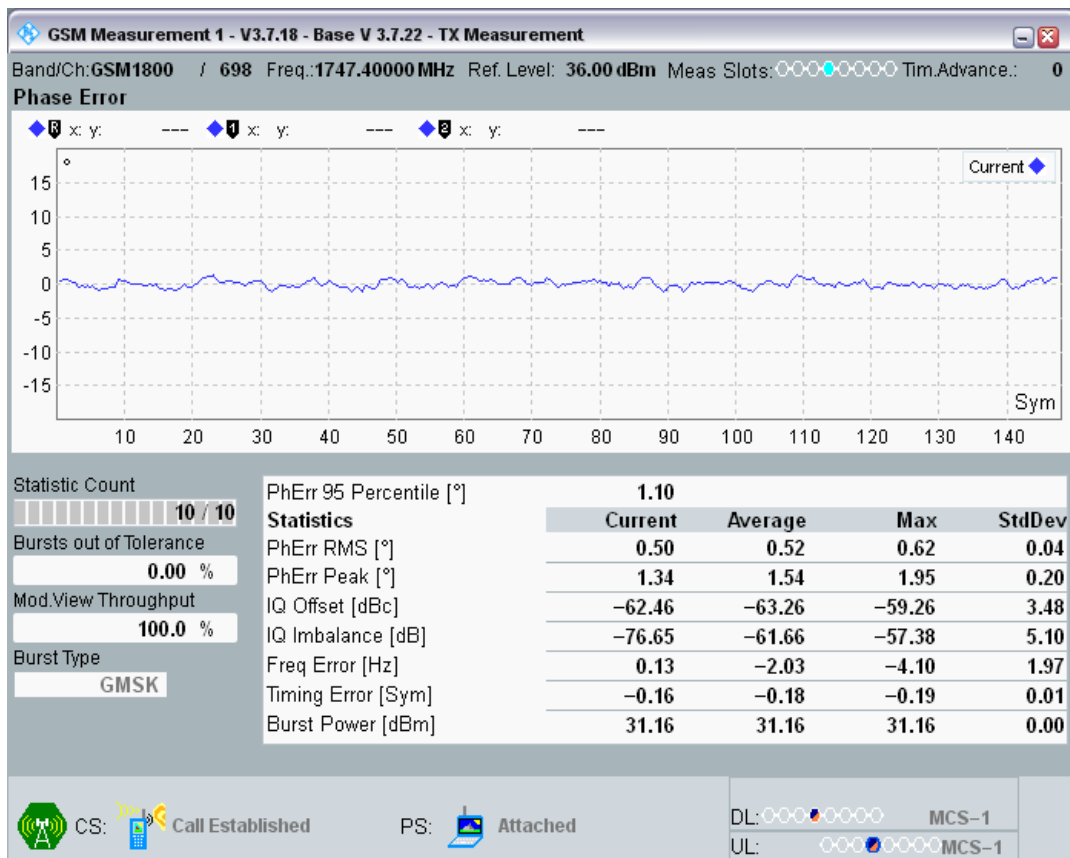


GSM1800 Channel=698 PCL=0 HT100 @Sens3

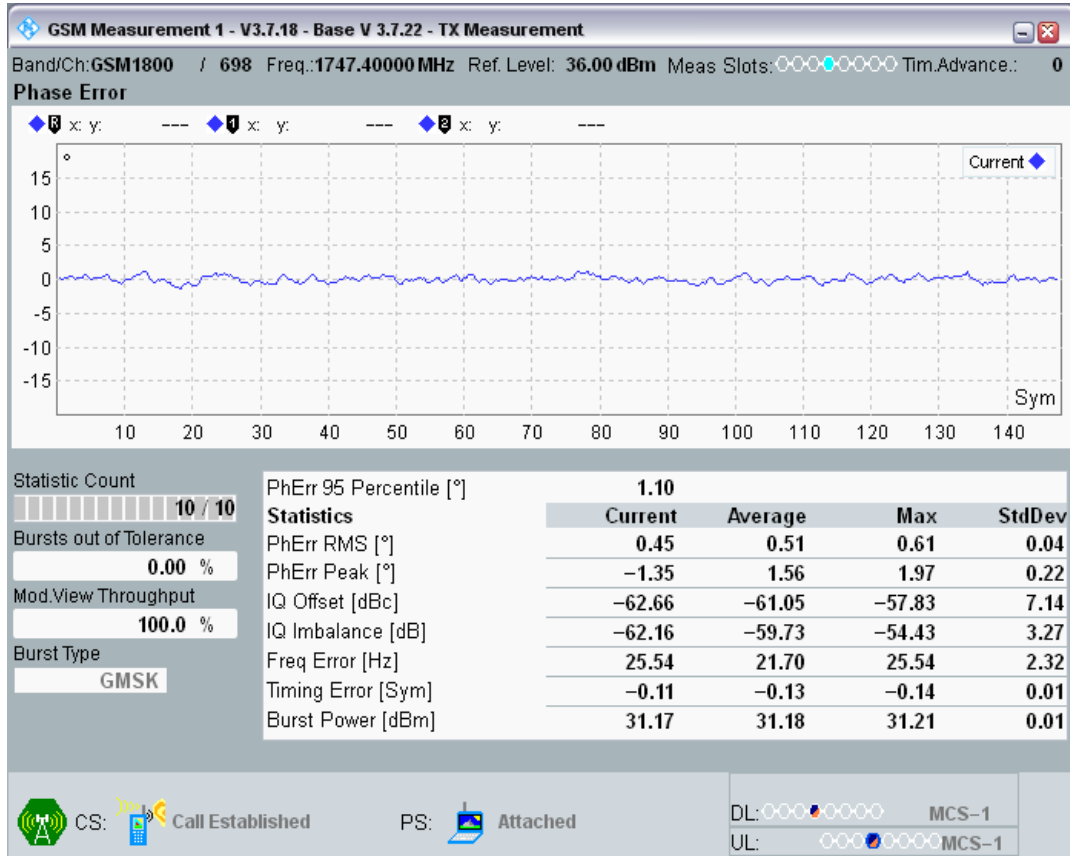


GSM1800 Channel=698 PCL=0 HT100 @Sens4

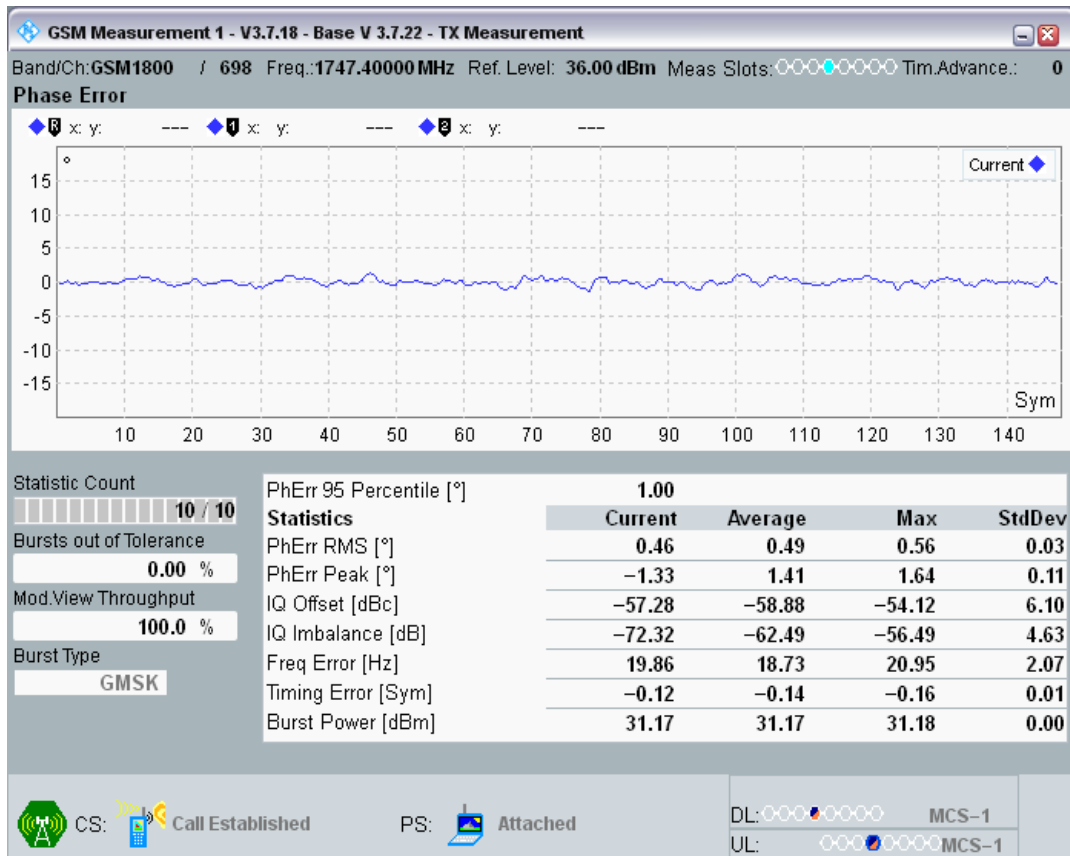


GSM1800 Channel=698 PCL=0 TU50 @RACH

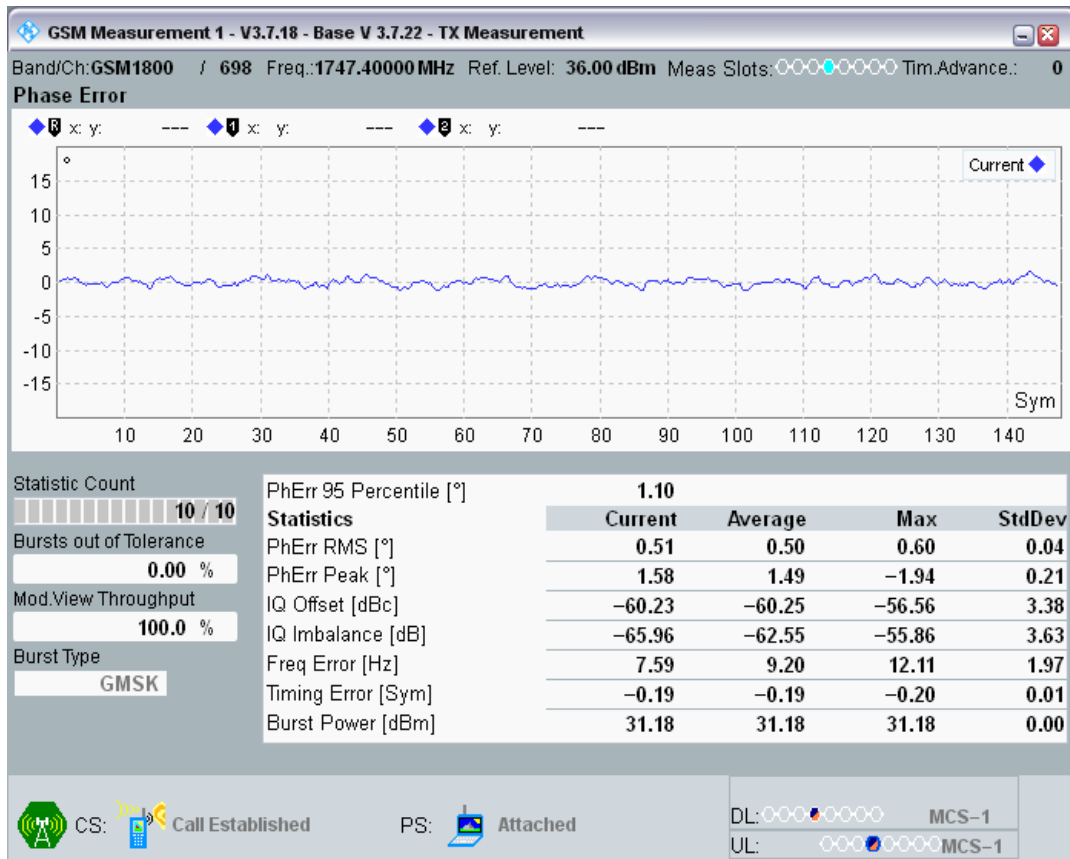


GSM1800 Channel=698 PCL=0 HT100 @Sens5

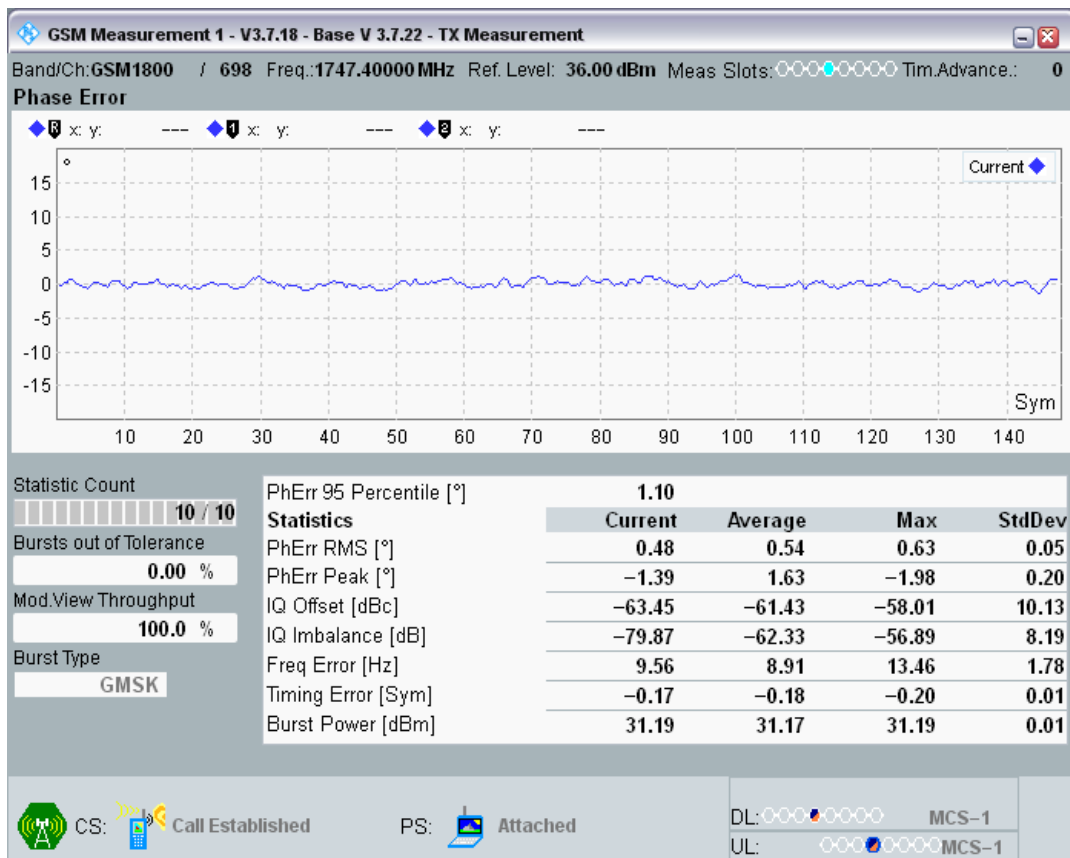


GSM1800 Channel=698 PCL=0 TU50 @Sens1

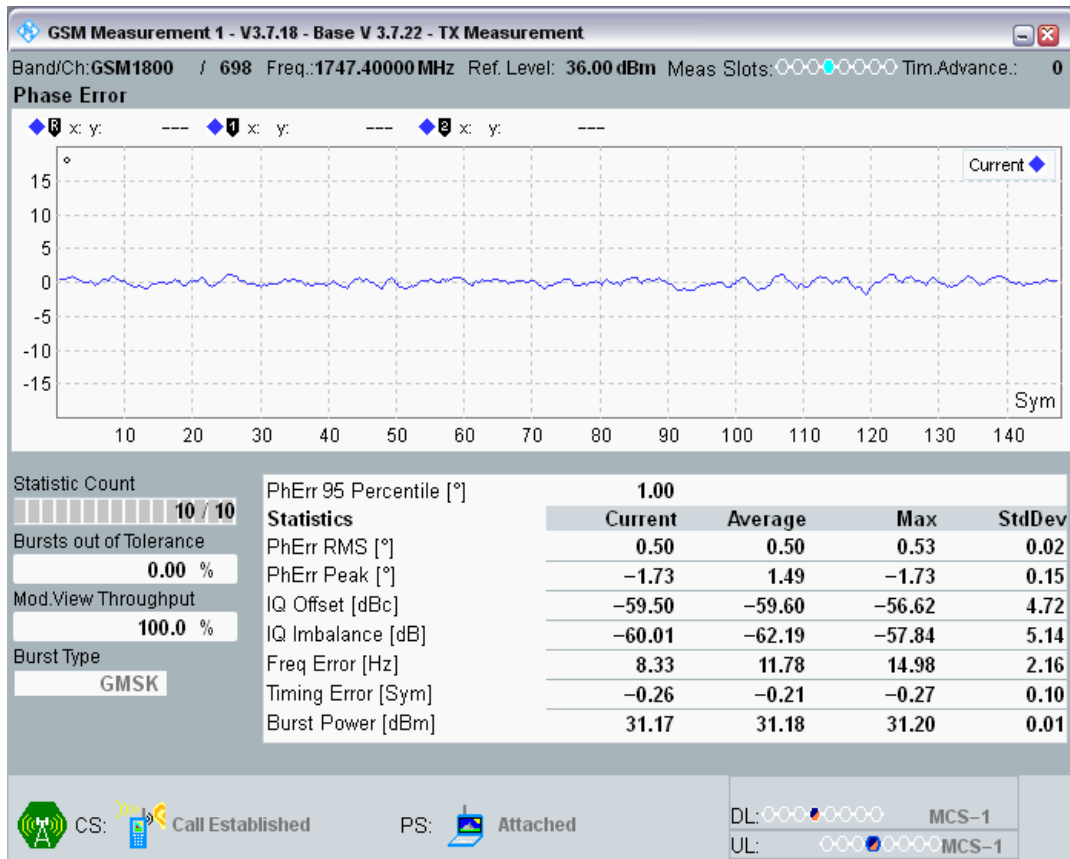


GSM1800 Channel=698 PCL=0 TU50 @Sens2

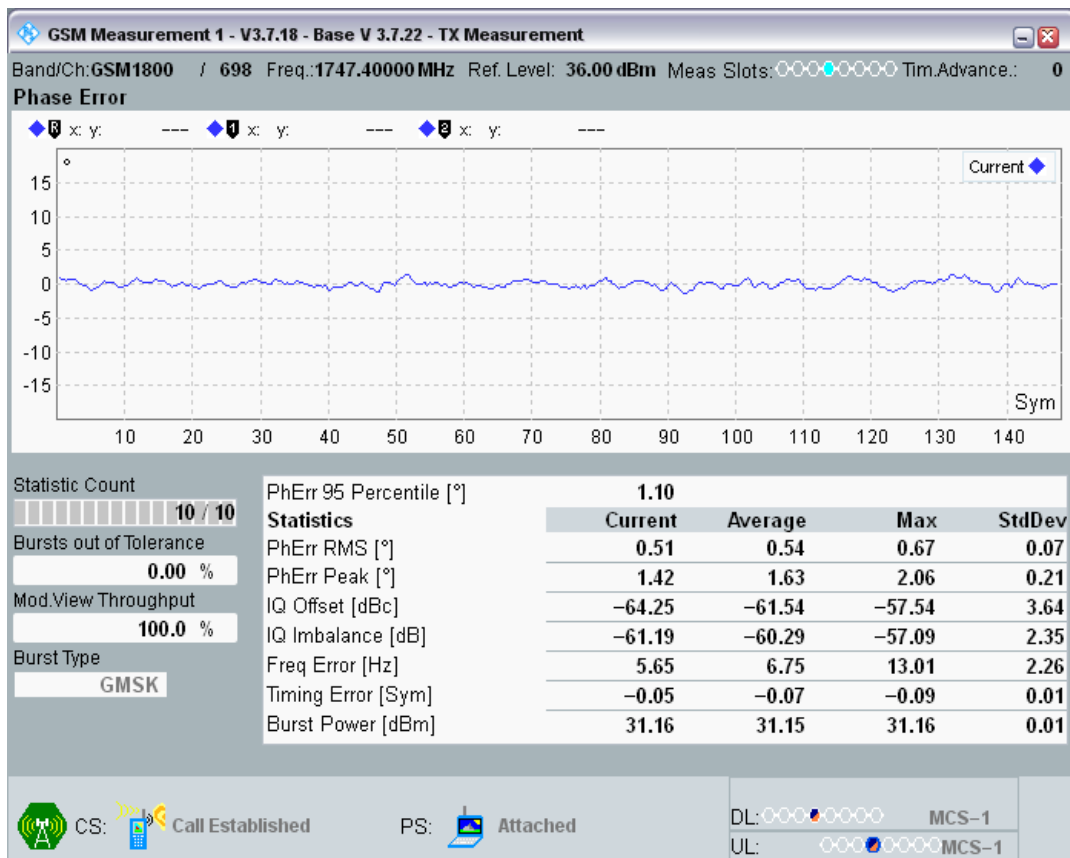


GSM1800 Channel=698 PCL=0 TU50 @Sens3

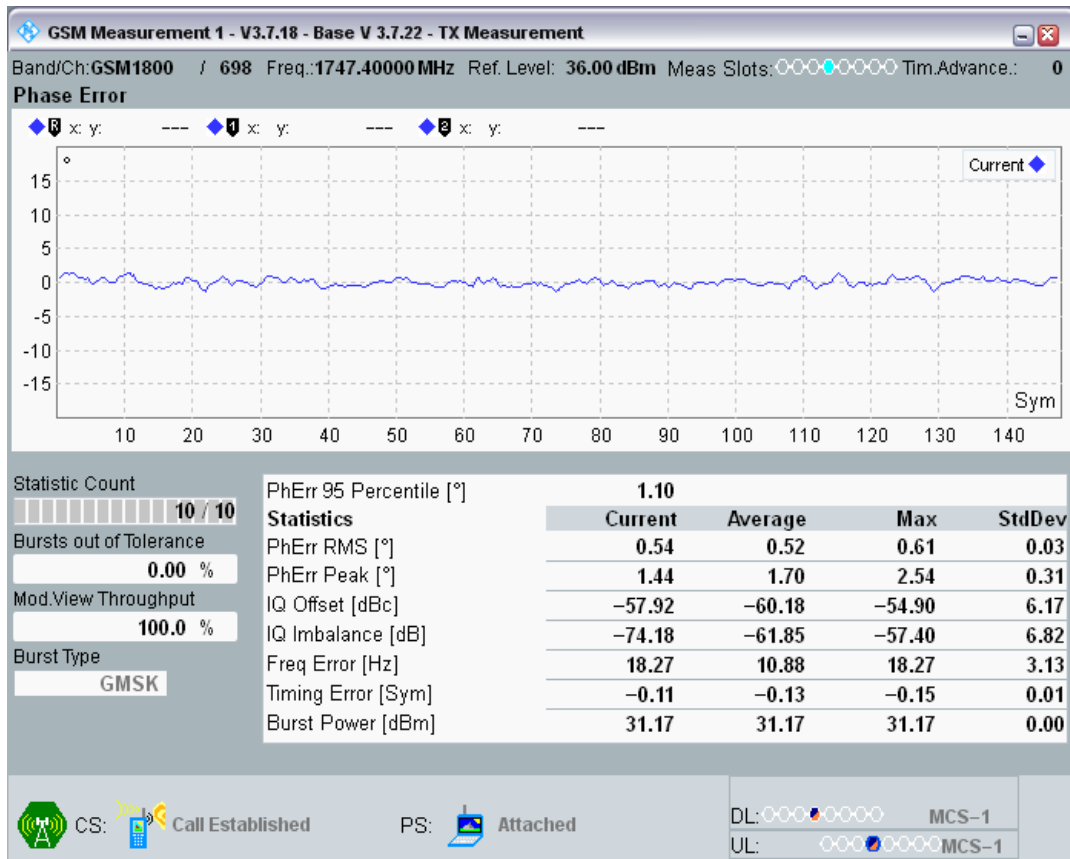


GSM1800 Channel=698 PCL=0 TU50 @Sens5

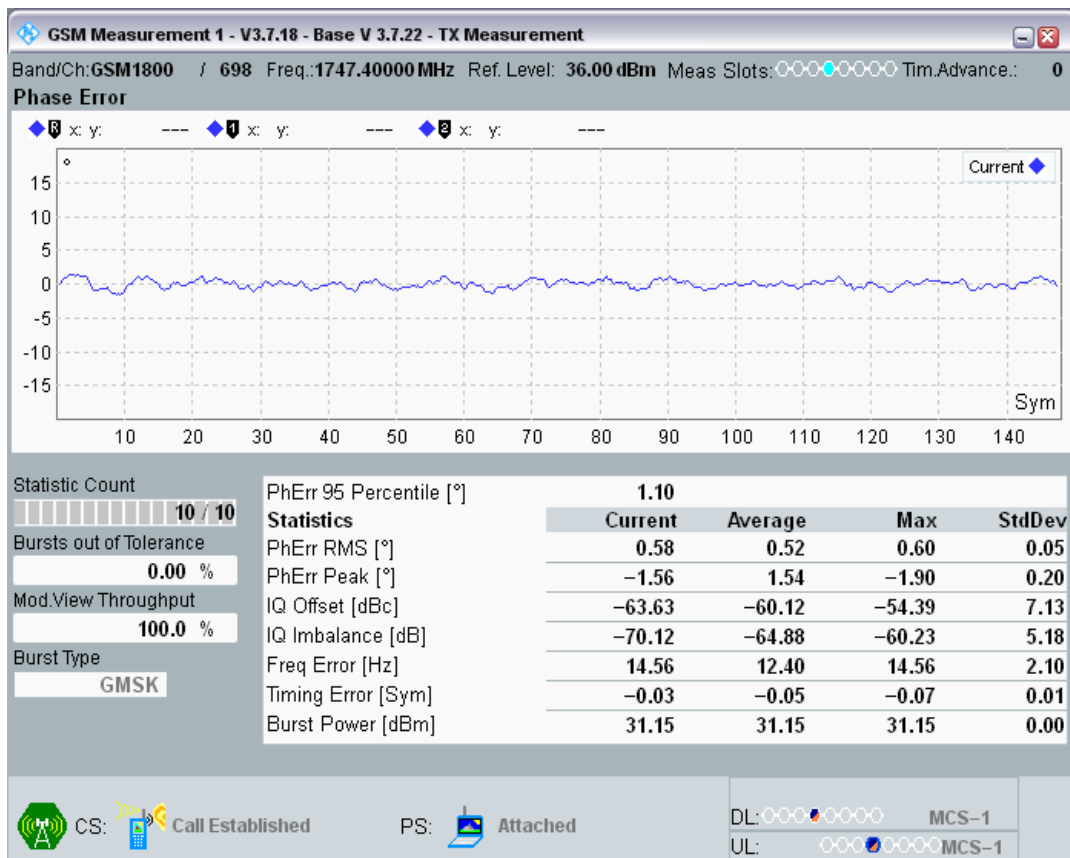


GSM1800 Channel=698 PCL=0 TU50 @Sens4

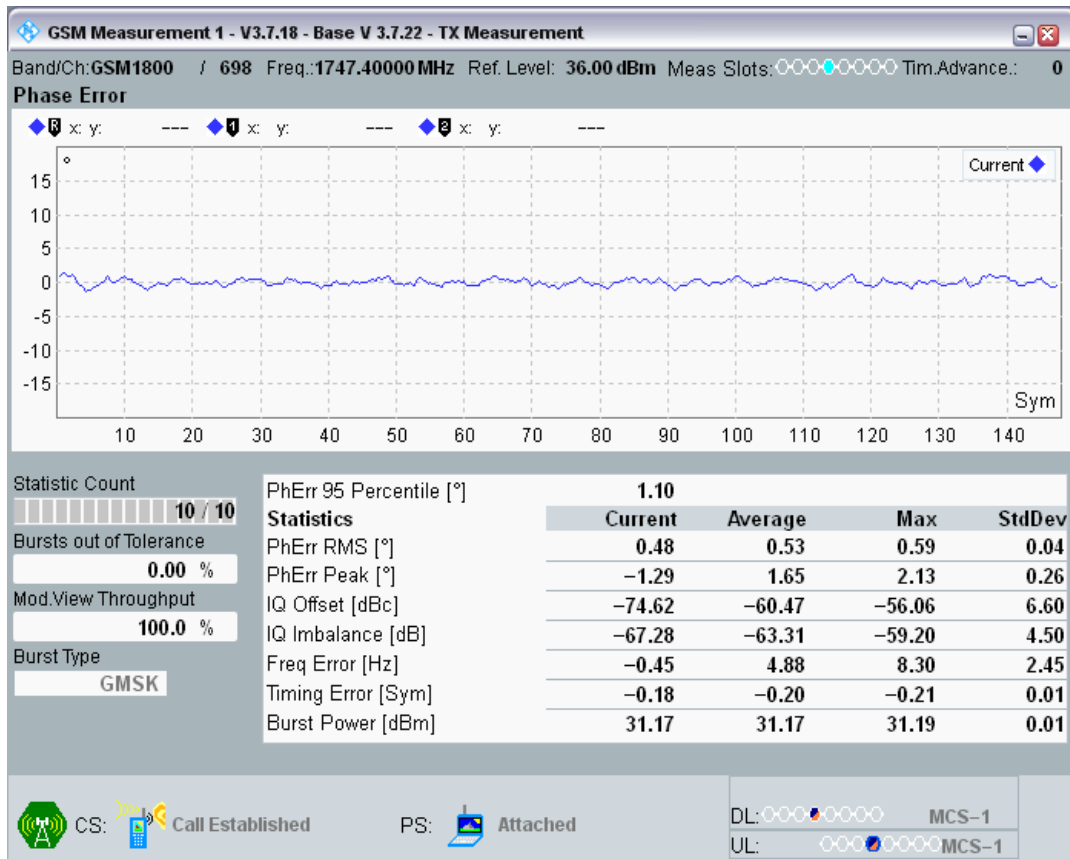


GSM1800 Channel=698 PCL=0 TU1_5 @RACH

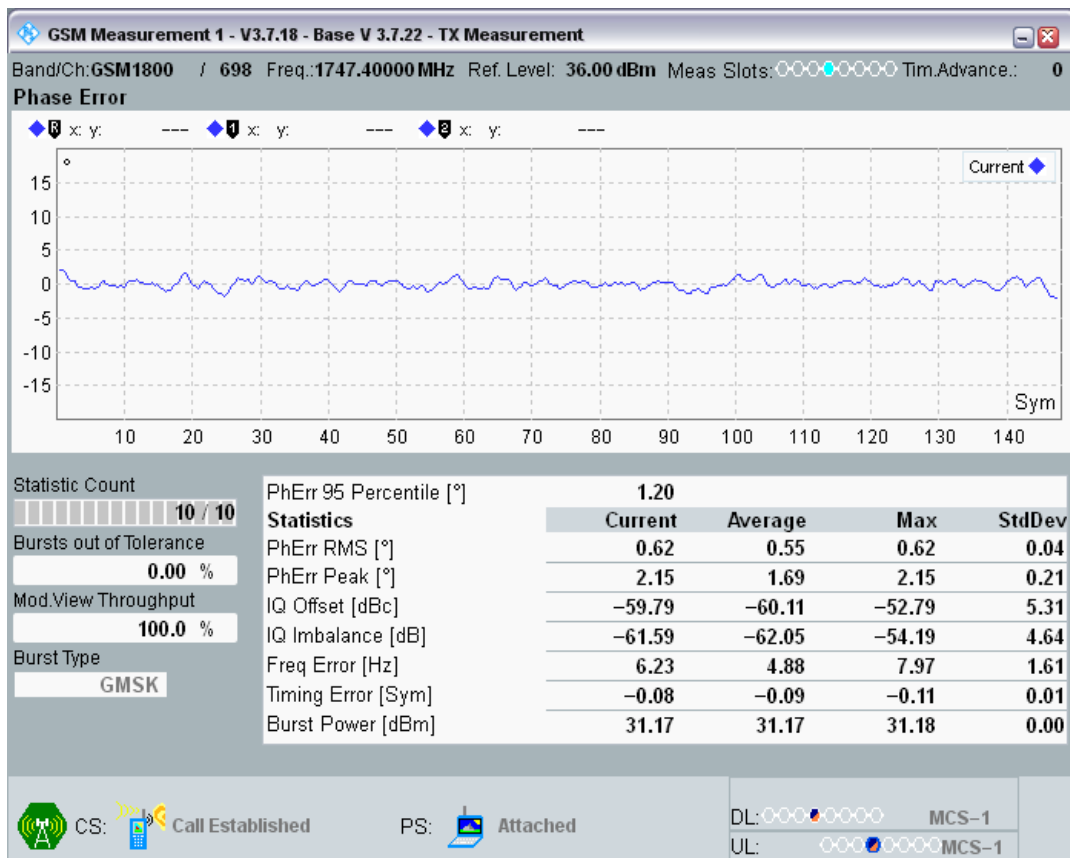


GSM1800 Channel=698 PCL=0 TU1_5 @1

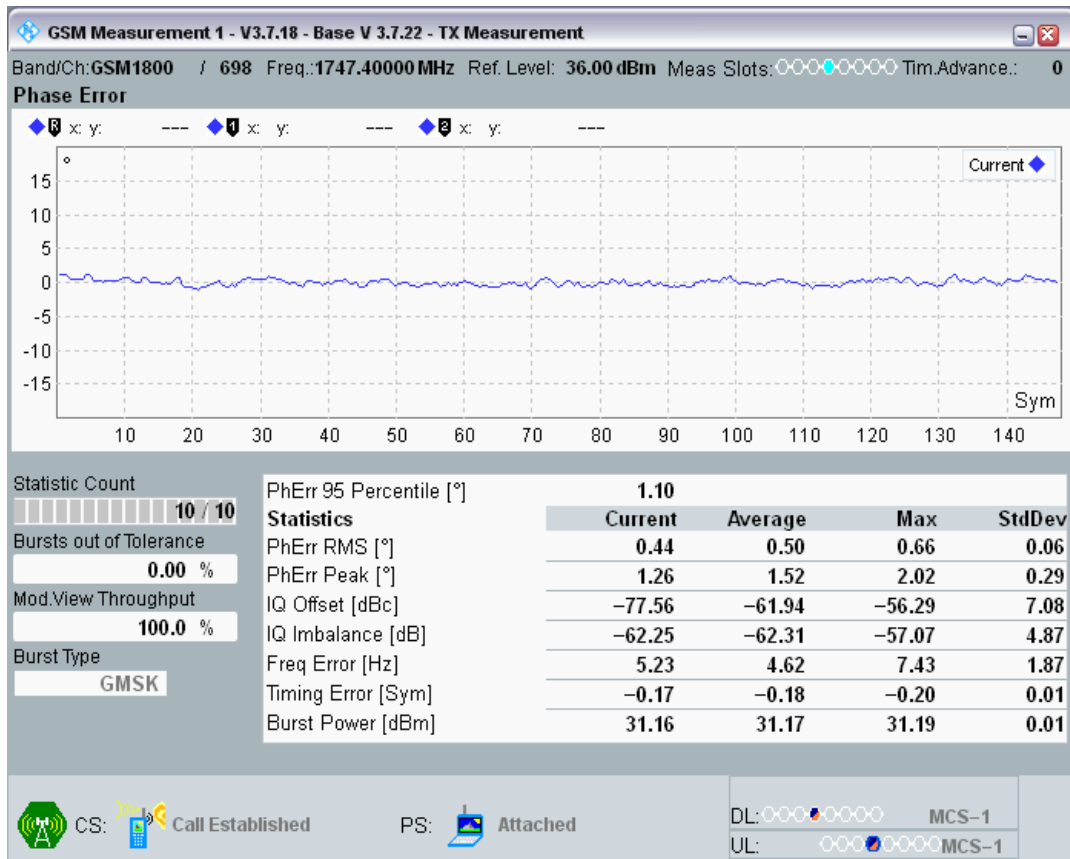


GSM1800 Channel=698 PCL=0 TU1_5 @2

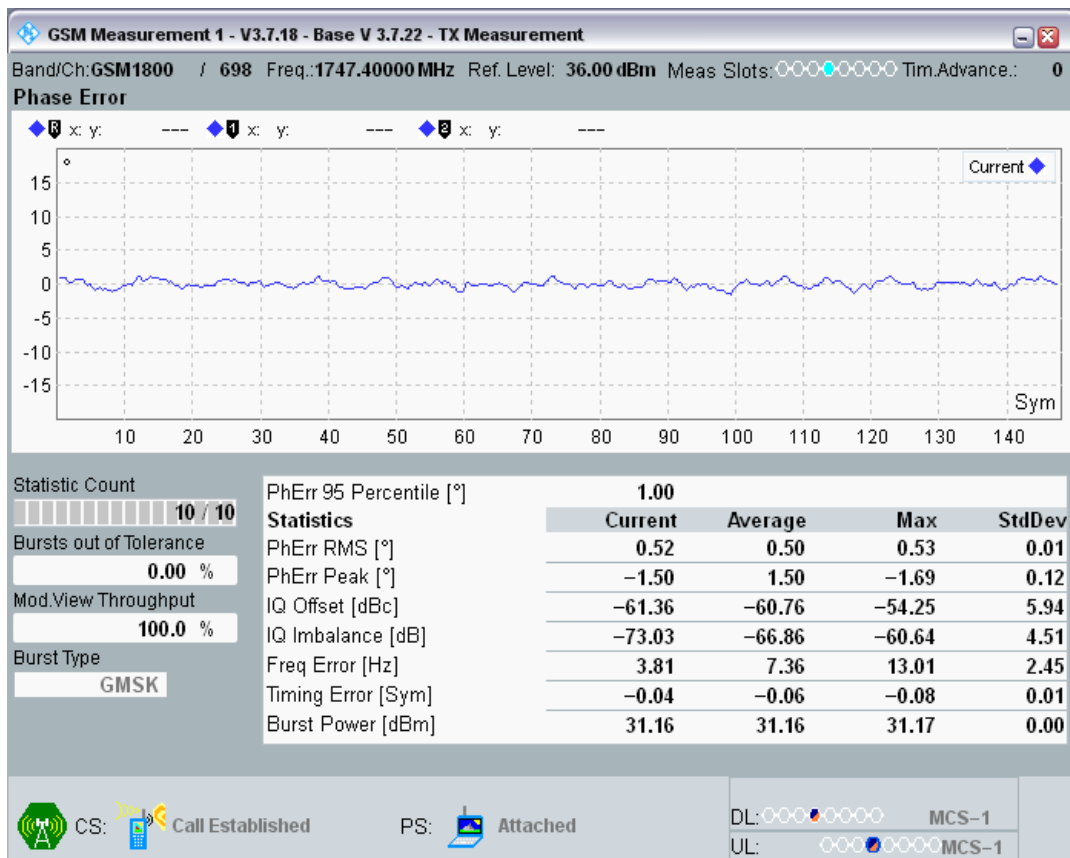


GSM1800 Channel=698 PCL=0 TU1_5 @3

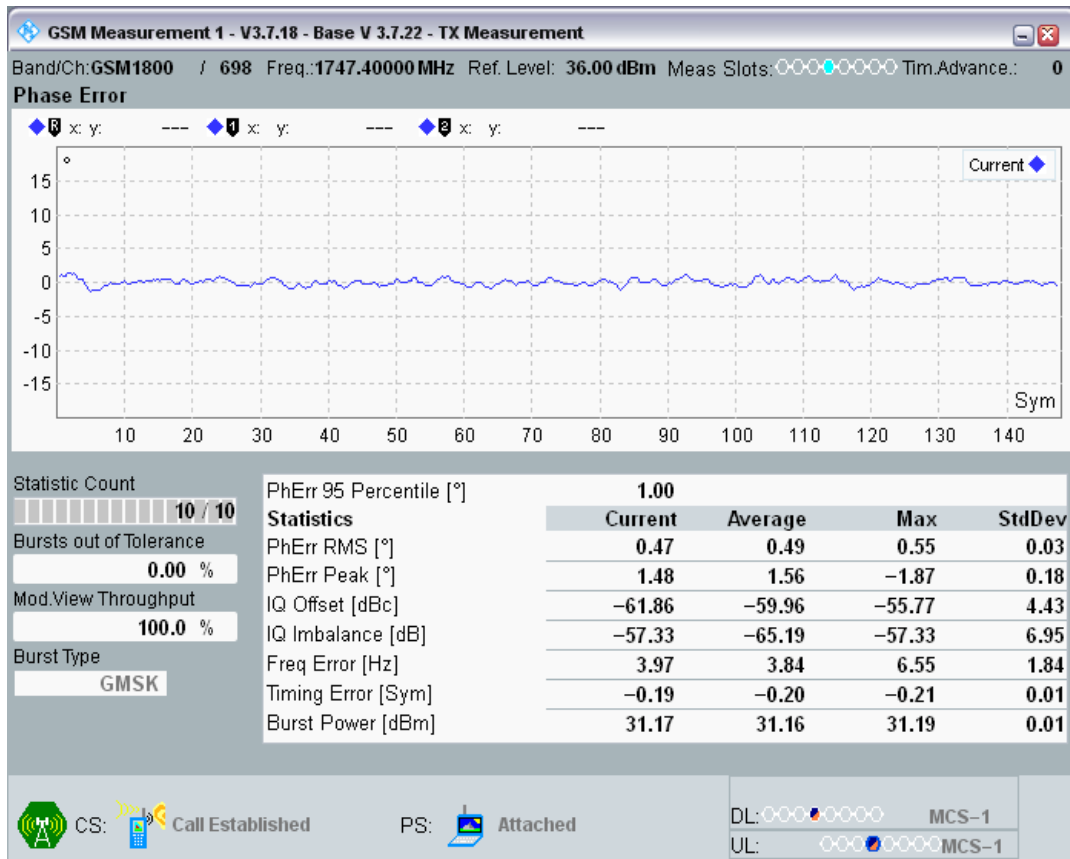


GSM1800 Channel=698 PCL=0 TU1_5 @4

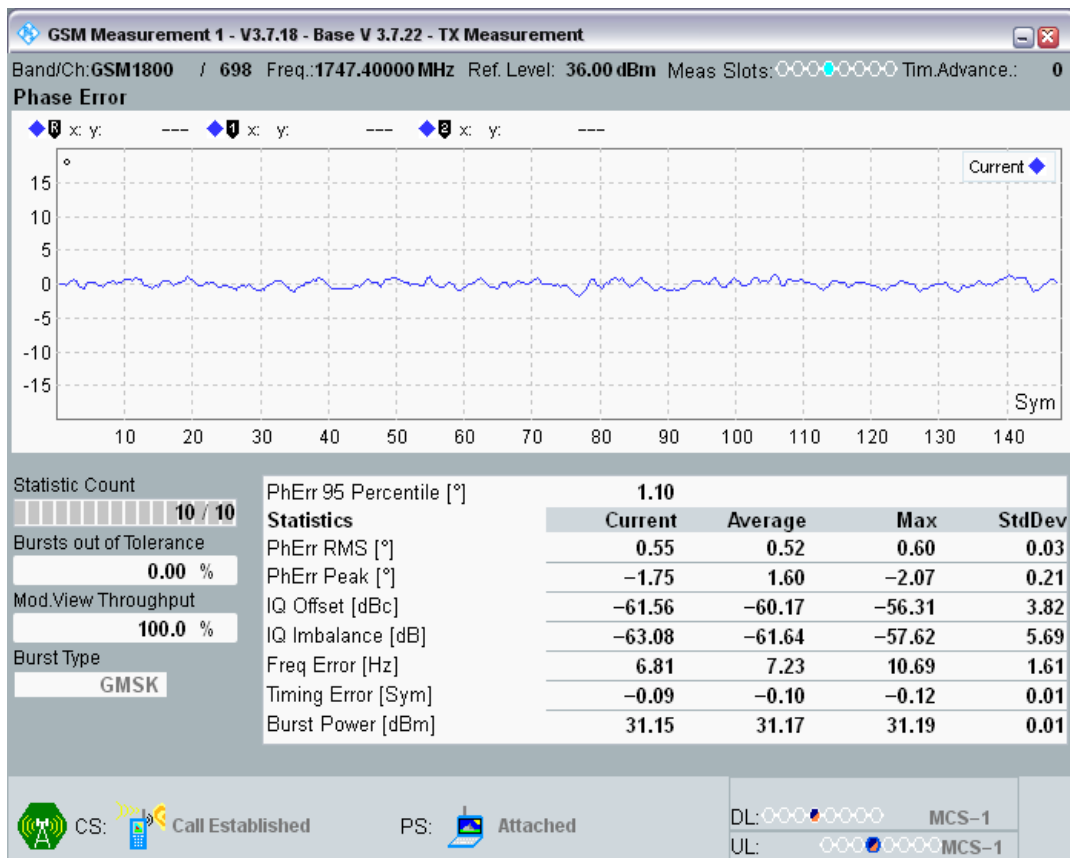


GSM1800 Channel=698 PCL=0 TU1_5 @5

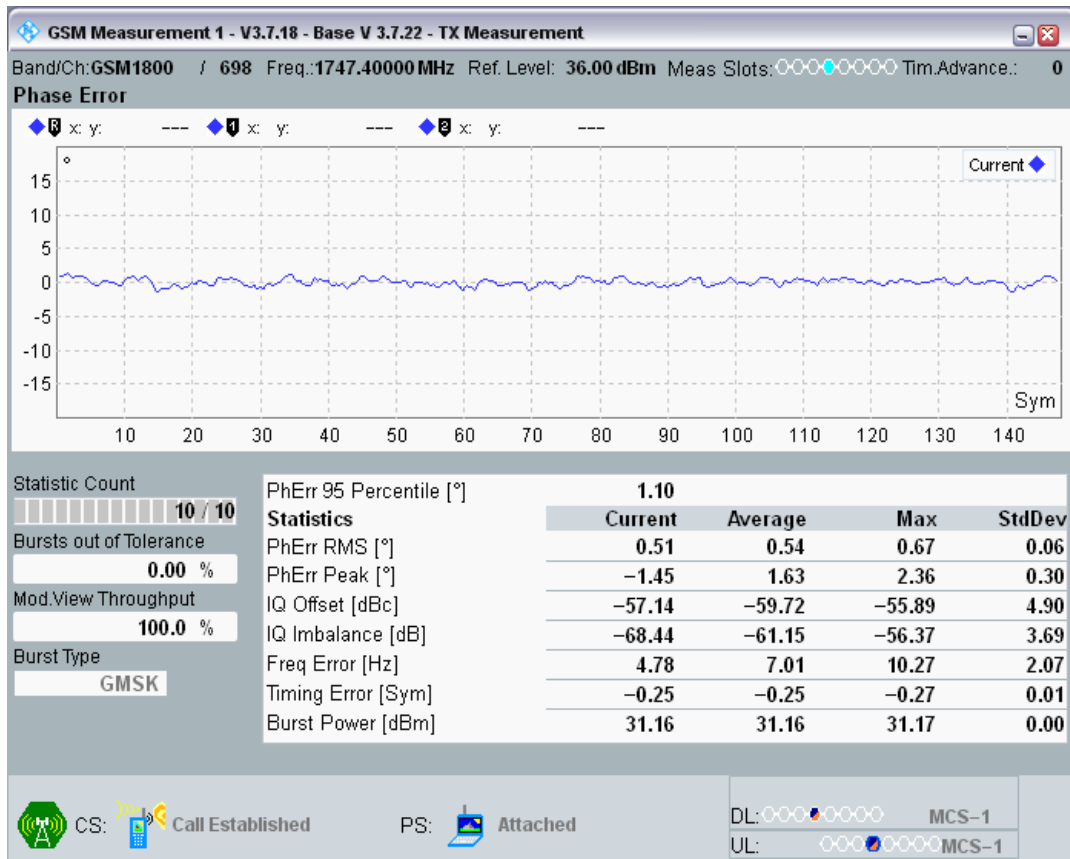


GSM1800 Channel=698 PCL=0 TU1_5 @7

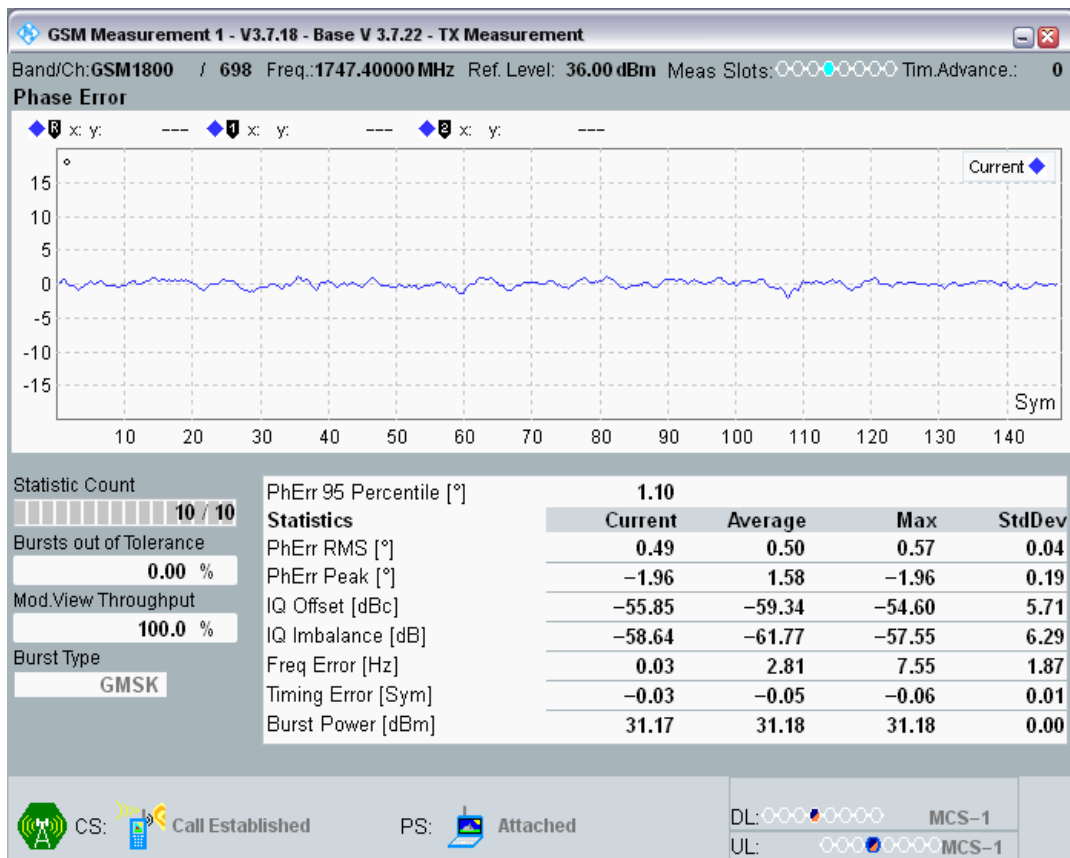


GSM1800 Channel=698 PCL=0 TU1_5 @6

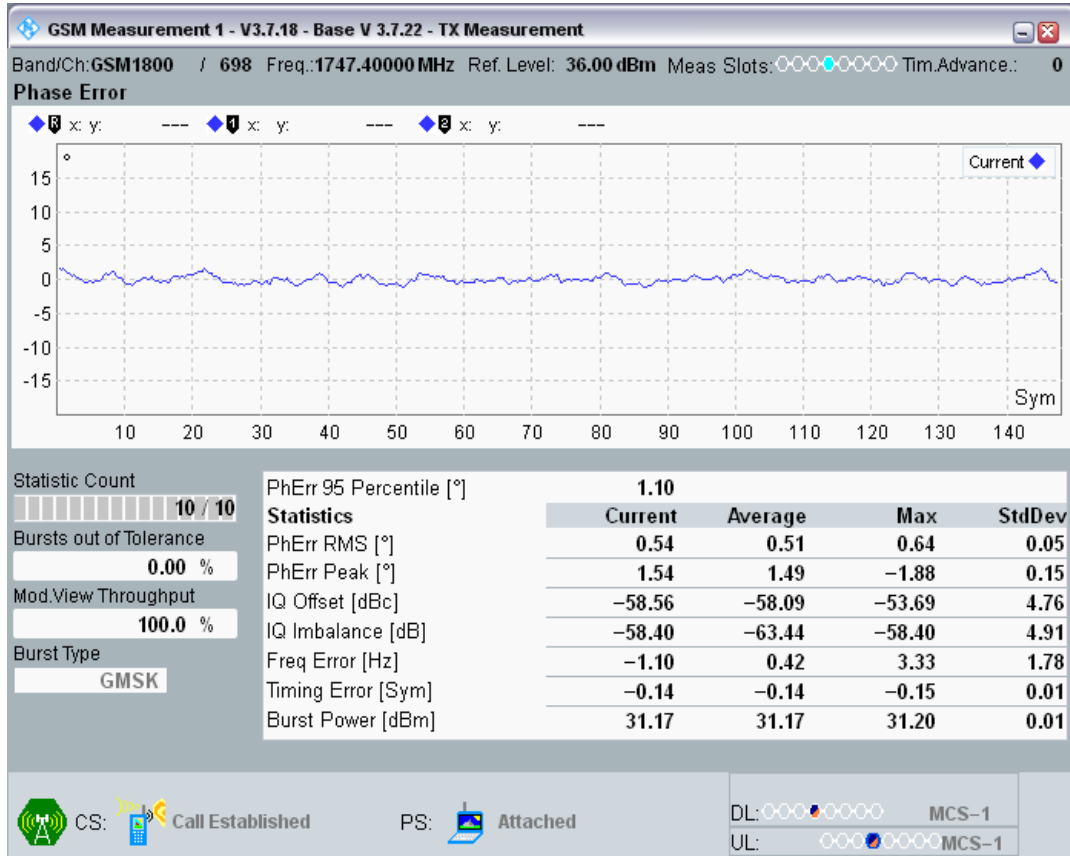


GSM1800 Channel=698 PCL=0 TU1_5 @9

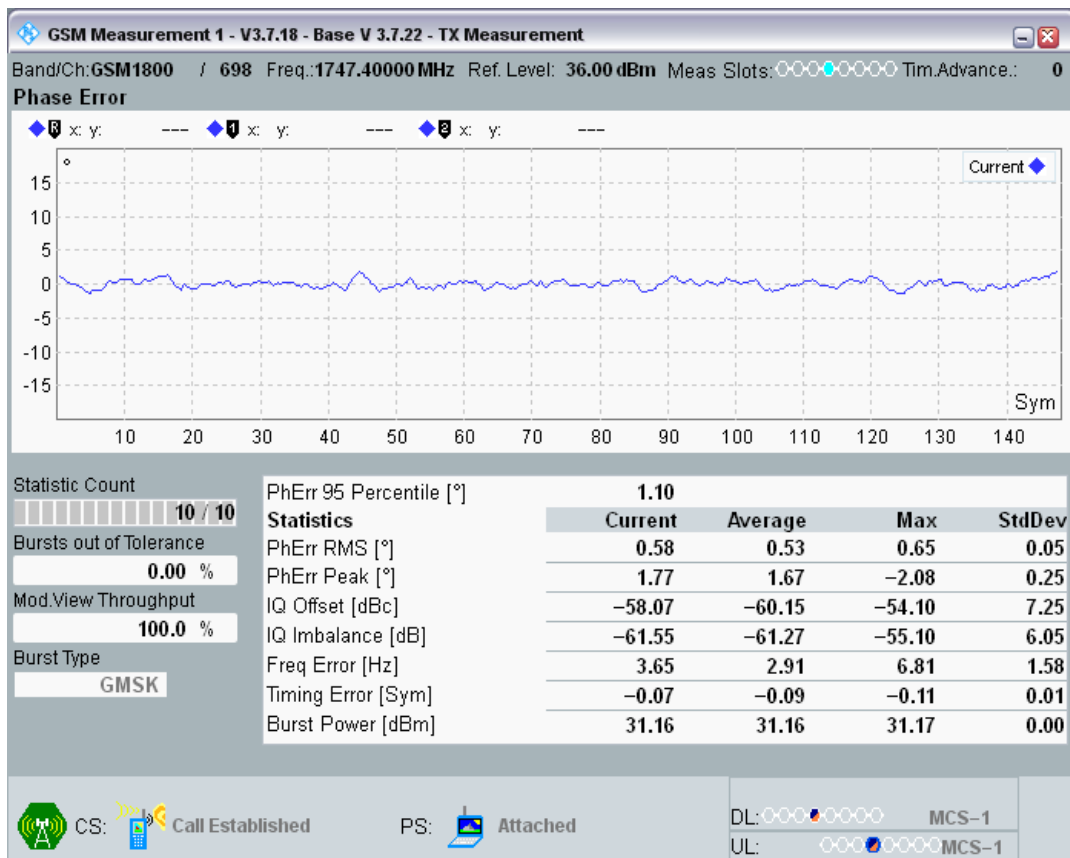


GSM1800 Channel=698 PCL=0 TU1_5 @8

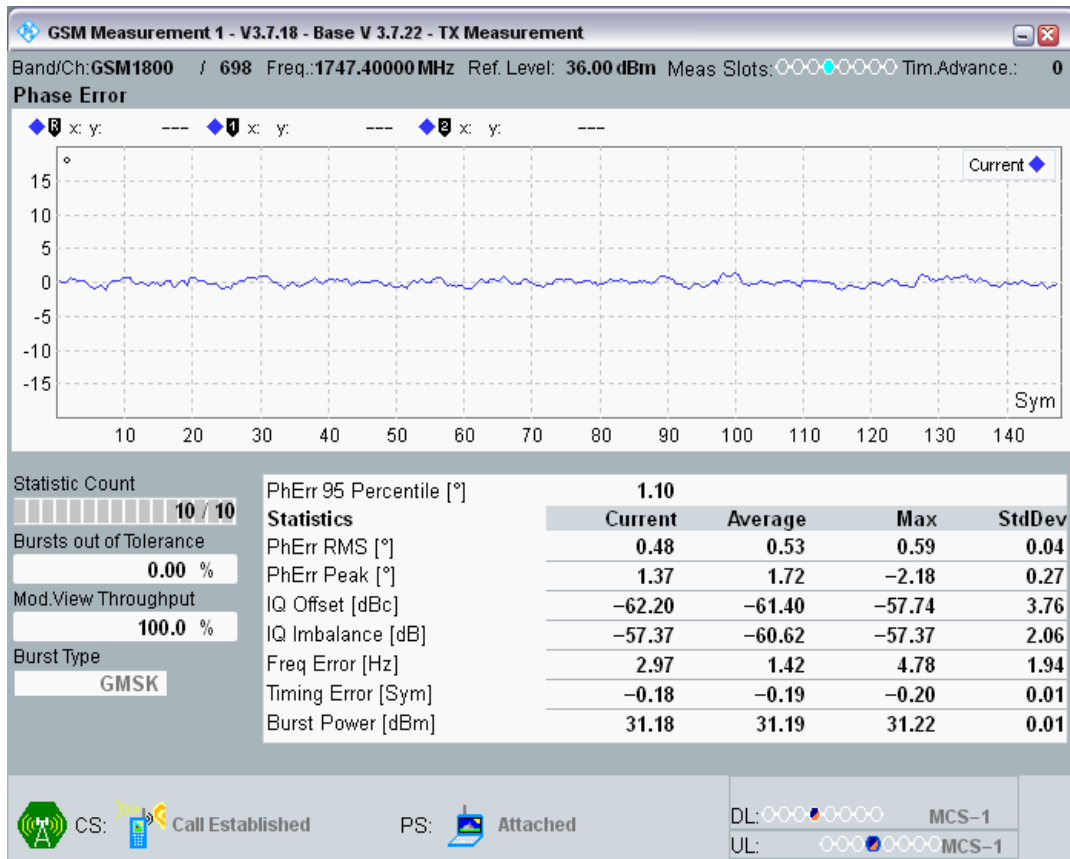


GSM1800 Channel=698 PCL=0 TU1_5 @11

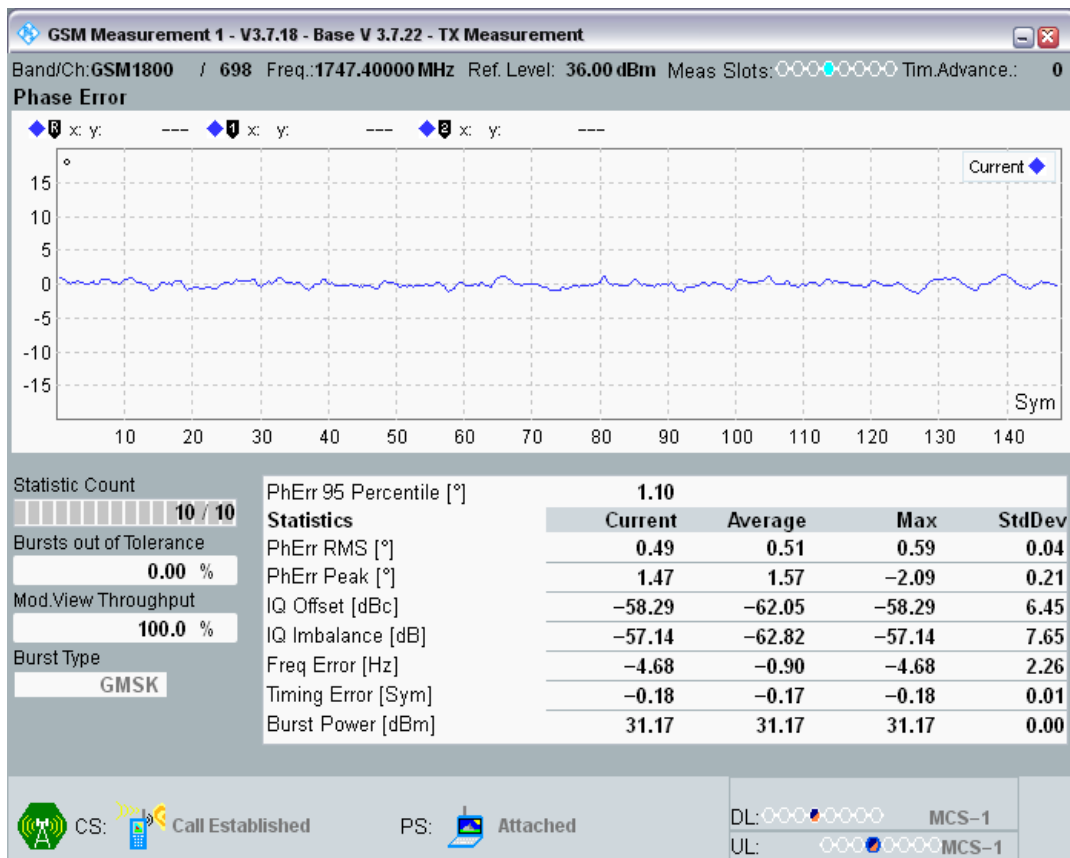


GSM1800 Channel=698 PCL=0 TU1_5 @10

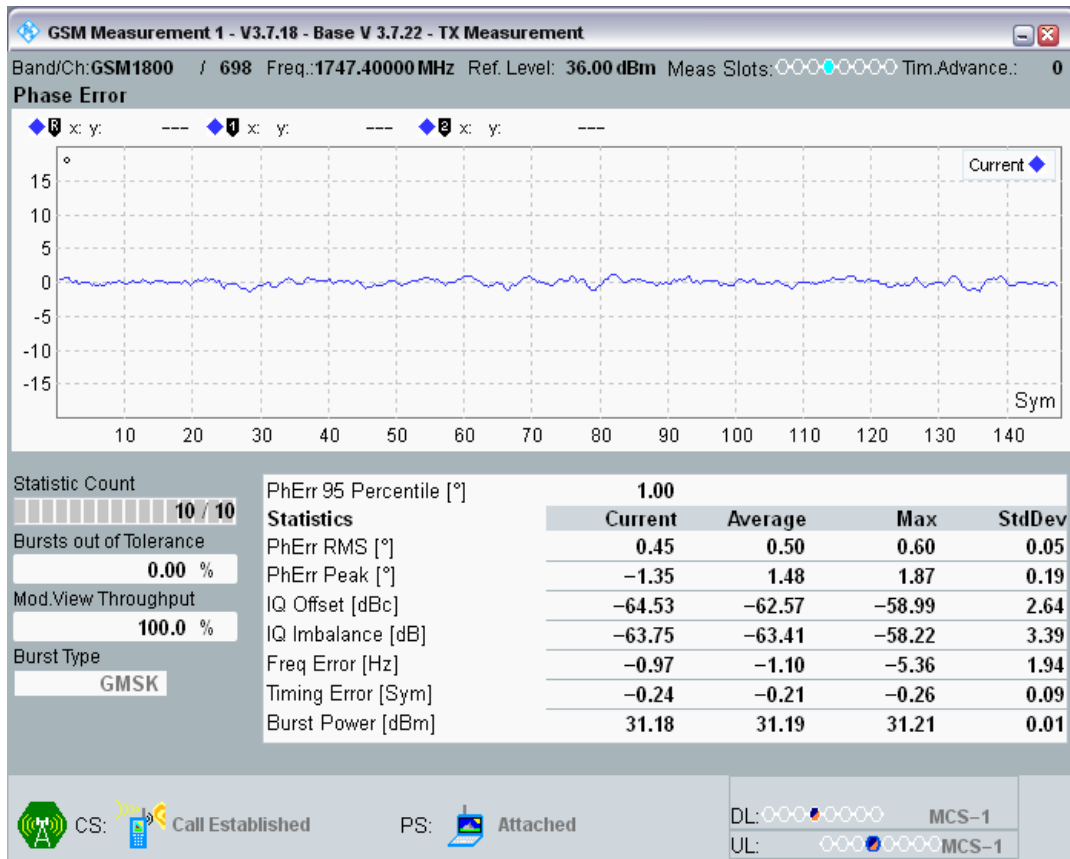


GSM1800 Channel=698 PCL=0 TU1_5 @14

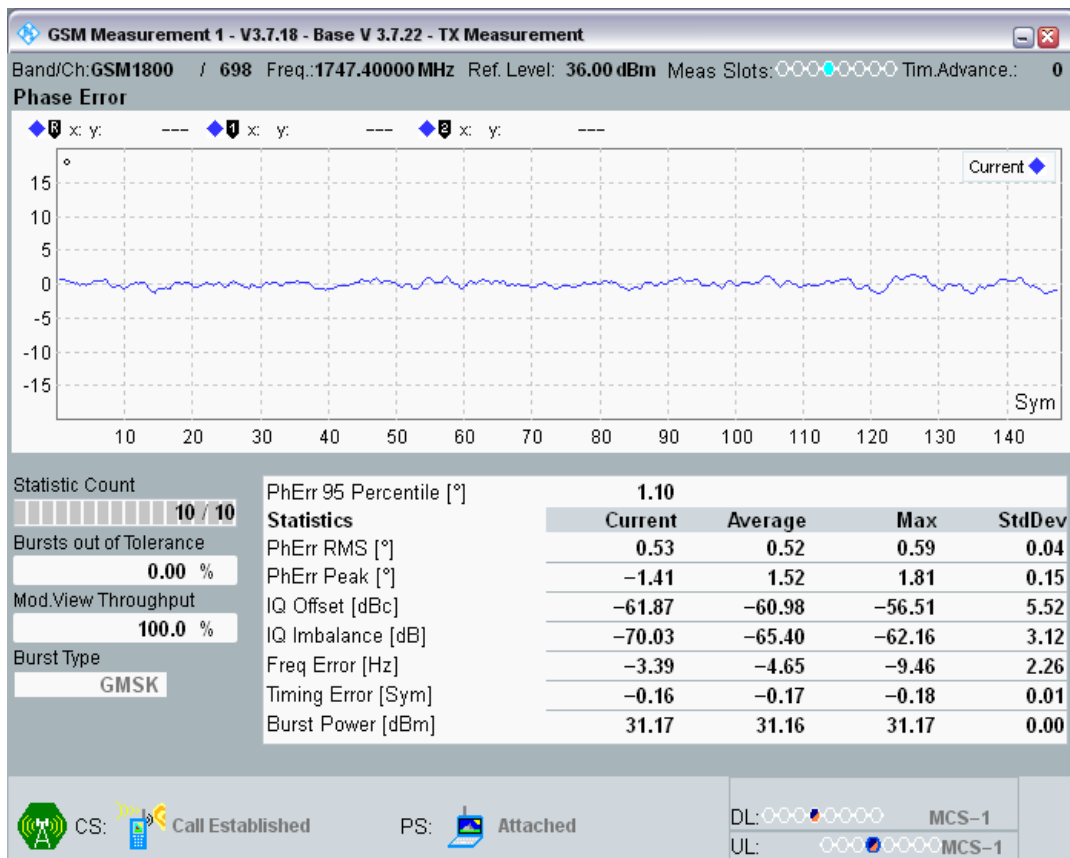


GSM1800 Channel=698 PCL=0 TU1_5 @12

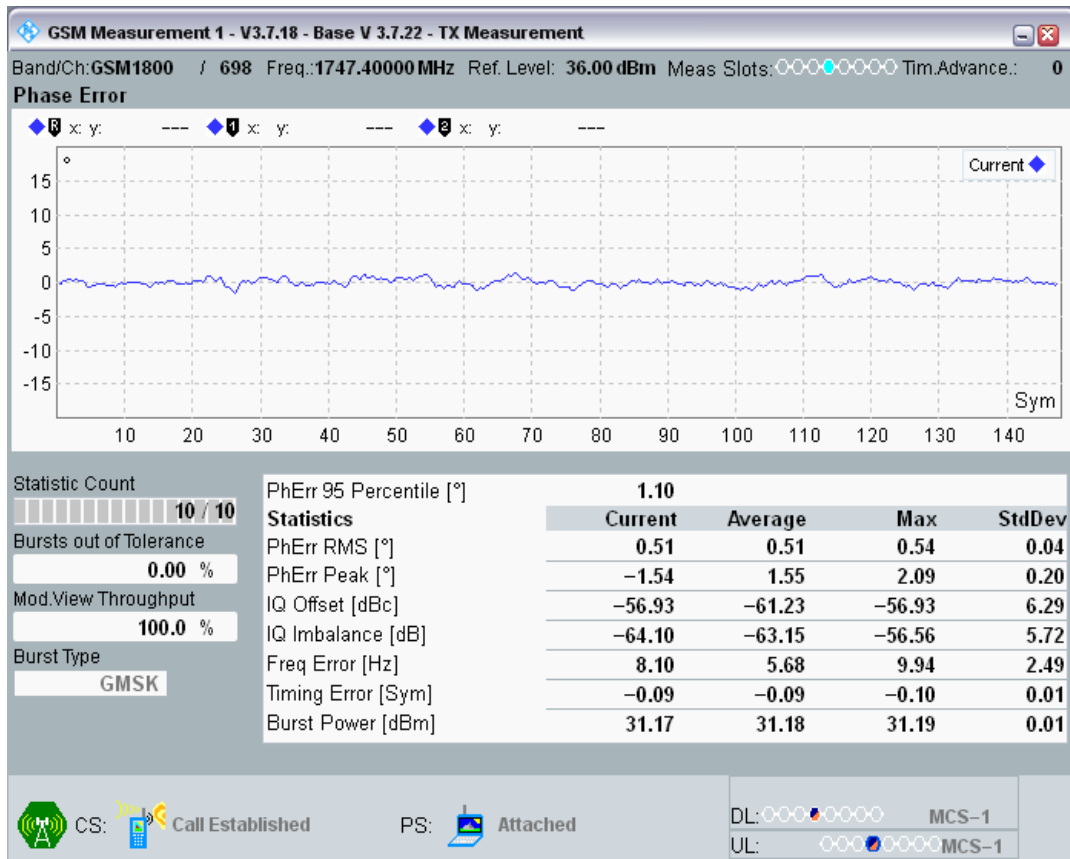


GSM1800 Channel=698 PCL=0 TU1_5 @13

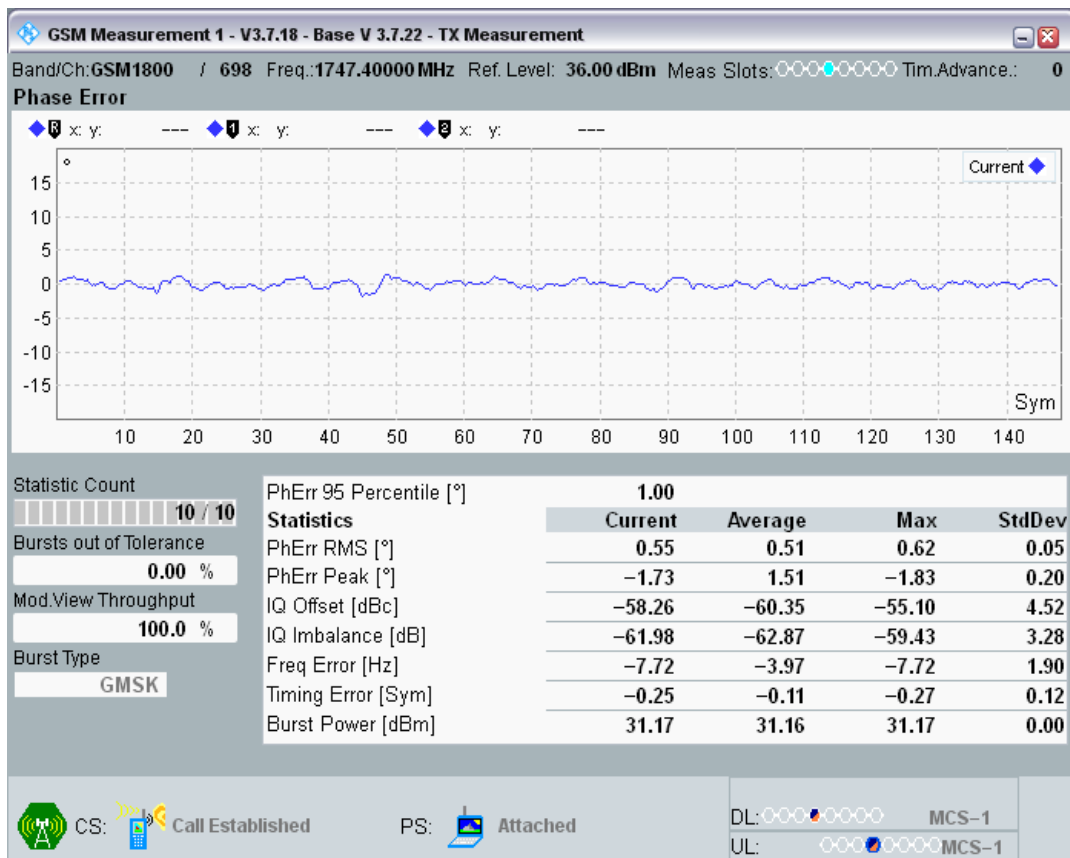


GSM1800 Channel=698 PCL=0 TU1_5 @16

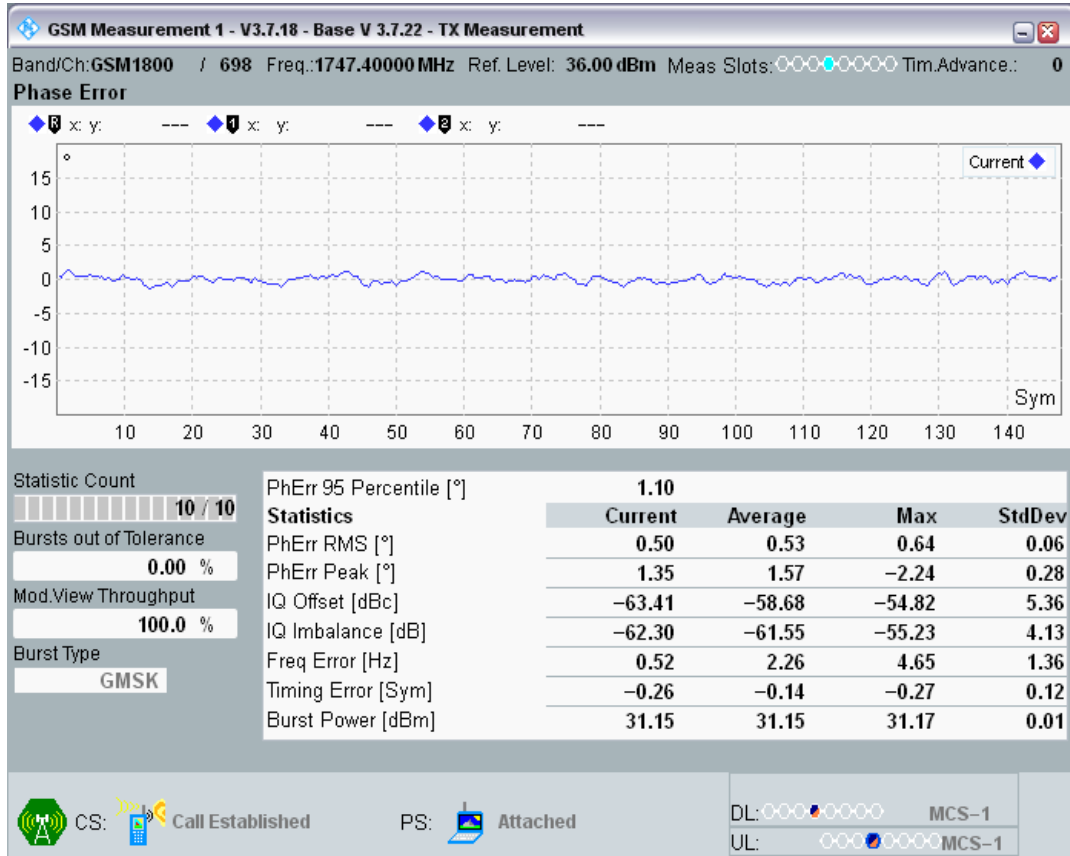


GSM1800 Channel=698 PCL=0 TU1_5 @15

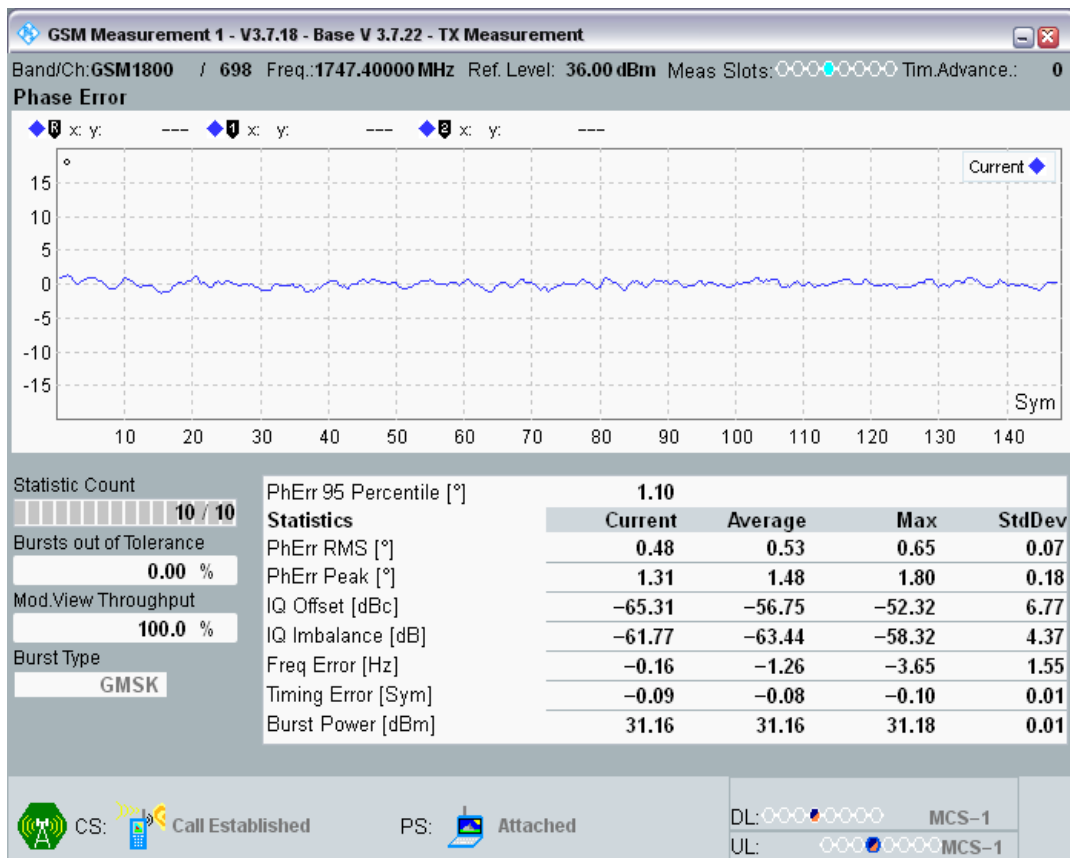


GSM1800 Channel=698 PCL=0 TU1_5 @18

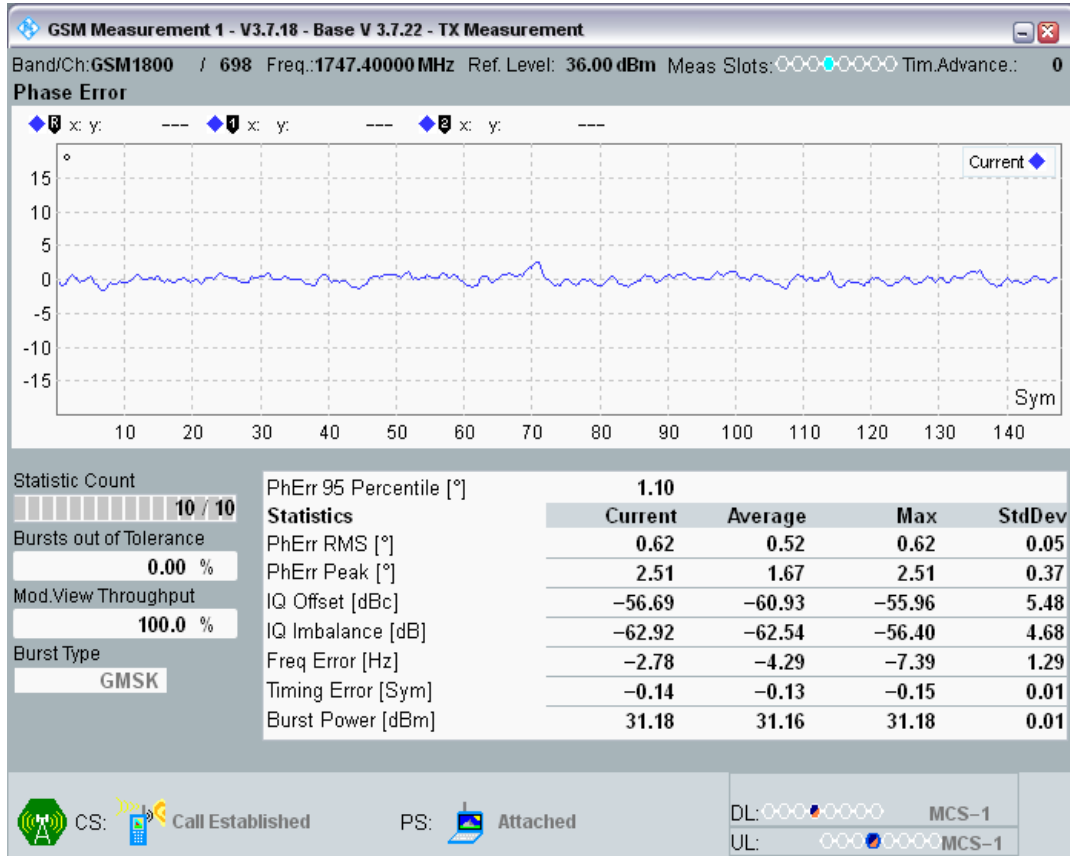


GSM1800 Channel=698 PCL=0 TU1_5 @17

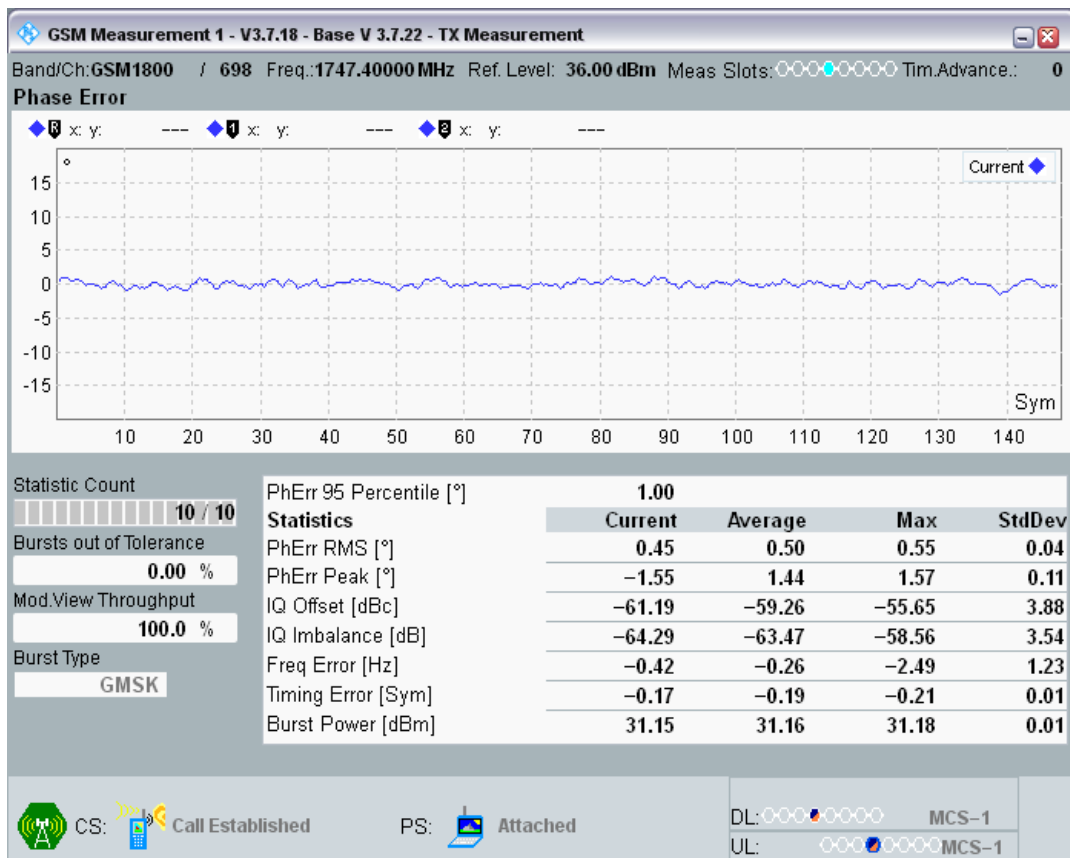


GSM1800 Channel=698 PCL=0 TU1_5 @19

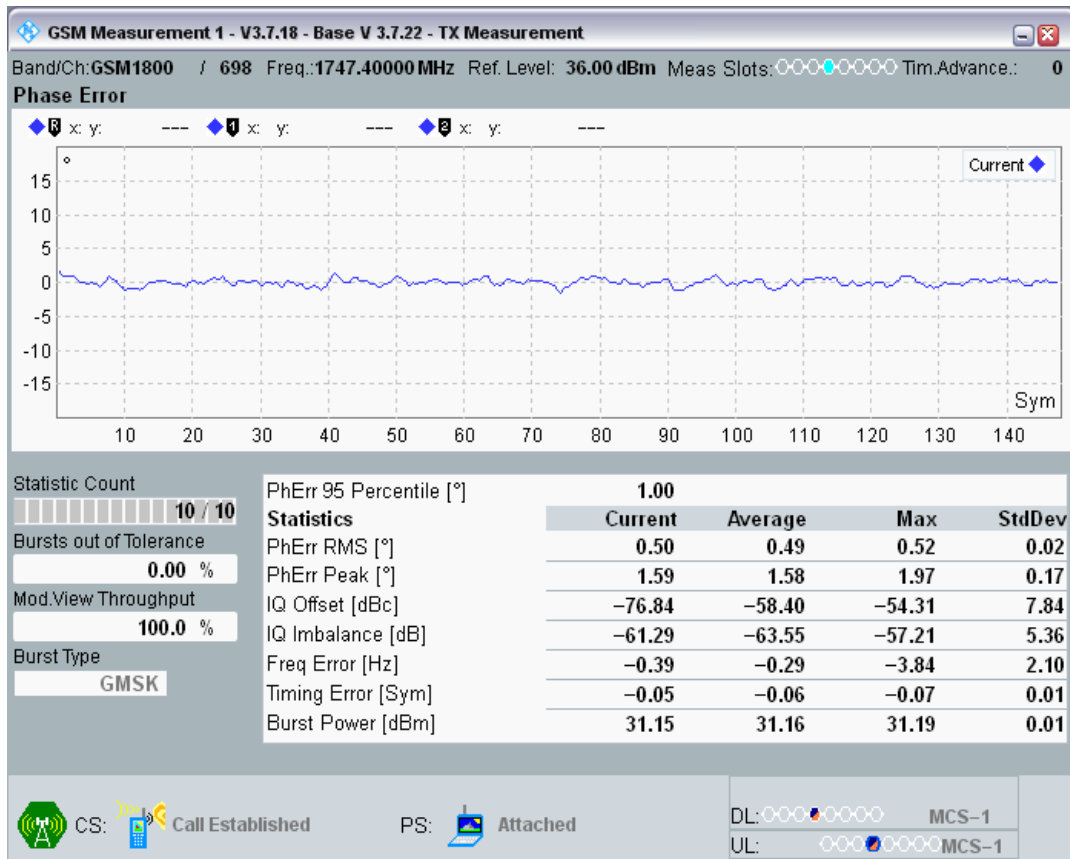


GSM1800 Channel=698 PCL=0 TU1_5 @20

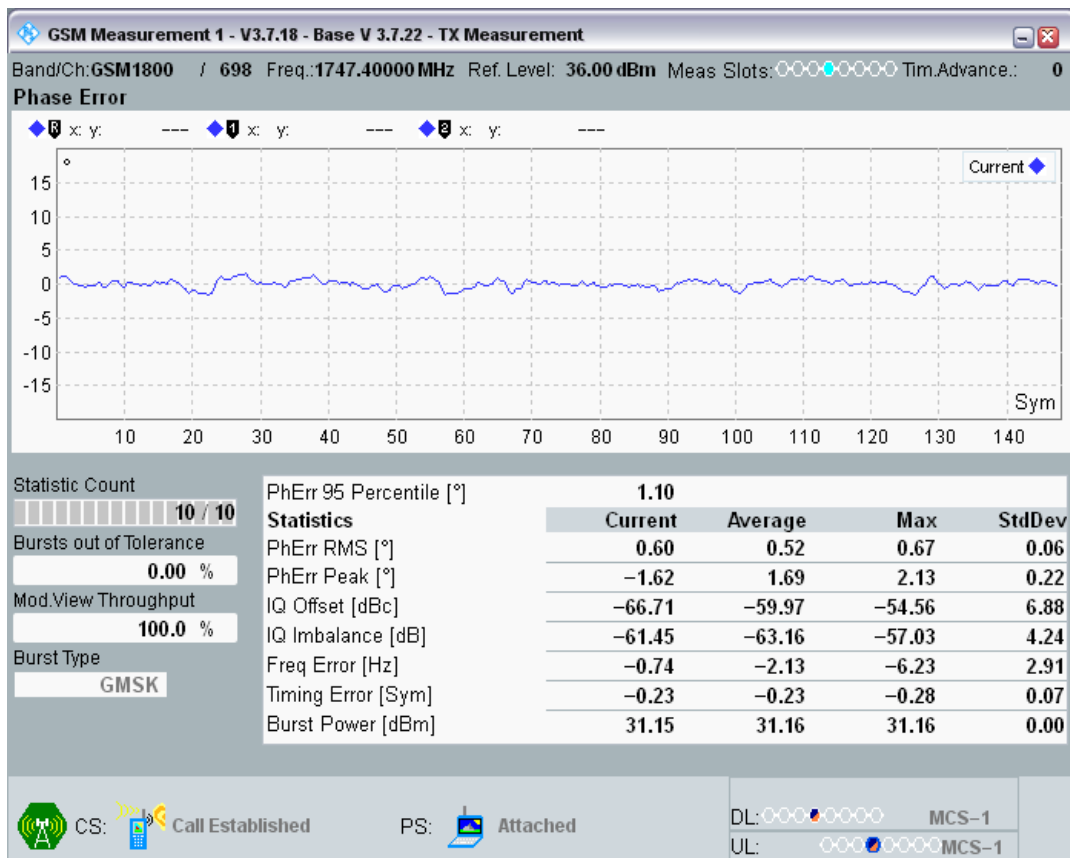


GSM900 Channel=38 PCL=5 RA250 @Sens1

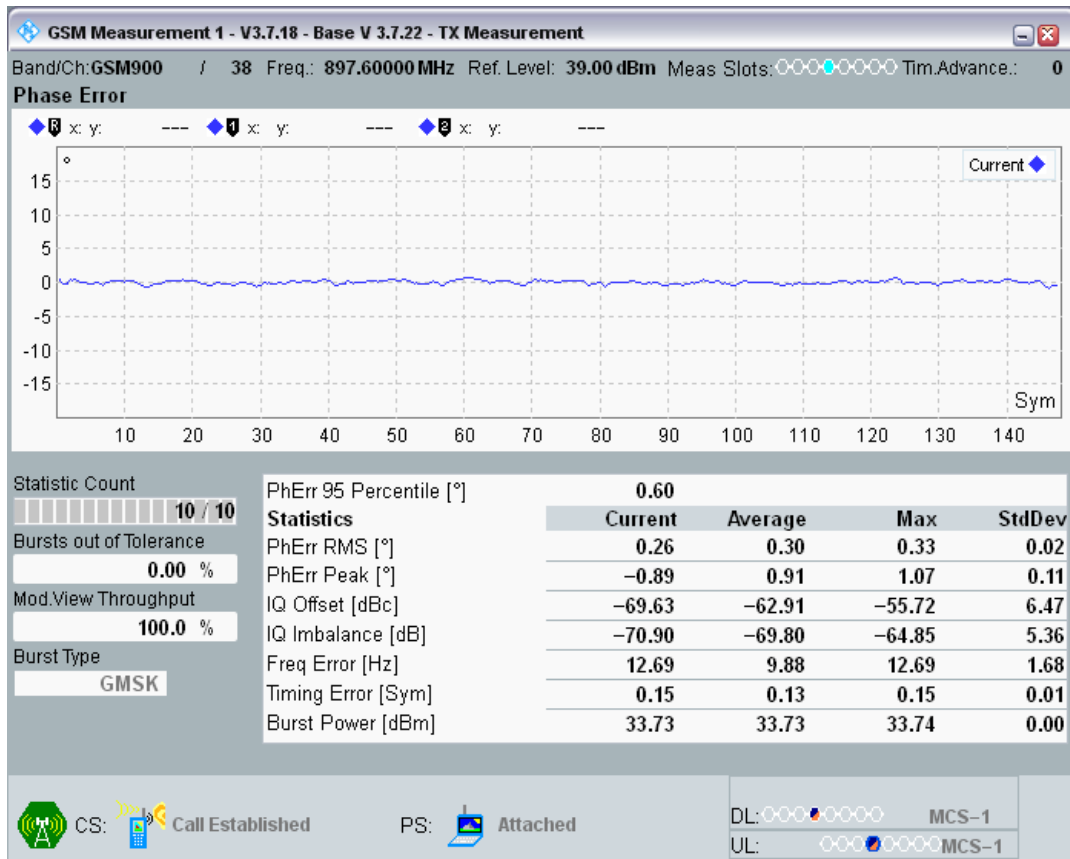


GSM900 Channel=38 PCL=5 RA250 @RACH

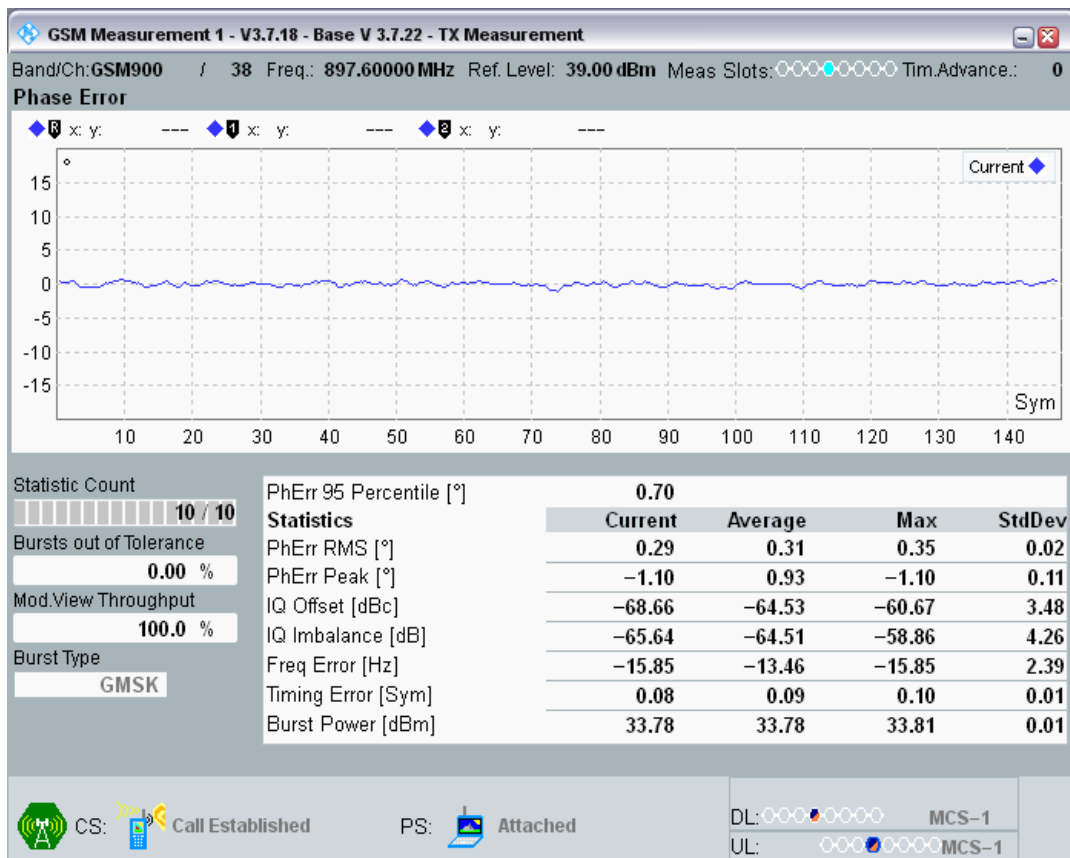


GSM900 Channel=38 PCL=5 RA250 @Sens2

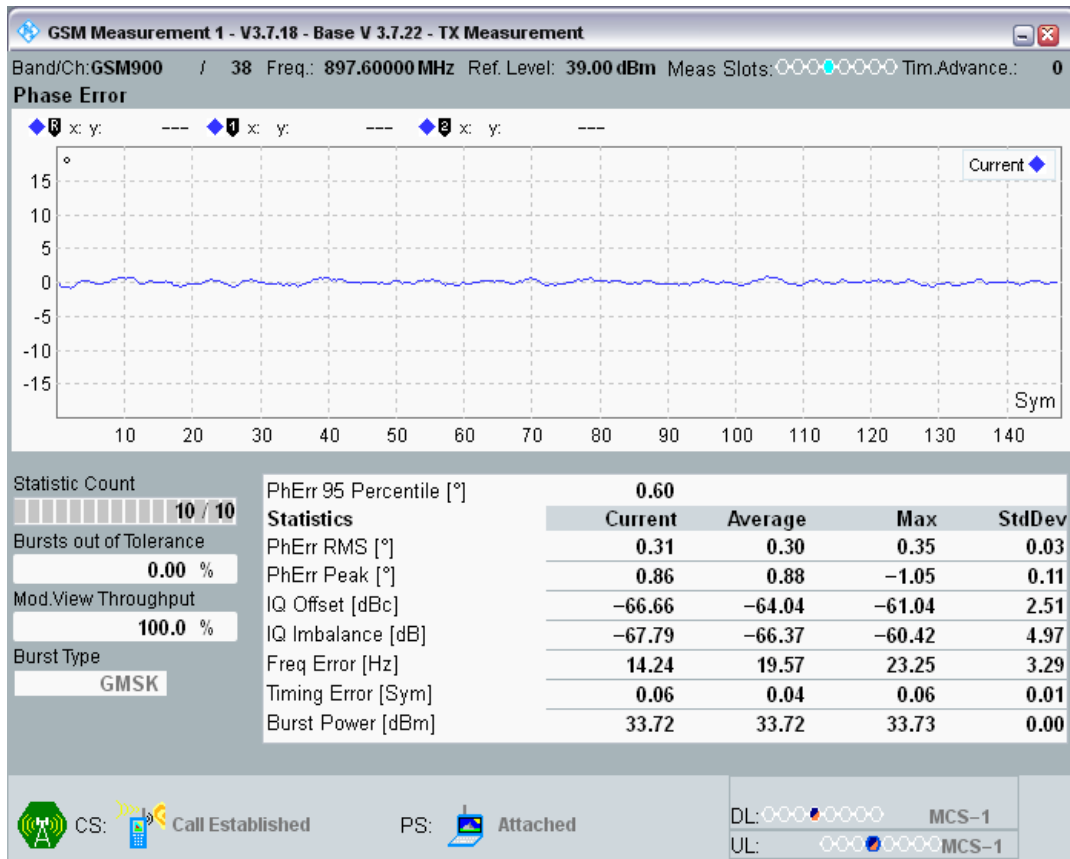


GSM900 Channel=38 PCL=5 RA250 @Sens3

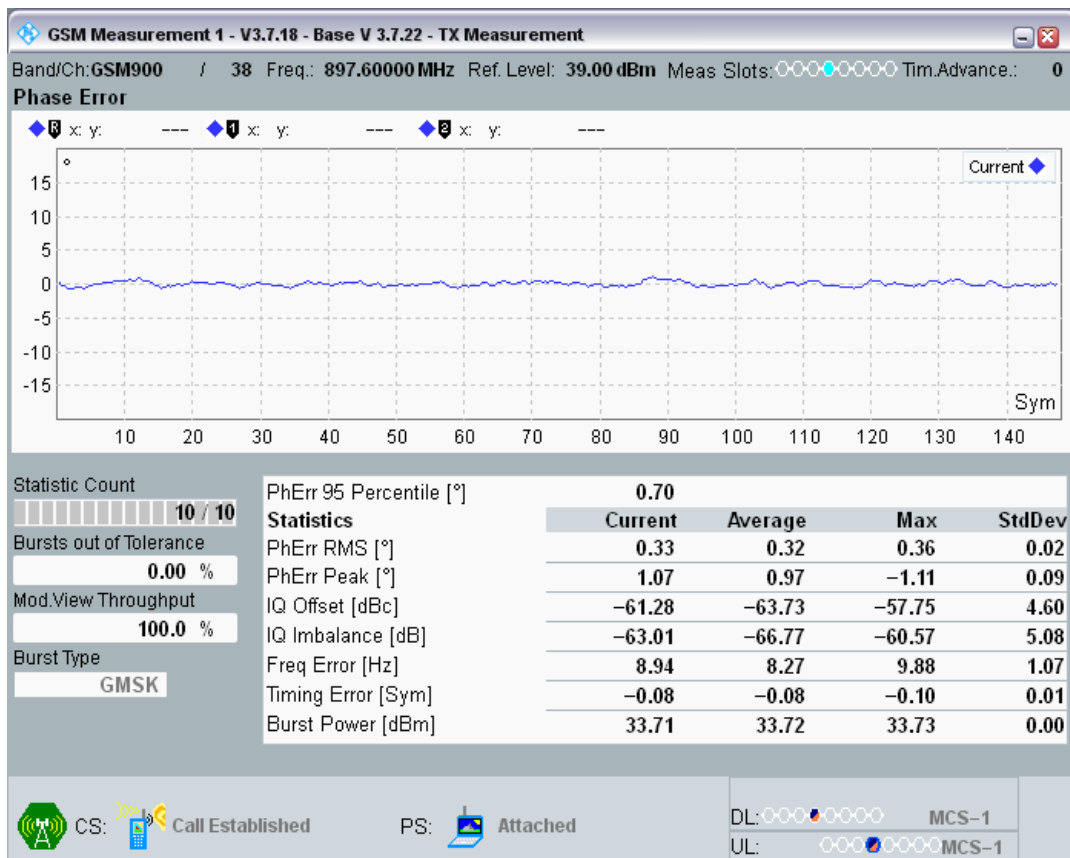


GSM900 Channel=38 PCL=5 RA250 @Sens5

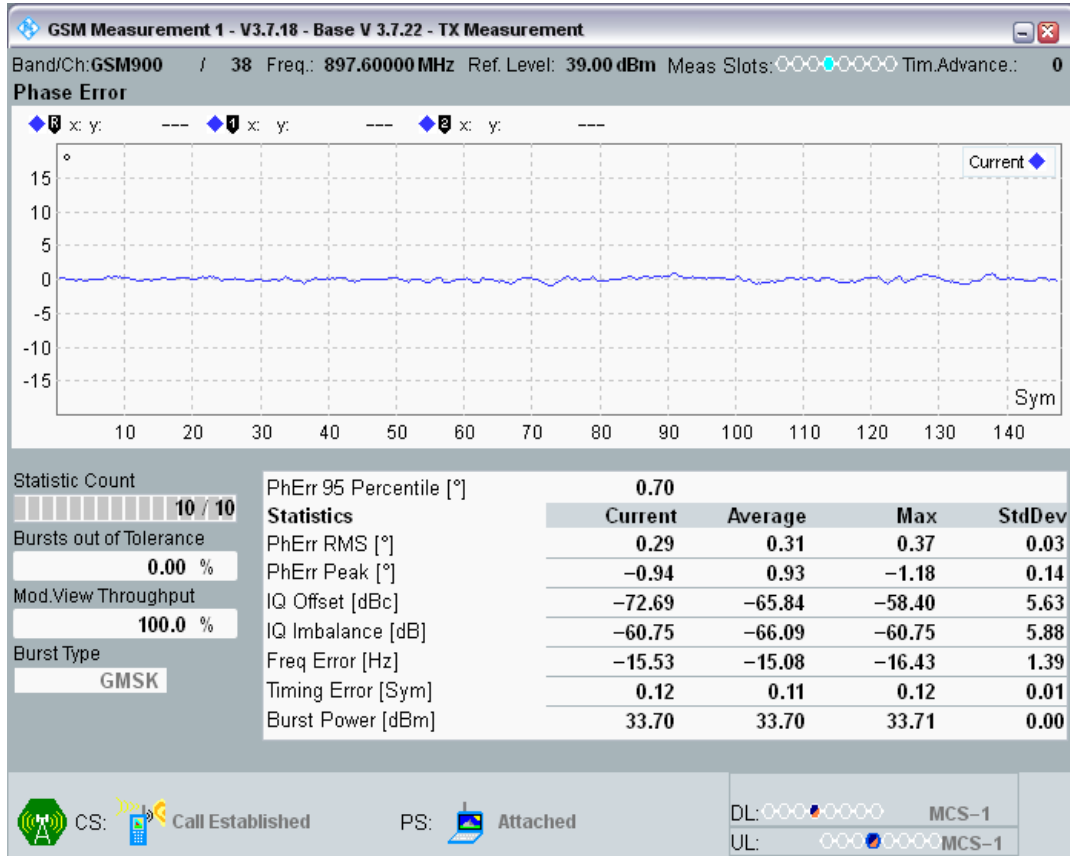


GSM900 Channel=38 PCL=5 RA250 @Sens4

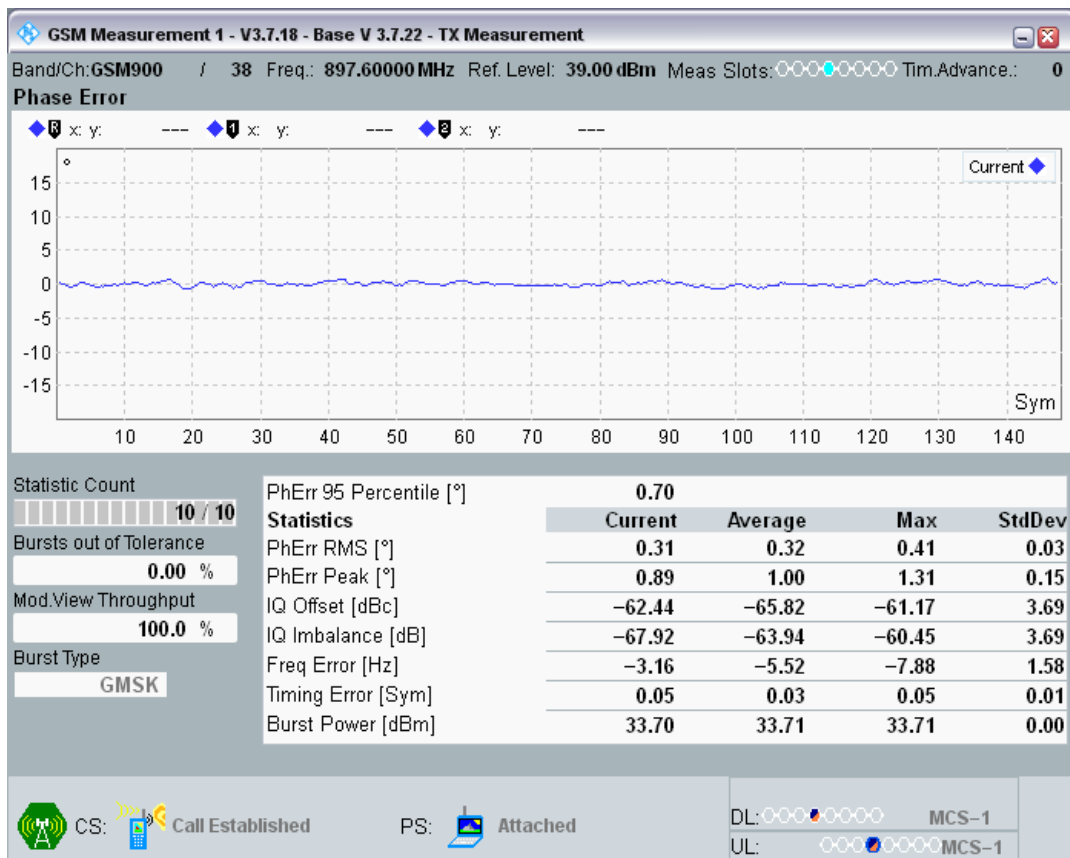


GSM900 Channel=38 PCL=5 HT100 @RACH

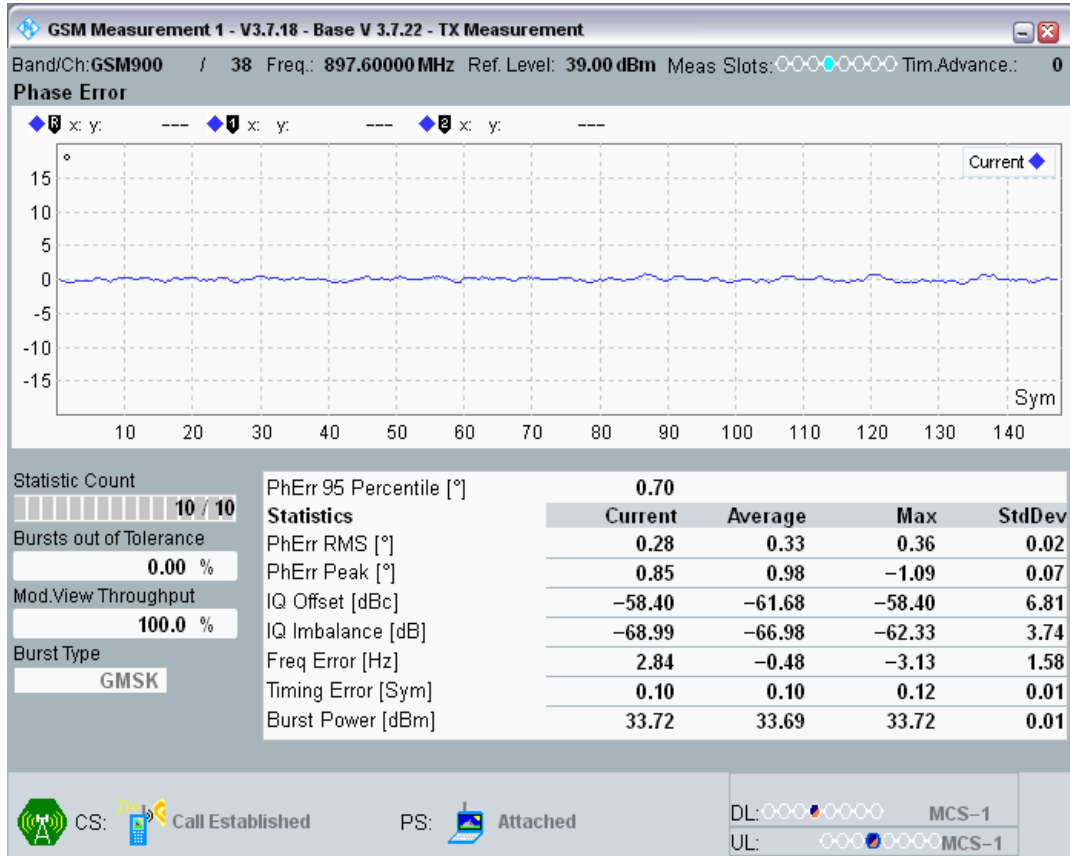


GSM900 Channel=38 PCL=5 HT100 @Sens3

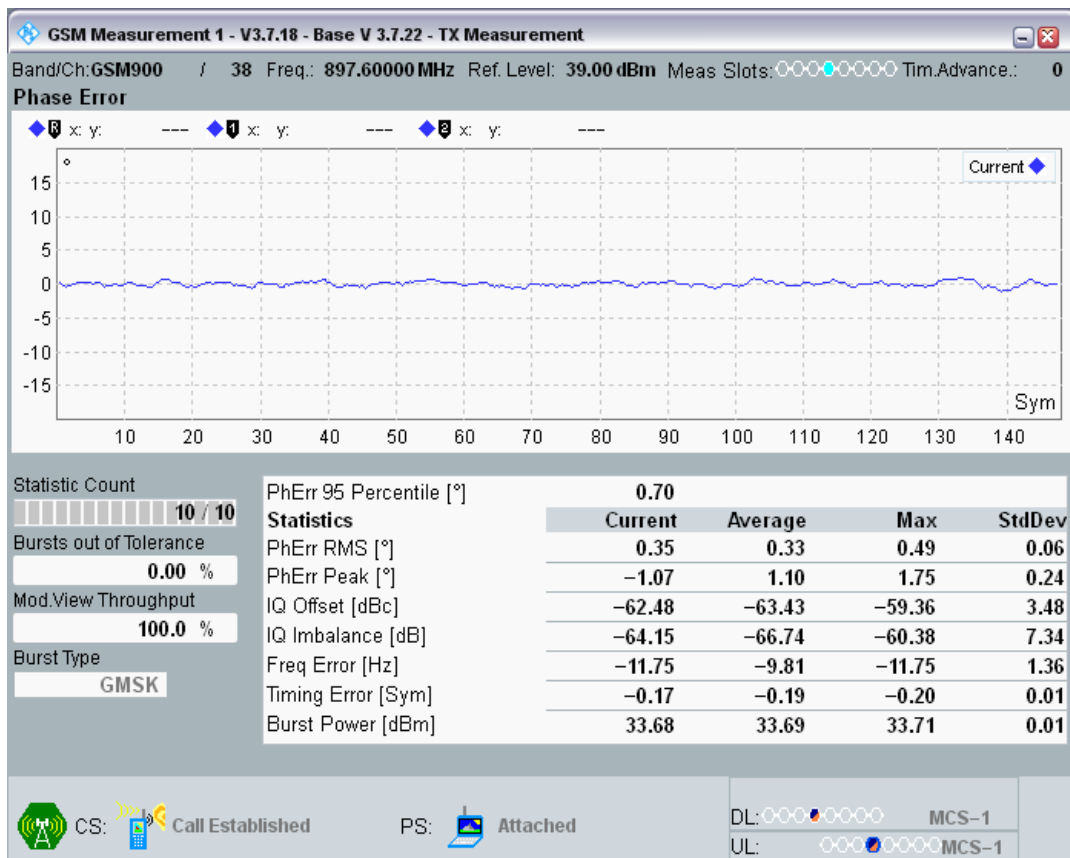


GSM900 Channel=38 PCL=5 HT100 @Sens2

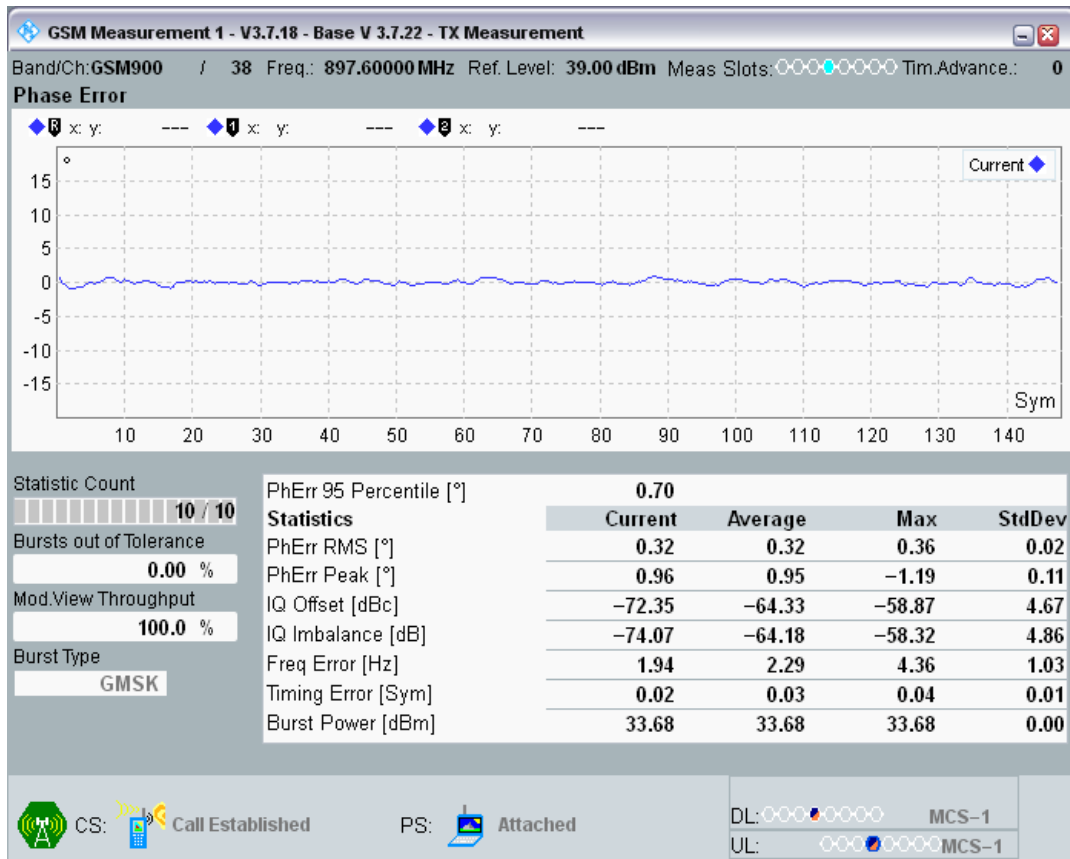


GSM900 Channel=38 PCL=5 HT100 @Sens1

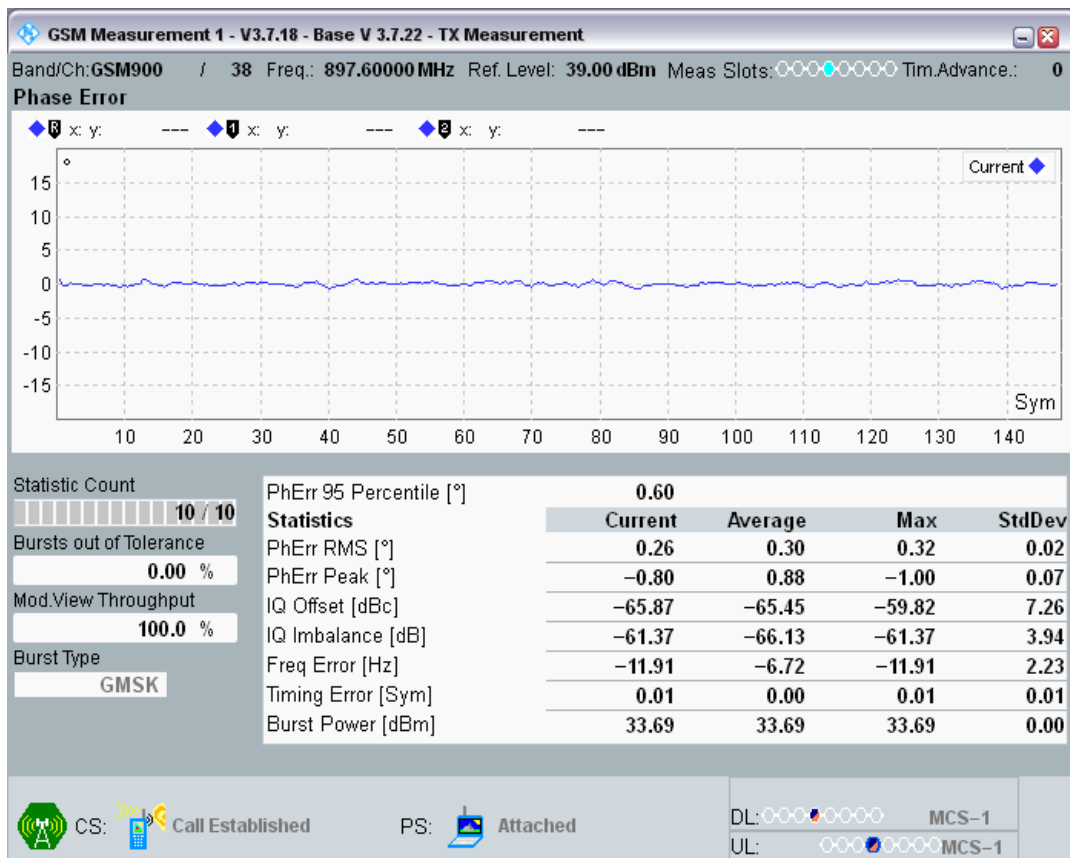


GSM900 Channel=38 PCL=5 HT100 @Sens5

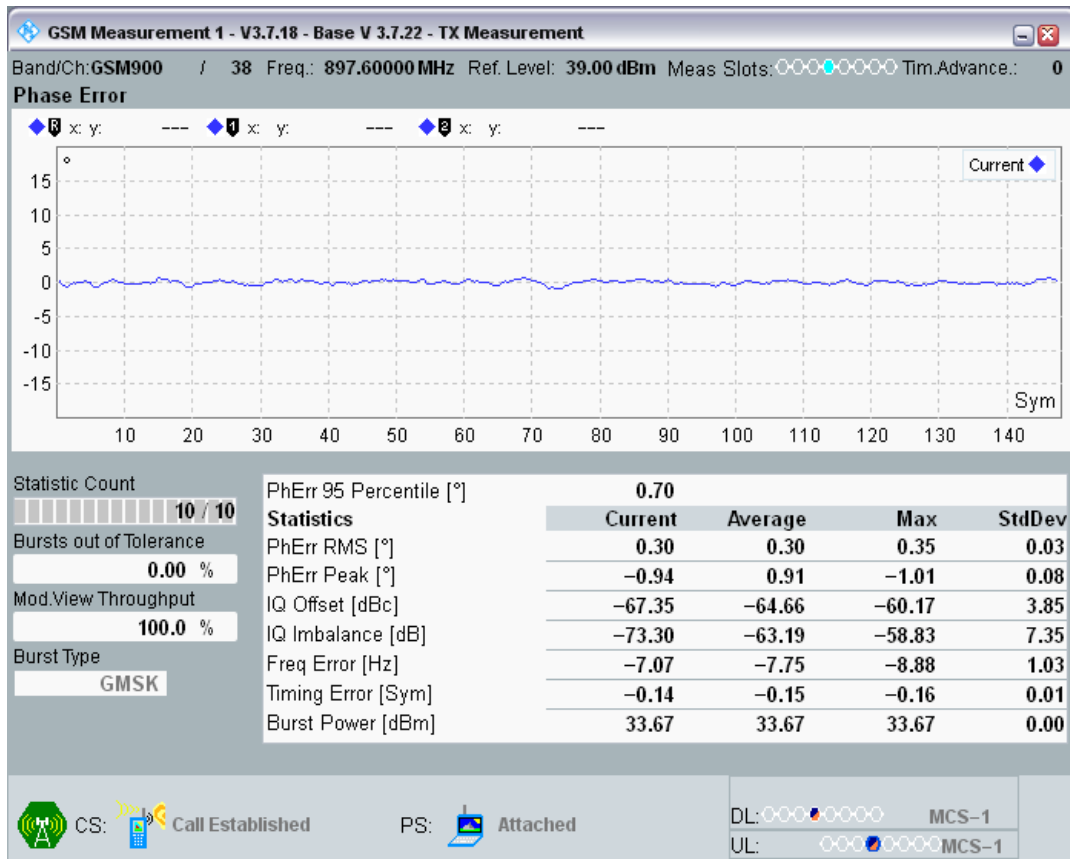


GSM900 Channel=38 PCL=5 HT100 @Sens4

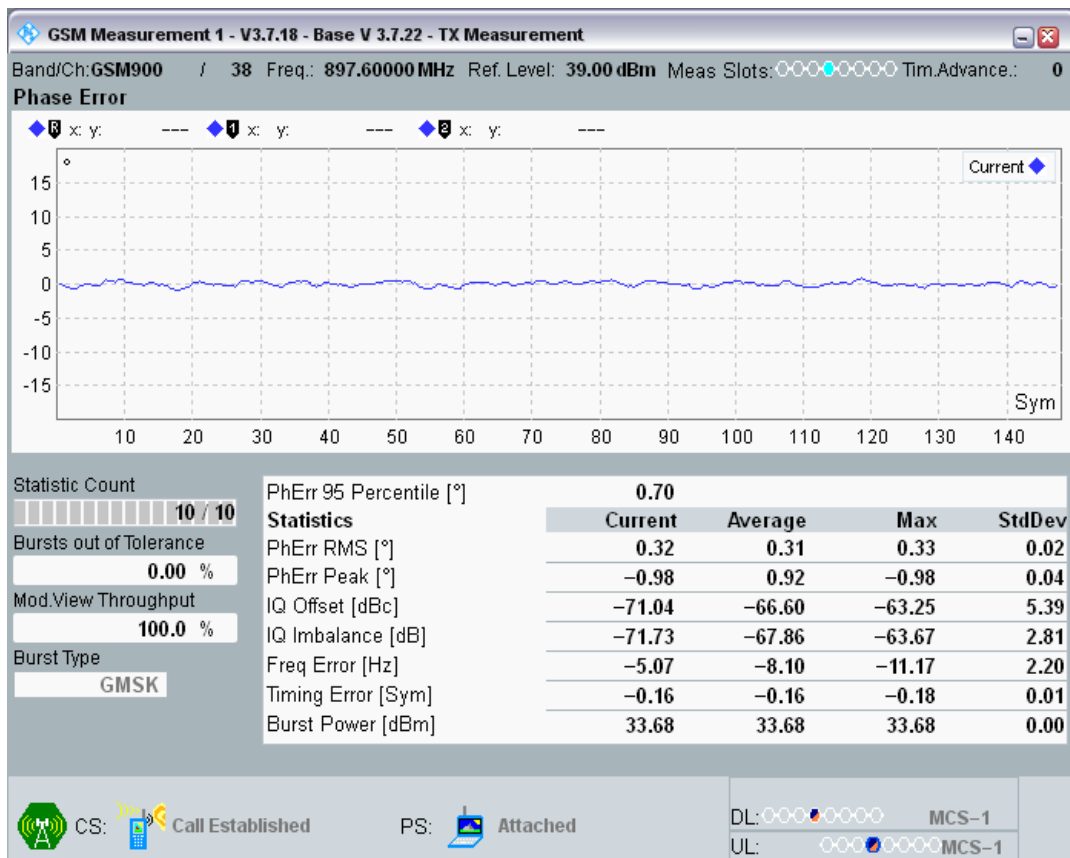


GSM900 Channel=38 PCL=5 TU50 @Sens1

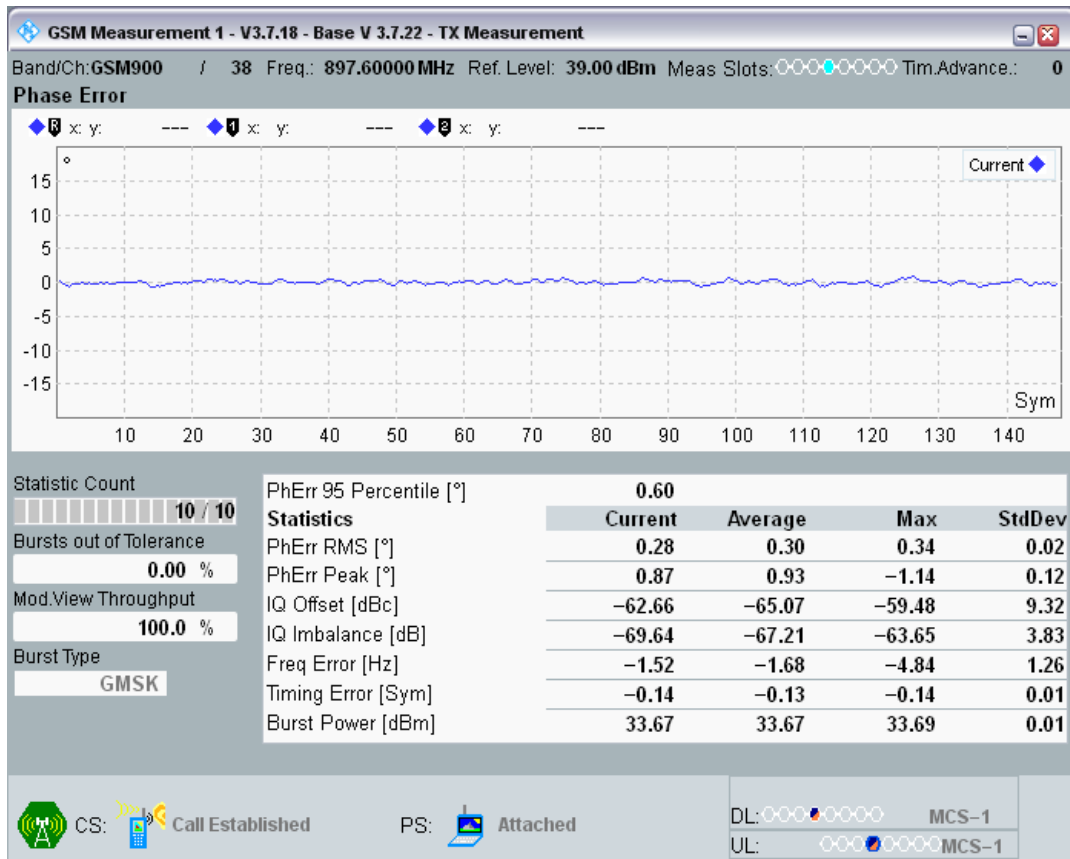


GSM900 Channel=38 PCL=5 TU50 @RACH

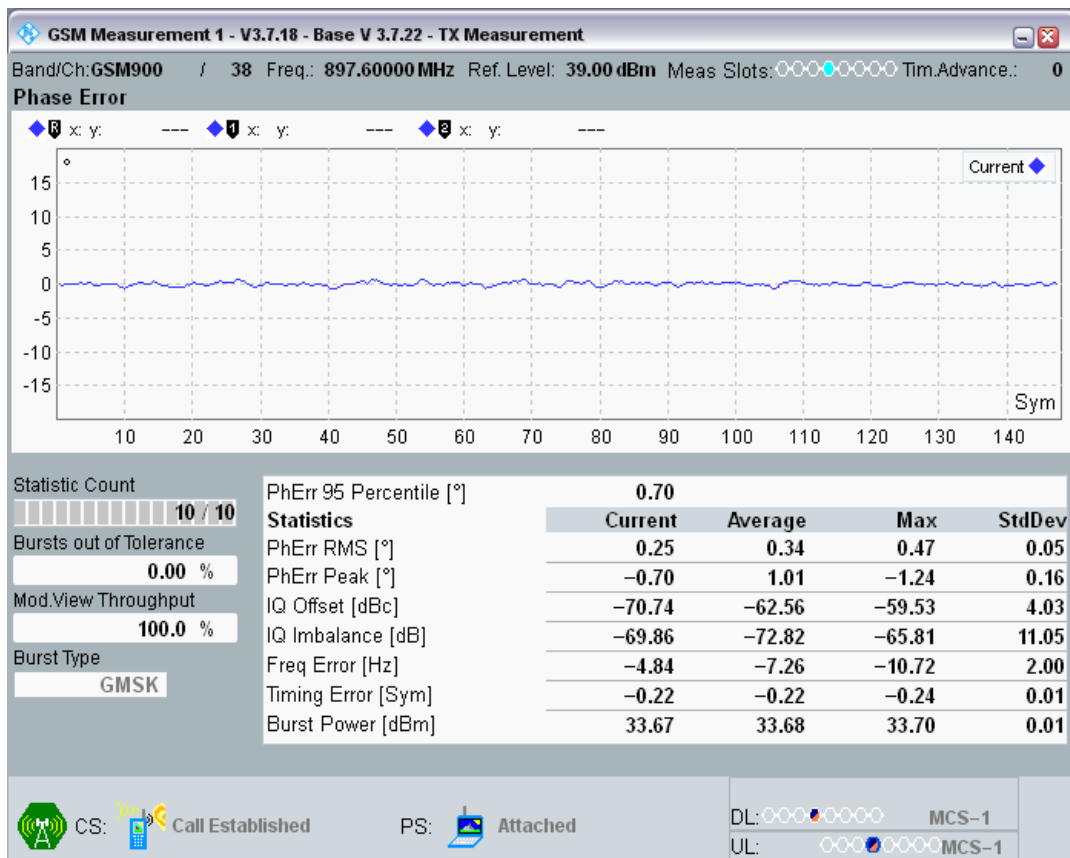


GSM900 Channel=38 PCL=5 TU50 @Sens3

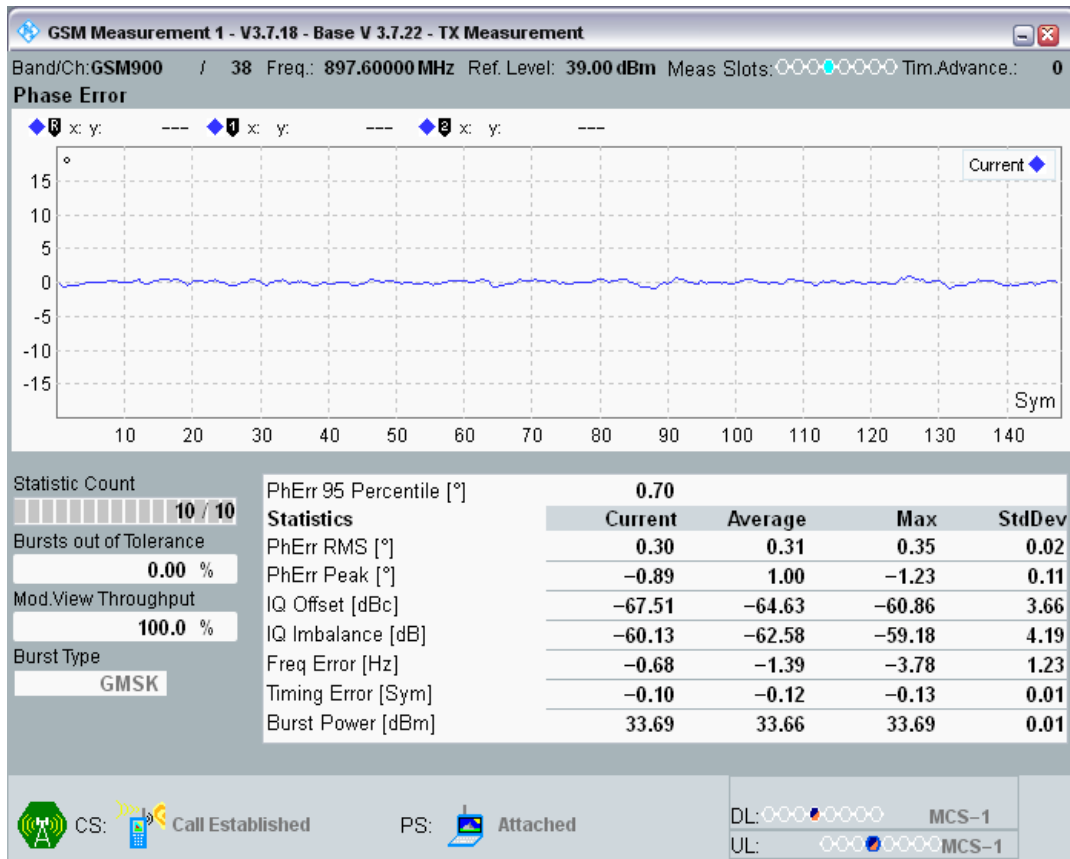


GSM900 Channel=38 PCL=5 TU50 @Sens2

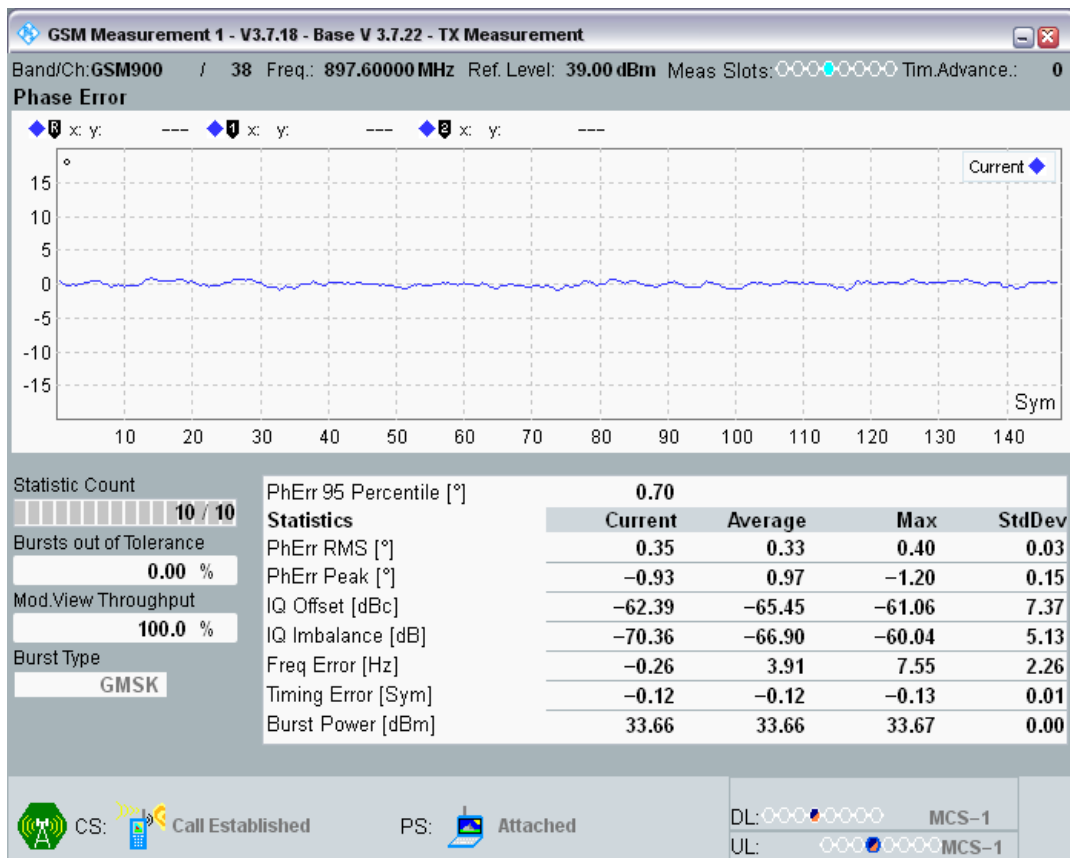


GSM900 Channel=38 PCL=5 TU50 @Sens4

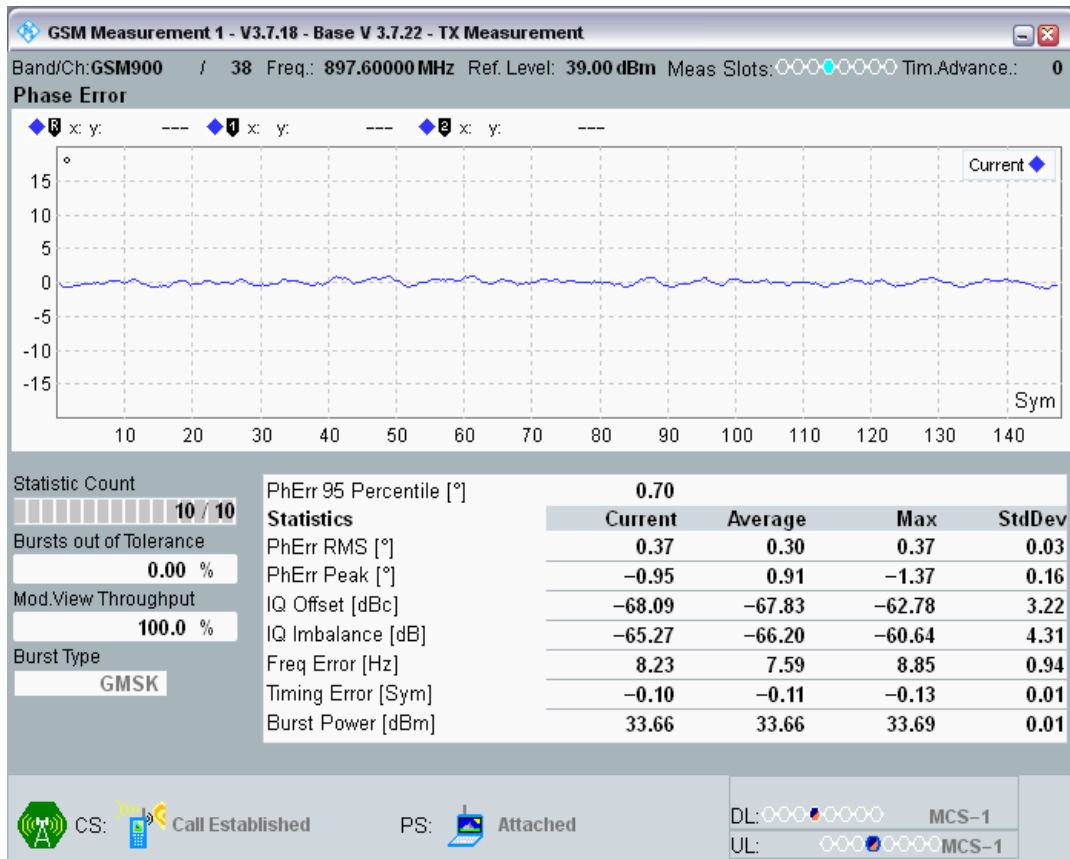


GSM900 Channel=38 PCL=5 TU50 @Sens5

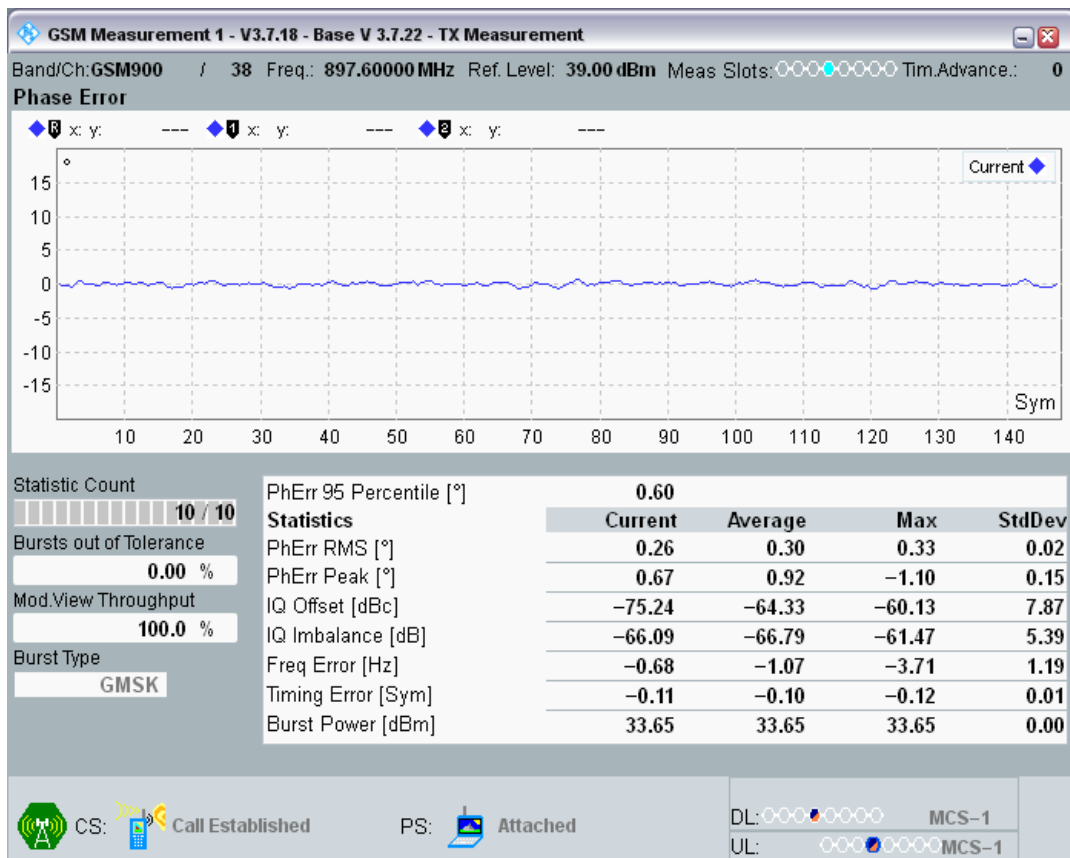


GSM900 Channel=38 PCL=5 TU3 @RACH

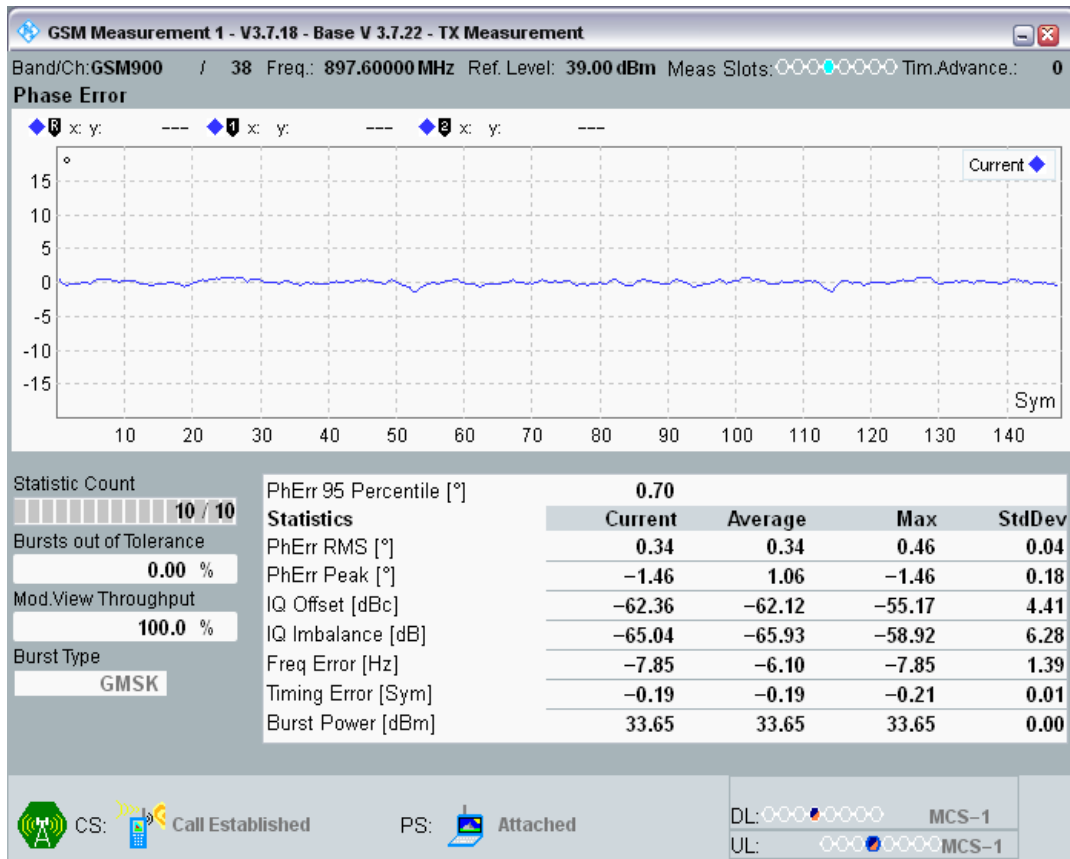


GSM900 Channel=38 PCL=5 TU3 @2

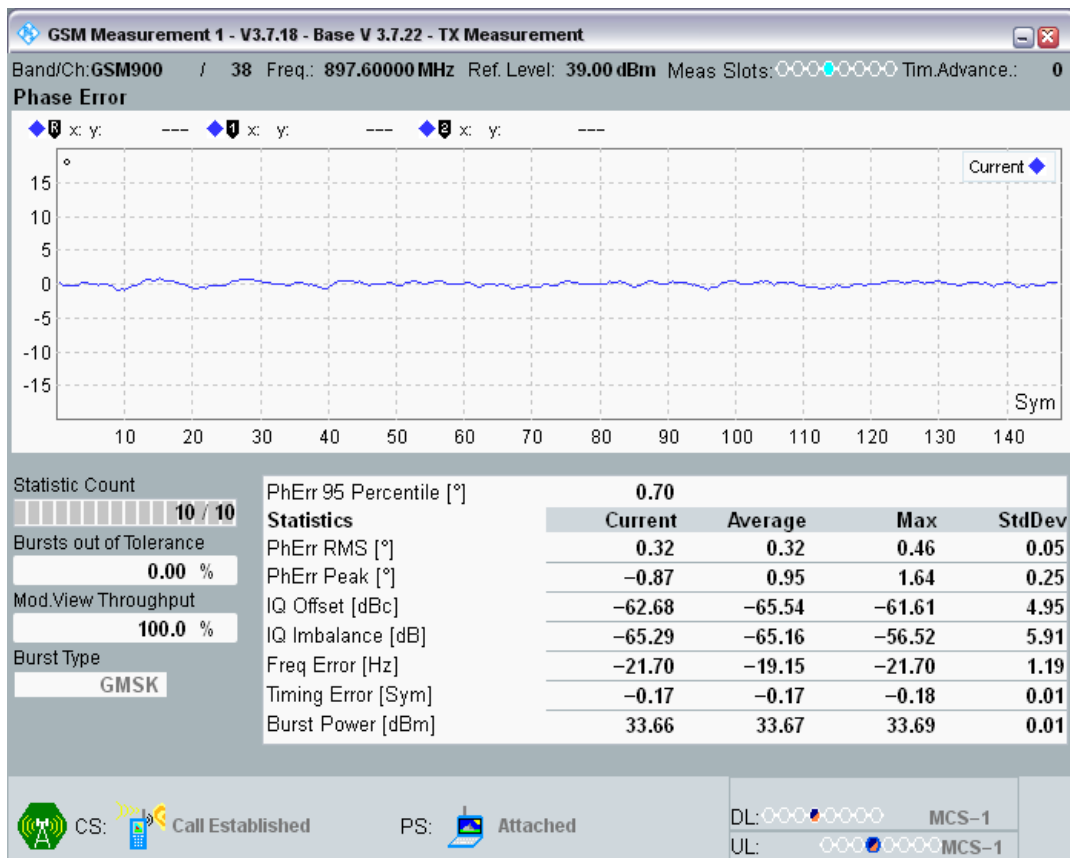


GSM900 Channel=38 PCL=5 TU3 @1

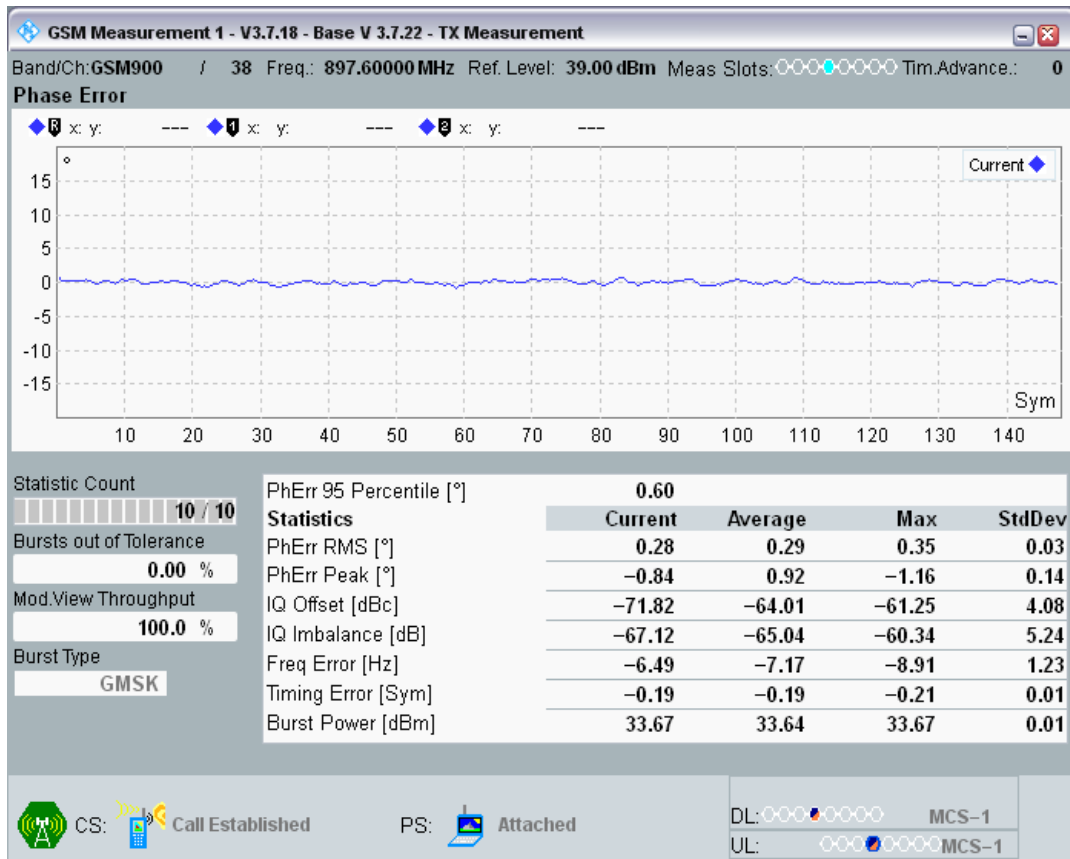


GSM900 Channel=38 PCL=5 TU3 @3

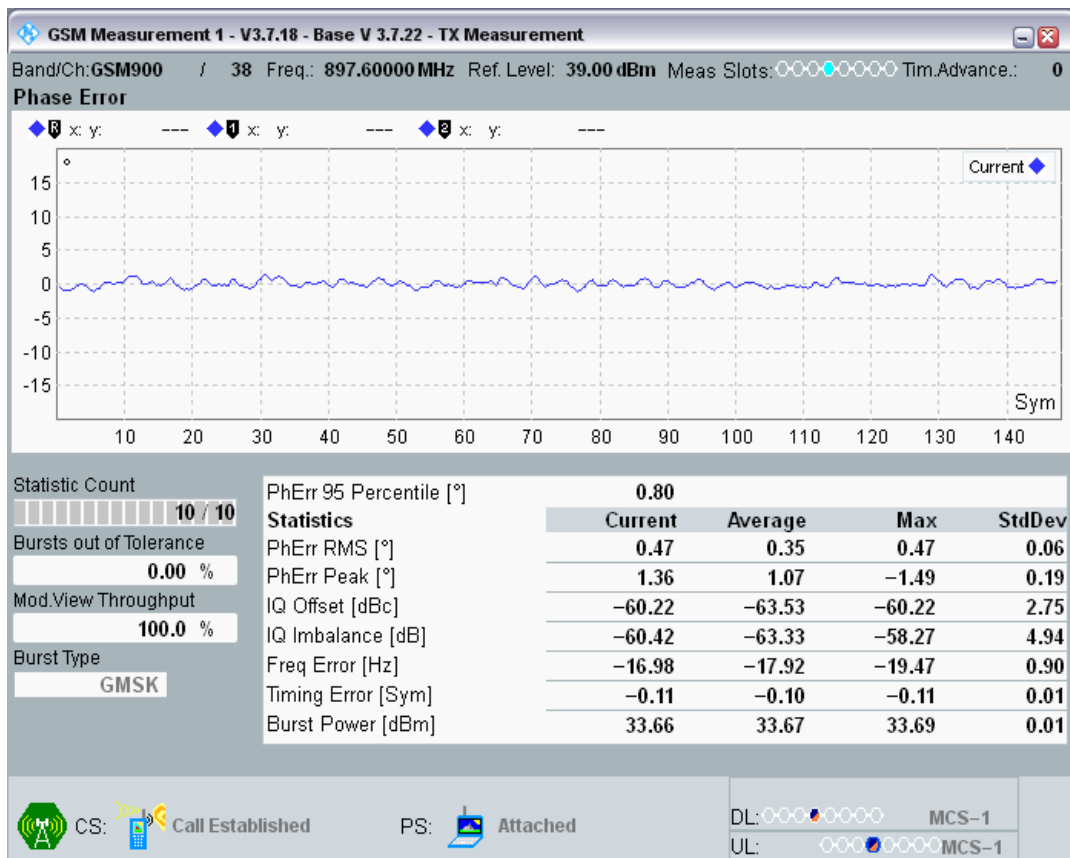


GSM900 Channel=38 PCL=5 TU3 @5

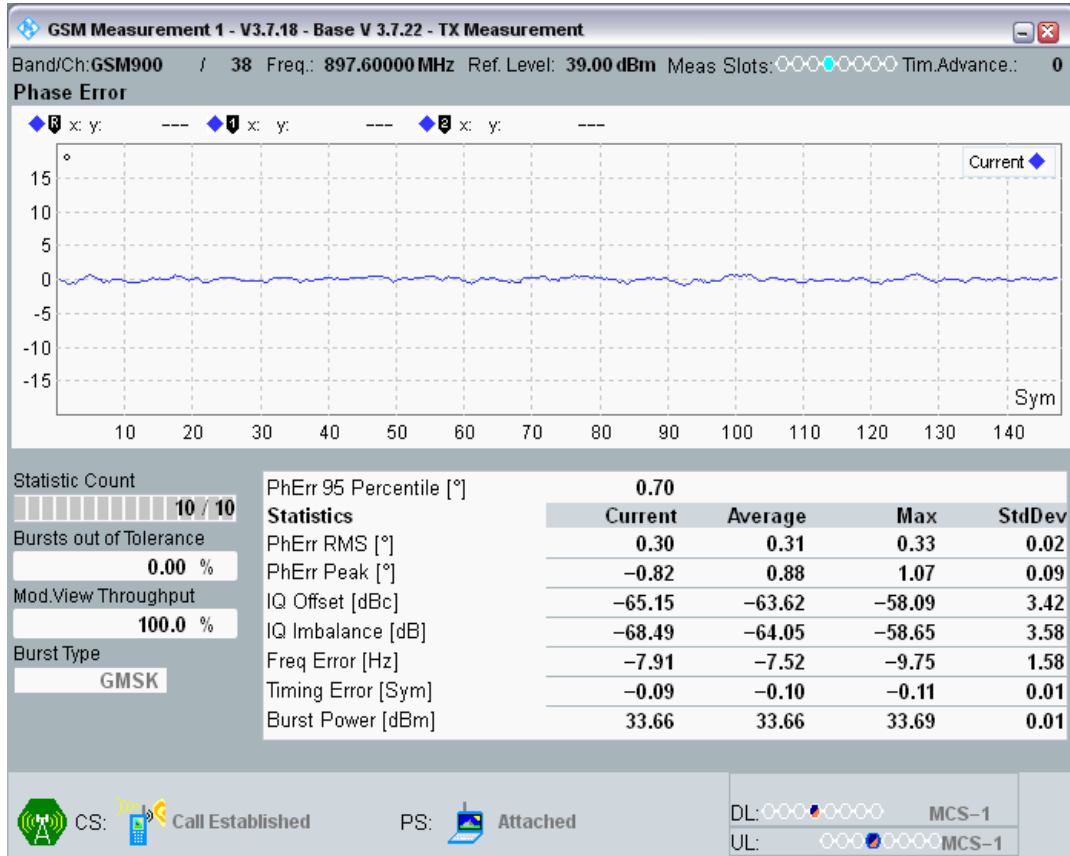


GSM900 Channel=38 PCL=5 TU3 @4

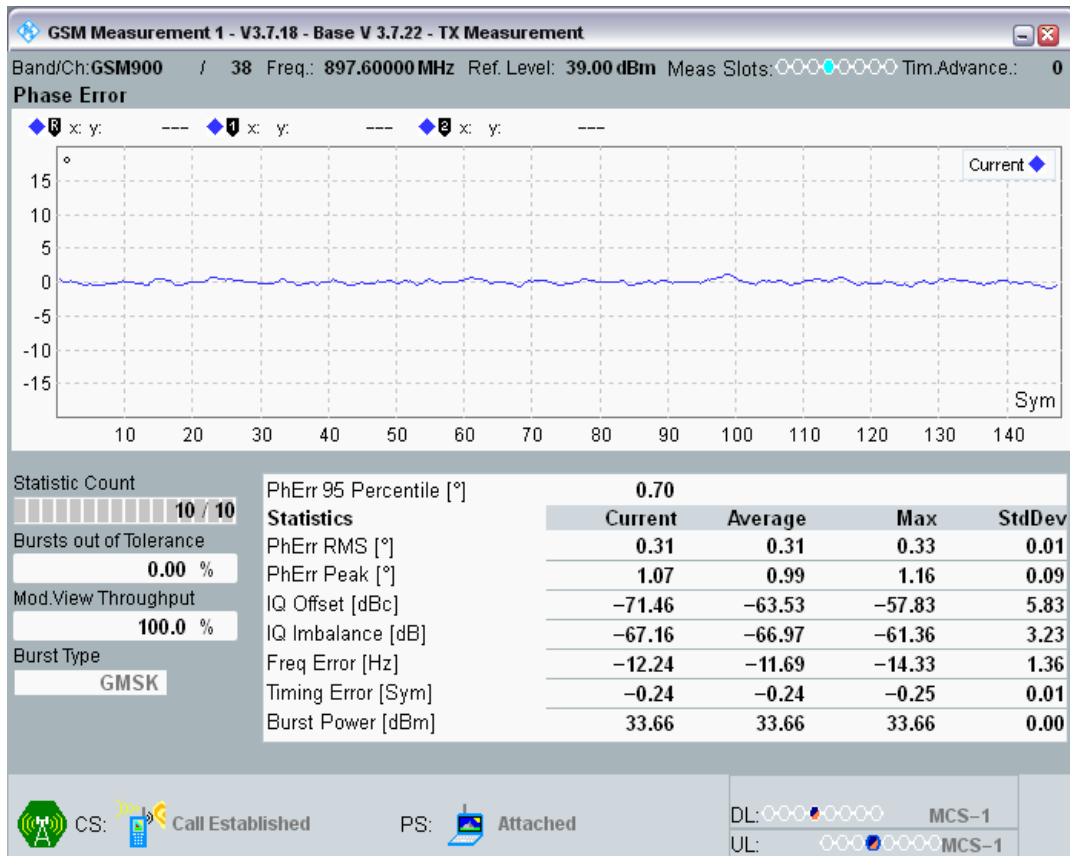


GSM900 Channel=38 PCL=5 TU3 @7

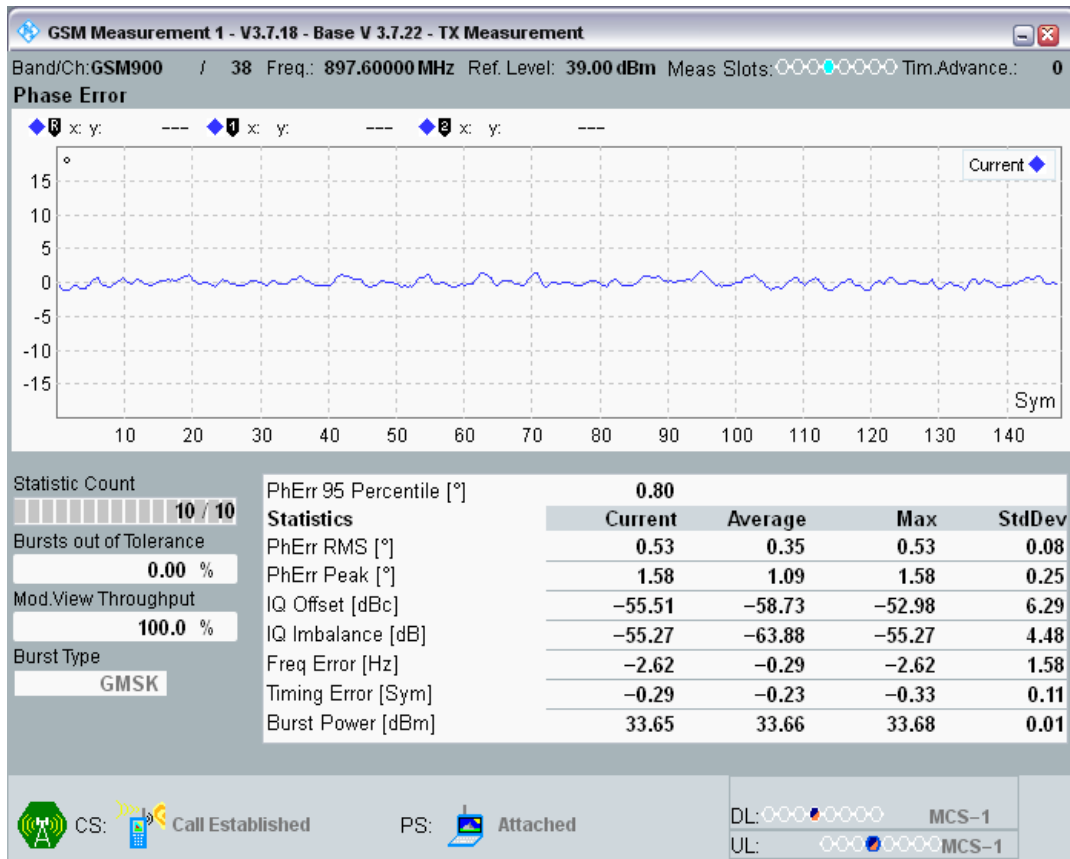


GSM900 Channel=38 PCL=5 TU3 @6

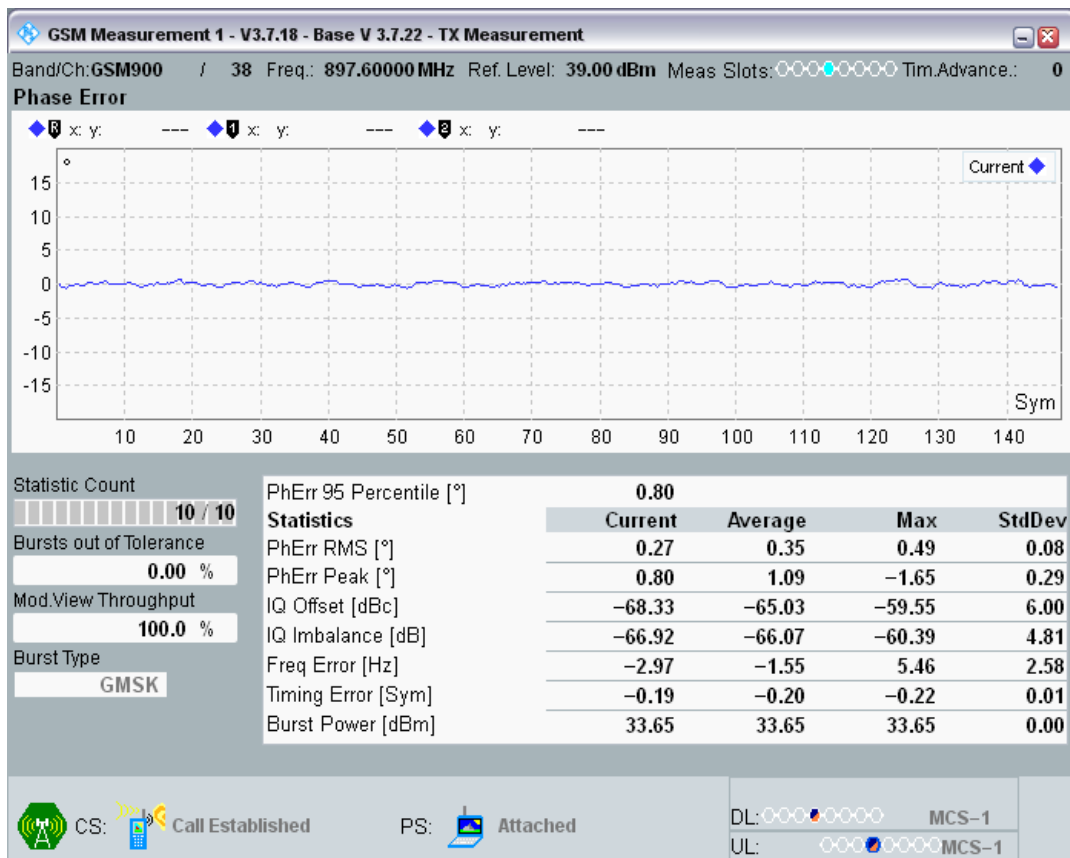


GSM900 Channel=38 PCL=5 TU3 @8

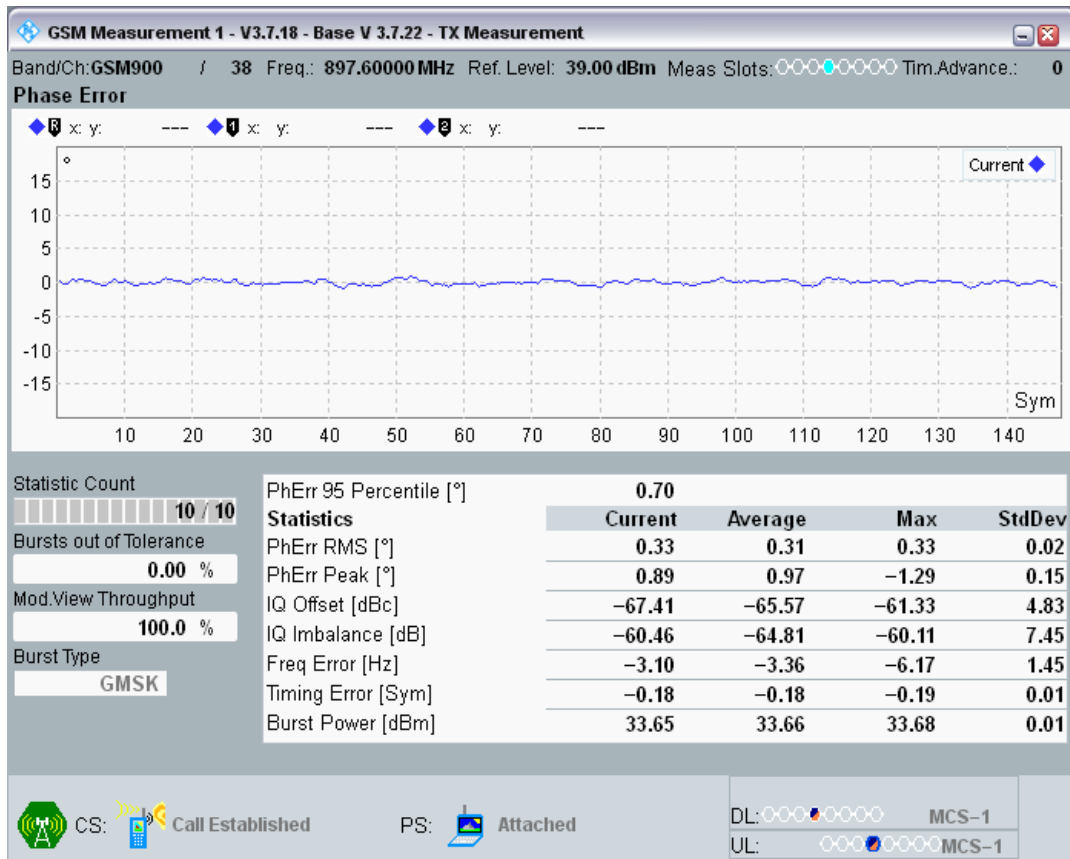


GSM900 Channel=38 PCL=5 TU3 @9

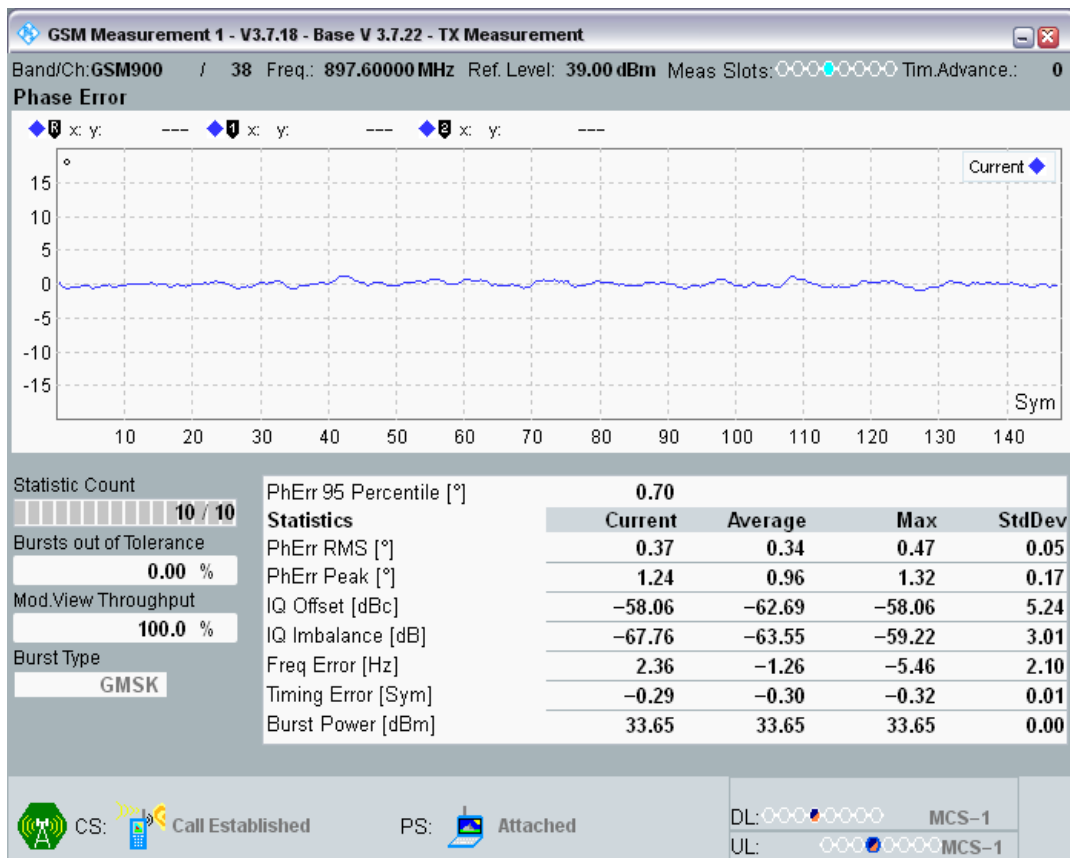


GSM900 Channel=38 PCL=5 TU3 @10

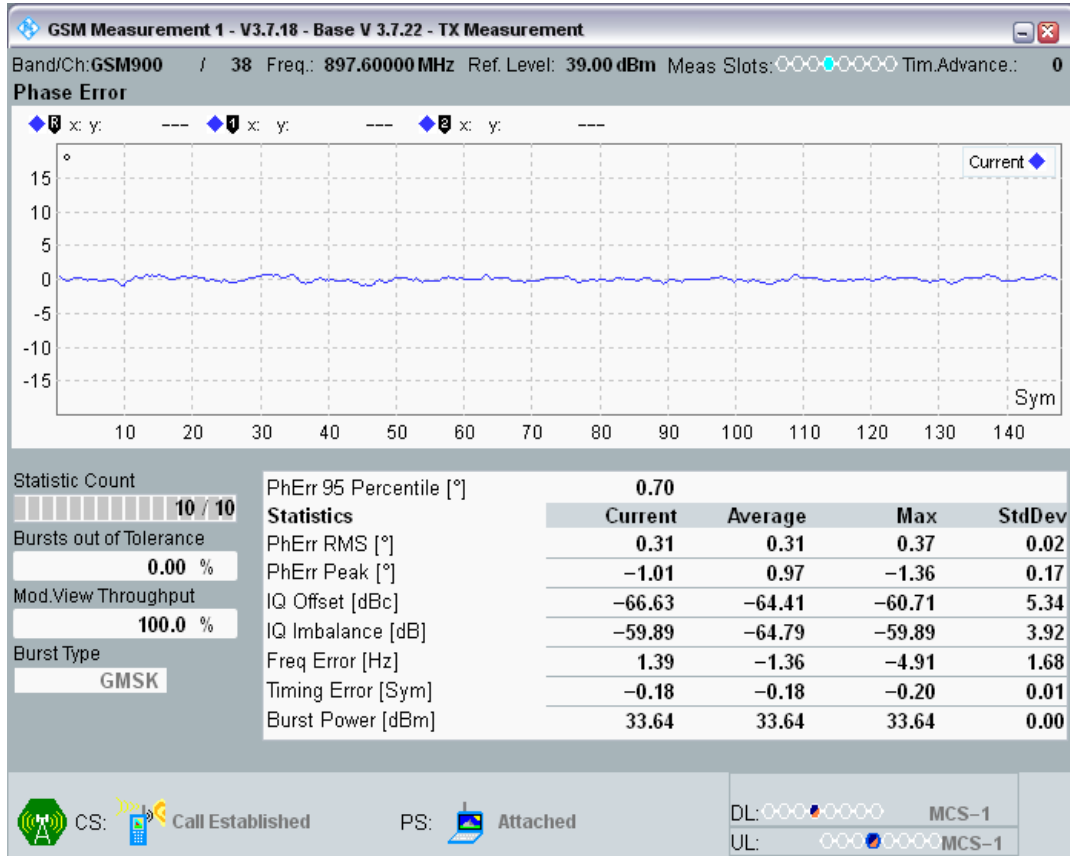


GSM900 Channel=38 PCL=5 TU3 @11

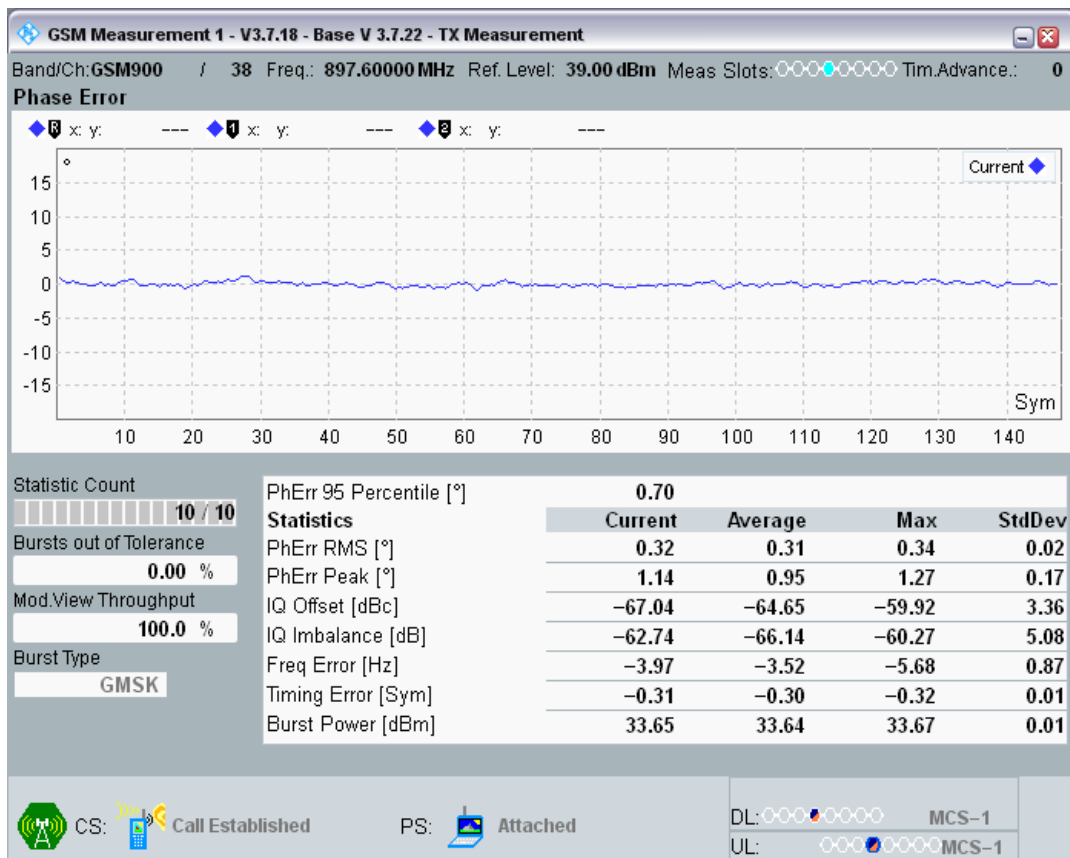


GSM900 Channel=38 PCL=5 TU3 @12

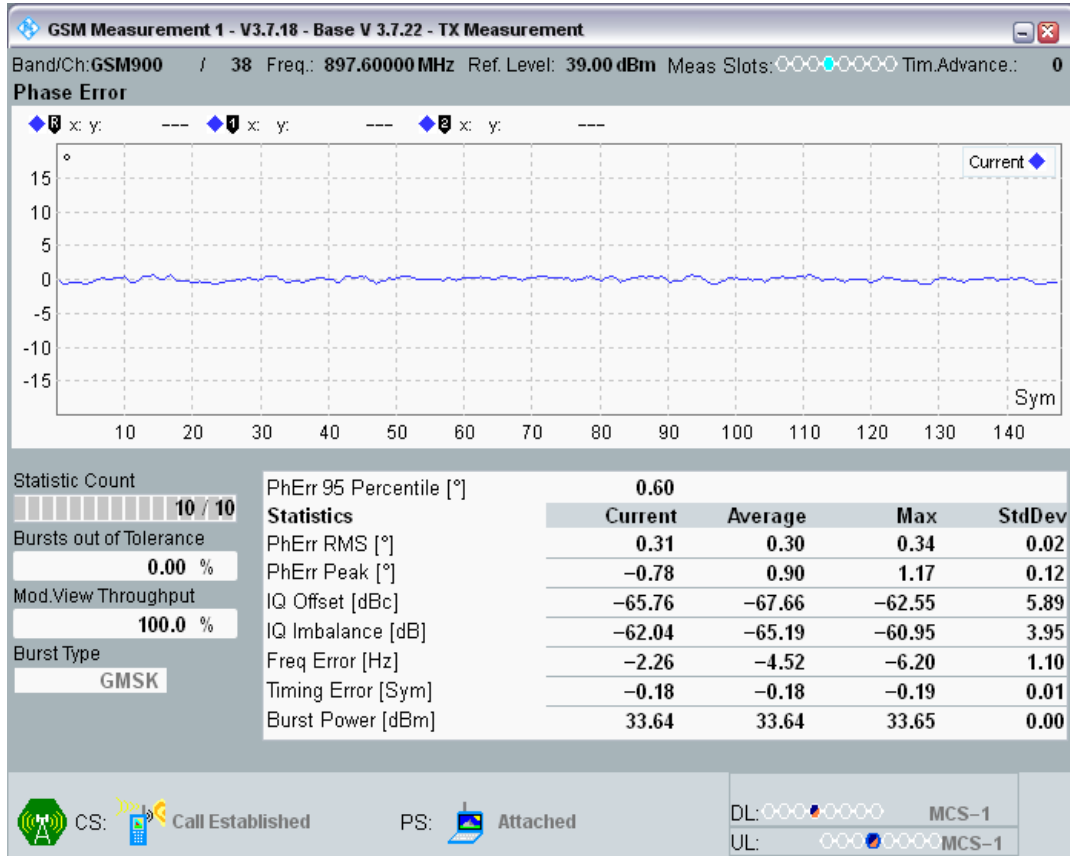


GSM900 Channel=38 PCL=5 TU3 @13

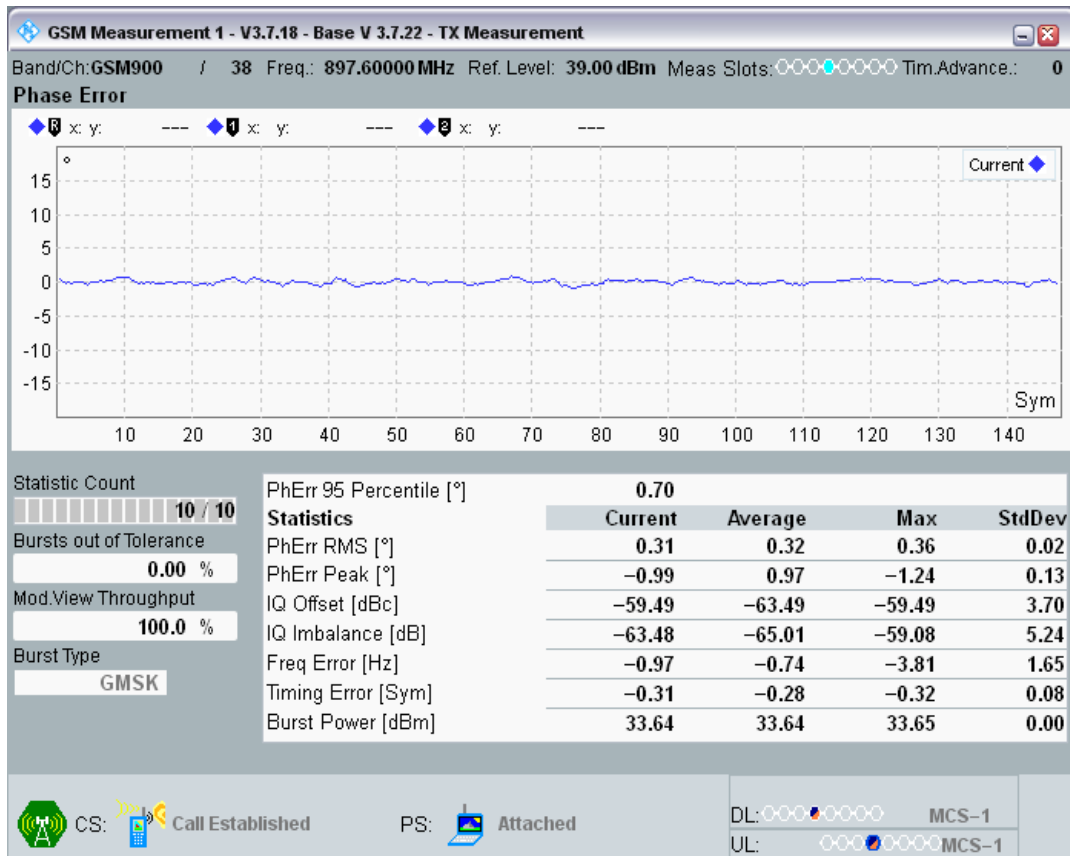


GSM900 Channel=38 PCL=5 TU3 @14

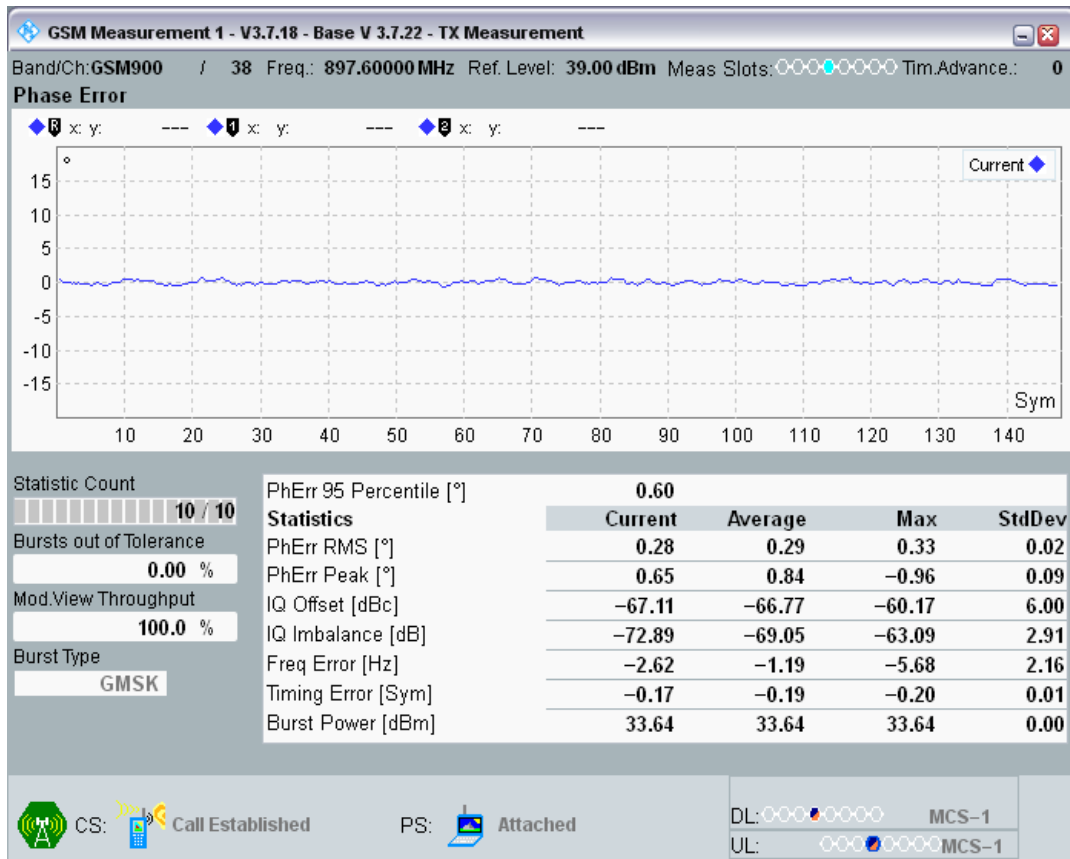


GSM900 Channel=38 PCL=5 TU3 @15

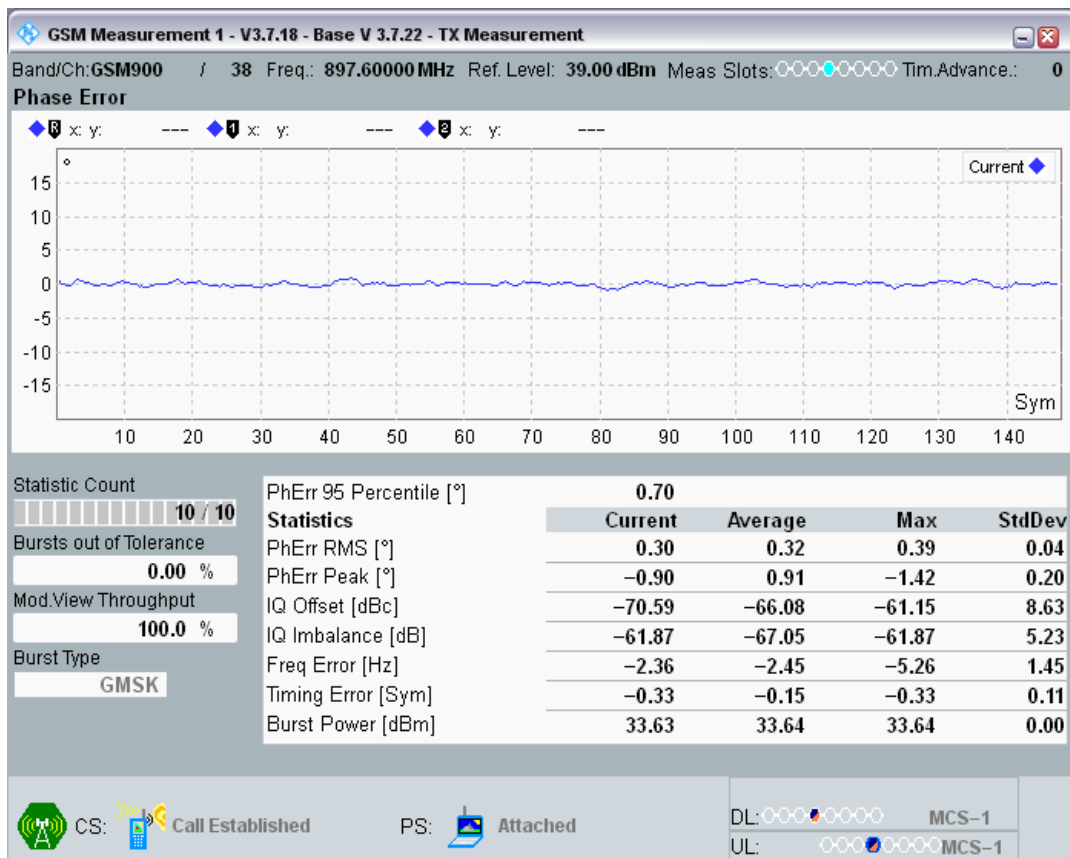


GSM900 Channel=38 PCL=5 TU3 @17

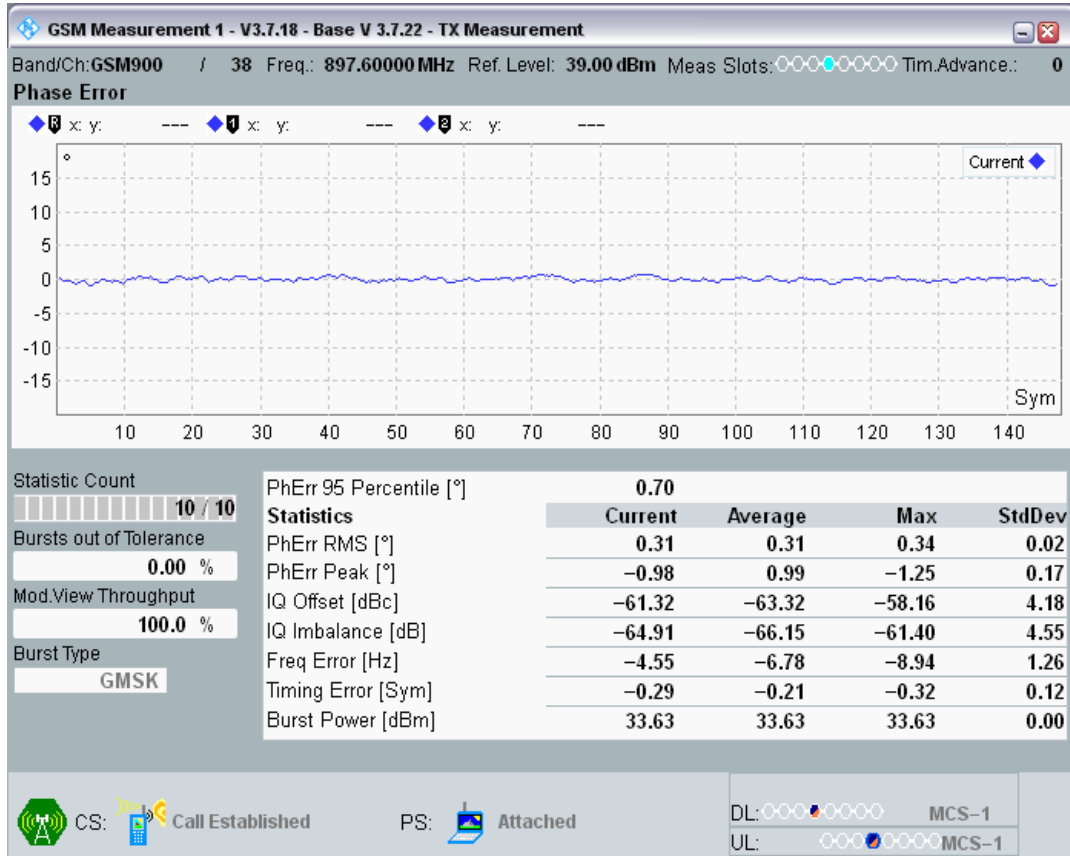


GSM900 Channel=38 PCL=5 TU3 @16

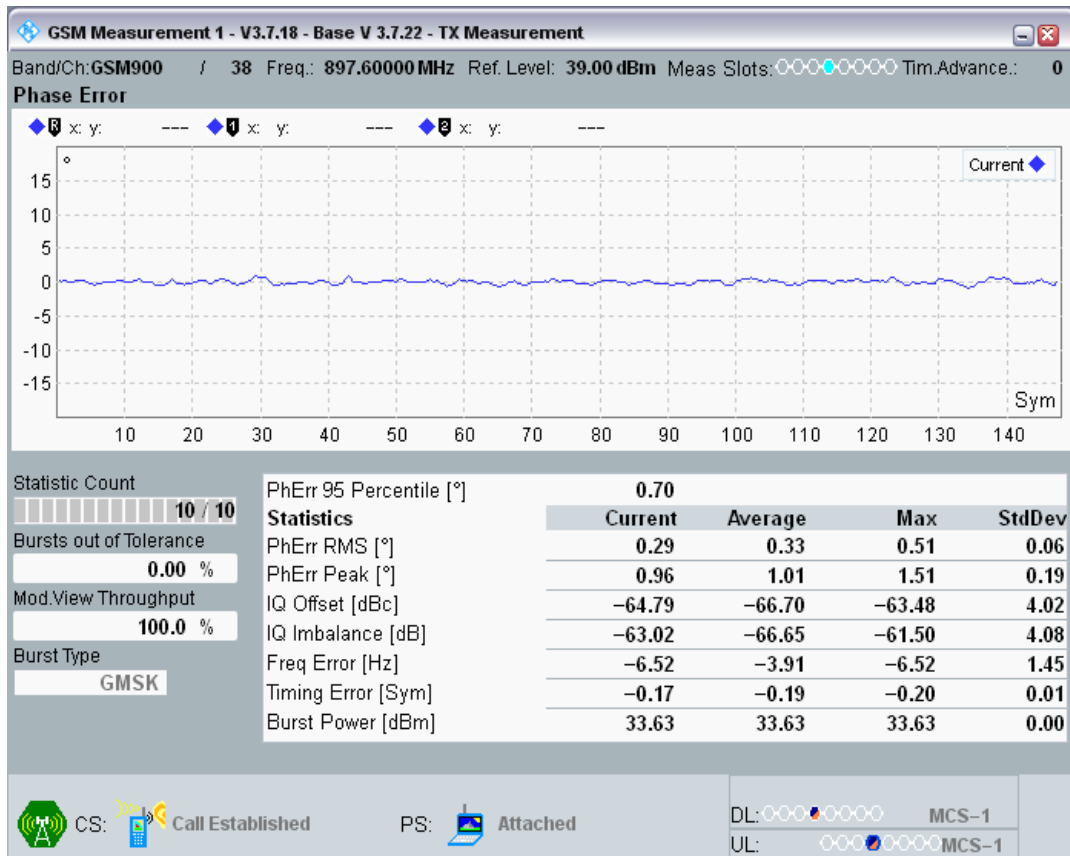


GSM900 Channel=38 PCL=5 TU3 @19

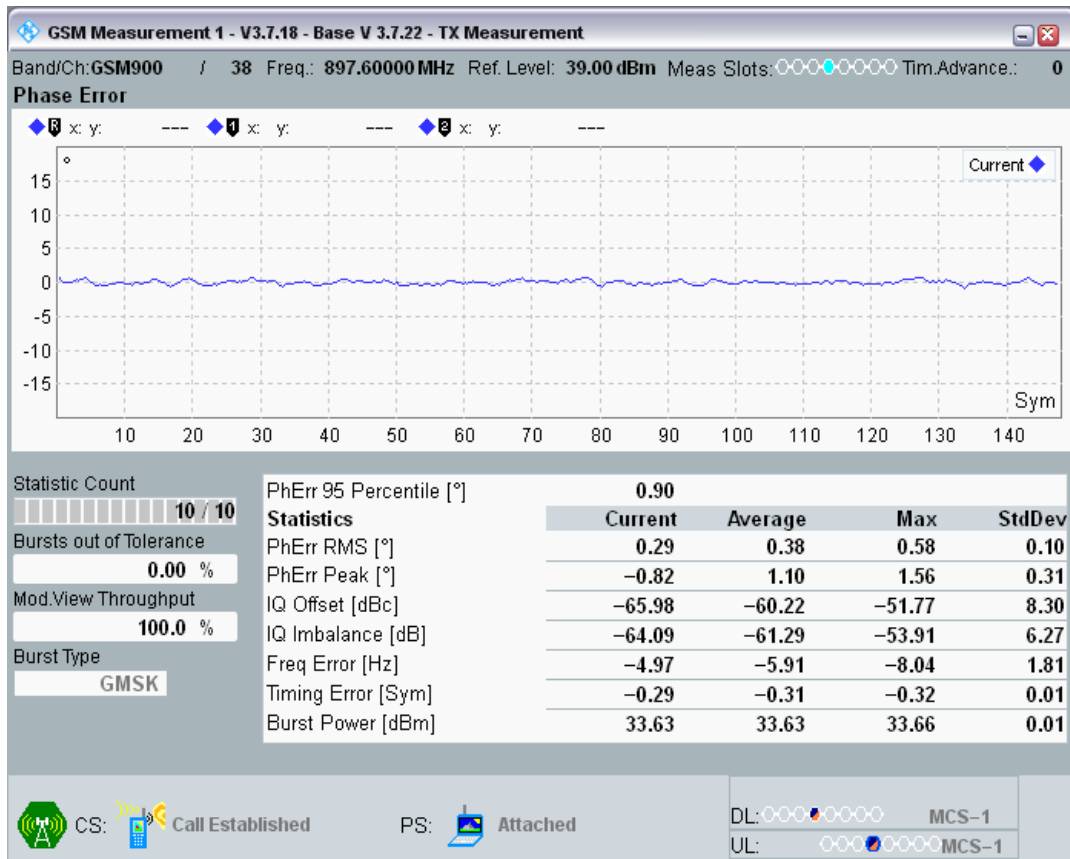

GSM900 Channel=38 PCL=5 TU3 @20

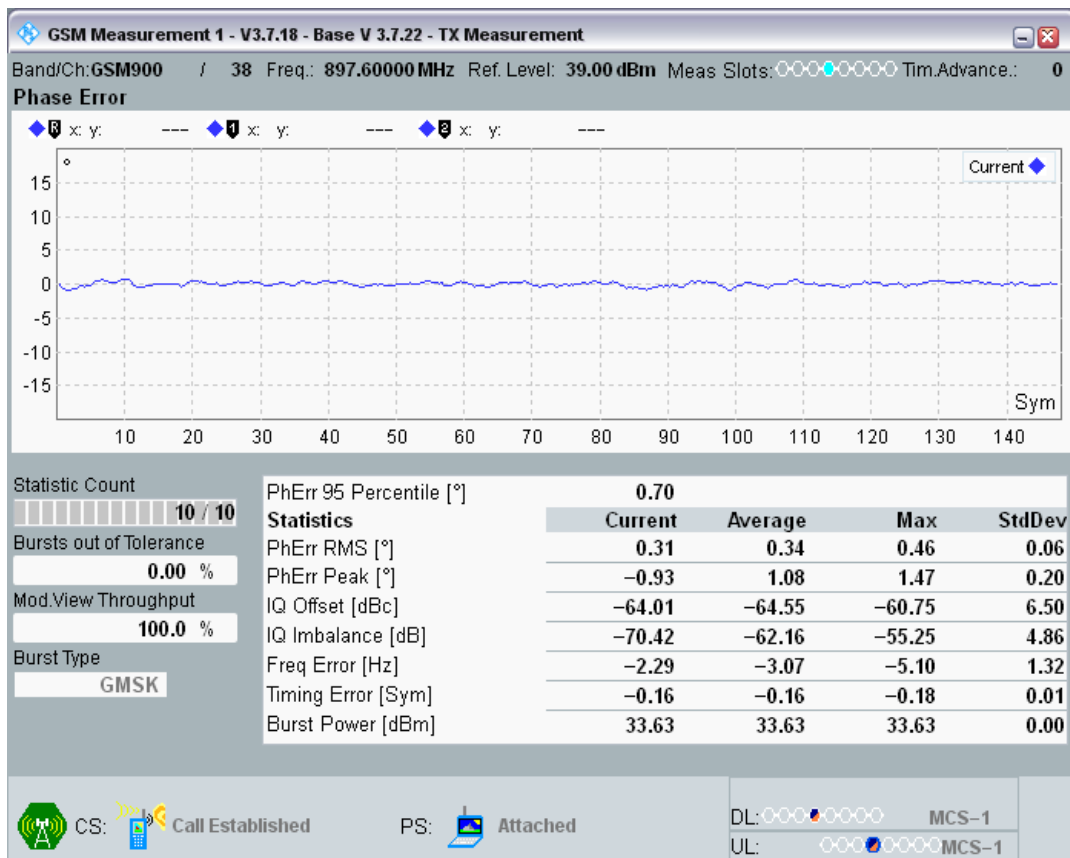

GSM900 Channel=38 PCL=5 TU3 @18

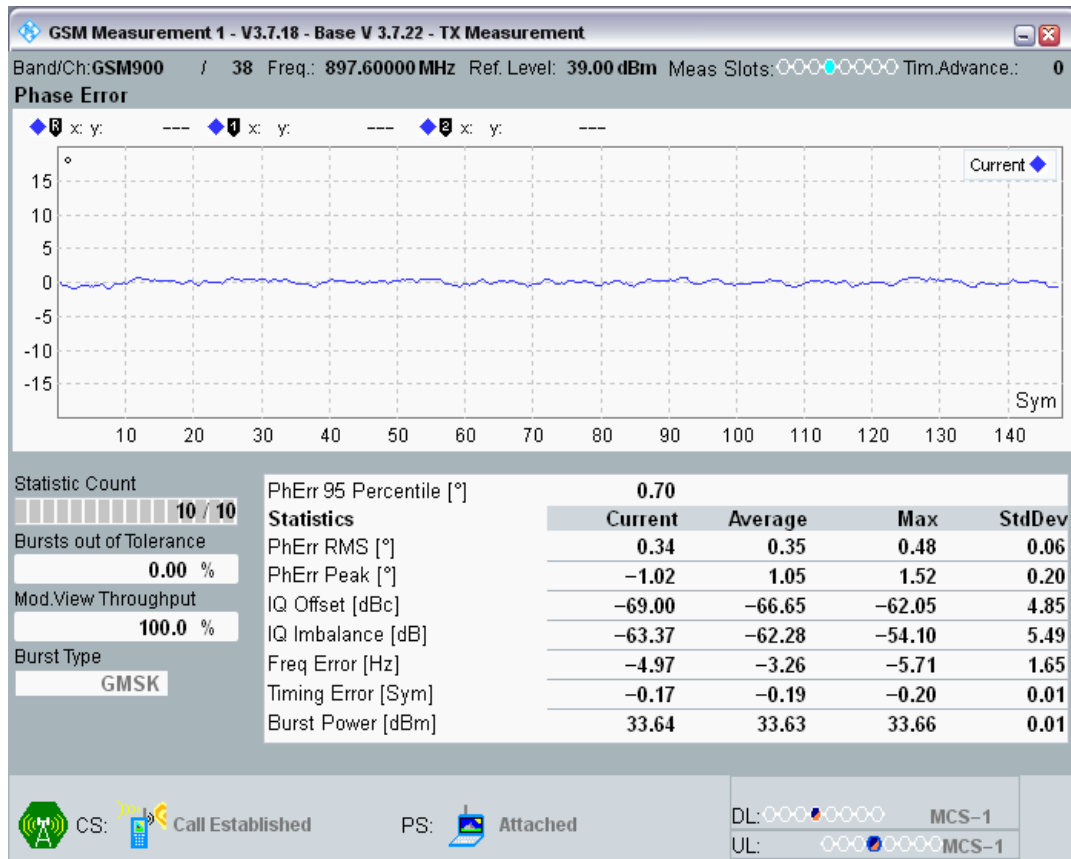

Clause 4.2.5 Transmitter output power and burst timing

| Band | Channel | Frequency (MHz) | PCL | Type | Result | Low Limit | high Limit | Verdict |
|---------|---------|-----------------|-----|--------|--------|-----------|------------|---------|
| GSM1800 | 512 | 1710.2 | 0 | Power | 30.61 | 28 | 32 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 1 | Power | 28.84 | 25 | 31 | PASS |
| GSM1800 | 512 | 1710.2 | 1 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 2 | Power | 26.79 | 23 | 29 | PASS |
| GSM1800 | 512 | 1710.2 | 2 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 3 | Power | 24.79 | 21 | 27 | PASS |
| GSM1800 | 512 | 1710.2 | 3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 4 | Power | 22.72 | 19 | 25 | PASS |
| GSM1800 | 512 | 1710.2 | 4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | Power | 20.67 | 17 | 23 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 6 | Power | 18.58 | 15 | 21 | PASS |
| GSM1800 | 512 | 1710.2 | 6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 7 | Power | 16.54 | 13 | 19 | PASS |
| GSM1800 | 512 | 1710.2 | 7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 8 | Power | 14.65 | 11 | 17 | PASS |
| GSM1800 | 512 | 1710.2 | 8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 9 | Power | 12.42 | 8 | 16 | PASS |
| GSM1800 | 512 | 1710.2 | 9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 10 | Power | 10.36 | 6 | 14 | PASS |

| | | | | | | | | |
|---------|-----|--------|----|--------|-------|----|----|------|
| GSM1800 | 512 | 1710.2 | 10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 11 | Power | 8.16 | 4 | 12 | PASS |
| GSM1800 | 512 | 1710.2 | 11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 12 | Power | 7.45 | 2 | 10 | PASS |
| GSM1800 | 512 | 1710.2 | 12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 13 | Power | 5.29 | 0 | 8 | PASS |
| GSM1800 | 512 | 1710.2 | 13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 14 | Power | 3.86 | -3 | 7 | PASS |
| GSM1800 | 512 | 1710.2 | 14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | Power | 2.20 | -5 | 5 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | Power | 31.14 | 28 | 32 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 1 | Power | 29.34 | 25 | 31 | PASS |
| GSM1800 | 698 | 1747.4 | 1 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 2 | Power | 27.39 | 23 | 29 | PASS |
| GSM1800 | 698 | 1747.4 | 2 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 3 | Power | 25.47 | 21 | 27 | PASS |
| GSM1800 | 698 | 1747.4 | 3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 4 | Power | 23.48 | 19 | 25 | PASS |
| GSM1800 | 698 | 1747.4 | 4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | Power | 21.42 | 17 | 23 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 6 | Power | 19.49 | 15 | 21 | PASS |
| GSM1800 | 698 | 1747.4 | 6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 7 | Power | 17.56 | 13 | 19 | PASS |
| GSM1800 | 698 | 1747.4 | 7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 8 | Power | 15.65 | 11 | 17 | PASS |
| GSM1800 | 698 | 1747.4 | 8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 9 | Power | 13.54 | 8 | 16 | PASS |
| GSM1800 | 698 | 1747.4 | 9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 10 | Power | 11.61 | 6 | 14 | PASS |
| GSM1800 | 698 | 1747.4 | 10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 11 | Power | 9.55 | 4 | 12 | PASS |
| GSM1800 | 698 | 1747.4 | 11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 12 | Power | 8.11 | 2 | 10 | PASS |
| GSM1800 | 698 | 1747.4 | 12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 13 | Power | 5.98 | 0 | 8 | PASS |
| GSM1800 | 698 | 1747.4 | 13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 14 | Power | 4.55 | -3 | 7 | PASS |
| GSM1800 | 698 | 1747.4 | 14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | Power | 2.88 | -5 | 5 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | Power | 31.83 | 28 | 32 | PASS |

| | | | | | | | | |
|---------|-----|--------|----|--------|-------|----|----|------|
| GSM1800 | 885 | 1784.8 | 0 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 1 | Power | 30.02 | 25 | 31 | PASS |
| GSM1800 | 885 | 1784.8 | 1 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 2 | Power | 28.08 | 23 | 29 | PASS |
| GSM1800 | 885 | 1784.8 | 2 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 3 | Power | 26.12 | 21 | 27 | PASS |
| GSM1800 | 885 | 1784.8 | 3 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 4 | Power | 24.32 | 19 | 25 | PASS |
| GSM1800 | 885 | 1784.8 | 4 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | Power | 22.36 | 17 | 23 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 6 | Power | 20.48 | 15 | 21 | PASS |
| GSM1800 | 885 | 1784.8 | 6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 7 | Power | 18.59 | 13 | 19 | PASS |
| GSM1800 | 885 | 1784.8 | 7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 8 | Power | 16.86 | 11 | 17 | PASS |
| GSM1800 | 885 | 1784.8 | 8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 9 | Power | 14.96 | 8 | 16 | PASS |
| GSM1800 | 885 | 1784.8 | 9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 10 | Power | 13.11 | 6 | 14 | PASS |
| GSM1800 | 885 | 1784.8 | 10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 11 | Power | 11.31 | 4 | 12 | PASS |
| GSM1800 | 885 | 1784.8 | 11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 12 | Power | 8.37 | 2 | 10 | PASS |
| GSM1800 | 885 | 1784.8 | 12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 13 | Power | 6.28 | 0 | 8 | PASS |
| GSM1800 | 885 | 1784.8 | 13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 14 | Power | 4.83 | -3 | 7 | PASS |
| GSM1800 | 885 | 1784.8 | 14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | Power | 3.18 | -5 | 5 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 5 | Power | 33.85 | 31 | 35 | PASS |
| GSM900 | 975 | 880.2 | 5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 6 | Power | 32.06 | 28 | 34 | PASS |
| GSM900 | 975 | 880.2 | 6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 7 | Power | 30.07 | 26 | 32 | PASS |
| GSM900 | 975 | 880.2 | 7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 8 | Power | 28.15 | 24 | 30 | PASS |
| GSM900 | 975 | 880.2 | 8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 9 | Power | 26.15 | 22 | 28 | PASS |
| GSM900 | 975 | 880.2 | 9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 10 | Power | 24.14 | 20 | 26 | PASS |
| GSM900 | 975 | 880.2 | 10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 11 | Power | 22.08 | 18 | 24 | PASS |


| | | | | | | | | |
|--------|-----|-------|----|--------|-------|----|----|------|
| GSM900 | 975 | 880.2 | 11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 12 | Power | 20.18 | 16 | 22 | PASS |
| GSM900 | 975 | 880.2 | 12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 13 | Power | 18.32 | 14 | 20 | PASS |
| GSM900 | 975 | 880.2 | 13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 14 | Power | 16.29 | 12 | 18 | PASS |
| GSM900 | 975 | 880.2 | 14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 15 | Power | 14.24 | 10 | 16 | PASS |
| GSM900 | 975 | 880.2 | 15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 16 | Power | 12.06 | 6 | 16 | PASS |
| GSM900 | 975 | 880.2 | 16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 17 | Power | 9.72 | 4 | 14 | PASS |
| GSM900 | 975 | 880.2 | 17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 18 | Power | 7.17 | 2 | 12 | PASS |
| GSM900 | 975 | 880.2 | 18 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 975 | 880.2 | 19 | Power | 5.50 | 0 | 10 | PASS |
| GSM900 | 975 | 880.2 | 19 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 5 | Power | 33.60 | 31 | 35 | PASS |
| GSM900 | 38 | 897.6 | 5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 6 | Power | 31.69 | 28 | 34 | PASS |
| GSM900 | 38 | 897.6 | 6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 7 | Power | 29.63 | 26 | 32 | PASS |
| GSM900 | 38 | 897.6 | 7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 8 | Power | 27.67 | 24 | 30 | PASS |
| GSM900 | 38 | 897.6 | 8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 9 | Power | 25.72 | 22 | 28 | PASS |
| GSM900 | 38 | 897.6 | 9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 10 | Power | 23.69 | 20 | 26 | PASS |
| GSM900 | 38 | 897.6 | 10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 11 | Power | 21.53 | 18 | 24 | PASS |
| GSM900 | 38 | 897.6 | 11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 12 | Power | 19.59 | 16 | 22 | PASS |
| GSM900 | 38 | 897.6 | 12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 13 | Power | 17.77 | 14 | 20 | PASS |
| GSM900 | 38 | 897.6 | 13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 14 | Power | 15.73 | 12 | 18 | PASS |
| GSM900 | 38 | 897.6 | 14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 15 | Power | 13.64 | 10 | 16 | PASS |
| GSM900 | 38 | 897.6 | 15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 16 | Power | 11.43 | 6 | 16 | PASS |
| GSM900 | 38 | 897.6 | 16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 17 | Power | 9.08 | 4 | 14 | PASS |
| GSM900 | 38 | 897.6 | 17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 18 | Power | 6.52 | 2 | 12 | PASS |

| | | | | | | | | |
|--------|-----|-------|----|--------|-------|----|----|------|
| GSM900 | 38 | 897.6 | 18 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 38 | 897.6 | 19 | Power | 4.89 | 0 | 10 | PASS |
| GSM900 | 38 | 897.6 | 19 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 5 | Power | 33.60 | 31 | 35 | PASS |
| GSM900 | 124 | 914.8 | 5 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 6 | Power | 31.62 | 28 | 34 | PASS |
| GSM900 | 124 | 914.8 | 6 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 7 | Power | 29.57 | 26 | 32 | PASS |
| GSM900 | 124 | 914.8 | 7 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 8 | Power | 27.68 | 24 | 30 | PASS |
| GSM900 | 124 | 914.8 | 8 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 9 | Power | 25.69 | 22 | 28 | PASS |
| GSM900 | 124 | 914.8 | 9 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 10 | Power | 23.63 | 20 | 26 | PASS |
| GSM900 | 124 | 914.8 | 10 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 11 | Power | 21.49 | 18 | 24 | PASS |
| GSM900 | 124 | 914.8 | 11 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 12 | Power | 19.59 | 16 | 22 | PASS |
| GSM900 | 124 | 914.8 | 12 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 13 | Power | 17.65 | 14 | 20 | PASS |
| GSM900 | 124 | 914.8 | 13 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 14 | Power | 15.61 | 12 | 18 | PASS |
| GSM900 | 124 | 914.8 | 14 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 15 | Power | 13.57 | 10 | 16 | PASS |
| GSM900 | 124 | 914.8 | 15 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 16 | Power | 11.80 | 6 | 16 | PASS |
| GSM900 | 124 | 914.8 | 16 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 17 | Power | 9.59 | 4 | 14 | PASS |
| GSM900 | 124 | 914.8 | 17 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 18 | Power | 7.29 | 2 | 12 | PASS |
| GSM900 | 124 | 914.8 | 18 | PvT(%) | 0.00 | 0 | 0 | PASS |
| GSM900 | 124 | 914.8 | 19 | Power | 5.68 | 0 | 10 | PASS |
| GSM900 | 124 | 914.8 | 19 | PvT(%) | 0.00 | 0 | 0 | PASS |


GSM1800 Channel=512 PCL=0




GSM1800 Channel=512 PCL=1

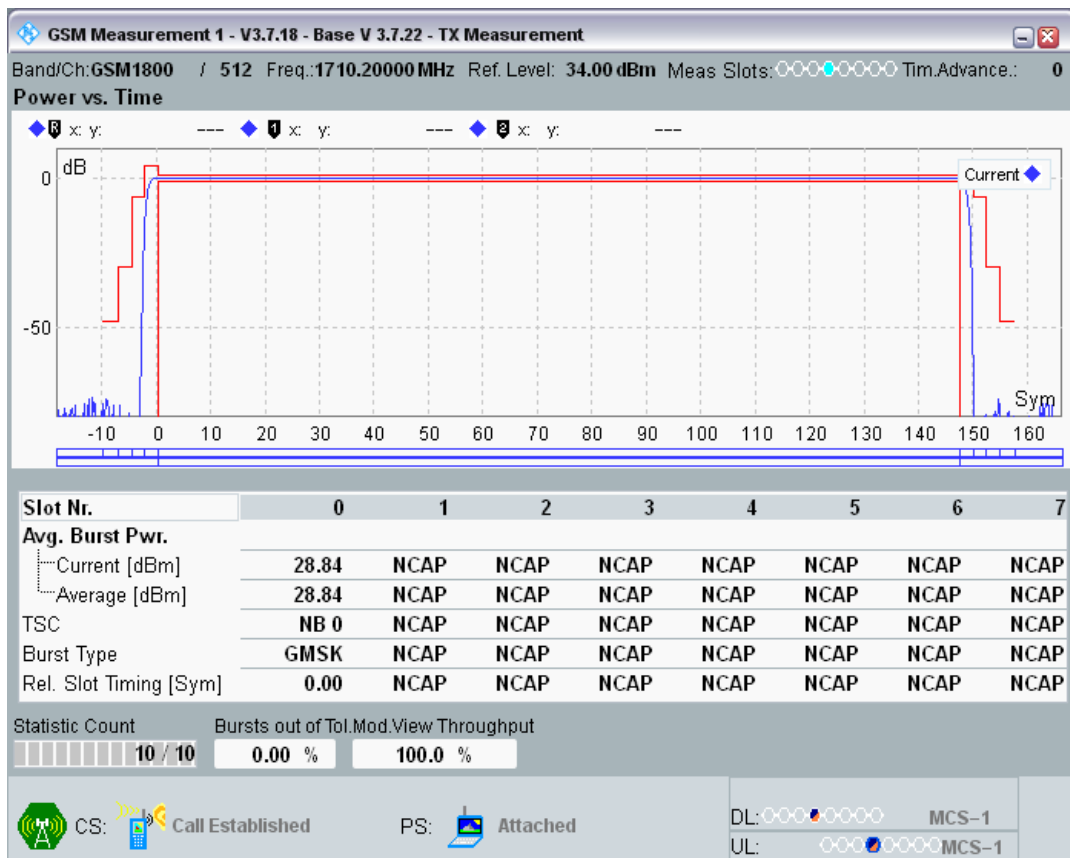

GSM1800 Channel=512 PCL=2

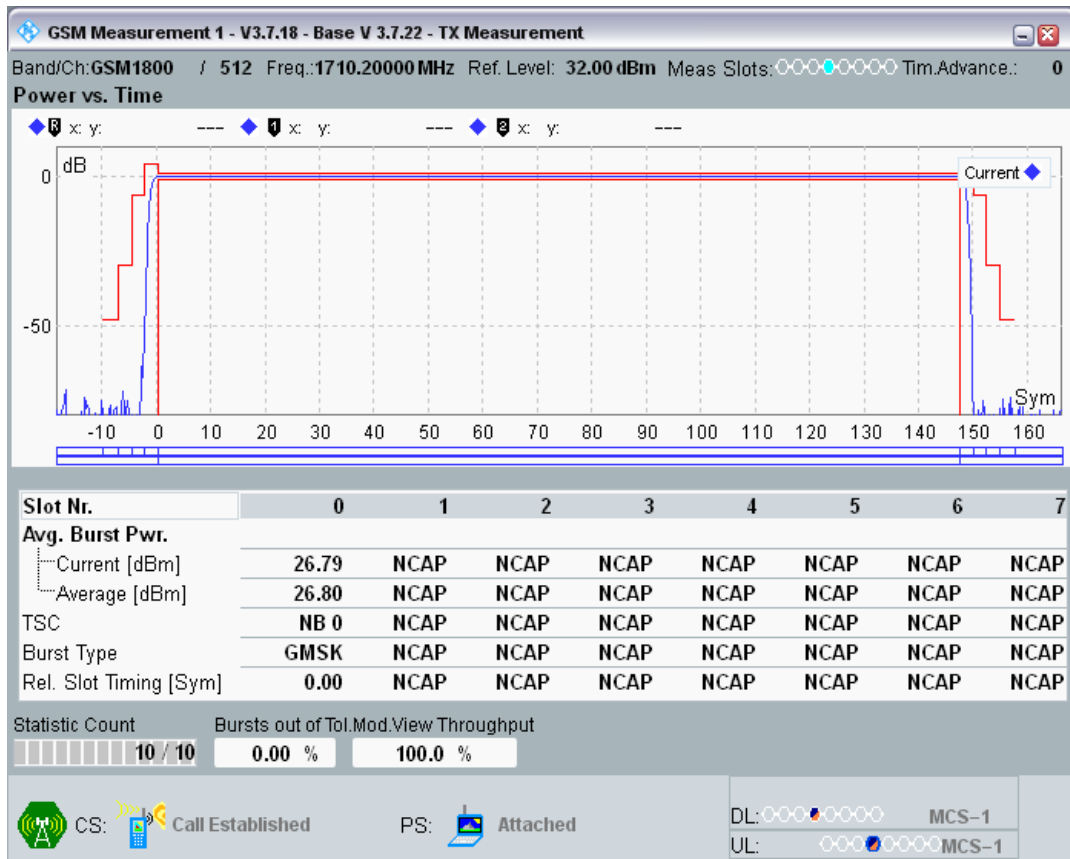


GSM1800 Channel=512 PCL=4

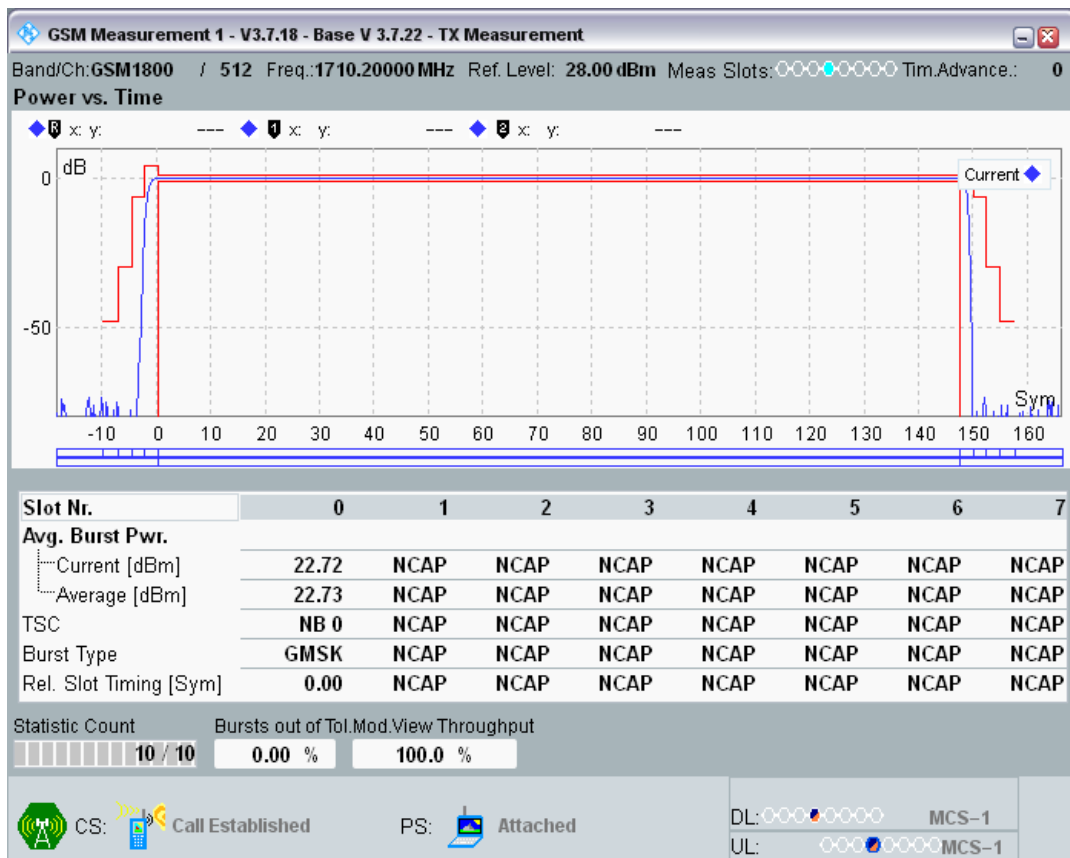


GSM1800 Channel=512 PCL=3




GSM1800 Channel=512 PCL=5

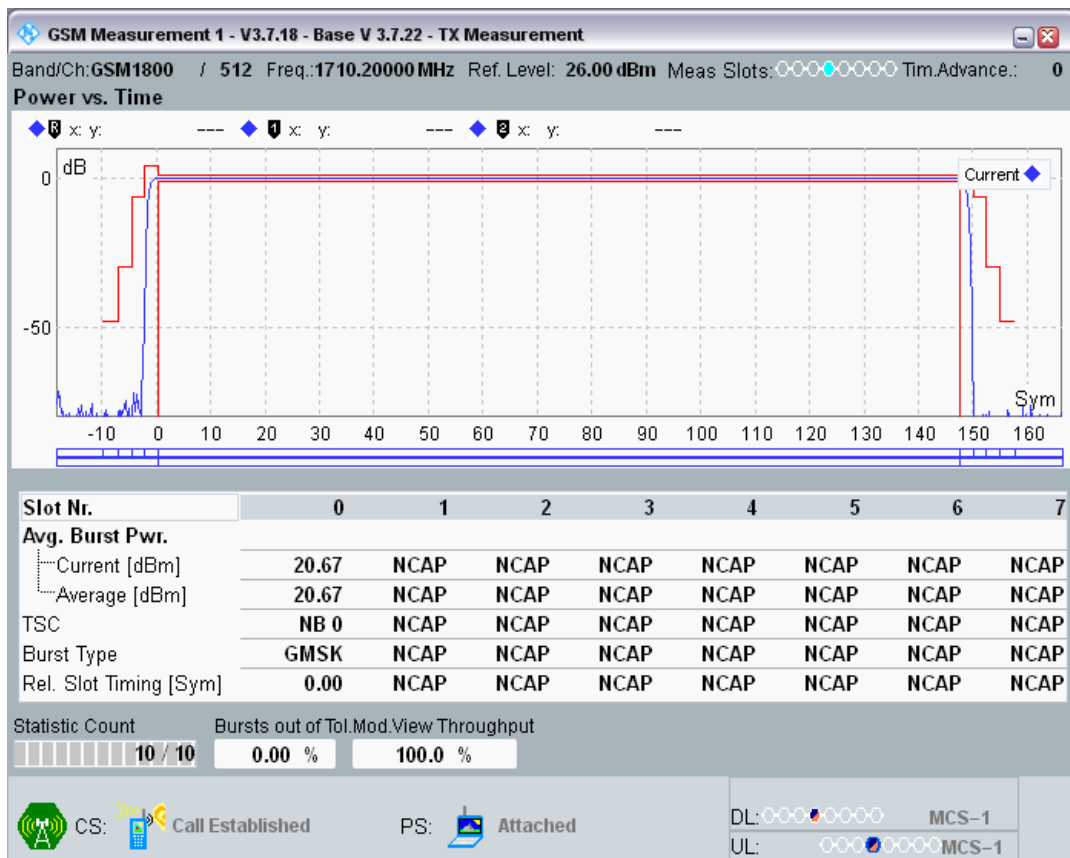

GSM1800 Channel=512 PCL=6

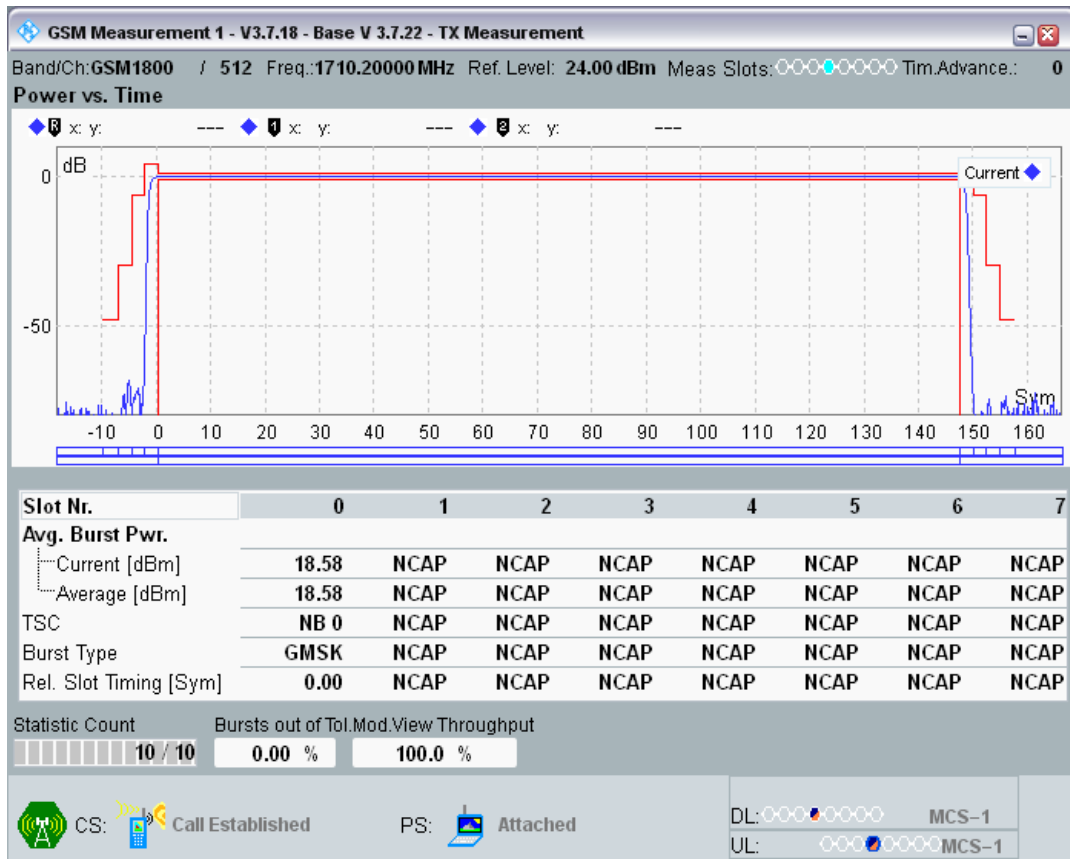


GSM1800 Channel=512 PCL=7

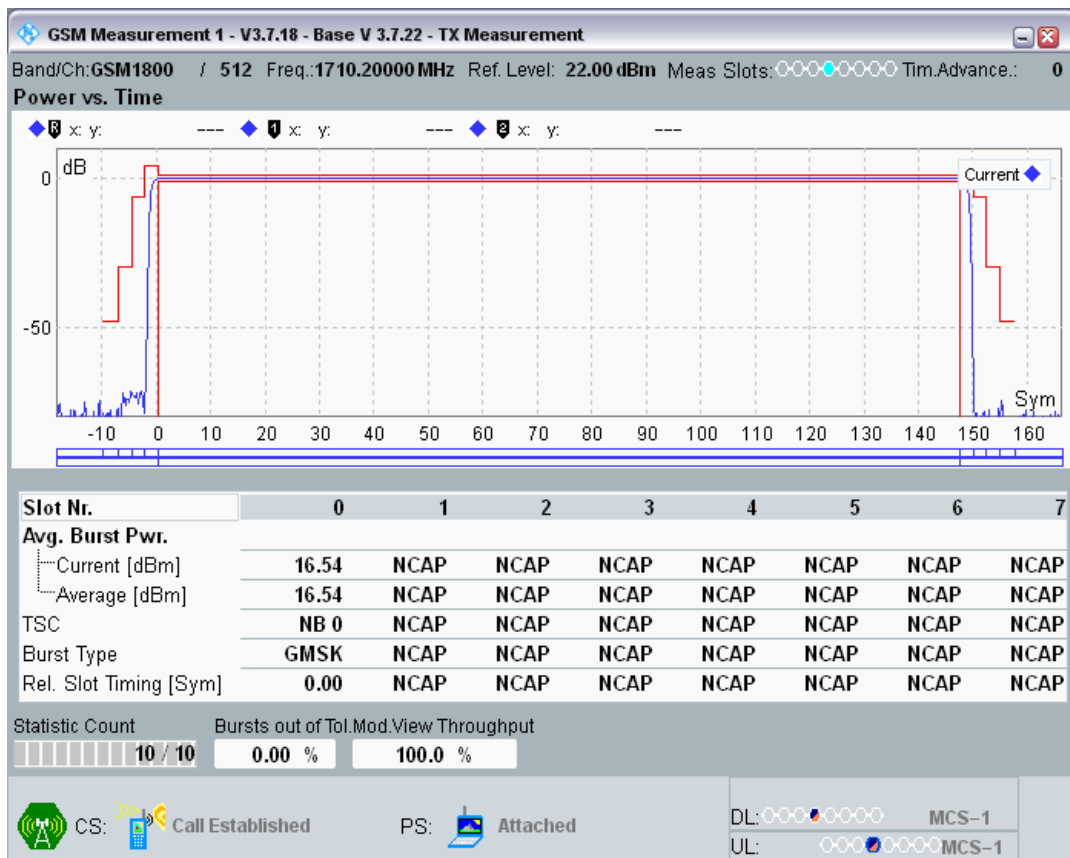

GSM1800 Channel=512 PCL=8




GSM1800 Channel=512 PCL=9

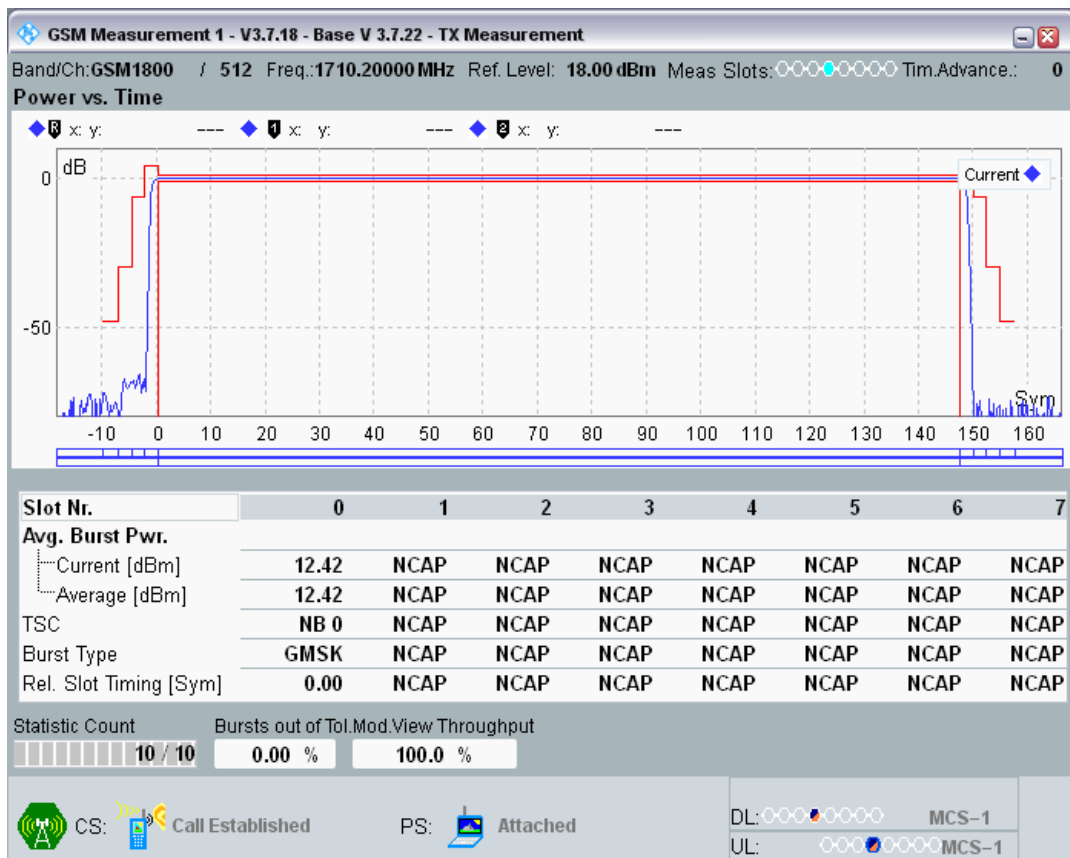


GSM1800 Channel=512 PCL=10




GSM1800 Channel=512 PCL=12

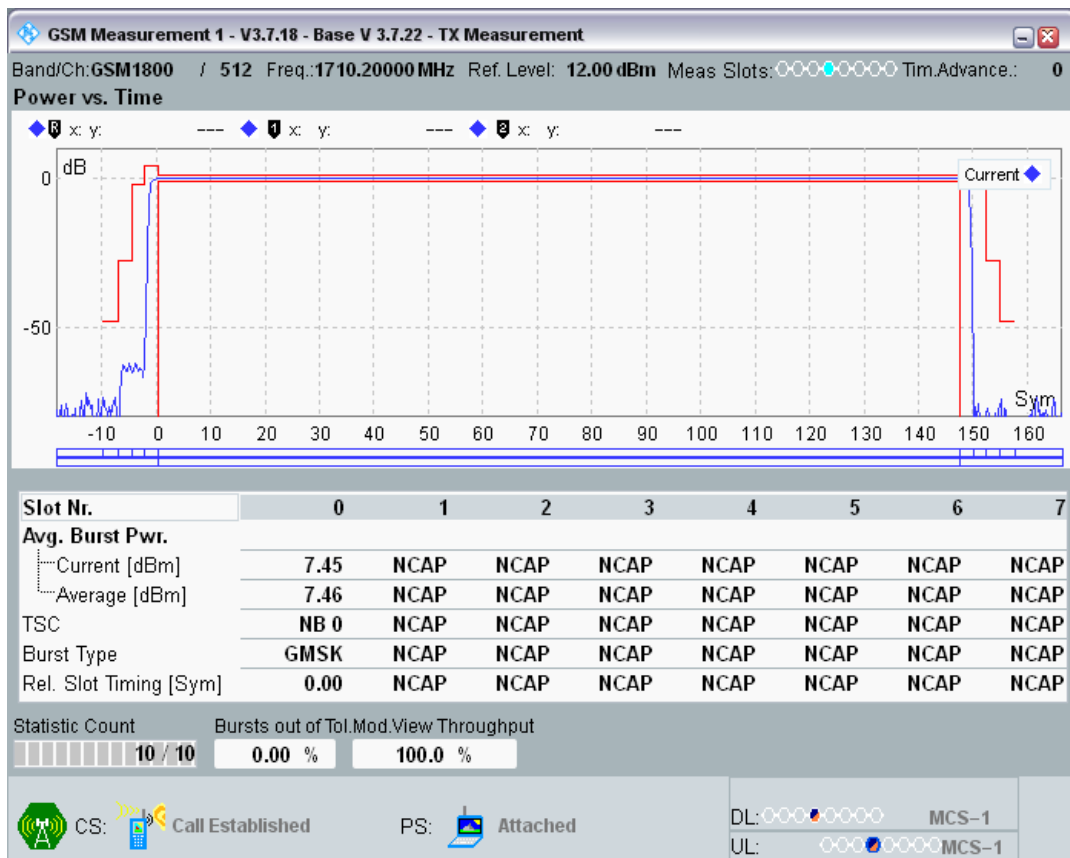


GSM1800 Channel=512 PCL=11

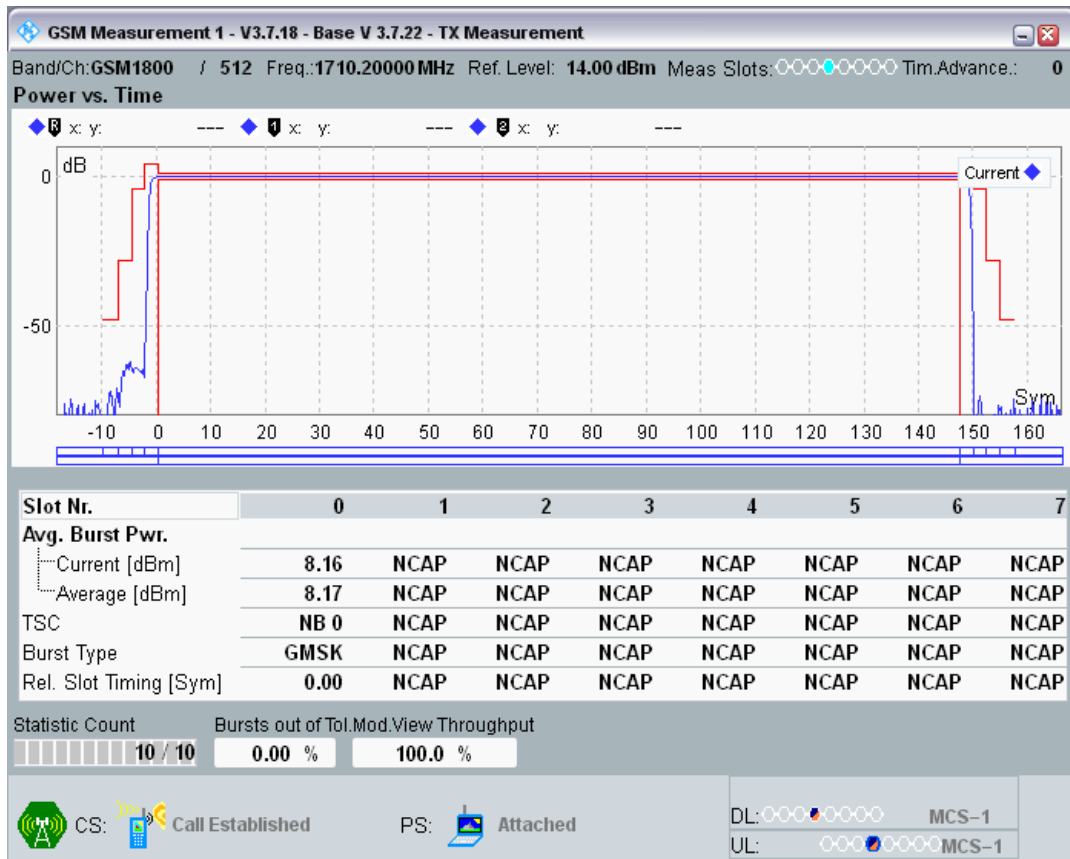


GSM1800 Channel=512 PCL=13

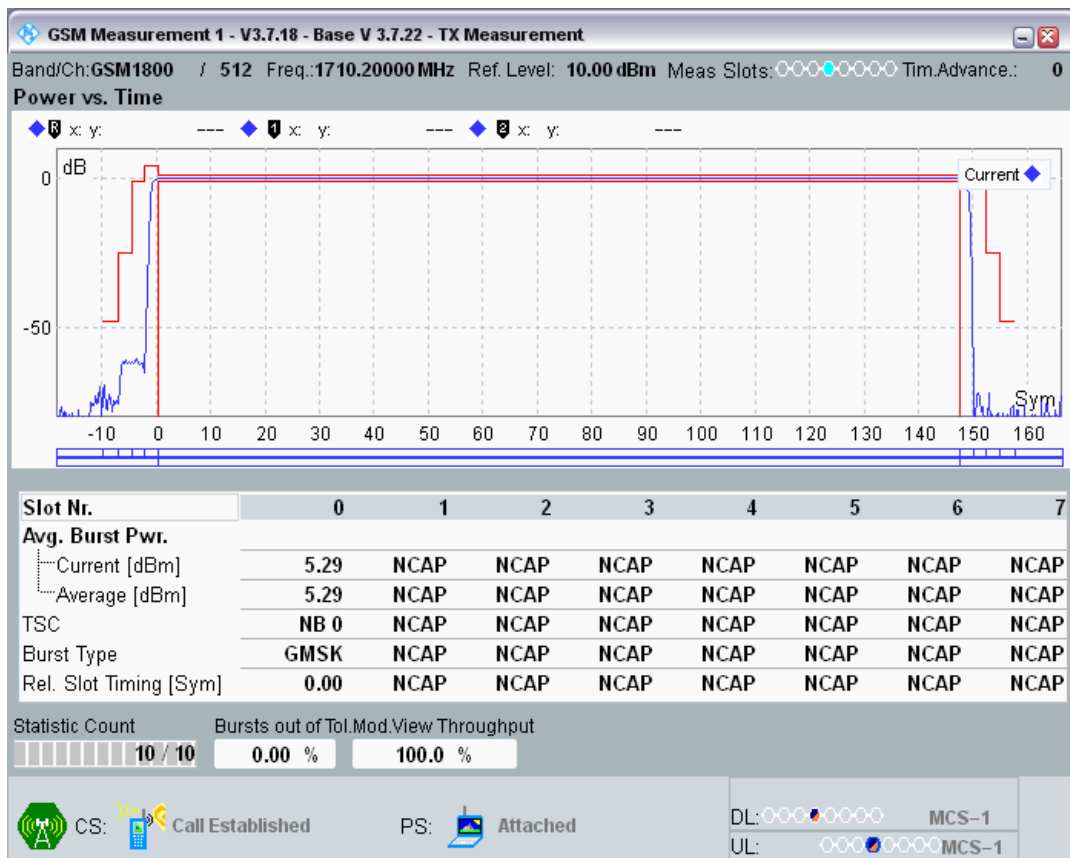


GSM1800 Channel=512 PCL=14

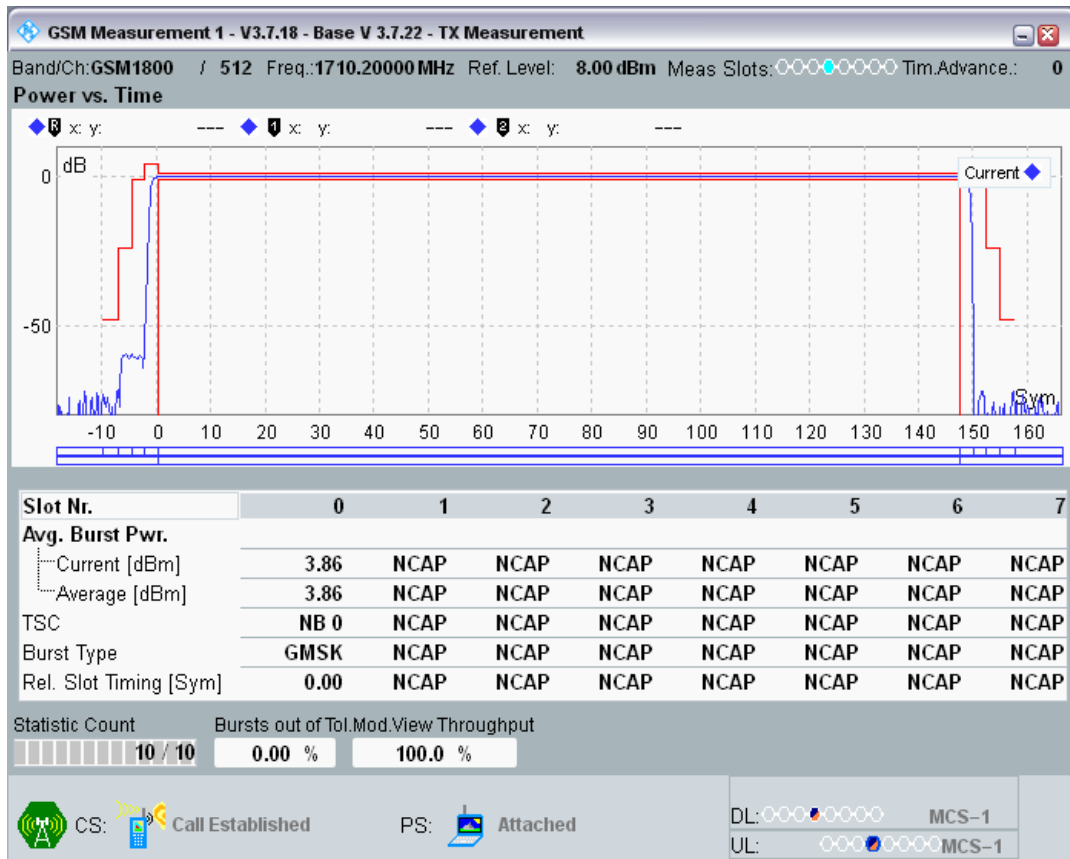


GSM1800 Channel=512 PCL=15

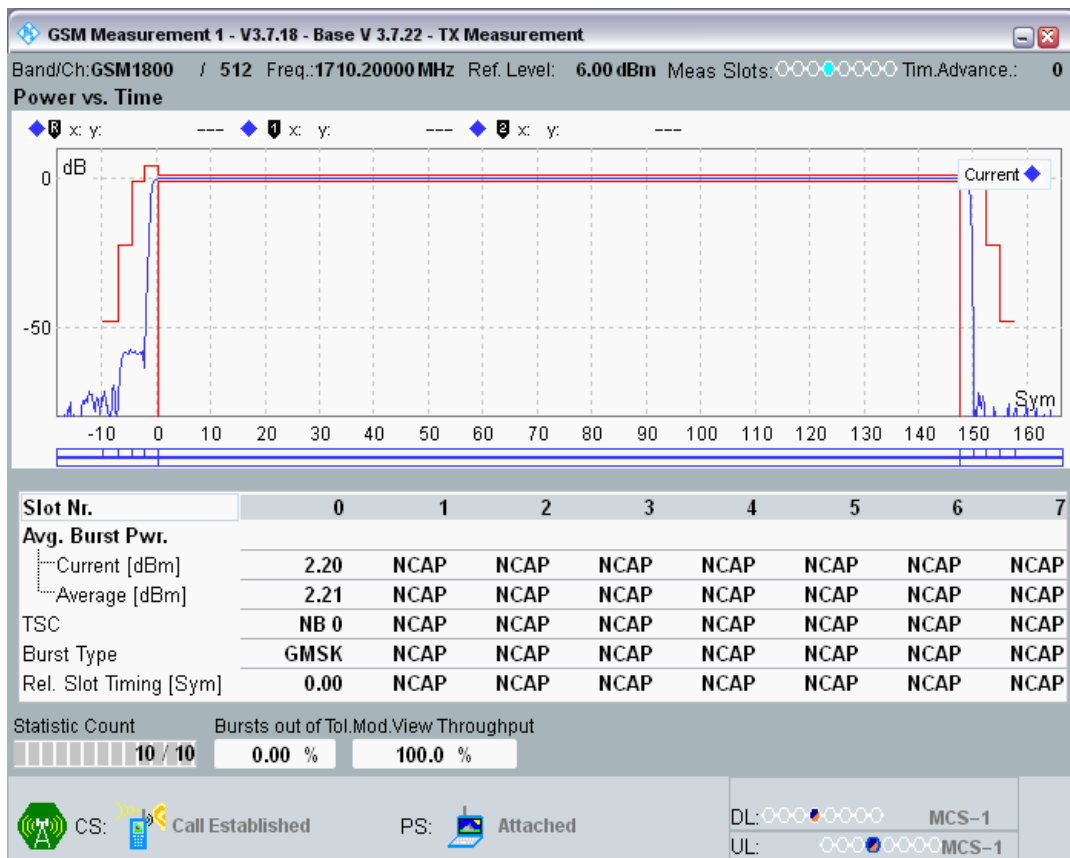

GSM1800 Channel=698 PCL=0

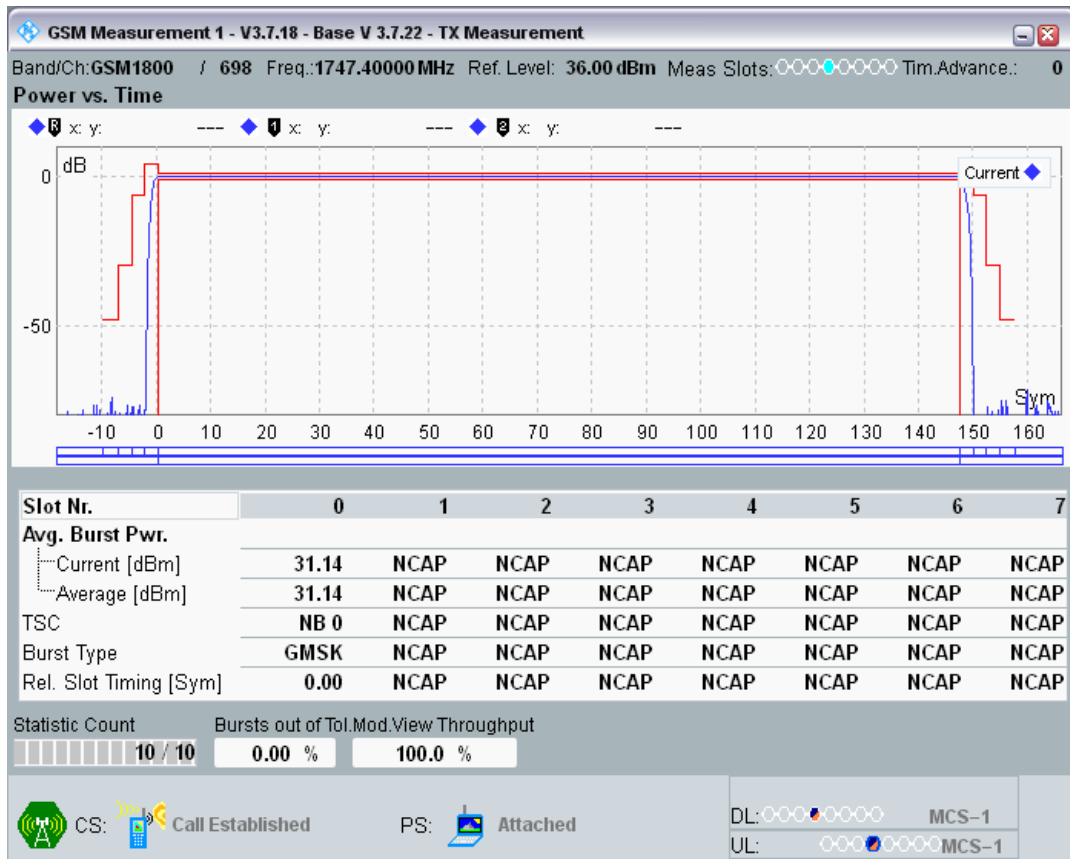


GSM1800 Channel=698 PCL=2

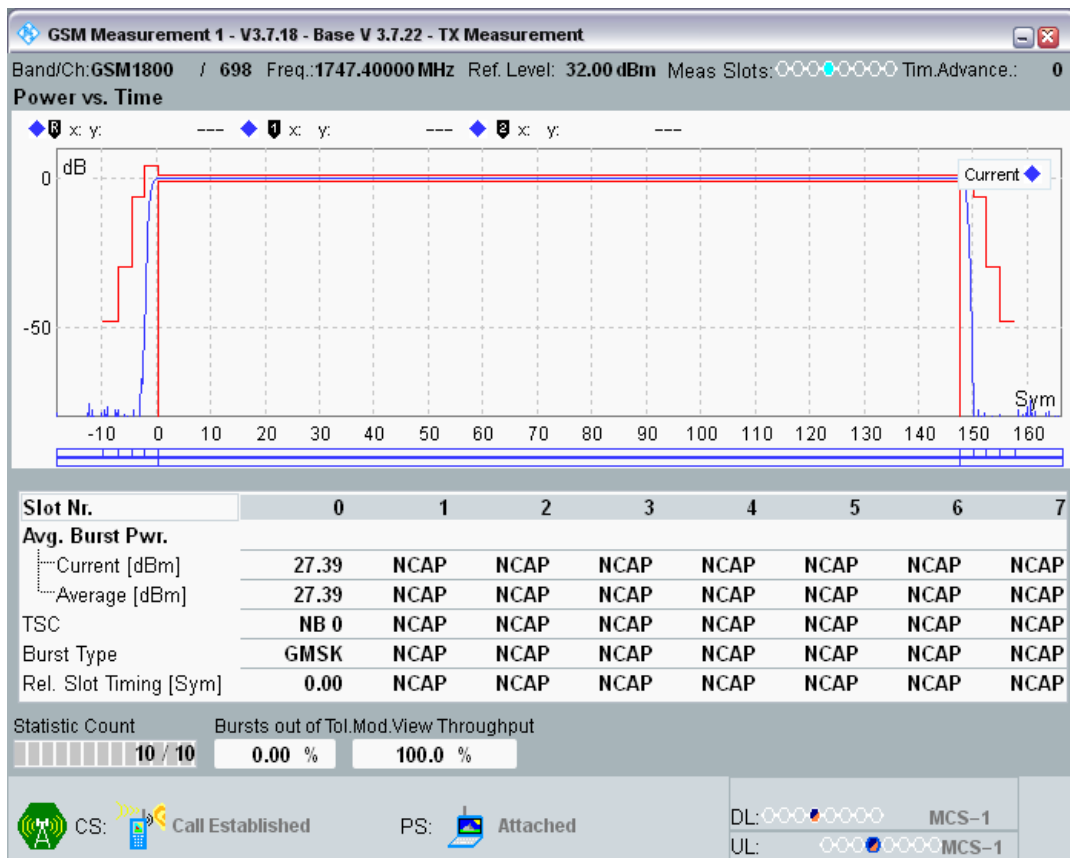


GSM1800 Channel=698 PCL=1




GSM1800 Channel=698 PCL=3

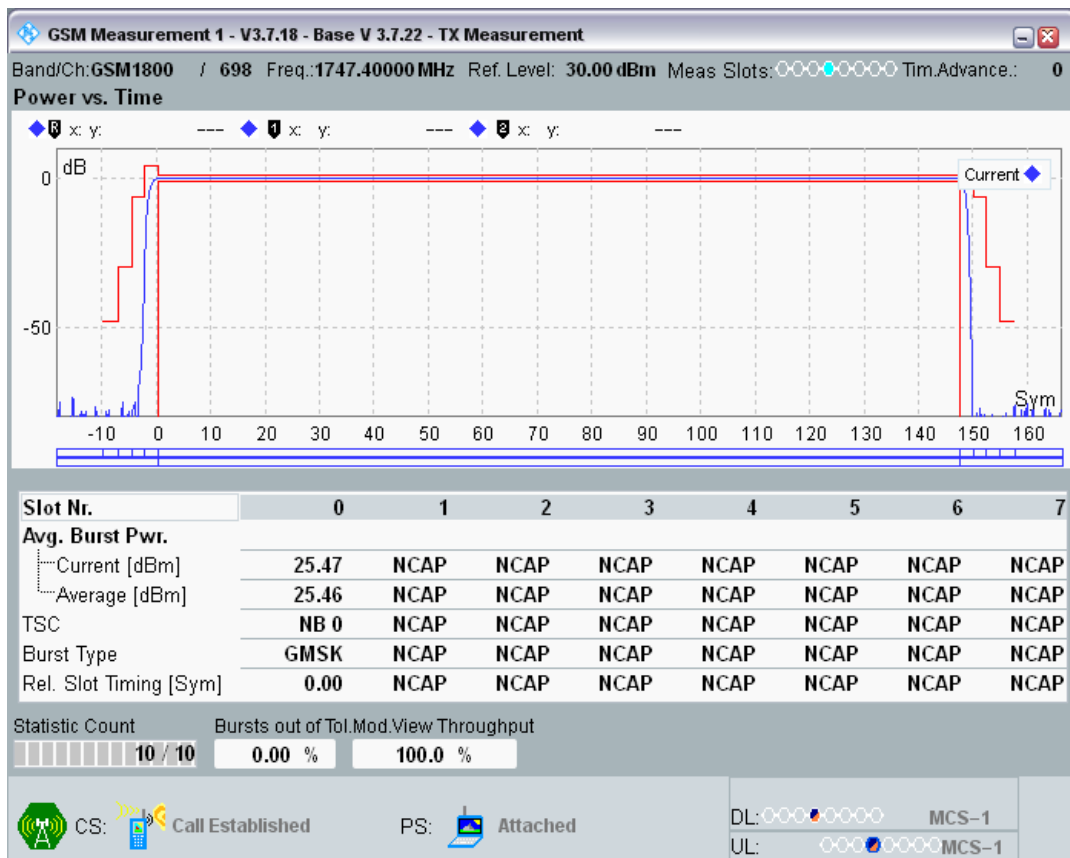


GSM1800 Channel=698 PCL=4

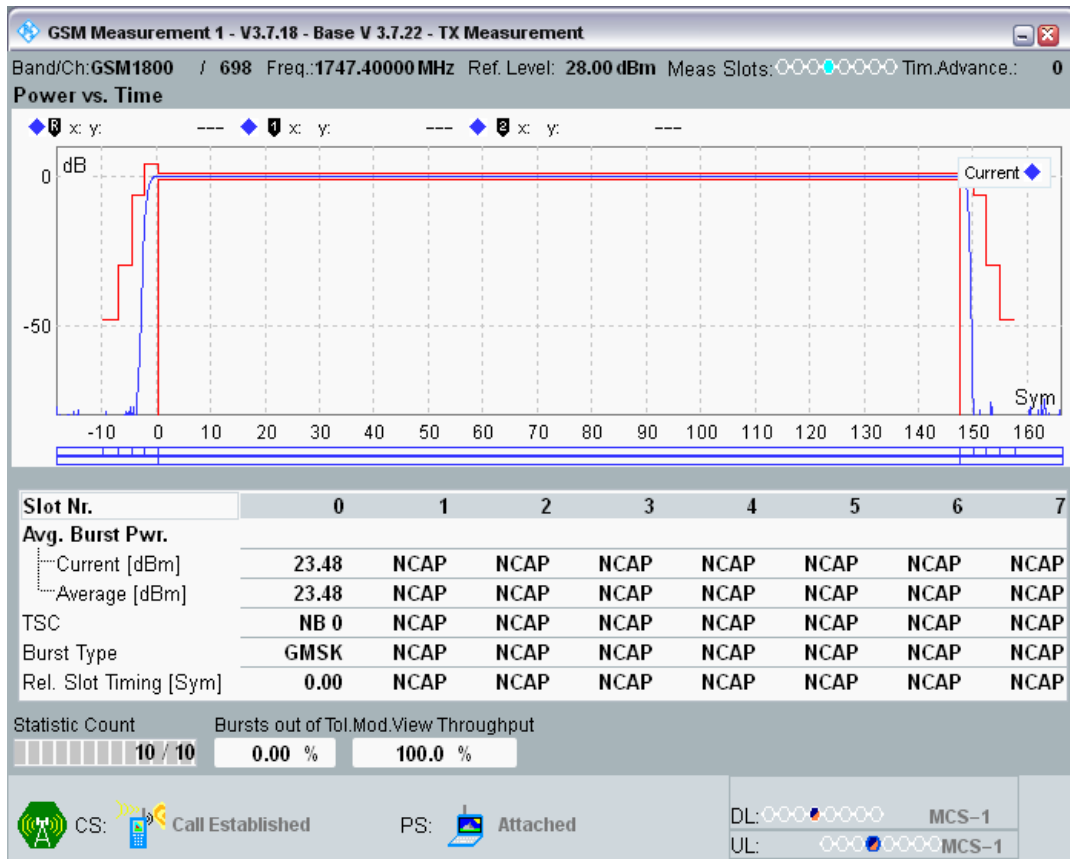


GSM1800 Channel=698 PCL=5

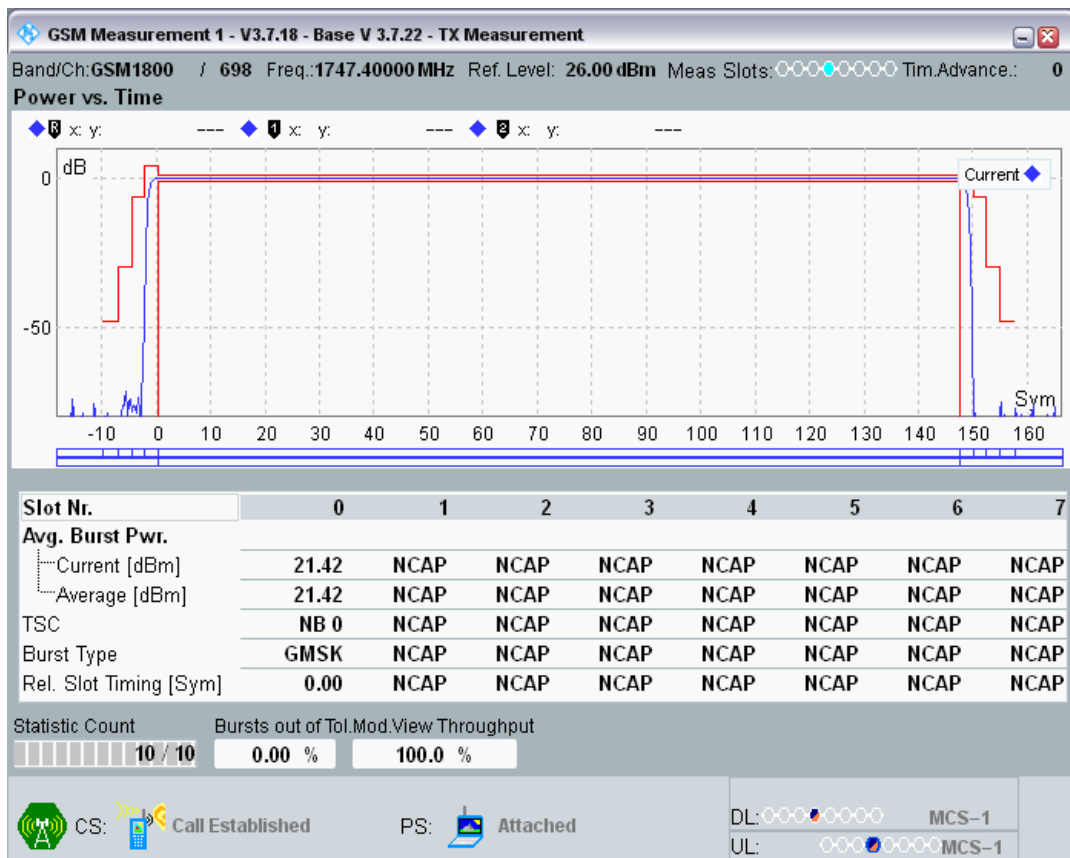

GSM1800 Channel=698 PCL=6

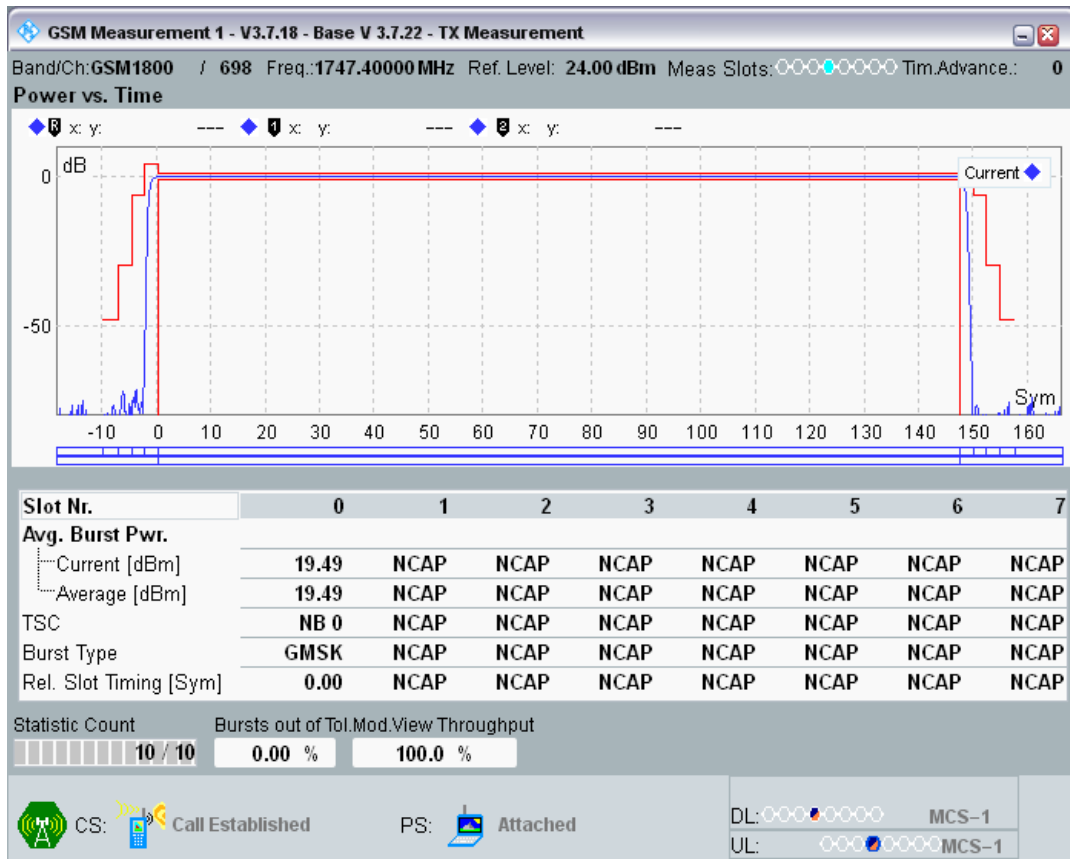


GSM1800 Channel=698 PCL=7

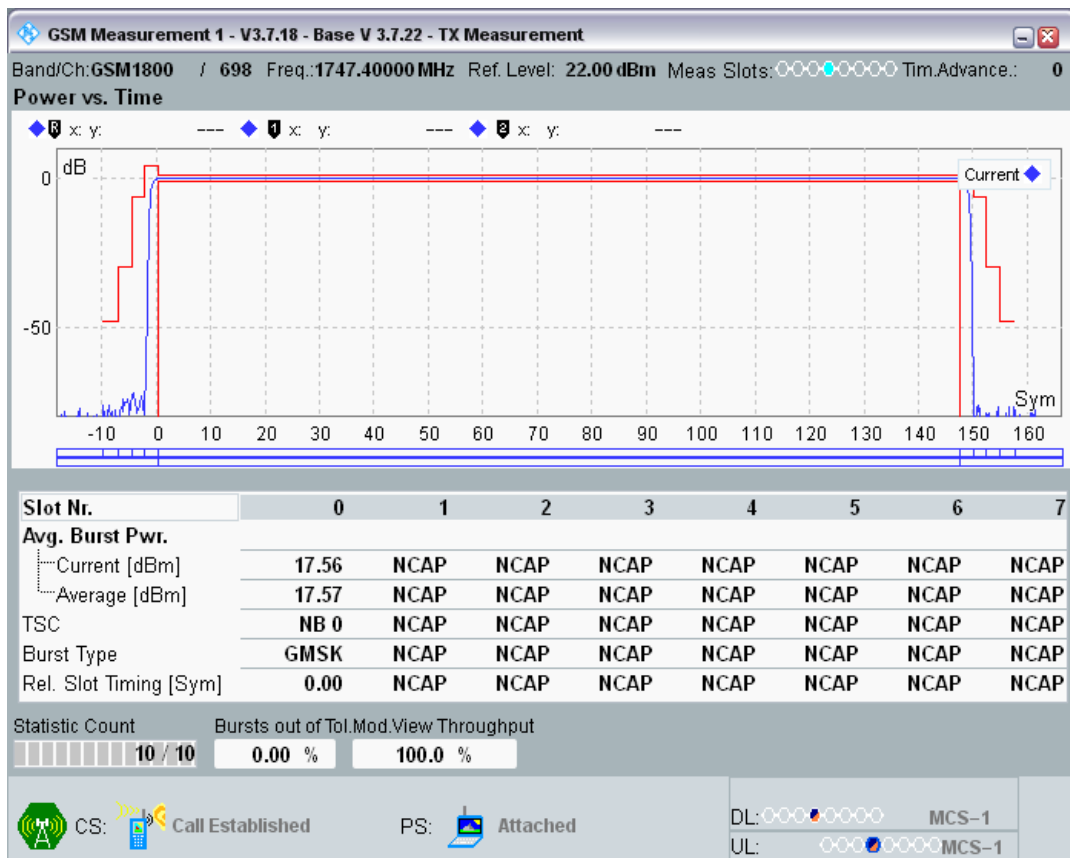


GSM1800 Channel=698 PCL=8




GSM1800 Channel=698 PCL=9

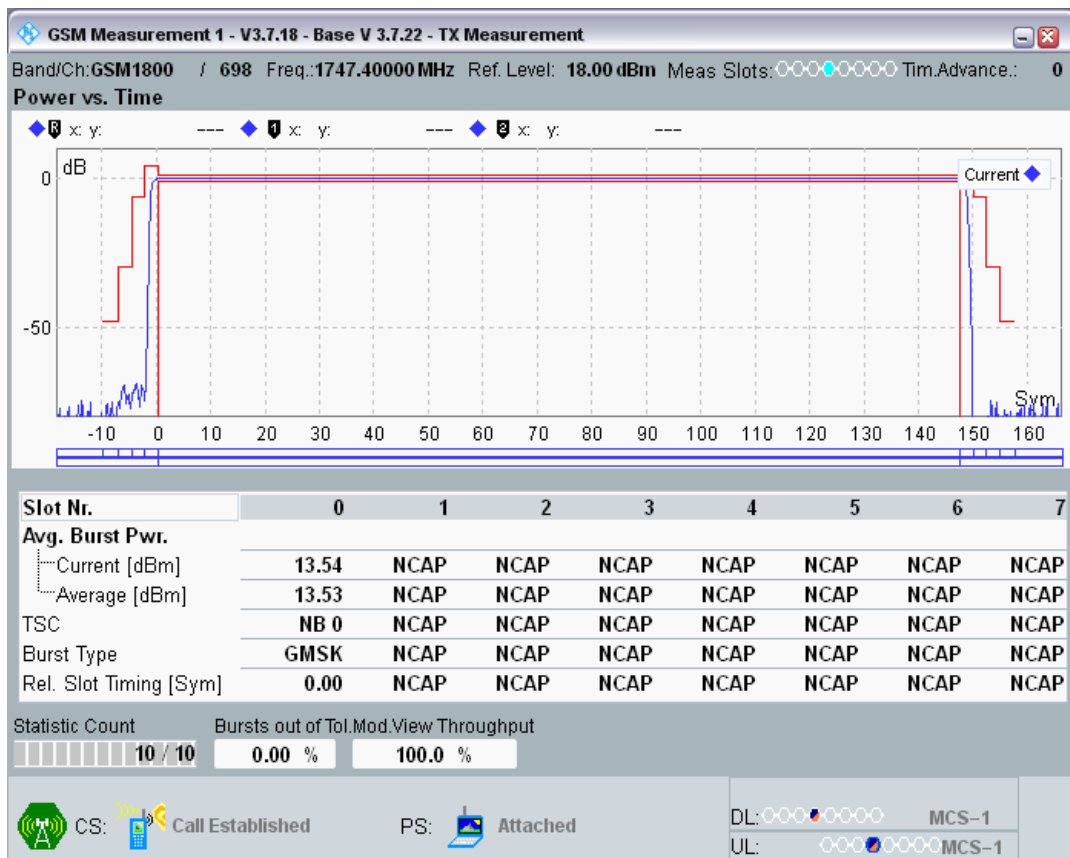


GSM1800 Channel=698 PCL=10

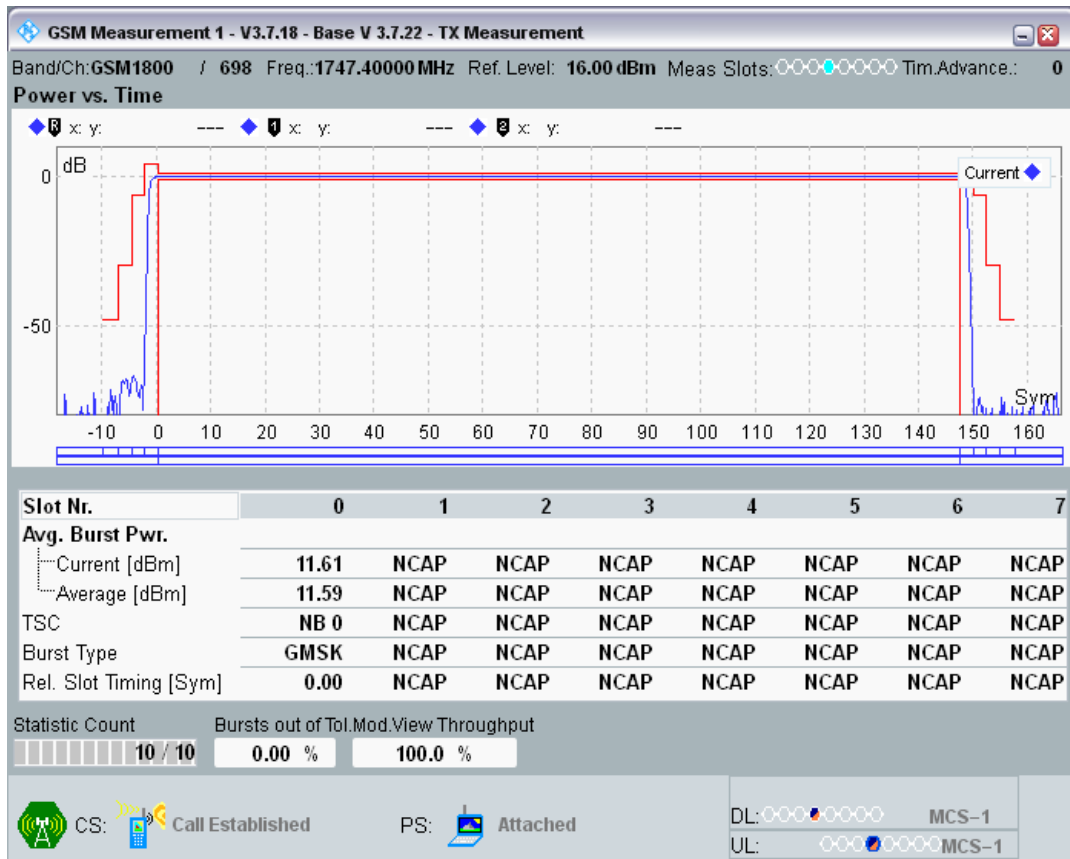


GSM1800 Channel=698 PCL=11

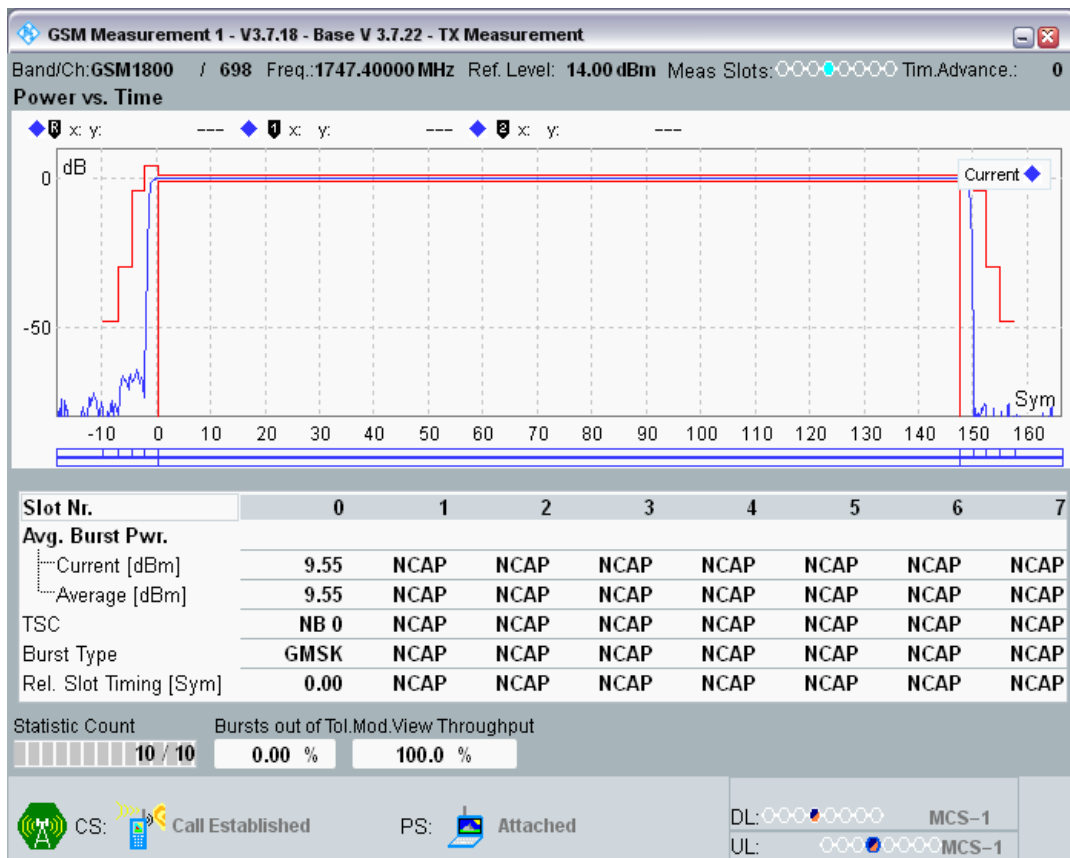


GSM1800 Channel=698 PCL=12

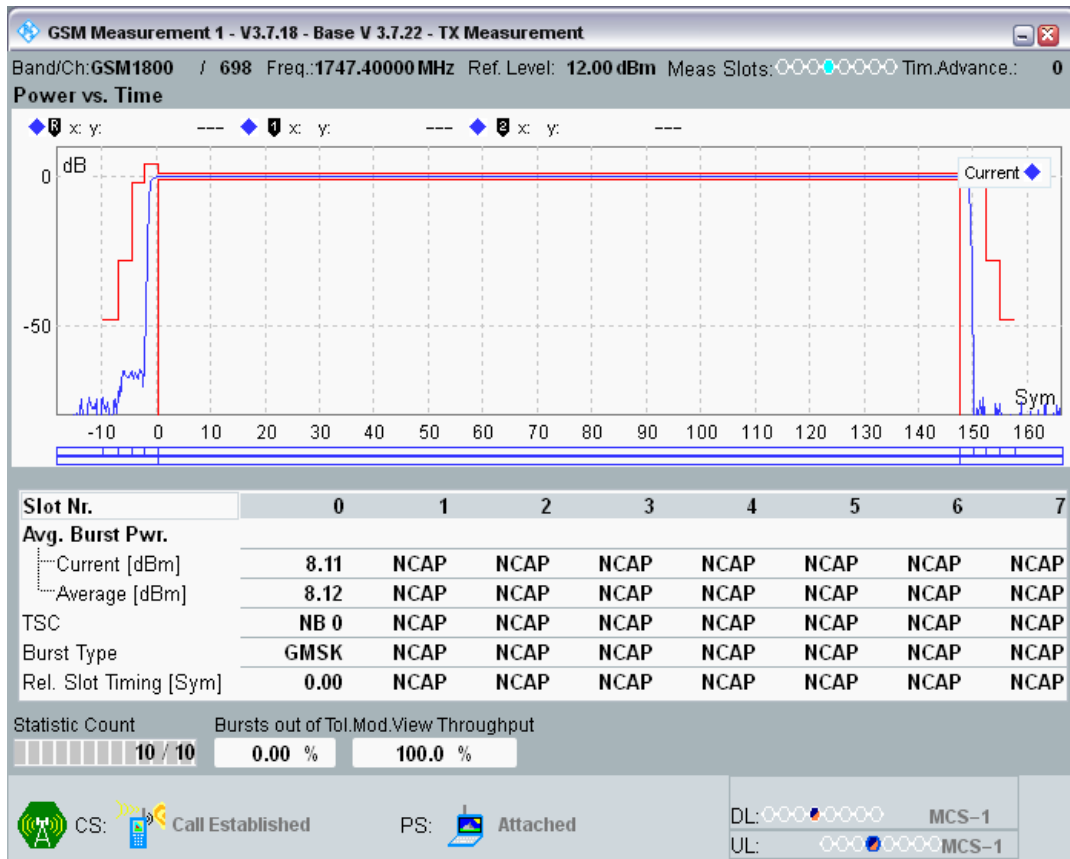


GSM1800 Channel=698 PCL=13

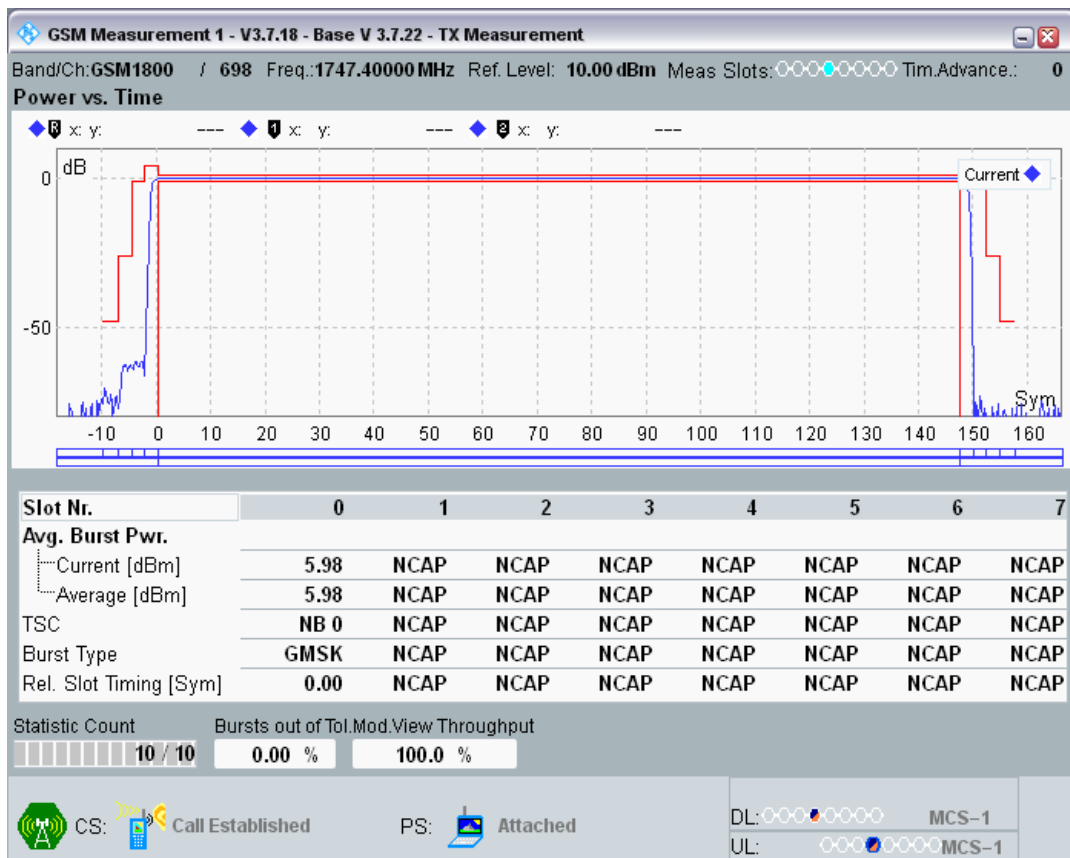


GSM1800 Channel=698 PCL=14

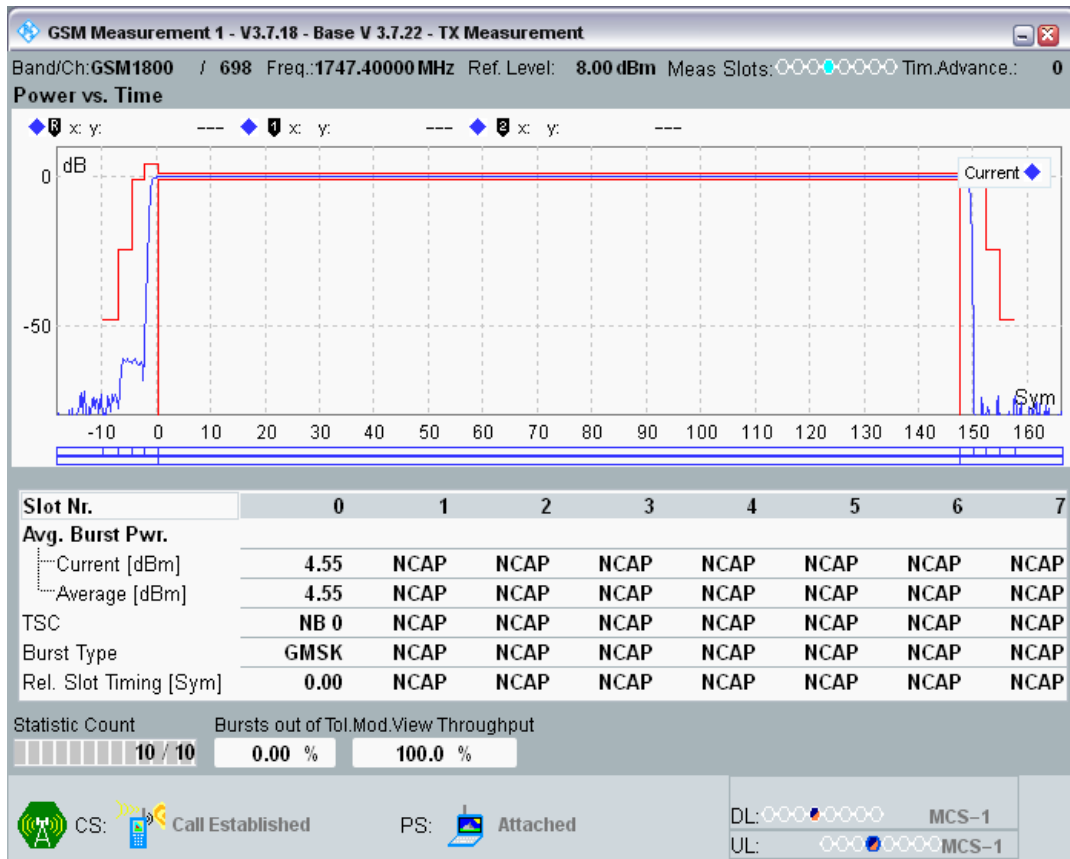


GSM1800 Channel=698 PCL=15

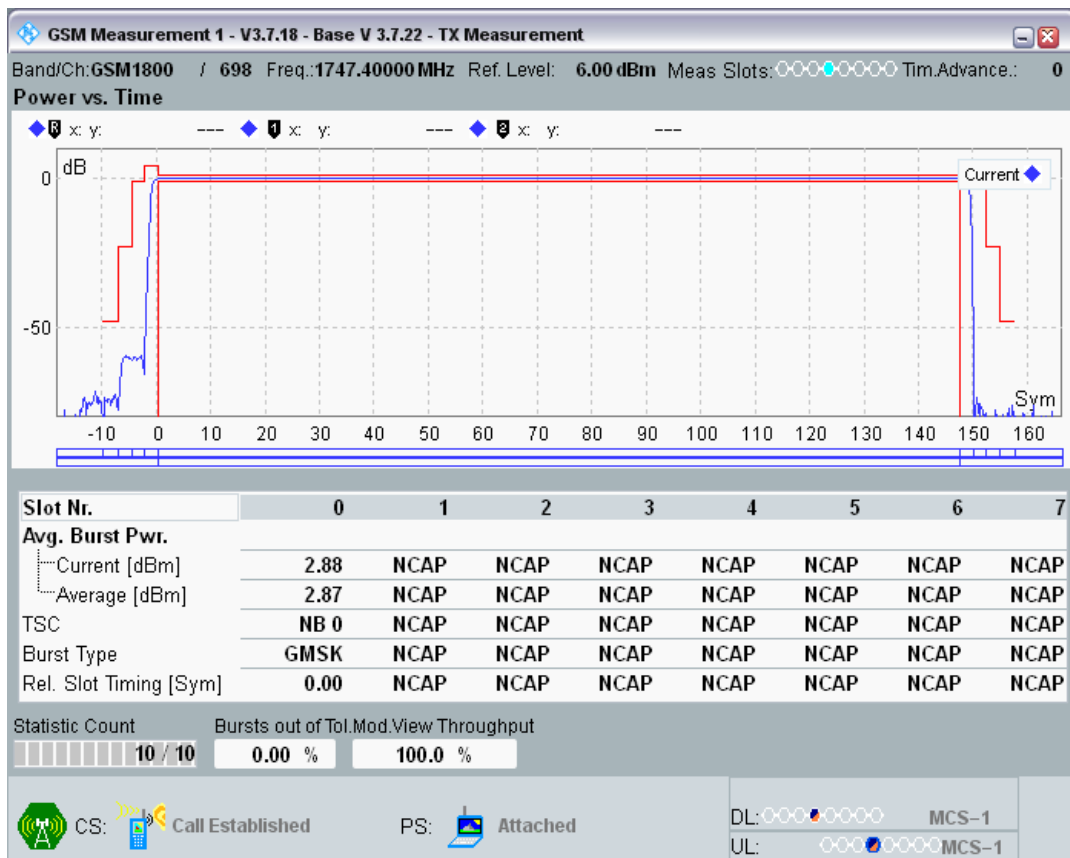

GSM1800 Channel=885 PCL=0

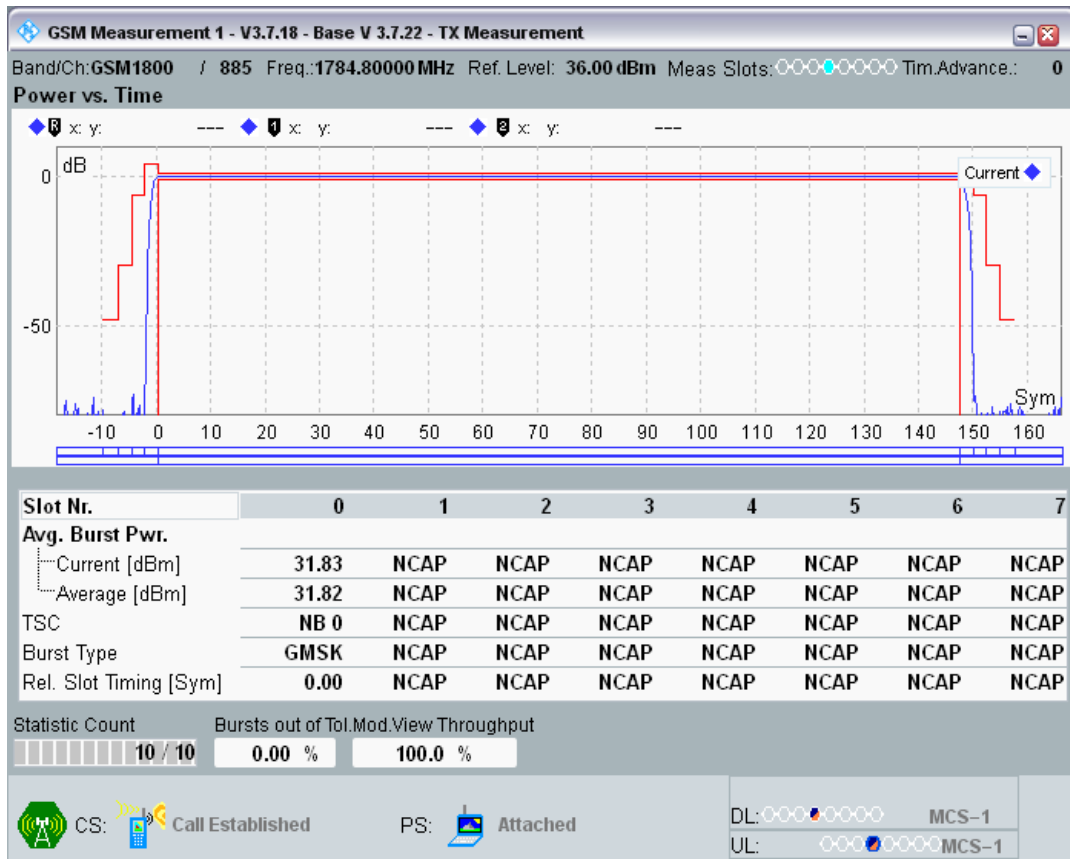


GSM1800 Channel=885 PCL=1

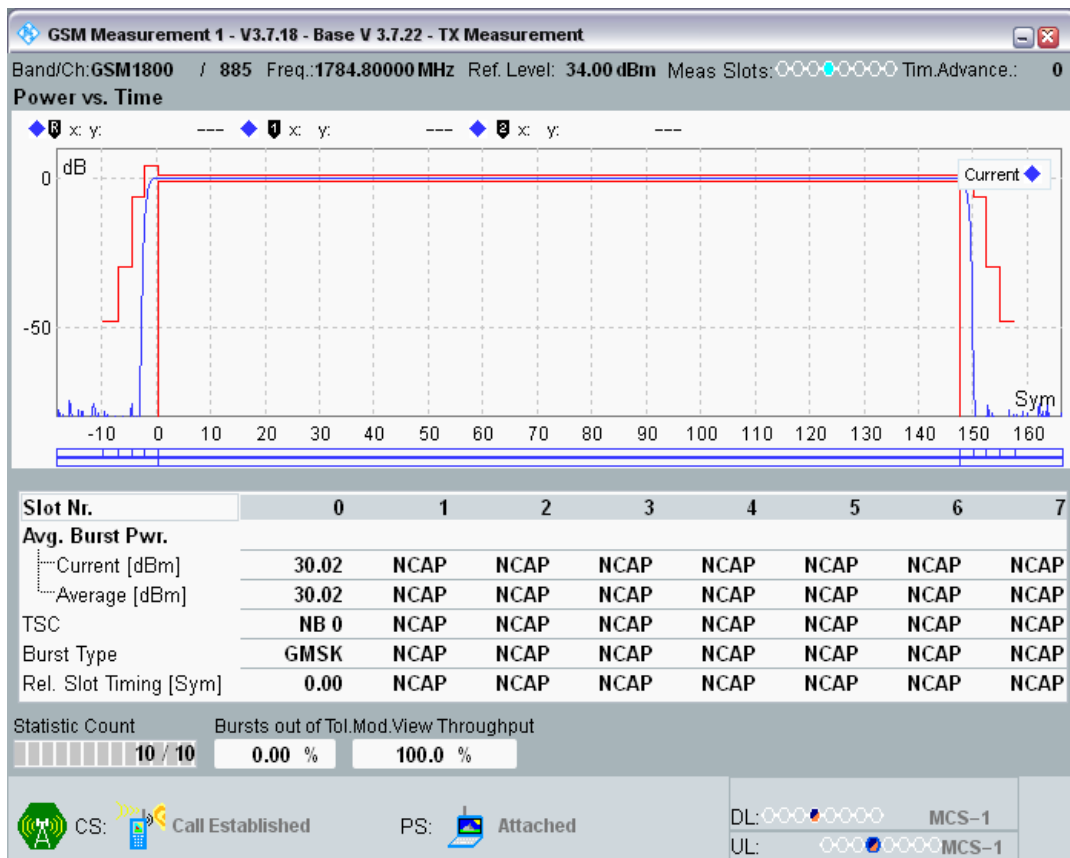

GSM1800 Channel=885 PCL=2




GSM1800 Channel=885 PCL=3

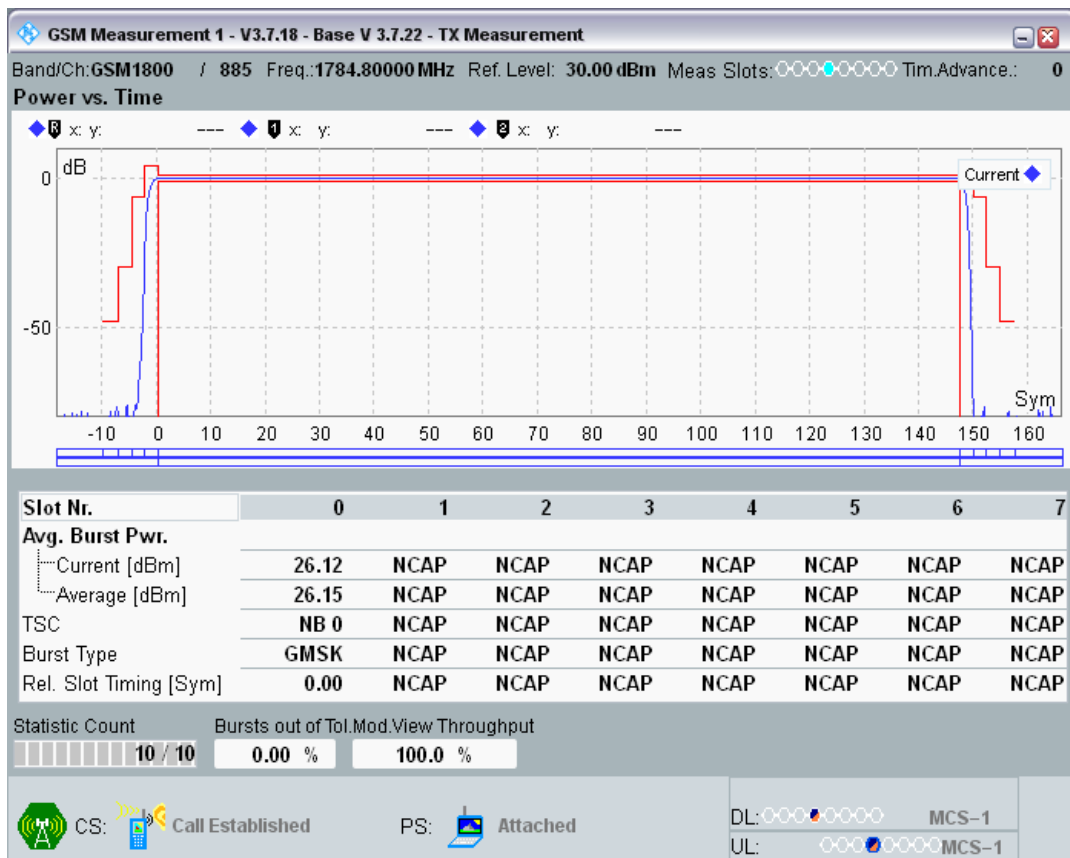

GSM1800 Channel=885 PCL=4




GSM1800 Channel=885 PCL=5

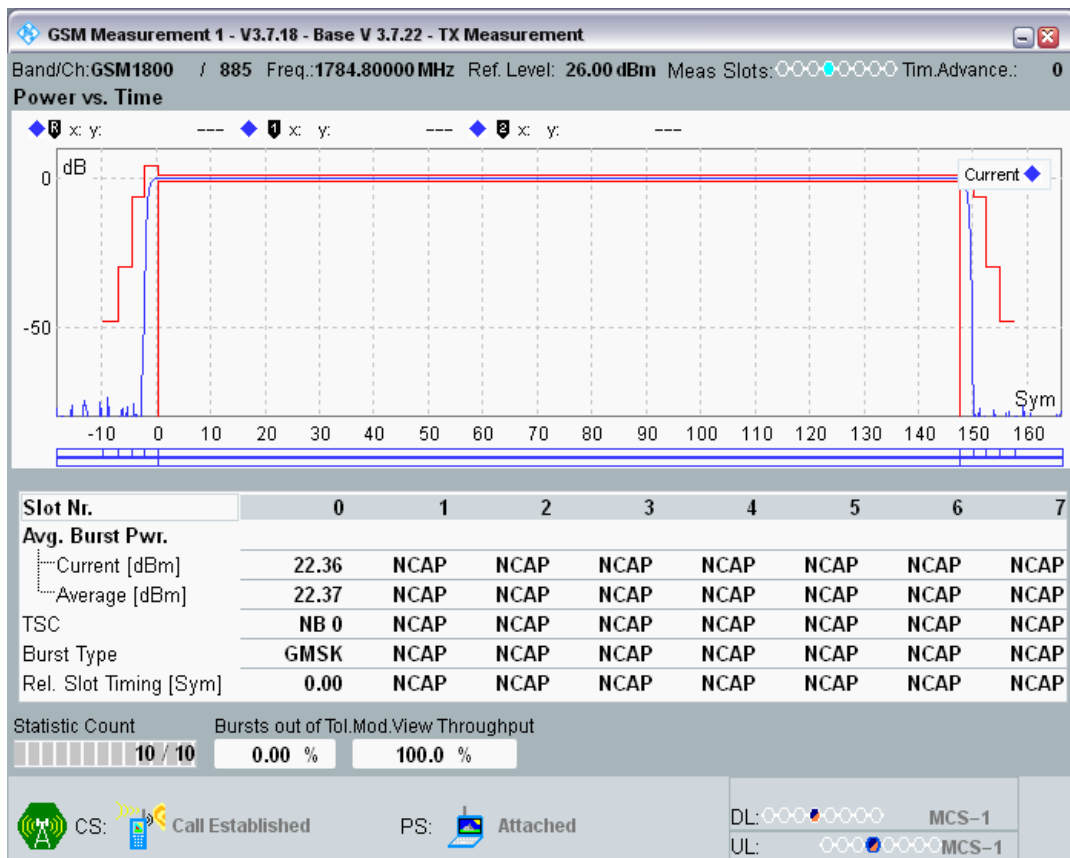


GSM1800 Channel=885 PCL=6




GSM1800 Channel=885 PCL=7

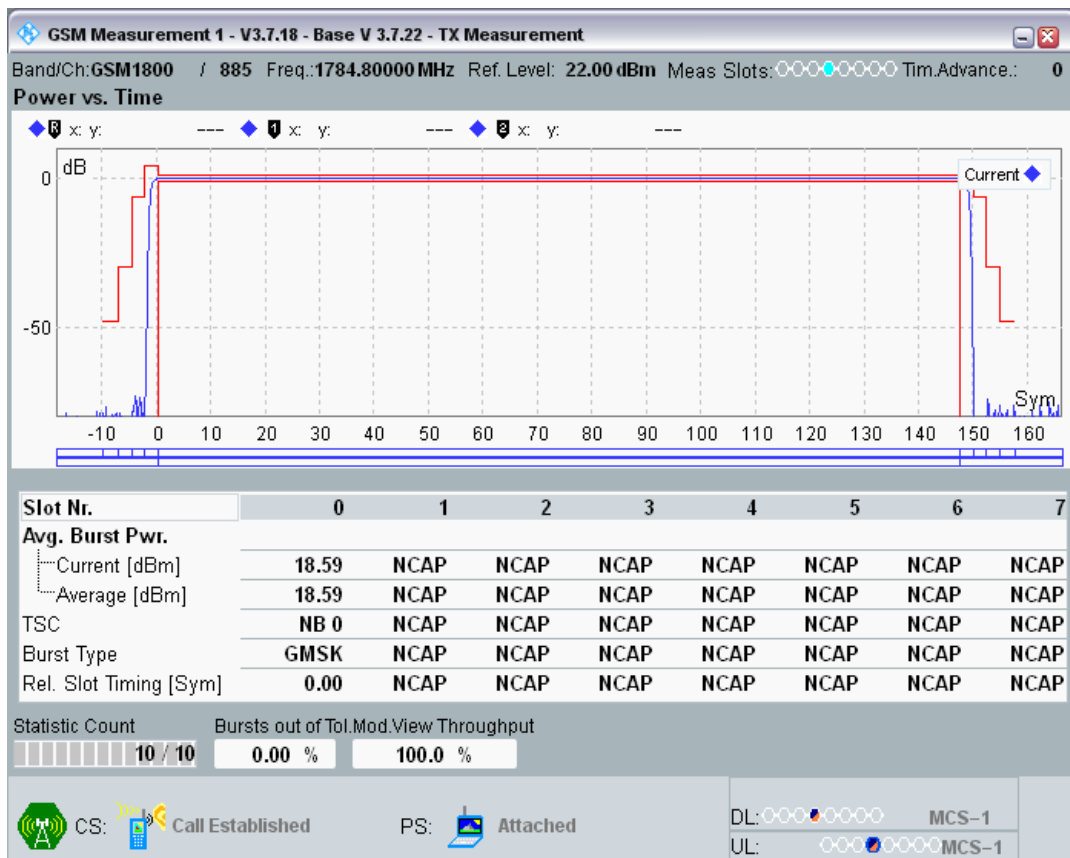

GSM1800 Channel=885 PCL=8

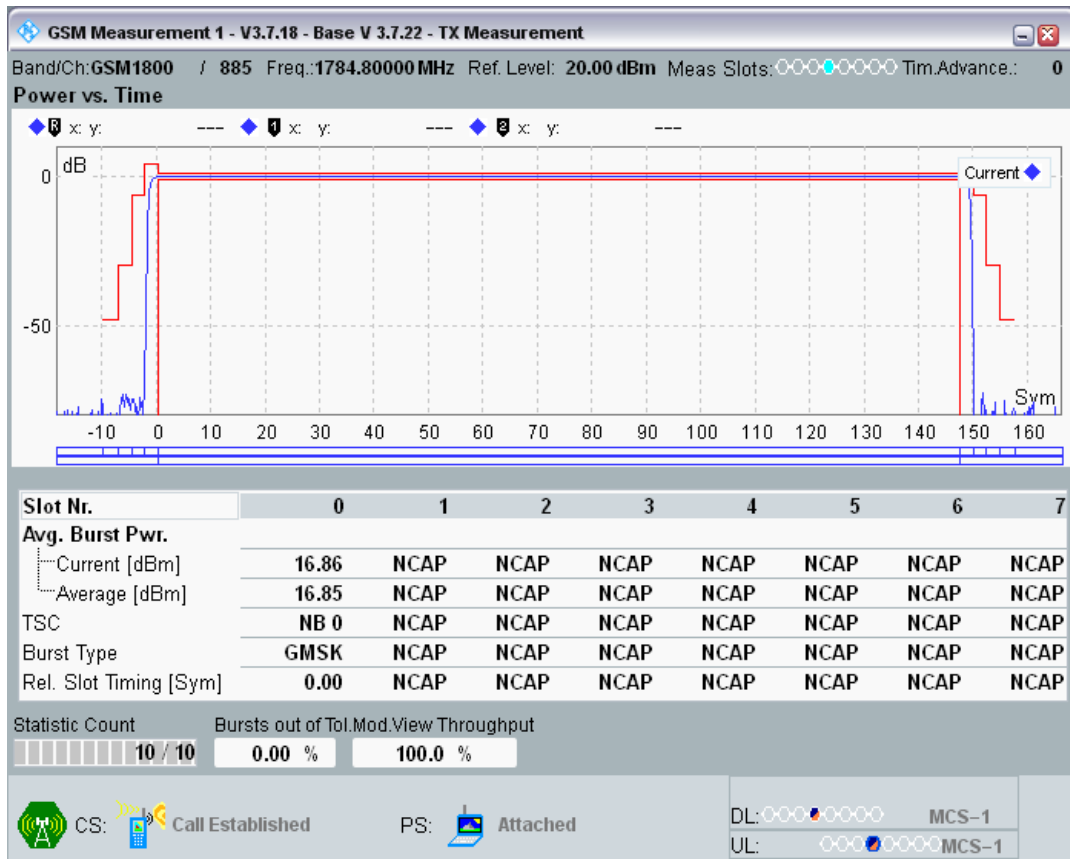


GSM1800 Channel=885 PCL=9

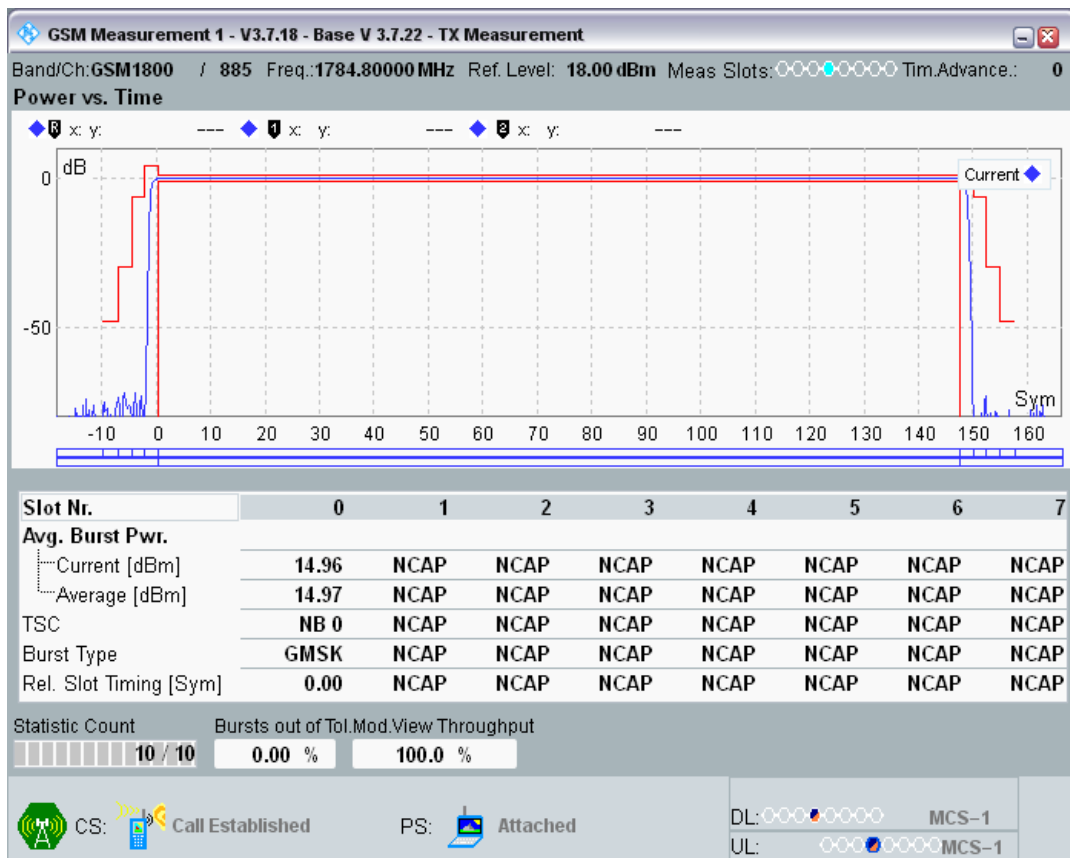


GSM1800 Channel=885 PCL=10




GSM1800 Channel=885 PCL=11

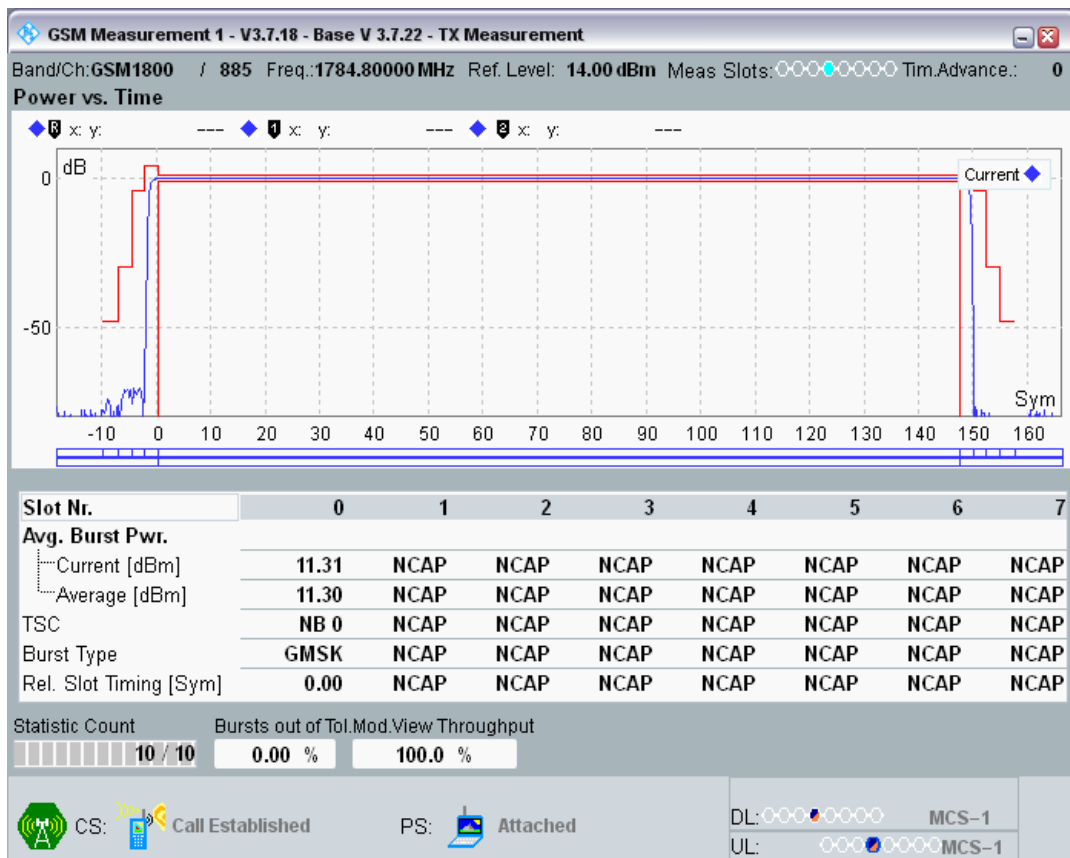


GSM1800 Channel=885 PCL=12

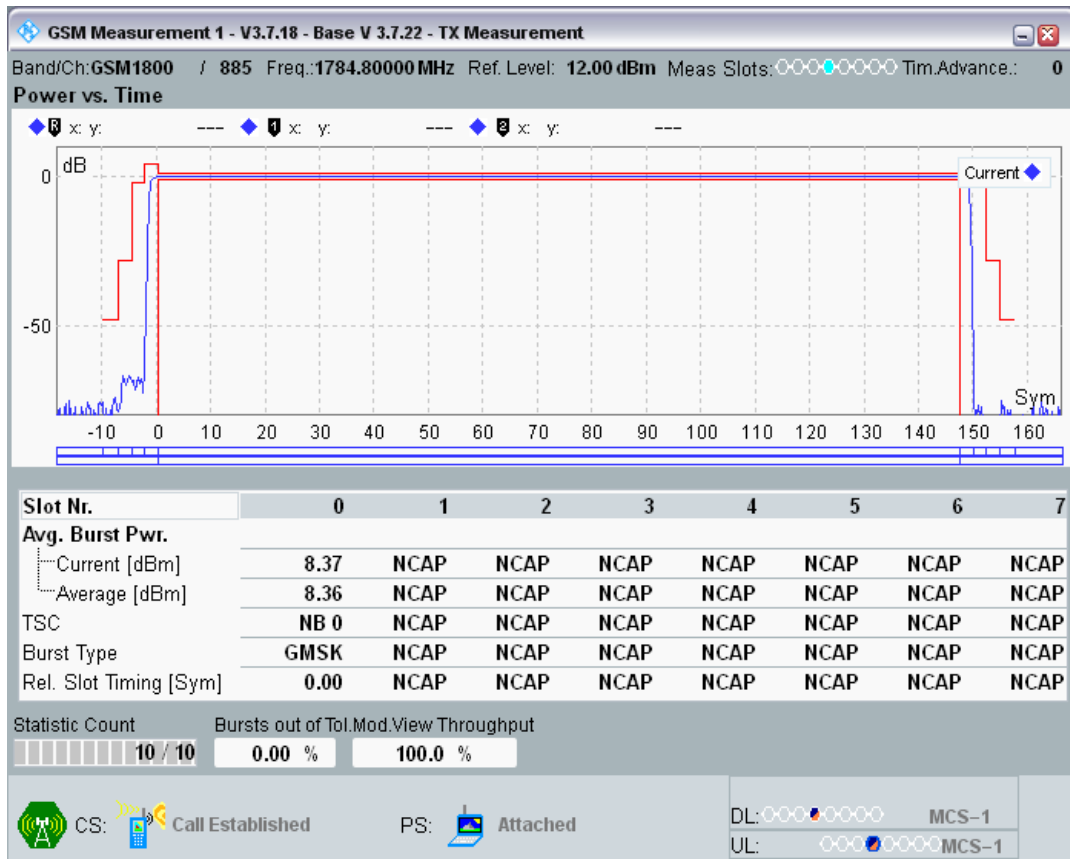


GSM1800 Channel=885 PCL=13

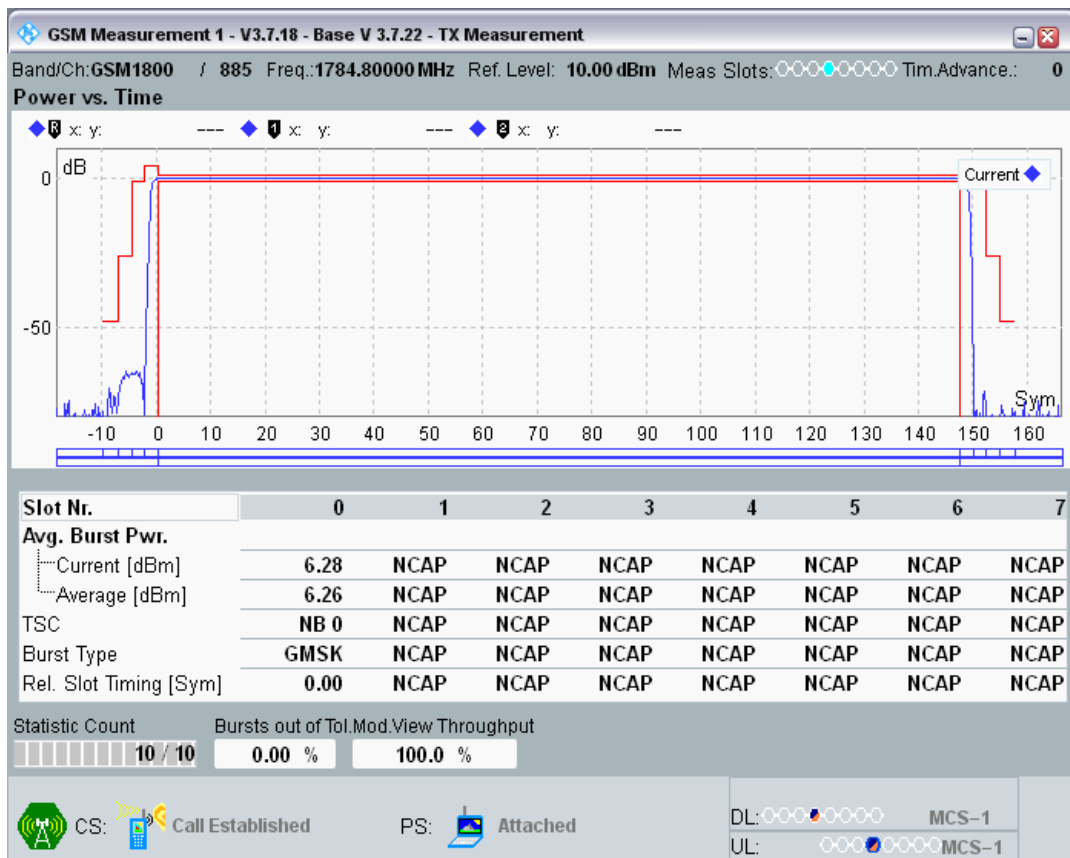


GSM1800 Channel=885 PCL=14

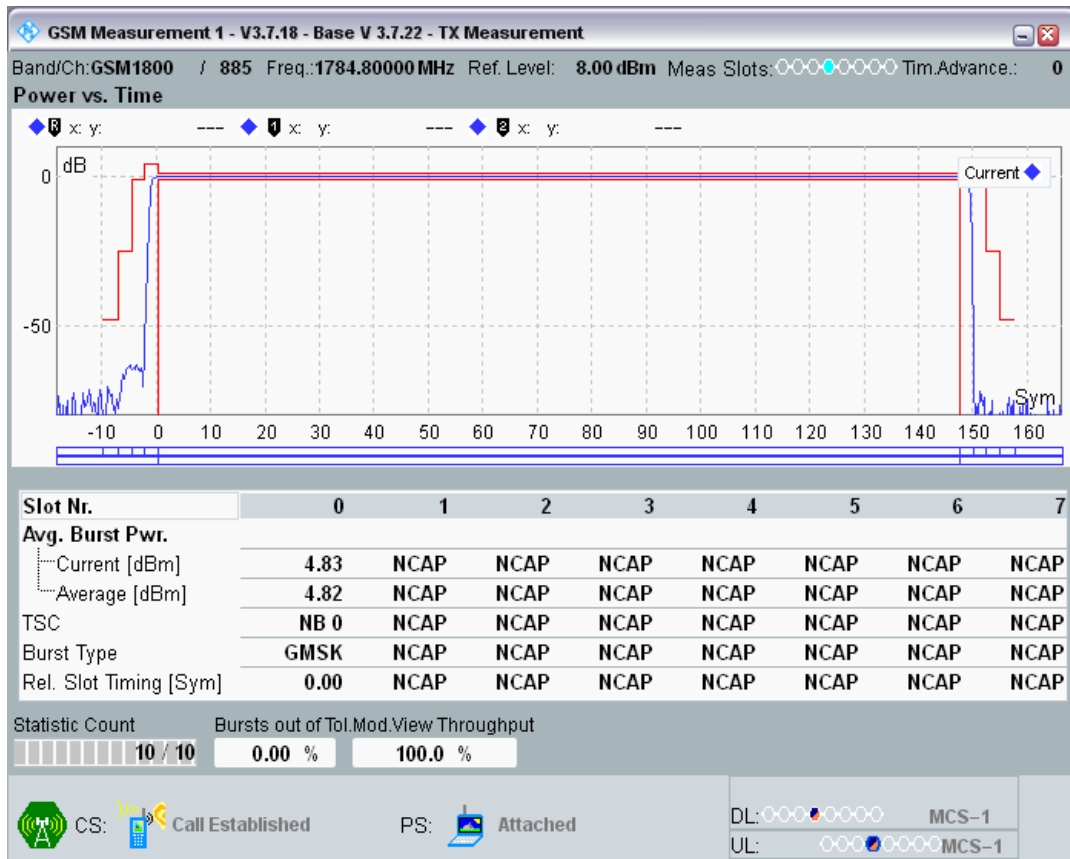


GSM1800 Channel=885 PCL=15

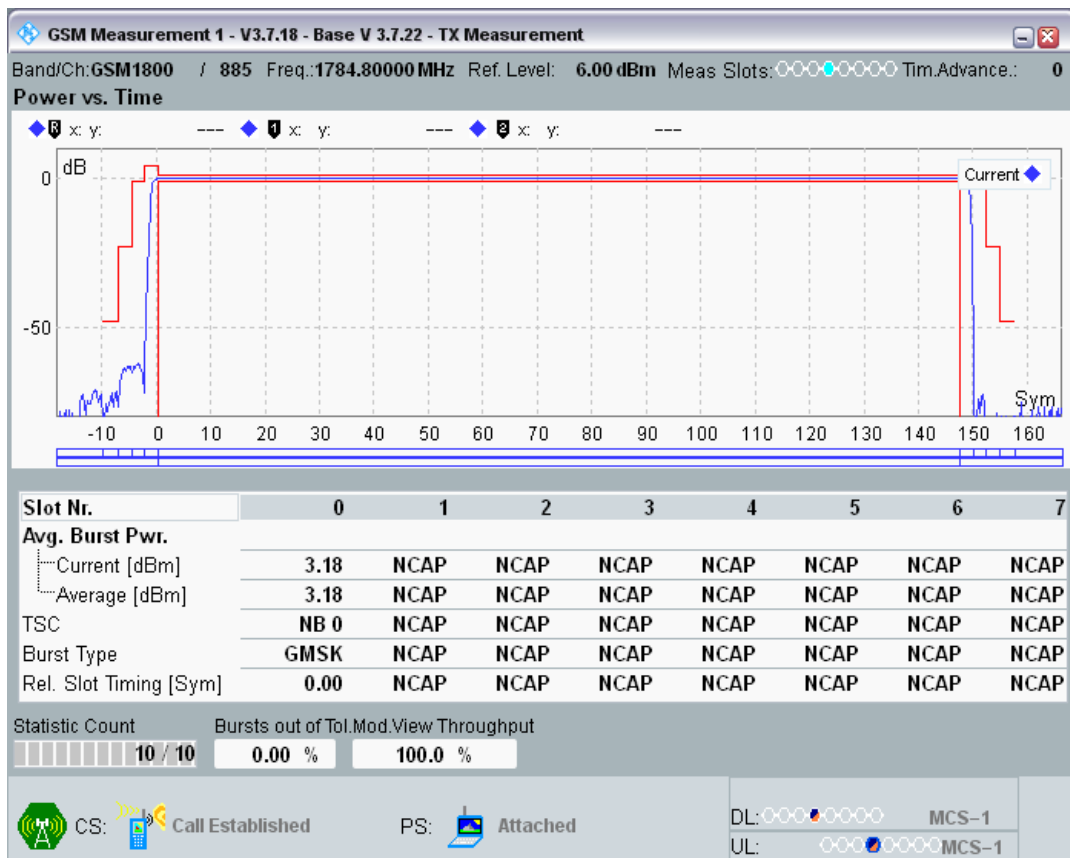


GSM900 Channel=975 PCL=5

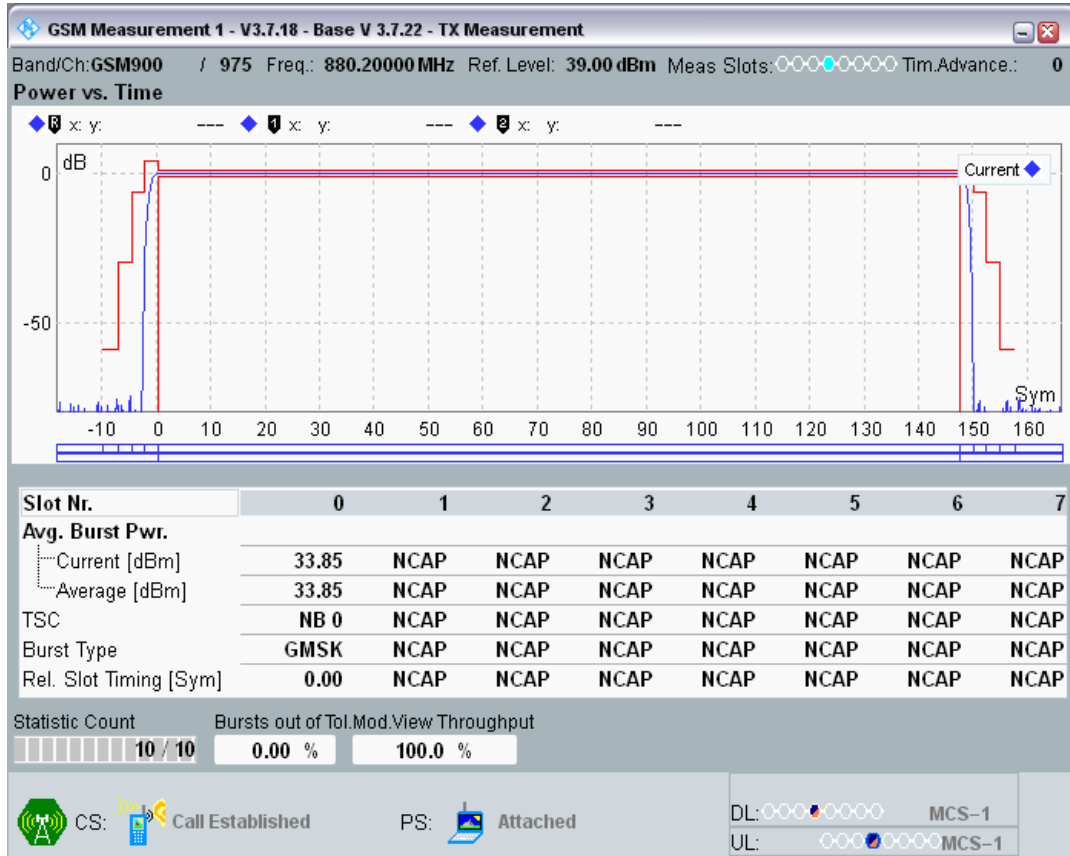


GSM900 Channel=975 PCL=6

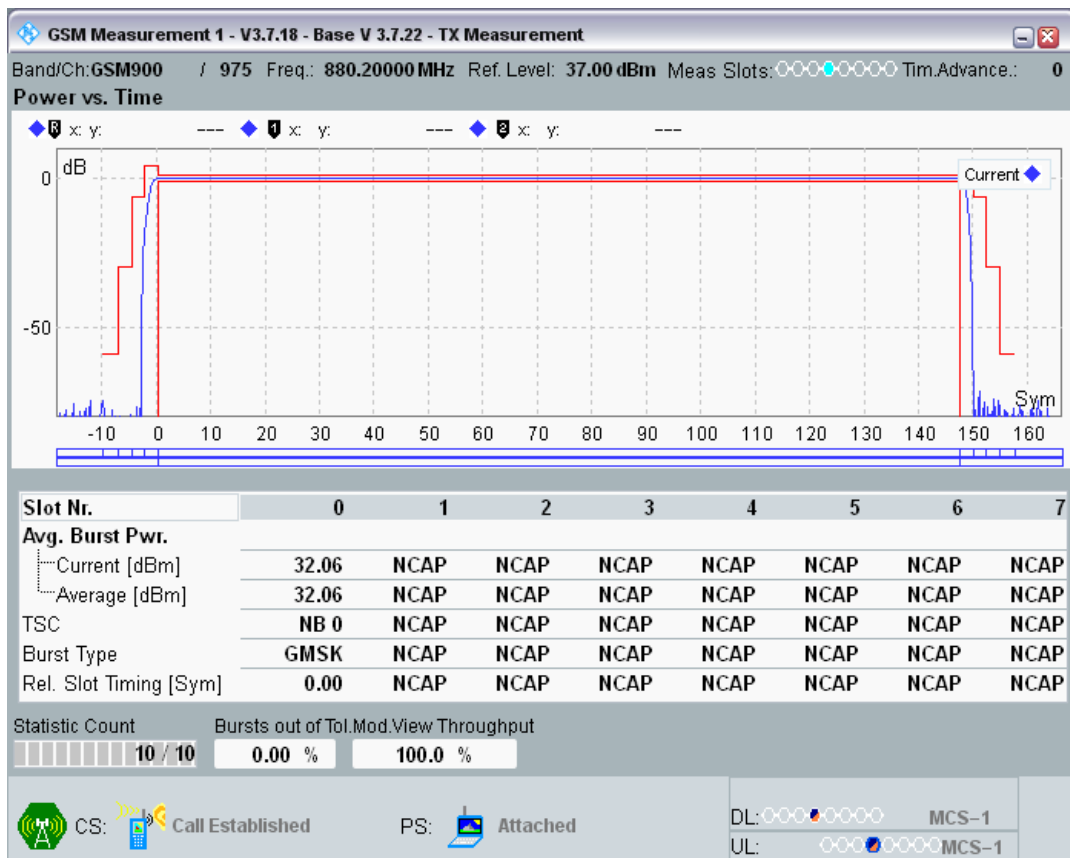


GSM900 Channel=975 PCL=7

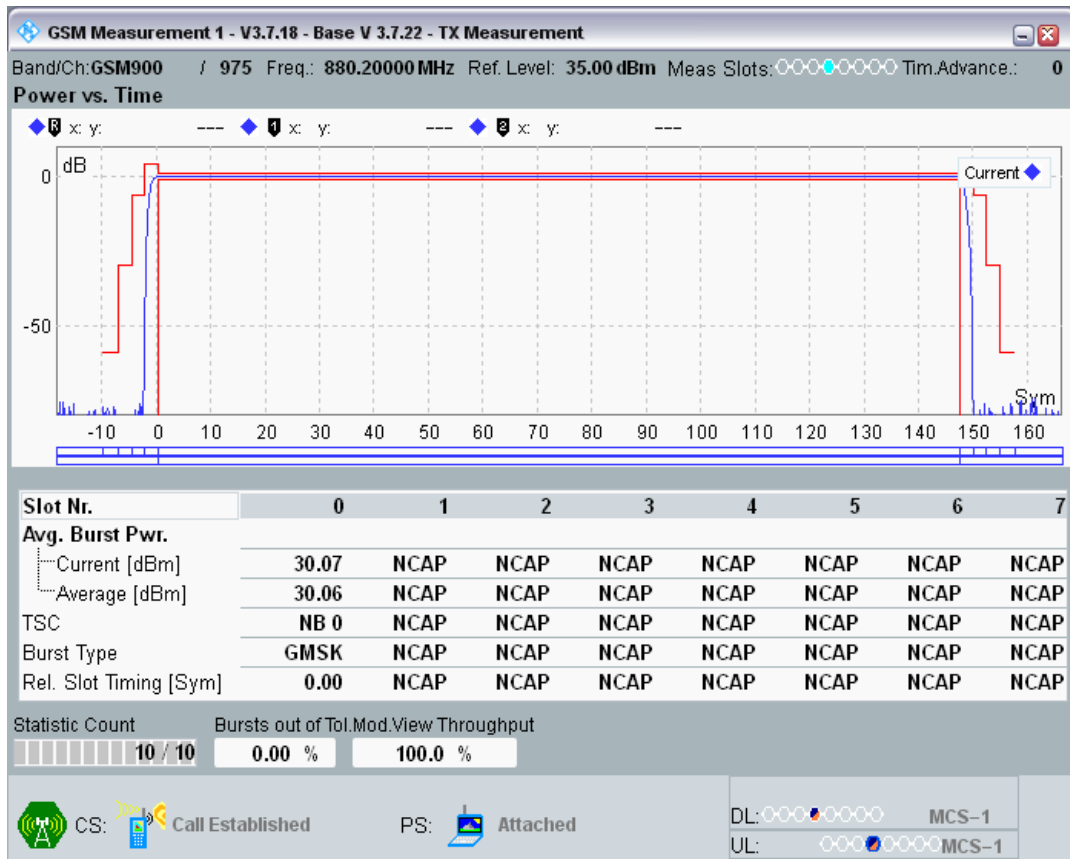


GSM900 Channel=975 PCL=8

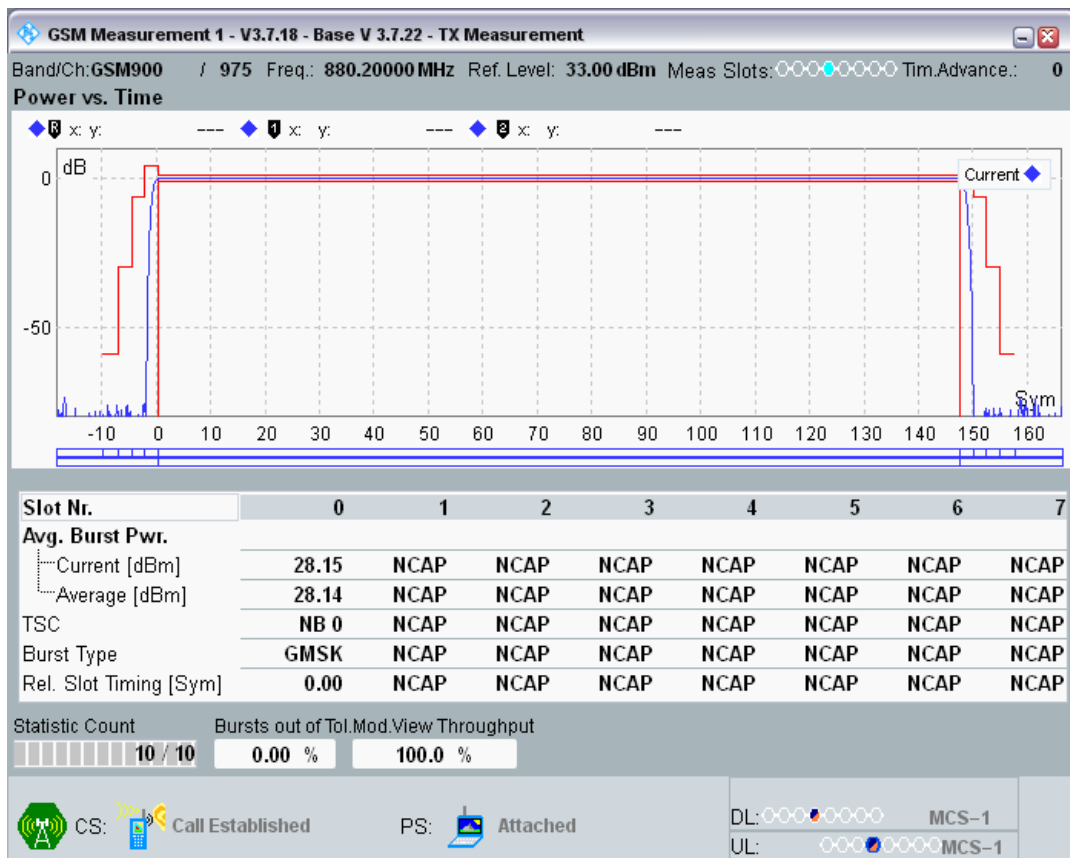

GSM900 Channel=975 PCL=9

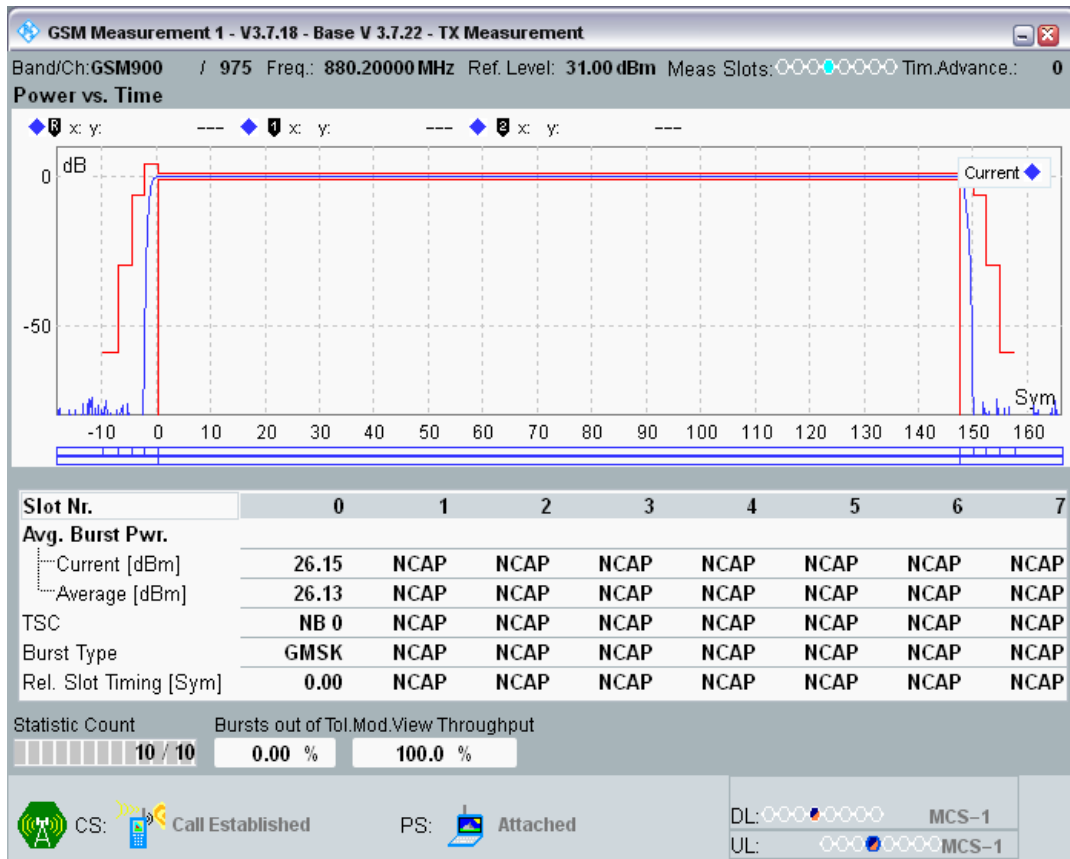


GSM900 Channel=975 PCL=10

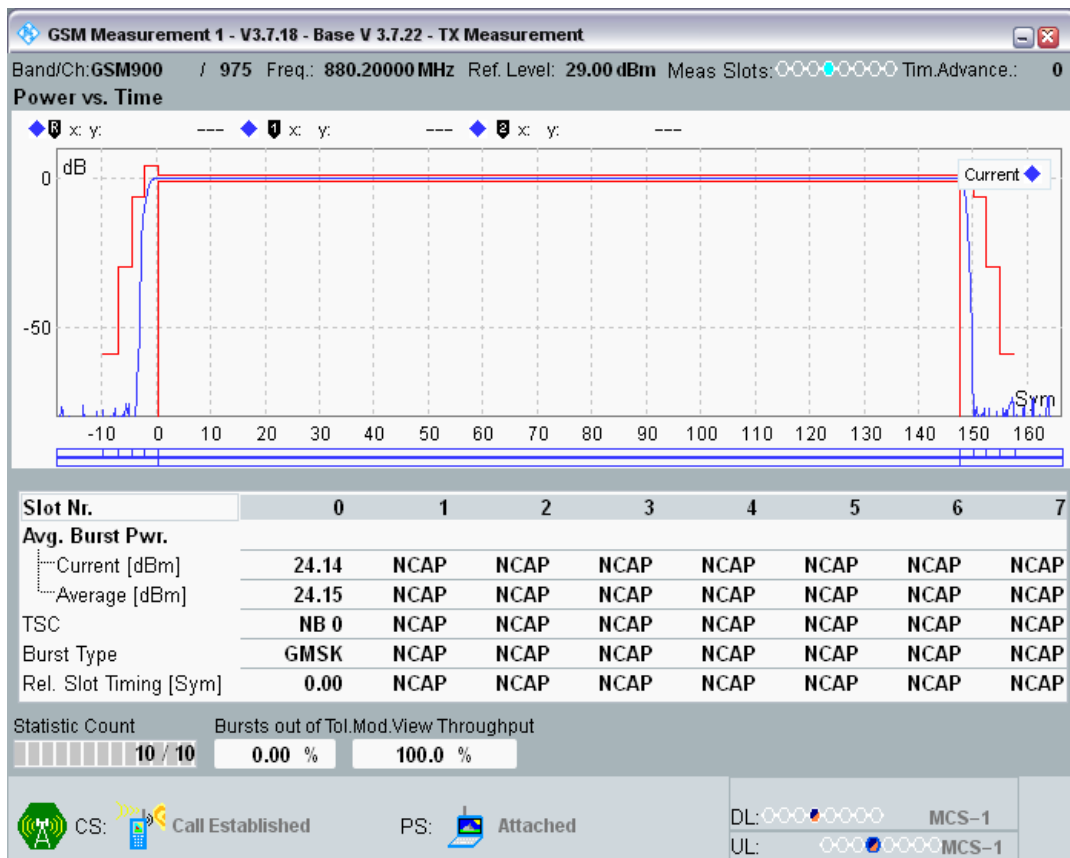

GSM900 Channel=975 PCL=11




GSM900 Channel=975 PCL=12

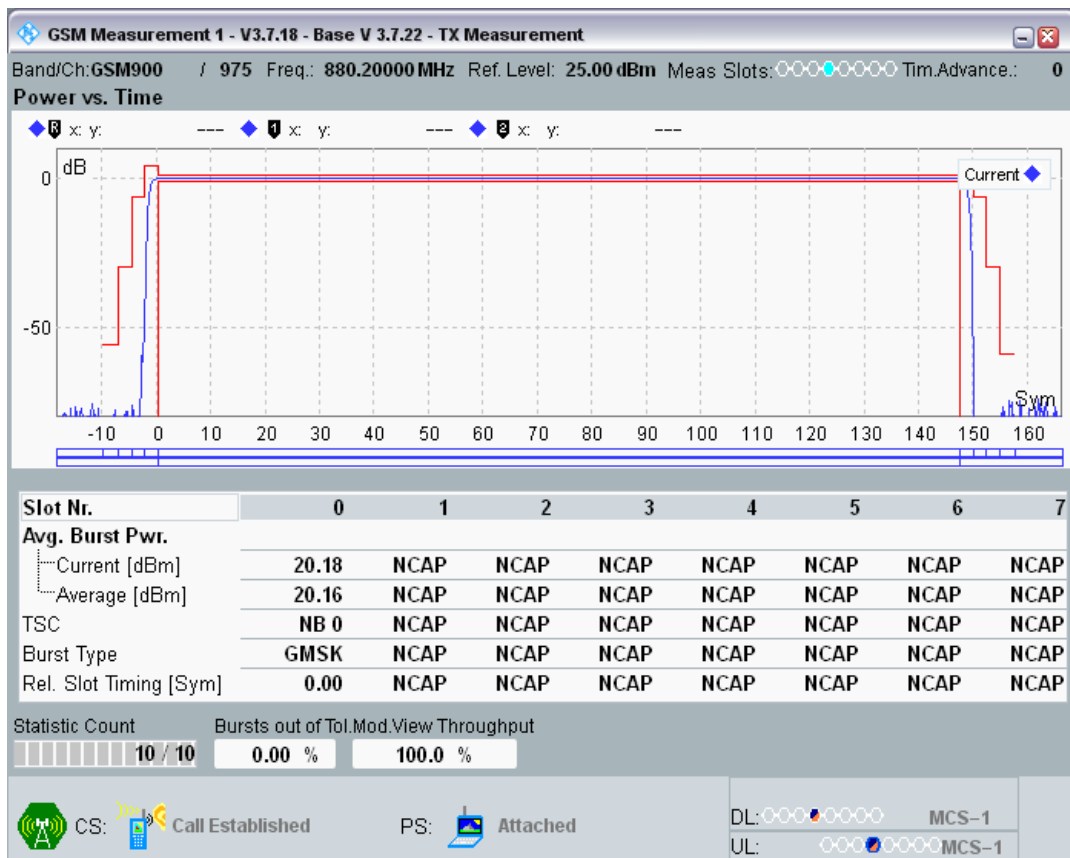


GSM900 Channel=975 PCL=14




GSM900 Channel=975 PCL=13

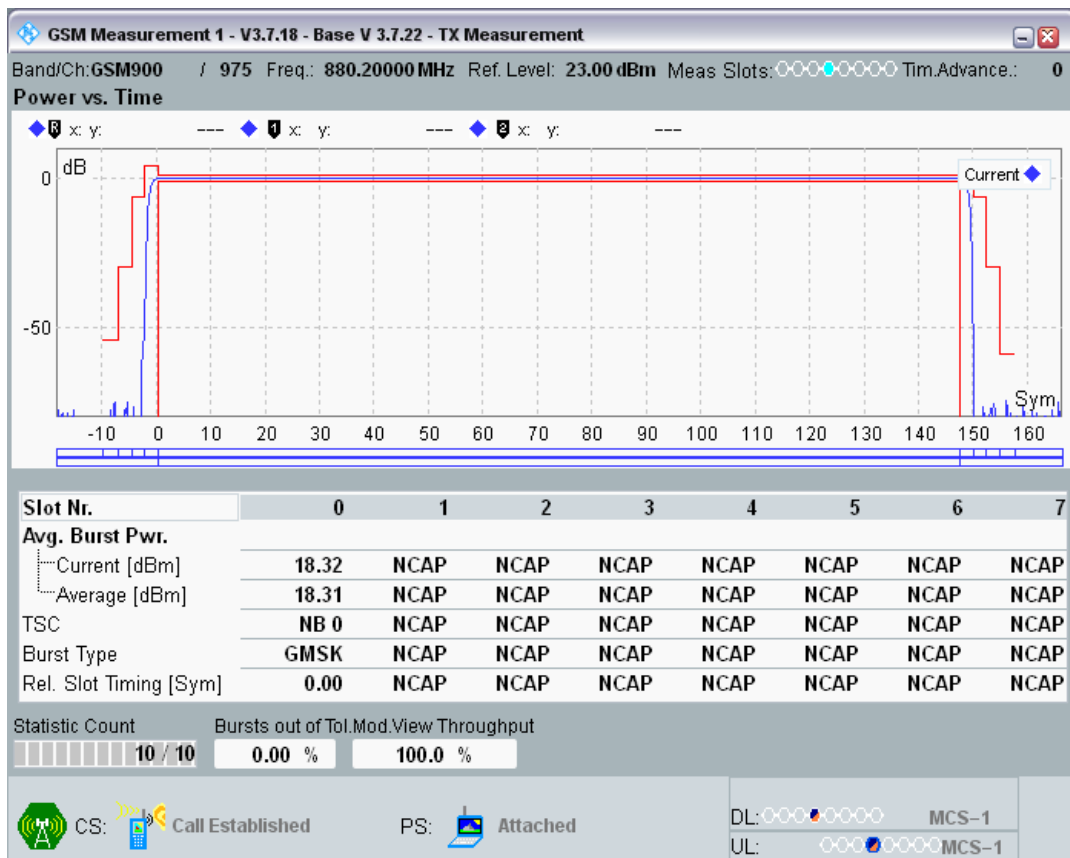

GSM900 Channel=975 PCL=15

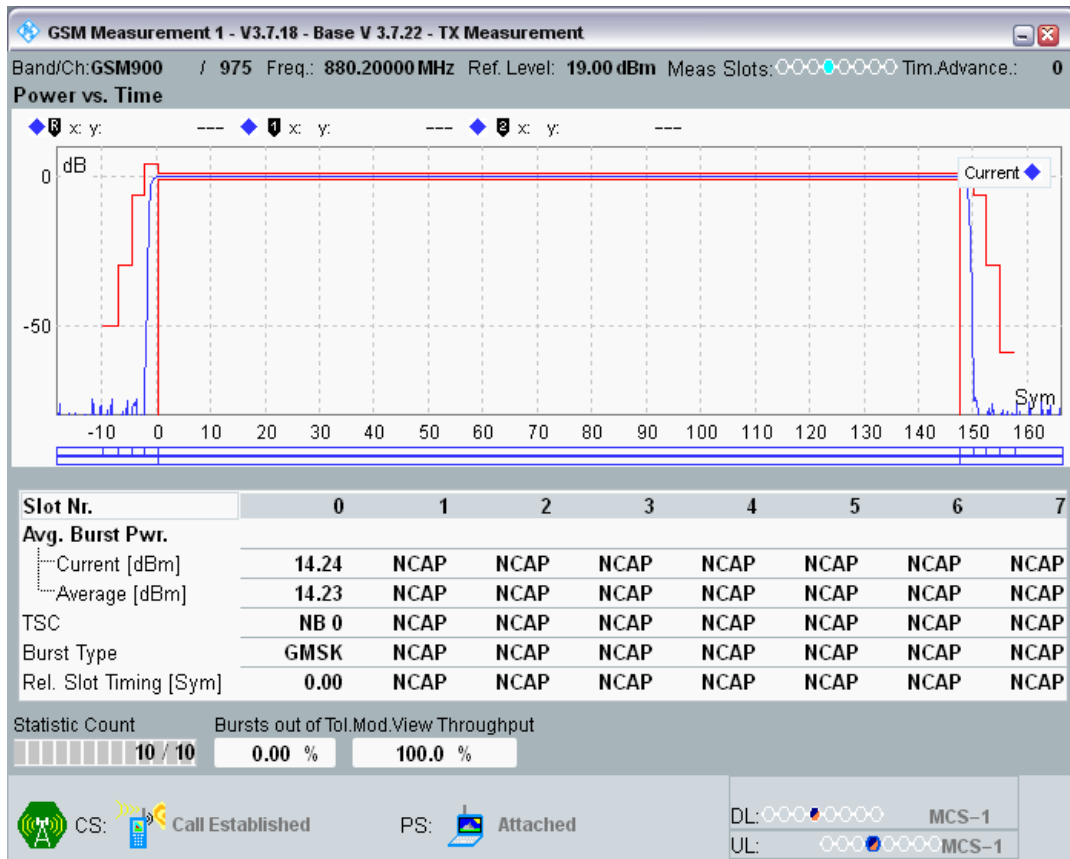


GSM900 Channel=975 PCL=16

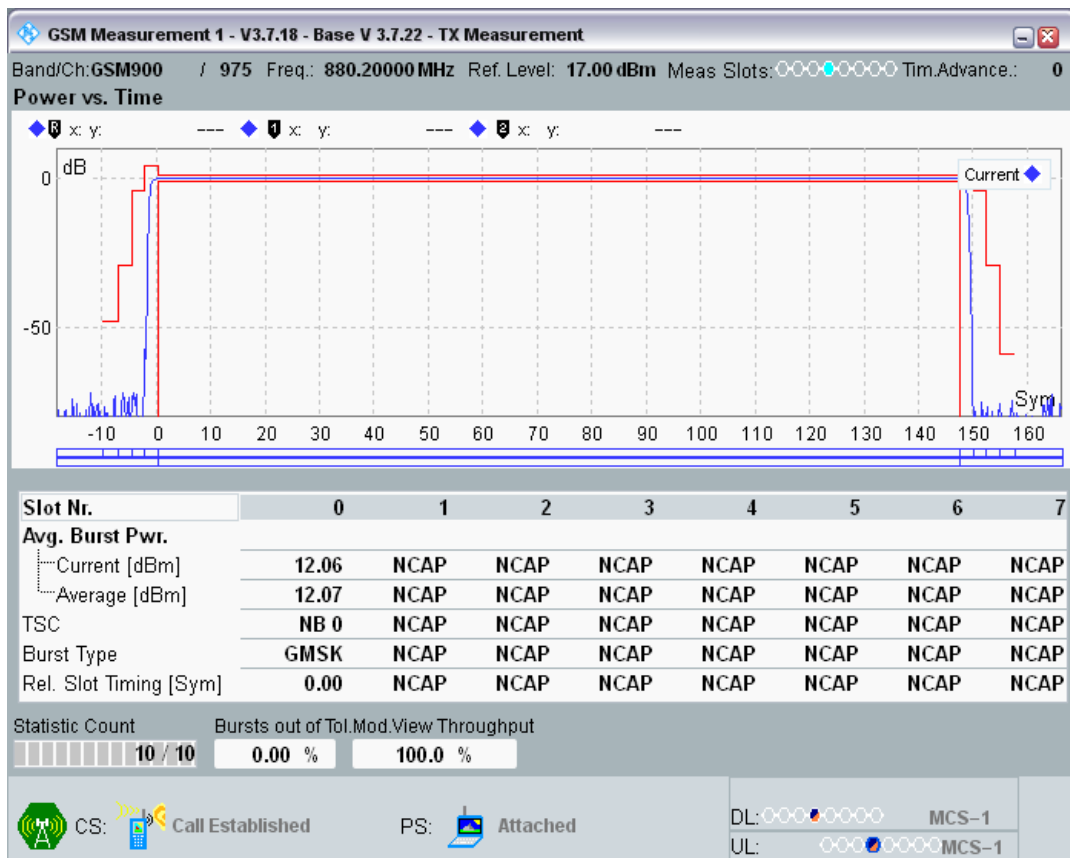


GSM900 Channel=975 PCL=17




GSM900 Channel=975 PCL=18

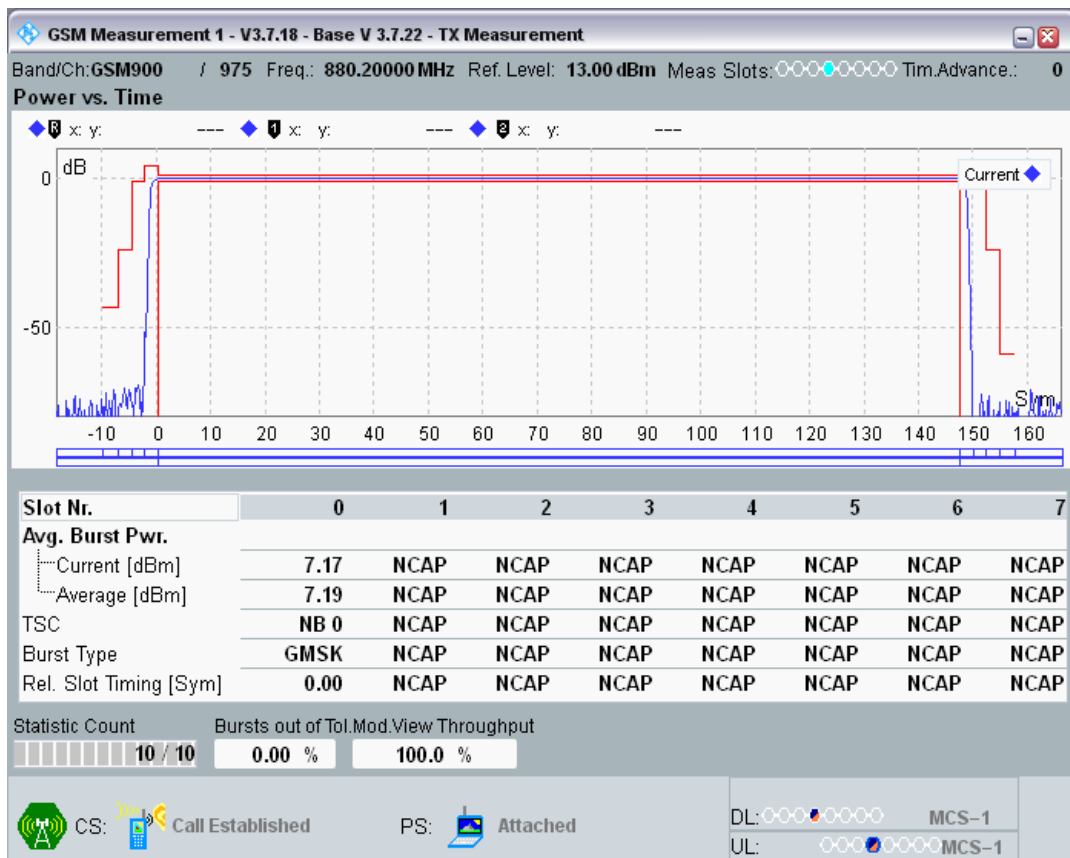


GSM900 Channel=975 PCL=19

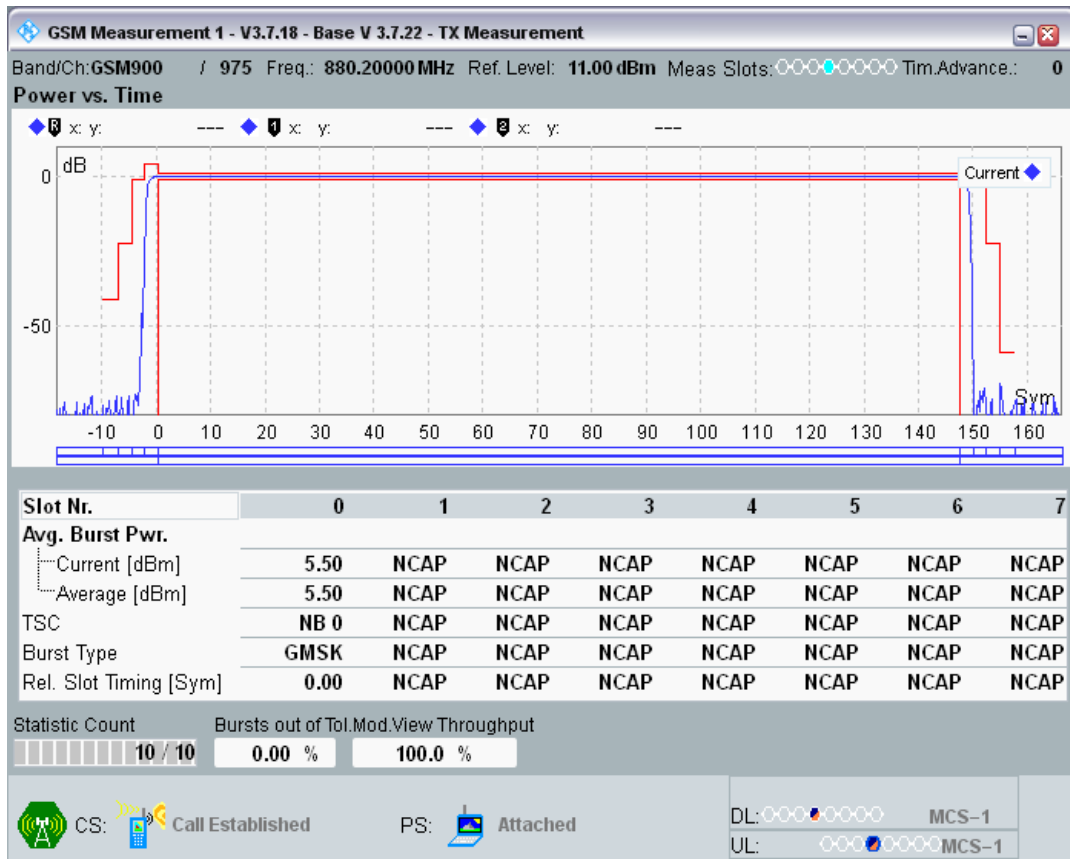


GSM900 Channel=38 PCL=5

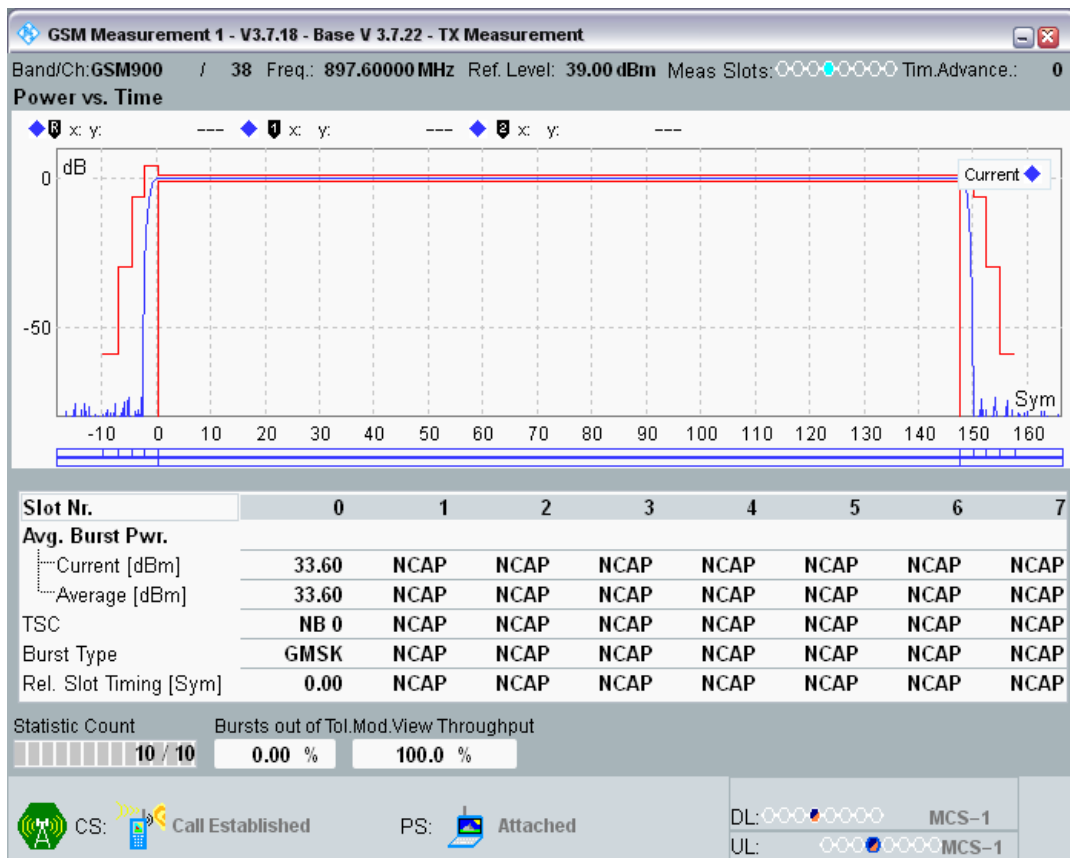


GSM900 Channel=38 PCL=6

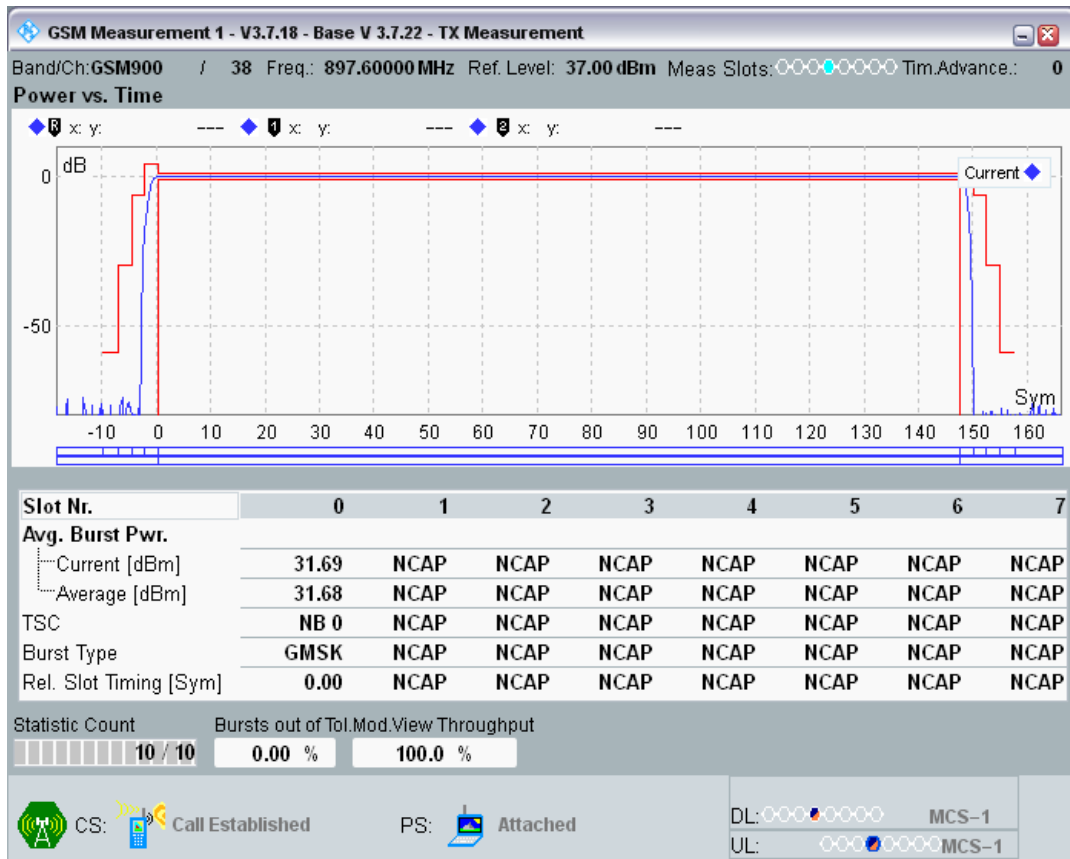


GSM900 Channel=38 PCL=7

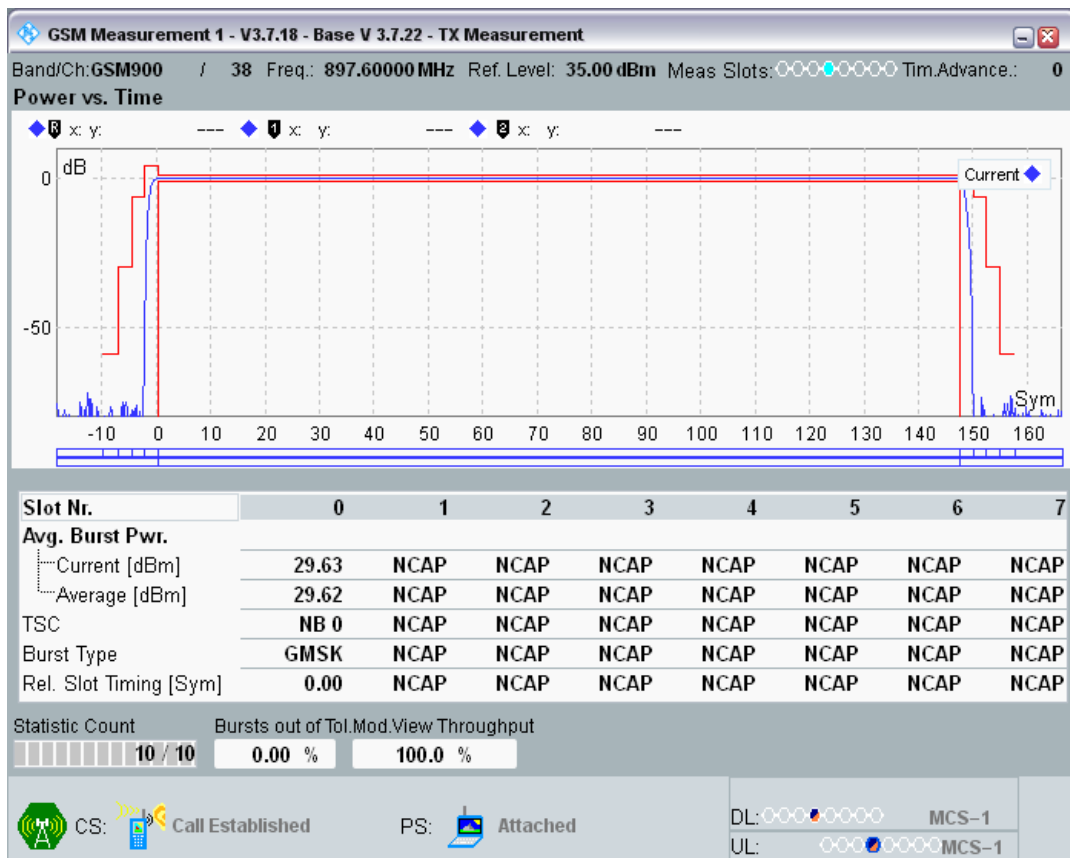


GSM900 Channel=38 PCL=8

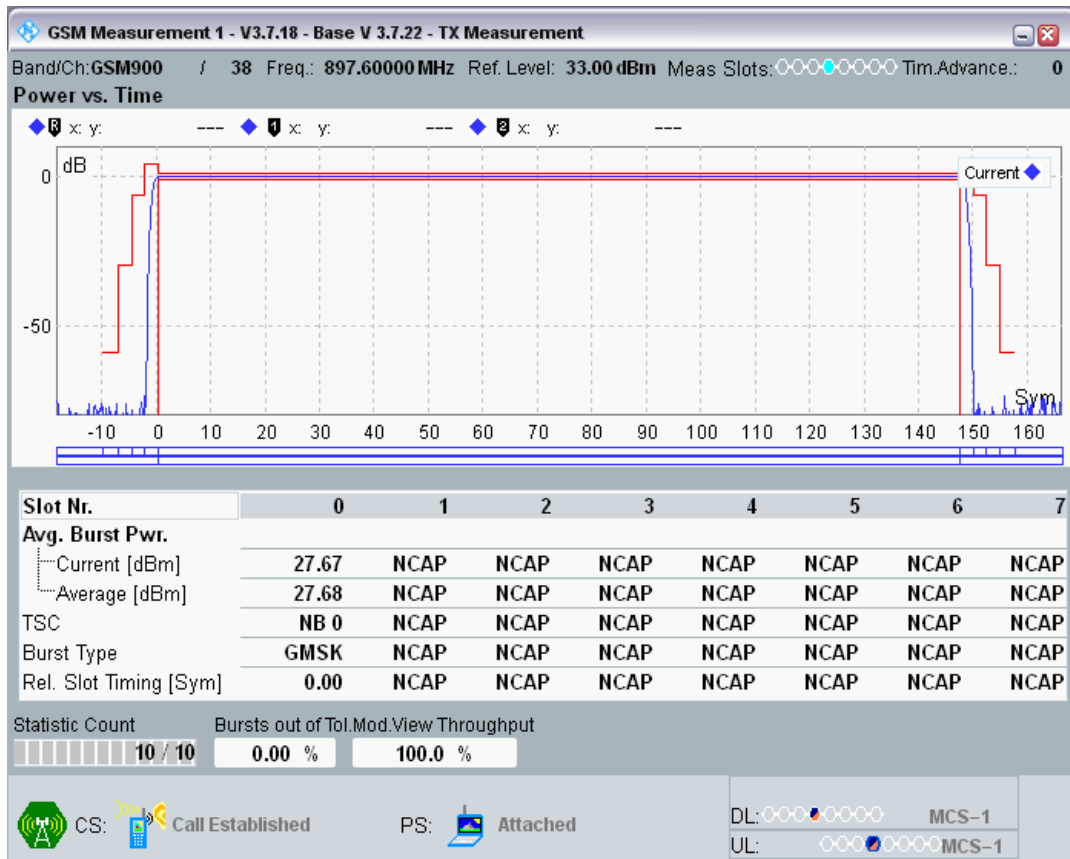


GSM900 Channel=38 PCL=9

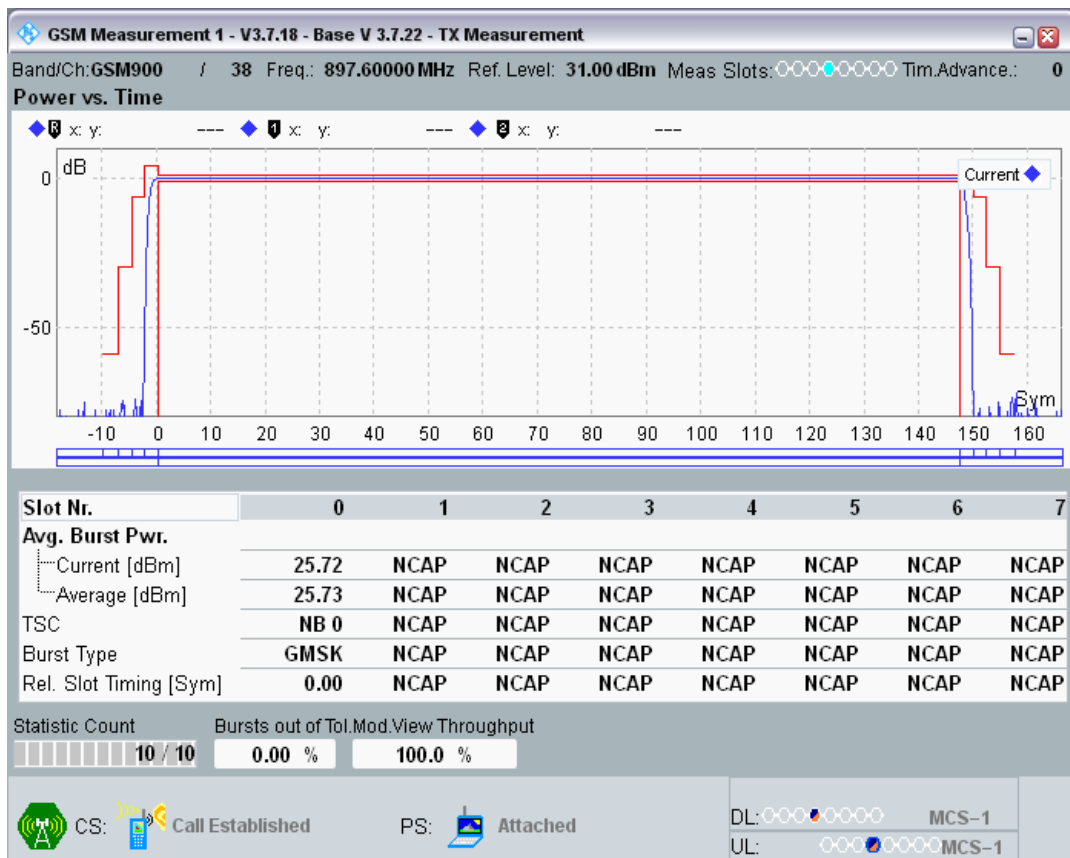

GSM900 Channel=38 PCL=10

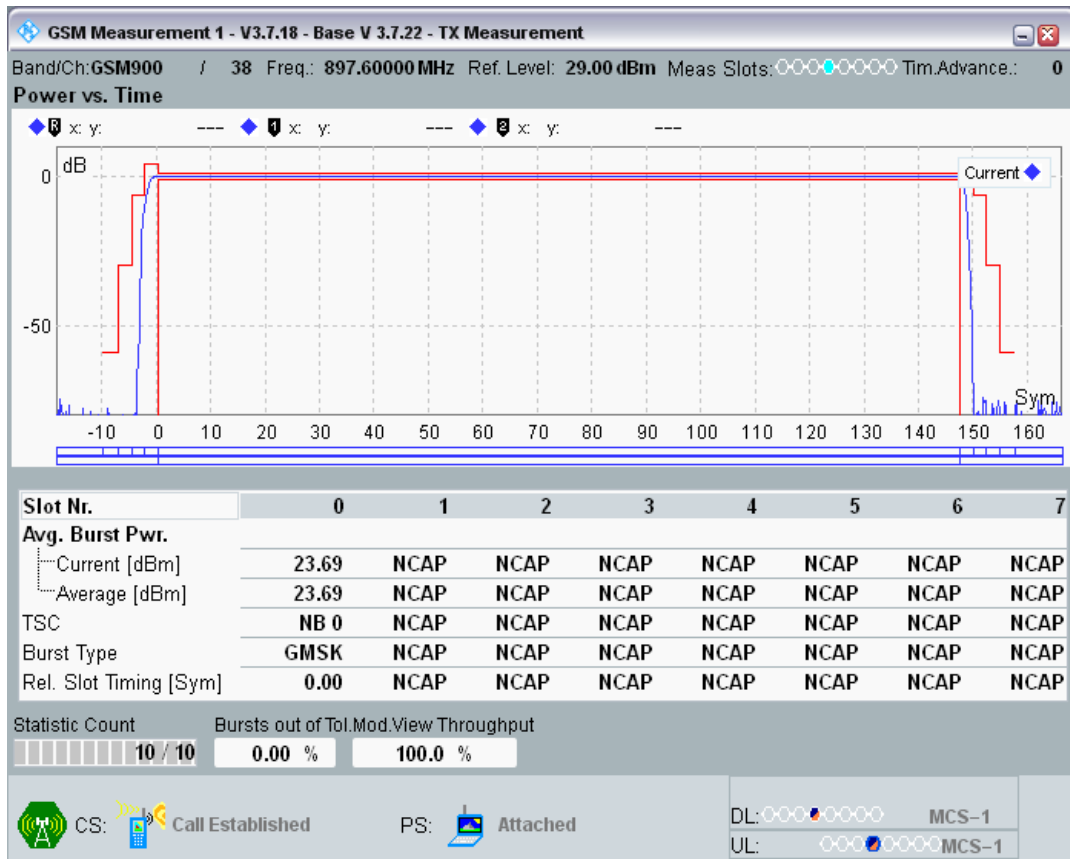


GSM900 Channel=38 PCL=11

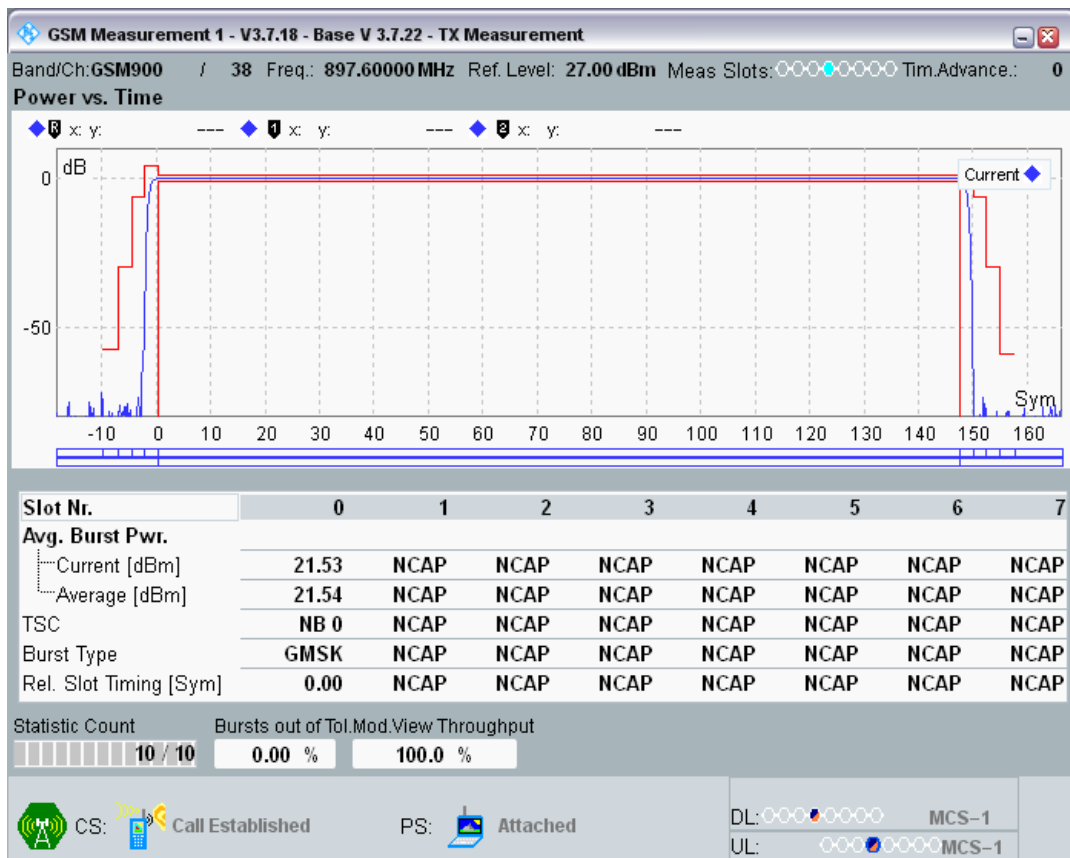


GSM900 Channel=38 PCL=12




GSM900 Channel=38 PCL=13

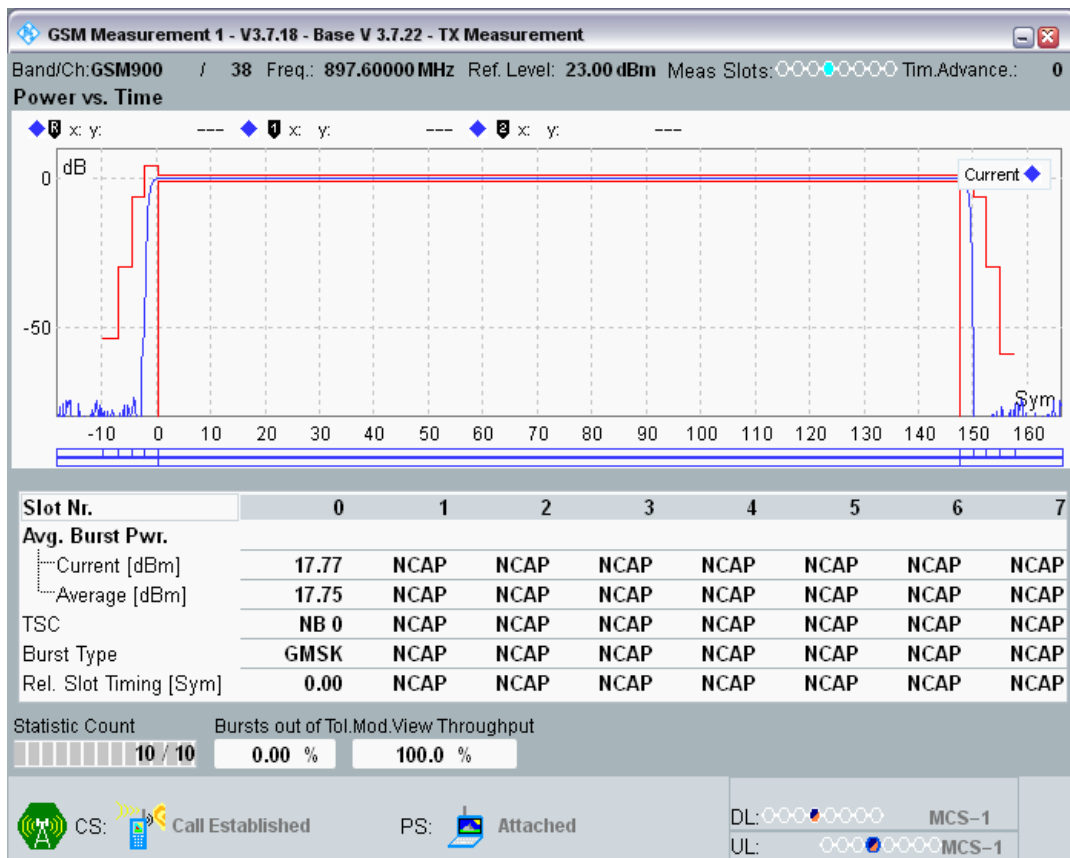


GSM900 Channel=38 PCL=14

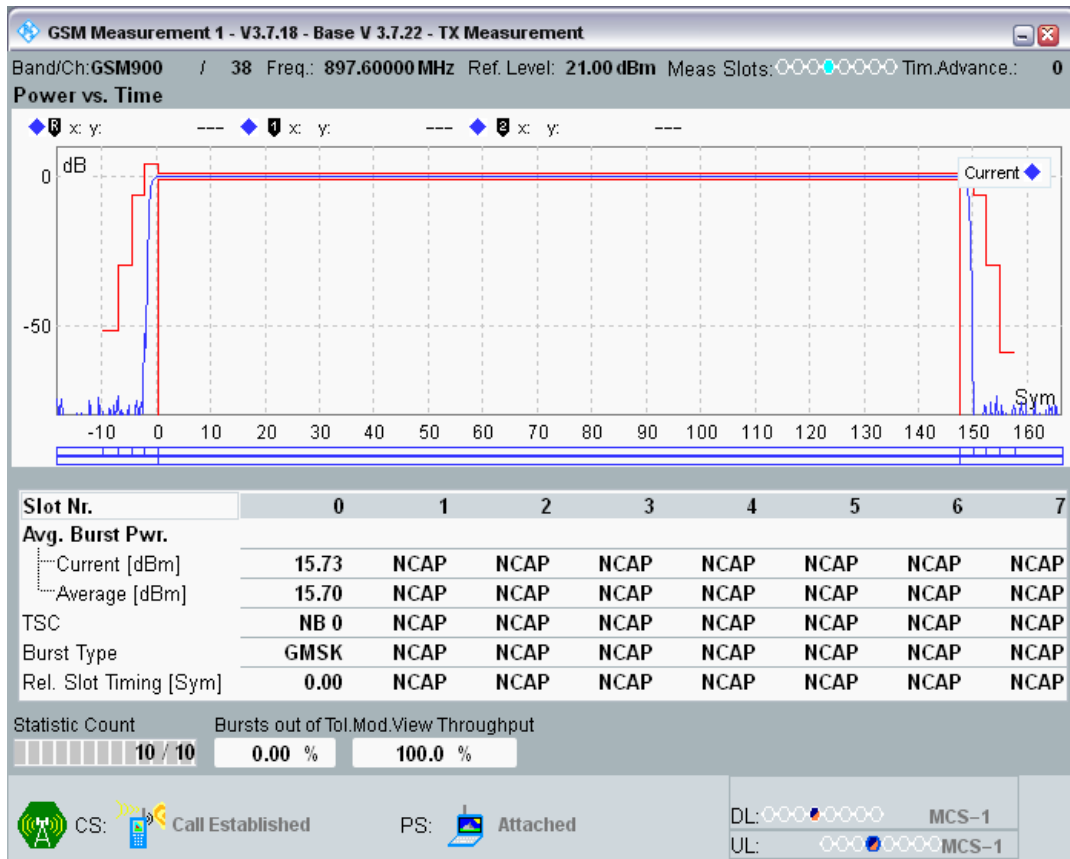


GSM900 Channel=38 PCL=16

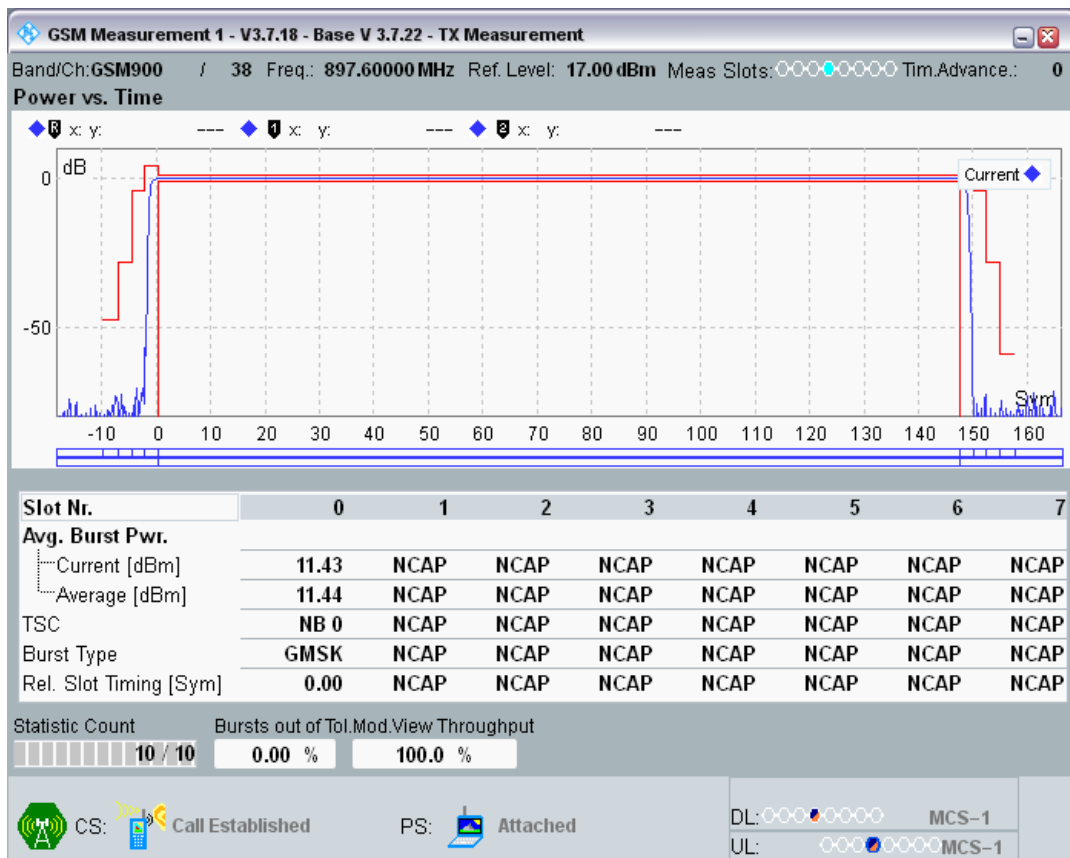


GSM900 Channel=38 PCL=15

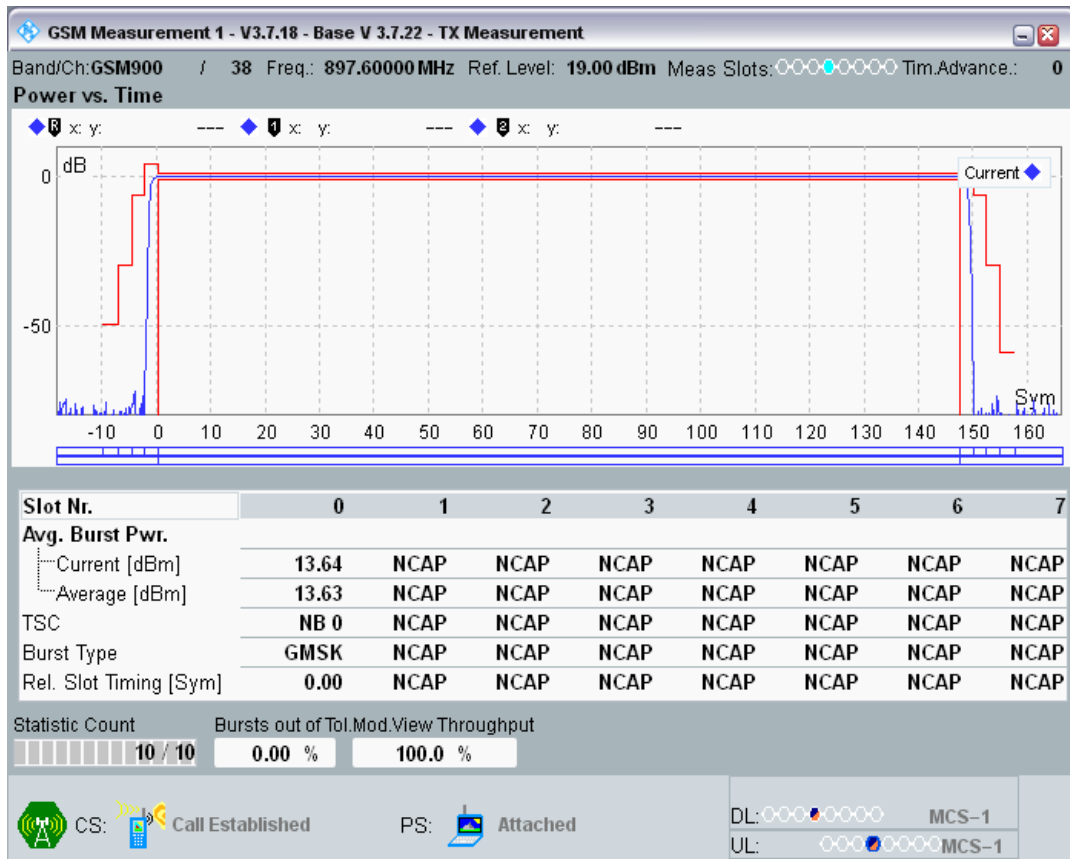


GSM900 Channel=38 PCL=17

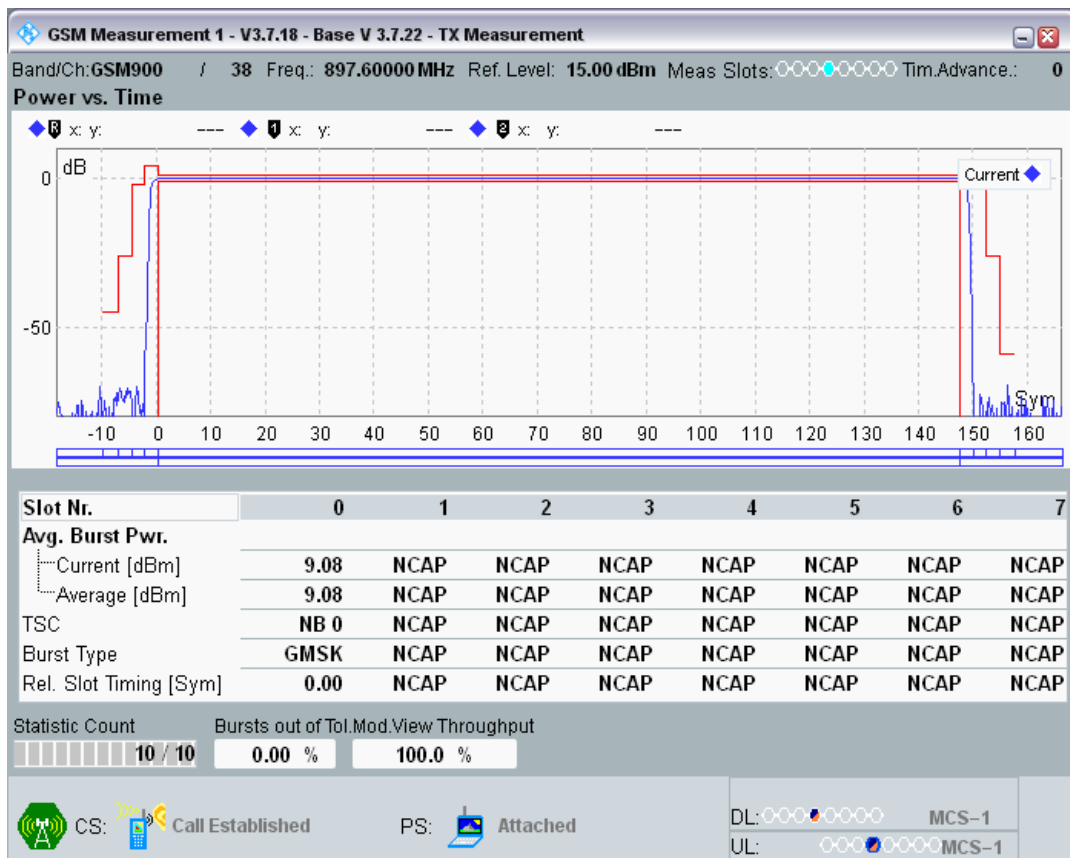


GSM900 Channel=38 PCL=18

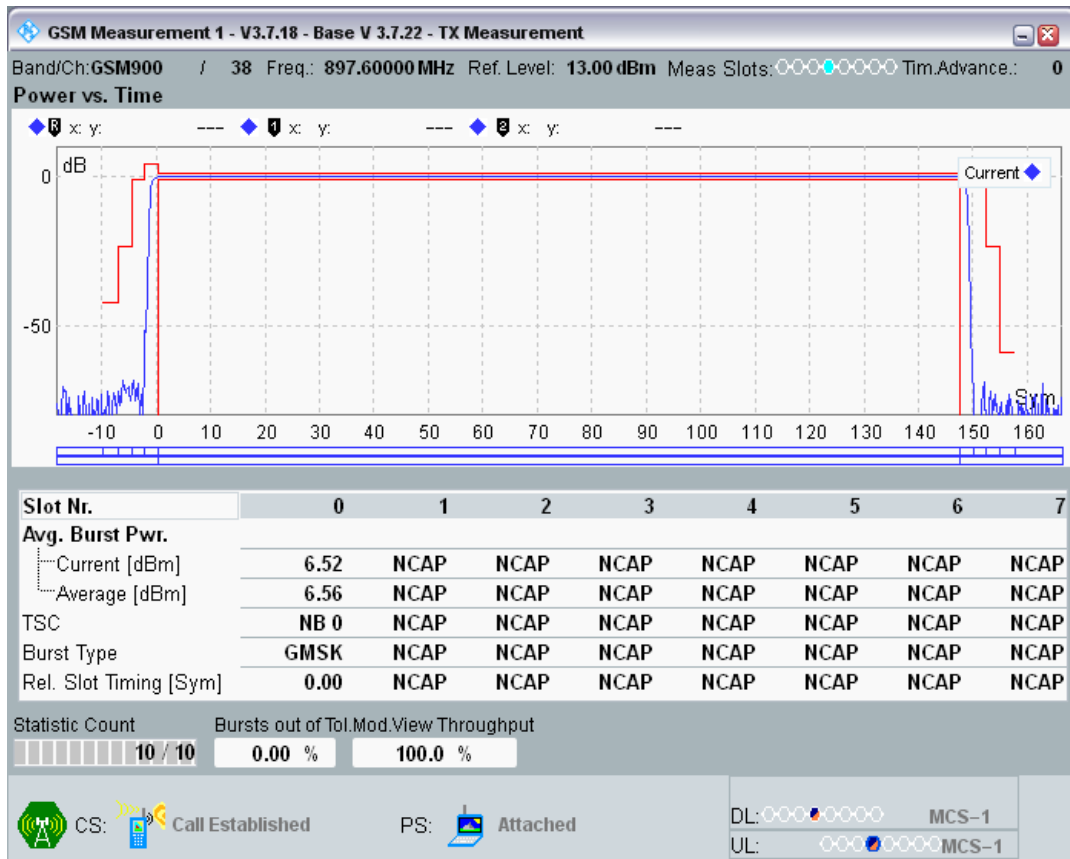


GSM900 Channel=38 PCL=19

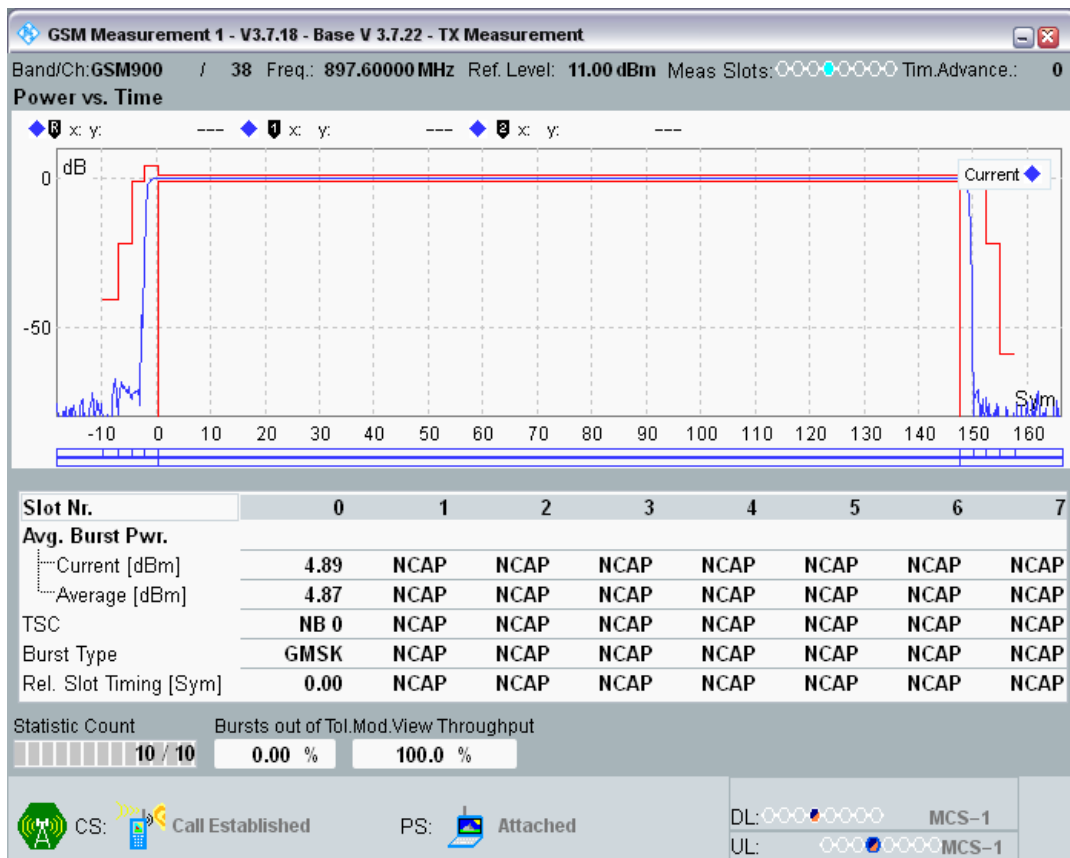


GSM900 Channel=124 PCL=5

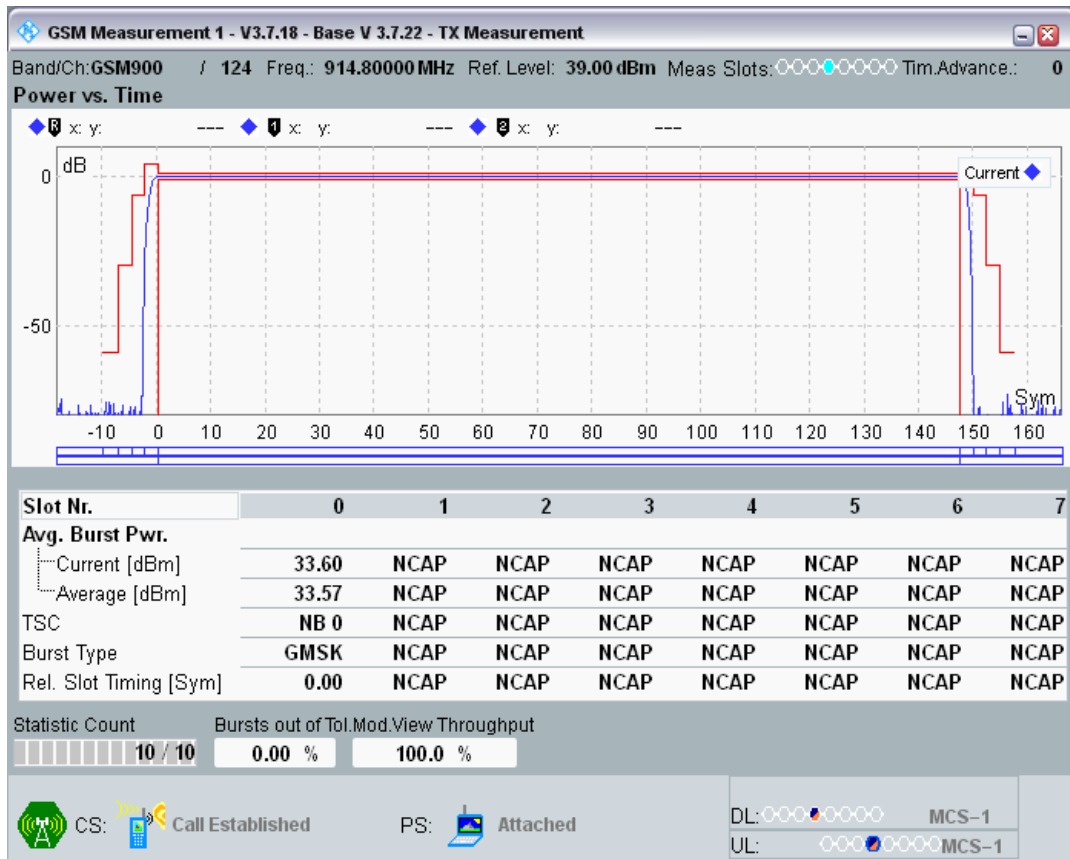


GSM900 Channel=124 PCL=6

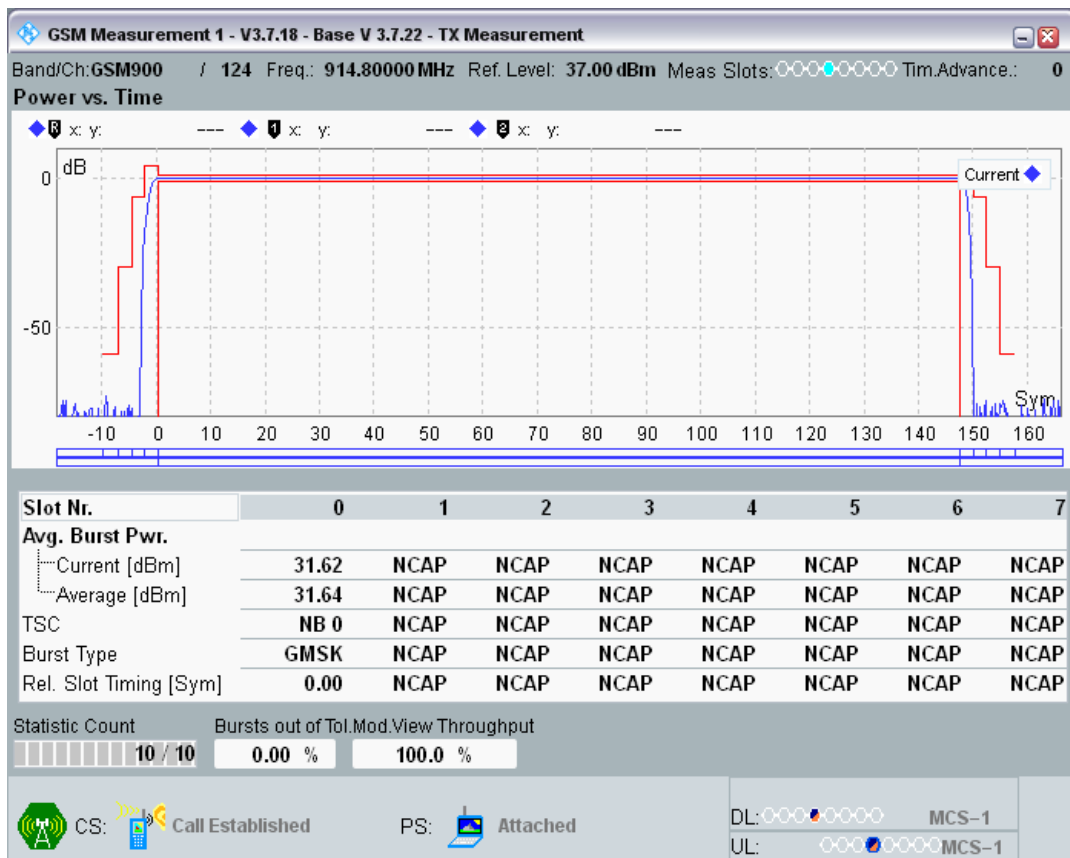


GSM900 Channel=124 PCL=7

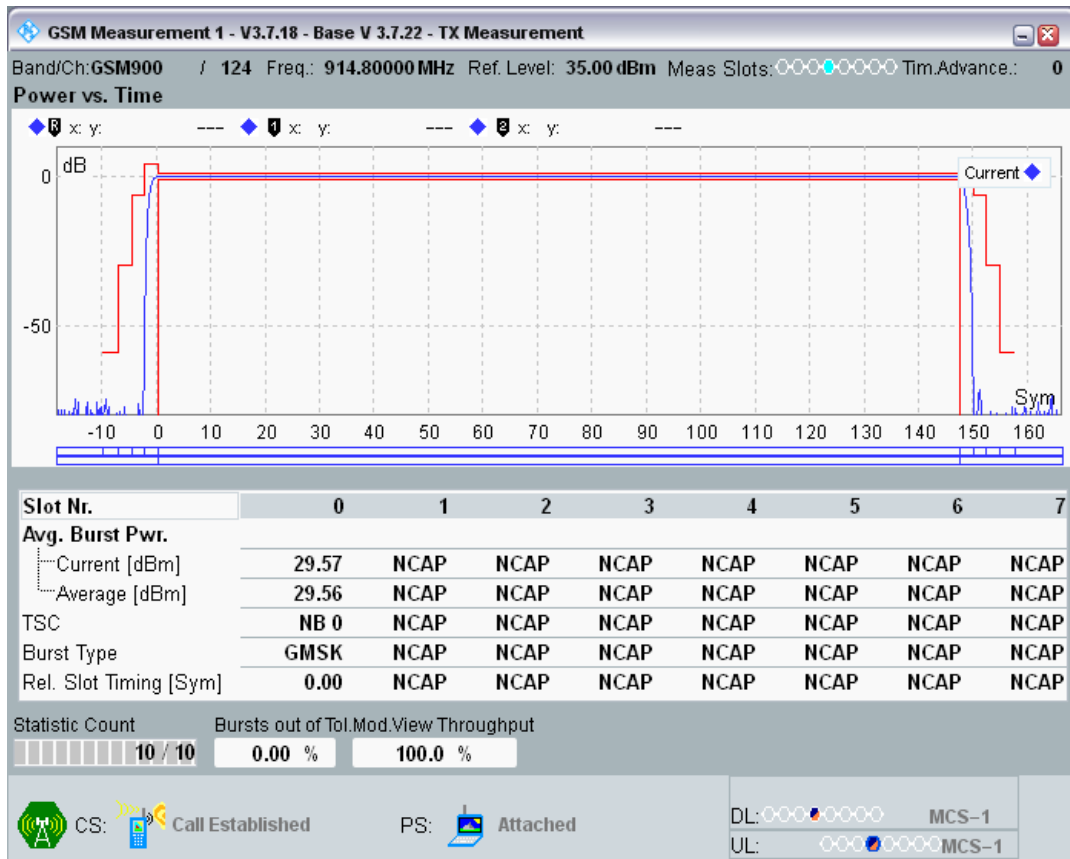


GSM900 Channel=124 PCL=8

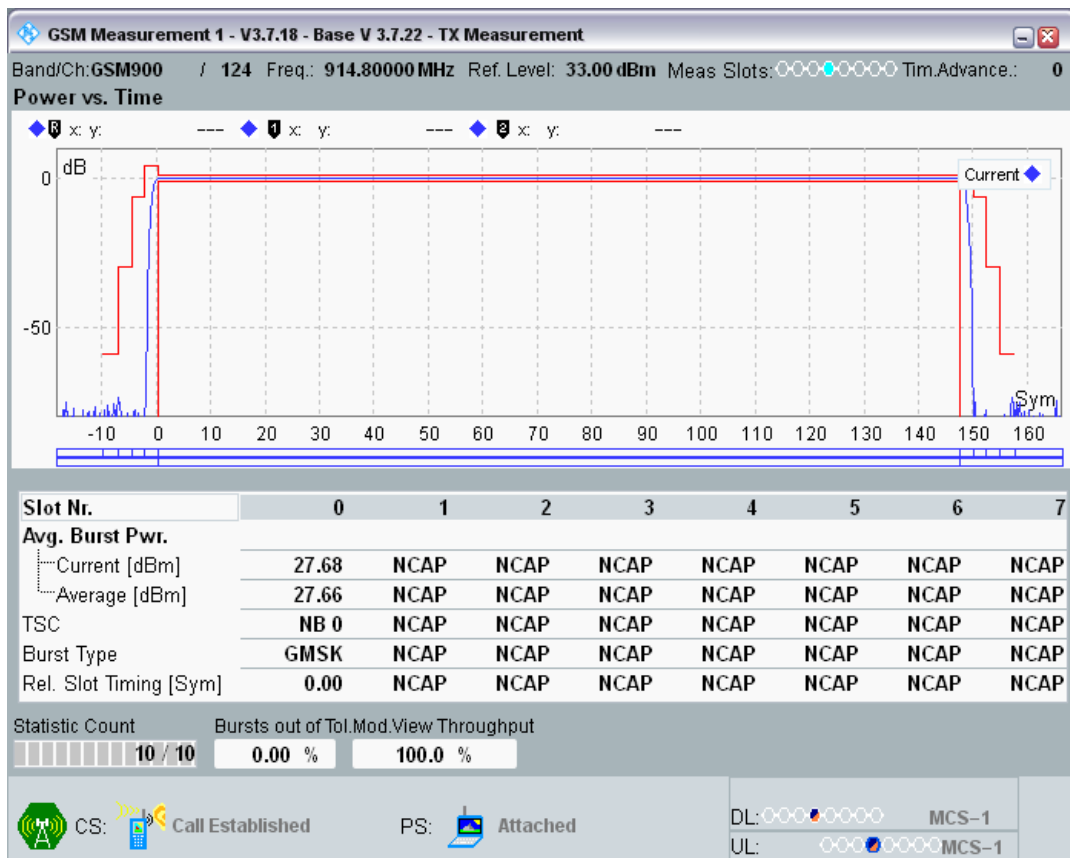


GSM900 Channel=124 PCL=9

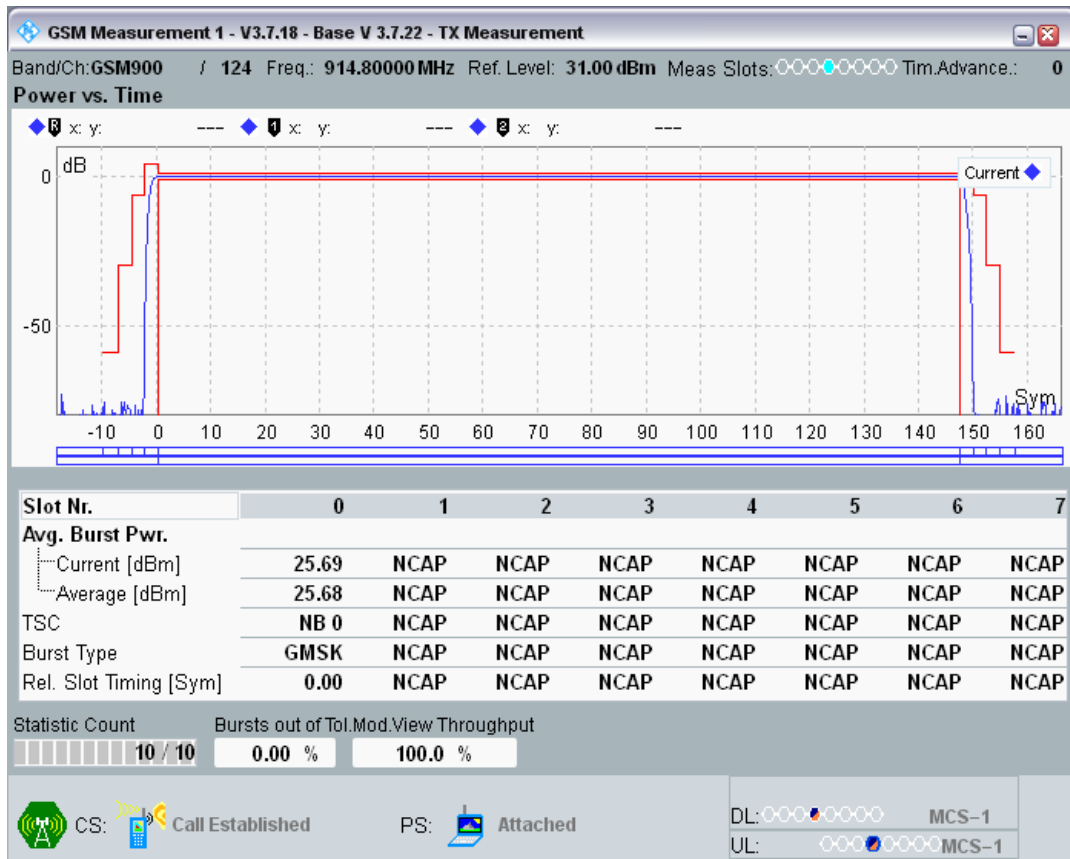


GSM900 Channel=124 PCL=10

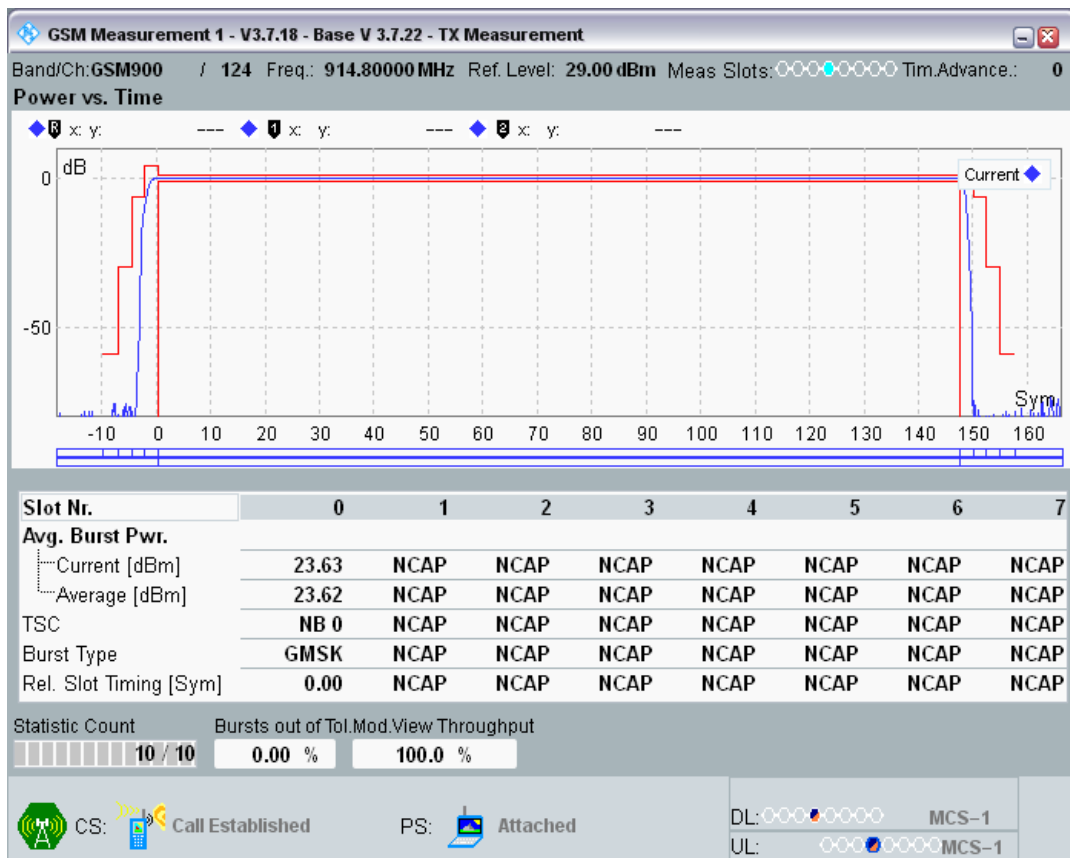


GSM900 Channel=124 PCL=11

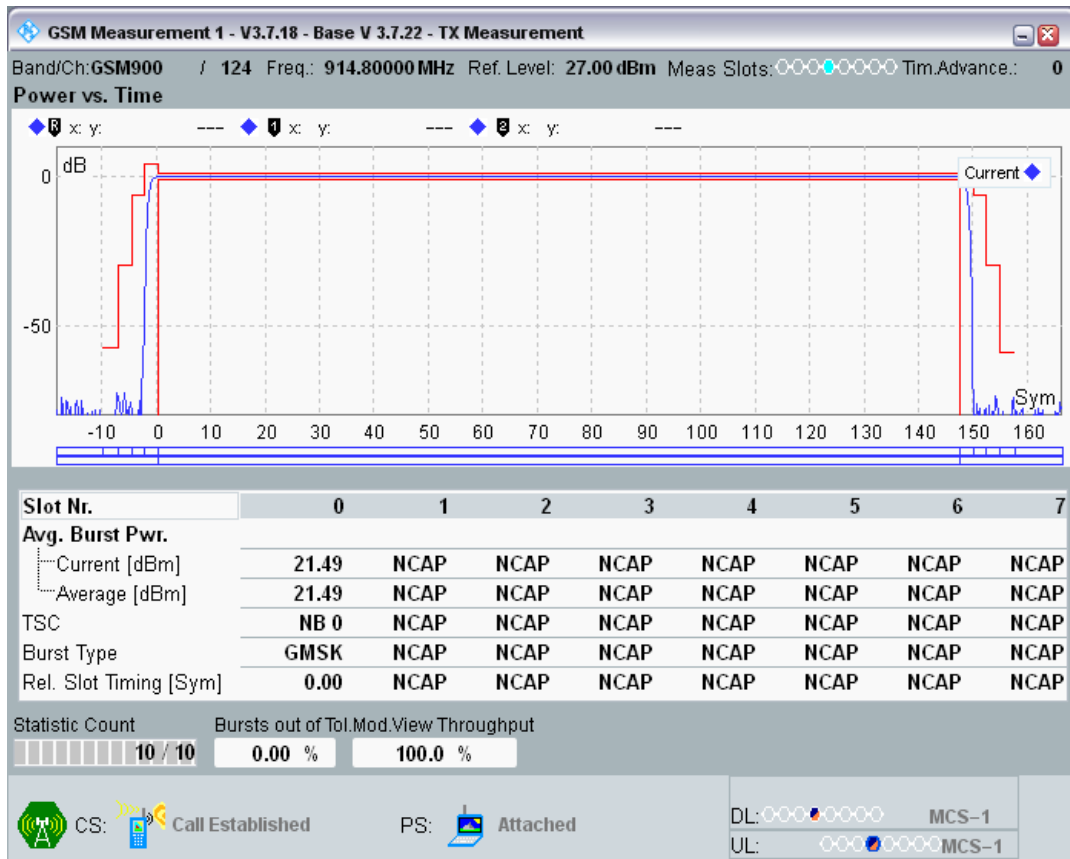


GSM900 Channel=124 PCL=12

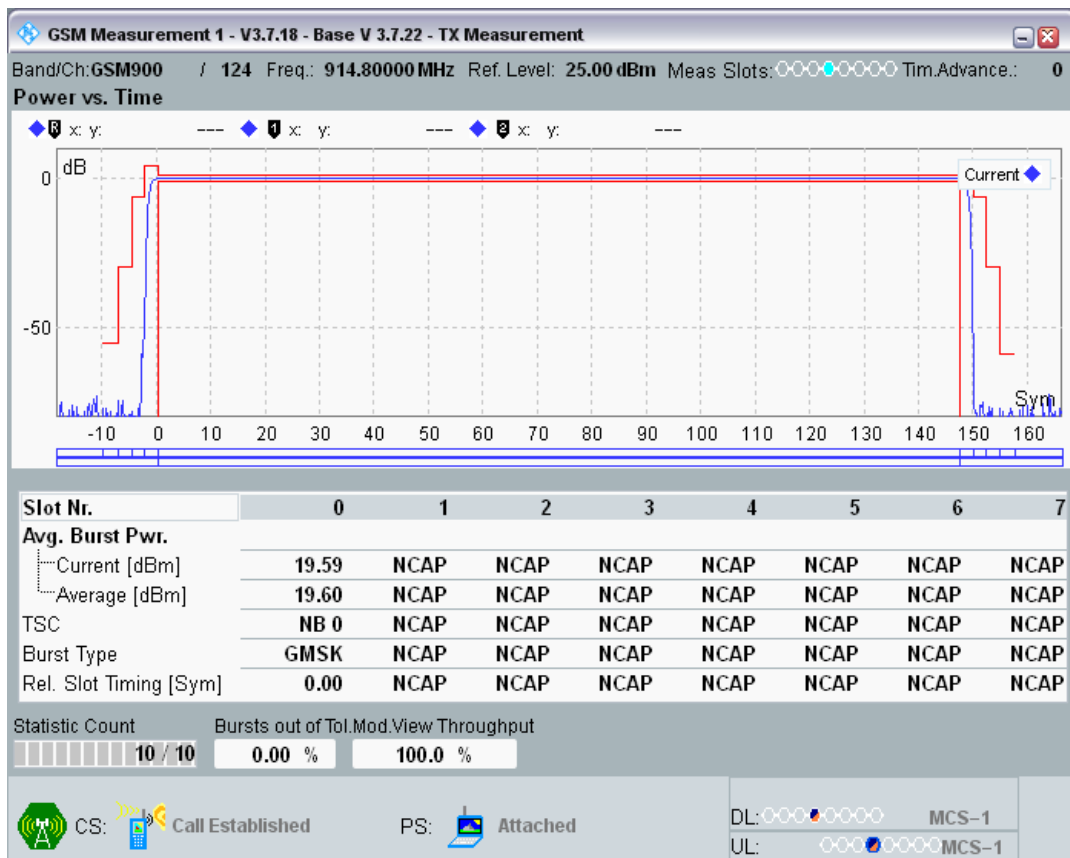


GSM900 Channel=124 PCL=13

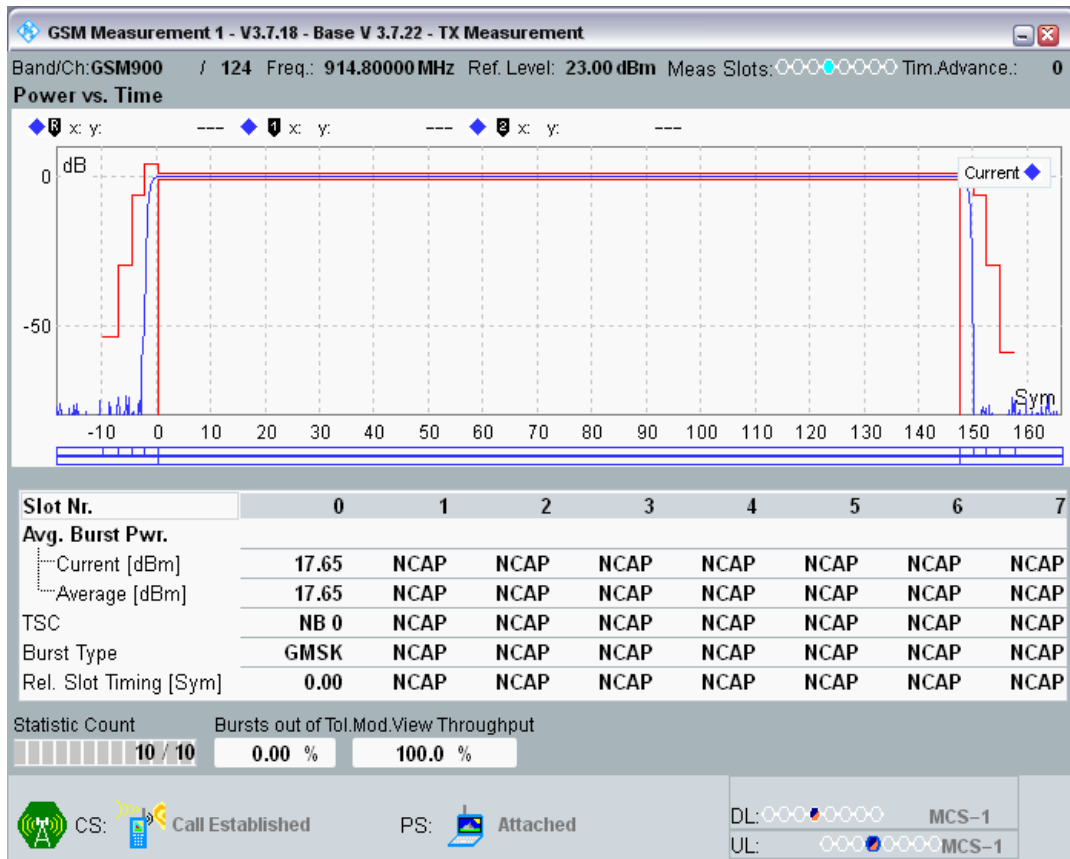


GSM900 Channel=124 PCL=14

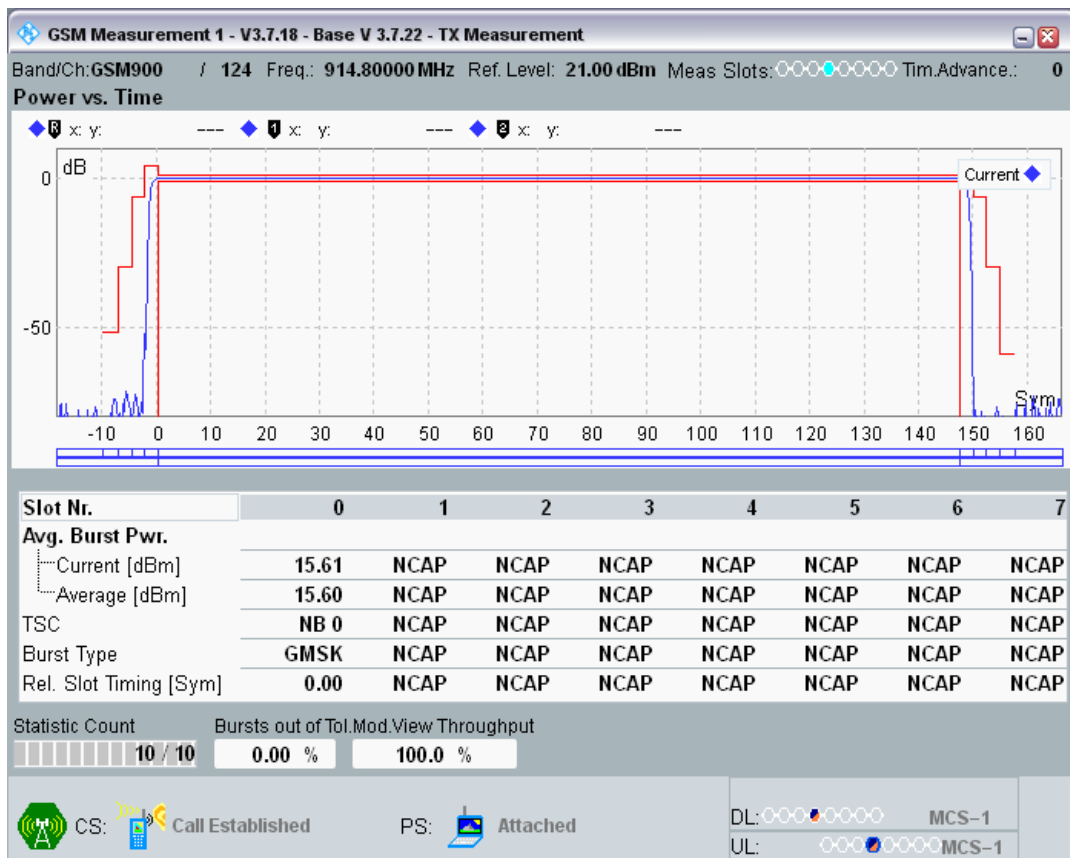


GSM900 Channel=124 PCL=15

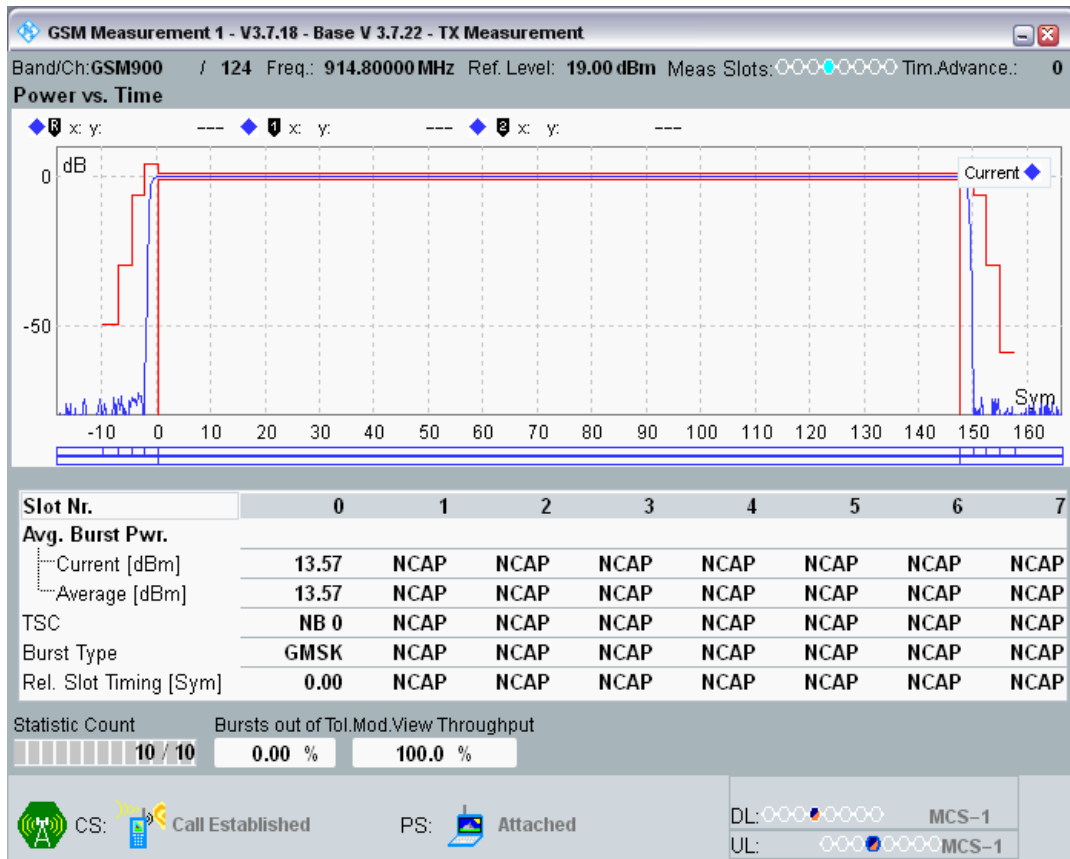


GSM900 Channel=124 PCL=16

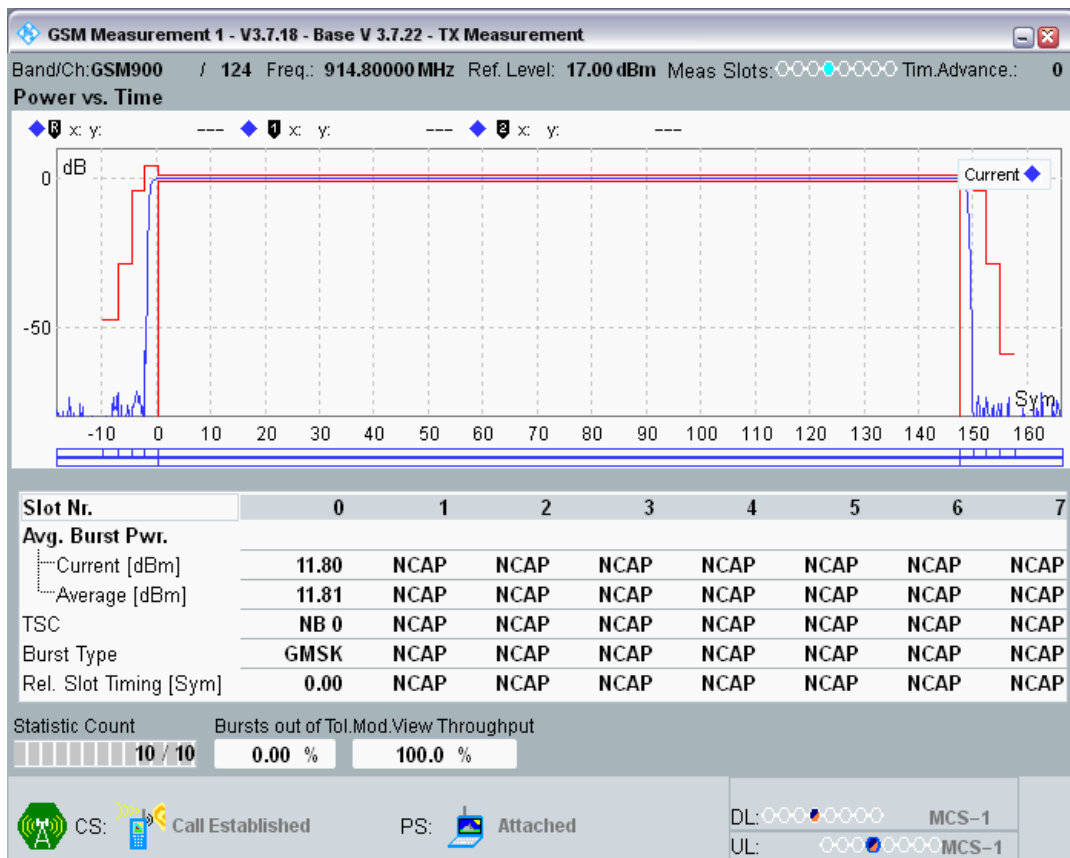


GSM900 Channel=124 PCL=17

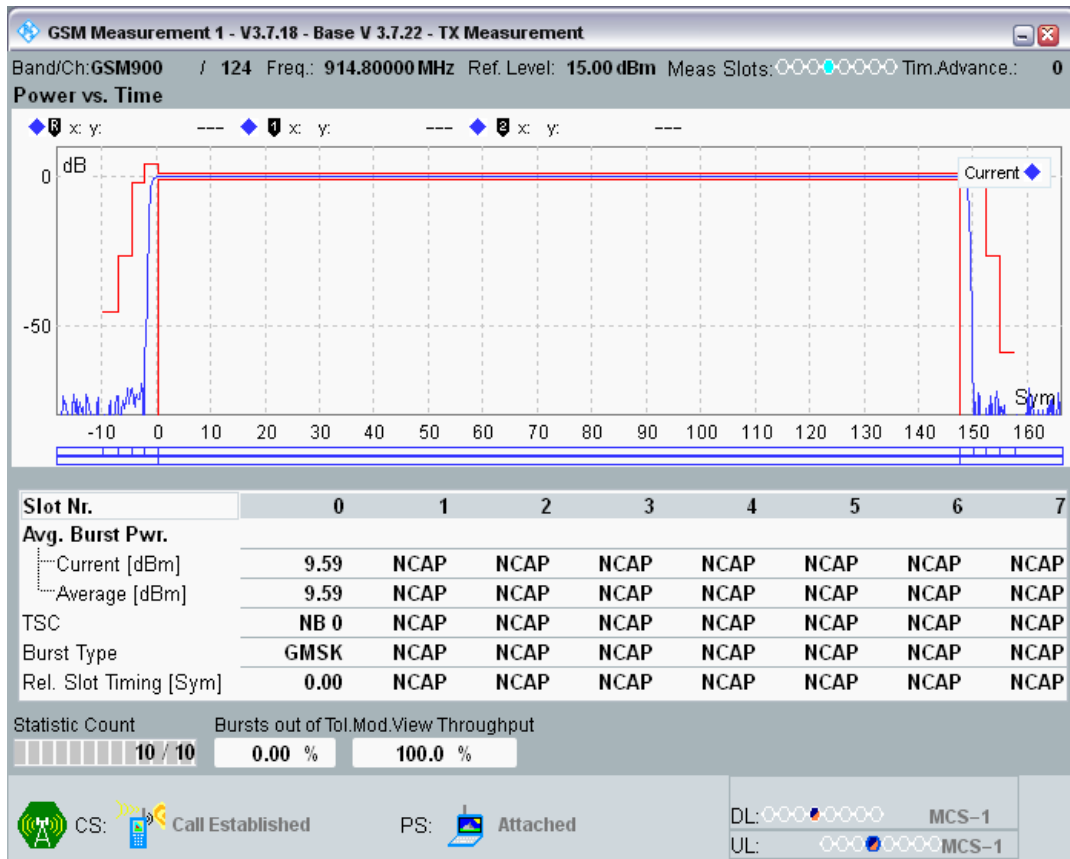

GSM900 Channel=124 PCL=18

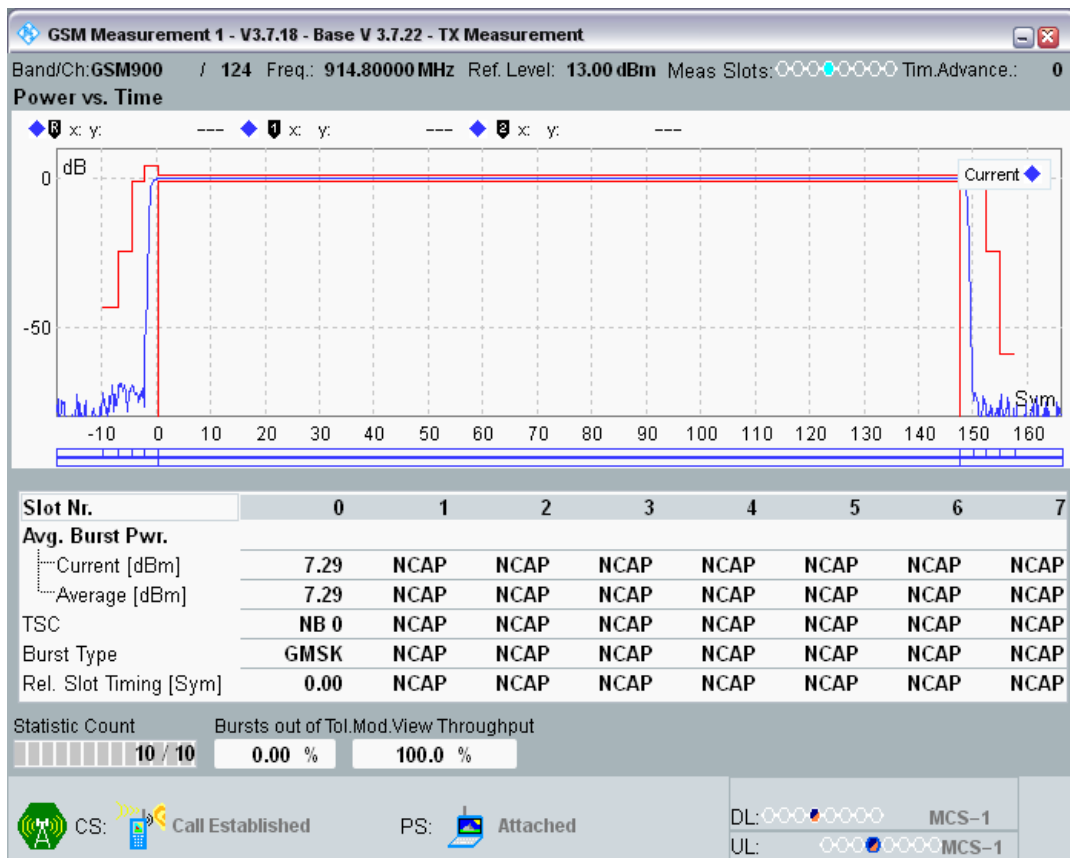

GSM900 Channel=124 PCL=19

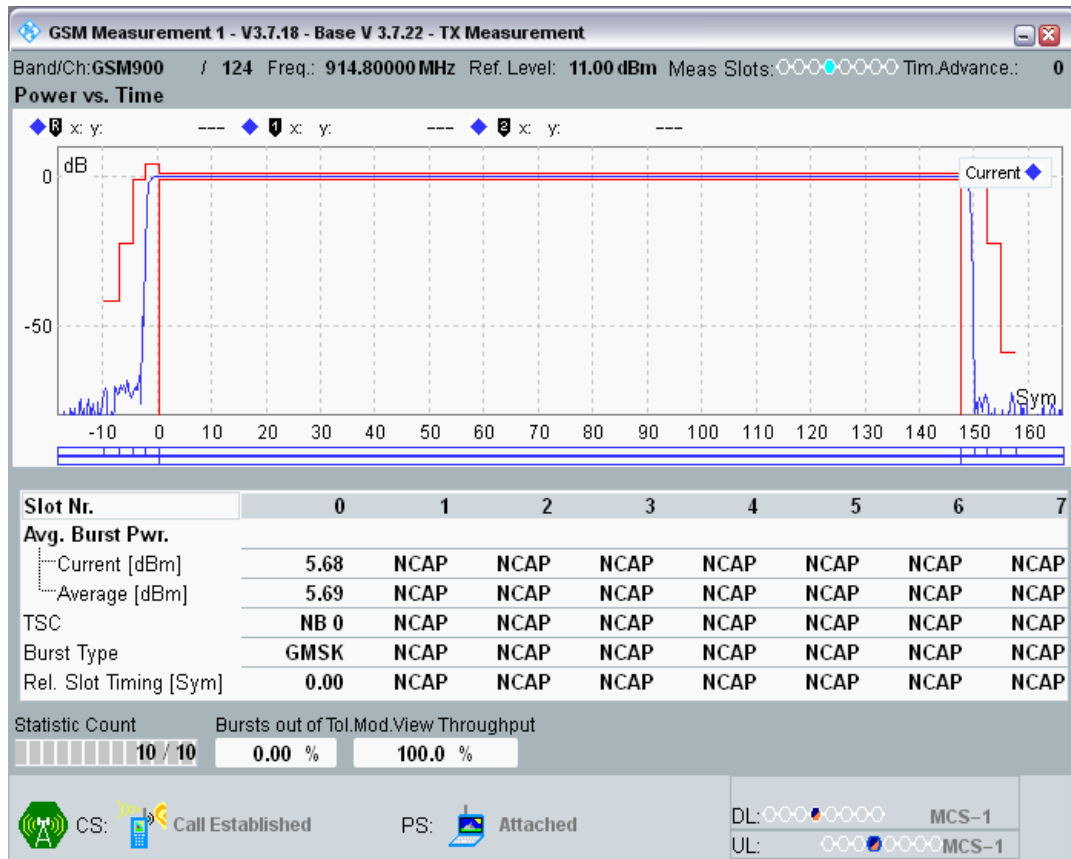

Clause 4.2.6 Transmitter-Modulation Spectrum

| Band | Channel | Frequency (MHz) | PCL | Offset (kHz) | Relative Result (dB) | Relative Limit (dB) | Absolute Result (dBm) | Absolute Limit (dBm) | Verdict |
|---------|---------|-----------------|-----|--------------|----------------------|---------------------|-----------------------|----------------------|---------|
| GSM1800 | 512 | 1710.2 | 0 | -1800 | -80.68 | -60 | -57.36 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -1600 | -80.37 | -60 | -57.04 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -1400 | -79.14 | -60 | -55.82 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -1200 | -78.68 | -60 | -55.36 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -1000 | -77.94 | -60 | -54.62 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -800 | -75.74 | -60 | -52.42 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -600 | -73.28 | -60 | -49.96 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -400 | -67.30 | -60 | -43.97 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -250 | -41.82 | -33 | -18.49 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -200 | -37.53 | -30 | -14.20 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -100 | -9.79 | 0.5 | 13.53 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | -9.84 | 0.5 | 13.49 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 200 | -37.69 | -30 | -14.37 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 250 | -40.99 | -33 | -17.67 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 400 | -67.56 | -60 | -44.23 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 600 | -72.60 | -60 | -49.28 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 800 | -75.28 | -60 | -51.95 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 1000 | -76.83 | -60 | -53.50 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 1200 | -78.75 | -60 | -55.42 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 1400 | -79.77 | -60 | -56.45 | -55 | PASS |

| | | | | | | | | | |
|---------|-----|--------|----|-------|--------|-----|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 1600 | -80.48 | -60 | -57.16 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 1800 | -80.32 | -60 | -56.99 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1800 | -73.36 | -60 | -79.42 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1600 | -72.88 | -60 | -78.94 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1400 | -72.97 | -60 | -79.03 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1200 | -71.29 | -60 | -77.35 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1000 | -70.37 | -60 | -76.43 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -800 | -68.95 | -60 | -75.01 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -600 | -67.32 | -60 | -73.38 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -400 | -63.90 | -60 | -69.96 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -250 | -40.97 | -33 | -47.03 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -200 | -36.46 | -30 | -42.52 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -100 | -7.85 | 0.5 | -13.91 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 100 | -8.52 | 0.5 | -14.58 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 200 | -35.99 | -30 | -42.05 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 250 | -41.40 | -33 | -47.46 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 400 | -64.45 | -60 | -70.52 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 600 | -66.41 | -60 | -72.48 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 800 | -68.91 | -60 | -74.98 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1000 | -70.86 | -60 | -76.92 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1200 | -71.73 | -60 | -77.79 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1400 | -72.38 | -60 | -78.44 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1600 | -73.10 | -60 | -79.16 | -55 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1800 | -74.23 | -60 | -80.29 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1800 | -80.66 | -60 | -57.16 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1600 | -80.39 | -60 | -56.90 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1400 | -79.14 | -60 | -55.64 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1200 | -78.61 | -60 | -55.11 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1000 | -76.79 | -60 | -53.30 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -800 | -75.45 | -60 | -51.95 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -600 | -72.92 | -60 | -49.42 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -400 | -67.54 | -60 | -44.04 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -250 | -40.55 | -33 | -17.05 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -200 | -36.85 | -30 | -13.35 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -100 | -8.94 | 0.5 | 14.56 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | -9.16 | 0.5 | 14.33 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 200 | -37.05 | -30 | -13.56 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 250 | -40.66 | -33 | -17.16 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 400 | -67.75 | -60 | -44.25 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 600 | -73.38 | -60 | -49.89 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 800 | -75.05 | -60 | -51.55 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1000 | -76.75 | -60 | -53.25 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1200 | -78.09 | -60 | -54.59 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1400 | -78.59 | -60 | -55.10 | -55 | PASS |

| | | | | | | | | | |
|---------|-----|--------|----|-------|--------|-----|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 1600 | -80.25 | -60 | -56.75 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1800 | -81.15 | -60 | -57.65 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1800 | -74.71 | -60 | -79.72 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1600 | -73.18 | -60 | -78.18 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1400 | -72.73 | -60 | -77.73 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1200 | -71.32 | -60 | -76.32 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1000 | -70.92 | -60 | -75.92 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -800 | -69.43 | -60 | -74.43 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -600 | -67.85 | -60 | -72.85 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -400 | -63.58 | -60 | -68.58 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -250 | -42.00 | -33 | -47.00 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -200 | -36.81 | -30 | -41.81 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -100 | -8.94 | 0.5 | -13.94 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 100 | -8.33 | 0.5 | -13.33 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 200 | -36.78 | -30 | -41.78 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 250 | -41.81 | -33 | -46.81 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 400 | -64.54 | -60 | -69.54 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 600 | -68.13 | -60 | -73.13 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 800 | -69.75 | -60 | -74.75 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1000 | -70.84 | -60 | -75.84 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1200 | -72.41 | -60 | -77.41 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1400 | -72.88 | -60 | -77.88 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1600 | -73.72 | -60 | -78.72 | -55 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1800 | -74.49 | -60 | -79.49 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1800 | -81.24 | -60 | -57.36 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1600 | -81.15 | -60 | -57.27 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1400 | -77.88 | -60 | -54.01 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1200 | -79.15 | -60 | -55.27 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1000 | -76.75 | -60 | -52.88 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -800 | -74.80 | -60 | -50.92 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -600 | -72.49 | -60 | -48.61 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -400 | -67.10 | -60 | -43.22 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -250 | -40.80 | -33 | -16.92 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -200 | -36.51 | -30 | -12.63 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -100 | -9.26 | 0.5 | 14.61 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | -8.74 | 0.5 | 15.14 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 200 | -36.41 | -30 | -12.53 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 250 | -41.26 | -33 | -17.38 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 400 | -67.13 | -60 | -43.25 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 600 | -73.19 | -60 | -49.32 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 800 | -74.34 | -60 | -50.46 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 1000 | -77.34 | -60 | -53.46 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 1200 | -78.05 | -60 | -54.17 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 1400 | -79.03 | -60 | -55.15 | -55 | PASS |


| | | | | | | | | | |
|---------|-----|--------|----|-------|--------|-----|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 1600 | -80.23 | -60 | -56.35 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 1800 | -80.97 | -60 | -57.09 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1800 | -74.95 | -60 | -79.06 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1600 | -73.79 | -60 | -77.90 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1400 | -73.43 | -60 | -77.54 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1200 | -72.89 | -60 | -77.01 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1000 | -71.84 | -60 | -75.95 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -800 | -70.13 | -60 | -74.25 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -600 | -68.55 | -60 | -72.67 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -400 | -65.57 | -60 | -69.68 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -250 | -41.00 | -33 | -45.11 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -200 | -37.28 | -30 | -41.40 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -100 | -9.91 | 0.5 | -14.02 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 100 | -9.69 | 0.5 | -13.81 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 200 | -36.86 | -30 | -40.98 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 250 | -41.57 | -33 | -45.68 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 400 | -65.39 | -60 | -69.51 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 600 | -68.47 | -60 | -72.58 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 800 | -70.87 | -60 | -74.99 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1000 | -70.90 | -60 | -75.02 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1200 | -73.03 | -60 | -77.14 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1400 | -73.13 | -60 | -77.24 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1600 | -74.54 | -60 | -78.66 | -55 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1800 | -75.11 | -60 | -79.23 | -55 | PASS |
| GSM900 | 975 | 880.2 | 5 | -1800 | -82.23 | -60 | -55.98 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -1600 | -81.55 | -60 | -55.30 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -1400 | -80.26 | -60 | -54.01 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -1200 | -80.34 | -60 | -54.10 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -1000 | -79.16 | -60 | -52.91 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -800 | -78.00 | -60 | -51.76 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -600 | -75.88 | -60 | -49.63 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | -400 | -70.51 | -60 | -44.26 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | -250 | -41.14 | -33 | -14.90 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | -200 | -37.09 | -30 | -10.84 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | -100 | -8.62 | 0.5 | 17.63 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | -8.98 | 0.5 | 17.27 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | 200 | -37.18 | -30 | -10.93 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | 250 | -41.29 | -33 | -15.04 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | 400 | -70.59 | -60 | -44.34 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | 600 | -76.97 | -60 | -50.72 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | 800 | -77.72 | -60 | -51.47 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | 1000 | -78.96 | -60 | -52.71 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | 1200 | -80.46 | -60 | -54.21 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | 1400 | -81.11 | -60 | -54.86 | -51 | PASS |

| | | | | | | | | | |
|--------|-----|-------|----|-------|--------|-----|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 1600 | -81.89 | -60 | -55.64 | -51 | PASS |
| GSM900 | 975 | 880.2 | 5 | 1800 | -81.99 | -60 | -55.74 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -1800 | -74.99 | -60 | -77.24 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -1600 | -74.42 | -60 | -76.68 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -1400 | -73.96 | -60 | -76.22 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -1200 | -73.46 | -60 | -75.71 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -1000 | -71.99 | -60 | -74.24 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -800 | -71.34 | -60 | -73.60 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -600 | -68.20 | -60 | -70.45 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | -400 | -65.61 | -60 | -67.86 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | -250 | -41.61 | -33 | -43.87 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | -200 | -36.62 | -30 | -38.88 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | -100 | -9.04 | 0.5 | -11.29 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | 100 | -8.54 | 0.5 | -10.80 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | 200 | -37.24 | -30 | -39.49 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | 250 | -40.97 | -33 | -43.22 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | 400 | -65.37 | -60 | -67.62 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | 600 | -68.93 | -60 | -71.18 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | 800 | -70.48 | -60 | -72.74 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1000 | -72.00 | -60 | -74.26 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1200 | -73.99 | -60 | -76.25 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1400 | -74.14 | -60 | -76.39 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1600 | -75.98 | -60 | -78.23 | -51 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1800 | -75.26 | -60 | -77.51 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -1800 | -81.30 | -60 | -56.17 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -1600 | -81.06 | -60 | -55.93 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -1400 | -79.95 | -60 | -54.82 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -1200 | -79.50 | -60 | -54.37 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -1000 | -78.31 | -60 | -53.18 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -800 | -77.31 | -60 | -52.19 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -600 | -75.54 | -60 | -50.41 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | -400 | -70.07 | -60 | -44.95 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | -250 | -41.06 | -33 | -15.94 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | -200 | -35.67 | -30 | -10.54 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | -100 | -8.51 | 0.5 | 16.62 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | -7.50 | 0.5 | 17.63 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | 200 | -36.08 | -30 | -10.95 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | 250 | -40.88 | -33 | -15.75 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | 400 | -70.52 | -60 | -45.39 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | 600 | -75.38 | -60 | -50.25 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | 800 | -77.08 | -60 | -51.95 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1000 | -78.73 | -60 | -53.61 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1200 | -78.97 | -60 | -53.84 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1400 | -79.66 | -60 | -54.54 | -51 | PASS |


| | | | | | | | | | |
|--------|-----|-------|----|-------|--------|-----|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 1600 | -81.37 | -60 | -56.24 | -51 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1800 | -80.93 | -60 | -55.81 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -1800 | -75.52 | -60 | -78.51 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -1600 | -74.00 | -60 | -77.00 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -1400 | -73.75 | -60 | -76.75 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -1200 | -72.58 | -60 | -75.58 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -1000 | -70.89 | -60 | -73.89 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -800 | -70.36 | -60 | -73.36 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -600 | -68.71 | -60 | -71.71 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | -400 | -64.95 | -60 | -67.95 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | -250 | -41.17 | -33 | -44.16 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | -200 | -37.44 | -30 | -40.43 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | -100 | -8.09 | 0.5 | -11.08 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | 100 | -8.92 | 0.5 | -11.92 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | 200 | -37.12 | -30 | -40.12 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | 250 | -41.61 | -33 | -44.61 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | 400 | -64.99 | -60 | -67.98 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | 600 | -68.31 | -60 | -71.31 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | 800 | -70.99 | -60 | -73.98 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1000 | -71.96 | -60 | -74.96 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1200 | -72.92 | -60 | -75.92 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1400 | -73.34 | -60 | -76.34 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1600 | -75.17 | -60 | -78.16 | -51 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1800 | -76.27 | -60 | -79.26 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -1800 | -80.95 | -60 | -55.49 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -1600 | -81.33 | -60 | -55.88 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -1400 | -80.30 | -60 | -54.85 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -1200 | -80.13 | -60 | -54.67 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -1000 | -78.96 | -60 | -53.50 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -800 | -78.21 | -60 | -52.76 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -600 | -76.36 | -60 | -50.90 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | -400 | -71.30 | -60 | -45.84 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | -250 | -41.55 | -33 | -16.10 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | -200 | -36.66 | -30 | -11.21 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | -100 | -8.06 | 0.5 | 17.39 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | -9.07 | 0.5 | 16.38 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 200 | -36.40 | -30 | -10.95 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 250 | -42.01 | -33 | -16.56 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 400 | -71.19 | -60 | -45.73 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 600 | -76.54 | -60 | -51.09 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | 800 | -78.55 | -60 | -53.10 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1000 | -79.98 | -60 | -54.53 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1200 | -81.00 | -60 | -55.54 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1400 | -79.96 | -60 | -54.51 | -51 | PASS |

| | | | | | | | | | |
|--------|-----|-------|----|-------|--------|-----|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 1600 | -82.07 | -60 | -56.62 | -51 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1800 | -80.24 | -60 | -54.79 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -1800 | -74.99 | -60 | -77.04 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -1600 | -74.36 | -60 | -76.41 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -1400 | -73.21 | -60 | -75.26 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -1200 | -73.36 | -60 | -75.41 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -1000 | -71.97 | -60 | -74.02 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -800 | -71.55 | -60 | -73.60 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -600 | -69.43 | -60 | -71.49 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | -400 | -64.87 | -60 | -66.92 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | -250 | -40.73 | -33 | -42.78 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | -200 | -37.38 | -30 | -39.43 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | -100 | -8.91 | 0.5 | -10.96 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | 100 | -8.84 | 0.5 | -10.89 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | 200 | -36.68 | -30 | -38.73 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | 250 | -41.31 | -33 | -43.36 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | 400 | -66.41 | -60 | -68.46 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | 600 | -69.87 | -60 | -71.92 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | 800 | -71.47 | -60 | -73.52 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1000 | -71.60 | -60 | -73.65 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1200 | -73.94 | -60 | -75.99 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1400 | -74.20 | -60 | -76.26 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1600 | -75.13 | -60 | -77.18 | -51 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1800 | -75.92 | -60 | -77.97 | -51 | PASS |


GSM1800 Channel=512 PCL=0

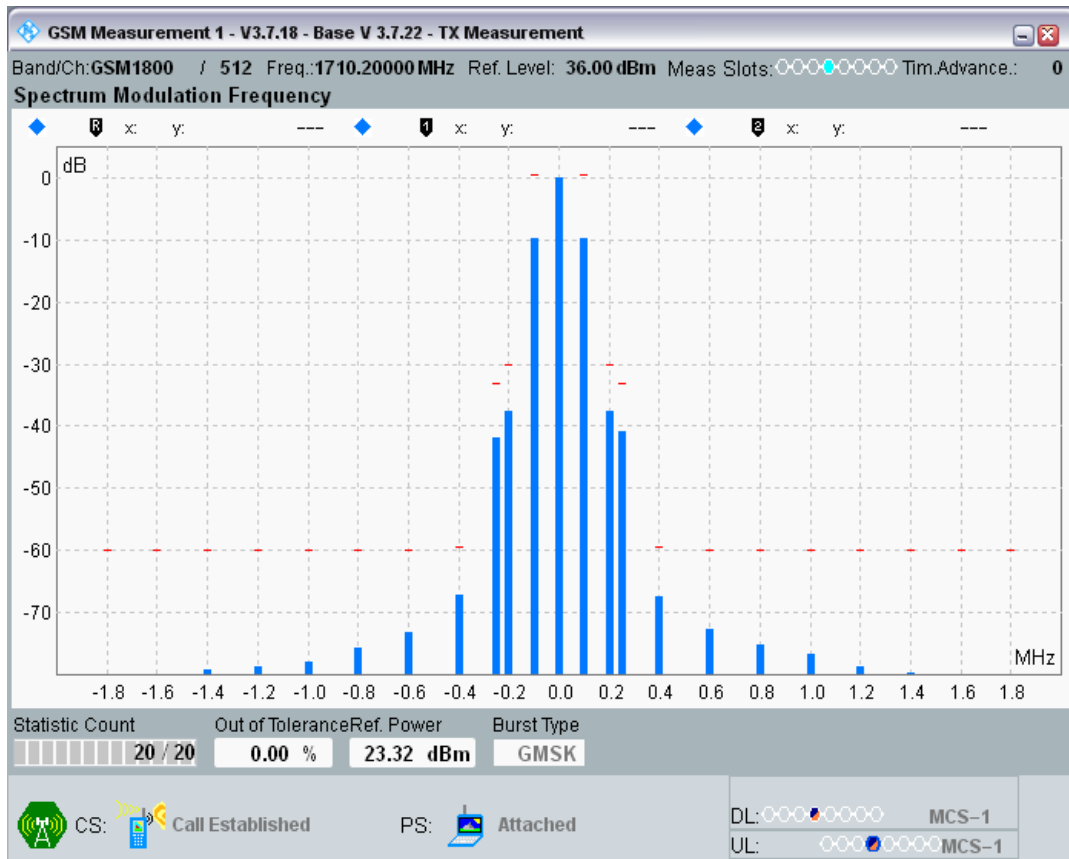


GSM1800 Channel=512 PCL=15

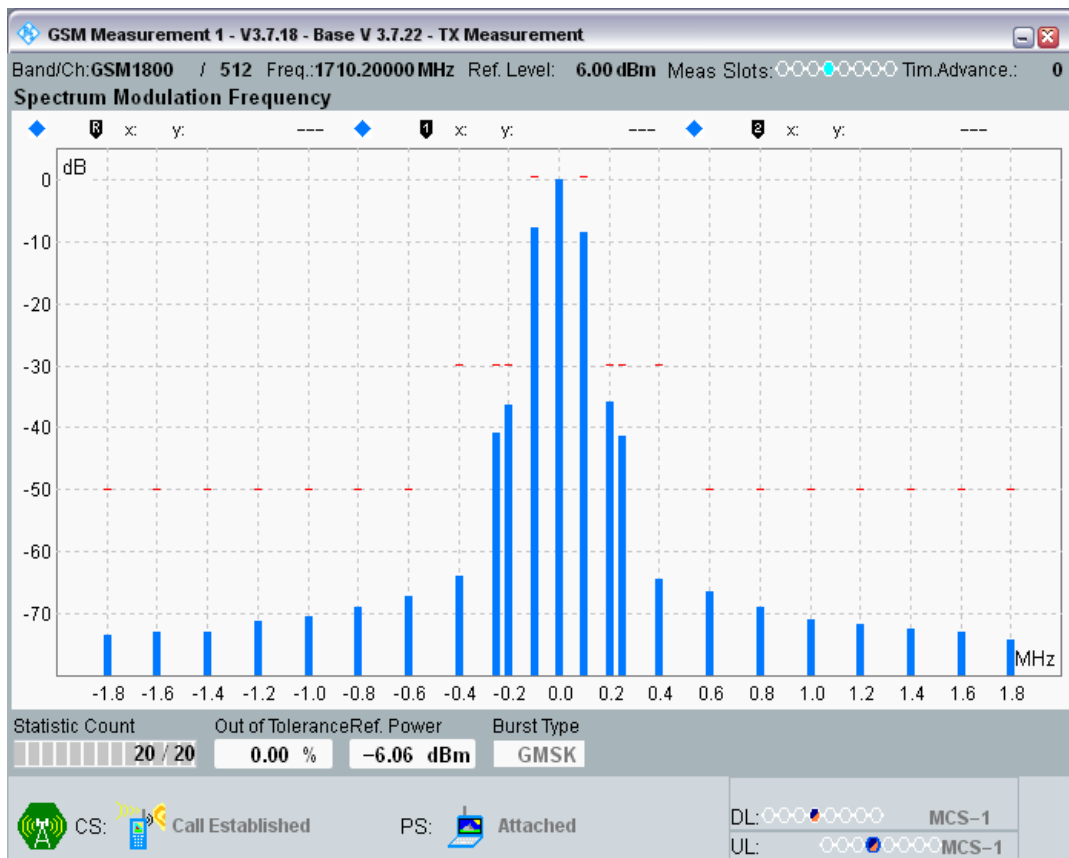


GSM1800 Channel=698 PCL=0

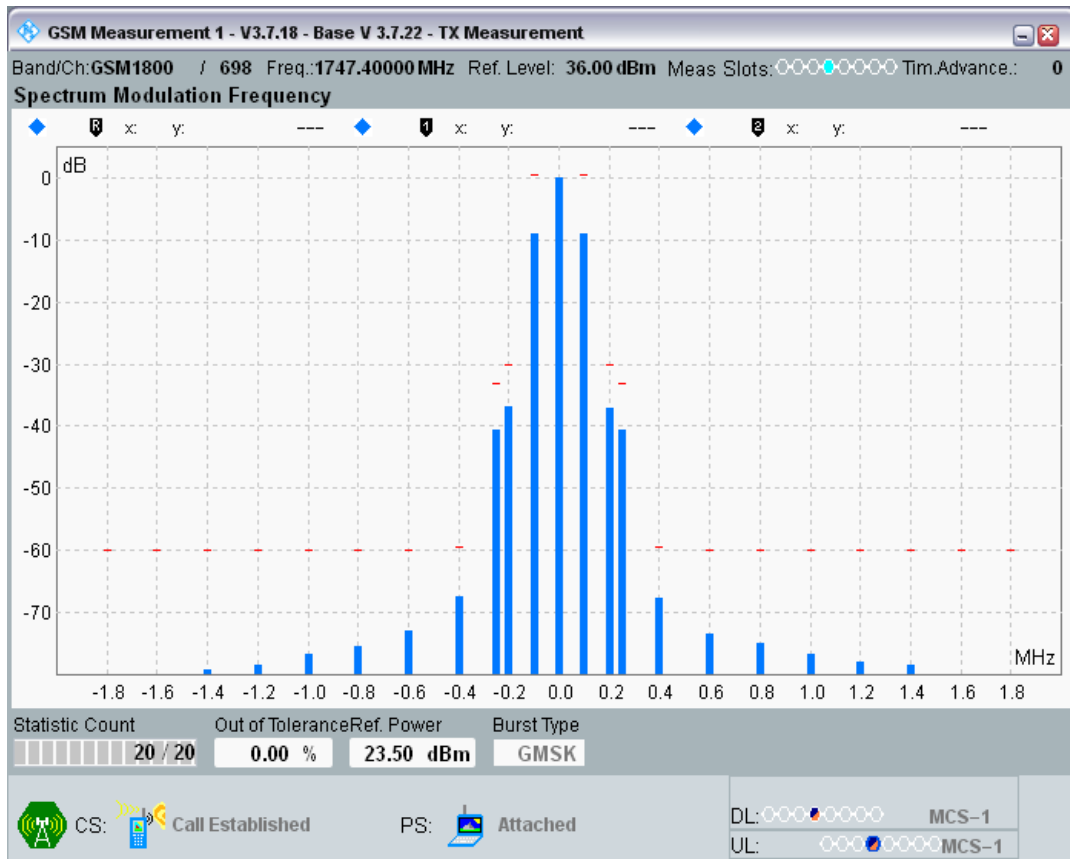


GSM1800 Channel=698 PCL=15

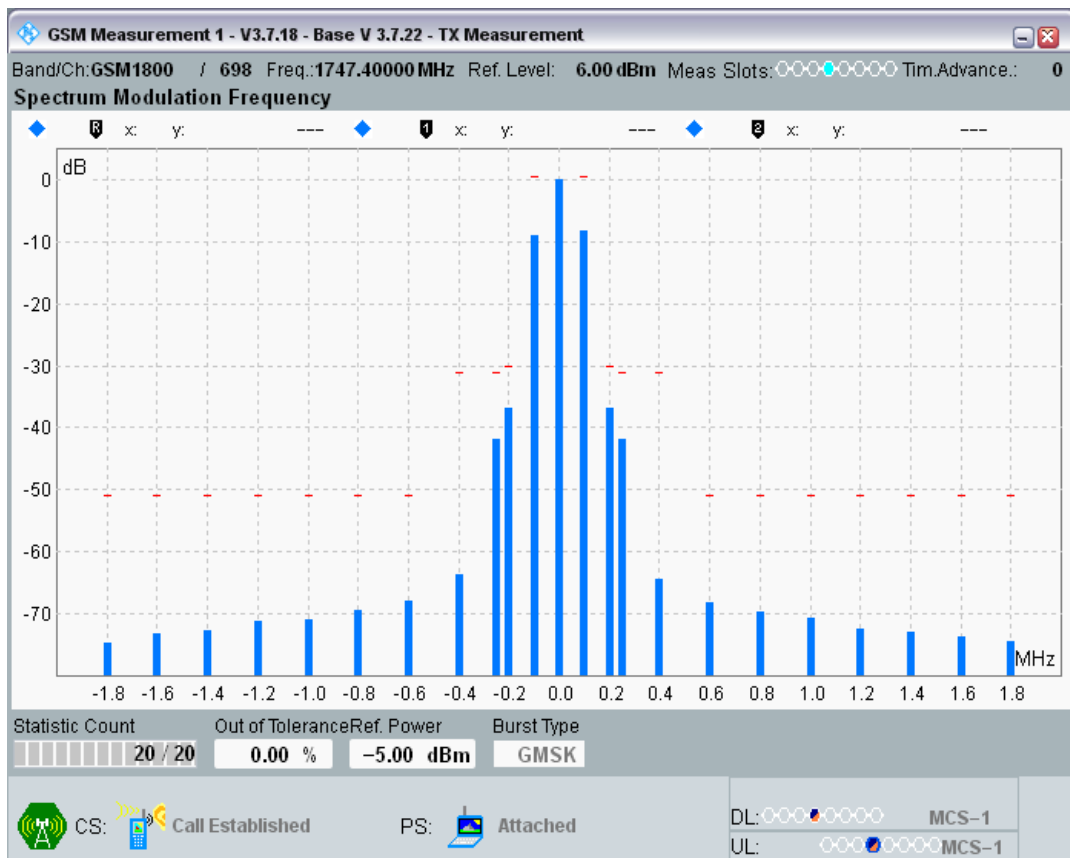


GSM1800 Channel=885 PCL=0

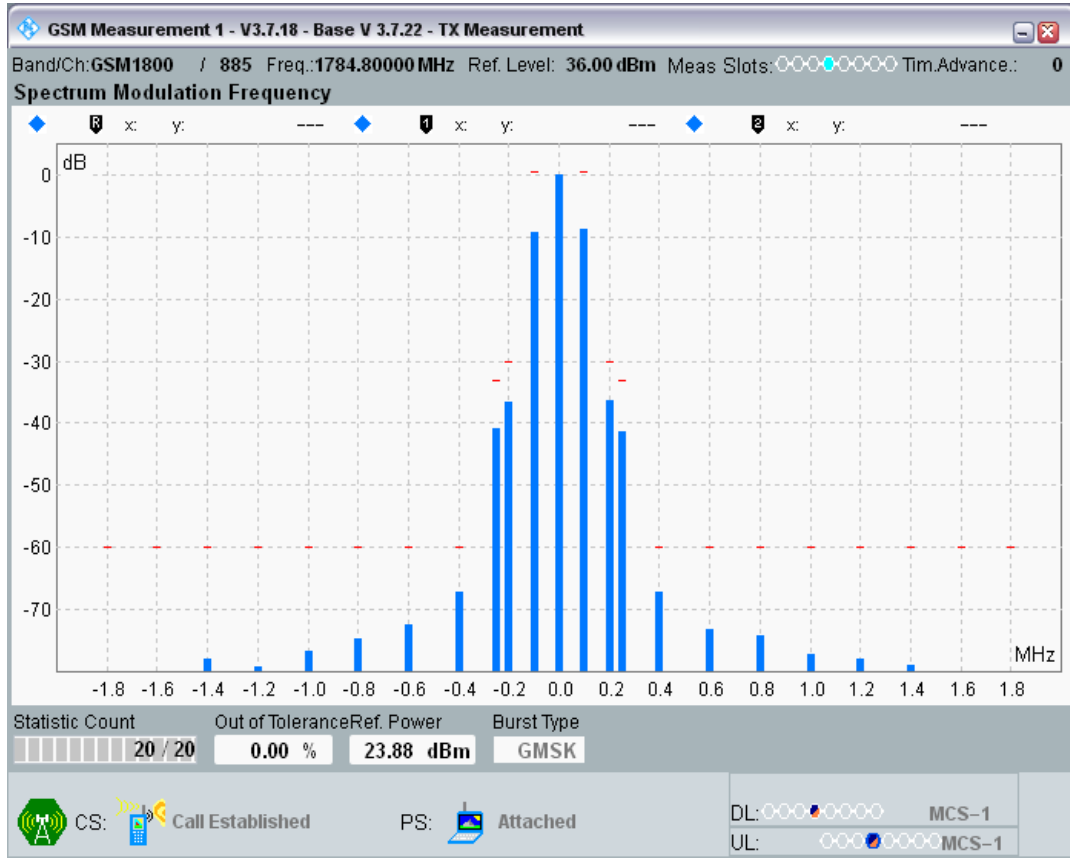


GSM1800 Channel=885 PCL=15

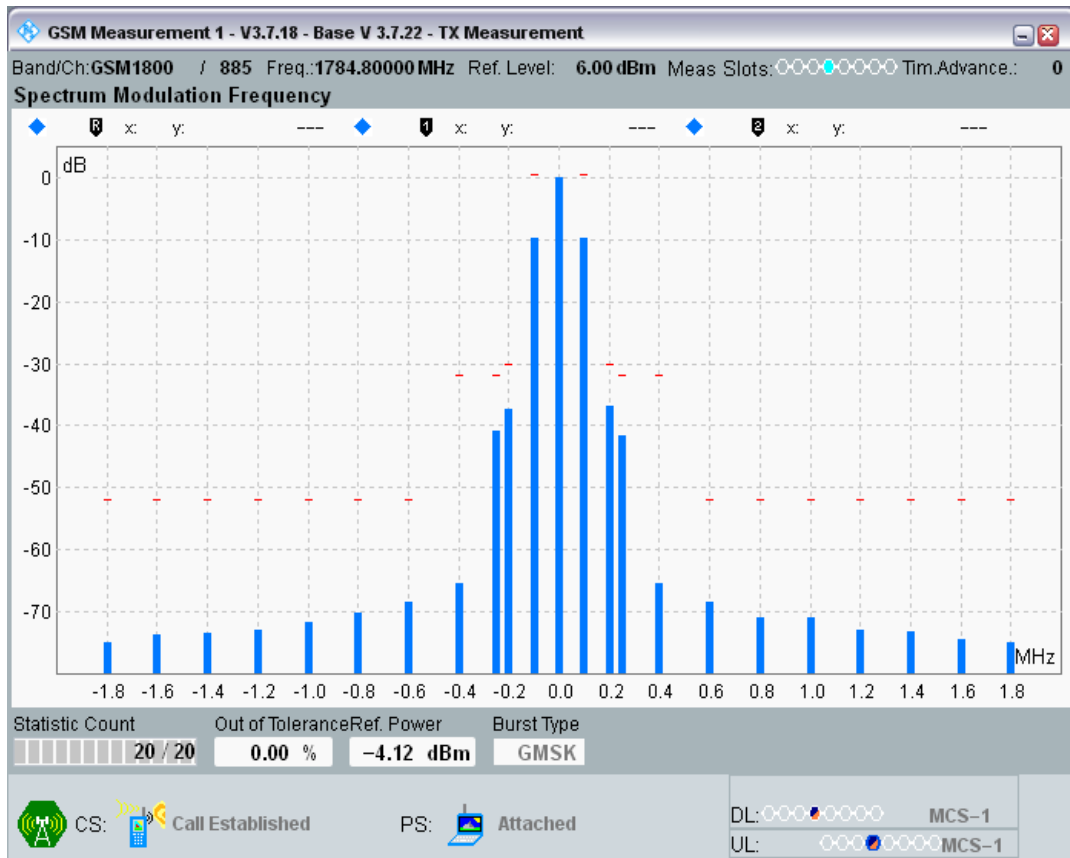


GSM900 Channel=975 PCL=5

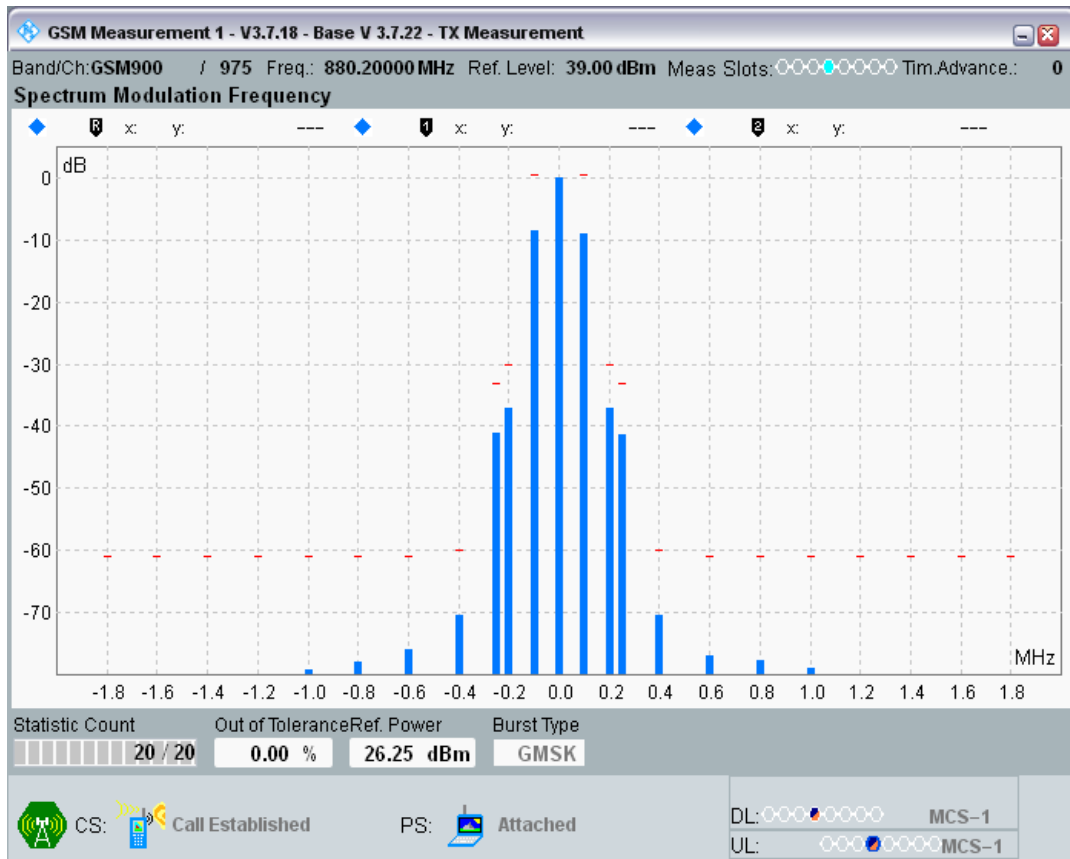


GSM900 Channel=975 PCL=19

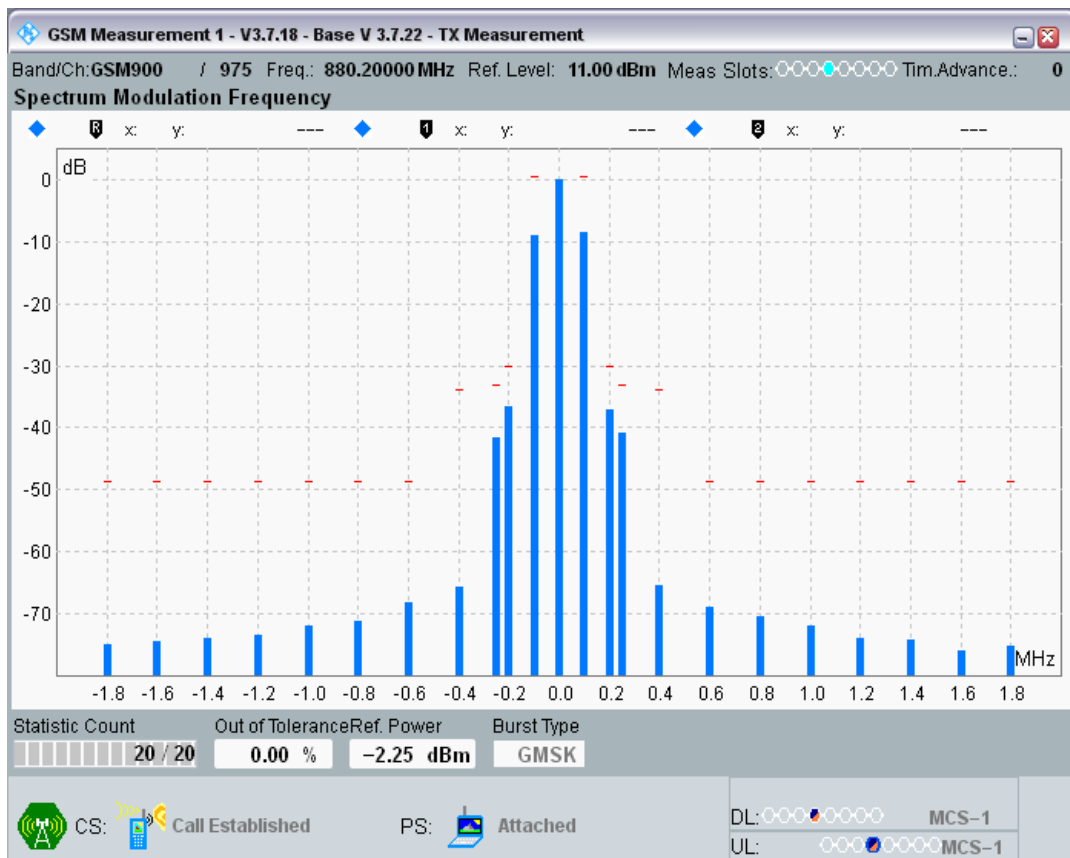


GSM900 Channel=38 PCL=5

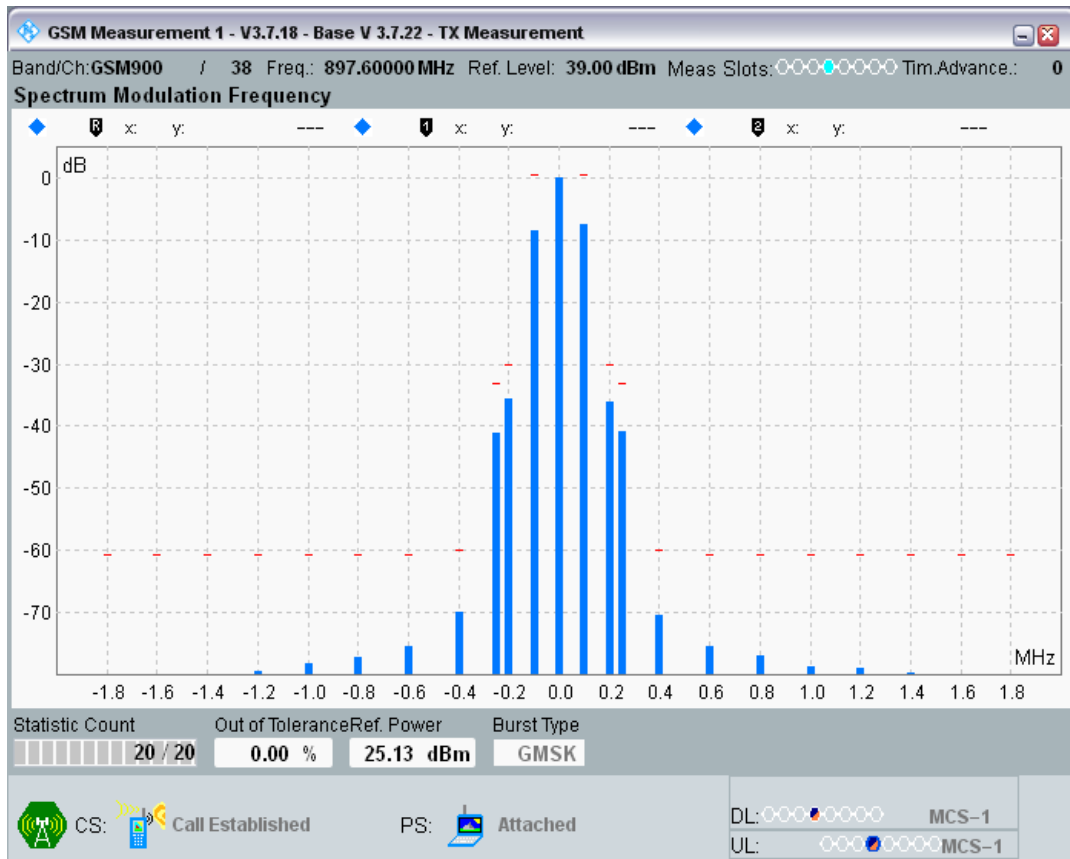


GSM900 Channel=38 PCL=19

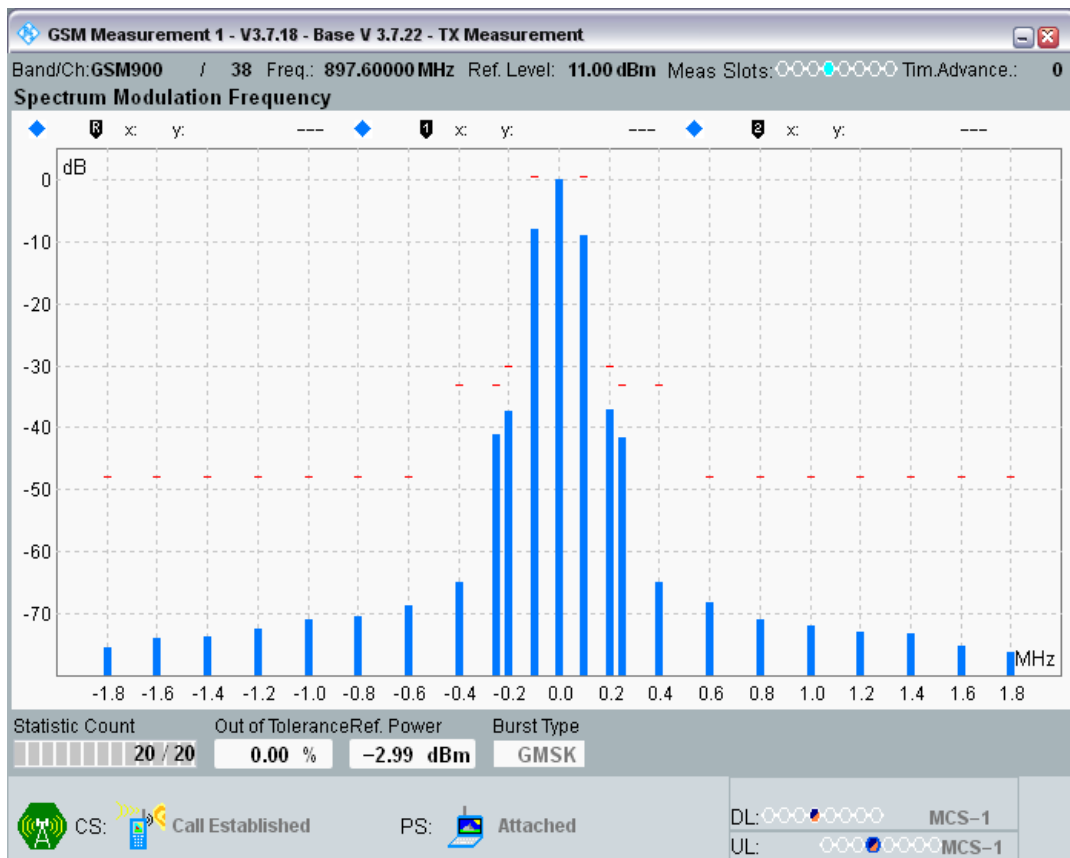

GSM900 Channel=124 PCL=5

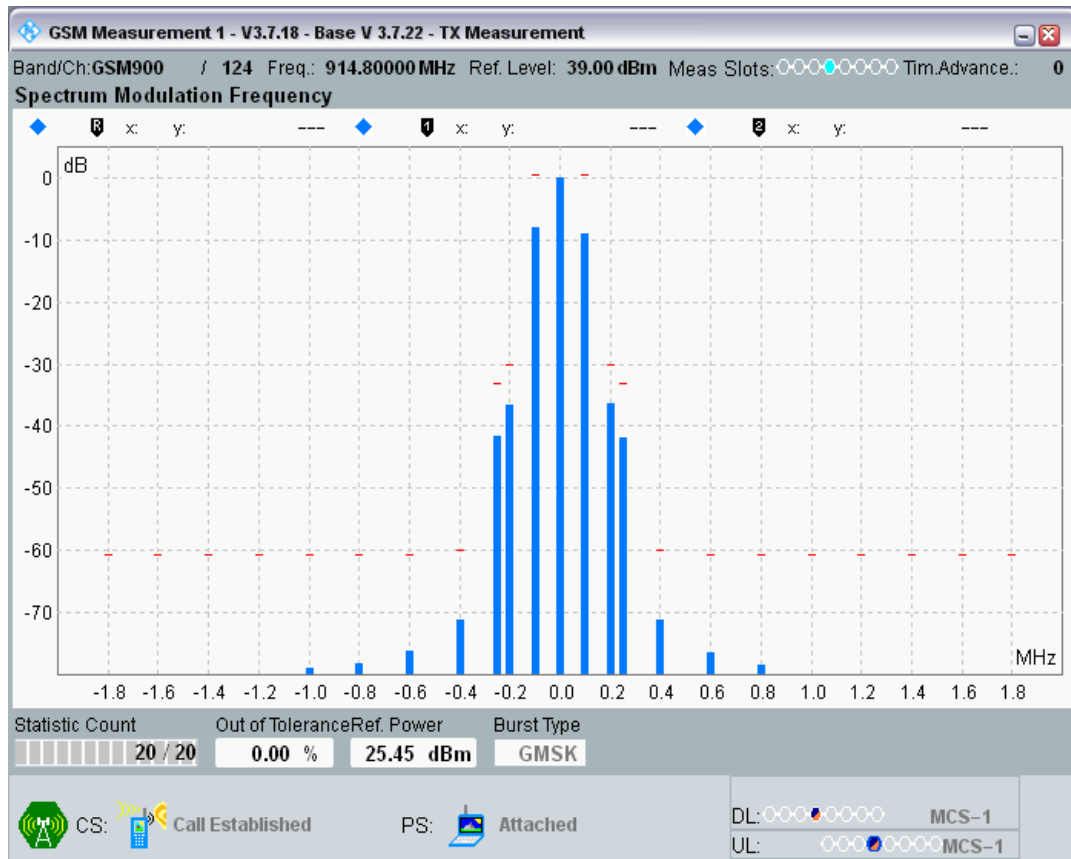

GSM900 Channel=124 PCL=19

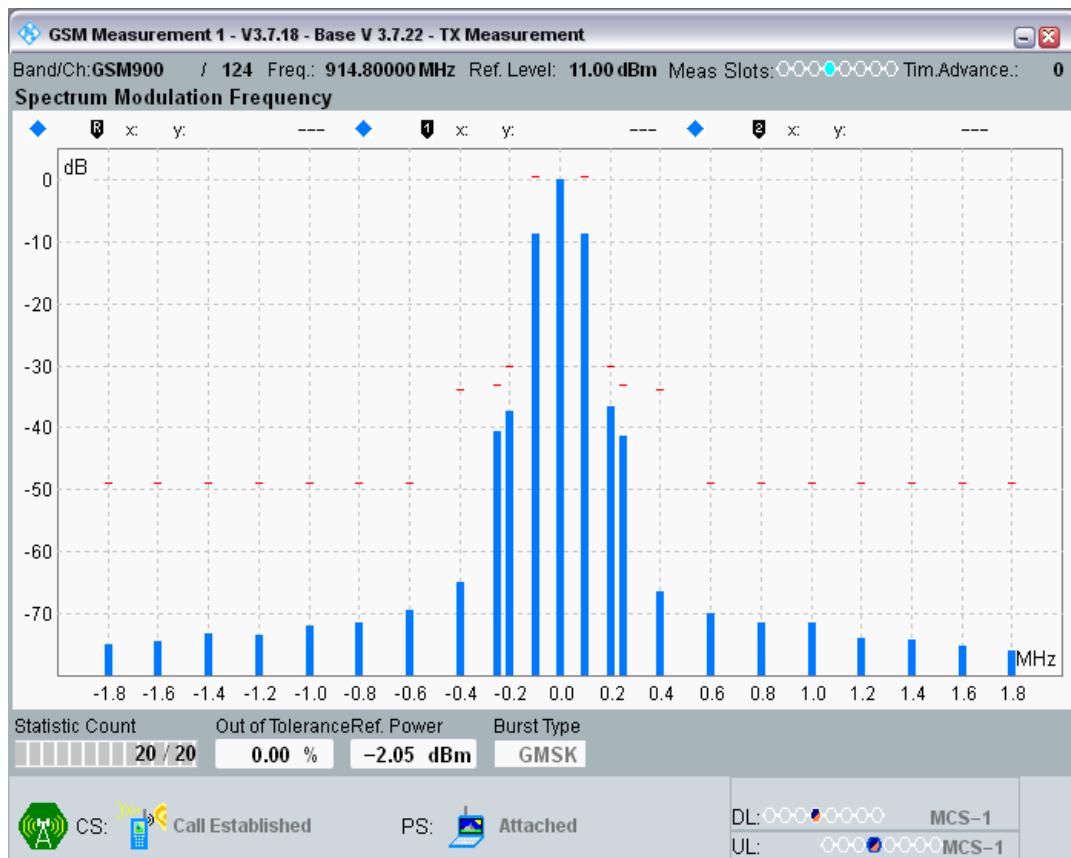


Clause 4.2.6 Transmitter-Switching Spectrum

| Band | Channel | Frequency (MHz) | PCL | Offset (kHz) | Result (dBm) | Limit (dBm) | Verdict |
|---------|---------|-----------------|-----|--------------|--------------|-------------|---------|
| GSM1800 | 512 | 1710.2 | 0 | Ref Power | 30.85 | | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -1800 | -45.22 | -26.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -1200 | -43.11 | -23.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -600 | -33.47 | -23.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | -400 | -25.25 | -21.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 400 | -23.99 | -21.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 600 | -33.49 | -23.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 1200 | -43.62 | -23.15 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 1800 | -47.02 | -26.15 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | Ref Power | 2.48 | | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1800 | -54.46 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -1200 | -51.02 | -32 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -600 | -45.42 | -26 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | -400 | -41.24 | -23 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 400 | -39.61 | -23 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 600 | -43.40 | -26 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1200 | -50.06 | -32 | PASS |
| GSM1800 | 512 | 1710.2 | 15 | 1800 | -54.06 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | Ref Power | 31.29 | | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1800 | -46.48 | -25.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -1200 | -43.29 | -22.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -600 | -33.27 | -22.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | -400 | -24.43 | -20.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 400 | -22.14 | -20.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 600 | -33.31 | -22.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1200 | -42.45 | -22.71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1800 | -47.05 | -25.71 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | Ref Power | 3.01 | | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1800 | -53.76 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -1200 | -50.21 | -32 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -600 | -45.20 | -26 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | -400 | -40.98 | -23 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 400 | -39.19 | -23 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 600 | -42.71 | -26 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1200 | -49.66 | -32 | PASS |
| GSM1800 | 698 | 1747.4 | 15 | 1800 | -53.50 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | Ref Power | 31.92 | | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1800 | -43.94 | -25.08 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -1200 | -40.77 | -22.08 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -600 | -32.69 | -22.08 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | -400 | -22.65 | -20.08 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 400 | -20.25 | -20.08 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 600 | -32.10 | -22.08 | PASS |


| | | | | | | | |
|---------|-----|--------|----|-----------|--------|--------|------|
| GSM1800 | 885 | 1784.8 | 0 | 1200 | -39.59 | -22.08 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 1800 | -43.12 | -25.08 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | Ref Power | 3.35 | | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1800 | -53.23 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -1200 | -50.12 | -32 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -600 | -44.65 | -26 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | -400 | -40.49 | -23 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 400 | -38.63 | -23 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 600 | -42.23 | -26 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1200 | -49.54 | -32 | PASS |
| GSM1800 | 885 | 1784.8 | 15 | 1800 | -52.95 | -36 | PASS |
| GSM900 | 975 | 880.2 | 5 | Ref Power | 34.02 | | PASS |
| GSM900 | 975 | 880.2 | 5 | -1800 | -44.96 | -24 | PASS |
| GSM900 | 975 | 880.2 | 5 | -1200 | -42.25 | -21 | PASS |
| GSM900 | 975 | 880.2 | 5 | -600 | -31.03 | -21 | PASS |
| GSM900 | 975 | 880.2 | 5 | -400 | -22.57 | -17.98 | PASS |
| GSM900 | 975 | 880.2 | 5 | 400 | -23.79 | -17.98 | PASS |
| GSM900 | 975 | 880.2 | 5 | 600 | -28.23 | -21 | PASS |
| GSM900 | 975 | 880.2 | 5 | 1200 | -41.80 | -21 | PASS |
| GSM900 | 975 | 880.2 | 5 | 1800 | -45.33 | -24 | PASS |
| GSM900 | 975 | 880.2 | 19 | Ref Power | 5.62 | | PASS |
| GSM900 | 975 | 880.2 | 19 | -1800 | -65.67 | -36 | PASS |
| GSM900 | 975 | 880.2 | 19 | -1200 | -62.21 | -32 | PASS |
| GSM900 | 975 | 880.2 | 19 | -600 | -52.13 | -26 | PASS |
| GSM900 | 975 | 880.2 | 19 | -400 | -39.64 | -23 | PASS |
| GSM900 | 975 | 880.2 | 19 | 400 | -36.17 | -23 | PASS |
| GSM900 | 975 | 880.2 | 19 | 600 | -45.82 | -26 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1200 | -62.04 | -32 | PASS |
| GSM900 | 975 | 880.2 | 19 | 1800 | -68.15 | -36 | PASS |
| GSM900 | 38 | 897.6 | 5 | Ref Power | 33.70 | | PASS |
| GSM900 | 38 | 897.6 | 5 | -1800 | -45.29 | -24 | PASS |
| GSM900 | 38 | 897.6 | 5 | -1200 | -42.73 | -21 | PASS |
| GSM900 | 38 | 897.6 | 5 | -600 | -30.71 | -21 | PASS |
| GSM900 | 38 | 897.6 | 5 | -400 | -23.01 | -18.3 | PASS |
| GSM900 | 38 | 897.6 | 5 | 400 | -24.77 | -18.3 | PASS |
| GSM900 | 38 | 897.6 | 5 | 600 | -27.91 | -21 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1200 | -39.29 | -21 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1800 | -44.36 | -24 | PASS |
| GSM900 | 38 | 897.6 | 19 | Ref Power | 4.97 | | PASS |
| GSM900 | 38 | 897.6 | 19 | -1800 | -66.16 | -36 | PASS |
| GSM900 | 38 | 897.6 | 19 | -1200 | -61.89 | -32 | PASS |
| GSM900 | 38 | 897.6 | 19 | -600 | -52.93 | -26 | PASS |
| GSM900 | 38 | 897.6 | 19 | -400 | -40.38 | -23 | PASS |
| GSM900 | 38 | 897.6 | 19 | 400 | -37.01 | -23 | PASS |

| | | | | | | | |
|--------|-----|-------|----|-----------|--------|--------|------|
| GSM900 | 38 | 897.6 | 19 | 600 | -46.86 | -26 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1200 | -62.37 | -32 | PASS |
| GSM900 | 38 | 897.6 | 19 | 1800 | -68.03 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | Ref Power | 33.65 | | PASS |
| GSM900 | 124 | 914.8 | 5 | -1800 | -42.76 | -24 | PASS |
| GSM900 | 124 | 914.8 | 5 | -1200 | -42.74 | -21 | PASS |
| GSM900 | 124 | 914.8 | 5 | -600 | -30.01 | -21 | PASS |
| GSM900 | 124 | 914.8 | 5 | -400 | -23.19 | -18.35 | PASS |
| GSM900 | 124 | 914.8 | 5 | 400 | -25.14 | -18.35 | PASS |
| GSM900 | 124 | 914.8 | 5 | 600 | -28.00 | -21 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1200 | -41.12 | -21 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1800 | -44.12 | -24 | PASS |
| GSM900 | 124 | 914.8 | 19 | Ref Power | 5.80 | | PASS |
| GSM900 | 124 | 914.8 | 19 | -1800 | -65.81 | -36 | PASS |
| GSM900 | 124 | 914.8 | 19 | -1200 | -62.59 | -32 | PASS |
| GSM900 | 124 | 914.8 | 19 | -600 | -50.39 | -26 | PASS |
| GSM900 | 124 | 914.8 | 19 | -400 | -38.91 | -23 | PASS |
| GSM900 | 124 | 914.8 | 19 | 400 | -36.06 | -23 | PASS |
| GSM900 | 124 | 914.8 | 19 | 600 | -45.81 | -26 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1200 | -63.40 | -32 | PASS |
| GSM900 | 124 | 914.8 | 19 | 1800 | -68.05 | -36 | PASS |


GSM1800 Channel=512 PCL=0

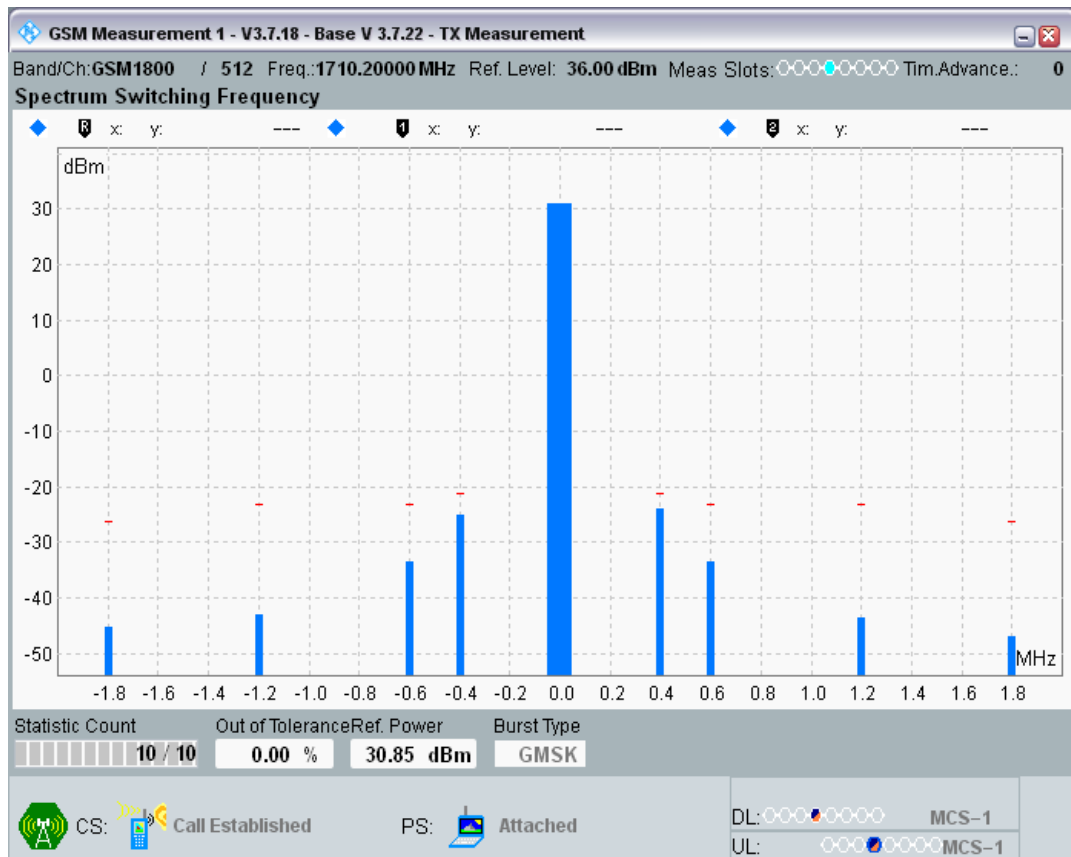


GSM1800 Channel=512 PCL=15

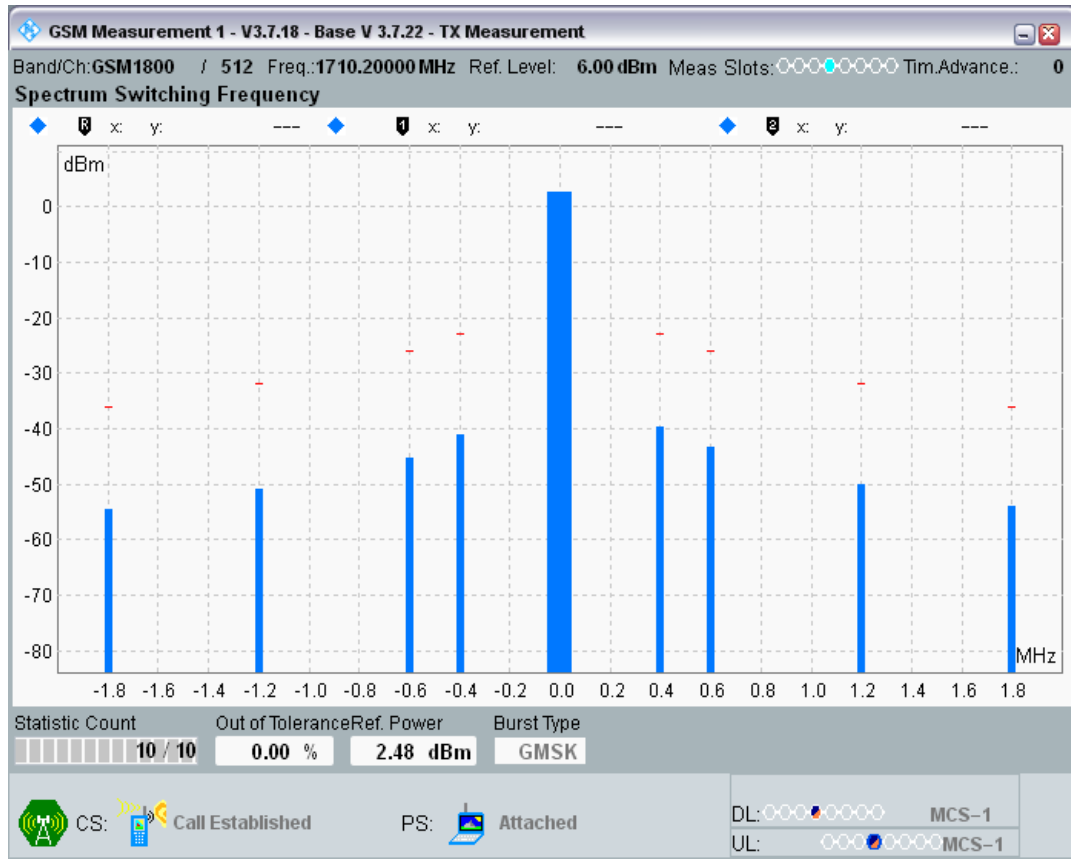


GSM1800 Channel=698 PCL=0

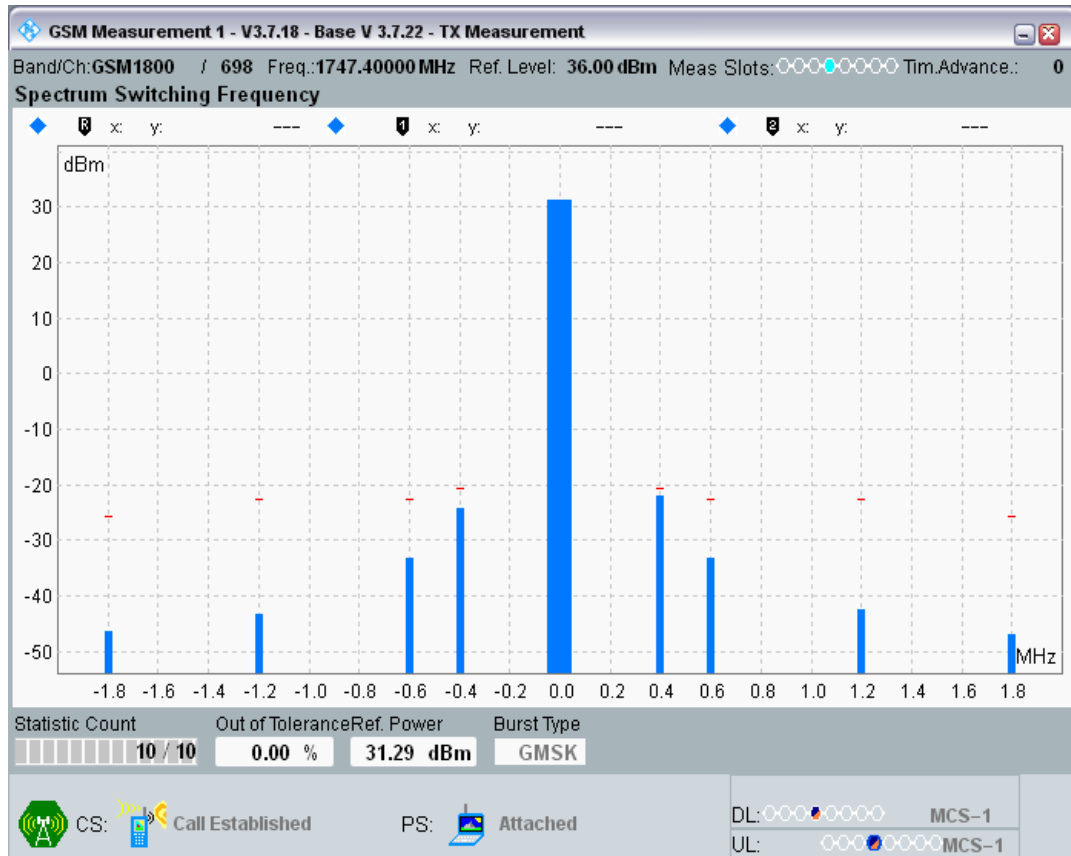


GSM1800 Channel=698 PCL=15

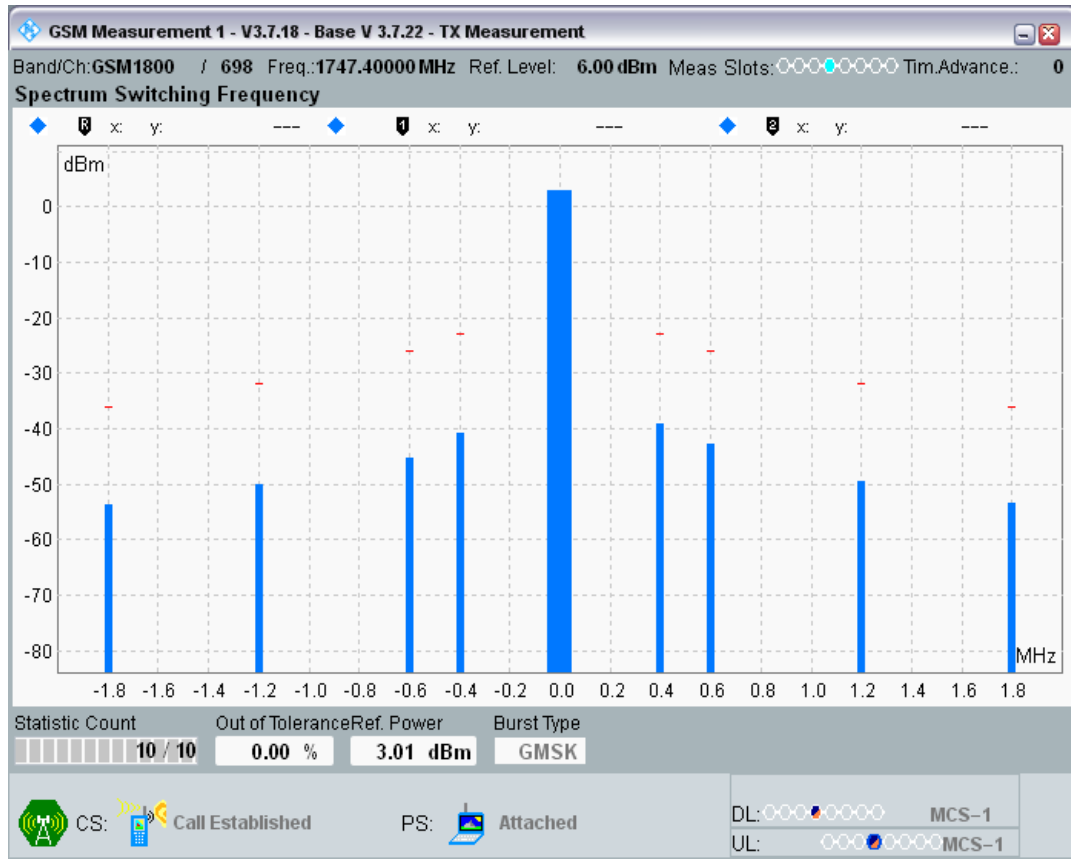

GSM1800 Channel=885 PCL=0

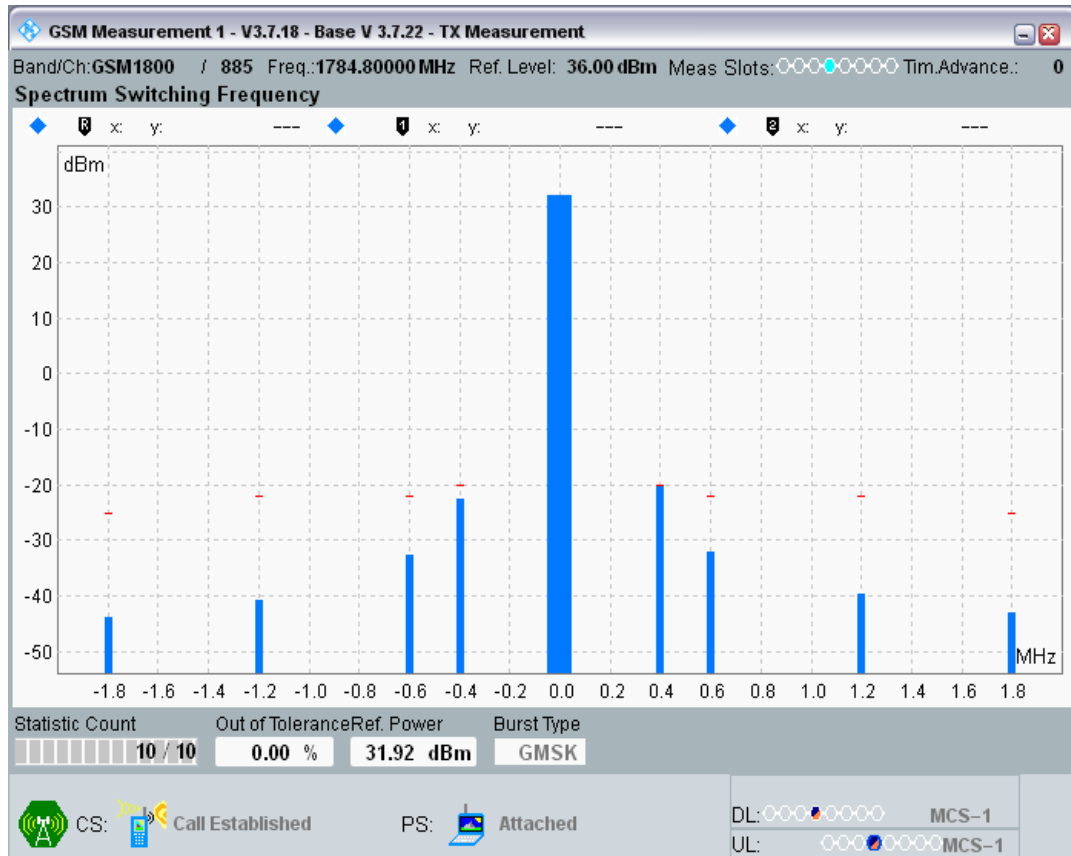


GSM1800 Channel=885 PCL=15

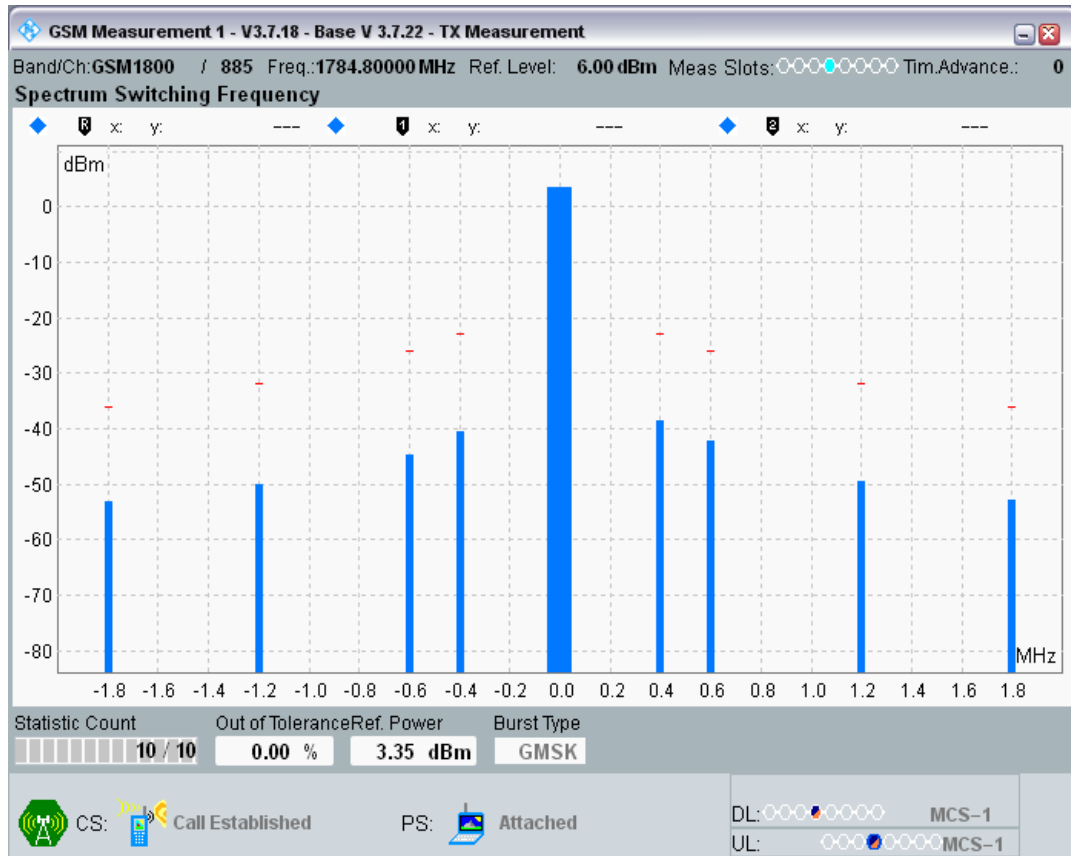

GSM900 Channel=975 PCL=5




GSM900 Channel=975 PCL=19

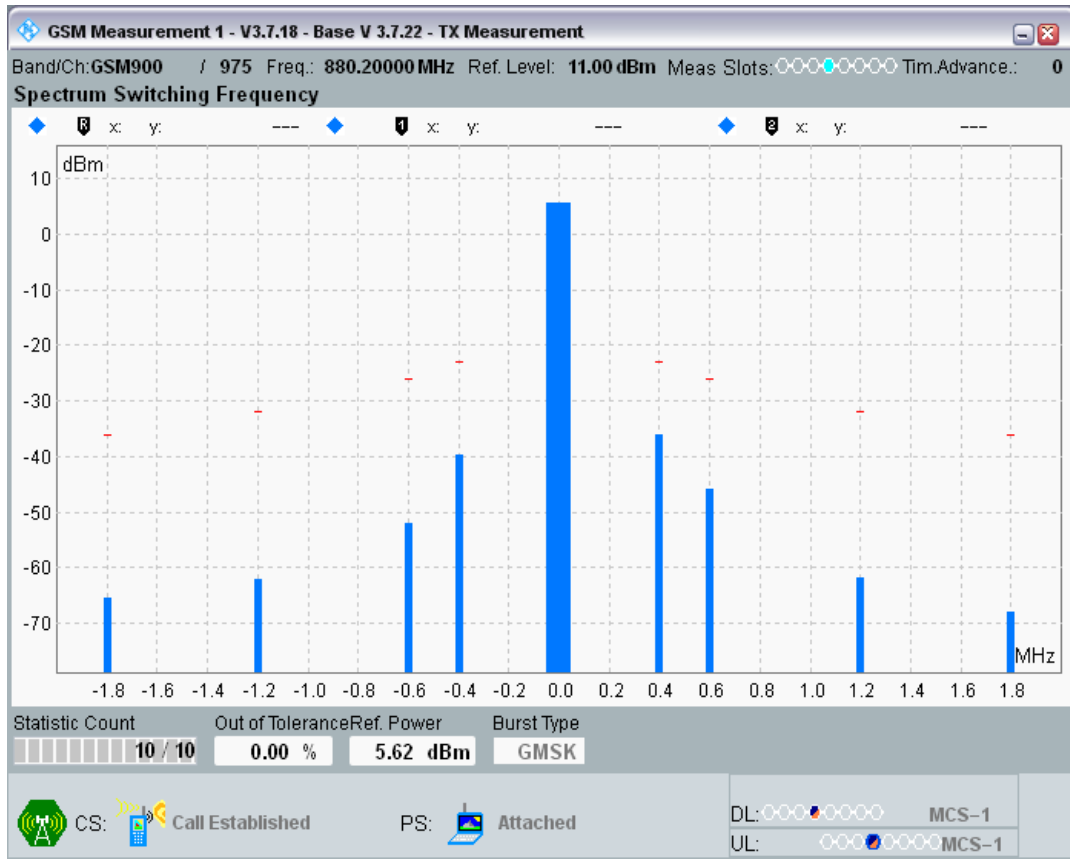

GSM900 Channel=38 PCL=5




GSM900 Channel=38 PCL=19

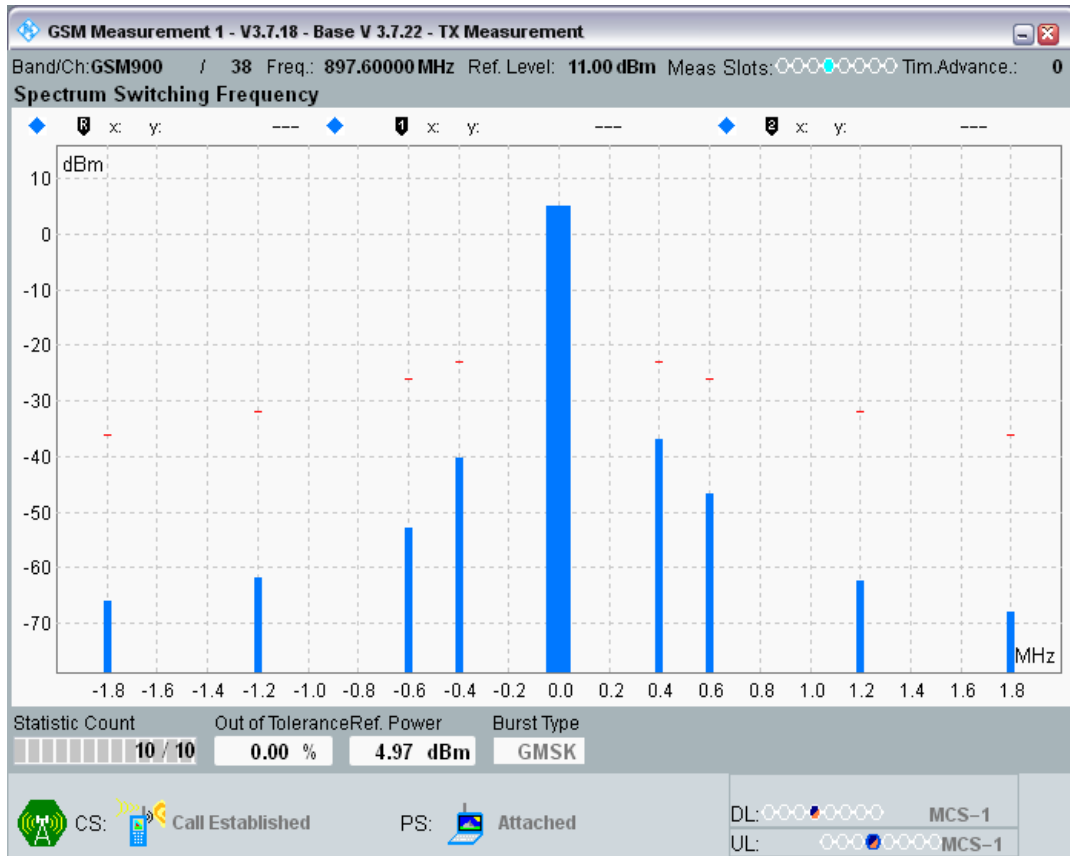

GSM900 Channel=124 PCL=5



GSM900 Channel=124 PCL=19

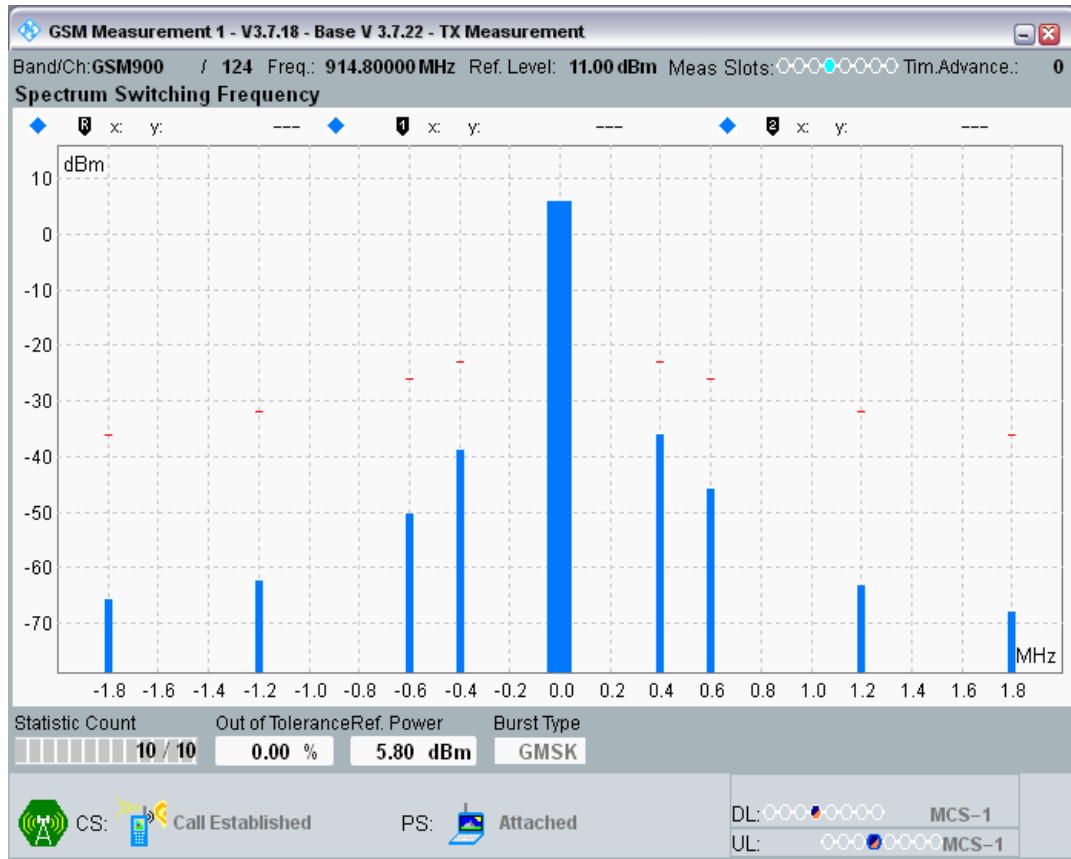

Clause 4.2.12 Conducted spurious emissions - MS allocated a channel


| Band | Channel | Frequency (MHz) | PCL | Range | RBW | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|---------|---------|-----------------|-----|-------------------------|---------|-----------------|------------------|-------------|---------|
| GSM1800 | 512 | 1710.2 | 5 | 100 kHz-50 MHz | 10 kHz | 0.12 | -53.15 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 50 MHz-500 MHz | 100 kHz | 202.25 | -64.32 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 500 MHz-925 MHz | 3 MHz | 924.15 | -55.82 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 960 MHz-1000 MHz | 3 MHz | 961.60 | -56.43 | -36 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1000 MHz-1680 MHz | 3 MHz | 1631.72 | -55.62 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1680 MHz-1690 MHz | 1 MHz | 1687.64 | -60.49 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1690 MHz-1700 MHz | 300 kHz | 1694.14 | -64.70 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1700 MHz-1704.20 MHz | 100 kHz | 1703.92 | -68.90 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1704.20 MHz-1708.40 MHz | 30 kHz | 1708.39 | -62.23 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1712.00 MHz-1716.20 MHz | 30 kHz | 1712.05 | -62.86 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1716.20 MHz-1795 MHz | 100 kHz | 1766.08 | -61.98 | -30 | PASS |
| GSM1800 | 512 | 1710.2 | 5 | 1795 MHz-1805 MHz | 300 kHz | 1799.81 | -64.46 | -30 | PASS |

| | | | | | | | | | |
|---------|-----|--------|---|-------------------------|---------|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 5 | 1880 MHz-12.75 GHz | 3 MHz | 3420.20 | -45.39 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 100 kHz-50 MHz | 10 kHz | 0.12 | -50.89 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 50 MHz-500 MHz | 100 kHz | 497.60 | -64.06 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 500 MHz-925 MHz | 3 MHz | 798.35 | -55.81 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 960 MHz-1000 MHz | 3 MHz | 965.36 | -56.45 | -36 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1000 MHz-1680 MHz | 3 MHz | 1617.44 | -55.62 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1680 MHz-1690 MHz | 1 MHz | 1687.65 | -60.46 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1690 MHz-1700 MHz | 300 kHz | 1692.33 | -64.69 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1700 MHz-1741.40 MHz | 100 kHz | 1741.36 | -68.62 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1741.40 MHz-1745.60 MHz | 30 kHz | 1745.49 | -62.65 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1749.20 MHz-1753.40 MHz | 30 kHz | 1749.36 | -63.02 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1753.40 MHz-1795 MHz | 100 kHz | 1754.94 | -68.97 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1795 MHz-1805 MHz | 300 kHz | 1797.67 | -64.73 | -30 | PASS |
| GSM1800 | 698 | 1747.4 | 5 | 1880 MHz-12.75 GHz | 3 MHz | 3494.61 | -46.26 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 100 kHz-50 MHz | 10 kHz | 0.12 | -52.57 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 50 MHz-500 MHz | 100 kHz | 426.50 | -64.34 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 500 MHz-925 MHz | 3 MHz | 899.93 | -55.70 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 960 MHz-1000 MHz | 3 MHz | 965.16 | -56.34 | -36 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1000 MHz-1680 MHz | 3 MHz | 1586.84 | -55.58 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1680 MHz-1690 MHz | 1 MHz | 1683.24 | -60.60 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1690 MHz-1700 MHz | 300 kHz | 1691.67 | -64.52 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1700 MHz-1778.80 MHz | 100 kHz | 1778.17 | -68.20 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1778.80 MHz-1783.00 MHz | 30 kHz | 1782.96 | -60.29 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1786.60 MHz-1790.80 MHz | 30 kHz | 1786.73 | -62.19 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1790.80 MHz-1795 MHz | 100 kHz | 1790.90 | -67.48 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1795 MHz-1805 MHz | 300 kHz | 1800.97 | -64.06 | -30 | PASS |
| GSM1800 | 885 | 1784.8 | 5 | 1880 MHz-12.75 GHz | 3 MHz | 3569.87 | -45.32 | -30 | PASS |

| | | | | | | | | | |
|--------|-----|-------|---|-----------------------|---------|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 kHz-50 MHz | 10 kHz | 48.81 | -78.90 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 50 MHz-500 MHz | 100 kHz | 207.05 | -66.29 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 500 MHz-850 MHz | 3 MHz | 837.05 | -56.08 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 850 MHz-860 MHz | 1 MHz | 855.55 | -60.13 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 860 MHz-870 MHz | 300 kHz | 862.83 | -62.77 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 870 MHz-908.80 MHz | 100 kHz | 908.76 | -59.04 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 908.80 MHz-913.00 MHz | 30 kHz | 912.98 | -53.68 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 916.60 MHz-920.80 MHz | 30 kHz | 916.88 | -54.59 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 920.80 MHz-925 MHz | 100 kHz | 920.93 | -61.80 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 960 MHz-1000 MHz | 3 MHz | 966.64 | -57.30 | -36 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1000 MHz-1805 MHz | 3 MHz | 1772.80 | -51.49 | -30 | PASS |
| GSM900 | 124 | 914.8 | 5 | 1805 MHz-12.75 GHz | 3 MHz | 2470.12 | -40.21 | -30 | PASS |


GSM1800 Channel=512 PCL=5

Conducted spurious emissions

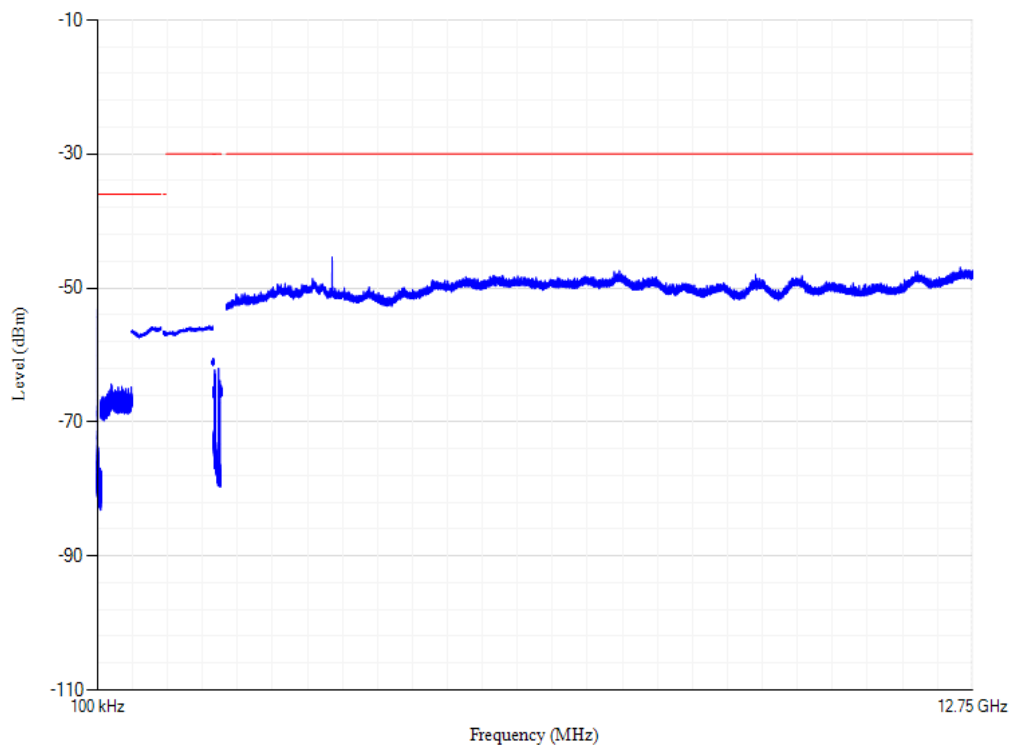


GSM1800 Channel=885 PCL=5

Conducted spurious emissions

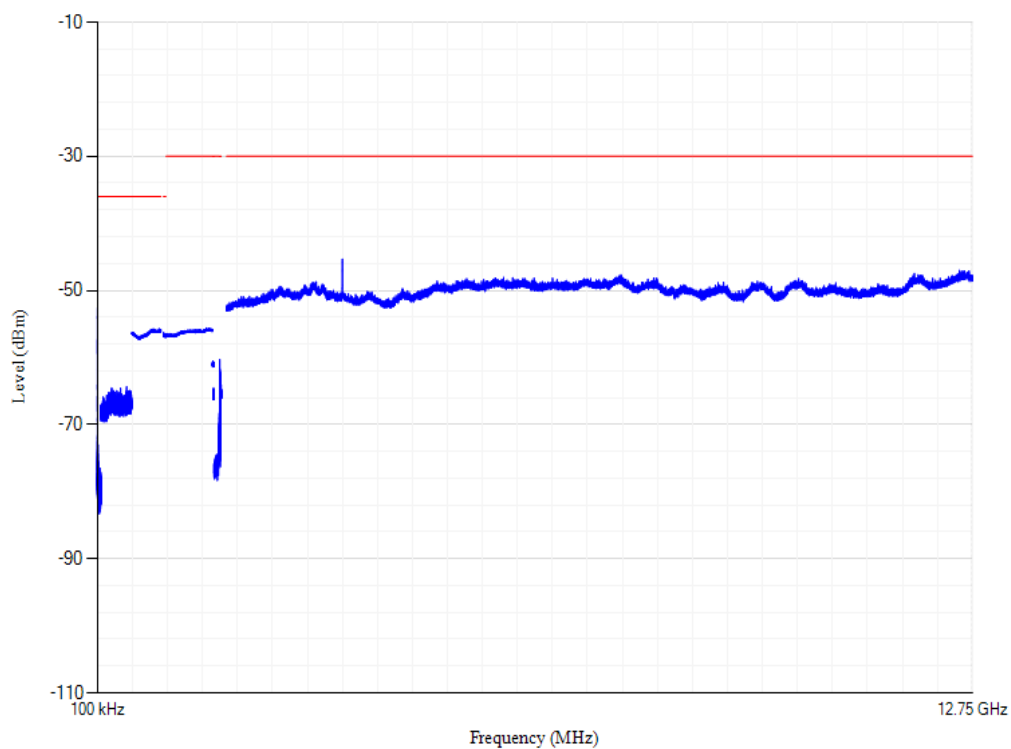


GSM1800 Channel=698 PCL=5

Conducted spurious emissions

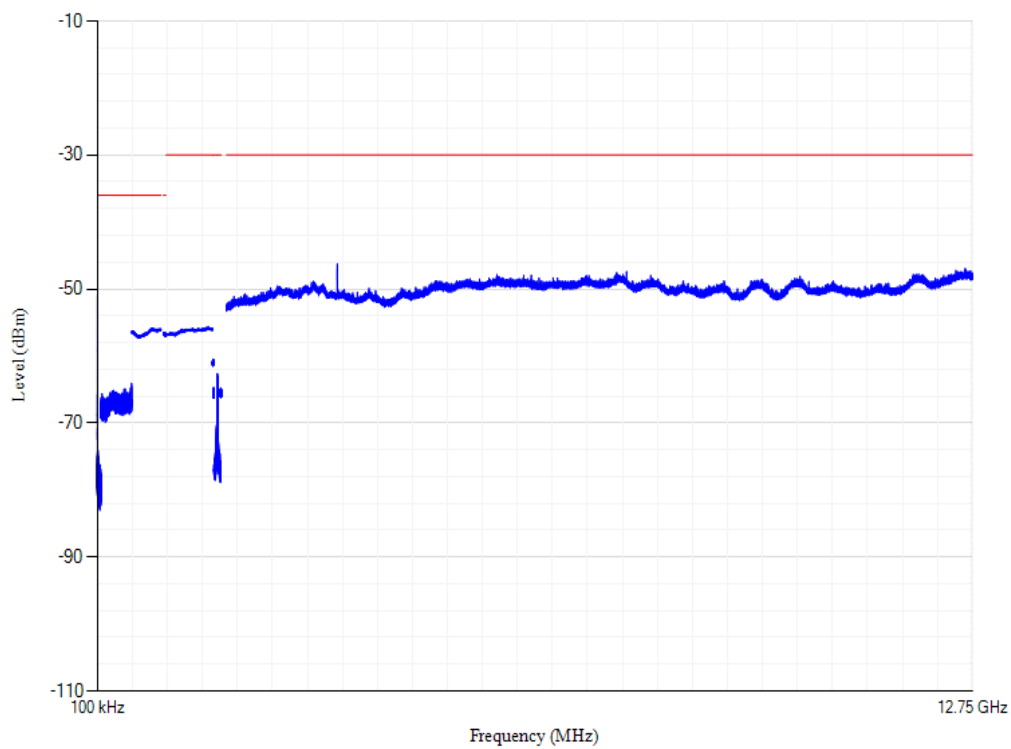

GSM900 Channel=124 PCL=5

Conducted spurious emissions

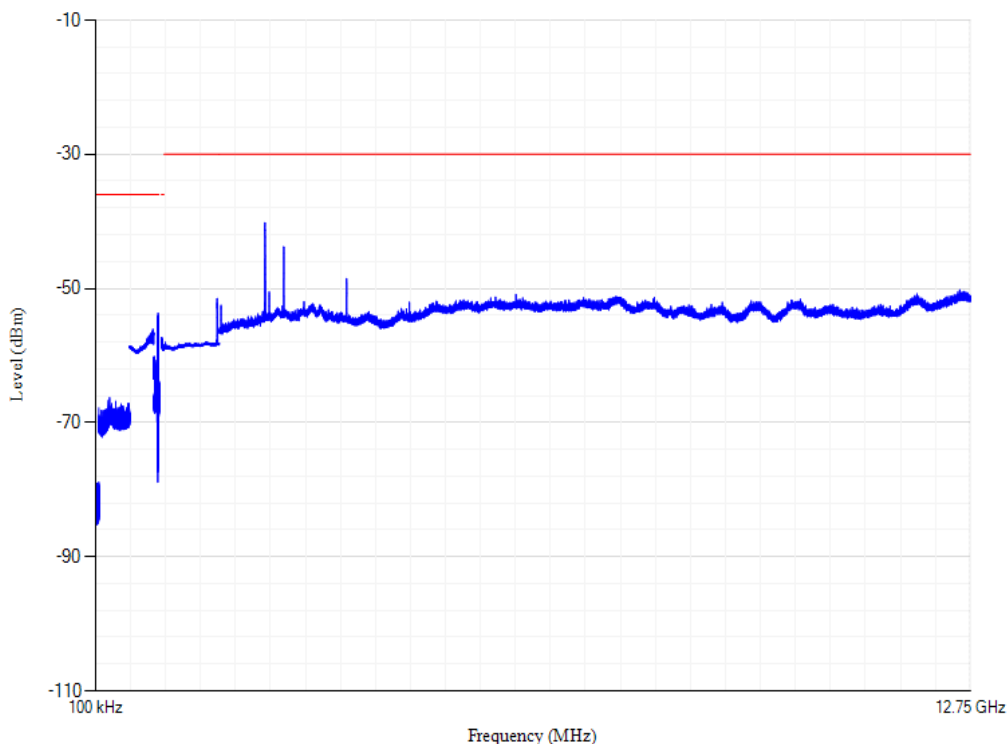


Clause 4.2.13 Conducted spurious emission - MS in idle mode

| Band | Channel | Frequency (MHz) | PCL | Range | RBW | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|---------|---------|-----------------|-----|--------------------|---------|-----------------|------------------|-------------|---------|
| GSM1800 | 698 | 1747.4 | 0 | 100 kHz-50 MHz | 10 kHz | 0.12 | -61.83 | -57 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 50 MHz-880 MHz | 100 kHz | 836.43 | -77.36 | -57 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 880 MHz-915 MHz | 100 kHz | 891.03 | -83.30 | -59 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 915 MHz-1000 MHz | 100 kHz | 944.24 | -76.00 | -57 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1000 MHz-1710 MHz | 100 kHz | 1704.32 | -82.87 | -47 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1710 MHz-1785 MHz | 100 kHz | 1784.48 | -83.14 | -53 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 1785 MHz-12.75 GHz | 100 kHz | 12512.14 | -76.46 | -47 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 kHz-50 MHz | 10 kHz | 0.10 | -63.05 | -57 | PASS |
| GSM900 | 38 | 897.6 | 5 | 50 MHz-880 MHz | 100 kHz | 802.56 | -80.78 | -57 | PASS |
| GSM900 | 38 | 897.6 | 5 | 880 MHz-915 MHz | 100 kHz | 913.85 | -81.81 | -59 | PASS |
| GSM900 | 38 | 897.6 | 5 | 915 MHz-1000 MHz | 100 kHz | 944.16 | -79.51 | -57 | PASS |

| | | | | | | | | | |
|--------|----|-------|---|--------------------|---------|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 1000 MHz-1710 MHz | 100 kHz | 1685.86 | -84.43 | -47 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1710 MHz-1785 MHz | 100 kHz | 1711.58 | -79.45 | -53 | PASS |
| GSM900 | 38 | 897.6 | 5 | 1785 MHz-12.75 GHz | 100 kHz | 2465.67 | -67.82 | -47 | PASS |


GSM1800 Channel=698 PCL=0

Conducted spurious emissions

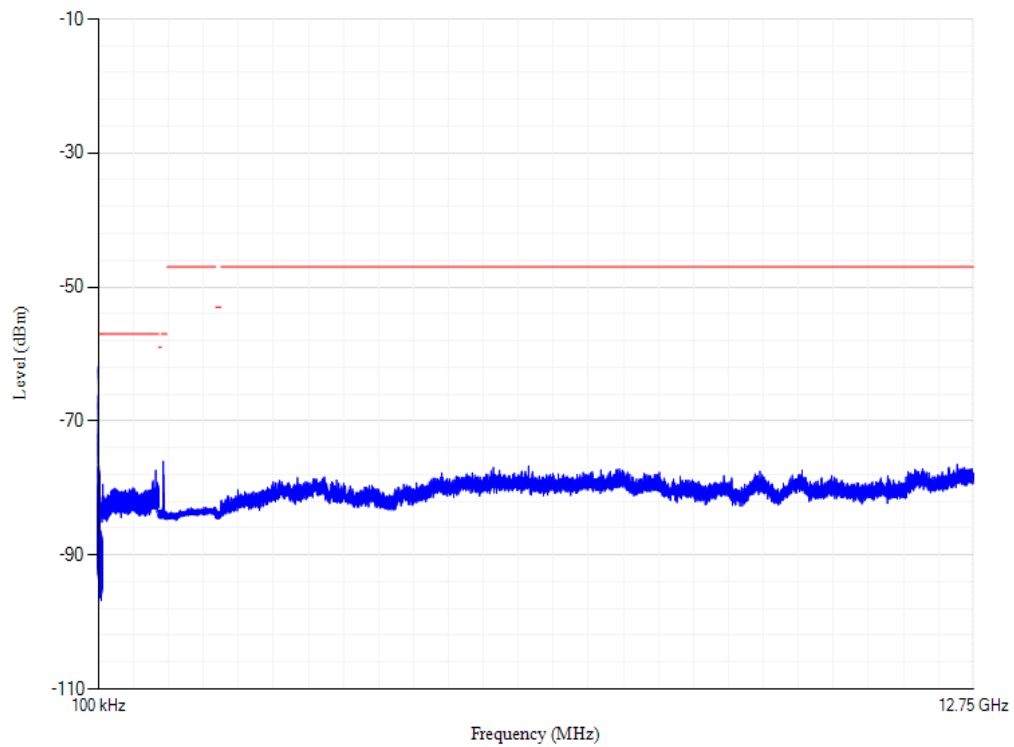

GSM900 Channel=38 PCL=5

Conducted spurious emissions

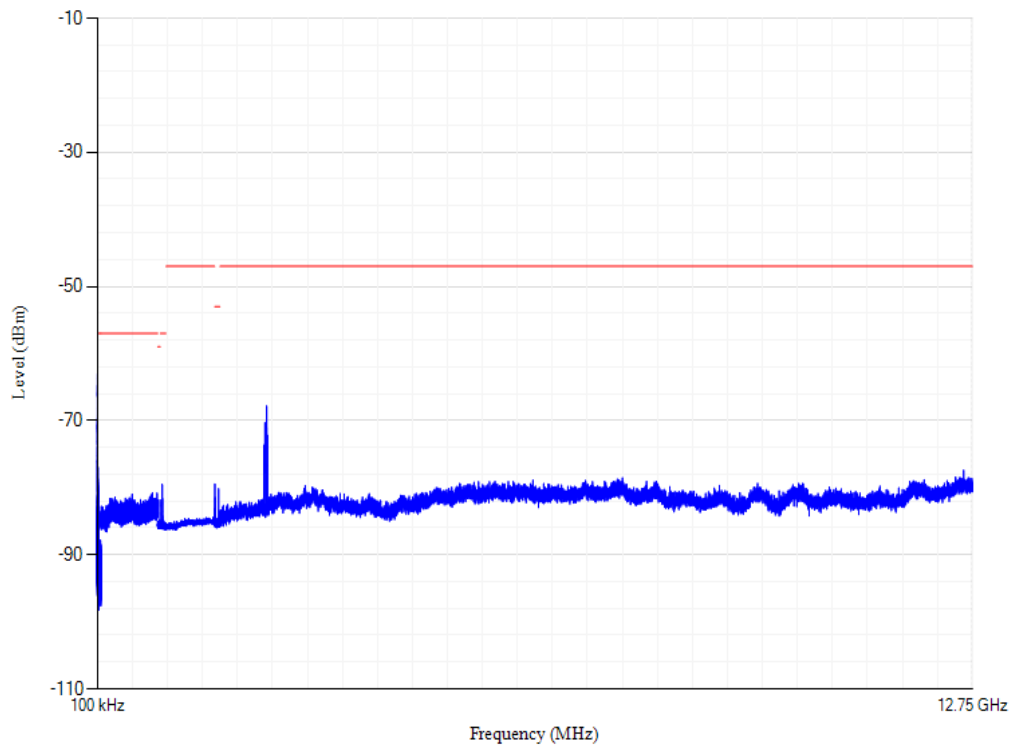

Clause 4.2.32 Intermodulation rejection - speech channels

| Band | Channel | UL Frequency (MHz) | DL Frequency (MHz) | Interfer1 Freq (MHz) | Interfer1 Level (dBm) | Interfer2 Freq (MHz) | Interfer2 Level (dBm) | BER (%) | Limit (%) | Verdict |
|---------|---------|--------------------|--------------------|----------------------|-----------------------|----------------------|-----------------------|---------|-----------|---------|
| GSM1800 | 512 | 1710.2 | 1805.2 | 1804.4 | -49 | 1803.6 | -50 | 0.00 | 2.439 | PASS |
| GSM1800 | 512 | 1710.2 | 1805.2 | 1806 | -49 | 1806.8 | -50 | 0.00 | 2.439 | PASS |
| GSM1800 | 698 | 1747.4 | 1842.4 | 1841.6 | -49 | 1840.8 | -50 | 0.00 | 2.439 | PASS |
| GSM1800 | 698 | 1747.4 | 1842.4 | 1843.2 | -49 | 1844 | -50 | 0.00 | 2.439 | PASS |
| GSM1800 | 885 | 1784.8 | 1879.8 | 1879 | -49 | 1878.2 | -50 | 0.00 | 2.439 | PASS |
| GSM1800 | 885 | 1784.8 | 1879.8 | 1880.6 | -49 | 1881.4 | -50 | 0.00 | 2.439 | PASS |
| P-GSM | 1 | 890.2 | 935.2 | 934.4 | -49 | 933.6 | -50 | 0.36 | 2.439 | PASS |
| P-GSM | 1 | 890.2 | 935.2 | 936 | -49 | 936.8 | -50 | 1.29 | 2.439 | PASS |
| P-GSM | 62 | 902.4 | 947.4 | 946.6 | -49 | 945.8 | -50 | 0.00 | 2.439 | PASS |
| P-GSM | 62 | 902.4 | 947.4 | 948.2 | -49 | 949 | -50 | 0.00 | 2.439 | PASS |
| P-GSM | 124 | 914.8 | 959.8 | 959 | -49 | 958.2 | -50 | 0.00 | 2.439 | PASS |
| P-GSM | 124 | 914.8 | 959.8 | 960.6 | -49 | 961.4 | -50 | 0.00 | 2.439 | PASS |

Clause 4.2.33 Intermodulation rejection - control channels

| Band | Channel | Propagation | UL Frequency (MHz) | DL Frequency (MHz) | Interfer 1 Freq (MHz) | Interfer 1 Level (dBm) | Interfer 2 Freq (MHz) | Interfer 2 Level (dBm) | FER (%) | Limit(%) | Verdict |
|---------|---------|--------------|--------------------|--------------------|-----------------------|------------------------|-----------------------|------------------------|---------|----------|---------|
| GSM1800 | 512 | TUhigh/No FH | 1710.2 | 1805.2 | 1804.4 | -49 | 1803.6 | -50 | 0.00 | 4.368 | PASS |

| | | | | | | | | | | | |
|---------|-----|--------------|--------|--------|--------|-----|--------|-----|------|-------|------|
| GSM1800 | 512 | TUhigh/No FH | 1710.2 | 1805.2 | 1806 | -49 | 1806.8 | -50 | 0.00 | 4.368 | PASS |
| GSM1800 | 698 | TUhigh/No FH | 1747.4 | 1842.4 | 1841.6 | -49 | 1840.8 | -50 | 0.00 | 4.368 | PASS |
| GSM1800 | 698 | TUhigh/No FH | 1747.4 | 1842.4 | 1843.2 | -49 | 1844 | -50 | 0.00 | 4.368 | PASS |
| GSM1800 | 885 | TUhigh/No FH | 1784.8 | 1879.8 | 1879 | -49 | 1878.2 | -50 | 0.00 | 4.368 | PASS |
| GSM1800 | 885 | TUhigh/No FH | 1784.8 | 1879.8 | 1880.6 | -49 | 1881.4 | -50 | 0.00 | 4.368 | PASS |
| P-GSM | 1 | TUhigh/No FH | 890.2 | 935.2 | 934.4 | -49 | 933.6 | -50 | 0.00 | 8.961 | PASS |
| P-GSM | 1 | TUhigh/No FH | 890.2 | 935.2 | 936 | -49 | 936.8 | -50 | 0.00 | 8.961 | PASS |
| P-GSM | 62 | TUhigh/No FH | 902.4 | 947.4 | 946.6 | -49 | 945.8 | -50 | 0.00 | 8.961 | PASS |
| P-GSM | 62 | TUhigh/No FH | 902.4 | 947.4 | 948.2 | -49 | 949 | -50 | 0.00 | 8.961 | PASS |
| P-GSM | 124 | TUhigh/No FH | 914.8 | 959.8 | 959 | -49 | 958.2 | -50 | 0.00 | 8.961 | PASS |
| P-GSM | 124 | TUhigh/No FH | 914.8 | 959.8 | 960.6 | -49 | 961.4 | -50 | 0.00 | 8.961 | PASS |

Clause 4.2.35 AM suppression - speech channels

| Band | Channel | UL Frequency (MHz) | DL Frequency (MHz) | Interfer Freq (MHz) | Interfer Level (dBm) | BER (%) | Limit (%) | Verdict |
|---------|---------|--------------------|--------------------|---------------------|----------------------|---------|-----------|---------|
| GSM1800 | 512 | 1710.2 | 1805.2 | 1811.2 | -31 | 0.21 | 2.439 | PASS |
| GSM1800 | 698 | 1747.4 | 1842.4 | 1848.4 | -31 | 0.09 | 2.439 | PASS |
| GSM1800 | 885 | 1784.8 | 1879.8 | 1885.8 | -31 | 0.08 | 2.439 | PASS |
| GSM900 | 975 | 880.2 | 915.2 | 921.2 | -31 | 0.00 | 2.439 | PASS |
| GSM900 | 38 | 897.6 | 942.6 | 948.6 | -31 | 1.02 | 2.439 | PASS |
| GSM900 | 124 | 914.8 | 959.8 | 965.8 | -31 | 0.00 | 2.439 | PASS |

Clause 4.2.36 AM suppression - control channels

| Band | Channel | Propagation | UL Frequency (MHz) | DL Frequency (MHz) | Interfer Freq (MHz) | Interfer Level (dBm) | FER (%) | Limit (%) | Verdict |
|---------|---------|--------------|--------------------|--------------------|---------------------|----------------------|---------|-----------|---------|
| GSM1800 | 512 | TUhigh/No FH | 1710.2 | 1805.2 | 1811.2 | -31 | 0.00 | 4.368 | PASS |
| GSM1800 | 698 | TUhigh/No FH | 1747.4 | 1842.4 | 1848.4 | -31 | 0.00 | 4.368 | PASS |
| GSM1800 | 885 | TUhigh/No FH | 1784.8 | 1879.8 | 1885.8 | -31 | 0.00 | 4.368 | PASS |
| GSM900 | 975 | TUhigh/No FH | 880.2 | 915.2 | 921.2 | -31 | 0.00 | 8.961 | PASS |

| | | | | | | | | | |
|--------|-----|--------------|-------|-------|-------|-----|------|-------|------|
| GSM900 | 38 | TUhigh/No FH | 897.6 | 942.6 | 948.6 | -31 | 1.02 | 8.961 | PASS |
| GSM900 | 124 | TUhigh/No FH | 914.8 | 959.8 | 965.8 | -31 | 0.00 | 8.961 | PASS |

Clause 4.2.38 Adjacent channel rejection - speech channels (TCH)

| Band | Channel | UL Frequency (MHz) | DL Frequency (MHz) | Adjacent Channel | Interfer Freq (MHz) | Interfer Level (dBm) | Propagation | Result (%) | Limit (%) | Verdict |
|---------|---------|--------------------|--------------------|---------------------|---------------------|----------------------|-------------|------------|-----------|---------|
| GSM1800 | 698 | 1747.4 | 1747.4 | FER Adj -1 | 1842.2 | -89 | TUhigh | 0.00 | 3.371 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassIb RBER Adj -1 | 1842.2 | -89 | TUhigh | 0.00 | 0.027 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER Adj -1 | 1842.2 | -89 | TUhigh | 0.00 | 8.333 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | FER Adj +1 | 1842.6 | -89 | TUhigh | 0.00 | 3.371 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassIb RBER Adj +1 | 1842.6 | -89 | TUhigh | 0.00 | 0.027 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER Adj +1 | 1842.6 | -89 | TUhigh | 0.00 | 8.333 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | FER Adj -2 | 1842 | -57 | TUhigh | 0.00 | 3.371 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassIb RBER Adj -2 | 1842 | -57 | TUhigh | 0.00 | 0.027 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER Adj -2 | 1842 | -57 | TUhigh | 0.00 | 8.333 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | FER Adj +2 | 1842.8 | -57 | TUhigh | 0.00 | 3.371 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassIb RBER Adj +2 | 1842.8 | -57 | TUhigh | 0.00 | 0.027 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER Adj +2 | 1842.8 | -57 | TUhigh | 0.00 | 8.333 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | FER Adj -1 | 942.4 | -89 | TUhigh | 1.00 | 6.742 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassIb RBER Adj -1 | 942.4 | -89 | TUhigh | 0.01 | 0.042 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII | 942.4 | -89 | TUhigh | 2.16 | 8.333 | PASS |

| | | | | | | | | | | |
|--------|----|-------|-------|---------------------------|-------|-----|--------|------|-------|------|
| | | | | RBER Adj -1 | | | | | | |
| GSM900 | 38 | 897.6 | 897.6 | FER Adj +1 | 942.8 | -89 | TUhigh | 0.10 | 6.742 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassIb RBER Adj +1 | 942.8 | -89 | TUhigh | 0.02 | 0.042 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII RBER Adj +1 | 942.8 | -89 | TUhigh | 1.25 | 8.333 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | FER Adj -2 | 942.2 | -57 | TUhigh | 0.00 | 6.742 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassIb RBER Adj -2 | 942.2 | -57 | TUhigh | 0.01 | 0.042 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII RBER Adj -2 | 942.2 | -57 | TUhigh | 1.03 | 8.333 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | FER Adj +2 | 943 | -57 | TUhigh | 0.20 | 6.742 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassIb RBER Adj +2 | 943 | -57 | TUhigh | 0.00 | 0.042 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII RBER Adj +2 | 943 | -57 | TUhigh | 1.02 | 8.333 | PASS |

Clause 4.2.42 Reference sensitivity - TCH

| Band | Channel | UL Frequency (MHz) | DL Frequency (MHz) | Type | Ref Sensitivity Level (dBm) | BER (%) | Limit (%) | Verdict |
|---------|---------|-----------------------|-----------------------|------------------------|--------------------------------|------------|--------------|---------|
| GSM1800 | 512 | 1710.2 | 1710.2 | FER TU50 | -102 | 0.00 | 4.478 | PASS |
| GSM1800 | 512 | 1710.2 | 1710.2 | ClassIb RBER TU50 | -102 | 0.00 | 0.032 | PASS |
| GSM1800 | 512 | 1710.2 | 1710.2 | ClassII RBER TU50 | -102 | 0.01 | 8.33 | PASS |
| GSM1800 | 512 | 1710.2 | 1710.2 | ClassII RBER RA130 | -102 | 0.01 | 7.5 | PASS |
| GSM1800 | 512 | 1710.2 | 1710.2 | ClassII RBER HT100 | -102 | 0.02 | 9.333 | PASS |
| GSM1800 | Hopping | - | - | FER Static | -102 | 0.00 | 0.122 | PASS |
| GSM1800 | Hopping | - | - | ClassIb RBER Static | -102 | 0.00 | 0.41 | PASS |
| GSM1800 | Hopping | - | - | ClassII RBER Static | -102 | 0.02 | 2.439 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | FER TU50 | -102 | 0.00 | 4.478 | PASS |

| | | | | | | | | |
|---------|---------|--------|--------|------------------------|------|------|-------|------|
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassIb RBER TU50 | -102 | 0.00 | 0.032 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER TU50 | -102 | 0.02 | 8.33 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER RA130 | -102 | 0.02 | 7.5 | PASS |
| GSM1800 | 698 | 1747.4 | 1747.4 | ClassII RBER HT100 | -102 | 0.01 | 9.333 | PASS |
| GSM1800 | 885 | 1784.8 | 1784.8 | FER TU50 | -102 | 0.00 | 4.478 | PASS |
| GSM1800 | 885 | 1784.8 | 1784.8 | ClassIb RBER TU50 | -102 | 0.00 | 0.032 | PASS |
| GSM1800 | 885 | 1784.8 | 1784.8 | ClassII RBER TU50 | -102 | 0.01 | 8.33 | PASS |
| GSM1800 | 885 | 1784.8 | 1784.8 | ClassII RBER RA130 | -102 | 0.01 | 7.5 | PASS |
| GSM1800 | 885 | 1784.8 | 1784.8 | ClassII RBER HT100 | -102 | 0.02 | 9.333 | PASS |
| GSM900 | 975 | 880.2 | 880.2 | FER TU50 | -102 | 0.00 | 6.742 | PASS |
| GSM900 | 975 | 880.2 | 880.2 | ClassIb RBER TU50 | -102 | 0.00 | 0.042 | PASS |
| GSM900 | 975 | 880.2 | 880.2 | ClassII RBER TU50 | -102 | 0.01 | 8.33 | PASS |
| GSM900 | 975 | 880.2 | 880.2 | ClassII RBER RA250 | -102 | 0.01 | 7.5 | PASS |
| GSM900 | 975 | 880.2 | 880.2 | ClassII RBER HT100 | -102 | 0.02 | 9.333 | PASS |
| GSM900 | Hopping | - | - | FER Static | -102 | 0.00 | 0.122 | PASS |
| GSM900 | Hopping | - | - | ClassIb RBER Static | -102 | 0.00 | 0.41 | PASS |
| GSM900 | Hopping | - | - | ClassII RBER Static | -102 | 0.02 | 2.439 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | FER TU50 | -102 | 0.00 | 6.742 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassIb RBER TU50 | -102 | 0.00 | 0.042 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII RBER TU50 | -102 | 4.68 | 8.33 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII RBER RA250 | -102 | 1.92 | 7.5 | PASS |
| GSM900 | 38 | 897.6 | 897.6 | ClassII RBER HT100 | -102 | 4.20 | 9.333 | PASS |
| GSM900 | 124 | 914.8 | 914.8 | FER TU50 | -102 | 0.00 | 6.742 | PASS |
| GSM900 | 124 | 914.8 | 914.8 | ClassIb RBER TU50 | -102 | 0.00 | 0.042 | PASS |
| GSM900 | 124 | 914.8 | 914.8 | ClassII RBER | -102 | 0.00 | 8.33 | PASS |

| | | | | | | | | |
|--------|-----|-------|-------|-----------------------|------|------|-------|------|
| | | | | TU50 | | | | |
| GSM900 | 124 | 914.8 | 914.8 | ClassII RBER RA250 | -102 | 0.01 | 7.5 | PASS |
| GSM900 | 124 | 914.8 | 914.8 | ClassII RBER HT100 | -102 | 0.00 | 9.333 | PASS |

Clause 4.2.43 Reference sensitivity - FACCH

| Band | Channel | Propagation | UL Frequency (MHz) | DL Frequency (MHz) | Ref Sensitivity Level (dBm) | FER (%) | Limit (%) | Verdict |
|---------|---------|-------------|-----------------------|-----------------------|--------------------------------|------------|--------------|---------|
| GSM1800 | 512 | TUhigh | 1710.2 | 1805.2 | -102 | 0.00 | 8.961 | PASS |
| GSM1800 | 698 | TUhigh | 1747.4 | 1842.4 | -102 | 0.00 | 8.961 | PASS |
| GSM1800 | 885 | TUhigh | 1784.8 | 1879.8 | -102 | 0.00 | 8.961 | PASS |
| GSM900 | 975 | TUhigh | 880.2 | 915.2 | -102 | 0.00 | 8.961 | PASS |
| GSM900 | 38 | TUhigh | 897.6 | 942.6 | -102 | 0.30 | 8.961 | PASS |
| GSM900 | 124 | TUhigh | 914.8 | 959.8 | -102 | 0.00 | 8.961 | PASS |

Clause 4.2.6 Spurious emissions in the MS receive bands

| Band | Channel | Frequency (MHz) | PCL | RBW (KHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) | Verdict |
|---------|---------|-----------------|-----|-----------|-----------------|------------------|-------------|---------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 925.00 | -90.93 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 925.20 | -91.13 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 925.40 | -90.8 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 925.60 | -90.97 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 925.80 | -91.09 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 926.00 | -90.89 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 926.20 | -90.39 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 926.40 | -90.71 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 926.60 | -91.12 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 926.80 | -91.13 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 927.00 | -91.17 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 927.20 | -90.97 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 927.40 | -91.41 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 927.60 | -91.18 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 927.80 | -91.19 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 928.00 | -90.86 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 928.20 | -91.33 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 928.40 | -91.11 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 928.60 | -91.36 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 928.80 | -90.95 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 929.00 | -91.12 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 929.20 | -91.14 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 929.40 | -90.72 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 929.60 | -91.25 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 929.80 | -90.8 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 930.00 | -90.94 | -67 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 930.20 | -91.28 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 930.40 | -91 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 930.60 | -90.89 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 930.80 | -91.28 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 931.00 | -91.26 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 931.20 | -90.99 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 931.40 | -91.29 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 931.60 | -90.63 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 931.80 | -91.14 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 932.00 | -91.09 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 932.20 | -91.1 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 932.40 | -91.2 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 932.60 | -91.29 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 932.80 | -90.82 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 933.00 | -90.99 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 933.20 | -91.32 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 933.40 | -90.98 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 933.60 | -90.97 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 933.80 | -91.01 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 934.00 | -91.22 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 934.20 | -91.2 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 934.40 | -91.15 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 934.60 | -91.16 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 934.80 | -90.94 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 935.00 | -90.79 | -67 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 935.00 | -91.17 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 935.20 | -91.03 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 935.40 | -90.69 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 935.60 | -91.02 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 935.80 | -90.65 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 936.00 | -91.07 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 936.20 | -90.98 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 936.40 | -90.56 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 936.60 | -91.25 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 936.80 | -91.1 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 937.00 | -91.14 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 937.20 | -91.27 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 937.40 | -91.13 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 937.60 | -91.41 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 937.80 | -90.98 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 938.00 | -91 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 938.20 | -91.05 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 938.40 | -91.22 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 938.60 | -91.22 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 938.80 | -91.24 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 939.00 | -91.35 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 939.20 | -90.78 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 939.40 | -90.77 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 939.60 | -91.2 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 939.80 | -91.07 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 940.00 | -91.09 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 940.20 | -91.03 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 940.40 | -90.97 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 940.60 | -91.14 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 940.80 | -90.97 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 941.00 | -91.29 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 941.20 | -91.32 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 941.40 | -90.99 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 941.60 | -91.15 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 941.80 | -91.02 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 942.00 | -90.67 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 942.20 | -91.23 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 942.40 | -91.02 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 942.60 | -91.2 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 942.80 | -91.18 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 943.00 | -90.79 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 943.20 | -90.99 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 943.40 | -90.97 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 943.60 | -90.94 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 943.80 | -91.33 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 944.00 | -91.08 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 944.20 | -90.84 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 944.40 | -91.03 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 944.60 | -90.72 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 944.80 | -91.19 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 945.00 | -91.3 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 945.20 | -91.05 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 945.40 | -90.65 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 945.60 | -90.75 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 945.80 | -91.02 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 946.00 | -91.22 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 946.20 | -90.99 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 946.40 | -90.51 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 946.60 | -91.18 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 946.80 | -91.13 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 947.00 | -90.94 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 947.20 | -90.92 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 947.40 | -91.2 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 947.60 | -91.03 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 947.80 | -90.76 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 948.00 | -91.1 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 948.20 | -91.28 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 948.40 | -91.07 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 948.60 | -90.94 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 948.80 | -91.26 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 949.00 | -91.1 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 949.20 | -90.81 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 949.40 | -91.2 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 949.60 | -91.17 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 949.80 | -91.24 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 950.00 | -90.95 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 950.20 | -91.12 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 950.40 | -91.11 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 950.60 | -91.32 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 950.80 | -91.41 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 951.00 | -91.39 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 951.20 | -91.37 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 951.40 | -91.21 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 951.60 | -91.38 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 951.80 | -90.99 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 952.00 | -91.14 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 952.20 | -91.21 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 952.40 | -91.51 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 952.60 | -91.06 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 952.80 | -90.91 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 953.00 | -90.71 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 953.20 | -90.84 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 953.40 | -91.01 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 953.60 | -90.73 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 953.80 | -91.27 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 954.00 | -90.96 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 954.20 | -91.32 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 954.40 | -91.22 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 954.60 | -91.38 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 954.80 | -91.12 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 955.00 | -91.13 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 955.20 | -91.24 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 955.40 | -91.27 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 955.60 | -91 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 955.80 | -91.16 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 956.00 | -91.23 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 956.20 | -91.23 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 956.40 | -91.26 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 956.60 | -91.01 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 956.80 | -91.11 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 957.00 | -91.04 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 957.20 | -91.18 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 957.40 | -91.39 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 957.60 | -91.21 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 957.80 | -91.16 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 958.00 | -91.13 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 958.20 | -91.2 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 958.40 | -91.24 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 958.60 | -91.27 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 958.80 | -91.25 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 959.00 | -91.04 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 959.20 | -91.2 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 959.40 | -90.94 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 959.60 | -91.46 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 959.80 | -91.04 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 960.00 | -91.12 | -79 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1805.00 | -90.59 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1805.20 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1805.40 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1805.60 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1805.80 | -90.91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1806.00 | -91.02 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1806.20 | -91.11 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1806.40 | -90.99 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1806.60 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1806.80 | -90.72 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1807.00 | -90.98 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1807.20 | -90.8 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1807.40 | -90.72 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1807.60 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1807.80 | -90.71 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1808.00 | -90.98 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1808.20 | -91.06 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1808.40 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1808.60 | -90.65 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1808.80 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1809.00 | -91.06 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1809.20 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1809.40 | -91.13 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1809.60 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1809.80 | -90.54 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1810.00 | -91.1 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1810.20 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1810.40 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1810.60 | -91.01 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1810.80 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1811.00 | -90.87 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1811.20 | -90.8 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1811.40 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1811.60 | -90.49 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1811.80 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1812.00 | -90.67 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1812.20 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1812.40 | -90.53 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1812.60 | -90.99 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1812.80 | -90.67 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1813.00 | -91.13 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1813.20 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1813.40 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1813.60 | -91.15 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1813.80 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1814.00 | -90.91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1814.20 | -91.1 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1814.40 | -90.99 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1814.60 | -91.09 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1814.80 | -91.17 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1815.00 | -90.35 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1815.20 | -90.65 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1815.40 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1815.60 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1815.80 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1816.00 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1816.20 | -91.15 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1816.40 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1816.60 | -90.82 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1816.80 | -90.74 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1817.00 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1817.20 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1817.40 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1817.60 | -91.04 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1817.80 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1818.00 | -90.89 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1818.20 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1818.40 | -90.87 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1818.60 | -90.98 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1818.80 | -91.09 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1819.00 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1819.20 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1819.40 | -90.9 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1819.60 | -90.56 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1819.80 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1820.00 | -90.71 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1820.20 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1820.40 | -91.08 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1820.60 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1820.80 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1821.00 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1821.20 | -90.66 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1821.40 | -90.76 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1821.60 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1821.80 | -90.96 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1822.00 | -90.45 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1822.20 | -90.94 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1822.40 | -90.53 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1822.60 | -91.04 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1822.80 | -91.02 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1823.00 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1823.20 | -90.99 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1823.40 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1823.60 | -90.69 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1823.80 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1824.00 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1824.20 | -91.05 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1824.40 | -90.97 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1824.60 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1824.80 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1825.00 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1825.20 | -90.49 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1825.40 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1825.60 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1825.80 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1826.00 | -90.82 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1826.20 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1826.40 | -90.98 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1826.60 | -90.92 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1826.80 | -90.69 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1827.00 | -90.79 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1827.20 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1827.40 | -90.97 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1827.60 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1827.80 | -90.62 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1828.00 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1828.20 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1828.40 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1828.60 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1828.80 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1829.00 | -91.03 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1829.20 | -90.56 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1829.40 | -90.69 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1829.60 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1829.80 | -90.94 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1830.00 | -90.87 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1830.20 | -91.09 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1830.40 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1830.60 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1830.80 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1831.00 | -91.05 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1831.20 | -91.21 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1831.40 | -90.82 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1831.60 | -90.62 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1831.80 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1832.00 | -91.07 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1832.20 | -91.08 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1832.40 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1832.60 | -91.15 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1832.80 | -90.82 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1833.00 | -91.13 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1833.20 | -90.63 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1833.40 | -90.81 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1833.60 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1833.80 | -91.01 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1834.00 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1834.20 | -90.81 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1834.40 | -90.42 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1834.60 | -90.92 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1834.80 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1835.00 | -90.54 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1835.20 | -91.02 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1835.40 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1835.60 | -90.64 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1835.80 | -91.14 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1836.00 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1836.20 | -91.04 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1836.40 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1836.60 | -91.16 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1836.80 | -90.55 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1837.00 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1837.20 | -91.04 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1837.40 | -90.81 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1837.60 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1837.80 | -90.93 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1838.00 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1838.20 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1838.40 | -90.96 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1838.60 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1838.80 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1839.00 | -90.52 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1839.20 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1839.40 | -90.56 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1839.60 | -90.97 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1839.80 | -90.76 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1840.00 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1840.20 | -90.87 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1840.40 | -90.94 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1840.60 | -90.79 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1840.80 | -90.74 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1841.00 | -90.94 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1841.20 | -90.89 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1841.40 | -90.89 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1841.60 | -90.3 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1841.80 | -90.79 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1842.00 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1842.20 | -90.74 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1842.40 | -91.08 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1842.60 | -90.64 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1842.80 | -90.97 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1843.00 | -90.62 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1843.20 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1843.40 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1843.60 | -90.79 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1843.80 | -91.17 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1844.00 | -90.44 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1844.20 | -90.35 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1844.40 | -90.58 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1844.60 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1844.80 | -91.15 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1845.00 | -90.94 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1845.20 | -90.31 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1845.40 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1845.60 | -91.21 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1845.80 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1846.00 | -90.56 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1846.20 | -90.8 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1846.40 | -91.07 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1846.60 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1846.80 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1847.00 | -90.58 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1847.20 | -90.76 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1847.40 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1847.60 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1847.80 | -90.99 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1848.00 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1848.20 | -90.96 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1848.40 | -90.66 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1848.60 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1848.80 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1849.00 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1849.20 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1849.40 | -90.69 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1849.60 | -90.76 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1849.80 | -90.72 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1850.00 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1850.20 | -90.69 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1850.40 | -90.96 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1850.60 | -90.51 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1850.80 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1851.00 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1851.20 | -91.04 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1851.40 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1851.60 | -90.99 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1851.80 | -90.92 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1852.00 | -90.46 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1852.20 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1852.40 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1852.60 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1852.80 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1853.00 | -90.96 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1853.20 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1853.40 | -90.96 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1853.60 | -90.76 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1853.80 | -90.4 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1854.00 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1854.20 | -90.87 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1854.40 | -90.92 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1854.60 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1854.80 | -90.81 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1855.00 | -90.59 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1855.20 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1855.40 | -90.71 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1855.60 | -90.68 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1855.80 | -90.64 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1856.00 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1856.20 | -90.89 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1856.40 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1856.60 | -90.63 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1856.80 | -90.86 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1857.00 | -90.72 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1857.20 | -90.54 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1857.40 | -91.11 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1857.60 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1857.80 | -90.82 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1858.00 | -90.79 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1858.20 | -90.95 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1858.40 | -90.41 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1858.60 | -90.72 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1858.80 | -90.47 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1859.00 | -90.67 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1859.20 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1859.40 | -90.49 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1859.60 | -90.48 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1859.80 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1860.00 | -90.85 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1860.20 | -90.5 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1860.40 | -90.68 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1860.60 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1860.80 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1861.00 | -90.68 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1861.20 | -90.53 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1861.40 | -90.31 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1861.60 | -90.79 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1861.80 | -90.44 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1862.00 | -90.59 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1862.20 | -90.39 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1862.40 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1862.60 | -90.97 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1862.80 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1863.00 | -90.64 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1863.20 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1863.40 | -90.73 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1863.60 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1863.80 | -90.74 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1864.00 | -90.43 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1864.20 | -90.62 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1864.40 | -90.22 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1864.60 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1864.80 | -90.53 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1865.00 | -90.8 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1865.20 | -90.83 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1865.40 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1865.60 | -90.47 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1865.80 | -90.58 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1866.00 | -90.37 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1866.20 | -90.34 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1866.40 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1866.60 | -90.32 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1866.80 | -90.92 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1867.00 | -90.39 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1867.20 | -90.56 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1867.40 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1867.60 | -90.35 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1867.80 | -90.51 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1868.00 | -90.71 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1868.20 | -90.53 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1868.40 | -90.68 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1868.60 | -90.24 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1868.80 | -91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1869.00 | -90.55 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1869.20 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1869.40 | -90.48 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1869.60 | -90.58 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1869.80 | -90.84 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1870.00 | -90.82 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1870.20 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1870.40 | -90.67 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1870.60 | -90.63 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1870.80 | -90.91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1871.00 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1871.20 | -90.71 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1871.40 | -90.89 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1871.60 | -90.65 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1871.80 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1872.00 | -90.42 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1872.20 | -90.64 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1872.40 | -90.8 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1872.60 | -90.58 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1872.80 | -90.74 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1873.00 | -90.47 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1873.20 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1873.40 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1873.60 | -91.01 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1873.80 | -90.78 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1874.00 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1874.20 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1874.40 | -90.45 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1874.60 | -90.33 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1874.80 | -90.4 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1875.00 | -90.68 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1875.20 | -90.77 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1875.40 | -90.18 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1875.60 | -90.47 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1875.80 | -90.64 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1876.00 | -90.57 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1876.20 | -90.14 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1876.40 | -90.58 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1876.60 | -90.33 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1876.80 | -90.88 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1877.00 | -90.51 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1877.20 | -90.61 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1877.40 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1877.60 | -90.66 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1877.80 | -90.8 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1878.00 | -90.49 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1878.20 | -90.89 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1878.40 | -90.75 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1878.60 | -90.31 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1878.80 | -90.62 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1879.00 | -90.6 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1879.20 | -90.91 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1879.40 | -90.66 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1879.60 | -90.38 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1879.80 | -90.7 | -71 | PASS |
| GSM1800 | 512 | 1710.2 | 0 | 100 | 1880.00 | -90.54 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 925.00 | -90.55 | -67 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 925.20 | -90.95 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 925.40 | -91 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 925.60 | -91.24 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 925.80 | -91.05 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 926.00 | -91.08 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 926.20 | -90.82 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 926.40 | -90.94 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 926.60 | -91.16 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 926.80 | -91.19 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 927.00 | -90.99 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 927.20 | -91.01 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 927.40 | -90.94 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 927.60 | -90.85 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 927.80 | -90.81 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 928.00 | -91.17 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 928.20 | -91.08 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 928.40 | -91.06 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 928.60 | -90.78 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 928.80 | -90.93 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 929.00 | -91.11 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 929.20 | -91.25 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 929.40 | -91.12 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 929.60 | -91.4 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 929.80 | -90.95 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 930.00 | -90.87 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 930.20 | -91.02 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 930.40 | -91.12 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 930.60 | -91.21 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 930.80 | -90.88 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 931.00 | -90.91 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 931.20 | -91.29 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 931.40 | -91.08 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 931.60 | -90.94 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 931.80 | -91.25 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 932.00 | -90.94 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 932.20 | -91.27 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 932.40 | -90.88 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 932.60 | -91.41 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 932.80 | -91.07 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 933.00 | -91.03 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 933.20 | -91.15 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 933.40 | -91.29 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 933.60 | -90.86 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 933.80 | -90.67 | -67 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 934.00 | -90.92 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 934.20 | -91.07 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 934.40 | -90.77 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 934.60 | -91.09 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 934.80 | -90.99 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 935.00 | -91.06 | -67 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 935.00 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 935.20 | -91.33 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 935.40 | -90.98 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 935.60 | -91.14 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 935.80 | -91.37 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 936.00 | -91.19 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 936.20 | -90.87 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 936.40 | -91.41 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 936.60 | -90.8 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 936.80 | -90.7 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 937.00 | -91.18 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 937.20 | -91.04 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 937.40 | -90.98 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 937.60 | -91.05 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 937.80 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 938.00 | -91.3 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 938.20 | -90.27 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 938.40 | -91.06 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 938.60 | -91.26 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 938.80 | -91.3 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 939.00 | -91.2 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 939.20 | -91.12 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 939.40 | -91.04 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 939.60 | -91.31 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 939.80 | -90.99 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 940.00 | -91.08 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 940.20 | -91.07 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 940.40 | -90.95 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 940.60 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 940.80 | -91.05 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 941.00 | -90.9 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 941.20 | -91.05 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 941.40 | -91.14 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 941.60 | -90.76 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 941.80 | -91.16 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 942.00 | -91.25 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 942.20 | -91.2 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 942.40 | -91.32 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 942.60 | -91.24 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 942.80 | -91.19 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 943.00 | -91.03 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 943.20 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 943.40 | -91.16 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 943.60 | -91.27 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 943.80 | -91.21 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 944.00 | -91.16 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 944.20 | -90.7 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 944.40 | -91.17 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 944.60 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 944.80 | -90.91 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 945.00 | -91.11 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 945.20 | -91.28 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 945.40 | -90.92 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 945.60 | -91.43 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 945.80 | -90.91 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 946.00 | -91.03 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 946.20 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 946.40 | -91.33 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 946.60 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 946.80 | -91.04 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 947.00 | -91.42 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 947.20 | -91.1 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 947.40 | -91.25 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 947.60 | -90.92 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 947.80 | -91.14 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 948.00 | -91.21 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 948.20 | -90.91 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 948.40 | -90.95 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 948.60 | -91.12 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 948.80 | -91.23 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 949.00 | -90.88 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 949.20 | -91.08 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 949.40 | -91.17 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 949.60 | -91.28 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 949.80 | -91.16 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 950.00 | -91.18 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 950.20 | -91.3 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 950.40 | -91.28 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 950.60 | -91.44 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 950.80 | -91.41 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 951.00 | -91.42 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 951.20 | -91.19 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 951.40 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 951.60 | -91.19 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 951.80 | -91.3 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 952.00 | -91.04 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 952.20 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 952.40 | -91.35 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 952.60 | -91.08 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 952.80 | -91.58 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 953.00 | -91.25 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 953.20 | -91.51 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 953.40 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 953.60 | -91.28 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 953.80 | -91.19 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 954.00 | -91.33 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 954.20 | -91.22 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 954.40 | -91.44 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 954.60 | -91 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 954.80 | -90.99 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 955.00 | -91.08 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 955.20 | -90.9 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 955.40 | -91 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 955.60 | -90.94 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 955.80 | -91.03 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 956.00 | -91.14 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 956.20 | -90.8 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 956.40 | -90.89 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 956.60 | -90.7 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 956.80 | -90.88 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 957.00 | -90.8 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 957.20 | -91.25 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 957.40 | -91.21 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 957.60 | -91.41 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 957.80 | -91.15 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 958.00 | -91.03 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 958.20 | -91.1 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 958.40 | -90.87 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 958.60 | -91.34 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 958.80 | -91.18 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 959.00 | -91.26 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 959.20 | -91.25 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 959.40 | -91.36 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 959.60 | -91.15 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 959.80 | -91.5 | -79 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 960.00 | -91.08 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1805.00 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1805.20 | -90.88 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1805.40 | -91.02 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1805.60 | -91.16 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1805.80 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1806.00 | -90.34 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1806.20 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1806.40 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1806.60 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1806.80 | -91.13 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1807.00 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1807.20 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1807.40 | -91.01 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1807.60 | -91.13 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1807.80 | -91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1808.00 | -91.12 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1808.20 | -90.57 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1808.40 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1808.60 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1808.80 | -91.04 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1809.00 | -91.05 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1809.20 | -90.99 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1809.40 | -90.97 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1809.60 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1809.80 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1810.00 | -91.04 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1810.20 | -91.15 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1810.40 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1810.60 | -91.06 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1810.80 | -90.6 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1811.00 | -91.03 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1811.20 | -90.44 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1811.40 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1811.60 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1811.80 | -90.38 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1812.00 | -90.82 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1812.20 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1812.40 | -90.53 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1812.60 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1812.80 | -90.69 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1813.00 | -91.13 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1813.20 | -90.99 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1813.40 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1813.60 | -90.88 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1813.80 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1814.00 | -90.51 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1814.20 | -90.63 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1814.40 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1814.60 | -91.33 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1814.80 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1815.00 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1815.20 | -90.64 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1815.40 | -91.11 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1815.60 | -90.65 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1815.80 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1816.00 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1816.20 | -90.94 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1816.40 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1816.60 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1816.80 | -90.97 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1817.00 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1817.20 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1817.40 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1817.60 | -90.99 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1817.80 | -91.01 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1818.00 | -91.29 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1818.20 | -91.09 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1818.40 | -91.06 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1818.60 | -91.22 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1818.80 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1819.00 | -90.57 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1819.20 | -90.65 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1819.40 | -91.1 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1819.60 | -90.75 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1819.80 | -90.67 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1820.00 | -90.95 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1820.20 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1820.40 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1820.60 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1820.80 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1821.00 | -91.08 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1821.20 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1821.40 | -90.96 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1821.60 | -90.77 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1821.80 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1822.00 | -91.13 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1822.20 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1822.40 | -90.94 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1822.60 | -90.5 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1822.80 | -90.59 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1823.00 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1823.20 | -91.03 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1823.40 | -90.99 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1823.60 | -90.66 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1823.80 | -91.11 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1824.00 | -90.95 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1824.20 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1824.40 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1824.60 | -90.55 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1824.80 | -90.99 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1825.00 | -91.02 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1825.20 | -90.62 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1825.40 | -90.59 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1825.60 | -90.62 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1825.80 | -90.79 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1826.00 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1826.20 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1826.40 | -90.48 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1826.60 | -90.88 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1826.80 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1827.00 | -90.55 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1827.20 | -91.1 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1827.40 | -90.98 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1827.60 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1827.80 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1828.00 | -91.11 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1828.20 | -90.79 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1828.40 | -90.38 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1828.60 | -91.1 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1828.80 | -91.01 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1829.00 | -91.06 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1829.20 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1829.40 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1829.60 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1829.80 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1830.00 | -90.6 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1830.20 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1830.40 | -91.08 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1830.60 | -90.79 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1830.80 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1831.00 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1831.20 | -90.97 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1831.40 | -90.52 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1831.60 | -90.61 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1831.80 | -91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1832.00 | -90.97 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1832.20 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1832.40 | -90.89 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1832.60 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1832.80 | -90.5 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1833.00 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1833.20 | -90.99 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1833.40 | -90.96 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1833.60 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1833.80 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1834.00 | -90.64 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1834.20 | -90.45 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1834.40 | -91.06 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1834.60 | -91.11 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1834.80 | -90.97 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1835.00 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1835.20 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1835.40 | -90.95 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1835.60 | -90.68 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1835.80 | -90.97 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1836.00 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1836.20 | -90.54 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1836.40 | -90.88 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1836.60 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1836.80 | -90.88 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1837.00 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1837.20 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1837.40 | -91.08 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1837.60 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1837.80 | -90.95 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1838.00 | -90.59 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1838.20 | -90.88 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1838.40 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1838.60 | -90.75 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1838.80 | -91.08 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1839.00 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1839.20 | -90.45 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1839.40 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1839.60 | -91.02 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1839.80 | -90.69 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1840.00 | -91.2 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1840.20 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1840.40 | -90.89 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1840.60 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1840.80 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1841.00 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1841.20 | -90.88 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1841.40 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1841.60 | -90.75 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1841.80 | -90.62 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1842.00 | -91.11 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1842.20 | -90.79 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1842.40 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1842.60 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1842.80 | -91.03 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1843.00 | -90.98 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1843.20 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1843.40 | -90.94 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1843.60 | -90.95 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1843.80 | -90.94 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1844.00 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1844.20 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1844.40 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1844.60 | -91.21 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1844.80 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1845.00 | -91.08 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1845.20 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1845.40 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1845.60 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1845.80 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1846.00 | -90.55 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1846.20 | -90.79 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1846.40 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1846.60 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1846.80 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1847.00 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1847.20 | -90.65 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1847.40 | -91.11 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1847.60 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1847.80 | -90.82 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1848.00 | -90.95 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1848.20 | -90.89 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1848.40 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1848.60 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1848.80 | -90.59 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1849.00 | -91.01 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1849.20 | -90.64 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1849.40 | -91.02 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1849.60 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1849.80 | -90.68 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1850.00 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1850.20 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1850.40 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1850.60 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1850.80 | -90.79 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1851.00 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1851.20 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1851.40 | -90.76 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1851.60 | -90.6 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1851.80 | -90.69 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1852.00 | -90.69 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1852.20 | -90.77 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1852.40 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1852.60 | -90.82 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1852.80 | -91.1 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1853.00 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1853.20 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1853.40 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1853.60 | -91.02 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1853.80 | -91.16 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1854.00 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1854.20 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1854.40 | -90.89 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1854.60 | -90.94 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1854.80 | -90.55 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1855.00 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1855.20 | -90.63 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1855.40 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1855.60 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1855.80 | -90.35 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1856.00 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1856.20 | -90.7 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1856.40 | -90.37 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1856.60 | -91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1856.80 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1857.00 | -90.77 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1857.20 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1857.40 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1857.60 | -90.65 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1857.80 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1858.00 | -91.04 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1858.20 | -91.01 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1858.40 | -90.9 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1858.60 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1858.80 | -90.3 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1859.00 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1859.20 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1859.40 | -91.07 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1859.60 | -90.92 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1859.80 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1860.00 | -90.83 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1860.20 | -90.42 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1860.40 | -90.45 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1860.60 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1860.80 | -90.69 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1861.00 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1861.20 | -90.5 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1861.40 | -90.49 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1861.60 | -90.21 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1861.80 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1862.00 | -90.32 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1862.20 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1862.40 | -90.66 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1862.60 | -91.09 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1862.80 | -90.34 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1863.00 | -90.81 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1863.20 | -90.91 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1863.40 | -90.39 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1863.60 | -90.6 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1863.80 | -90.42 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1864.00 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1864.20 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1864.40 | -90.4 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1864.60 | -90.58 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1864.80 | -90.56 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1865.00 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1865.20 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1865.40 | -90.84 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1865.60 | -90.87 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1865.80 | -90.89 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1866.00 | -90.43 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1866.20 | -90.64 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1866.40 | -90.8 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1866.60 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1866.80 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1867.00 | -90.3 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1867.20 | -90.48 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1867.40 | -90.56 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1867.60 | -90.75 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1867.80 | -90.97 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1868.00 | -90.56 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1868.20 | -90.12 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1868.40 | -90.23 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1868.60 | -90.75 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1868.80 | -90.42 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1869.00 | -90.85 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1869.20 | -90.66 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1869.40 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1869.60 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1869.80 | -90.94 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1870.00 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1870.20 | -90.52 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1870.40 | -90.26 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1870.60 | -90.66 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1870.80 | -90.68 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1871.00 | -91.04 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1871.20 | -90.61 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1871.40 | -90.78 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1871.60 | -90.64 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1871.80 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1872.00 | -90.43 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1872.20 | -90.72 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1872.40 | -90.93 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1872.60 | -90.5 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1872.80 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1873.00 | -90.86 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1873.20 | -90.66 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1873.40 | -90.73 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1873.60 | -90.59 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1873.80 | -90.35 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1874.00 | -90.43 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1874.20 | -90.54 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1874.40 | -90.74 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1874.60 | -90.8 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1874.80 | -90.56 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1875.00 | -90.54 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1875.20 | -90.69 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1875.40 | -90.49 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1875.60 | -90.41 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1875.80 | -90.63 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1876.00 | -90.64 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1876.20 | -90.25 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1876.40 | -90.54 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1876.60 | -90.65 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1876.80 | -90.71 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1877.00 | -90.51 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1877.20 | -90.52 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1877.40 | -90.63 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1877.60 | -90.5 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1877.80 | -90.52 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1878.00 | -90.41 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1878.20 | -90.35 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1878.40 | -90.6 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1878.60 | -90.46 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1878.80 | -90.53 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1879.00 | -90.82 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1879.20 | -90.55 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1879.40 | -90.55 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1879.60 | -90.46 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1879.80 | -90.42 | -71 | PASS |
| GSM1800 | 698 | 1747.4 | 0 | 100 | 1880.00 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 925.00 | -90.84 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 925.20 | -91.21 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 925.40 | -90.84 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 925.60 | -91.13 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 925.80 | -91 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 926.00 | -91.23 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 926.20 | -91.3 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 926.40 | -91.01 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 926.60 | -91.11 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 926.80 | -90.9 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 927.00 | -91.31 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 927.20 | -91 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 927.40 | -91.23 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 927.60 | -91.04 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 927.80 | -91.18 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 928.00 | -91.09 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 928.20 | -91.13 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 928.40 | -90.77 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 928.60 | -91.14 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 928.80 | -90.73 | -67 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 929.00 | -91.04 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 929.20 | -90.85 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 929.40 | -90.61 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 929.60 | -90.76 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 929.80 | -91.2 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 930.00 | -91.37 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 930.20 | -91.12 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 930.40 | -91.02 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 930.60 | -91.17 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 930.80 | -90.94 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 931.00 | -91.12 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 931.20 | -91.09 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 931.40 | -91.03 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 931.60 | -90.97 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 931.80 | -90.95 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 932.00 | -90.65 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 932.20 | -91.01 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 932.40 | -90.99 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 932.60 | -91.07 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 932.80 | -90.95 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 933.00 | -90.85 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 933.20 | -90.95 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 933.40 | -90.97 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 933.60 | -90.98 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 933.80 | -90.95 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 934.00 | -91.14 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 934.20 | -91.16 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 934.40 | -91.36 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 934.60 | -91.24 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 934.80 | -90.93 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 935.00 | -91.21 | -67 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 935.00 | -91.15 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 935.20 | -90.97 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 935.40 | -90.94 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 935.60 | -91.17 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 935.80 | -90.94 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 936.00 | -91.36 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 936.20 | -91.1 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 936.40 | -91.04 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 936.60 | -90.84 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 936.80 | -91 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 937.00 | -91.03 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 937.20 | -91.18 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 937.40 | -91.21 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 937.60 | -91.07 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 937.80 | -91.09 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 938.00 | -90.88 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 938.20 | -91.08 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 938.40 | -91.19 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 938.60 | -91 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 938.80 | -90.9 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 939.00 | -91.04 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 939.20 | -91.18 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 939.40 | -91.4 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 939.60 | -91.48 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 939.80 | -91.32 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 940.00 | -91.43 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 940.20 | -91.13 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 940.40 | -91.04 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 940.60 | -91.18 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 940.80 | -91.16 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 941.00 | -90.86 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 941.20 | -91.07 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 941.40 | -91.11 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 941.60 | -91.18 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 941.80 | -91.25 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 942.00 | -91.11 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 942.20 | -90.69 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 942.40 | -91.28 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 942.60 | -91.34 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 942.80 | -91.2 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 943.00 | -91.06 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 943.20 | -91.27 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 943.40 | -91.38 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 943.60 | -91.11 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 943.80 | -91.07 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 944.00 | -91.18 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 944.20 | -90.96 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 944.40 | -91.07 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 944.60 | -91.32 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 944.80 | -91.06 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 945.00 | -90.93 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 945.20 | -91.46 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 945.40 | -91.15 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 945.60 | -91.01 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 945.80 | -90.94 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 946.00 | -90.64 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 946.20 | -91.24 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|--------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 946.40 | -91.05 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 946.60 | -90.77 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 946.80 | -91.17 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 947.00 | -91.49 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 947.20 | -91.03 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 947.40 | -91.23 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 947.60 | -90.81 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 947.80 | -91.15 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 948.00 | -91.37 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 948.20 | -90.77 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 948.40 | -90.76 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 948.60 | -91.01 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 948.80 | -90.79 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 949.00 | -91.37 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 949.20 | -91.28 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 949.40 | -90.98 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 949.60 | -91.05 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 949.80 | -91.18 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 950.00 | -91.33 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 950.20 | -90.87 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 950.40 | -91.27 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 950.60 | -91.09 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 950.80 | -90.76 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 951.00 | -90.95 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 951.20 | -91.32 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 951.40 | -91.25 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 951.60 | -91.22 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 951.80 | -91.43 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 952.00 | -90.92 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 952.20 | -91.09 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 952.40 | -91.19 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 952.60 | -91.21 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 952.80 | -91.15 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 953.00 | -91.16 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 953.20 | -91.06 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 953.40 | -90.82 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 953.60 | -91.43 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 953.80 | -91.01 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 954.00 | -91.31 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 954.20 | -91.13 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 954.40 | -91.1 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 954.60 | -91.05 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 954.80 | -91.41 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 955.00 | -90.85 | -79 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 955.20 | -91 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 955.40 | -91.38 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 955.60 | -91.12 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 955.80 | -91.23 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 956.00 | -91.21 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 956.20 | -91.29 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 956.40 | -91 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 956.60 | -91.04 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 956.80 | -91.43 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 957.00 | -91.35 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 957.20 | -91.25 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 957.40 | -91.42 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 957.60 | -91.14 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 957.80 | -91.15 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 958.00 | -90.84 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 958.20 | -91.17 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 958.40 | -91.21 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 958.60 | -91 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 958.80 | -91.07 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 959.00 | -91.09 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 959.20 | -91.27 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 959.40 | -91.1 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 959.60 | -91.09 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 959.80 | -91.43 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 960.00 | -91.37 | -79 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1805.00 | -91.19 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1805.20 | -90.58 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1805.40 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1805.60 | -91.27 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1805.80 | -91.04 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1806.00 | -91.09 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1806.20 | -91.06 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1806.40 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1806.60 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1806.80 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1807.00 | -90.68 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1807.20 | -90.8 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1807.40 | -90.8 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1807.60 | -91.14 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1807.80 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1808.00 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1808.20 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1808.40 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1808.60 | -90.93 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1808.80 | -90.56 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1809.00 | -90.8 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1809.20 | -90.23 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1809.40 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1809.60 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1809.80 | -90.96 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1810.00 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1810.20 | -90.61 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1810.40 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1810.60 | -90.62 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1810.80 | -91.16 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1811.00 | -91.04 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1811.20 | -90.61 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1811.40 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1811.60 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1811.80 | -91.07 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1812.00 | -90.57 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1812.20 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1812.40 | -90.98 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1812.60 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1812.80 | -91.03 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1813.00 | -91.02 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1813.20 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1813.40 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1813.60 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1813.80 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1814.00 | -90.89 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1814.20 | -90.68 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1814.40 | -91.26 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1814.60 | -91.13 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1814.80 | -90.98 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1815.00 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1815.20 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1815.40 | -90.7 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1815.60 | -90.88 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1815.80 | -90.68 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1816.00 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1816.20 | -90.62 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1816.40 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1816.60 | -90.29 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1816.80 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1817.00 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1817.20 | -90.89 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1817.40 | -90.73 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1817.60 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1817.80 | -91.09 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1818.00 | -91.06 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1818.20 | -90.88 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1818.40 | -90.88 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1818.60 | -90.81 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1818.80 | -91.05 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1819.00 | -90.91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1819.20 | -91.04 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1819.40 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1819.60 | -90.8 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1819.80 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1820.00 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1820.20 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1820.40 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1820.60 | -90.75 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1820.80 | -90.59 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1821.00 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1821.20 | -90.71 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1821.40 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1821.60 | -90.81 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1821.80 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1822.00 | -91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1822.20 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1822.40 | -90.71 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1822.60 | -90.91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1822.80 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1823.00 | -90.89 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1823.20 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1823.40 | -91.1 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1823.60 | -90.7 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1823.80 | -91.11 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1824.00 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1824.20 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1824.40 | -91.15 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1824.60 | -90.52 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1824.80 | -91.03 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1825.00 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1825.20 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1825.40 | -90.49 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1825.60 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1825.80 | -91.1 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1826.00 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1826.20 | -90.79 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1826.40 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1826.60 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1826.80 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1827.00 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1827.20 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1827.40 | -90.99 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1827.60 | -91.03 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1827.80 | -90.61 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1828.00 | -90.98 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1828.20 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1828.40 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1828.60 | -90.7 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1828.80 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1829.00 | -91.06 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1829.20 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1829.40 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1829.60 | -91.09 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1829.80 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1830.00 | -90.89 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1830.20 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1830.40 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1830.60 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1830.80 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1831.00 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1831.20 | -90.68 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1831.40 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1831.60 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1831.80 | -90.99 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1832.00 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1832.20 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1832.40 | -91.17 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1832.60 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1832.80 | -91.03 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1833.00 | -90.45 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1833.20 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1833.40 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1833.60 | -90.57 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1833.80 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1834.00 | -90.52 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1834.20 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1834.40 | -90.67 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1834.60 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1834.80 | -90.49 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1835.00 | -91.04 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1835.20 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1835.40 | -90.75 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1835.60 | -90.79 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1835.80 | -91.02 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1836.00 | -90.67 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1836.20 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1836.40 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1836.60 | -90.7 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1836.80 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1837.00 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1837.20 | -90.85 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1837.40 | -91.24 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1837.60 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1837.80 | -90.99 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1838.00 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1838.20 | -90.81 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1838.40 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1838.60 | -90.96 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1838.80 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1839.00 | -91.22 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1839.20 | -90.89 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1839.40 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1839.60 | -90.67 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1839.80 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1840.00 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1840.20 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1840.40 | -90.64 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1840.60 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1840.80 | -90.81 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1841.00 | -90.56 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1841.20 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1841.40 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1841.60 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1841.80 | -91.18 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1842.00 | -90.63 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1842.20 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1842.40 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1842.60 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1842.80 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1843.00 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1843.20 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1843.40 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1843.60 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1843.80 | -90.9 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1844.00 | -91.15 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1844.20 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1844.40 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1844.60 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1844.80 | -90.91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1845.00 | -91.02 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1845.20 | -91.01 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1845.40 | -90.79 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1845.60 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1845.80 | -90.63 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1846.00 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1846.20 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1846.40 | -90.49 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1846.60 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1846.80 | -91.12 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1847.00 | -90.65 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1847.20 | -90.79 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1847.40 | -90.59 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1847.60 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1847.80 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1848.00 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1848.20 | -90.64 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1848.40 | -90.85 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1848.60 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1848.80 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1849.00 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1849.20 | -90.51 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1849.40 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1849.60 | -90.35 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1849.80 | -90.39 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1850.00 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1850.20 | -91.06 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1850.40 | -90.91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1850.60 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1850.80 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1851.00 | -90.52 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1851.20 | -90.88 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1851.40 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1851.60 | -90.89 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1851.80 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1852.00 | -90.98 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1852.20 | -90.96 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1852.40 | -91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1852.60 | -90.98 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1852.80 | -90.99 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1853.00 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1853.20 | -90.54 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1853.40 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1853.60 | -90.47 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1853.80 | -90.55 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1854.00 | -90.71 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1854.20 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1854.40 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1854.60 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1854.80 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1855.00 | -90.58 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1855.20 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1855.40 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1855.60 | -90.93 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1855.80 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1856.00 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1856.20 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1856.40 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1856.60 | -90.95 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1856.80 | -90.64 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1857.00 | -91.04 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1857.20 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1857.40 | -90.97 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1857.60 | -91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1857.80 | -90.66 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1858.00 | -90.53 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1858.20 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1858.40 | -90.85 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1858.60 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1858.80 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1859.00 | -90.66 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1859.20 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1859.40 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1859.60 | -90.76 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1859.80 | -90.3 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1860.00 | -91.05 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1860.20 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1860.40 | -90.83 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1860.60 | -90.75 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1860.80 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1861.00 | -90.65 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1861.20 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1861.40 | -90.59 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1861.60 | -90.32 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1861.80 | -90.65 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1862.00 | -90.79 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1862.20 | -90.32 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1862.40 | -90.85 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1862.60 | -90.67 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1862.80 | -90.53 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1863.00 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1863.20 | -90.94 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1863.40 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1863.60 | -91.08 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1863.80 | -90.29 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1864.00 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1864.20 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1864.40 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1864.60 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1864.80 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1865.00 | -90.71 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1865.20 | -90.62 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1865.40 | -90.68 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1865.60 | -90.75 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1865.80 | -90.52 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1866.00 | -90.79 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1866.20 | -90.43 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1866.40 | -90.67 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1866.60 | -90.88 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1866.80 | -90.72 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1867.00 | -90.5 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1867.20 | -90.69 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1867.40 | -90.55 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1867.60 | -90.66 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1867.80 | -90.6 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1868.00 | -90.49 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1868.20 | -90.64 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1868.40 | -90.86 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1868.60 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1868.80 | -90.6 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1869.00 | -90.85 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1869.20 | -90.91 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1869.40 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1869.60 | -90.66 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1869.80 | -90.51 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1870.00 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1870.20 | -90.68 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1870.40 | -90.65 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1870.60 | -90.62 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1870.80 | -90.31 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1871.00 | -90.81 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1871.20 | -90.75 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1871.40 | -90.48 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1871.60 | -90.66 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1871.80 | -90.79 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1872.00 | -90.55 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1872.20 | -90.66 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1872.40 | -90.9 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1872.60 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1872.80 | -90.55 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1873.00 | -90.23 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1873.20 | -90.63 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1873.40 | -90.55 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1873.60 | -90.49 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1873.80 | -90.49 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1874.00 | -90.6 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1874.20 | -90.62 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1874.40 | -90.78 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1874.60 | -90.87 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1874.80 | -90.64 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1875.00 | -90.74 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1875.20 | -90.53 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1875.40 | -90.45 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1875.60 | -90.52 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1875.80 | -90.46 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1876.00 | -90.42 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1876.20 | -90.59 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1876.40 | -90.58 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1876.60 | -90.61 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1876.80 | -90.75 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1877.00 | -90.43 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1877.20 | -90.54 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1877.40 | -90.65 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1877.60 | -90.84 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1877.80 | -90.77 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1878.00 | -90.92 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1878.20 | -90.96 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1878.40 | -90.7 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1878.60 | -90.54 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1878.80 | -90.73 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1879.00 | -90.47 | -71 | PASS |

| | | | | | | | | |
|---------|-----|--------|---|-----|---------|--------|-----|------|
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1879.20 | -90.82 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1879.40 | -90.54 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1879.60 | -90.1 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1879.80 | -90.59 | -71 | PASS |
| GSM1800 | 885 | 1784.8 | 0 | 100 | 1880.00 | -90.68 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 925.00 | -92.46 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 925.20 | -92.66 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 925.40 | -92.79 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 925.60 | -92.8 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 925.80 | -92.76 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 926.00 | -92.78 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 926.20 | -92.63 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 926.40 | -93.02 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 926.60 | -92.47 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 926.80 | -92.76 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 927.00 | -92.94 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 927.20 | -92.99 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 927.40 | -92.61 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 927.60 | -92.84 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 927.80 | -92.62 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 928.00 | -92.73 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 928.20 | -92.56 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 928.40 | -92.73 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 928.60 | -92.51 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 928.80 | -92.67 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 929.00 | -92.69 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 929.20 | -92.85 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 929.40 | -92.58 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 929.60 | -92.71 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 929.80 | -92.67 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 930.00 | -92.84 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 930.20 | -92.75 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 930.40 | -92.85 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 930.60 | -92.78 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 930.80 | -92.75 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 931.00 | -92.57 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 931.20 | -92.73 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 931.40 | -92.82 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 931.60 | -92.57 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 931.80 | -92.82 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 932.00 | -92.7 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 932.20 | -92.64 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 932.40 | -92.6 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 932.60 | -92.75 | -67 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 932.80 | -92.66 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 933.00 | -92.78 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 933.20 | -92.54 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 933.40 | -92.62 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 933.60 | -92.71 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 933.80 | -92.89 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 934.00 | -92.56 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 934.20 | -92.73 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 934.40 | -92.6 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 934.60 | -92.72 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 934.80 | -92.55 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 935.00 | -92.8 | -67 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 935.00 | -93.14 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 935.20 | -92.5 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 935.40 | -92.66 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 935.60 | -92.78 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 935.80 | -92.54 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 936.00 | -91.88 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 936.20 | -92.55 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 936.40 | -92.85 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 936.60 | -92.75 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 936.80 | -92.75 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 937.00 | -92.68 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 937.20 | -92.58 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 937.40 | -92.53 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 937.60 | -92.48 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 937.80 | -92.12 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 938.00 | -92.9 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 938.20 | -92.7 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 938.40 | -93.02 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 938.60 | -92.66 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 938.80 | -92.56 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 939.00 | -92.78 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 939.20 | -92.82 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 939.40 | -92.93 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 939.60 | -92.67 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 939.80 | -92.63 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 940.00 | -92.68 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 940.20 | -92.68 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 940.40 | -92.78 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 940.60 | -92.65 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 940.80 | -92.55 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 941.00 | -92.37 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 941.20 | -92.67 | -79 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 941.40 | -92.85 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 941.60 | -92.74 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 941.80 | -92.8 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 942.00 | -92.66 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 942.20 | -92.67 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 942.40 | -92.95 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 942.60 | -92.76 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 942.80 | -92.9 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 943.00 | -92.79 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 943.20 | -92.75 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 943.40 | -92.84 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 943.60 | -92.72 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 943.80 | -92.6 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 944.00 | -92.86 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 944.20 | -92.43 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 944.40 | -92.53 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 944.60 | -92.63 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 944.80 | -92.76 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 945.00 | -92.83 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 945.20 | -92.52 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 945.40 | -92.69 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 945.60 | -92.86 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 945.80 | -92.71 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 946.00 | -93.04 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 946.20 | -92.9 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 946.40 | -87.95 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 946.60 | -92.55 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 946.80 | -92.8 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 947.00 | -92.6 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 947.20 | -92.74 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 947.40 | -92.89 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 947.60 | -92.94 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 947.80 | -92.91 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 948.00 | -92.93 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 948.20 | -92.89 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 948.40 | -92.3 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 948.60 | -92.71 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 948.80 | -92.78 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 949.00 | -93.07 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 949.20 | -92.72 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 949.40 | -92.41 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 949.60 | -92.54 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 949.80 | -92.99 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 950.00 | -92.62 | -79 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 950.20 | -92.69 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 950.40 | -93.05 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 950.60 | -92.69 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 950.80 | -92.9 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 951.00 | -92.77 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 951.20 | -92.83 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 951.40 | -92.53 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 951.60 | -92.96 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 951.80 | -92.87 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 952.00 | -92.83 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 952.20 | -92.68 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 952.40 | -92.77 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 952.60 | -92.72 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 952.80 | -93.02 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 953.00 | -92.86 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 953.20 | -92.64 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 953.40 | -93.02 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 953.60 | -93 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 953.80 | -93 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 954.00 | -92.9 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 954.20 | -92.44 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 954.40 | -92.7 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 954.60 | -92.94 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 954.80 | -92.73 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 955.00 | -92.82 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 955.20 | -92.8 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 955.40 | -92.58 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 955.60 | -93.08 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 955.80 | -92.7 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 956.00 | -93.07 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 956.20 | -92.84 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 956.40 | -92.97 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 956.60 | -92.91 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 956.80 | -92.88 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 957.00 | -92.7 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 957.20 | -92.56 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 957.40 | -92.78 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 957.60 | -92.94 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 957.80 | -92.88 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 958.00 | -92.91 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 958.20 | -92.69 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 958.40 | -93.13 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 958.60 | -92.9 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 958.80 | -92.58 | -79 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 959.00 | -92.53 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 959.20 | -92.85 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 959.40 | -92.58 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 959.60 | -92.84 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 959.80 | -93.11 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 960.00 | -92.81 | -79 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1805.00 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1805.20 | -92.65 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1805.40 | -92.47 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1805.60 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1805.80 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1806.00 | -92.25 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1806.20 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1806.40 | -92.59 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1806.60 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1806.80 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1807.00 | -92.43 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1807.20 | -92.79 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1807.40 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1807.60 | -92.11 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1807.80 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1808.00 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1808.20 | -92.07 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1808.40 | -91.94 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1808.60 | -91.83 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1808.80 | -91.65 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1809.00 | -91.6 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1809.20 | -91.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1809.40 | -91.67 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1809.60 | -91.31 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1809.80 | -92.02 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1810.00 | -91.66 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1810.20 | -91.55 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1810.40 | -91.86 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1810.60 | -91.92 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1810.80 | -92.12 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1811.00 | -91.76 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1811.20 | -91.06 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1811.40 | -91.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1811.60 | -91.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1811.80 | -90.99 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1812.00 | -90.96 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1812.20 | -90.86 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1812.40 | -90.65 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1812.60 | -91.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1812.80 | -91.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1813.00 | -91.07 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1813.20 | -91.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1813.40 | -90.98 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1813.60 | -91.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1813.80 | -91.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1814.00 | -91.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1814.20 | -91.76 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1814.40 | -92.12 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1814.60 | -92.13 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1814.80 | -92.26 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1815.00 | -92.52 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1815.20 | -92.1 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1815.40 | -92.17 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1815.60 | -92.25 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1815.80 | -92.27 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1816.00 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1816.20 | -92.24 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1816.40 | -92.04 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1816.60 | -92.57 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1816.80 | -92.01 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1817.00 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1817.20 | -92.07 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1817.40 | -91.58 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1817.60 | -91.61 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1817.80 | -91.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1818.00 | -91.84 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1818.20 | -92.03 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1818.40 | -91.77 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1818.60 | -91.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1818.80 | -91.71 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1819.00 | -91.63 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1819.20 | -91.6 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1819.40 | -92 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1819.60 | -91.73 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1819.80 | -91.83 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1820.00 | -91.89 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1820.20 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1820.40 | -91.51 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1820.60 | -91.35 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1820.80 | -91.77 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1821.00 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1821.20 | -91.82 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1821.40 | -92.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1821.60 | -91.92 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1821.80 | -91.67 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1822.00 | -91.83 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1822.20 | -91.87 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1822.40 | -91.77 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1822.60 | -92.14 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1822.80 | -91.66 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1823.00 | -91.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1823.20 | -91.97 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1823.40 | -92.43 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1823.60 | -92 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1823.80 | -92.06 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1824.00 | -92.57 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1824.20 | -92.66 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1824.40 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1824.60 | -92.58 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1824.80 | -92.14 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1825.00 | -92.42 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1825.20 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1825.40 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1825.60 | -92.49 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1825.80 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1826.00 | -92.66 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1826.20 | -92.27 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1826.40 | -92.57 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1826.60 | -92.62 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1826.80 | -92.2 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1827.00 | -92.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1827.20 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1827.40 | -92.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1827.60 | -92.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1827.80 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1828.00 | -92.33 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1828.20 | -91.82 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1828.40 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1828.60 | -92.53 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1828.80 | -92.52 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1829.00 | -92.62 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1829.20 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1829.40 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1829.60 | -92.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1829.80 | -92.26 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1830.00 | -92.56 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1830.20 | -92.33 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1830.40 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1830.60 | -92.04 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1830.80 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1831.00 | -92.43 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1831.20 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1831.40 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1831.60 | -92.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1831.80 | -92.47 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1832.00 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1832.20 | -92.59 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1832.40 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1832.60 | -92.52 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1832.80 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1833.00 | -92.53 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1833.20 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1833.40 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1833.60 | -92.11 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1833.80 | -92.54 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1834.00 | -92.51 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1834.20 | -92.37 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1834.40 | -92.51 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1834.60 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1834.80 | -92.19 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1835.00 | -92.62 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1835.20 | -92.09 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1835.40 | -92.44 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1835.60 | -92.12 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1835.80 | -92.66 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1836.00 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1836.20 | -92.74 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1836.40 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1836.60 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1836.80 | -92.54 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1837.00 | -92.7 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1837.20 | -92.7 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1837.40 | -92.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1837.60 | -92.2 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1837.80 | -92.52 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1838.00 | -92.51 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1838.20 | -92.07 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1838.40 | -92.61 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1838.60 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1838.80 | -92.42 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1839.00 | -92.54 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1839.20 | -92.3 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1839.40 | -92.27 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1839.60 | -92.82 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1839.80 | -92.61 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1840.00 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1840.20 | -92.14 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1840.40 | -92.31 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1840.60 | -92.5 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1840.80 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1841.00 | -92.29 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1841.20 | -92.62 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1841.40 | -92.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1841.60 | -92.29 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1841.80 | -92.71 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1842.00 | -92.11 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1842.20 | -92.44 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1842.40 | -92.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1842.60 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1842.80 | -92.33 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1843.00 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1843.20 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1843.40 | -92.62 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1843.60 | -92.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1843.80 | -92.58 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1844.00 | -92.37 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1844.20 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1844.40 | -92.6 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1844.60 | -92.49 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1844.80 | -92.61 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1845.00 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1845.20 | -92.65 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1845.40 | -92.44 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1845.60 | -92.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1845.80 | -92.58 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1846.00 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1846.20 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1846.40 | -92.73 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1846.60 | -92.52 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1846.80 | -92.52 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1847.00 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1847.20 | -92.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1847.40 | -92.42 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1847.60 | -92.25 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1847.80 | -92.55 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1848.00 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1848.20 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1848.40 | -92.58 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1848.60 | -92.48 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1848.80 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1849.00 | -92.47 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1849.20 | -92.31 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1849.40 | -92.31 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1849.60 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1849.80 | -92.57 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1850.00 | -92.25 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1850.20 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1850.40 | -92.5 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1850.60 | -92.56 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1850.80 | -92.42 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1851.00 | -91.82 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1851.20 | -92.56 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1851.40 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1851.60 | -92.47 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1851.80 | -92.59 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1852.00 | -91.95 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1852.20 | -92.27 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1852.40 | -92.57 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1852.60 | -92.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1852.80 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1853.00 | -92.02 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1853.20 | -92.1 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1853.40 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1853.60 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1853.80 | -91.97 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1854.00 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1854.20 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1854.40 | -92.3 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1854.60 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1854.80 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1855.00 | -91.79 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1855.20 | -92.17 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1855.40 | -92.14 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1855.60 | -91.97 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1855.80 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1856.00 | -92.11 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1856.20 | -92.66 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1856.40 | -92.41 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1856.60 | -92.5 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1856.80 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1857.00 | -92.49 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1857.20 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1857.40 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1857.60 | -92.47 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1857.80 | -92.5 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1858.00 | -91.87 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1858.20 | -91.97 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1858.40 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1858.60 | -92.18 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1858.80 | -92.27 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1859.00 | -92.56 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1859.20 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1859.40 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1859.60 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1859.80 | -92.33 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1860.00 | -92.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1860.20 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1860.40 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1860.60 | -92.45 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1860.80 | -92.2 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1861.00 | -91.99 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1861.20 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1861.40 | -92.54 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1861.60 | -92.17 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1861.80 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1862.00 | -92.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1862.20 | -92.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1862.40 | -92.43 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1862.60 | -92.17 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1862.80 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1863.00 | -92.3 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1863.20 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1863.40 | -92.35 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1863.60 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1863.80 | -92.31 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1864.00 | -92.42 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1864.20 | -92.43 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1864.40 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1864.60 | -92.19 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1864.80 | -92.1 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1865.00 | -92.17 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1865.20 | -92.31 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1865.40 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1865.60 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1865.80 | -92.37 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1866.00 | -92.26 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1866.20 | -92.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1866.40 | -92.49 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1866.60 | -92.34 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1866.80 | -91.97 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1867.00 | -92.12 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1867.20 | -92.51 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1867.40 | -92.26 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1867.60 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1867.80 | -92.4 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1868.00 | -92.64 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1868.20 | -92.34 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1868.40 | -92.42 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1868.60 | -92.21 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1868.80 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1869.00 | -92.26 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1869.20 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1869.40 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1869.60 | -92.32 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1869.80 | -92.33 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1870.00 | -92.12 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1870.20 | -92.13 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1870.40 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1870.60 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1870.80 | -92.34 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1871.00 | -92.33 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1871.20 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1871.40 | -92.18 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1871.60 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1871.80 | -92.16 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1872.00 | -91.96 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1872.20 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1872.40 | -92.19 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1872.60 | -92.41 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1872.80 | -91.67 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1873.00 | -92.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1873.20 | -92.43 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1873.40 | -92.36 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1873.60 | -92.31 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1873.80 | -92.58 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1874.00 | -92 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 975 | 880.2 | 5 | 100 | 1874.20 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1874.40 | -92.46 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1874.60 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1874.80 | -92.55 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1875.00 | -92.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1875.20 | -92.3 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1875.40 | -92.15 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1875.60 | -92.13 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1875.80 | -91.95 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1876.00 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1876.20 | -92.24 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1876.40 | -92.35 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1876.60 | -92.05 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1876.80 | -92.14 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1877.00 | -92.39 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1877.20 | -92.08 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1877.40 | -92.2 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1877.60 | -92.28 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1877.80 | -91.74 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1878.00 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1878.20 | -92.06 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1878.40 | -92.27 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1878.60 | -92.51 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1878.80 | -92.26 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1879.00 | -92.22 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1879.20 | -92.29 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1879.40 | -92.23 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1879.60 | -92.38 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1879.80 | -92.49 | -71 | PASS |
| GSM900 | 975 | 880.2 | 5 | 100 | 1880.00 | -92.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 925.00 | -92.73 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 925.20 | -92.64 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 925.40 | -92.74 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 925.60 | -92.7 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 925.80 | -92.49 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 926.00 | -92.77 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 926.20 | -92.82 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 926.40 | -92.72 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 926.60 | -92.78 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 926.80 | -92.57 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 927.00 | -92.84 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 927.20 | -92.69 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 927.40 | -92.56 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 927.60 | -92.59 | -67 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 927.80 | -92.89 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 928.00 | -92.54 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 928.20 | -92.48 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 928.40 | -92.66 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 928.60 | -92.55 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 928.80 | -92.73 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 929.00 | -92.47 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 929.20 | -92.6 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 929.40 | -92.7 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 929.60 | -92.54 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 929.80 | -92.6 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 930.00 | -92.83 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 930.20 | -92.49 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 930.40 | -92.85 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 930.60 | -92.78 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 930.80 | -92.73 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 931.00 | -92.81 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 931.20 | -92.79 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 931.40 | -92.81 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 931.60 | -92.73 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 931.80 | -93 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 932.00 | -92.77 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 932.20 | -92.42 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 932.40 | -92.7 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 932.60 | -92.61 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 932.80 | -92.6 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 933.00 | -92.83 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 933.20 | -92.93 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 933.40 | -92.68 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 933.60 | -92.76 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 933.80 | -92.39 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 934.00 | -92.68 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 934.20 | -92.64 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 934.40 | -92.64 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 934.60 | -92.42 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 934.80 | -92.62 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 935.00 | -92.74 | -67 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 935.00 | -92.72 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 935.20 | -92.8 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 935.40 | -92.68 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 935.60 | -92.84 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 935.80 | -92.71 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 936.00 | -92.86 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 936.20 | -92.31 | -79 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 936.40 | -92.67 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 936.60 | -92.88 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 936.80 | -92.38 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 937.00 | -92.75 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 937.20 | -92.92 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 937.40 | -92.67 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 937.60 | -92.67 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 937.80 | -92.93 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 938.00 | -92.95 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 938.20 | -92.54 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 938.40 | -92.37 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 938.60 | -92.7 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 938.80 | -92.63 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 939.00 | -92.66 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 939.20 | -92.64 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 939.40 | -92.66 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 939.60 | -92.49 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 939.80 | -92.67 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 940.00 | -92.72 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 940.20 | -92.8 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 940.40 | -92.61 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 940.60 | -92.81 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 940.80 | -92.68 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 941.00 | -92.2 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 941.20 | -92.72 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 941.40 | -92.38 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 941.60 | -92.61 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 941.80 | -92.81 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 942.00 | -92.94 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 942.20 | -92.68 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 942.40 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 942.60 | -92.78 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 942.80 | -92.2 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 943.00 | -92.78 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 943.20 | -92.8 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 943.40 | -92.79 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 943.60 | -92.86 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 943.80 | -92.71 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 944.00 | -92.94 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 944.20 | -91.41 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 944.40 | -92.7 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 944.60 | -92.76 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 944.80 | -92.43 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 945.00 | -92.85 | -79 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 945.20 | -92.83 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 945.40 | -90.44 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 945.60 | -92.88 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 945.80 | -92.6 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 946.00 | -92.8 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 946.20 | -92.52 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 946.40 | -83.4 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 946.60 | -92.81 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 946.80 | -92.95 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 947.00 | -92.85 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 947.20 | -92.98 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 947.40 | -92.75 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 947.60 | -92.84 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 947.80 | -92.92 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 948.00 | -92.94 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 948.20 | -92.59 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 948.40 | -92.27 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 948.60 | -92.81 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 948.80 | -91.09 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 949.00 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 949.20 | -93.04 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 949.40 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 949.60 | -92.7 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 949.80 | -92.84 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 950.00 | -92.94 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 950.20 | -92.86 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 950.40 | -92.8 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 950.60 | -92.66 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 950.80 | -92.77 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 951.00 | -92.47 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 951.20 | -92.48 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 951.40 | -93.08 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 951.60 | -92.65 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 951.80 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 952.00 | -92.86 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 952.20 | -92.45 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 952.40 | -92.59 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 952.60 | -92.99 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 952.80 | -92.83 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 953.00 | -92.93 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 953.20 | -92.91 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 953.40 | -92.77 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 953.60 | -92.63 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 953.80 | -92.79 | -79 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 954.00 | -92.96 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 954.20 | -92.96 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 954.40 | -92.72 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 954.60 | -92.56 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 954.80 | -92.78 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 955.00 | -92.64 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 955.20 | -92.71 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 955.40 | -92.76 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 955.60 | -92.65 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 955.80 | -92.54 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 956.00 | -92.73 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 956.20 | -92.78 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 956.40 | -92.81 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 956.60 | -93.06 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 956.80 | -93.01 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 957.00 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 957.20 | -92.79 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 957.40 | -92.82 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 957.60 | -92.8 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 957.80 | -92.92 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 958.00 | -92.14 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 958.20 | -92.99 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 958.40 | -93.07 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 958.60 | -92.5 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 958.80 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 959.00 | -92.98 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 959.20 | -92.84 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 959.40 | -92.56 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 959.60 | -92.67 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 959.80 | -93.03 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 960.00 | -92.89 | -79 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1805.00 | -92.84 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1805.20 | -92.75 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1805.40 | -92.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1805.60 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1805.80 | -92.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1806.00 | -89.78 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1806.20 | -88.04 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1806.40 | -88.17 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1806.60 | -88.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1806.80 | -88.42 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1807.00 | -88.76 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1807.20 | -88.89 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1807.40 | -89.34 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1807.60 | -89.26 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1807.80 | -89.35 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1808.00 | -89.81 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1808.20 | -89.08 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1808.40 | -89.44 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1808.60 | -89.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1808.80 | -89.79 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1809.00 | -89.72 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1809.20 | -89.03 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1809.40 | -89.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1809.60 | -89.72 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1809.80 | -89.91 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1810.00 | -89.24 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1810.20 | -90.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1810.40 | -90.58 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1810.60 | -90.81 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1810.80 | -90.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1811.00 | -90.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1811.20 | -90.73 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1811.40 | -90.97 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1811.60 | -91.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1811.80 | -91.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1812.00 | -91.13 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1812.20 | -91.57 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1812.40 | -91.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1812.60 | -90.99 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1812.80 | -91.7 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1813.00 | -91.56 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1813.20 | -91.44 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1813.40 | -91.15 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1813.60 | -90.77 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1813.80 | -91.19 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1814.00 | -90.97 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1814.20 | -90.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1814.40 | -90.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1814.60 | -90.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1814.80 | -89.57 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1815.00 | -89.85 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1815.20 | -90.18 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1815.40 | -89.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1815.60 | -89.99 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1815.80 | -90.17 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1816.00 | -90.01 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1816.20 | -89.59 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1816.40 | -89.83 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1816.60 | -89.83 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1816.80 | -90.46 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1817.00 | -90.65 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1817.20 | -90.91 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1817.40 | -91.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1817.60 | -91.69 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1817.80 | -91.65 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1818.00 | -91.24 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1818.20 | -91.05 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1818.40 | -91.14 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1818.60 | -90.94 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1818.80 | -90.62 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1819.00 | -90.57 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1819.20 | -90.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1819.40 | -90.19 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1819.60 | -90.14 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1819.80 | -89.87 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1820.00 | -89.33 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1820.20 | -89.44 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1820.40 | -89.13 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1820.60 | -89.11 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1820.80 | -89.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1821.00 | -88.75 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1821.20 | -88.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1821.40 | -88.57 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1821.60 | -89.48 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1821.80 | -89.08 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1822.00 | -88.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1822.20 | -87.97 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1822.40 | -88.1 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1822.60 | -88.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1822.80 | -88.92 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1823.00 | -88.46 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1823.20 | -88.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1823.40 | -88.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1823.60 | -89.07 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1823.80 | -89.46 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1824.00 | -89.7 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1824.20 | -92.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1824.40 | -91.58 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1824.60 | -92.66 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1824.80 | -92.55 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1825.00 | -92.68 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1825.20 | -92.7 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1825.40 | -92.61 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1825.60 | -92.4 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1825.80 | -92.33 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1826.00 | -92.58 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1826.20 | -92.65 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1826.40 | -92.4 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1826.60 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1826.80 | -92.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1827.00 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1827.20 | -92.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1827.40 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1827.60 | -91.93 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1827.80 | -92.64 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1828.00 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1828.20 | -91.89 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1828.40 | -92.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1828.60 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1828.80 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1829.00 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1829.20 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1829.40 | -92.56 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1829.60 | -92.61 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1829.80 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1830.00 | -92.84 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1830.20 | -92.67 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1830.40 | -92.05 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1830.60 | -92.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1830.80 | -92.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1831.00 | -92.8 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1831.20 | -92.63 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1831.40 | -92.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1831.60 | -92.58 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1831.80 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1832.00 | -92.74 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1832.20 | -92.63 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1832.40 | -92.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1832.60 | -92.65 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1832.80 | -92.22 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1833.00 | -92.58 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1833.20 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1833.40 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1833.60 | -92.16 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1833.80 | -92.59 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1834.00 | -92.71 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1834.20 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1834.40 | -92.56 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1834.60 | -92.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1834.80 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1835.00 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1835.20 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1835.40 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1835.60 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1835.80 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1836.00 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1836.20 | -92.6 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1836.40 | -92.28 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1836.60 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1836.80 | -92.6 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1837.00 | -92.52 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1837.20 | -92.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1837.40 | -92.48 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1837.60 | -92.11 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1837.80 | -92.56 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1838.00 | -92.61 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1838.20 | -92.07 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1838.40 | -92.48 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1838.60 | -92.3 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1838.80 | -92.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1839.00 | -92.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1839.20 | -92.66 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1839.40 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1839.60 | -92.62 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1839.80 | -92.67 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1840.00 | -92.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1840.20 | -92.28 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1840.40 | -92.42 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1840.60 | -92.61 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1840.80 | -92.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1841.00 | -92.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1841.20 | -92.4 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1841.40 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1841.60 | -92.31 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1841.80 | -92.52 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1842.00 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1842.20 | -91.87 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1842.40 | -92.33 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1842.60 | -92.3 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1842.80 | -92.13 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1843.00 | -92.52 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1843.20 | -92.44 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1843.40 | -92.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1843.60 | -92.57 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1843.80 | -92.28 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1844.00 | -92.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1844.20 | -92.16 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1844.40 | -92.61 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1844.60 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1844.80 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1845.00 | -92.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1845.20 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1845.40 | -92.18 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1845.60 | -92.58 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1845.80 | -92.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1846.00 | -92.5 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1846.20 | -92.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1846.40 | -92.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1846.60 | -92.52 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1846.80 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1847.00 | -92.23 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1847.20 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1847.40 | -92.59 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1847.60 | -92.49 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1847.80 | -92.46 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1848.00 | -92.73 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1848.20 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1848.40 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1848.60 | -92.7 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1848.80 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1849.00 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1849.20 | -92.46 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1849.40 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1849.60 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1849.80 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1850.00 | -92.4 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1850.20 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1850.40 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1850.60 | -92.59 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1850.80 | -92.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1851.00 | -92.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1851.20 | -92.4 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1851.40 | -92.49 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1851.60 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1851.80 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1852.00 | -92.2 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1852.20 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1852.40 | -92.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1852.60 | -92.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1852.80 | -92.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1853.00 | -92.52 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1853.20 | -92.62 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1853.40 | -92.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1853.60 | -92.59 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1853.80 | -92.59 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1854.00 | -92.33 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1854.20 | -92.35 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1854.40 | -92.54 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1854.60 | -92.53 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1854.80 | -92.68 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1855.00 | -92.44 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1855.20 | -92.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1855.40 | -92.55 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1855.60 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1855.80 | -92.3 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1856.00 | -92.48 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1856.20 | -92.56 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1856.40 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1856.60 | -92.5 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1856.80 | -92.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1857.00 | -92.51 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1857.20 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1857.40 | -92.26 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1857.60 | -92.4 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1857.80 | -92.22 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1858.00 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1858.20 | -92.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1858.40 | -91.79 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1858.60 | -92.34 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1858.80 | -92.48 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1859.00 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1859.20 | -92.45 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1859.40 | -92.18 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1859.60 | -92.67 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1859.80 | -92.01 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1860.00 | -92.55 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1860.20 | -92.25 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1860.40 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1860.60 | -92.35 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1860.80 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1861.00 | -92.22 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1861.20 | -92.11 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1861.40 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1861.60 | -92.3 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1861.80 | -92.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1862.00 | -92.13 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1862.20 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1862.40 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1862.60 | -92.28 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1862.80 | -92.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1863.00 | -92.3 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1863.20 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1863.40 | -91.98 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1863.60 | -92.28 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1863.80 | -92.19 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1864.00 | -92.55 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1864.20 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1864.40 | -92.43 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1864.60 | -91.99 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1864.80 | -92.37 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1865.00 | -91.89 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1865.20 | -91.99 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1865.40 | -92.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1865.60 | -92.17 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1865.80 | -92.11 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1866.00 | -92 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1866.20 | -91.95 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1866.40 | -92.08 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1866.60 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1866.80 | -92 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1867.00 | -91.9 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1867.20 | -92.11 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1867.40 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1867.60 | -92.05 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1867.80 | -91.21 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1868.00 | -92.19 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1868.20 | -92.29 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1868.40 | -92.23 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1868.60 | -92.04 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1868.80 | -91.89 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1869.00 | -92.46 | -71 | PASS |

| | | | | | | | | |
|--------|----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1869.20 | -92.12 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1869.40 | -92.04 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1869.60 | -92.21 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1869.80 | -92.18 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1870.00 | -92.25 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1870.20 | -91.97 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1870.40 | -91.98 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1870.60 | -92.47 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1870.80 | -91.99 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1871.00 | -92 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1871.20 | -91.83 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1871.40 | -91.94 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1871.60 | -92.23 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1871.80 | -91.9 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1872.00 | -91.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1872.20 | -92.3 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1872.40 | -92.18 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1872.60 | -92.44 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1872.80 | -92.06 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1873.00 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1873.20 | -92.23 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1873.40 | -92.39 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1873.60 | -91.97 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1873.80 | -91.97 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1874.00 | -92.41 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1874.20 | -92.28 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1874.40 | -92.21 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1874.60 | -92.04 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1874.80 | -92.27 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1875.00 | -91.83 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1875.20 | -91.73 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1875.40 | -92.36 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1875.60 | -91.94 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1875.80 | -92.24 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1876.00 | -92.14 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1876.20 | -91.73 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1876.40 | -92.26 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1876.60 | -92.03 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1876.80 | -92.29 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1877.00 | -92.09 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1877.20 | -92.16 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1877.40 | -92.16 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1877.60 | -92.24 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1877.80 | -92.18 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 38 | 897.6 | 5 | 100 | 1878.00 | -92.16 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1878.20 | -91.93 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1878.40 | -91.81 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1878.60 | -91.74 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1878.80 | -91.9 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1879.00 | -92.06 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1879.20 | -92.33 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1879.40 | -92.23 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1879.60 | -92.32 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1879.80 | -92.38 | -71 | PASS |
| GSM900 | 38 | 897.6 | 5 | 100 | 1880.00 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 925.00 | -92.69 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 925.20 | -92.83 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 925.40 | -92.49 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 925.60 | -92.75 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 925.80 | -92.83 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 926.00 | -92.64 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 926.20 | -92.82 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 926.40 | -92.67 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 926.60 | -92.81 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 926.80 | -92.75 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 927.00 | -93.03 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 927.20 | -92.65 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 927.40 | -92.62 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 927.60 | -92.72 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 927.80 | -92.64 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 928.00 | -92.71 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 928.20 | -92.76 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 928.40 | -92.29 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 928.60 | -92.8 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 928.80 | -92.49 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 929.00 | -92.51 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 929.20 | -92.7 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 929.40 | -92.58 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 929.60 | -92.58 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 929.80 | -92.55 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 930.00 | -92.68 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 930.20 | -92.78 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 930.40 | -92.86 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 930.60 | -92.63 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 930.80 | -93.04 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 931.00 | -92.95 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 931.20 | -92.73 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 931.40 | -92.83 | -67 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 931.60 | -92.6 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 931.80 | -92.82 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 932.00 | -92.43 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 932.20 | -92.91 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 932.40 | -92.53 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 932.60 | -92.69 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 932.80 | -92.84 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 933.00 | -92.8 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 933.20 | -92.49 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 933.40 | -92.35 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 933.60 | -92.97 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 933.80 | -92.74 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 934.00 | -92.33 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 934.20 | -92.67 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 934.40 | -92.63 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 934.60 | -92.91 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 934.80 | -92.45 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 935.00 | -92.74 | -67 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 935.00 | -92.41 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 935.20 | -92.75 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 935.40 | -92.78 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 935.60 | -92.7 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 935.80 | -92.7 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 936.00 | -92.52 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 936.20 | -92.28 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 936.40 | -92.66 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 936.60 | -92.49 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 936.80 | -92.92 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 937.00 | -93.17 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 937.20 | -92.68 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 937.40 | -92.91 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 937.60 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 937.80 | -92.79 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 938.00 | -92.87 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 938.20 | -92.75 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 938.40 | -92.81 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 938.60 | -92.61 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 938.80 | -92.69 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 939.00 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 939.20 | -92.93 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 939.40 | -92.48 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 939.60 | -93.08 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 939.80 | -92.82 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 940.00 | -92.67 | -79 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 940.20 | -92.75 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 940.40 | -92.66 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 940.60 | -92.76 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 940.80 | -92.56 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 941.00 | -92.42 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 941.20 | -92.95 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 941.40 | -92.4 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 941.60 | -92.81 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 941.80 | -92.74 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 942.00 | -92.51 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 942.20 | -92.83 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 942.40 | -92.83 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 942.60 | -93 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 942.80 | -93.21 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 943.00 | -92.69 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 943.20 | -92.93 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 943.40 | -92.87 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 943.60 | -92.35 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 943.80 | -92.92 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 944.00 | -93.03 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 944.20 | -92.46 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 944.40 | -92.96 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 944.60 | -92.44 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 944.80 | -92.44 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 945.00 | -92.62 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 945.20 | -92.85 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 945.40 | -92.6 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 945.60 | -92.88 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 945.80 | -92.76 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 946.00 | -92.74 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 946.20 | -92.66 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 946.40 | -92.38 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 946.60 | -92.84 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 946.80 | -93.13 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 947.00 | -92.74 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 947.20 | -92.58 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 947.40 | -92.72 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 947.60 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 947.80 | -92.49 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 948.00 | -92.99 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 948.20 | -92.46 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 948.40 | -92.76 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 948.60 | -92.78 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 948.80 | -93.02 | -79 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|--------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 949.00 | -92.91 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 949.20 | -92.85 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 949.40 | -92.83 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 949.60 | -92.96 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 949.80 | -92.95 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 950.00 | -92.59 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 950.20 | -92.47 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 950.40 | -92.85 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 950.60 | -92.94 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 950.80 | -92.69 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 951.00 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 951.20 | -92.88 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 951.40 | -92.38 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 951.60 | -92.99 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 951.80 | -92.57 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 952.00 | -92.96 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 952.20 | -92.66 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 952.40 | -92.37 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 952.60 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 952.80 | -92.86 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 953.00 | -92.43 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 953.20 | -92.57 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 953.40 | -92.63 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 953.60 | -92.8 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 953.80 | -93.03 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 954.00 | -92.83 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 954.20 | -92.9 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 954.40 | -93.11 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 954.60 | -92.6 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 954.80 | -92.4 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 955.00 | -92.82 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 955.20 | -92.68 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 955.40 | -92.9 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 955.60 | -93.16 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 955.80 | -92.75 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 956.00 | -92.83 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 956.20 | -92.83 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 956.40 | -93.08 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 956.60 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 956.80 | -92.73 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 957.00 | -92.66 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 957.20 | -92.81 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 957.40 | -92.28 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 957.60 | -92.86 | -79 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 957.80 | -92.79 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 958.00 | -93.07 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 958.20 | -93.04 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 958.40 | -93 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 958.60 | -92.82 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 958.80 | -92.49 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 959.00 | -92.67 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 959.20 | -92.37 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 959.40 | -92.74 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 959.60 | -92.92 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 959.80 | -92.94 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 960.00 | -92.72 | -79 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1805.00 | -92.52 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1805.20 | -92.75 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1805.40 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1805.60 | -92.38 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1805.80 | -92.09 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1806.00 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1806.20 | -92.27 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1806.40 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1806.60 | -92.64 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1806.80 | -92.34 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1807.00 | -92.31 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1807.20 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1807.40 | -92.7 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1807.60 | -92.57 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1807.80 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1808.00 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1808.20 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1808.40 | -92.38 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1808.60 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1808.80 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1809.00 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1809.20 | -92.65 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1809.40 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1809.60 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1809.80 | -92.72 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1810.00 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1810.20 | -92.17 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1810.40 | -92.25 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1810.60 | -92.62 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1810.80 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1811.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1811.20 | -92.64 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1811.40 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1811.60 | -92.65 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1811.80 | -92.27 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1812.00 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1812.20 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1812.40 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1812.60 | -92.85 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1812.80 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1813.00 | -92.78 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1813.20 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1813.40 | -92.68 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1813.60 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1813.80 | -92.37 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1814.00 | -92.09 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1814.20 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1814.40 | -92.74 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1814.60 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1814.80 | -92.42 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1815.00 | -92.64 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1815.20 | -92.3 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1815.40 | -92.62 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1815.60 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1815.80 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1816.00 | -92.67 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1816.20 | -92.76 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1816.40 | -92.66 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1816.60 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1816.80 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1817.00 | -92.31 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1817.20 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1817.40 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1817.60 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1817.80 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1818.00 | -92.57 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1818.20 | -92.32 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1818.40 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1818.60 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1818.80 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1819.00 | -92.42 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1819.20 | -92.75 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1819.40 | -92.58 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1819.60 | -92.64 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1819.80 | -92.52 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1820.00 | -92.49 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1820.20 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1820.40 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1820.60 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1820.80 | -92.06 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1821.00 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1821.20 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1821.40 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1821.60 | -92.73 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1821.80 | -92.1 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1822.00 | -92.66 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1822.20 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1822.40 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1822.60 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1822.80 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1823.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1823.20 | -92.44 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1823.40 | -91.88 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1823.60 | -92.74 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1823.80 | -92.69 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1824.00 | -92.91 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1824.20 | -92.72 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1824.40 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1824.60 | -92.52 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1824.80 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1825.00 | -92.3 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1825.20 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1825.40 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1825.60 | -92.52 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1825.80 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1826.00 | -92.32 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1826.20 | -92.37 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1826.40 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1826.60 | -92.72 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1826.80 | -92.58 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1827.00 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1827.20 | -92.68 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1827.40 | -92.58 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1827.60 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1827.80 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1828.00 | -92.34 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1828.20 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1828.40 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1828.60 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1828.80 | -92.31 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1829.00 | -92.67 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1829.20 | -92.75 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1829.40 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1829.60 | -92.31 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1829.80 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1830.00 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1830.20 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1830.40 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1830.60 | -92.65 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1830.80 | -92.67 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1831.00 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1831.20 | -92.9 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1831.40 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1831.60 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1831.80 | -92.69 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1832.00 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1832.20 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1832.40 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1832.60 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1832.80 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1833.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1833.20 | -92.58 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1833.40 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1833.60 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1833.80 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1834.00 | -92.19 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1834.20 | -92.7 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1834.40 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1834.60 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1834.80 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1835.00 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1835.20 | -92.68 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1835.40 | -92.52 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1835.60 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1835.80 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1836.00 | -92.04 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1836.20 | -92.47 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1836.40 | -92.62 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1836.60 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1836.80 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1837.00 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1837.20 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1837.40 | -92.3 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1837.60 | -92.4 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1837.80 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1838.00 | -92.37 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1838.20 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1838.40 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1838.60 | -92.17 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1838.80 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1839.00 | -92.57 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1839.20 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1839.40 | -92.62 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1839.60 | -92.65 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1839.80 | -92.72 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1840.00 | -92.23 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1840.20 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1840.40 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1840.60 | -92.06 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1840.80 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1841.00 | -92.42 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1841.20 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1841.40 | -91.82 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1841.60 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1841.80 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1842.00 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1842.20 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1842.40 | -92.17 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1842.60 | -92.57 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1842.80 | -92.72 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1843.00 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1843.20 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1843.40 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1843.60 | -92.58 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1843.80 | -92.28 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1844.00 | -92.58 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1844.20 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1844.40 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1844.60 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1844.80 | -92.7 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1845.00 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1845.20 | -92.79 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1845.40 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1845.60 | -92.71 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1845.80 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1846.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1846.20 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1846.40 | -92.34 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1846.60 | -92.73 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1846.80 | -92.25 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1847.00 | -92.47 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1847.20 | -92.47 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1847.40 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1847.60 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1847.80 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1848.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1848.20 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1848.40 | -92.1 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1848.60 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1848.80 | -92.75 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1849.00 | -92.61 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1849.20 | -92.34 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1849.40 | -92.68 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1849.60 | -92.31 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1849.80 | -92.34 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1850.00 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1850.20 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1850.40 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1850.60 | -92.47 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1850.80 | -92.42 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1851.00 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1851.20 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1851.40 | -92.73 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1851.60 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1851.80 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1852.00 | -92.52 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1852.20 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1852.40 | -92.18 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1852.60 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1852.80 | -92.07 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1853.00 | -92.42 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1853.20 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1853.40 | -92.53 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1853.60 | -92.02 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1853.80 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1854.00 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1854.20 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1854.40 | -92.19 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1854.60 | -92.38 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1854.80 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1855.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1855.20 | -92.61 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1855.40 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1855.60 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1855.80 | -92.44 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1856.00 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1856.20 | -92.6 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1856.40 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1856.60 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1856.80 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1857.00 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1857.20 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1857.40 | -92.68 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1857.60 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1857.80 | -92.06 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1858.00 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1858.20 | -92.66 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1858.40 | -92.28 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1858.60 | -92.5 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1858.80 | -92.3 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1859.00 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1859.20 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1859.40 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1859.60 | -92.17 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1859.80 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1860.00 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1860.20 | -92.08 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1860.40 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1860.60 | -92.25 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1860.80 | -92.73 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1861.00 | -92.32 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1861.20 | -92.21 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1861.40 | -92.59 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1861.60 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1861.80 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1862.00 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1862.20 | -92.21 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1862.40 | -92.55 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1862.60 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1862.80 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1863.00 | -92.35 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1863.20 | -92.29 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1863.40 | -91.93 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1863.60 | -92.21 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1863.80 | -92.64 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1864.00 | -92.29 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1864.20 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1864.40 | -92.34 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1864.60 | -92.3 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1864.80 | -92.17 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1865.00 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1865.20 | -92.25 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1865.40 | -91.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1865.60 | -92.02 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1865.80 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1866.00 | -92.28 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1866.20 | -92.47 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1866.40 | -92.13 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1866.60 | -92.62 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1866.80 | -92.24 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1867.00 | -92.32 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1867.20 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1867.40 | -92.04 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1867.60 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1867.80 | -92.23 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1868.00 | -92.49 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1868.20 | -92.14 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1868.40 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1868.60 | -92.54 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1868.80 | -92.42 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1869.00 | -91.9 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1869.20 | -92.2 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1869.40 | -92.64 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1869.60 | -92.63 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1869.80 | -92.32 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1870.00 | -92.1 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1870.20 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1870.40 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1870.60 | -92.01 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1870.80 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1871.00 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1871.20 | -92.44 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1871.40 | -92.16 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1871.60 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1871.80 | -92.46 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1872.00 | -92.33 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1872.20 | -92.48 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1872.40 | -92.41 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1872.60 | -92.02 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1872.80 | -92.39 | -71 | PASS |

| | | | | | | | | |
|--------|-----|-------|---|-----|---------|--------|-----|------|
| GSM900 | 124 | 914.8 | 5 | 100 | 1873.00 | -92.05 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1873.20 | -92.13 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1873.40 | -92.2 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1873.60 | -92.21 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1873.80 | -92.2 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1874.00 | -92.22 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1874.20 | -92.4 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1874.40 | -92.34 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1874.60 | -92.06 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1874.80 | -92.36 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1875.00 | -92.27 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1875.20 | -92.68 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1875.40 | -92.45 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1875.60 | -92.23 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1875.80 | -92.51 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1876.00 | -92.09 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1876.20 | -92.09 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1876.40 | -92.35 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1876.60 | -92.35 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1876.80 | -92.43 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1877.00 | -92.19 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1877.20 | -92.24 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1877.40 | -92.26 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1877.60 | -92.21 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1877.80 | -92.27 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1878.00 | -92.31 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1878.20 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1878.40 | -92.21 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1878.60 | -92.2 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1878.80 | -92.39 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1879.00 | -92.16 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1879.20 | -92.56 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1879.40 | -92.07 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1879.60 | -92.24 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1879.80 | -91.9 | -71 | PASS |
| GSM900 | 124 | 914.8 | 5 | 100 | 1880.00 | -92.45 | -71 | PASS |