

RADIO TEST REPORT

For

Shenzhen Huafurui Technology Co., Ltd.


Wireless Earphone

Test Model: Vibe R3

Prepared for	: Shenzhen Huafurui Technology Co., Ltd.
Address	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Prepared by	: Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address	: 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Tel	: (+86)755-29871520
Fax	: (+86)755-29871521
Web	: www.slcslab.com
Mail	: info@slcslab.com
Date of receipt of test sample	: May 13, 2026
Number of tested samples	: 2
Sample No.	: A260511063-1, A260511063-2
Serial number	: Prototype
Date of Test	: May 13, 2026 ~ May 27, 2026
Date of Report	: May 28, 2026



RADIO TEST REPORT ETSI EN 300 328 V2.2.2 (2019-07) Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum	
Report Reference No.	: LCSB05126044EC
Date of Issue	: May 28, 2026
Testing Laboratory Name	: Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address	: 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Testing Location/ Procedure ...	: Full application of Harmonised standards <input checked="" type="checkbox"/> : Partial application of Harmonised standards <input type="checkbox"/> : Other standard testing method <input type="checkbox"/>
Applicant's Name	: Shenzhen Huafurui Technology Co., Ltd.
Address	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Test Specification Standard..... : ETSI EN 300 328 V2.2.2 (2019-07) Test Report Form No. : TRF-4-E-134 A/0 TRF Originator : Shenzhen Southern LCS Compliance Testing Co., Ltd. Master TRF : Dated 2017-06	
Shenzhen Southern LCS Compliance Testing Co., Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test Item Description.....	: Wireless Earphone
Trade Mark.....	: CUBOT
Test Model.....	: Vibe R3
Ratings	: Please Refer to Page 6
Result	: PASS

Compiled by:


Sean Huang/ Administrator

Reviewed by:


Kris Mai/ Project Engineer

Approved by:


DM Gu/ Manager

RADIO -- TEST REPORT

Test Report No. : LCSB05126044EC	<u>May 28, 2026</u> Date of issue
---	--------------------------------------

Test Model.....	: Vibe R3
EUT.....	: Wireless Earphone
Applicant.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	May 28, 2026	Initial Issue	---



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2. OBJECTIVE.....	11
1.3. RELATED SUBMITTAL(S)/GRANT(S).....	11
1.4. TEST METHODOLOGY	11
1.5. DESCRIPTION OF TEST FACILITY.....	11
1.6. SUPPORT EQUIPMENT LIST	11
1.8. MEASUREMENT UNCERTAINTY	12
1.9. TEST ENVIRONMENT	12
1.10. DESCRIPTION OF TEST MODES.....	12
2. SYSTEM TEST CONFIGURATION	13
2.1. JUSTIFICATION	13
2.2. EUT EXERCISE SOFTWARE	13
2.3. SPECIAL ACCESSORIES	13
2.4. BLOCK DIAGRAM/SCHEMATICS.....	13
2.5. EQUIPMENT MODIFICATIONS	13
2.6. CONFIGURATION OF TEST SETUP	13
3. SUMMARY OF TEST RESULT	14
4. TEST RESULTS.....	15
4.1. RF OUTPUT POWER	15
4.2. POWER SPECTRAL DENSITY	17
4.3. DUTY CYCLE, TX-SEQUENCE, TX-GAP	19
4.4. MEDIUM UTILISATION (MU) FACTOR.....	20
4.5. ADAPTIVITY (ADAPTIVE EQUIPMENT USING MODULATIONS OTHER THAN FHSS).....	21
4.6. OCCUPIED CHANNEL BANDWIDTH.....	23
4.7. TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN.....	24
4.8. TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	27
4.9. RECEIVER SPURIOUS EMISSIONS	30
4.10. RECEIVER BLOCKING.....	32
5. LIST OF MEASURING EQUIPMENT	35
6. PHOTOGRAPHS OF TEST SETUP	36
7. PHOTOGRAPHS OF THE EUT	36

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	: Wireless Earphone
Test Model	: Vibe R3
Additional Model No.	: Vibe R5, Vibe R7, Vibe R8, Vibe R9, Vibe RS, Vibe RS3, Vibe RS5, Vibe R Lite, Vibe R Mini, Vibe R Pro, Vibe Fit, Vibe Mini, Vibe Lite, Vibe Air, Vibe Bass, Vibe Box, Vibe Pro
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Ratings	: Input: DC 5V, 1A Headset: DC 3.7V by Li-ion Battery(28mAh) Charging case: DC 3.7V by Li-ion Battery(230mAh)
Hardware Version	: XRX-CBDL-C98-MCU-V1.3
Software Version	: F-010_L_(CUBOT Vibe R3)_v164_P4_CBDL
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V6.0 (BDR/EDR)
Channel Spacing	: 1MHz for Bluetooth V6.0 (BDR/EDR)
Modulation Type	: GFSK, $\pi/4$ -DQPSK for Bluetooth V6.0 (BDR/EDR)
Bluetooth Version	: V6.0
Antenna Description	: Internal Antenna, 1.7dBi(Max.)

Product Information

a) The type of modulation used by the equipment:

☐ FHSS

☒ other forms of modulation

b) In case of FHSS modulation:

• In case of non-Adaptive Frequency Hopping equipment:

The number of Hopping Frequencies:

• In case of Adaptive Frequency Hopping Equipment:

The maximum number of Hopping Frequencies:

The minimum number of Hopping Frequencies:

The Dwell Time:

The Minimum Channel Occupation Time:

c) Adaptive / non-adaptive equipment:

☐ non-adaptive Equipment

☒ adaptive Equipment without the possibility to switch to a non-adaptive mode

☐ adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment:

☐ The equipment has implemented an LBT based DAA mechanism

• In case of equipment using modulation different from FHSS:

☐ The equipment is Frame Based equipment

☐ The equipment is Load Based equipment

☐ The equipment can switch dynamically between Frame Based and Load Based equipment

The CCA time implemented by the equipment: μ s

The value q as referred to in clause 4.3.2.5.2.2.2

☒ The equipment has implemented an non-LBT based DAA mechanism

☐ The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): 3.71dBm

The maximum (corresponding) Duty Cycle: 100%

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

• RF Output Power

GFSK

• Power Spectral Density

GFSK

• Duty cycle, Tx-Sequence, Tx-gap

.....

• Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)

-
- Hopping Frequency Separation (only for FHSS equipment)
-

- Medium Utilisation
-

- Adaptivity & Receiver Blocking
-

- Occupied Channel Bandwidth

GFSK

- Transmitter unwanted emissions in the OOB domain

GFSK

- Transmitter unwanted emissions in the spurious domain

GFSK

- Receiver spurious emissions

GFSK

g) The different transmit operating modes (tick all that apply):

☒ Operating mode 1: Single Antenna Equipment

☒ Equipment with only 1 antenna

☐ Equipment with 2 diversity antennas but only 1 antenna active at any moment in time

☐ Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)

☐ Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming

☐ Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

☐ Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming

☐ Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1

☐ High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

NOTE: Add more lines if more channel bandwidths are supported.

h) In case of Smart Antenna Systems:

- The number of Receive chains:

- The number of Transmit chains:

☐ symmetrical power distribution

☐ asymmetrical power distribution

In case of beam forming, the maximum beam forming gain:

NOTE: Beam forming gain does not include the basic gain of a single antenna.

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2402 MHz to 2480 MHz

- Operating Frequency Range 2: MHz to MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Occupied Channel Bandwidth: 2.0303MHz

NOTE: Add more lines if more channel bandwidths are supported.

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

☒ Stand-alone

☐ Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)

☐ Plug-in radio device (Equipment intended for a variety of host systems)

Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -20° C to 45° C

Details provided are for the: ☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

• Antenna Type

☒ Internal Antenna

Antenna Gain: 1.7dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

☐ Temporary RF connector provided

☐ No temporary RF connector provided

☐ Dedicated Antennas (equipment with antenna connector)

☐ Single power level with corresponding antenna(s)

☐ Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1: dBm

Power Level 2: dBm

Power Level 3: dBm

NOTE 1: Add more lines in case the equipment has more power levels.

NOTE 2: These power levels are conducted power levels (at antenna connector).

n) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: ☒ stand-alone equipment

☐ combined (or host) equipment

☐ test jig

Supply Voltage ☐ AC mains State AC voltage: 230V

☒ DC State DC voltage: 5V

In case of DC, indicate the type of power source

☐ Internal Power Supply

☐ External Power Supply or AC/DC adapter

☒ Battery: 3.7V

☐ Other:

o) Describe the test modes available which can facilitate testing:
The EUT can transmit in engineering mode.

p) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):
Bluetooth®



1.2. Objective

This Type approval report is prepared on behalf of **Shenzhen Huafurui Technology Co., Ltd.** in accordance with ETSI EN 300 328 V2.2.2 (2019-07), Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz band; Harmonised Standard for access to radio spectrum.

The objective is to determine compliance with ETSI EN 300 328 V2.2.2 (2019-07).

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 300 328 V2.2.2 (2019-07).

1.5. Description of Test Facility

Test Location	Shenzhen Southern LCS Compliance Testing Co., Ltd. 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160.
---------------	--

1.6. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	---	CE

Note: Auxiliary equipment is provided by the laboratory.

1.7. External I/O

I/O Port Description	Quantity	Cable
Type-C Port	1	N/A

1.8. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Occupied Channel Bandwidth	5 %
RF output power, conducted	1,5 dB
Power Spectral Density, conducted	3 dB
Unwanted Emissions, conducted	3 dB
All emissions, radiated	6 dB
Temperature	1 °C
Humidity	5 %
DC and low frequency voltages	3 %
Time	5 %
Duty Cycle	5 %

1.9. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	22.5
Humidity (%RH)	25-75	51.4
Barometric pressure (mbar)	860-1060	950-1000

1.10. Description of Test Modes

LCS has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit by BLE
Mode 2: Receive by BLE

Note:

- (1) For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
- (2) Regard to the frequency band operation for systems using Wide Band modulation: the lowest, middle, highest frequency channel for conducted test, and the lowest, highest frequency channel for radiation spurious test.
- (3) The extreme test condition for voltage and temperature were declared by the manufacturer.
- (4) All test modes were tested, but we only recorded the worst case in this report.

2. SYSTEM TEST CONFIGURATION

2.1. Justification

The system was configured for testing in engineering mode.

2.2. EUT Exercise Software

N/A.

2.3. Special Accessories

N/A.

2.4. Block Diagram/Schematics

Please refer to the related document.

2.5. Equipment Modifications

Shenzhen Southern LCS Compliance Testing Co., Ltd. has not done any modification on the EUT.

2.6. Configuration of Test Setup

Please refer to the test setup photo.

3. SUMMARY OF TEST RESULT

- ☒ No deviations from the test standards
☐ Deviations from the test standards as below description:

Technical requirements for the equipment using wide band modulations other than FHSS:

Performed Test Item	Normative References	Test Performed	Deviation
RF Output Power & Receiver Category	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No
Power Spectral Density	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No
Duty cycle, Tx-Sequence, Tx-gap	ETSI EN 300 328 V2.2.2 (2019-07)	N/A	N/A
Medium Utilisation (MU) factor	ETSI EN 300 328 V2.2.2 (2019-07)	N/A	N/A
Adaptivity	ETSI EN 300 328 V2.2.2 (2019-07)	N/A	N/A
Occupied Channel Bandwidth	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No
Transmitter unwanted emissions in the out-of-band domain	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No
Transmitter unwanted emissions in the spurious domain	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No
Receiver Spurious Emissions	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No
Receiver Blocking	ETSI EN 300 328 V2.2.2 (2019-07)	Yes	No

Note: The EUT can operate in an adaptive mode, and can't operate in a non-adaptive mode which is stated by the supplier.

4. TEST RESULTS

4.1. RF Output Power

4.1.1 Limit


For adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be 20 dBm.

The maximum RF output power for non-adaptive equipment shall be declared by the supplier and shall not exceed 20 dBm. For non-adaptive equipment using wide band modulations other than FHSS, the maximum RF output power shall be equal to or less than the value declared by the supplier.

This limit shall apply for any combination of power level and intended antenna assembly.

4.1.2 Test Setup

For Conducted Measurement

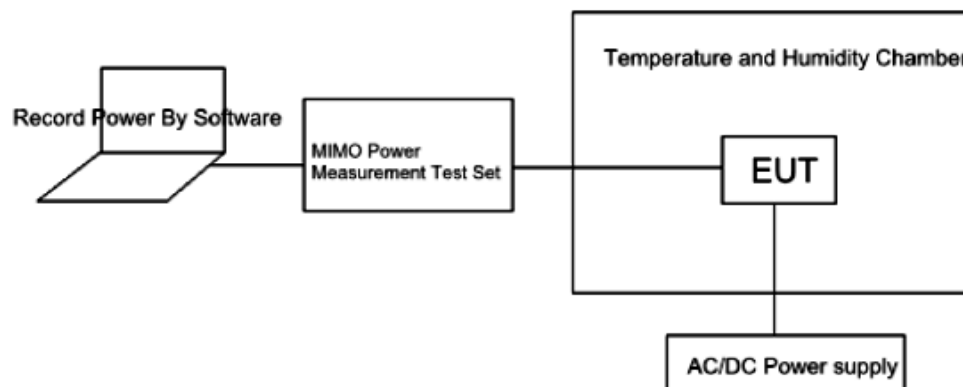

4.1.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.2

Step 1:

- The fast power sensor use the following setting: Sample speed 1 MS/s.

Step 2:

- Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.

Step 3:

- Find the start and stop times of each burst in the stored measurement samples.

Step 4:

- Between the start and stop times of each individual burst calculate the RMS power over the burst. Save these Pburst values, as well as the start and stop times for each burst.

Step 5:

- The highest of all Pburst values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.

Step 6:

- Add the (stated) antenna assembly gain "G" in dBi of the individual antenna.
- If applicable, add the additional beamforming gain "Y" in dB.

The RF Output Power (P) shall be calculated using the formula below:

$$P = A + G + Y$$

4.1.4 Test Result

PASS

Please refer to the Appendix F.1 for BT LE RF Test Data.

4.1.5 Receiver Category

Receiver Category 1: Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p. shall be considered as receiver category 1 equipment.

Receiver Category 2: Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or equipment (adaptive or non-adaptive) with a maximum RF output power greater than 0 dBm e.i.r.p. and less than or equal to 10 dBm e.i.r.p. shall be considered as receiver category 2 equipment.

Receiver Category 3: Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or equipment (adaptive or non-adaptive) with a maximum RF output power of 0 dBm e.i.r.p. shall be considered as receiver category 3 equipment.


As this is an adaptivity device with a maximum power of 3.71dBm, **it belongs to receiver category 2.**

4.2. Power Spectral Density

4.2.1 Limit

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10dBm per MHz.

4.2.2 Test Setup

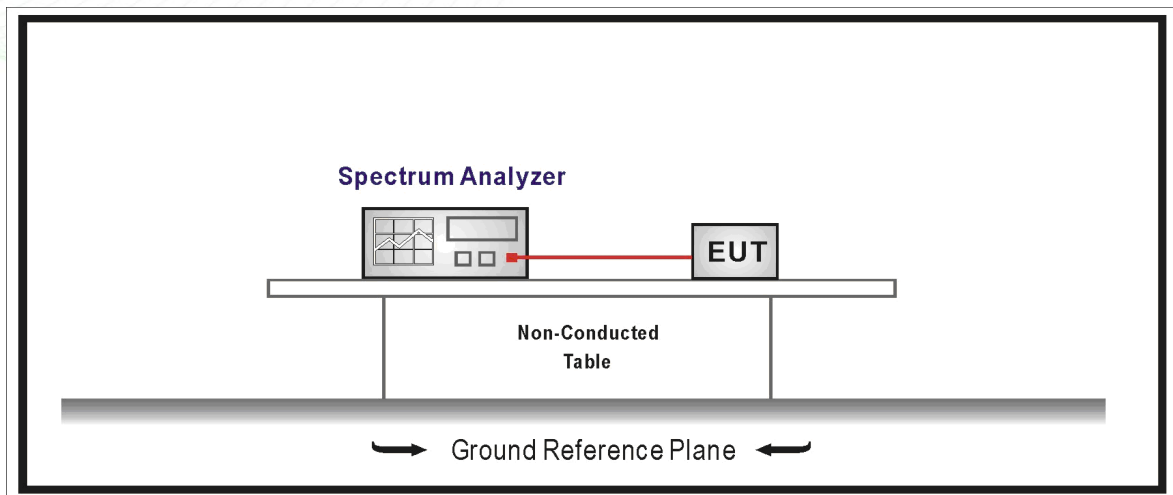

4.2.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.3

Step 1:

Connect the UUT to the spectrum analyzer and use the following settings:

- Start Frequency: 2 400 MHz
- Stop Frequency: 2 483,5 MHz
- Resolution BW: 10 kHz
- Video BW: 30 kHz
- Sweep Points: > 8 350
- Detector: RMS
- Trace Mode: Max Hold
- Sweep time: Auto

For non-continuous signals, wait for the trace to be completed. Save the (trace) data set to a file.

Step 2:

For each frequency point, add up the amplitude (power) values for the different transmit chains and use this as the new data set.

Step 3:

Add up the values for amplitude (power) for all the samples in the file.

Step 4:

Normalize the individual values for amplitude so that the sum is equal to the RF Output Power (e.i.r.p.).

Step 5:

Starting from the first sample in the file (lowest frequency), add up the power of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment which shall be recorded.

Step 6:

Shift the start point of the samples added up in step 5 by 1 sample and repeat the procedure in step 5 (i.e. sample #2 to #101).

Step 7:

Repeat step 6 until the end of the data set and record the radiated Power Spectral Density values for each of the 1 MHz segments. From all the recorded results, the highest value is the maximum Power Spectral Density for the UUT.

4.2.4 Test Result

PASS


Please refer to the Appendix F.2 for BT LE RF Test Data.

4.3. Duty Cycle, TX-Sequence, TX-Gap

4.3.1 Limit

The Duty Cycle shall be equal to or less than the maximum value declared by the supplier. The maximum Tx-sequence Time and the minimum Tx-gap Time shall be according to the formula below: Maximum Tx-Sequence Time = Minimum Tx-gap Time = M where M is in the range of 3,5 ms to 10 ms.

4.3.2 Test Setup

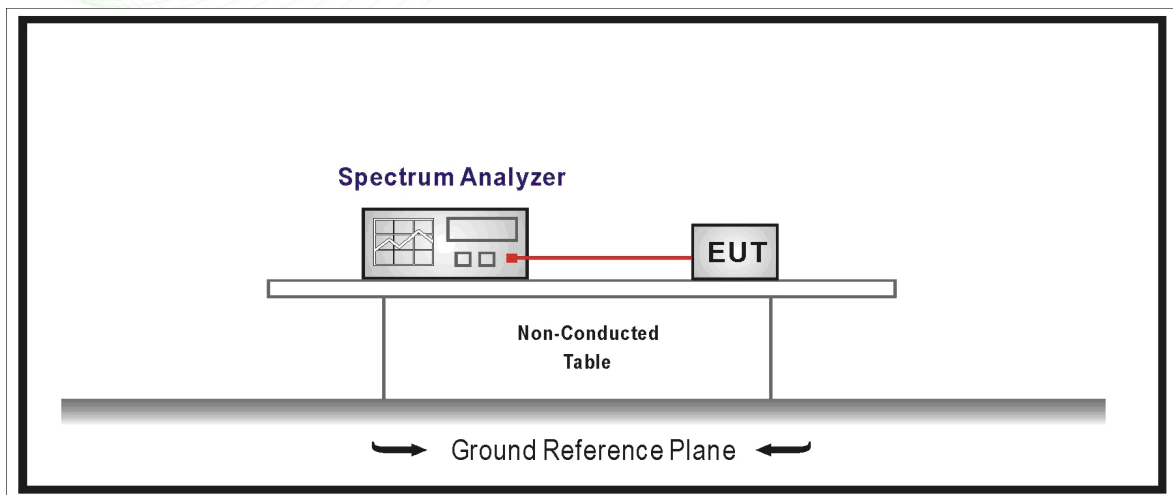

4.3.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.2

4.3.4 Test Result

These requirements apply to non-adaptive frequency hopping equipment or to adaptive frequency hopping equipment operating in a non-adaptive mode.

These requirements do not apply for equipment with a maximum declared RF Output power of less than 10dBm E.I.R.P. or for equipment when operating in a mode where the RF Output power is less than 10dBm E.I.R.P.

No applicable.


4.4. Medium Utilisation (MU) Factor

4.4.1 Limit

For non-adaptive equipment

The maximum Medium Utilisation factor for non-adaptive Frequency Hopping equipment shall be 10 %.

4.4.2 Test Setup

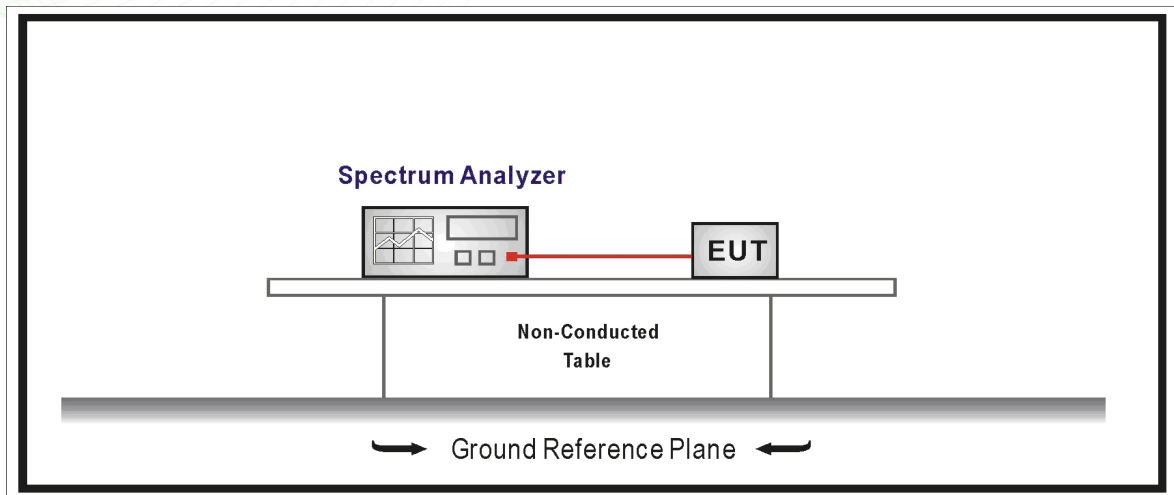

4.4.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.2

4.4.4 Test Result

This requirement does not apply to adaptive equipment unless operating in a non-adaptive mode.

In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10dBm E.I.R.P. or for equipment when operating in a mode where the RF Output power is less than 10dBm E.I.R.P.

No applicable.


4.5. Adaptivity (Adaptive Equipment Using Modulations Other than FHSS)

4.5.1 Limit

Adaptivity Limit	
<input type="checkbox"/>	<p>Non-LBT based Detect and Avoid</p> <p>--- The channel shall remain unavailable for a minimum time equal to 1 s after which the channel may be considered again as an 'available' channel;</p> <p>--- $COT \leq 40 \text{ ms}$;</p> <p>--- $COT \leq 60 \text{ ms}$;</p> <p>--- Idle Period shall be minimum 5% of COT with a minimum of 100us;</p> <p>--- Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$ (P_{out} in dBm);</p>
<input type="checkbox"/>	<p>LBT based Detect and Avoid(Frame Based Equipment)</p> <p>--- The CCA observation time shall be not less than 20 us;</p> <p>--- The CCA time used by the equipment shall be declared by the supplier;</p> <p>--- $COT = 1\text{-}10 \text{ ms}$;</p> <p>--- Idle Period = 5% of COT;</p> <p>--- Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$ (P_{out} in dBm);</p>
<input type="checkbox"/>	<p>LBT based Detect and Avoid(Load Based Equipment)</p> <p>--- The CCA observation time shall be not less than 20 us;</p> <p>--- The CCA time used by the equipment shall be declared by the supplier;</p> <p>--- $COT \leq (13 / 32) * q \text{ ms}$; $q = [4\sim32]$; 1.625ms~13ms;</p> <p>--- R = number of clear idle slots are randomly [1~q]. Every time an Extended CCA is required and the 'R' value stored in a counter.</p> <p>--- Detection threshold level = $-70\text{dBm/MHz} + 20 - P_{out} \text{ E.I.R.P}$ (P_{out} in dBm);</p>
<input type="checkbox"/>	<p>Short Control Signalling Transmissions:</p> <p>--- Short Control Signalling Transmissions shall have a maximum duty cycle of 10% within an observation period of 50ms.</p>

4.5.2 Test Setup

Conducted measurements

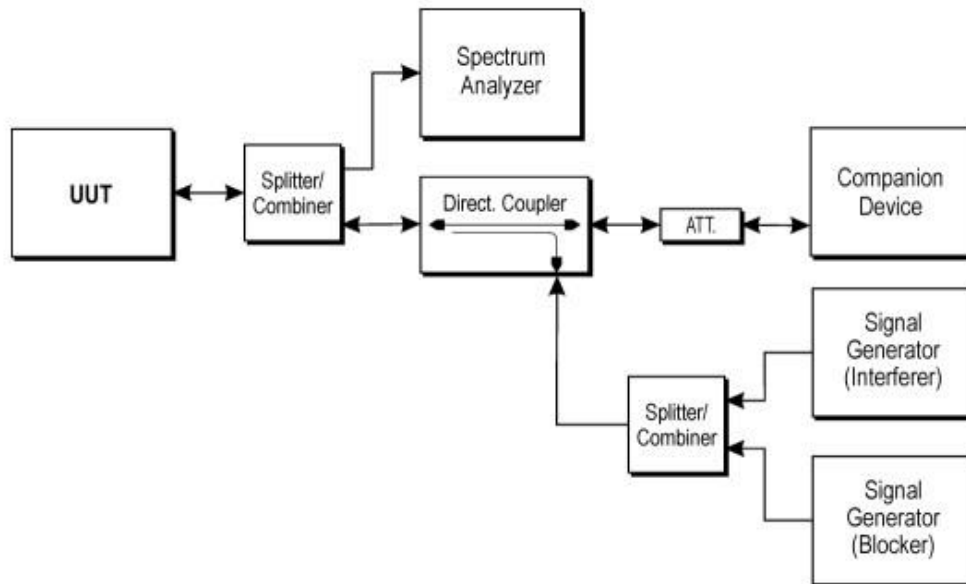

4.5.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.6

4.5.4 Test Result

This requirement does not apply to non-adaptive equipment or adaptive equipment operating in a non-adaptive mode providing the equipment complies with the requirements and/or restrictions applicable to non-adaptive equipment.

In addition, this requirement does not apply for equipment with a maximum declared RF Output power level of less than 10dBm E.I.R.P. or for equipment when operating in a mode where the RF Output power is less than 10dBm E.I.R.P.

No applicable.


4.6. Occupied Channel Bandwidth

4.6.1 Limit

The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band given in 2.4GHz to 2.4835GHz.

For non-adaptive Frequency Hopping equipment with E.I.R.P greater than 10dBm, the Occupied Channel Bandwidth for every occupied hopping frequency shall be equal to or less than the value declared by the supplier. This declared value shall not be greater than 5 MHz.

4.6.2 Test Setup

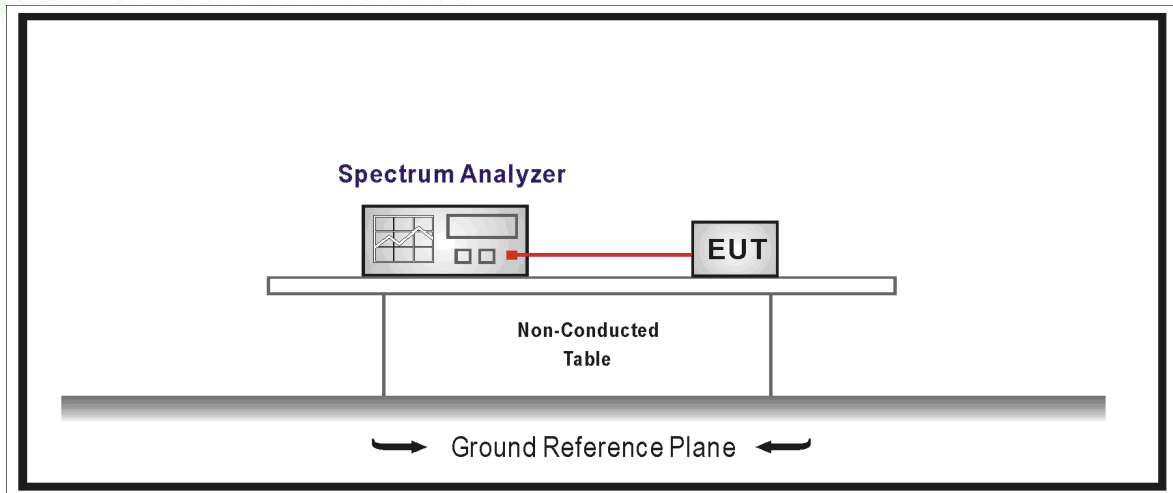

4.6.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.7

Step 1:

Connect the UUT to the spectrum analyser and use the following settings:

- Centre Frequency: The centre frequency of the channel under test
- Resolution BW: ~ 1 % of the span without going below 1 % (We set RBW= 43KHz)
- Video BW: $3 \times \text{RBW}$
- Frequency Span: $2 \times \text{Occupied Channel Bandwidth}$ (e.g. 40 MHz for a 20 MHz channel)
- Detector Mode: RMS
- Trace Mode: Max Hold

Step 2:

Wait until the trace is completed. Find the peak value of the trace and place the analyzer marker on this peak.

Step 3:

Use the 99 % bandwidth function of the spectrum analyzer to measure the Occupied Channel Bandwidth of the UUT. This value shall be recorded.

4.6.4 Test Result

PASS

Please refer to the Appendix F.3 for BT LE RF Test Data.

4.7. Transmitter Unwanted Emissions in the Out-of-band Domain

4.7.1 Limit

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.


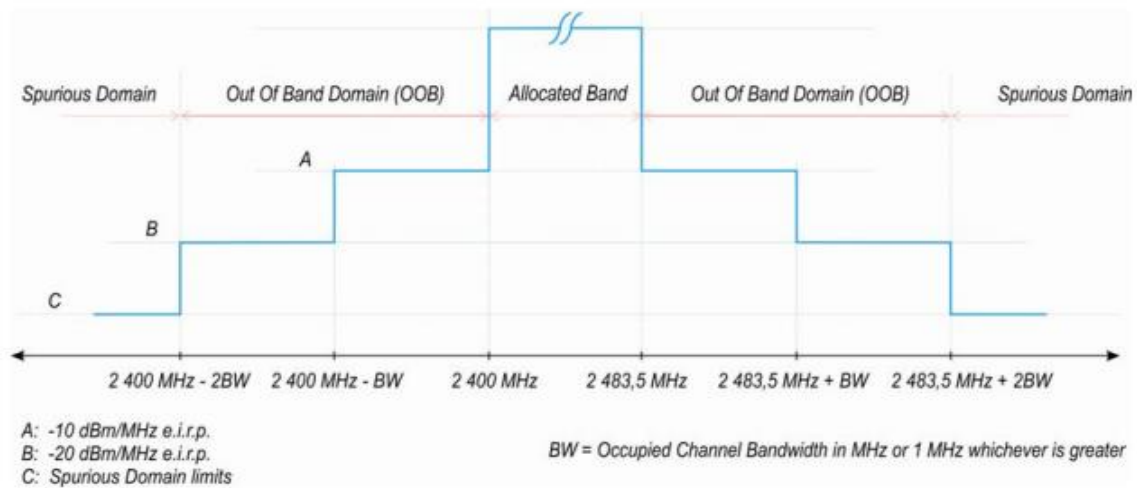


Figure 3: Transmit mask

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

4.7.2 Test Setup

For Conducted Measurement

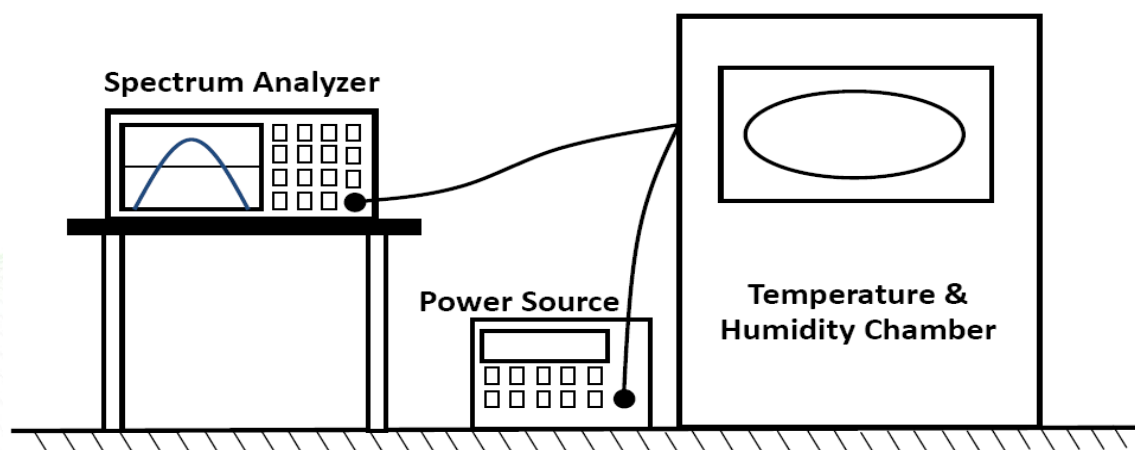

4.7.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.8

Step 1:

- Connect the UUT to the spectrum analyzer and use the following settings:

- Centre Frequency: 2 484 MHz
- Span: 0 Hz
- Resolution BW: 1 MHz
- Filter mode: Channel filter
- Video BW: 3 MHz
- Detector Mode: RMS
- Trace Mode: Clear / Write
- Sweep Mode: Continuous
- Sweep Points: 5 000
- Trigger Mode: Video trigger

NOTE 1: In case video triggering is not possible, an external trigger source may be used.

- Sweep Time: Suitable to capture one transmission burst

Step 2: (segment 2 483,5 MHz to 2 483,5 MHz + BW)

- Adjust the trigger level to select the transmissions with the highest power level.
- For frequency hopping equipment operating in a normal hopping mode, the different hops will result in signal bursts with different power levels. In this case the burst with the highest power level shall be selected.
- Set a window (start and stop lines) to match with the start and end of the burst and in which the RMS power shall be measured using the Time Domain Power function.
- Select RMS power to be measured within the selected window and note the result which is the RMS power within this 1 MHz segment (2 483,5 MHz to 2 484,5 MHz). Compare this value with the applicable limit provided by the mask.
- Increase the centre frequency in steps of 1 MHz and repeat this measurement for every 1 MHz segment within the range 2 483,5 MHz to 2 483,5 MHz + BW. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + BW - 0,5 MHz (which means this may partly overlap with the previous 1 MHz segment).

Step 3: (segment 2 483,5 MHz + BW to 2 483,5 MHz + 2BW)

- Change the centre frequency of the analyzer to 2 484 MHz + BW and perform the measurement for the first 1 MHz segment within range 2 483,5 MHz + BW to 2 483,5 MHz + 2BW. Increase the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 483,5 MHz + 2 BW - 0,5 MHz.

Step 4: (segment 2 400 MHz - BW to 2 400 MHz)

- Change the centre frequency of the analyzer to 2 399,5 MHz and perform the measurement for the first 1 MHz segment within range 2 400 MHz - BW to 2 400 MHz. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.

Step 5: (segment 2 400 MHz - 2BW to 2 400 MHz - BW)

- Change the centre frequency of the analyzer to 2 399,5 MHz - BW and perform the measurement for the first 1 MHz segment within range 2 400 MHz - 2BW to 2 400 MHz - BW. Reduce the centre frequency in 1 MHz steps and repeat the measurements to cover this whole range. The centre frequency of the last 1 MHz segment shall be set to 2 400 MHz - 2BW + 0,5 MHz.

Step 6:

- In case of conducted measurements on equipment with a single transmit chain, the declared antenna assembly gain "G" in dBi shall be added to the results for each of the 1 MHz segments and compared with the limits provided by the mask given in figures 1 or 3. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered.
 - In case of conducted measurements on smart antenna systems (equipment with multiple transmit chains), the measurements need to be repeated for each of the active transmit chains. The declared antenna assembly gain "G" in dBi for a single antenna shall be added to these results. If more than one antenna assembly is intended for this power setting, the antenna with the highest gain shall be considered. Comparison with the applicable limits shall be done using any of the options given below:
 - Option 1: the results for each of the transmit chains for the corresponding 1 MHz segments shall be added. The additional beamforming gain "Y" in dB shall be added as well and the resulting values compared with the limits provided by the mask given in figures 1 or 3.
 - Option 2: the limits provided by the mask given in figures 1 or 3 shall be reduced by $10 \times \log_{10}(A_{ch})$ and the additional beamforming gain "Y" in dB. The results for each of the transmit chains shall be individually compared with these reduced limits.
- NOTE 2: A_{ch} refers to the number of active transmit chains.
It shall be recorded whether the equipment complies with the mask provided in figures 1 or 3.

4.7.4 Test Result

PASS

Please refer to the Appendix F.4 for BT LE RF Test Data.


4.8. Transmitter Unwanted Emissions in the Spurious Domain

4.8.1 Limit


Transmitter Limits for Spurious Emissions		
Frequency Range	Maximum power E.R.P. ($\leq 1\text{GHz}$) E.I.R.P. ($> 1\text{GHz}$)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

4.8.2 Test Setup

For Radiated Measurement

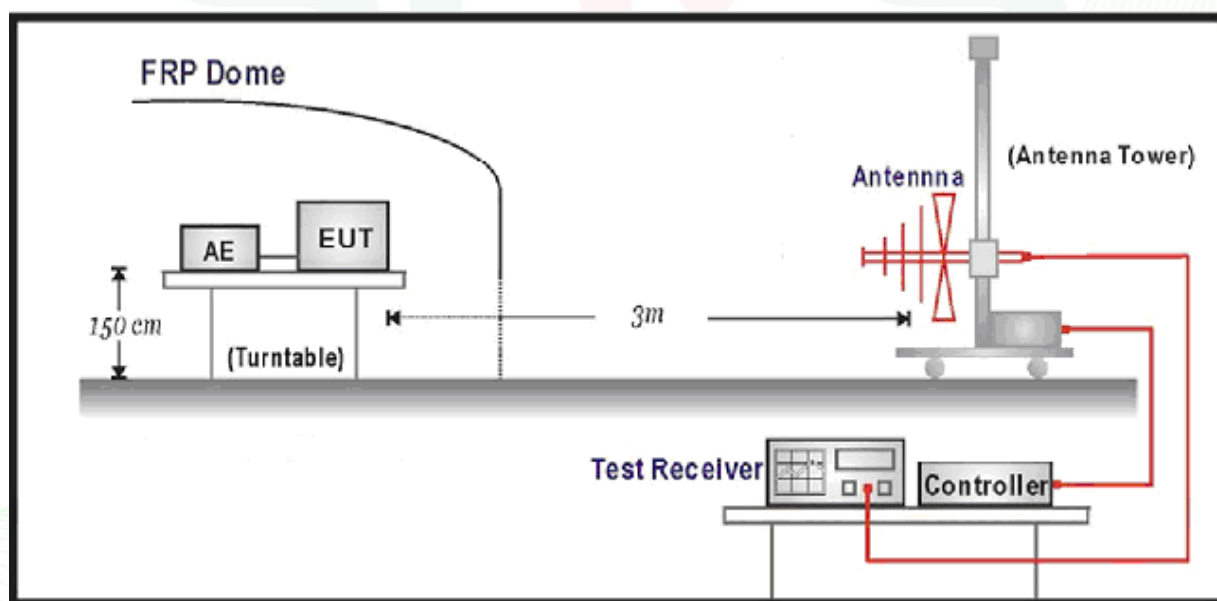

For Conducted Measurement

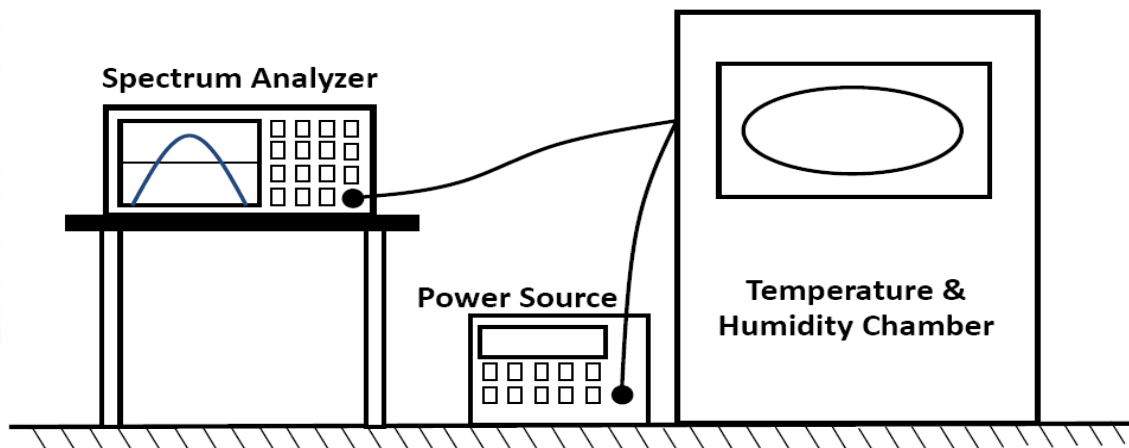

4.8.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.9

Step 1:

The sensitivity of the spectrum analyser should be such that the noise floor is at least 12 dB below the limits given in tables 1 or 4.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 300 kHz
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 9\,970$

NOTE 1: For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.

- Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 100 kHz frequency step, the measurement time is greater than two transmissions of the UUT. For Frequency Hopping equipment operating in a normal operating (hopping not disabled) mode, the sweep time shall be further increased to capture multiple transmissions on the same hopping frequency in different hopping sequences. Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.10.2.1.2 and compared to the limits given in tables 1 or 4.

Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz

- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 11\,750$

NOTE 2: For spectrum analysers not supporting this high number of sweep points, the frequency band may need to be segmented.

- Sweep time: For non continuous transmissions (duty cycle less than 100 %), the sweep time shall be sufficiently long, such that for each 1 MHz frequency step, the measurement time is greater than two transmissions of the UUT.

4.8.4 Test Result

PASS

Please refer to the Appendix F.5 for BT LE RF Test Data.




4.9. Receiver Spurious Emissions

4.9.1 Limit


Spurious emissions limits for receivers		
Frequency Range	Maximum power E.R.P. ($\leq 1\text{GHz}$) E.I.R.P. ($> 1\text{GHz}$)	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12.75 GHz	-47 dBm	1 MHz

4.9.2 Test Setup

For Radiated Measurement

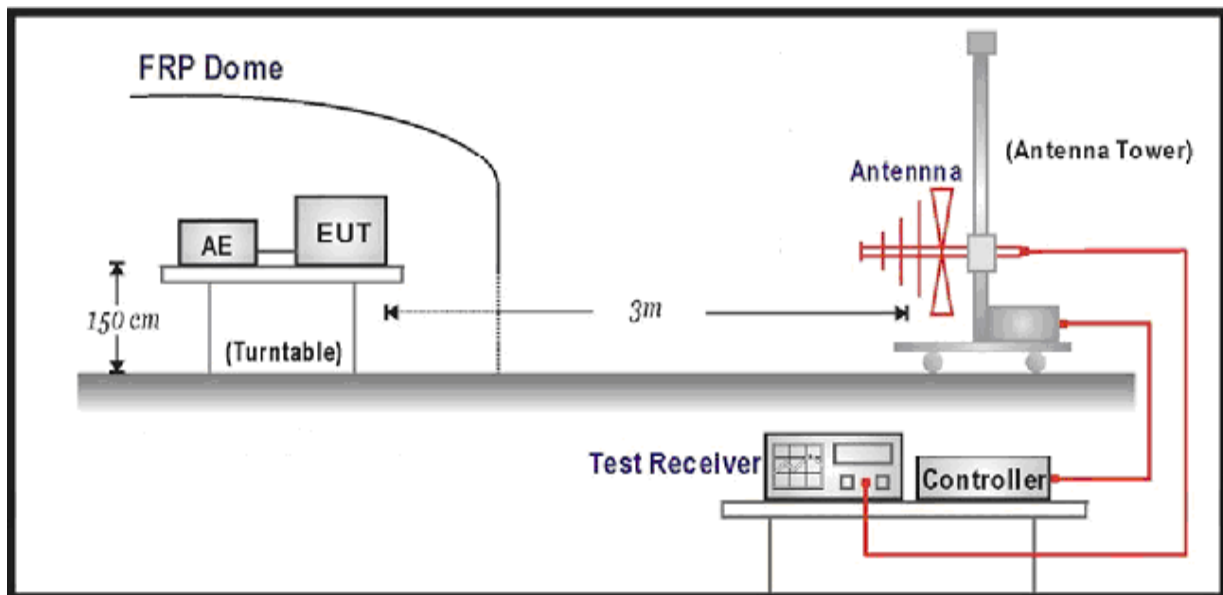

For Conducted Measurement

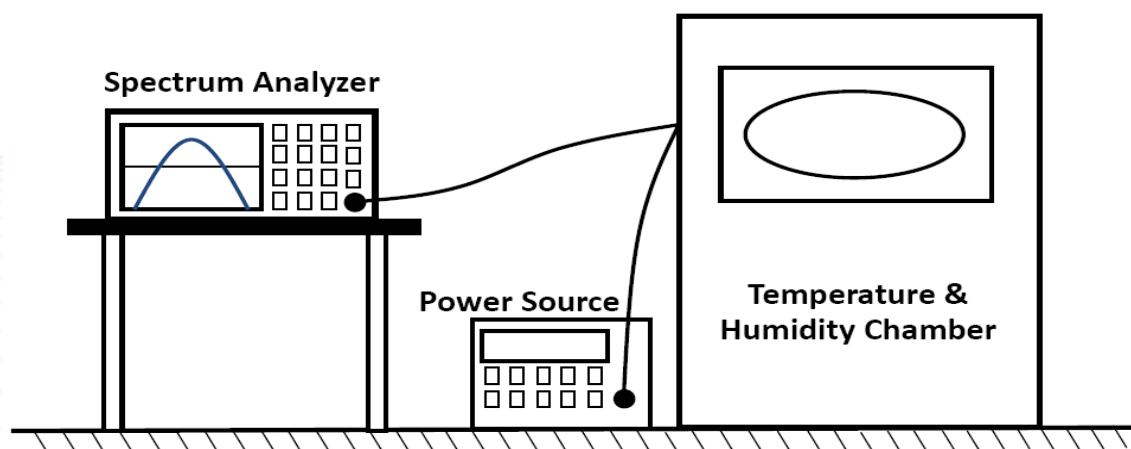

4.9.3 Test Procedure

Refer to ETSI EN 300 328 V2.2.2 (2019-07) Clause 5.4.10

Step 1:

The sensitivity of the spectrum analyzer should be such that the noise floor is at least 12 dB below the limits given in tables 2 or 5.

Step 2:

The emissions over the range 30 MHz to 1 000 MHz shall be identified.

Spectrum analyzer settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 300 kHz
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 9\,970$
- Sweep time: Auto

Allow the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.11.2.1.2 and compared to the limits given in tables 2 or 5.

Step 3:

The emissions over the range 1 GHz to 12,75 GHz shall be identified.

Spectrum analyzer settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points: $\geq 11\,750$
- Sweep time: Auto

Allow the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 5.3.11.2.1.2 and compared to the limits given in tables 2 or 5. Frequency Hopping equipment may generate a block (or several blocks) of spurious emissions anywhere within the spurious domain. If this is the case, only the highest peak of each block of emissions shall be measured using the procedure in clause 5.3.11.2.1.2.

Step 4:

- In case of conducted measurements on smart antenna systems (equipment with multiple receive chains), the steps 2 and 3 need to be repeated for each of the active receive chains (Ach). The limits used to identify emissions during this pre-scan need to be reduced with $10 \times \log_{10}(\text{Ach})$ (number of active receive chains).

4.9.4 Test Result

PASS

Please refer to the Appendix F.6 for BT LE RF Test Data.

4.10. Receiver Blocking

4.10.1 Limit

Equipment shall comply with the requirements defined in clause 4.3.1.12.4

Table 6: Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 26 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P _{min} + 20 dB where P _{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 7: Receiver Blocking parameters receiver Category 2 equipment


Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz. NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 26 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal. NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Table 8: Receiver Blocking parameters receiver Category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + $10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB}$) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
<p>NOTE 1: OCBW is in Hz.</p> <p>NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.</p> <p>NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.</p>			

4.10.2 Test Setup

Conducted measurements

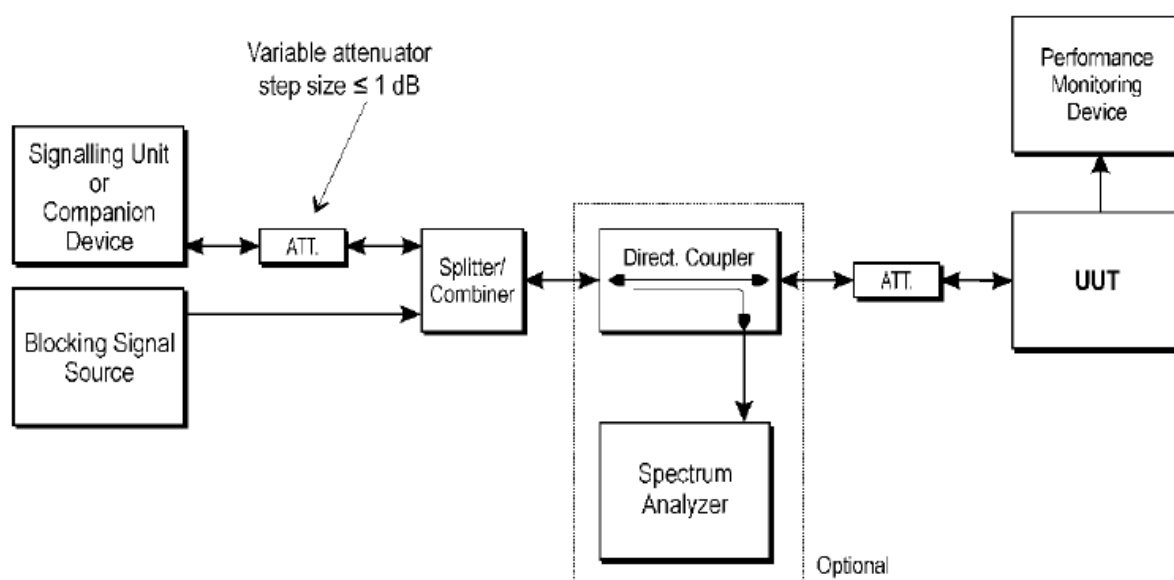

4.10.3 Test Procedure

Step 1:

- For non-frequency hopping equipment, the UUT shall be set to the lowest operating channel.

Step 2:

- The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.

Step 3:

- With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device using the test setup shown in figure 6. The attenuation of the variable attenuator shall be increased in 1 dB steps to a value at which the minimum performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is still met.

The resulting level for the wanted signal at the input of the UUT is P_{min} .

- This signal level (P_{min}) is increased by the value provided in the table corresponding to the receiver category and type of equipment.

Step 4:

- The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria as specified in clause 4.3.1.12.3 or clause 4.3.2.11.3 is met.

Step 5:

- Repeat step 4 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.

Step 6:

- For non-frequency hopping equipment, repeat step 2 to step 5 with the UUT operating at the highest operating channel.

4.10.4 Test Result

PASS

Please refer to the Appendix F.7 for BT LE RF Test Data.



5. LIST OF MEASURING EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	LTE Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
2	LTE Test Software	Tonscend	JS1120-1	N/A	N/A	N/A
3	RF Control Unit	Tonscend	JS0806-1	158060009	2025-07-16	2026-07-15
4	RF Control Unit	Tonscend	JS0806-2	/	2025-07-16	2026-07-15
5	MXA Signal Analyzer	Agilent	N9020A	MY49061051	2025-07-16	2026-07-15
6	MXA Signal Analyzer	Agilent	N9020A	MY51250905	2025-07-16	2026-07-15
7	DC Power Supply	Agilent	E3642A	N/A	2025-09-27	2026-09-26
8	MXG Vector Signal Generator	Agilent	E4438C	MY42081396(6G)	2025-07-16	2026-07-15
9	MXG Vector Signal Generator	Agilent	E4438C	MY49072627(3G)	2025-07-16	2026-07-15
10	MXG Vector Signal Generator	Agilent	N5182A	MY49060403	2025-07-16	2026-07-15
11	PSG Analog Signal Generator	Agilent	E8257D	MY4520521	2025-07-16	2026-07-15
12	High&Low Temperature Chamber	HOLINK	ITH-150-40-2 P	IAA0403-005	2025-07-16	2026-07-15
13	EMI Test Software	EZ	EZ EMC	/	N/A	N/A
14	Semi Anechoic Chamber #2	Maorui	966	202512	2025-12-31	2030-12-30
15	Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
16	Log-periodic Antenna	SCHWARZBECK	VULB 9163	1865	2025-12-13	2028-12-12
17	Horn Antenna	ETS	3115	EABF-018	2025-07-19	2028-07-18
18	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2025-07-19	2028-07-18
19	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2025-07-19	2028-07-18
20	EMI Test Receiver	R&S	ESCI3	101010	2026-04-14	2027-04-13
21	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2025-09-27	2026-09-26
22	Broadband Preamplifier	HP	PA0118G	181205	2025-07-16	2026-07-15
23	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	166586	2025-07-16	2026-07-15
24	6dB Attenuator	/	100W/6dB	1172040	2025-07-16	2026-07-15
25	3dB Attenuator	/	2N-3dB	/	2025-09-27	2026-09-26
26	Comprehensive Tester	HP	8921	3344A00457	2025-07-16	2026-07-15
27	RF Filter	Micro-Tronics	BRC50718	017	2025-07-16	2026-07-15
28	RF Filter	Micro-Tronics	BRC50719	011	2025-07-16	2026-07-15
29	RF Filter	Micro-Tronics	BRC50720	011	2025-07-16	2026-07-15
30	RF Filter	Micro-Tronics	BRC50721	013	2025-07-16	2026-07-15
31	RF Filter	Micro-Tronics	BRM50702	195	2025-07-16	2026-07-15
32	RF Filter	Kangmaiwei	ZHPF6-C300 0-18000-174	19101180	2025-07-16	2026-07-15

6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix D for Photographs of Test Setup_RF.

7. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.



-----THE END OF REPORT-----