
SAR Test Report

Report No.: AGC00552200704EH01

PRODUCT DESIGNATION : Smart Phone

BRAND NAME : CUBOT

MODEL NAME : NOTE 20 PRO

APPLICANT : Shenzhen Huafurui Technology Co., Ltd.

DATE OF ISSUE : Aug. 11,2020

STANDARD(S) : EN 50360:2017; EN62209-1:2016;
EN62209-2:2010; EN50566:2017; EN 62479:2010

REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 11,2020	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Test Report

Applicant Name	Shenzhen Huafurui Technology Co., Ltd.
Applicant Address	Unit 1401 &1402, 14/F, Jinqi zhigu mansion (No. 4 building of Chongwen Garden), Crossing of the Liuxian street and Tangling road, Taoyuan street, Nanshan district, Shenzhen,P.R. China
Manufacturer Name	Shenzhen Huafurui Technology Co., Ltd.
Manufacturer Address	Unit 1401 &1402, 14/F, Jinqi zhigu mansion (No. 4 building of Chongwen Garden), Crossing of the Liuxian street and Tangling road, Taoyuan street, Nanshan district, Shenzhen,P.R. China
Factory Name	Shenzhen Huafurui Technology Co., Ltd.
Factory Address	Unit 1401 &1402, 14/F, Jinqi zhigu mansion (No. 4 building of Chongwen Garden), Crossing of the Liuxian street and Tangling road, Taoyuan street, Nanshan district, Shenzhen,P.R. China
Product Designation	Smart Phone
Brand Name	CUBOT
Model Name	NOTE 20 PRO
EUT Voltage	DC3.85V by battery
Applicable Standard	EN 50360:2017; EN62209-1:2016; EN62209-2:2010; EN50566:2017; EN 62479:2010
Test Date	Jul. 21,2020 to Aug. 03,2020
Performed Location	Attestation of Global Compliance(Shenzhen) Co., Ltd.
	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China
Report Template	AGCRT-EC-4G/SAR (2018-01-01)

Note: The results of testing in this report apply to the product/system which was tested only.

Jack Gui

Prepared By _____

Jack Gui (Project Engineer)

Aug. 03,2020

Angela Li

Reviewed By _____

Angela Li (Reviewer)

Aug. 11,2020

Forrest Lei

Approved By _____

Forrest Lei (Authorized Officer)

Aug. 11,2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION.....	6
2.1. EUT DESCRIPTION.....	6
3. SAR MEASUREMENT SYSTEM.....	8
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS.....	8
3.2. COMOSAR E-FIELD PROBE	9
3.3. ROBOT.....	9
3.4. VIDEO POSITIONING SYSTEM	10
3.5. DEVICE HOLDER	10
3.6. SAM TWIN PHANTOM.....	11
4. SAR MEASUREMENT PROCEDURE	12
4.1. SPECIFIC ABSORPTION RATE (SAR)	12
4.2. SAR MEASUREMENT PROCEDURE	13
5. TISSUE SIMULATING LIQUID	16
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID.....	16
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS.....	16
5.3. TISSUE CALIBRATION RESULT.....	17
6. SAR SYSTEM CHECK PROCEDURE.....	18
6.1. SAR SYSTEM CHECK PROCEDURES.....	18
6.2. SAR SYSTEM CHECK.....	19
7. EUT TEST POSITION	21
7.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET.....	21
7.2. CHEEK POSITION	22
7.3. TILT POSITION.....	22
7.4. TEST POSITION.....	23
8. SAR EXPOSURE LIMITS	24
9. TEST EQUIPMENT LIST	25
10. MEASUREMENT UNCERTAINTY	26
11. CONDUCTED POWER MEASUREMENT	29
12. TEST RESULTS	48
12.1. SAR TEST RESULTS SUMMARY	48
APPENDIX A. SAR SYSTEM CHECK DATA	69
APPENDIX B. SAR MEASUREMENT DATA.....	97
APPENDIX C. TEST SETUP PHOTOGRAPHS	201
APPENDIX D. CALIBRATION DATA.....	215

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Frequency Band	Highest Reported 10g-SAR(W/Kg)				SAR Test Result
	Head	Body-worn (with 5mm separation)	Hotspot (with 10mm separation)	Limbs (with 0mm separation)	
GSM 900	0.231	0.941	0.517	1.635	PASS
DCS 1800	0.060	0.552	0.184	2.326	
WCDMA Band I	0.146	0.635	0.408	1.209	
WCDMA Band VIII	0.034	0.357	0.170	0.731	
LTE Band 1	0.127	0.723	0.290	1.603	
LTE Band 3	0.059	0.639	0.215	2.795	
LTE Band 7	0.110	0.533	0.270	1.939	
LTE Band 8	0.253	0.636	0.299	1.154	
LTE Band 20	0.284	0.618	0.154	1.475	
WIFI 2.4G	0.181	0.224	0.108	0.624	
Simultaneous Reported SAR	1.165			3.224	
SAR Test Limit (W/Kg)	2.0			4.0	

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (2.0W/Kg&4.0 W/Kg).

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



2. GENERAL INFORMATION

2.1. EUT Description

General Information	
Product Designation	Smart Phone
Test Model	NOTE 20 PRO
Hardware Version	LV966_MB_V1.0
Software Version	CUBOT_NOTE 20 PRO_A013C_V02_20200729
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GSM and GPRS&EGPRS	
Support Band	<input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (EU Frequency) <input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (none EU Frequency)
GPRS & EGPRS Type	Class B
GPRS & EGPRS Class	Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)
TX Frequency Range	GSM900:880-915MHz ; DCS1800:1710-1785MHz
RX Frequency Range	GSM900:925-960MHz ; DCS1800:1805-1880MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS
Antenna Gain	GSM900: 1.25dBi, DCS1800: 1.32dBi
Max. Avg. Output Power	GSM900:32.90dBm; DCS1800:30.54dBm
Bluetooth	
Operation Frequency	2402~2480MHz
Antenna Gain	0dBi
Bluetooth Version	V4.2
Type of modulation	BR/EDR: GFSK, II/4-DQPSK, 8-DPSK; BLE: GFSK
EIRP	BR/EDR: 6.49dBm; BLE: 1.52dBm
WIFI	
WIFI Specification	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20) <input checked="" type="checkbox"/> 802.11n(40)
Operation Frequency	2412~2472MHz
EIRP	11b: 16.17dBm, 11g: 14.00dBm, 11n(20): 13.76dBm, 11n(40): 13.96dBm
Antenna Gain	0dBi

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT Description (Continue)

WCDMA	
Support Band	<input checked="" type="checkbox"/> UMTS FDD Band I <input checked="" type="checkbox"/> UMTS FDD Band VIII <input type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band V
HS Type	HSPA(HSUPA/HSDPA)
TX Frequency Range	FDD Band I : 1920-1980MHz; FDD Band VIII : 880-915MHz;
RX Frequency Range	FDD Band I : 2110-2170MHz; FDD Band VIII : 925-960MHz ;
Release Version	Rel-6
Type of modulation	HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
Antenna Gain	Band I:1.11dBi; Band VIII:1.25dBi
Max. Avg. Output Power	Band I:24.18dBm; Band VIII:24.83dBm
LTE	
Support Band	<input checked="" type="checkbox"/> Band 1 <input checked="" type="checkbox"/> Band 3 <input checked="" type="checkbox"/> Band 7 <input checked="" type="checkbox"/> Band 8 <input checked="" type="checkbox"/> Band 20
TX Frequency Range	Band 1:1920-1980 MHz; Band 3: 1710-1785 MHz; Band 7:2500-2570MHz Band 8:880-915 MHz; Band 20:832-862 MHz;
RX Frequency Range	Band 1:2110-2170 MHz; Band 3: 1805-1880 MHz; Band 7:2620-2690MHz Band 8: 925-960 MHz; Band 20: 791-821 MHz;
Release Version	Rel-8
Type of modulation	QPSK,16QAM
Antenna Gain	Band 1 :1.11dBi; Band 3 :1.32dBi; Band 7 :0.79dBi; Band 8 :1.25dBi; Band 20 :1.2dBi;
Max. Avg. Output Power	Band 1: 25.31dBm, Band 3: 25.25dBm , Band 7:24.96dBm; Band 8:25.35dBm; Band 20:25.01dBm;
NFC	
Operation Frequency:	13.56MHz
NFC Out Power(ERP)	0.00012360mW
Antenna Type:	PIFA antenna
Li-ion Battery	
Brand Name	CUBOT
Model Name	NOTE 20
Manufacturer Name	Zhongshan Tianmao Battery Co., Ltd.
Manufacturer Address	NO.208, Qian Jin One Road, The Third Industrial Zone, Tanzhou Town, Zhongshan City, China
Capacitance	4200mAh
Rated Voltage	DC3.85V
Charging Voltage	DC4.42V


Note: 1.The sample used for testing is end product;
 2.Diversity antenna just for receive;

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

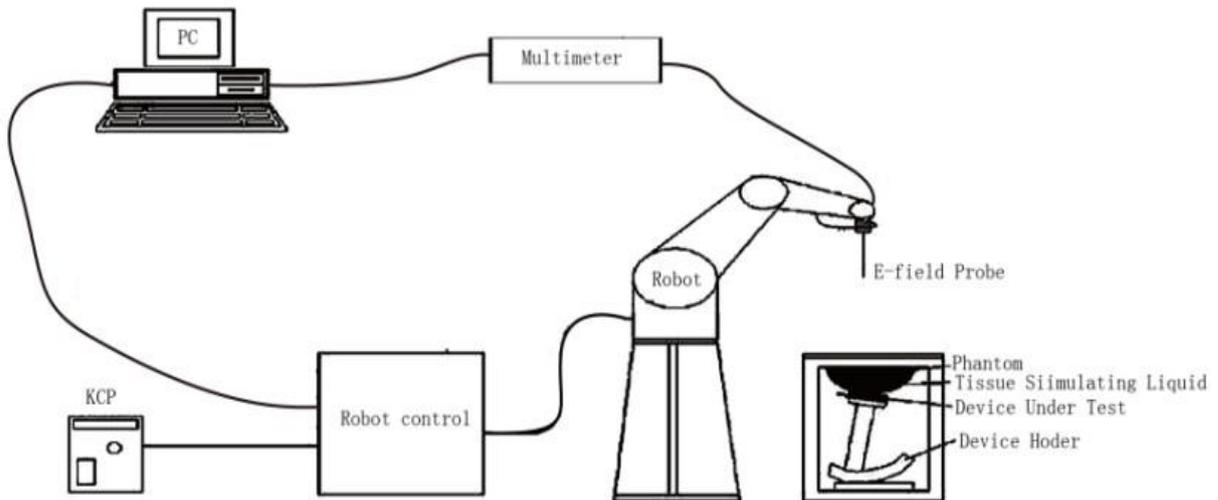

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g.EN62209 etc.)Under ISO17025.The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	SSE5	
Manufacture	MVG	
Identification No.	SN 24/20 EP336	
Frequency	0.7GHz-3GHz Linearity:±0.08dB(0.7GHz-3GHz)	
Dynamic Range	0.01W/Kg-100W/Kg Linearity:±0.08dB	
Dimensions	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precisin of better 30%.	

3.3. Robot


<p>The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.</p> <p>The XL robot series have many features that are important for our application:</p> <ul style="list-style-type: none"> <input type="checkbox"/> High precision (repeatability 0.02 mm) <input type="checkbox"/> High reliability (industrial design) <input type="checkbox"/> Jerk-free straight movements <input type="checkbox"/> Low ELF interference (the closed metallic construction shields against motor control fields) <input type="checkbox"/> 6-axis controller 	
---	---

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

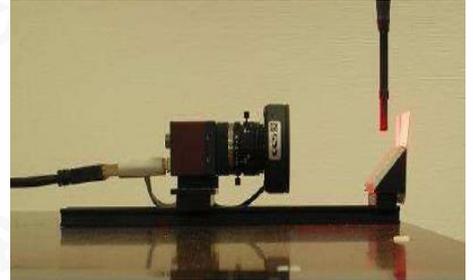

3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

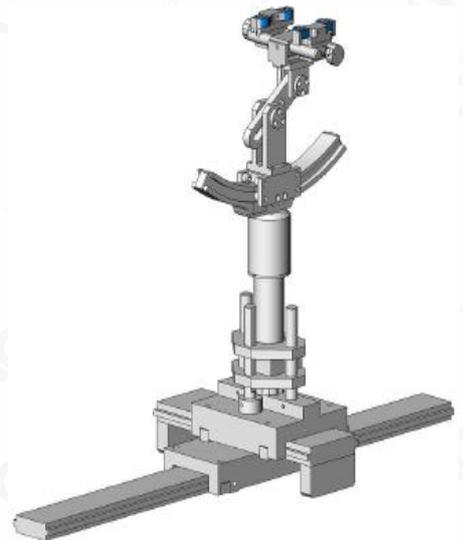

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

ELLI39 Phantom

The Flat phantom is a fiberglass shellphantom with 2mm+/- 0.2 mm shell thickness. It has only one measurement area for Flat phantom



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
c _h	is the heat capacity of the tissue in joules per kilogram and Kelvin;
$\left. \frac{dT}{dt} \right _{t=0}$	is the initial time derivative of temperature in the tissue in kelvins per second

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



4.2. SAR Measurement Procedure

- a) Measure the local SAR at a test point within 10 mm of the inner surface of the phantom where the measured local SAR exceeds the lower detection limit of the measurement system. Preferably, the test point will be above the expected peak SAR location within said distance from the phantom surface. As explained at Step f) below, a comparative measurement will be made by the system at the same point after completion of the SAR measurement.
- b) The area over which the SAR measurement is performed shall cover at least an area larger than the projection of the handset and antenna. For some handsets, the area projected onto the phantom can be large such that the probe may not reach all points. In this case, rotated phantoms may be used and the area may be assessed by multiple overlapping area scans. Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall be with respect to the SAM phantom requirements. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom-scan volume. The maximum grid spacing shall be 20 mm for frequencies equal to or below 3 GHz and $(60/f \text{ [GHz]})$ mm for frequencies above 3 GHz. The resolution SAR uncertainty of the measurement can be estimated using the functions in 7.2.10. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be ≤ 5 mm for frequencies equal to or below 3 GHz and $\delta \ln(2)/2$ mm for frequencies above 3 GHz, where δ is the plane wave penetration depth and $\ln(x)$ is the natural logarithm [80]. The maximum variation of the sensor-phantom surface distance shall be ± 1 mm for frequencies equal to or below 3 GHz and $\pm 0,5$ mm for frequencies above 3 GHz. At all measurement points, the angle of the probe with respect to the line normal to the surface shall be less than 30° for frequencies equal to or below 3 GHz and 20° for frequencies above 3 GHz (see Figure 6). Table 1 provides the measurement parameters required for the area scan.
- c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1,6 W/kg, 1 g limit; or 1,26 W/kg for 2 W/kg, 10 g limit).
- d) Measure the three-dimensional SAR distribution at the local maxima locations identified in Step c) (zoom scan procedure). The horizontal grid step shall be $(24/f \text{ [GHz]})$ mm or less but not more than 8 mm. The minimum zoom scan size is 30 mm by 30 mm by 30 mm for frequencies equal to or below 3 GHz. For higher frequencies, the minimum zoom scan size can be reduced to 22 mm by 22 mm by 22 mm. A smaller volume zoom scan with tighter spacing between the measurement points is allowed due to steeper decay of the E-field, which may reduce the measurement time. For frequencies above 3 GHz, the grid step in the vertical direction shall not exceed $(8 - f \text{ [GHz]})$ mm, and for frequencies equal to or below 3 GHz if uniform spacing is used the grid step shall not exceed 5 mm. If variable spacing is used in the vertical direction (non-uniform grids or graded grids), the maximum spacing between the two closest measured points to the phantom shell shall not exceed $(12/f \text{ [GHz]})$ mm for frequencies above 3 GHz, and shall not exceed 4 mm for frequencies at or below 3 GHz. Furthermore the spacing between farther adjacent points shall increase by an incremental factor not exceeding 1,5. When graded grids are used, extrapolation routines shall be tested according to 7.2.10.3.2 with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies equal to or below 3 GHz and $\delta \ln(2)/2$ mm for frequencies above 3 GHz, where δ is the plane wave penetration depth and $\ln(x)$ is the natural logarithm. Separate grids shall be centred on each of the local SAR maxima found in Step c). At all measurement points, the angle of the probe with respect to the line normal to the surface shall be less than 30° for frequencies equal to or below 3 GHz and 20° for frequencies above 3 GHz.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



e) Use the post-processing, i.e. the interpolation and extrapolation procedures defined in 6.5, to determine peak spatial-average SAR values.

f) Measure the local SAR at exactly the same test point location as in Step a). The SAR drift of the DUT may be estimated by the difference between the two measured single-point SAR values in Steps a) and f). The SAR drift shall be kept within $\pm 5\%$; otherwise, see 7.2.8 for more information on addressing SAR measurement drift.

Table 1 – Area scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	3 GHz < $f \leq 6$ GHz
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface (z_{M1} in Figure 6 in mm)	5 ± 1	$\delta \ln(2)/2 \pm 0,5^a$
Maximum spacing between adjacent measured points (see 7.2.10.3.1, in mm) ^b	20 or half of the corresponding zoom scan length, whichever is smaller	$60/f$ or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal (α in Figure 6) ^c	30°	20°
Tolerance in the probe angle	1°	1°

^a δ is the penetration depth for a plane-wave incident normally on a planar half-space.
^b See 7.2.10 on how Δx and Δy may be selected for individual area scan requirements.
^c The probe angle with respect to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.

Table 2 – Zoom scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	3 GHz < $f \leq 6$ GHz
Maximum distance between the closest measured points and the phantom surface (z_{M1} in Figure 6 and Table 1, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the phantom surface normal (α in Figure 6)	30°	20°
Maximum spacing between measured points in the x- and y-directions (7.2.10.3.2, in mm)	8	$24/f^b$
<i>For uniform grids:</i> Maximum spacing between measured points in the direction normal to the phantom shell (Δz_1 in Figure 6, in mm)	5	$8 - f$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6$ GHz
<i>For graded grids:</i> Maximum spacing between the two closest measured points in the direction normal to the phantom shell (Δz_1 in Figure 6, in mm)	4	$12/f$
<i>For graded grids:</i> Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ($R_z = \Delta z_2 / \Delta z_1$ in Figure 6)	1,5	1,5
Minimum edge length of the zoom scan volume in the x- and y-directions (L_z in 7.2.10.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell (L_h in 7.2.10.3.2, in mm)	30	22
Tolerance in the probe angle	1°	1°
^a δ is the penetration depth for a plane-wave incident normally on a planar half-space. ^b This is the maximum spacing allowed, which may not work for all circumstances.		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

Frequency (MHz) \ Ingredient (% Weight)	Water	Nacl	Polysorbate 20	DGBE	1,2-Propanediol	Triton X-100
835	50.36	1.25	48.39	0.0	0.0	0.0
900	34.40	0.79	0.0	0.0	64.81	0.0
1800	55.36	0.35	0.0	13.84	0.0	30.45
2000	50	0.0	0.0	50	0.0	0.0
2450	71.88	0.16	0.0	7.99	0.0	19.97
2600	55.242	0.306	0.0	44.452	0.0	0.0

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the EN62209-1 have been incorporated in the following table. The body tissue dielectric parameters recommended by the EN62209-2 have been incorporated in the following table.

Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	45.3	0.87
450	43.5	0.87	43.5	0.87
835	41.5	0.90	41.5	0.90
900	41.5	0.97	41.5	0.97
1450	40.5	1.20	40.5	1.20
1800 – 2000	40.0	1.40	40.0	1.40
2300	39.5	1.67	39.5	1.67
2450	39.2	1.80	39.2	1.80
2600	39.00	1.96	39.00	1.96
3000	38.5	2.40	38.5	2.40

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Frequency (MHz)	Target Value		Measurement Value		Tissue Temp [°C]	Test Date
	ϵ_r	δ [s/m]	ϵ_r	δ [s/m]		
900	41.50 39.425-43.575	0.97 0.9225-1.0185	40.18	0.96	22.2	Jul. 31,2020
1800	40.00 38.00-42.00	1.40 1.33-1.47	39.08	1.38	21.4	Aug. 03,2020
2000	40.00 38.00-42.00	1.40 1.33-1.47	39.61	1.37	21.8	Aug. 01,2020
835	41.5 39.425-43.575	0.90 0.855-0.945	40.54	0.88	19.3	Jul. 30,2020
900	41.50 39.425-43.575	0.97 0.9225-1.0185	40.44	0.98	21.8	Jul. 21,2020
2450	39.2 37.24-41.16	1.80 1.71-1.89	39.46	1.81	22.3	Jul. 22,2020
2600	39.0 37.05-40.95	1.96 1.86-2.06	38.59	1.98	19.3	Jul. 25,2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

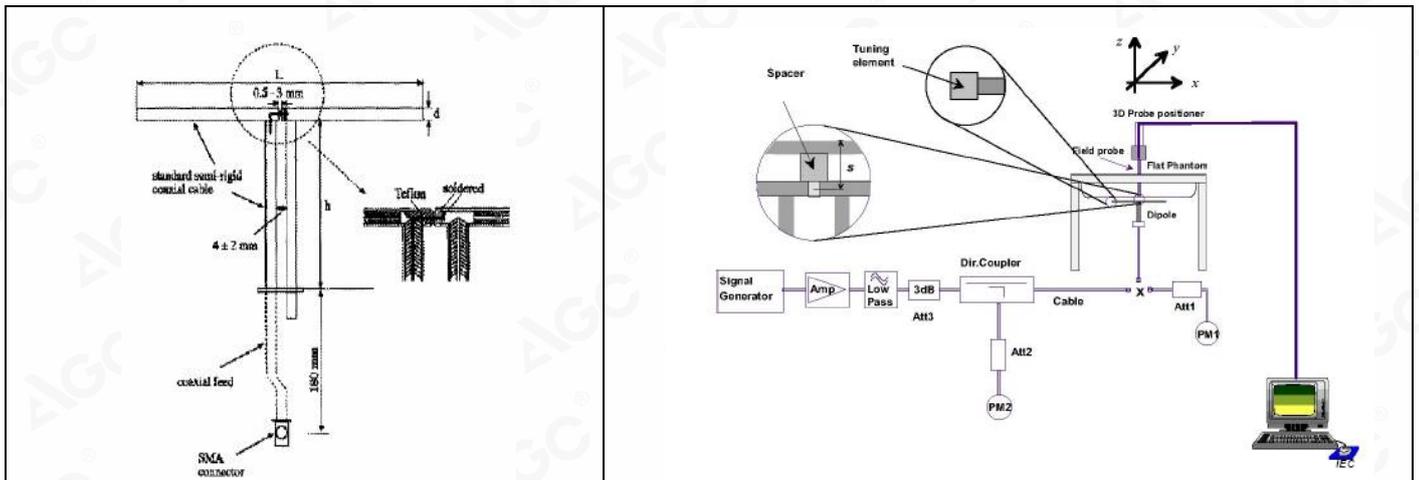


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



6.2. SAR System Check

6.2.1. Dipoles

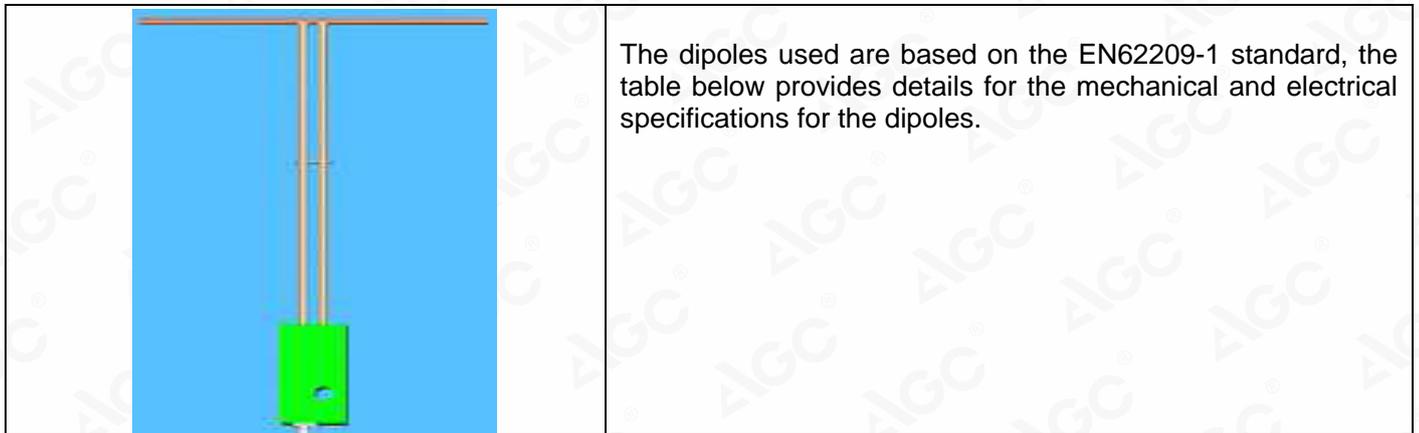

Frequency	L (mm)	h (mm)	d (mm)
835MHz	161.0	89.8	3.6
900 MHz	149.0	83.3	3.6
1800MHz	72	41.7	3.6
2000MHz	64.5	37.5	3.6
2450MHz	51.5	30.4	3.6
2600MHz	48.5	28.8	3.6

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



6.2.2. System Check Result

System Performance Check at 835MHz & 900 MHz & 1800MHz & 2000MHz & 2450MHz & 2600MHz								
Validation Kit SN 29/15 DIP 0G850-383 & SN 23/19 DIP 0G900-482 & SN 46/11 DIP 1G800-186 & SN 46/11 DIP 2G000-188 & SN 46/11 DIP 2G450-189 & SN 47/14 DIP 2G600-342								
Frequency [MHz]	Target Value(W/Kg)		Reference Result ($\pm 10\%$)		Normalized to 1W(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
900	11.38	7.07	10.242-12.518	6.363-7.777	11.60	7.14	22.2	Jul. 31,2020
1800	39.07	20.29	35.163-42.977	18.261-22.319	36.19	19.61	21.4	Aug. 03,2020
2000	44.10	21.49	39.69-48.51	19.341-23.639	42.24	20.55	21.8	Aug. 01,2020
835	9.85	6.27	8.865-10.835	5.643-6.897	9.62	6.00	19.3	Jul. 30,2020
900	11.38	7.07	10.242-12.518	6.363-7.777	11.64	7.18	21.8	Jul. 21,2020
2450	53.97	24.01	48.573-59.367	21.609-26.411	54.47	23.96	22.3	Jul. 22,2020
2600	56.86	24.84	51.174-62.546	22.356-27.324	53.74	23.52	19.3	Jul. 25,2020
900	11.38	7.07	10.242-12.518	6.363-7.777	10.75	6.77	22.2	Jul. 31,2020
1800	39.07	20.29	35.163-42.977	18.261-22.319	35.50	19.14	21.4	Aug. 03,2020
2000	44.10	21.49	39.69-48.51	19.341-23.639	42.53	21.11	21.8	Aug. 01,2020
835	9.85	6.27	8.865-10.835	5.643-6.897	9.38	5.94	19.3	Jul. 30,2020
900	11.38	7.07	10.242-12.518	6.363-7.777	11.86	7.56	21.8	Jul. 21,2020
2450	53.97	24.01	48.573-59.367	21.609-26.411	51.53	23.22	22.3	Jul. 22,2020
2600	56.86	24.84	51.174-62.546	22.356-27.324	52.05	23.50	19.3	Jul. 25,2020

Note:

(1) We use a CW signal of 18dBm for system check, and then all SAR values are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





7. EUT TEST POSITION

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, back, front and 4 Edges.**

7.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centreline passes through two points on the front side of the DUT: the midpoint of the width w_t of the handset at the level of the acoustic output (Point A in Figure 1), and the midpoint of the width w_b at the bottom of the handset (Point B).
- (2) The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output.
- (3) The two lines intersect at Point A. Note that for many handsets, Point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the DUT, especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

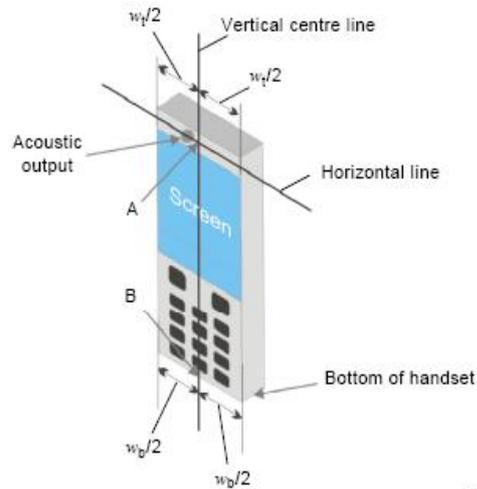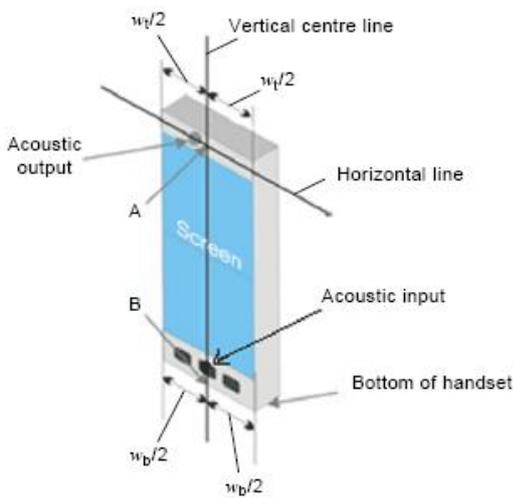

IEC

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



7.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost



7.3. Tilt Position


- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

7.4. Test Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **5mm** while used in body position, **10mm** for hotspot and **0mm** while used in limbs position.

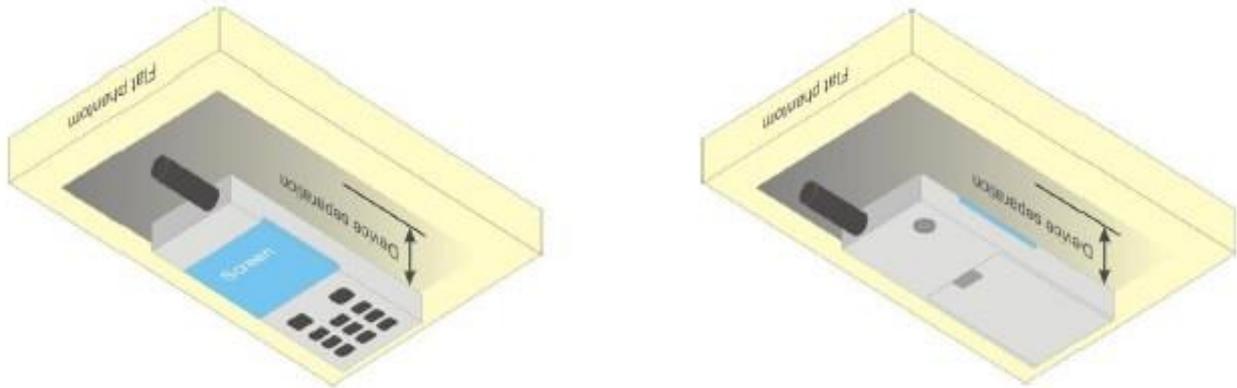

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (10 g cube tissue for brain or body)	2.00
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.00

Note:

These limits are derived from EN50360 “Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields” and EN50566 “Product standard to demonstrate compliance of radio frequency fields from handheld and body-mounted wireless communication devices used by the general public”

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



9. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	MVG	SN 24/20 EP336	Jun. 24,2020	Jun. 23,2021
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Phantom	SATIMO	SN_2316_ELLI39	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	Agilent-8960	GB46310822	Oct. 08,2019	Oct. 07,2020
Comm Tester	R&S- CMW500	S/N120909	Aug. 19,2019	Aug. 18,2020
Multimeter	Keithley 2000	4114939	Sep. 09,2019	Sep. 08,2020
Dipole	SATIMO SID835	SN 29/15 DIP 0G835-383	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID900	SN 23/19 DIP 0G900-482	May 31,2019	May 30,2022
Dipole	SATIMO SID1800	SN 46/11 DIP 1G800-186	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID2000	SN 46/11 DIP 2G000-188	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID2450	SN 46/11 DIP 2G450-189	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID2600	SN 47/14 DIP 2G600-342	Apr. 26,2019	Apr. 25,2022
Signal Generator	Agilent-E4438C	US41461365	Oct. 08,2019	Oct. 07,2020
Vector Analyzer	Agilent / E4440A	US41421290	Sep. 09,2019	Sep. 08,2020
Network Analyzer	Rhode & Schwarz ZVL6	SN101443	Oct. 08,2019	Oct. 07,2020
Attenuator	Warison /WATT-6SR1211	S/N:WRJ34AYM2F 1	June 10,2020	June 09,2021
Attenuator	Mini-circuits / VAT-10+	31405	June 10,2020	June 09,2021
Amplifier	AS0104-55_55	1004793	June 11,2020	June 10,2021
Directional Couple	Werlatone/ C5571-10	SN99463	May 15,2020	May 14,2022
Directional Couple	Werlatone/ C6026-10	SN99482	May 15,2020	May 14,2022
Power Sensor	NRP-Z21	1137.6000.02	Sep. 09,2019	Sep. 08,2020
Power Sensor	NRP-Z23	US38261498	Feb. 18,2020	Feb. 17,2021
Power Viewer	R&S	V2.3.1.0	N/A	N/A

Note: Per EN62209-1/2 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



10. MEASUREMENT UNCERTAINTY

SATIMO Uncertainty-SN 24/20 EP336 Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	Annex B	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	7.2.2.2	0.105	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.043	0.043	∞
Hemispherical Isotropy	7.2.2.2	0.105	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.043	0.043	∞
Boundary effect	7.2.2.5	1.000	R	$\sqrt{3}$	1	1	0.577	0.577	∞
Linearity	7.2.2.3	0.870	R	$\sqrt{3}$	1	1	0.502	0.502	∞
System detection limits	7.2.2.3	1.000	R	$\sqrt{3}$	1	1	0.577	0.577	∞
Modulation response	7.2.2.4	3.000	R	$\sqrt{3}$	1	1	1.732	1.732	∞
Readout Electronics	7.2.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	7.2.2.7	0.000	R	$\sqrt{3}$	1	1	0.000	0.000	∞
Integration Time	7.2.2.8	1.400	R	$\sqrt{3}$	1	1	0.808	0.808	∞
RF ambient conditions-Noise	7.2.9	3.000	R	$\sqrt{3}$	1	1	1.732	1.732	∞
RF ambient conditions-reflections	7.2.9	3.000	R	$\sqrt{3}$	1	1	1.732	1.732	∞
Probe positioner mechanical tolerance	7.2.3.1	1.400	R	$\sqrt{3}$	1	1	0.808	0.808	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.400	R	$\sqrt{3}$	1	1	0.808	0.808	∞
Post-processing	7.2.10	2.300	R	$\sqrt{3}$	1	1	1.328	1.328	∞
Test sample Related									
Test sample positioning	7.2.5.3	2.6	N	1	1	1	2.600	2.600	∞
Device holder uncertainty	7.2.5.2	3	N	1	1	1	3.000	3.000	∞
SAR drift measurement	7.2.8	5	R	$\sqrt{3}$	1	1	2.887	2.887	∞
SAR scaling	7.2.11	5	R	$\sqrt{3}$	1	1	2.887	2.887	∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	4	R	$\sqrt{3}$	1	1	2.309	2.309	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.900	1.596	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.126	1.025	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.120	2.840	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.332	0.375	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.150	1.300	M
Combined Standard Uncertainty			RSS				10.525	10.341	
Expanded Uncertainty (95% Confidence interval)			K=2				21.051	20.681	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SATIMO Uncertainty-SN 24/20 EP336 System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	Annex B	7	N	1	1	1	7.000	7.000	∞
Axial Isotropy	7.2.2.2	0.105	R	$\sqrt{3}$	1	1	0.061	0.061	∞
Hemispherical Isotropy	7.2.2.2	0.105	R	$\sqrt{3}$	0	0	0.000	0.000	∞
Boundary effect	7.2.2.5	1	R	$\sqrt{3}$	1	1	0.577	0.577	∞
Linearity	7.2.2.3	0.870	R	$\sqrt{3}$	1	1	0.502	0.502	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	7.2.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	7.2.2.7	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	7.2.10	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source									
Deviation of experimental dipole from numerical dipole	7.2.12	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	7.2.8	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	7.2.13	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				10.458	10.272	
Expanded Uncertainty (95% Confidence interval)			K=2				20.916	20.544	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SATIMO Uncertainty-SN 24/20 EP336									
System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	Table 13 note a	0.5	N	1	1	1	0.50	0.50	∞
Axial Isotropy	7.2.2.2	0.105	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	7.2.2.2	0.105	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	7.2.2.5	1	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	7.2.2.3	0.870	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	7.2.2.6	0.021	N	1	0	0	0.00	0.00	∞
Response Time	7.2.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	7.2.10	2.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System check source									
Deviation between experimental dipoles	7.2.12	2.0	N	1	1	1	2.00	2.00	∞
Input power and SAR drift measurement	7.2.8	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	7.2.13	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				5.562	5.203	
Expanded Uncertainty (95% Confidence interval)			K=2				11.124	10.406	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



11. CONDUCTED POWER MEASUREMENT

Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
GSM 900	880.2	32.69	-9	23.69
	897.4	32.78	-9	23.78
	914.8	32.90	-9	23.90
GPRS 900 (1 Slot)	880.2	31.79	-9	22.79
	897.4	31.87	-9	22.87
	914.8	31.65	-9	22.65
GPRS 900 (2 Slot)	880.2	28.76	-6	22.76
	897.4	28.75	-6	22.75
	914.8	28.52	-6	22.52
GPRS 900 (3 Slot)	880.2	26.69	-4.26	22.43
	897.4	26.52	-4.26	22.26
	914.8	26.43	-4.26	22.17
GPRS 900 (4 Slot)	880.2	28.71	-3	25.71
	897.4	28.69	-3	25.69
	914.8	28.84	-3	25.84
EGPRS 900 (1 Slot)	880.2	26.32	-9	17.32
	897.4	26.57	-9	17.57
	914.8	26.44	-9	17.44
EGPRS 900 (2 Slot)	880.2	23.65	-6	17.65
	897.4	23.52	-6	17.52
	914.8	23.25	-6	17.25
EGPRS 900 (3 Slot)	880.2	22.42	-4.26	18.16
	897.4	22.26	-4.26	18.00
	914.8	22.27	-4.26	18.01
EGPRS 900 (4 Slot)	880.2	20.37	-3	17.37
	897.4	19.60	-3	16.60
	914.8	19.74	-3	16.74

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
GSM 900	880.2	32.56	-9	23.56
	897.4	32.72	-9	23.72
	914.8	32.81	-9	23.81
GPRS 900 (1 Slot)	880.2	31.73	-9	22.73
	897.4	31.85	-9	22.85
	914.8	31.60	-9	22.60
GPRS 900 (2 Slot)	880.2	28.72	-6	22.72
	897.4	28.70	-6	22.70
	914.8	28.46	-6	22.46
GPRS 900 (3 Slot)	880.2	26.65	-4.26	22.39
	897.4	26.44	-4.26	22.18
	914.8	26.38	-4.26	22.12
GPRS 900 (4 Slot)	880.2	28.67	-3	25.67
	897.4	28.62	-3	25.62
	914.8	28.77	-3	25.77

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
DCS1800	1710.2	29.98	-9	20.98
	1747.4	30.26	-9	21.26
	1784.8	30.54	-9	21.54
GPRS1800 (1 Slot)	1710.2	29.26	-9	20.26
	1747.4	29.58	-9	20.58
	1784.8	29.67	-9	20.67
GPRS1800 (2 Slot)	1710.2	25.75	-6	19.75
	1747.4	25.72	-6	19.72
	1784.8	25.55	-6	19.55
GPRS1800 (3 Slot)	1710.2	24.63	-4.26	20.37
	1747.4	24.77	-4.26	20.51
	1784.8	24.59	-4.26	20.33
GPRS1800 (4 Slot)	1710.2	26.24	-3	23.24
	1747.4	26.44	-3	23.44
	1784.8	26.79	-3	23.79
EGPRS1800 (1 Slot)	1710.2	25.51	-9	16.51
	1747.4	25.68	-9	16.68
	1784.8	25.44	-9	16.44
EGPRS1800 (2 Slot)	1710.2	23.89	-6	17.89
	1747.4	23.78	-6	17.78
	1784.8	23.65	-6	17.65
EGPRS1800 (3 Slot)	1710.2	23.76	-4.26	19.50
	1747.4	23.75	-4.26	19.49
	1784.8	23.59	-4.26	19.33
EGPRS1800 (4 Slot)	1710.2	21.69	-3	18.69
	1747.4	21.55	-3	18.55
	1784.8	21.33	-3	18.33

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
DCS1800	1710.2	29.95	-9	20.95
	1747.4	30.21	-9	21.21
	1784.8	30.50	-9	21.50
GPRS1800 (1 Slot)	1710.2	29.22	-9	20.22
	1747.4	29.53	-9	20.53
	1784.8	29.58	-9	20.58
GPRS1800 (2 Slot)	1710.2	25.65	-6	19.65
	1747.4	25.63	-6	19.63
	1784.8	25.50	-6	19.50
GPRS1800 (3 Slot)	1710.2	24.58	-4.26	20.32
	1747.4	24.72	-4.26	20.46
	1784.8	24.53	-4.26	20.27
GPRS1800 (4 Slot)	1710.2	26.20	-3	23.20
	1747.4	26.39	-3	23.39
	1784.8	26.71	-3	23.71

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) – 6 dB

Frame Power = Max burst power (3 Up Slot) – 4.26 dB

Frame Power = Max burst power (4 Up Slot) – 3 dB

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



UMTS BAND I

Mode	Frequency(MHz)	Avg. Output Power (dBm)
WCDMA 2100 RMC(12.2bps)	1922.4	23.99
	1950	24.15
	1977.6	24.18
HSDPA Subtest 1	1922.4	23.06
	1950	23.27
	1977.6	23.34
HSDPA Subtest 2	1922.4	22.32
	1950	22.56
	1977.6	22.57
HSDPA Subtest 3	1922.4	22.30
	1950	22.48
	1977.6	22.56
HSDPA Subtest 4	1922.4	22.31
	1950	22.52
	1977.6	22.50
HSUPA Subtest 1	1922.4	20.91
	1950	21.07
	1977.6	21.10
HSUPA Subtest 2	1922.4	21.00
	1950	21.19
	1977.6	21.31
HSUPA Subtest 3	1922.4	21.93
	1950	22.07
	1977.6	22.06
HSUPA Subtest 4	1922.4	20.26
	1950	20.47
	1977.6	20.58
HSUPA Subtest 5	1922.4	25.53
	1950	21.03
	1977.6	21.19

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



UMTS BAND VIII

Mode	Frequency (MHz)	Avg. Output Power (dBm)
WCDMA 900 RMC(12.2bps)	882.4	24.12
	897.6	23.99
	912.6	24.21
HSDPA Subtest 1	882.4	22.65
	897.6	22.60
	912.6	22.84
HSDPA Subtest 2	882.4	21.81
	897.6	21.60
	912.6	21.92
HSDPA Subtest 3	882.4	21.74
	897.6	21.63
	912.6	21.84
HSDPA Subtest 4	882.4	21.71
	897.6	21.61
	912.6	21.80
HSUPA Subtest 1	882.4	20.36
	897.6	20.24
	912.6	20.52
HSUPA Subtest 2	882.4	20.33
	897.6	20.28
	912.6	20.54
HSUPA Subtest 3	882.4	21.34
	897.6	21.30
	912.6	21.57
HSUPA Subtest 4	882.4	19.71
	897.6	19.66
	912.6	19.91
HSUPA Subtest 5	882.4	24.83
	897.6	20.59
	912.6	22.37

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1Aa: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$

Note: CM=1 for $\beta_d/\beta_{d=12/15}$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



LTE BAND

Avg. Output Power of LTE Band 1(dBm)							
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				18025	18300	18575	
5MHz	QPSK	1	0	25.04	25.15	25.25	
			12	25.01	25.10	25.16	
			24	25.01	25.15	25.18	
		12	0	25.13	25.23	25.31	
			6	25.07	25.09	25.26	
			13	25.11	25.21	25.21	
	25	0	25.15	25.13	25.10		
	16QAM	1	0	24.56	24.80	24.76	
			12	24.77	24.76	24.88	
			24	24.85	24.66	24.65	
		12	0	24.52	24.52	24.52	
			6	24.66	24.78	24.86	
			13	24.58	24.53	24.55	
	25	0	24.46	24.68	24.62		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
10MHz	QPSK	1	0	24.95	25.13	25.20	
			24	24.96	25.09	25.15	
			49	24.93	25.10	25.13	
		25	0	25.10	25.17	25.28	
			12	25.02	25.08	25.22	
			25	25.15	25.19	25.20	
		50	0	25.12	25.09	25.07	
		16QAM	1	0	24.51	24.75	24.71
				24	24.72	24.72	24.82
	49			24.80	24.66	24.65	
	25		0	24.47	24.45	24.47	
			12	24.63	24.72	24.85	
			25	24.57	24.48	24.52	
	50		0	24.44	24.67	24.57	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 1(dBm)						
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18075	18300	18525
15MHz	QPSK	1	0	24.97	25.09	25.10
			37	24.92	25.07	25.13
			74	24.89	25.00	25.01
		37	0	25.04	25.05	25.22
			19	24.96	25.06	25.12
			38	25.13	25.15	25.11
	75	0	25.16	25.01	25.02	
	16QAM	1	0	24.47	24.63	24.65
			37	24.65	24.66	24.72
			74	24.72	24.56	24.57
		37	0	24.34	24.39	24.35
			19	24.51	24.68	24.72
			38	24.55	24.38	24.48
	75	0	24.40	24.65	24.47	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18100	18300	18500
20MHz	QPSK	1	0	25.04	25.13	25.02
			49	25.02	25.06	25.00
			99	25.09	25.13	24.98
		50	0	24.95	25.08	25.15
			25	24.89	25.03	25.08
			50	25.01	25.10	25.06
	100	0	24.98	25.06	25.02	
	16QAM	1	0	24.41	24.51	24.57
			49	24.55	24.60	24.68
			99	24.62	24.46	24.51
		50	0	24.24	24.33	24.21
			25	24.45	24.64	24.64
			50	24.53	24.28	24.44
	100	0	24.36	24.63	24.37	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 3 (dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				19207	19575	19943		
1.4MHz	QPSK	1	0	25.03	25.08	25.07		
			2	25.01	25.04	25.02		
			5	24.94	25.07	25.09		
		3	0	25.07	25.17	25.18		
			1	25.03	25.12	25.12		
			3	25.08	25.20	25.25		
	6	0	25.05	25.10	25.20			
	16QAM	1	0	24.62	24.67	24.86		
			2	25.07	24.75	24.57		
			5	24.85	24.96	24.48		
		3	0	24.48	24.78	24.76		
			1	24.86	24.36	24.75		
			3	24.58	24.65	24.72		
		6	0	24.36	24.58	24.41		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
						19215	19575	19935
	3MHz	QPSK	1	0	25.06	25.06	25.16	
				7	24.88	25.05	25.08	
14				25.07	25.12	25.17		
8			0	25.06	25.17	25.25		
			4	24.95	25.12	25.12		
			8	25.11	25.20	25.01		
15		0	25.05	25.16	25.02			
16QAM		1	0	24.62	24.65	24.85		
			7	24.97	24.72	24.53		
			14	24.82	24.95	24.46		
		8	0	24.43	24.73	24.75		
			4	24.79	24.35	24.72		
			8	24.58	24.62	24.67		
		15	0	24.34	24.55	24.38		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 3(dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				19225	19575	19925		
5MHz	QPSK	1	0	24.99	25.03	25.14		
			12	24.86	25.00	25.04		
			24	25.05	25.07	25.07		
		12	0	25.03	25.12	25.20		
			6	24.96	25.06	25.16		
			13	25.10	25.19	25.06		
		25	0	25.03	25.12	25.02		
		16QAM	1	0	24.65	24.67	24.79	
				12	24.92	24.7	24.58	
	24			24.77	24.92	24.45		
	12		0	24.35	24.66	24.67		
			6	24.76	24.28	24.75		
			13	24.57	24.65	24.62		
	25		0	24.32	24.52	24.35		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						19250	19575	19900
	10MHz	QPSK	1	0	25.08	25.12	25.07	
				24	24.85	25.07	25.06	
49				25.17	25.18	25.05		
25			0	24.95	25.16	25.12		
			12	24.88	24.95	25.03		
			25	25.06	25.02	25.05		
50			0	24.95	25.05	24.82		
16QAM			1	0	24.62	24.63	24.76	
				24	24.86	24.75	24.55	
		49		24.65	24.90	24.42		
		25	0	24.32	24.63	24.65		
			12	24.73	24.25	24.72		
			25	24.56	24.62	24.63		
		50	0	24.30	24.55	24.29		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 3 (dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				19275	19575	19875		
15MHz	QPSK	1	0	25.01	25.08	25.02		
			37	24.83	25.03	25.00		
			74	25.15	25.13	24.99		
		37	0	24.92	25.05	25.11		
			19	24.87	24.87	25.04		
			38	25.05	25.05	25.01		
		75	0	24.92	25.01	24.85		
		16QAM	1	0	24.59	24.62	24.72	
				37	24.78	24.75	24.53	
	74			24.64	24.87	24.45		
	37		0	24.28	24.59	24.62		
			19	24.67	24.22	24.67		
			38	24.53	24.65	24.59		
	75		0	24.28	24.52	24.26		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						19300	19575	19850
	20MHz	QPSK	1	0	24.95	25.05	25.00	
				49	24.81	25.02	24.97	
99				25.14	25.08	24.96		
50			0	24.93	24.99	25.09		
			25	24.86	24.83	25.02		
			50	25.06	25.04	24.99		
100			0	24.95	25.00	24.86		
16QAM			1	0	24.56	24.59	24.72	
				49	24.73	24.75	24.55	
		99		24.59	24.84	24.45		
		50	0	24.23	24.55	24.59		
			25	24.64	24.23	24.63		
			50	24.52	24.62	24.54		
		100	0	24.26	24.51	24.23		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 7 (dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				20775	21100	21425		
5MHz	QPSK	1	0	24.64	24.59	24.79		
			12	24.56	24.41	24.61		
			24	24.55	24.56	24.85		
		12	0	24.67	24.60	24.90		
			6	24.59	24.47	24.86		
			13	24.65	24.65	24.96		
		25	0	24.52	24.58	24.82		
		16QAM	1	0	23.90	23.86	23.89	
				12	23.83	23.63	23.78	
	24			23.81	23.60	23.69		
	12		0	23.85	23.79	23.89		
			6	23.37	23.58	23.76		
			13	23.68	23.35	23.70		
	25		0	23.25	23.70	23.55		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						20800	21100	21400
	10MHz	QPSK	1	0	24.76	24.59	24.61	
				24	24.37	24.39	24.46	
49				24.58	24.78	24.80		
25			0	24.55	24.65	24.63		
			12	24.22	24.32	24.59		
			25	24.56	24.55	24.90		
50			0	24.44	24.36	24.79		
16QAM			1	0	23.87	23.85	23.88	
				24	23.78	23.62	23.77	
		49		23.76	23.57	23.66		
		25	0	23.75	23.75	23.85		
			12	23.32	23.56	23.72		
			25	23.62	23.32	23.65		
		50	0	23.27	23.67	23.52		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 7 (dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				20825	21100	21375		
15MHz	QPSK	1	0	24.66	24.55	24.59		
			37	24.37	24.38	24.43		
			74	24.55	24.66	24.77		
		37	0	24.56	24.55	24.62		
			19	24.25	24.32	24.57		
			38	24.55	24.55	24.88		
		75	0	24.42	24.35	24.76		
		16QAM	1	0	23.81	23.80	23.85	
				37	23.65	23.68	23.72	
	74			23.72	23.55	23.58		
	37		0	23.66	23.72	23.76		
			19	23.31	23.56	23.70		
			38	23.57	23.26	23.62		
	75		0	23.25	23.64	23.53		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						20850	21100	21350
	20MHz	QPSK	1	0	24.59	24.52	24.57	
				49	24.34	24.37	24.40	
99				24.55	24.61	24.74		
50			0	24.53	24.50	24.63		
			25	24.28	24.27	24.52		
			50	24.56	24.55	24.87		
100			0	24.37	24.38	24.67		
16QAM			1	0	23.76	23.79	23.82	
				49	23.55	23.63	23.67	
		99		23.67	23.56	23.55		
		50	0	23.58	23.75	23.72		
			25	23.25	23.51	23.66		
			50	23.56	23.23	23.57		
		100	0	23.23	23.61	23.50		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 8 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				21457	21625	21793	
1.4MHz	QPSK	1	0	24.97	25.03	25.24	
			2	24.85	25.00	25.13	
			5	24.99	25.03	25.26	
		3	0	25.05	25.02	25.35	
			1	25.03	25.01	25.22	
			3	25.06	25.07	25.26	
	6	0	25.01	25.04	25.21		
	16QAM	1	0	24.35	24.60	24.66	
			2	24.33	24.78	24.67	
			5	24.41	24.82	24.85	
		3	0	24.57	24.90	24.76	
			1	24.35	24.60	24.65	
			3	24.56	24.31	24.42	
		6	0	24.26	24.65	24.46	
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel
					21465	21625	21785
3MHz	QPSK	1	0	25.07	25.09	25.25	
			7	25.02	25.05	25.19	
			14	25.02	25.05	25.20	
		8	0	25.08	25.10	25.28	
			4	25.04	25.05	25.23	
			8	24.99	25.05	25.22	
	15	0	24.87	25.03	25.16		
	16QAM	1	0	24.32	24.59	24.63	
			7	24.28	24.77	24.59	
			14	24.35	24.78	24.81	
		8	0	24.52	24.86	24.70	
			4	24.32	24.58	24.61	
			8	24.53	24.28	24.35	
		15	0	24.24	24.62	24.38	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 8(dBm)							
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				21475	21625	21775	
5MHz	QPSK	1	0	25.02	25.06	25.23	
			12	25.00	25.04	25.16	
			24	25.00	25.00	25.17	
		12	0	25.05	25.05	25.27	
			6	25.03	25.01	25.21	
			13	24.98	25.04	25.20	
	25	0	24.85	25.02	25.13		
	16QAM	1	0	24.29	24.58	24.62	
			12	24.23	24.76	24.58	
			24	24.30	24.75	24.78	
		12	0	24.47	24.82	24.66	
			6	24.29	24.56	24.57	
			13	24.52	24.25	24.30	
		25	0	24.22	24.59	24.35	
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel
					21500	21625	21750
10MHz	QPSK	1	0	24.99	25.04	25.26	
			24	24.86	25.02	25.20	
			49	25.09	25.00	25.23	
		25	0	25.10	25.13	25.33	
			12	25.06	25.09	25.30	
			25	25.12	25.08	25.23	
	50	0	25.10	25.05	25.21		
	16QAM	1	0	24.26	24.53	24.61	
			24	24.18	24.75	24.57	
			49	24.25	24.67	24.75	
		25	0	24.42	24.85	24.62	
			12	24.26	24.52	24.53	
			25	24.51	24.23	24.25	
		50	0	24.20	24.56	24.32	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 20(dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				24175	24300	24425		
5MHz	QPSK	1	0	24.96	24.96	25.01		
			12	24.85	24.85	24.98		
			24	24.97	24.96	24.95		
		12	0	24.99	24.98	24.99		
			6	24.80	24.86	24.87		
			13	24.99	24.97	24.93		
		25	0	24.87	24.89	24.81		
		16QAM	1	0	23.89	23.73	23.71	
				12	24.07	23.69	23.56	
	24			23.78	23.68	23.88		
	12		0	23.75	23.65	23.65		
			6	23.52	23.66	23.76		
			13	23.56	23.55	23.88		
	25		0	23.67	23.74	23.59		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						24200	24300	24400
	10MHz	QPSK	0	0	24.95	24.98	24.83	
				24	24.87	24.73	24.70	
49				24.95	25.00	24.85		
25			0	24.92	24.98	24.89		
			12	24.85	24.95	24.81		
			25	24.87	24.97	24.92		
50			0	24.85	24.85	24.79		
16QAM			0	0	23.86	23.72	23.70	
				24	24.00	23.66	23.53	
		49		23.72	23.65	23.77		
		25	0	23.65	23.63	23.61		
			12	23.52	23.66	23.75		
			25	23.56	23.52	23.83		
		50	0	23.65	23.71	23.56		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Avg. Output Power of LTE Band 20(dBm)								
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel		
				24225	24300	24375		
15MHz	QPSK	1	0	25.00	24.99	24.81		
			37	24.85	24.72	24.67		
			74	24.97	24.96	24.82		
		37	0	24.95	24.96	24.88		
			19	24.88	24.90	24.79		
			38	24.85	24.95	24.90		
		75	0	24.79	24.86	24.76		
		16QAM	1	0	23.85	23.77	23.71	
				37	23.95	23.59	23.52	
	74			23.67	23.60	23.74		
	37		0	23.61	23.59	23.57		
			19	23.52	23.64	23.71		
			38	23.53	23.49	23.78		
	75		0	23.59	23.68	23.53		
	Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel
						24250	24300	24350
	20MHz	QPSK	1	0	24.94	24.96	24.79	
				49	24.83	24.71	24.64	
99				24.95	24.90	24.79		
50			0	24.91	24.91	24.87		
			25	24.80	24.86	24.75		
			50	24.85	24.93	24.86		
100			0	24.77	24.85	24.73		
16QAM			1	0	23.78	23.76	23.70	
				49	23.85	23.58	23.51	
		99		23.62	23.57	23.71		
		50	0	23.56	23.55	23.53		
			25	23.45	23.62	23.67		
			50	23.52	23.46	23.73		
		100	0	23.57	23.65	23.50		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



WIFI

Mode	Data Rate (Mbps)	Channel	Frequency(MHz)	EIRP (dBm)
802.11b	1	1	2412	15.23
		2	2417	15.16
		7	2442	16.17
		12	2467	14.82
		13	2472	14.94
802.11g	6	1	2412	12.69
		7	2442	14.00
		13	2472	12.87
802.11n(20)	6.5	1	2412	12.60
		7	2442	13.76
		13	2472	12.95
802.11n(40)	13.5	3	2422	12.93
		7	2442	13.37
		11	2462	13.96

Note: For wifi RF test, there is no required about band edge; we test the power for channel 2&12 which is lower than channel 1&13; SAR need to test at low &high channel 1&13.

NFC

Mode	Frequency(MHz)	Out power(dBm)
NFC	13.56	-39.07981529

The out power delivered to the NFC circuit is below 20mW, it cannot transmit more than 20mW of RF power. So the product is deemed to comply with EN 62479.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



12. TEST RESULTS

12.1. SAR Test Results Summary

12.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to EN62209-1, body SAR was performed with the device 5mm from the phantom according to EN62209-2, Hotspot SAR was performed with the device 10mm from the phantom according to EN62209-2, and limbs SAR was performed with the device 0mm from the phantom according to EN62209-2.

12.1.2. Operation Mode

1 For GSM900, the power control is set to Maximum Power Class. For GPRS 900(GMSK, CS1), the power control level is set to Maximum Power Class. For E-GPRS 900(GMSK: MCS1, 8PSK:MCS5), the power control is set to Maximum Power Class. For DCS 1800, the power control is set to Maximum Power Class. For GPRS 1800(GMSK, CS1), the power control level is set to Maximum Power Class. For E-GPRS 1800 (GMSK: MCS1, 8PSK:MCS5), the power control level is set to Maximum Power Class.

This is a multi-slot class 12 device capable of 4 uplink timeslots. During the head SAR test, the device was transmitting with maximum 1 uplink timeslot; during the body SAR test, it was transmitting with maximum 4 uplink timeslots. Additionally, this device doesn't support dual transfer mode (DTM)

Testing with the earphone was performed at the position and channels that resulted in the highest body SAR. This testing was performed with GPRS transmitting with 2/3/4 uplink timeslots. In the Body SAR test result table, body-worn means display of device down, body-front means display of device up. In the limbs SAR test result table, limbs back means display of device down, limbs front means display of device up.

2 For WCDMA, head, body and limbs SAR is tested under RMC 12.2k mode with power control set all up bits SAR for AMR is not required since its power is less than RMC. For HSDPA/HSUPA, SAR is test with its maximum power mode.

3 The following test measurement is LTE procedure:

a) Largest channel bandwidth standalone SAR test requirements

(a1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

When the measured SAR is ≤ 1.0 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

When the measured SAR of a required test channel is > 1.80 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(a2) QPSK with 50% RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation at the worst position for 1 RB allocation in a1)

When the measured SAR is ≤ 1.0 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 50% RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

When the measured SAR of a required test channel is > 1.80 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(a3) QPSK with 100% RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation at the

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



worst position for 1 RB&50%RB allocation in a1&a2)

When the measured SAR is ≤ 1.0 W/kg, testing of the remaining channels is not required for 100% RB allocation; otherwise, SAR is required for the remaining channels and only for the highest output power for that channel.

When the measured SAR of a required test channel is > 1.80 W/kg, SAR is required for low,mid,high channel.

(a4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the highest maximum output power in QPSK or when the measured SAR for the QPSK configuration is > 1.8 W/kg.

b) Other channel bandwidth standalone SAR test requirements


For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.1) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the highest maximum output power of the largest channel bandwidth configuration or the measured SAR of a configuration for the largest channel bandwidth is > 1.8 W/kg.

4. For WIFI SAR testing, the EUT has installed WIFI engineering testing software which can provide continuous transmitting RF signal.
5. Sensors have no any influence on power level or SAR result.
6. The portion of the EUT which area scan did not scan has been off the phantom.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



12.1.3. Antenna Location: (back view)

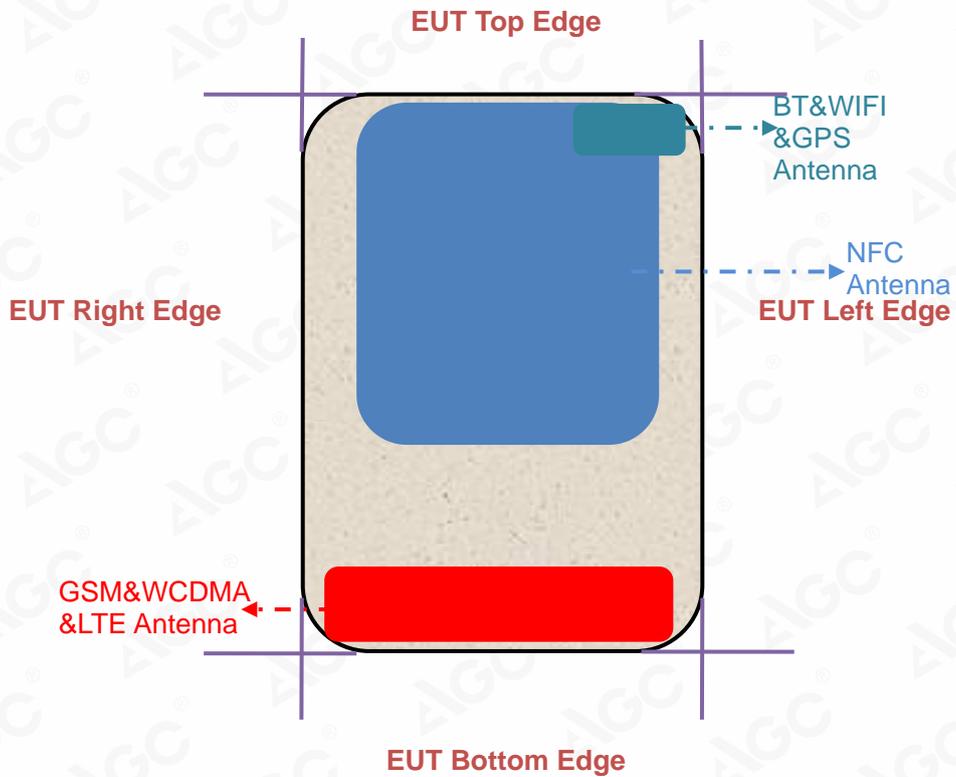

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



12.1.4. SAR Test Results Summary

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 49.7				
Product: Smart Phone									
Test Mode: GSM900 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/Kg)
SIM 1 Card									
Head									
Left Cheek	voice	975	880.2	-0.36	0.215	33.00	32.69	0.231	2.0
Left Cheek	voice	37	897.4	-0.29	0.203	33.00	32.78	0.214	2.0
Left Cheek	voice	124	914.8	0.55	0.165	33.00	32.90	0.169	2.0
Left Tilt	voice	37	897.4	-0.42	0.097	33.00	32.78	0.102	2.0
Right Cheek	voice	37	897.4	-0.13	0.154	33.00	32.78	0.162	2.0
Right Tilt	voice	37	897.4	0.05	0.111	33.00	32.78	0.117	2.0
Body									
Body back	GPRS-4 slots	975	880.2	-0.11	0.901	28.90	28.71	0.941	2.0
Body back	GPRS-4 slots	37	897.4	0.24	0.798	28.90	28.69	0.838	2.0
Body back	GPRS-4 slots	124	914.8	-0.62	0.648	28.90	28.84	0.657	2.0
Body Front	GPRS-4 slots	37	897.4	-0.35	0.591	28.90	28.69	0.620	2.0
Body back + Ear.	voice	975	880.2	-0.27	0.747	33.00	32.69	0.802	2.0
Hotspot									
Hotspot back	GPRS-4 slots	975	880.2	-0.21	0.495	28.90	28.71	0.517	2.0
Hotspot back	GPRS-4 slots	37	897.4	-0.05	0.442	28.90	28.69	0.464	2.0
Hotspot back	GPRS-4 slots	124	914.8	-0.24	0.424	28.90	28.84	0.430	2.0
Hotspot Front	GPRS-4 slots	37	897.4	-0.13	0.271	28.90	28.69	0.284	2.0
Hotspot Edge 1 (Top)	GPRS-4 slots	37	897.4	-0.07	0.042	28.90	28.69	0.044	2.0
Hotspot Edge 2(Right)	GPRS-4 slots	37	897.4	0.26	0.055	28.90	28.69	0.058	2.0
Hotspot Edge 3(Bottom)	GPRS-4 slots	37	897.4	-0.32	0.477	28.90	28.69	0.501	2.0
Hotspot Edge 4(Left)	GPRS-4 slots	37	897.4	0.05	0.182	28.90	28.69	0.191	2.0
Limbs									
Limbs back	GPRS-4 slots	975	880.2	0.27	1.565	28.90	28.71	1.635	4.0
Limbs back	GPRS-4 slots	37	897.4	-0.42	1.359	28.90	28.69	1.426	4.0
Limbs back	GPRS-4 slots	124	914.8	-0.15	1.170	28.90	28.84	1.186	4.0
Limbs Front	GPRS-4 slots	37	897.4	0.30	1.096	28.90	28.69	1.150	4.0
Limbs Edge 1 (Top)	GPRS-4 slots	37	897.4	-1.05	0.044	28.90	28.69	0.046	4.0
Limbs Edge 2 (Right)	GPRS-4 slots	37	897.4	0.22	0.261	28.90	28.69	0.274	4.0
Limbs Edge 3 (Bottom)	GPRS-4 slots	37	897.4	-0.04	0.842	28.90	28.69	0.884	4.0
Limbs Edge 4 (Left)	GPRS-4 slots	37	897.4	-0.09	0.387	28.90	28.69	0.406	4.0
Limbs back + Ear.	voice	975	880.2	0.37	1.408	33.00	32.69	1.512	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Since GPRS with 4 TX provides the highest output power, only this mode was considered for SAR assessment in body worn(limbs) configuration
- Measurements for SIM Card 2 are not conducted since SIM Card 1 show the highest output power
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 49.6				
Product: Smart Phone									
Test Mode: DCS1800 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift ($\leq 5\%$)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/Kg)
SIM 1 Card									
Head									
Left Cheek	voice	512	1710.2	-0.39	0.052	30.60	29.98	0.060	2.0
Left Cheek	voice	698	1747.4	-0.62	0.053	30.60	30.26	0.057	2.0
Left Cheek	voice	885	1784.8	-0.35	0.054	30.60	30.54	0.055	2.0
Left Tilt	voice	698	1747.4	0.24	0.032	30.60	30.26	0.035	2.0
Right Cheek	voice	698	1747.4	-0.17	0.053	30.60	30.26	0.057	2.0
Right Tilt	voice	698	1747.4	-0.20	0.043	30.60	30.26	0.047	2.0
Body									
Body back	GPRS-4 slots	698	1747.4	-0.11	0.505	26.80	26.44	0.549	2.0
Body Front	GPRS-4 slots	512	1710.2	-1.05	0.348	26.80	26.24	0.396	2.0
Body Front	GPRS-4 slots	698	1747.4	0.62	0.508	26.80	26.44	0.552	2.0
Body Front	GPRS-4 slots	885	1784.8	-0.32	0.423	26.80	26.79	0.424	2.0
Body Front + Ear.	voice	698	1747.4	0.05	0.386	30.60	30.26	0.417	2.0
Hotspot									
Hotspot back	GPRS-4 slots	512	1710.2	-0.30	0.162	26.80	26.24	0.184	2.0
Hotspot back	GPRS-4 slots	698	1747.4	-0.04	0.123	26.80	26.44	0.134	2.0
Hotspot back	GPRS-4 slots	885	1784.8	-0.25	0.162	26.80	26.79	0.162	2.0
Hotspot Front	GPRS-4 slots	698	1747.4	-0.12	0.095	26.80	26.44	0.103	2.0
Hotspot Edge 1 (Top)	GPRS-4 slots	698	1747.4	-0.05	0.026	26.80	26.44	0.028	2.0
Hotspot Edge 2(Right)	GPRS-4 slots	698	1747.4	-0.32	0.039	26.80	26.44	0.042	2.0
Hotspot Edge 3(Bottom)	GPRS-4 slots	698	1747.4	0.05	0.100	26.80	26.44	0.109	2.0
Hotspot Edge 4(Left)	GPRS-4 slots	698	1747.4	0.22	0.019	26.80	26.44	0.021	2.0
Limbs									
Limbs back	GPRS-4 slots	698	1747.4	-0.11	1.313	26.80	26.44	1.426	4.0
Limbs Front	GPRS-4 slots	698	1747.4	-1.05	1.681	26.80	26.44	1.826	4.0
Limbs Edge 1 (Top)	GPRS-4 slots	698	1747.4	0.62	0.071	26.80	26.44	0.077	4.0
Limbs Edge 2 (Right)	GPRS-4 slots	698	1747.4	-0.35	1.216	26.80	26.44	1.321	4.0
Limbs Edge 3 (Bottom)	GPRS-4 slots	512	1710.2	-0.27	1.935	26.80	26.24	2.201	4.0
Limbs Edge 3 (Bottom)	GPRS-4 slots	698	1747.4	-0.42	2.141	26.80	26.44	2.326	4.0
Limbs Edge 3 (Bottom)	GPRS-4 slots	885	1784.8	0.19	2.101	26.80	26.79	2.106	4.0
Limbs Edge 4 (Left)	GPRS-4 slots	698	1747.4	-0.33	0.060	26.80	26.44	0.065	4.0
Limbs Edge 3 (Bottom)+ Ear.	voice	698	1747.4	-0.05	2.003	26.80	26.44	2.176	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is $\leq 1.0W/kg$, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is $\leq 2.0W/kg$, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Since GPRS with 4 TX provides the highest output power, only this mode was considered for SAR assessment in body worn(limbs) configuration
- Measurements for SIM Card 2 are not conducted since SIM Card 1 show the highest output power
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 54.3				
Product: Smart Phone									
Test Mode: WCDMA Band I with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit W/kg
SIM 1 Card									
Head									
Left Cheek	RMC12.2kbps	9750	1950	-0.39	0.120	24.20	24.15	0.121	2.0
Left Tilt	RMC12.2kbps	9750	1950	-0.65	0.055	24.20	24.15	0.056	2.0
Right Cheek	RMC12.2kbps	9612	1922.4	0.28	0.139	24.20	23.99	0.146	2.0
Right Cheek	RMC12.2kbps	9750	1950	-0.42	0.140	24.20	24.15	0.142	2.0
Right Cheek	RMC12.2kbps	9888	1977.6	-0.25	0.140	24.20	24.18	0.141	2.0
Right Tilt	RMC12.2kbps	9750	1950	0.32	0.084	24.20	24.15	0.085	2.0
Body									
Body back	RMC12.2kbps	9612	1922.4	-0.24	0.605	24.20	23.99	0.635	2.0
Body back	RMC12.2kbps	9750	1950	0.28	0.606	24.20	24.15	0.613	2.0
Body back	RMC12.2kbps	9888	1977.6	-0.62	0.606	24.20	24.18	0.609	2.0
Body front	RMC12.2kbps	9750	1950	-0.65	0.285	24.20	24.15	0.288	2.0
Body back	HSDPA Subtest 1	9750	1950	0.05	0.509	23.40	23.27	0.524	2.0
Body back	HSUPA Subtest 1	9750	1950	-0.32	0.509	21.20	21.07	0.524	2.0
Body back + Ear.	RMC12.2kbps	9750	1950	0.24	0.606	24.20	24.15	0.613	2.0
Hotspot									
Hotspot back	RMC12.2kbps	9612	1922.4	-0.21	0.389	24.20	23.99	0.408	2.0
Hotspot back	RMC12.2kbps	9750	1950	-0.05	0.352	24.20	24.15	0.356	2.0
Hotspot back	RMC12.2kbps	9888	1977.6	0.36	0.385	24.20	24.18	0.387	2.0
Hotspot Front	RMC12.2kbps	9750	1950	-0.27	0.117	24.20	24.15	0.118	2.0
Hotspot back	HSDPA Subtest 1	9750	1950	-0.42	0.341	23.40	23.27	0.351	2.0
Hotspot back	HSUPA Subtest 1	9750	1950	0.15	0.341	21.20	21.07	0.351	2.0
Hotspot Edge 1 (Top)	RMC12.2kbps	9750	1950	-0.05	0.022	24.20	24.15	0.022	2.0
Hotspot Edge 2(Right)	RMC12.2kbps	9750	1950	-0.32	0.219	24.20	24.15	0.222	2.0
Hotspot Edge 3(Bottom)	RMC12.2kbps	9750	1950	-0.02	0.148	24.20	24.15	0.150	2.0
Hotspot Edge 4(Left)	RMC12.2kbps	9750	1950	0.26	0.021	24.20	24.15	0.021	2.0
Limbs									
Limbsback	RMC12.2kbps	9612	1922.4	0.55	1.152	24.20	23.99	1.209	4.0
Limbs back	RMC12.2kbps	9750	1950	-0.28	1.174	24.20	24.15	1.188	4.0
Limbs back	RMC12.2kbps	9888	1977.6	1.53	1.058	24.20	24.18	1.063	4.0
Limbs front	RMC12.2kbps	9750	1950	-0.26	0.862	24.20	24.15	0.872	4.0
Limbs back	HSDPA Subtest 1	9750	1950	0.27	0.971	23.40	23.27	1.001	4.0
Limbs back	HSUPA Subtest 1	9750	1950	-0.42	0.972	21.20	21.07	1.002	4.0
Limbs Edge 1 (Top)	RMC12.2kbps	9750	1950	-0.15	0.046	24.20	24.15	0.047	4.0
Limbs Edge 2 (Right)	RMC12.2kbps	9750	1950	1.62	1.154	24.20	24.15	1.167	4.0
Limbs Edge 3 (Bottom)	RMC12.2kbps	9750	1950	-0.05	1.092	24.20	24.15	1.105	4.0
Limbs Edge 4 (Left)	RMC12.2kbps	9750	1950	0.20	0.028	24.20	24.15	0.028	4.0
Limbs back + Ear.	RMC12.2kbps	9612	1922.4	0.12	1.174	24.20	24.15	1.188	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 49.7				
Product: Smart Phone									
Test Mode: WCDMA Band VIII with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit W/kg
SIM 1 Card									
Head									
Left Cheek	RMC12.2kbps	2712	882.4	-0.36	0.024	24.30	24.12	0.025	2.0
Left Cheek	RMC12.2kbps	2788	897.6	0.65	0.032	24.30	23.99	0.034	2.0
Left Cheek	RMC12.2kbps	2863	912.6	-0.28	0.024	24.30	24.21	0.025	2.0
Left Tilt	RMC12.2kbps	2788	897.6	-0.27	0.017	24.30	23.99	0.018	2.0
Right Cheek	RMC12.2kbps	2788	897.6	-0.46	0.022	24.30	23.99	0.024	2.0
Right Tilt	RMC12.2kbps	2788	897.6	0.52	0.013	24.30	23.99	0.014	2.0
Body									
Body back	RMC12.2kbps	2712	882.4	-0.11	0.337	24.30	24.12	0.351	2.0
Body back	RMC12.2kbps	2788	897.6	0.32	0.332	24.30	23.99	0.357	2.0
Body back	RMC12.2kbps	2863	912.6	-0.05	0.335	24.30	24.21	0.342	2.0
Body front	RMC12.2kbps	2788	897.6	-0.57	0.252	24.30	23.99	0.271	2.0
Body back	HSDPA Subtest 1	2788	897.6	0.65	0.307	22.90	22.60	0.329	2.0
Body back	HSUPA Subtest 1	2788	897.6	-0.32	0.308	20.60	20.24	0.335	2.0
Body back + Ear.	RMC12.2kbps	2712	882.4	0.02	0.332	24.30	24.12	0.346	2.0
Hotspot									
Hotspot back	RMC12.2kbps	2712	882.4	-0.18	0.152	24.30	24.12	0.158	2.0
Hotspot back	RMC12.2kbps	2788	897.6	-0.05	0.158	24.30	23.99	0.170	2.0
Hotspot back	RMC12.2kbps	2863	912.6	0.26	0.115	24.30	24.21	0.117	2.0
Hotspot Front	RMC12.2kbps	2788	897.6	-0.32	0.141	24.30	23.99	0.151	2.0
Hotspot back	HSDPA Subtest 1	2788	897.6	-0.04	0.090	22.90	22.60	0.096	2.0
Hotspot back	HSUPA Subtest 1	2788	897.6	0.17	0.097	20.60	20.24	0.105	2.0
Hotspot Edge 1 (Top)	RMC12.2kbps	2788	897.6	-0.20	0.016	24.30	23.99	0.017	2.0
Hotspot Edge 2(Right)	RMC12.2kbps	2788	897.6	0.05	0.014	24.30	23.99	0.015	2.0
Hotspot Edge 3(Bottom)	RMC12.2kbps	2788	897.6	-0.32	0.131	24.30	23.99	0.141	2.0
Hotspot Edge 4(Left)	RMC12.2kbps	2788	897.6	0.22	0.114	24.30	23.99	0.122	2.0
Limbs									
Limbs back	RMC12.2kbps	2712	882.4	-0.47	0.684	24.30	24.12	0.713	4.0
Limbs back	RMC12.2kbps	2788	897.6	-0.62	0.681	24.30	23.99	0.731	4.0
Limbs back	RMC12.2kbps	2863	912.6	0.35	0.685	24.30	24.21	0.699	4.0
Limbs front	RMC12.2kbps	2788	897.6	-0.28	0.540	24.30	23.99	0.580	4.0
Limbs back	HSDPA Subtest 1	2788	897.6	-0.11	0.591	22.90	22.60	0.633	4.0
Limbs back	HSUPA Subtest 1	2788	897.6	-0.22	0.592	20.60	20.24	0.643	4.0
Limbs Edge 1 (Top)	RMC12.2kbps	2788	897.6	0.06	0.018	24.30	23.99	0.019	4.0
Limbs Edge 2 (Right)	RMC12.2kbps	2788	897.6	-0.39	0.028	24.30	23.99	0.030	4.0
Limbs Edge 3 (Bottom)	RMC12.2kbps	2788	897.6	-0.27	0.263	24.30	23.99	0.282	4.0
Limbs Edge 4 (Left)	RMC12.2kbps	2788	897.6	0.21	0.232	24.30	23.99	0.249	4.0
Limbs back + Ear.	RMC12.2kbps	2863	912.6	0.36	0.680	24.30	24.21	0.694	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 54.3						
Product: Smart Phone												
Test Mode: LTE Band 1												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Head										
		Left Cheek	1	0	18100	1930	-0.39	0.113	25.40	25.04	0.123	2.0
		Left Cheek	1	0	18300	1950	-0.62	0.119	25.40	25.13	0.127	2.0
		Left Cheek	1	0	18500	1970	-0.55	0.113	25.40	25.02	0.123	2.0
		Left Tilt	1	0	18300	1950	-0.27	0.044	25.40	25.13	0.047	2.0
		Right Cheek	1	0	18300	1950	0.42	0.104	25.40	25.13	0.111	2.0
		Right Tilt	1	0	18300	1950	-0.32	0.081	25.40	25.13	0.086	2.0
		Body										
		Body back	1	0	18100	1930	-0.19	0.662	25.40	25.04	0.719	2.0
		Body back	1	0	18300	1950	0.57	0.665	25.40	25.13	0.708	2.0
		Body back	1	0	18500	1970	-0.32	0.662	25.40	25.02	0.723	2.0
		Body front	1	0	18300	1950	0.05	0.281	25.40	25.13	0.299	2.0
		Body back+Ear.	1	0	18300	1950	-0.26	0.640	25.40	25.13	0.681	2.0
		Hotspot										
		Hotspot back	1	0	18100	1930	-0.35	0.183	25.40	25.04	0.199	2.0
		Hotspot back	1	0	18300	1950	-0.21	0.260	25.40	25.13	0.277	2.0
		Hotspot back	1	0	18500	1970	-0.04	0.266	25.40	25.02	0.290	2.0
		Hotspot Front	1	0	18300	1950	-0.20	0.048	25.40	25.13	0.051	2.0
		Hotspot Edge 1 (Top)	1	0	18300	1950	-0.05	0.033	25.40	25.13	0.035	2.0
		Hotspot Edge 2(Right)	1	0	18300	1950	0.10	0.050	25.40	25.13	0.053	2.0
		Hotspot Edge 3(Bottom)	1	0	18300	1950	-0.30	0.129	25.40	25.13	0.137	2.0
		Hotspot Edge 4(Left)	1	0	18300	1950	0.05	0.019	25.40	25.13	0.020	2.0
		Limbs										
		Limbs back	1	0	18100	1930	1.02	1.469	25.40	25.04	1.596	4.0
		Limbs back	1	0	18300	1950	-0.27	1.420	25.40	25.13	1.511	4.0
		Limbs back	1	0	18500	1970	-0.55	1.469	25.40	25.02	1.603	4.0
		Limbs front	1	0	18300	1950	0.02	0.620	25.40	25.13	0.660	4.0
		Edge 1 (Top)	1	0	18300	1950	-0.34	0.053	25.40	25.13	0.056	4.0
		Edge 2 (Right)	1	0	18300	1950	-0.21	1.156	25.40	25.13	1.230	4.0
		Edge 3 (Bottom)	1	0	18300	1950	-0.45	1.318	25.40	25.13	1.403	4.0
		Edge 4 (Left)	1	0	18300	1950	0.12	0.024	25.40	25.13	0.026	4.0
		Limbs back+Ear.	1	0	18100	1930	-0.06	1.469	25.40	25.04	1.596	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 49.6						
Product: Smart Phone												
Test Mode: LTE Band 3												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Head										
		Left Cheek	1	0	19300	1720	-0.36	0.054	25.30	24.95	0.059	2.0
		Left Cheek	1	0	19575	1747.5	-0.62	0.056	25.30	25.05	0.059	2.0
		Left Cheek	1	0	19850	1775	0.35	0.055	25.30	25.00	0.059	2.0
		Left Tilt	1	0	19575	1747.5	-0.24	0.043	25.30	25.05	0.046	2.0
		Right Cheek	1	0	19575	1747.5	-0.17	0.039	25.30	25.05	0.041	2.0
		Right Tilt	1	0	19575	1747.5	0.55	0.032	25.30	25.05	0.034	2.0
		Body										
		Body back	1	0	19300	1720	-0.33	0.580	25.30	24.95	0.629	2.0
		Body back	1	0	19575	1747.5	0.05	0.566	25.30	25.05	0.600	2.0
		Body back	1	0	19850	1775	-0.27	0.596	25.30	25.00	0.639	2.0
		Body front	1	0	19575	1747.5	-0.42	0.564	25.30	25.05	0.597	2.0
		Body back+Ear	1	0	19850	1775	0.62	0.575	25.30	25.00	0.616	2.0
		Hotspot										
		Hotspot back	1	0	19300	1720	-0.26	0.138	25.30	24.95	0.150	2.0
		Hotspot back	1	0	19575	1747.5	-0.53	0.203	25.30	25.05	0.215	2.0
		Hotspot back	1	0	19850	1775	-0.32	0.157	25.30	25.00	0.168	2.0
		Hotspot Front	1	0	19575	1747.5	-0.05	0.149	25.30	25.05	0.158	2.0
		Hotspot Edge 1 (Top)	1	0	19575	1747.5	0.12	0.017	25.30	25.05	0.018	2.0
		Hotspot Edge 2(Right)	1	0	19575	1747.5	-0.05	0.128	25.30	25.05	0.136	2.0
		Hotspot Edge 3(Bottom)	1	0	19575	1747.5	-0.24	0.128	25.30	25.05	0.136	2.0
		Hotspot Edge 4(Left)	1	0	19575	1747.5	-0.13	0.016	25.30	25.05	0.017	2.0
		Limbs										
		Limbs back	1	0	19575	1747.5	-0.28	1.277	25.30	25.05	1.353	4.0
		Limbs front	1	0	19575	1747.5	1.15	1.983	25.30	25.05	2.101	4.0
		Edge 1 (Top)	1	0	19575	1747.5	-0.21	0.070	25.30	25.05	0.074	4.0
		Edge 2 (Right)	1	0	19575	1747.5	-0.04	1.268	25.30	25.05	1.343	4.0
		Edge 3 (Bottom)	1	0	19300	1720	-0.27	2.539	25.30	24.95	2.752	4.0
		Edge 3 (Bottom)	1	0	19575	1747.5	0.33	2.552	25.30	25.05	2.703	4.0
		Edge 3 (Bottom)	1	0	19850	1775	-0.62	2.608	25.30	25.00	2.795	4.0
		Edge 4 (Left)	1	0	19575	1747.5	-0.20	0.065	25.30	25.05	0.069	4.0
		Edge 3 (Bottom)+Ear.	1	0	19850	1775	0.27	2.576	25.30	25.00	2.760	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 50.7						
Product: Smart Phone												
Test Mode: LTE Band 7												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Head										
		Left Cheek	1	0	20850	2510	-0.66	0.097	25.00	24.59	0.107	2.0
		Left Cheek	1	0	21100	2535	0.38	0.090	25.00	24.52	0.101	2.0
		Left Cheek	1	0	21350	2560	-0.52	0.100	25.00	24.57	0.110	2.0
		Left Tilt	1	0	21100	2535	-0.32	0.068	25.00	24.52	0.076	2.0
		Right Cheek	1	0	21100	2535	-0.07	0.081	25.00	24.52	0.090	2.0
		Right Tilt	1	0	21100	2535	0.42	0.043	25.00	24.52	0.048	2.0
		Body										
		Body back	1	0	21100	2535	-0.15	0.447	25.00	24.52	0.499	2.0
		Body front	1	0	20850	2510	0.62	0.454	25.00	24.59	0.499	2.0
		Body front	1	0	21100	2535	-0.35	0.477	25.00	24.52	0.533	2.0
		Body front	1	0	21350	2560	-0.27	0.470	25.00	24.57	0.519	2.0
		Body front +Ear.	1	0	21100	2535	0.51	0.462	25.00	24.52	0.516	2.0
		Hotspot										
		Hotspot back	1	0	20850	2510	-0.07	0.237	25.00	24.59	0.260	2.0
		Hotspot back	1	0	21100	2535	-0.11	0.227	25.00	24.52	0.254	2.0
		Hotspot back	1	0	21350	2560	-0.06	0.245	25.00	24.57	0.270	2.0
		Hotspot Front	1	0	21100	2535	0.35	0.159	25.00	24.52	0.178	2.0
		Hotspot Edge 1 (Top)	1	0	21100	2535	-0.28	0.023	25.00	24.52	0.026	2.0
		Hotspot Edge 2(Right)	1	0	21100	2535	-0.24	0.142	25.00	24.52	0.159	2.0
		Hotspot Edge 3(Bottom)	1	0	21100	2535	-0.10	0.185	25.00	24.52	0.207	2.0
		Hotspot Edge 4(Left)	1	0	21100	2535	0.02	0.016	25.00	24.52	0.018	2.0
		Limbs										
		Limbs back	1	0	21100	2535	0.39	1.475	25.00	24.52	1.647	4.0
		Limbs front	1	0	21100	2535	-0.65	1.477	25.00	24.52	1.650	4.0
		Edge 1 (Top)	1	0	21100	2535	0.27	0.066	25.00	24.52	0.074	4.0
		Edge 2 (Right)	1	0	21100	2535	-0.33	0.270	25.00	24.52	0.302	4.0
		Edge 3 (Bottom)	1	0	20850	2510	1.11	1.690	25.00	24.59	1.857	4.0
		Edge 3 (Bottom)	1	0	21100	2535	1.27	1.736	25.00	24.52	1.939	4.0
		Edge 3 (Bottom)	1	0	21350	2560	1.22	1.749	25.00	24.57	1.931	4.0
		Edge 4 (Left)	1	0	21100	2535	-0.31	0.750	25.00	24.52	0.838	4.0
		Edge 3 (Bottom)+Ear.	1	0	21350	2560	0.05	1.105	25.00	24.57	1.220	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 50.8						
Product: Smart Phone												
Test Mode: LTE Band 8												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Head										
		Left Cheek	1	0	21500	885	-0.39	0.224	25.40	24.99	0.246	2.0
		Left Cheek	1	0	21625	897.5	0.62	0.233	25.40	25.04	0.253	2.0
		Left Cheek	1	0	21750	910	-0.35	0.230	25.40	25.26	0.238	2.0
		Left Tilt	1	0	21625	897.5	-0.24	0.118	25.40	25.04	0.128	2.0
		Right Cheek	1	0	21625	897.5	-0.72	0.179	25.40	25.04	0.194	2.0
		Right Tilt	1	0	21625	897.5	0.22	0.115	25.40	25.04	0.125	2.0
		Body										
		Body back	1	0	21500	885	-0.33	0.567	25.40	24.99	0.623	2.0
		Body back	1	0	21625	897.5	0.21	0.585	25.40	25.04	0.636	2.0
		Body back	1	0	21750	910	0.05	0.578	25.40	25.26	0.597	2.0
		Body front	1	0	21625	897.5	-0.27	0.389	25.40	25.04	0.423	2.0
		Body back+Ear.	1	0	21625	897.5	0.46	0.576	25.40	25.04	0.626	2.0
		Hotspot										
		Hotspot back	1	0	21500	885	-0.06	0.272	25.40	24.99	0.299	2.0
		Hotspot back	1	0	21625	897.5	-0.52	0.271	25.40	25.04	0.294	2.0
		Hotspot back	1	0	21750	910	-0.32	0.279	25.40	25.26	0.288	2.0
		Hotspot Front	1	0	21625	897.5	0.02	0.173	25.40	25.04	0.188	2.0
		Hotspot Edge 1 (Top)	1	0	21625	897.5	-0.10	0.013	25.40	25.04	0.014	2.0
		Hotspot Edge 2(Right)	1	0	21625	897.5	-0.07	0.106	25.40	25.04	0.115	2.0
		Hotspot Edge 3(Bottom)	1	0	21625	897.5	0.04	0.228	25.40	25.04	0.248	2.0
		Hotspot Edge 4(Left)	1	0	21625	897.5	0.02	0.106	25.40	25.04	0.115	2.0
		Limbs										
		Limbs back	1	0	21500	885	-0.22	0.950	25.40	24.99	1.044	4.0
		Limbs back	1	0	21625	897.5	0.05	1.062	25.40	25.04	1.154	4.0
		Limbs back	1	0	21750	910	-0.36	0.966	25.40	25.26	0.998	4.0
		Limbs front	1	0	21625	897.5	-0.32	1.018	25.40	25.04	1.106	4.0
		Edge 1 (Top)	1	0	21625	897.5	0.46	0.030	25.40	25.04	0.033	4.0
		Edge 2 (Right)	1	0	21625	897.5	-0.42	0.165	25.40	25.04	0.179	4.0
		Edge 3 (Bottom)	1	0	21625	897.5	0.07	0.724	25.40	25.04	0.787	4.0
		Edge 4 (Left)	1	0	21625	897.5	-0.51	0.236	25.40	25.04	0.256	4.0
		Limbs back+Ear.	1	0	21625	897.5	0.22	0.963	25.40	25.04	1.046	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 50.1						
Product: Smart Phone												
Test Mode: LTE Band 20												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Head										
		Left Cheek	1	0	24250	842	-0.39	0.261	25.10	24.94	0.271	2.0
		Left Cheek	1	0	24300	847	0.62	0.263	25.10	24.96	0.272	2.0
		Left Cheek	1	0	24350	852	-0.35	0.264	25.10	24.79	0.284	2.0
		Left Tilt	1	0	24300	847	-0.27	0.161	25.10	24.96	0.166	2.0
		Right Cheek	1	0	24300	847	-0.42	0.217	25.10	24.96	0.224	2.0
		Right Tilt	1	0	24300	847	-0.51	0.156	25.10	24.96	0.161	2.0
		Body										
		Body back	1	0	24250	842	-0.08	0.561	25.10	24.94	0.582	2.0
		Body back	1	0	24300	847	0.35	0.572	25.10	24.96	0.591	2.0
		Body back	1	0	24350	852	-0.27	0.575	25.10	24.79	0.618	2.0
		Body front	1	0	24300	847	-0.42	0.378	25.10	24.96	0.390	2.0
		Body back+Ear.	1	0	24350	852	0.15	0.568	25.10	24.79	0.610	2.0
		Hotspot										
		Hotspot back	1	0	24250	842	-0.05	0.148	25.10	24.94	0.154	2.0
		Hotspot back	1	0	24300	847	0.32	0.149	25.10	24.96	0.154	2.0
		Hotspot back	1	0	24350	852	-0.04	0.131	25.10	24.79	0.141	2.0
		Hotspot Front	1	0	24300	847	-0.01	0.067	25.10	24.96	0.069	2.0
		Hotspot Edge 1 (Top)	1	0	24300	847	-0.02	0.027	25.10	24.96	0.028	2.0
		Hotspot Edge 2(Right)	1	0	24300	847	-0.31	0.084	25.10	24.96	0.087	2.0
		Hotspot Edge 3(Bottom)	1	0	24300	847	0.20	0.148	25.10	24.96	0.153	2.0
		Hotspot Edge 4(Left)	1	0	24300	847	-0.21	0.076	25.10	24.96	0.078	2.0
		Limbs										
		Limbs back	1	0	24250	842	-0.22	1.341	25.10	24.94	1.391	4.0
		Limbs back	1	0	24300	847	0.36	1.352	25.10	24.96	1.396	4.0
		Limbs back	1	0	24350	852	-0.57	1.373	25.10	24.79	1.475	4.0
		Limbs front	1	0	24300	847	-0.51	1.119	25.10	24.96	1.156	4.0
		Edge 1 (Top)	1	0	24300	847	0.30	0.040	25.10	24.96	0.041	4.0
		Edge 2 (Right)	1	0	24300	847	-0.65	0.118	25.10	24.96	0.122	4.0
		Edge 3 (Bottom)	1	0	24300	847	0.27	0.838	25.10	24.96	0.865	4.0
		Edge 4 (Left)	1	0	24300	847	-0.66	0.261	25.10	24.96	0.270	4.0
		Limbs back+Ear.	1	0	24350	852	0.38	1.281	25.10	24.79	1.376	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



WIFI Health Evaluation:

Per EN 62209-2:2010 Annex K, Test reduction based on simultaneous multi-band transmission considerations. For secondary transmitter (i.e. lower power transmitters), we use the following formula to evaluate the threshold power for the secondary transmitter that allows it to be excluded from SAR testing:

$$P_{\text{available}} = P_{\text{max},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}}$$

Where

$P_{\text{max},m}$ is the maximum threshold exclusion power level, which is calculated by $SAR_{\text{lim}} \times m$, where m is an averaging mass.

$P_{\text{available}}$ is the threshold value there need to be tested;

SAR_{lim} is the SAR limit;

SAR_1 is the maximum SAR value of first transmitter mode result;

Restrictive power threshold;

$$\begin{aligned} P_{\text{available}} &= P_{\text{th},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}} = 20\text{mW} \times (2\text{W/Kg} - 0.941\text{ W/Kg}) / 2\text{W/Kg} \\ &= 10.59\text{mW} < 41.40\text{mW} (16.17\text{dBm}) \text{ for WIFI} \end{aligned}$$

$$\begin{aligned} P_{\text{available}} &= P_{\text{th},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}} = 40\text{mW} \times (4\text{W/Kg} - 2.795\text{ W/Kg}) / 4\text{W/Kg} \\ &= 12.05\text{mW} < 41.40\text{mW} (16.17\text{dBm}) \text{ for WIFI} \end{aligned}$$

There is need to test WIFI SAR and need to evaluate simultaneous transmission

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 60.2				
Product: Smart Phone									
Test Mode: 802.11b									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Head									
Left Cheek	DTS	7	2442	-0.02	0.095	16.17	16.17	0.095	2.0
Left Tilt	DTS	7	2442	0.05	0.085	16.17	16.17	0.085	2.0
Right Cheek	DTS	1	2412	-0.32	0.133	16.17	15.23	0.165	2.0
Right Cheek	DTS	7	2442	-0.04	0.173	16.17	16.17	0.173	2.0
Right Cheek	DTS	13	2472	0.10	0.136	16.17	14.94	0.181	2.0
Right Tilt	DTS	7	2442	-0.08	0.122	16.17	16.17	0.122	2.0
Body									
Body back	DTS	1	2412	-0.11	0.165	16.17	15.23	0.205	2.0
Body back	DTS	7	2442	0.06	0.167	16.17	16.17	0.167	2.0
Body back	DTS	13	2472	-0.35	0.169	16.17	14.94	0.224	2.0
Body front	DTS	7	2442	-0.27	0.083	16.17	16.17	0.083	2.0
Body back + Ear.	DTS	13	2472	0.18	0.161	16.17	14.94	0.214	2.0
Hotspot									
Hotspot back	DTS	1	2412	-0.05	0.079	16.17	15.23	0.098	2.0
Hotspot back	DTS	7	2442	-0.23	0.080	16.17	16.17	0.080	2.0
Hotspot back	DTS	13	2472	-0.50	0.081	16.17	14.94	0.108	2.0
Hotspot Front	DTS	7	2442	-0.41	0.020	16.17	16.17	0.020	2.0
Hotspot Edge 1 (Top)	DTS	7	2442	-0.02	0.057	16.17	16.17	0.057	2.0
Hotspot Edge 2(Right)	DTS	7	2442	-0.03	0.020	16.17	16.17	0.020	2.0
Hotspot Edge 3(Bottom)	DTS	7	2442	-0.07	0.009	16.17	16.17	0.009	2.0
Hotspot Edge 4(Left)	DTS	7	2442	0.10	0.066	16.17	16.17	0.066	2.0
Limbs									
Limbs back	DTS	1	2412	-0.33	0.459	16.17	15.23	0.570	4.0
Limbs back	DTS	7	2442	0.24	0.478	16.17	16.17	0.478	4.0
Limbs back	DTS	13	2472	-0.51	0.470	16.17	14.94	0.624	4.0
Limbs front	DTS	7	2442	0.06	0.180	16.17	16.17	0.180	4.0
Edge 1 (Top)	DTS	7	2442	-0.27	0.219	16.17	16.17	0.219	4.0
Edge 2 (Right)	DTS	7	2442	-0.42	0.054	16.17	16.17	0.054	4.0
Edge 3 (Bottom)	DTS	7	2442	0.30	0.016	16.17	16.17	0.016	4.0
Edge 4 (Left)	DTS	7	2442	0.05	0.235	16.17	16.17	0.235	4.0
Limbs back+Ear.	DTS	7	2442	-0.27	0.464	16.17	16.17	0.464	4.0

Note:

- For body and Hotspot part, when the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- For limbs part, when the 10-g SAR is ≤ 2.0W/kg, testing for low and high channel is optional.
- The test separation of all above table (body part is 5mm and limbs part is 0mm).
- Plots are only shown for the bold marked worst case SAR results

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



BT Health Evaluation:

Per EN 62209-2:2010 Annex K, Test reduction based on simultaneous multi-band transmission considerations. For secondary transmitter (i.e. lower power transmitters), we use the following Formula to evaluate the threshold power for the secondary transmitter that allows it to be excluded from SAR testing:

$$P_{\text{available}} = P_{\text{max},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}}$$

Where

$P_{\text{max},m}$ is the maximum threshold exclusion power level, which is calculated by $SAR_{\text{lim}} \times m$, where m is an averaging mass.

$P_{\text{available}}$ is the threshold value there need to be tested;

SAR_{lim} is the SAR limit;

SAR_1 is the maximum SAR value of first transmitter mode result;

Restrictive power threshold;

$$P_{\text{available}} = P_{\text{th},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}} = 20\text{mW} \times (2\text{W/Kg} - 0.941\text{ W/Kg}) / 2\text{W/Kg}$$

$$\begin{aligned} &= 10.59\text{mW} > 4.46\text{mW} (6.49\text{dBm}) \text{ for BT (BR/EDR)} \\ &= 10.59\text{mW} > 1.42\text{mW} (1.52\text{dBm}) \text{ for BT (BLE)} \\ &= 12.05\text{mW} > 0.00012360\text{mW} (-39.07981529\text{dBm}) \text{ for NFC} \end{aligned}$$

$$P_{\text{available}} = P_{\text{th},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}} = 40\text{mW} \times (4\text{W/Kg} - 2.795\text{ W/Kg}) / 4\text{W/Kg}$$

$$\begin{aligned} &= 12.05\text{mW} > 4.46\text{mW} (6.49\text{dBm}) \text{ for BT (BR/EDR)} \\ &= 12.05\text{mW} > 1.42\text{mW} (1.52\text{dBm}) \text{ for BT (BLE)} \\ &= 12.05\text{mW} > 0.00012360\text{mW} (-39.07981529\text{dBm}) \text{ for NFC} \end{aligned}$$

According to EN62479:2010, the maximum output power:

Technology	RF standard	RF Report No.	Power (mW)	Body Limit(mW)	Limbs Limit(mW)
BT(BR/EDR)	ETSI EN 300328 (V2.2.2)	AGC00552200704EE04	4.46	10.59	12.05
BT(BLE)	ETSI EN 300328 (V2.2.2)	AGC00552200704EE11	1.42	10.59	12.05
NFC	ETSI EN 300 330 (V2.1.1)	AGC00552200704EE09	0.00012360	10.59	12.05

There is not need to test BT, NFC SAR and not need to evaluate simultaneous transmission

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Simultaneous Multi-band Transmission Evaluation:

According to EN62209-1:2016 section 6.4.3, when the handsets with multiple antennas or multiple transmitters (with single or multiple antennas), transmitting simultaneously require special test considerations;

- (1) The EUT has GSM/WCDMA/LTE antenna, BT/WIFI/NFC antenna;
- (2) BT and WIFI share one antenna, and cannot transmit simultaneously;
- (3) GSM and GPRS/WCDMA/LTE can't work at the same time;
- (4) EN 62209-1:2016 section 6.4.3.2 ,SAR measurements for non-correlated signals, Alternative 1: Summation of peak spatial-average SAR values – simplest but most conservative method to find upper bound is always applicable:
 - a) For a test combination where simultaneous operation is intended, add the peak spatial-average SAR values for each antenna and frequency band where simultaneous operation is intended
 - b) Check if the maximum summed SAR value is within 3 dB of the applicable SAR limit. If so, ensure that all of the required test frequency channels have been measured in all frequency bands and for all antennas at which simultaneous operation is intended and repeat Step a).

The maximum summed SAR value in Steps a) and b) is the combined SAR

- (5) Due the NFC power is less than the $P_{available}$,NFC SAR is not required ;and the NFC frequency is 13.56MHz which is out of the exiting SAR system, simultaneous can not evaluation ;

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Simultaneous Multi-band Transmission SAR:

NO	Simultaneous state	Portable Handset			
		Head	Body-worn	Hotspot	Limbs
1	GSM(voice)+ WIFI 2.4GHz (data)	Yes	Yes	/	Yes
2	GSM(Data)+ WIFI 2.4GHz (data)	Yes	Yes	Yes	Yes
3	WCDMA(RMC12.2kbps)+ WIFI 2.4GHz (data)	Yes	Yes	Yes	Yes
4	LTE+WIFI 2.4GHz (data)	Yes	Yes	Yes	Yes

Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ10-g SAR (W/Kg)	Limit (W/Kg)
			GSM	WIFI		
GSM 900	Head (voice)	Left Touch	0.231	0.095	0.326	2.0
		Left Tilt	0.102	0.085	0.187	2.0
		Right Touch	0.162	0.181	0.343	2.0
		Right Tilt	0.117	0.122	0.239	2.0
	Body-worn	GPRS-4slots	0.941	0.224	1.165	2.0
		Body Front	0.620	0.083	0.703	2.0
		Earphone	0.802	0.214	1.016	2.0
	Hotspot	Back	0.517	0.108	0.625	2.0
		Front	0.284	0.020	0.304	2.0
		Edge 1	0.044	0.057	0.101	2.0
		Edge 2	0.058	0.020	0.078	2.0
		Edge 3	0.501	0.009	0.510	2.0
		Edge 4	0.191	0.066	0.257	2.0
		GPRS-4slots	1.635	0.624	2.259	4.0
	Limbs	Limbs Front	1.150	0.180	1.330	4.0
		Edge1	0.046	0.219	0.265	4.0
		Edge2	0.274	0.054	0.328	4.0
		Edge3	0.884	0.016	0.900	4.0
		Edge4	0.406	0.235	0.641	4.0
		Earphone	1.512	0.464	1.976	4.0
DCS 1800	Head (voice)	Left Touch	0.060	0.095	0.155	2.0
		Left Tilt	0.035	0.085	0.120	2.0
		Right Touch	0.057	0.181	0.238	2.0
		Right Tilt	0.047	0.122	0.169	2.0
	Body-worn	GPRS-4slots	0.549	0.224	0.773	2.0
		Body Front	0.552	0.083	0.635	2.0
		Earphone	0.417	0.214	0.631	2.0
	Hotspot	Back	0.184	0.108	0.292	2.0
		Front	0.103	0.020	0.123	2.0
		Edge 1	0.028	0.057	0.085	2.0
		Edge 2	0.042	0.020	0.062	2.0
		Edge 3	0.109	0.009	0.118	2.0
		Edge 4	0.021	0.066	0.087	2.0
		GPRS-4slots	1.426	0.624	2.050	4.0
	Limbs	Limbs Front	1.826	0.180	2.006	4.0
		Edge1	0.077	0.219	0.296	4.0
		Edge2	1.321	0.054	1.375	4.0
		Edge3	2.326	0.016	2.342	4.0
		Edge4	0.065	0.235	0.300	4.0
		Earphone	2.176	0.464	2.640	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ10-g SAR (W/Kg)	Limit (W/Kg)	
			WCDMA	WIFI			
WCDMA Band I	Head	Left Touch	0.121	0.095	0.216	2.0	
		Left Tilt	0.056	0.085	0.141	2.0	
		Right Touch	0.146	0.181	0.327	2.0	
		Right Tilt	0.085	0.122	0.207	2.0	
	Body-worn	Body back	0.635	0.224	0.859	2.0	
		Body Front	0.288	0.083	0.371	2.0	
		HSDPA	0.524	0.224	0.748	2.0	
		HSUPA	0.524	0.224	0.748	2.0	
	Hotspot	Earphone	0.613	0.214	0.827	2.0	
		Back	0.408	0.108	0.516	2.0	
		Front	0.118	0.020	0.138	2.0	
		HSDPA	0.351	0.108	0.459	2.0	
		HSUPA	0.351	0.108	0.459	2.0	
		Edge 1	0.022	0.057	0.079	2.0	
		Edge 2	0.222	0.020	0.242	2.0	
		Edge 3	0.150	0.009	0.159	2.0	
	Limbs	Edge 4	0.021	0.066	0.087	2.0	
		Limbs back	1.209	0.624	1.833	4.0	
		Limbs Front	0.872	0.180	1.052	4.0	
		HSDPA	1.001	0.624	1.625	4.0	
		HSUPA	1.002	0.624	1.626	4.0	
		Edge1	0.047	0.219	0.266	4.0	
		Edge2	1.167	0.054	1.221	4.0	
		Edge3	1.105	0.016	1.121	4.0	
	WCDMA Band VIII	Head	Edge4	0.028	0.235	0.263	4.0
			Earphone	1.188	0.464	1.652	4.0
			Left Touch	0.034	0.095	0.129	2.0
			Left Tilt	0.018	0.085	0.103	2.0
Body-worn		Right Touch	0.024	0.181	0.205	2.0	
		Right Tilt	0.014	0.122	0.136	2.0	
		Body back	0.357	0.224	0.581	2.0	
		Body Front	0.271	0.083	0.354	2.0	
Hotspot		HSDPA	0.329	0.224	0.553	2.0	
		HSUPA	0.335	0.224	0.559	2.0	
		Earphone	0.346	0.214	0.560	2.0	
		Back	0.170	0.108	0.278	2.0	
		Front	0.151	0.020	0.171	2.0	
		HSDPA	0.096	0.108	0.204	2.0	
		HSUPA	0.105	0.108	0.213	2.0	
		Edge 1	0.017	0.057	0.074	2.0	
Limbs		Edge 2	0.015	0.020	0.035	2.0	
		Edge 3	0.141	0.009	0.150	2.0	
		Edge 4	0.122	0.066	0.188	2.0	
		Limbs back	0.731	0.624	1.355	4.0	
		Limbs Front	0.580	0.180	0.760	4.0	
		HSDPA	0.633	0.624	1.257	4.0	
		HSUPA	0.643	0.624	1.267	4.0	
		Edge1	0.019	0.219	0.238	4.0	
Limbs		Edge2	0.030	0.054	0.084	4.0	
		Edge3	0.282	0.016	0.298	4.0	
		Edge4	0.249	0.235	0.484	4.0	
		Earphone	0.694	0.464	1.158	4.0	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ10-g SAR (W/Kg)	Limit (W/Kg)	
			LTE	WIFI			
LTE Band 1	Head	Left Touch	0.127	0.095	0.222	2.0	
		Left Tilt	0.047	0.085	0.132	2.0	
		Right Touch	0.111	0.181	0.292	2.0	
		Right Tilt	0.086	0.122	0.208	2.0	
	Body-worn	Body back	0.723	0.224	0.947	2.0	
		Body Front	0.299	0.083	0.382	2.0	
		Earphone	0.681	0.214	0.895	2.0	
	Hotspot	Back	0.290	0.108	0.398	2.0	
		Front	0.051	0.020	0.071	2.0	
		Edge 1	0.035	0.057	0.092	2.0	
		Edge 2	0.053	0.020	0.073	2.0	
		Edge 3	0.137	0.009	0.146	2.0	
	Limbs	Edge 4	0.020	0.066	0.086	2.0	
		Limbs back	1.603	0.624	2.227	4.0	
		Limbs Front	0.660	0.180	0.840	4.0	
		Edge1	0.056	0.219	0.275	4.0	
		Edge2	1.230	0.054	1.284	4.0	
		Edge3	1.403	0.016	1.419	4.0	
		Edge4	0.026	0.235	0.261	4.0	
	LTE Band 3	Head	Earphone	1.596	0.464	2.060	4.0
			Left Touch	0.059	0.095	0.154	2.0
Left Tilt			0.046	0.085	0.131	2.0	
Right Touch			0.041	0.181	0.222	2.0	
Body-worn		Right Tilt	0.034	0.122	0.156	2.0	
		Body back	0.639	0.224	0.863	2.0	
		Body Front	0.597	0.083	0.680	2.0	
Hotspot		Earphone	0.616	0.214	0.830	2.0	
		Back	0.215	0.108	0.323	2.0	
		Front	0.158	0.020	0.178	2.0	
		Edge 1	0.018	0.057	0.075	2.0	
		Edge 2	0.136	0.020	0.156	2.0	
		Edge 3	0.136	0.009	0.145	2.0	
		Edge 4	0.017	0.066	0.083	2.0	
Limbs		Limbs back	1.353	0.624	1.977	4.0	
		Limbs Front	2.101	0.180	2.281	4.0	
		Edge1	0.074	0.219	0.293	4.0	
		Edge2	1.343	0.054	1.397	4.0	
		Edge3	2.795	0.016	2.811	4.0	
		Edge4	0.069	0.235	0.304	4.0	
		Earphone	2.760	0.464	3.224	4.0	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ10-g SAR (W/Kg)	Limit (W/Kg)
			LTE	WIFI		
LTE Band 7	Head	Left Touch	0.110	0.095	0.205	2.0
		Left Tilt	0.076	0.085	0.161	2.0
		Right Touch	0.090	0.181	0.271	2.0
		Right Tilt	0.048	0.122	0.170	2.0
		Body-worn	Body back	0.499	0.224	0.723
	Body-worn	Body Front	0.533	0.083	0.616	2.0
		Earphone	0.516	0.214	0.730	2.0
		Hotspot	Back	0.270	0.108	0.378
	Hotspot	Front	0.178	0.020	0.198	2.0
		Edge 1	0.026	0.057	0.083	2.0
		Edge 2	0.159	0.020	0.179	2.0
		Edge 3	0.207	0.009	0.216	2.0
		Edge 4	0.018	0.066	0.084	2.0
	Limbs	Limbs back	1.647	0.624	2.271	4.0
		Limbs Front	1.650	0.180	1.830	4.0
		Edge1	0.074	0.219	0.293	4.0
		Edge2	0.302	0.054	0.356	4.0
		Edge3	1.939	0.016	1.955	4.0
		Edge4	0.838	0.235	1.073	4.0
		Earphone	1.220	0.464	1.684	4.0
	LTE Band 8	Head	Left Touch	0.253	0.095	0.348
Left Tilt			0.128	0.085	0.213	2.0
Right Touch			0.194	0.181	0.375	2.0
Right Tilt			0.125	0.122	0.247	2.0
Body-worn			Body back	0.636	0.224	0.860
Body-worn		Body Front	0.423	0.083	0.506	2.0
		Earphone	0.626	0.214	0.840	2.0
		Hotspot	Back	0.299	0.108	0.407
Hotspot		Front	0.188	0.020	0.208	2.0
		Edge 1	0.014	0.057	0.071	2.0
		Edge 2	0.115	0.020	0.135	2.0
		Edge 3	0.248	0.009	0.257	2.0
		Edge 4	0.115	0.066	0.181	2.0
Limbs		Limbs back	1.154	0.624	1.778	4.0
		Limbs Front	1.106	0.180	1.286	4.0
		Edge1	0.033	0.219	0.252	4.0
		Edge2	0.179	0.054	0.233	4.0
		Edge3	0.787	0.016	0.803	4.0
		Edge4	0.256	0.235	0.491	4.0
		Earphone	1.046	0.464	1.510	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ10-g SAR (W/Kg)	Limit (W/Kg)
			LTE	WIFI		
LTE Band 20	Head	Left Touch	0.284	0.095	0.379	2.0
		Left Tilt	0.166	0.085	0.251	2.0
		Right Touch	0.224	0.181	0.405	2.0
		Right Tilt	0.161	0.122	0.283	2.0
	Body-worn	Body back	0.618	0.224	0.842	2.0
		Body Front	0.390	0.083	0.473	2.0
		Earphone	0.610	0.214	0.824	2.0
	Hotspot	Back	0.154	0.108	0.262	2.0
		Front	0.069	0.020	0.089	2.0
		Edge 1	0.028	0.057	0.085	2.0
		Edge 2	0.087	0.020	0.107	2.0
		Edge 3	0.153	0.009	0.162	2.0
		Edge 4	0.078	0.066	0.144	2.0
	Limbs	Limbs back	1.475	0.624	2.099	4.0
		Limbs Front	1.156	0.180	1.336	4.0
		Edge1	0.041	0.219	0.260	4.0
		Edge2	0.122	0.054	0.176	4.0
		Edge3	0.865	0.016	0.881	4.0
		Edge4	0.270	0.235	0.505	4.0
		Earphone	1.376	0.464	1.840	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Jul. 31,2020

System Check Head 900 MHz

DUT: Dipole 900 MHz Type: SID 900

Communication System: CW; Communication System Band: D900 (900.0 MHz); Duty Cycle: 1:1; Conv.F=5.16

Frequency: 900 MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r =40.18$; $\rho= 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/System Check 900 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 900
Channels	Middle
Signal	Crest factor: 1.0

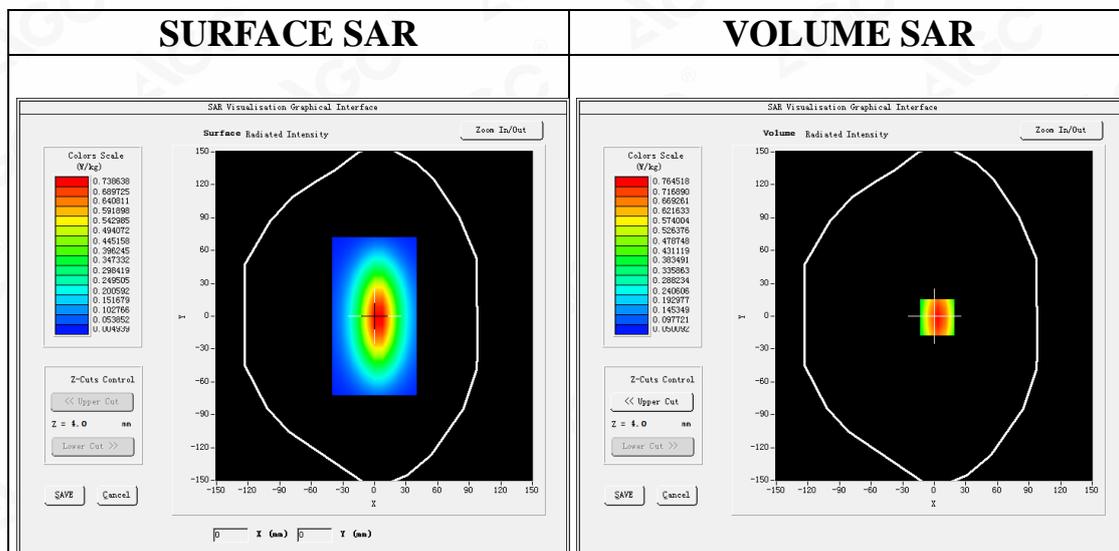

Maximum location: X=3.00, Y=-1.00

SAR Peak: 1.10 W/kg

SAR 10g (W/Kg)	0.450452
SAR 1g (W/Kg)	0.731974



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



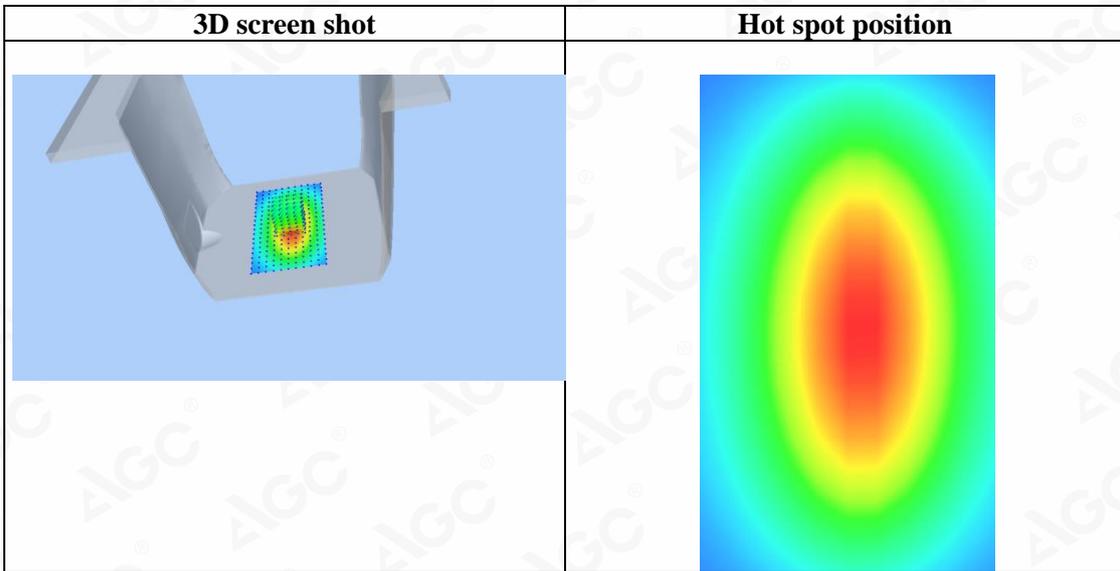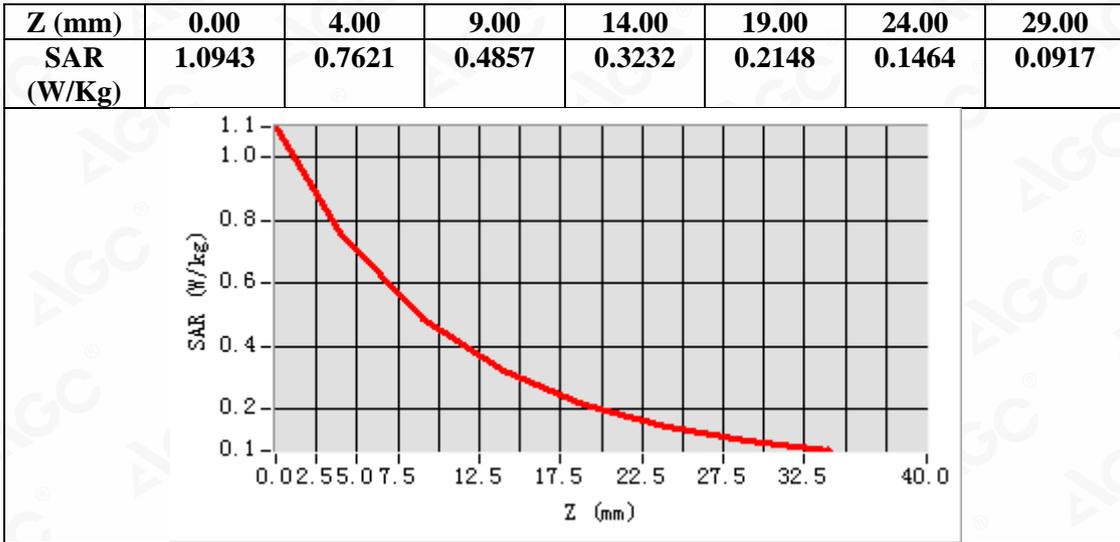

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 1800MHz
DUT: Dipole 1800 MHz; Type: SID 1800

Date: Aug. 03,2020


Communication System: CW; Communication System Band: D1800 (1800.0 MHz); Duty Cycle: 1:1; Conv.F=4.48
Frequency: 1800 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1800 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 1800 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 1800
Channels	Middle
Signal	Crest factor: 1.0

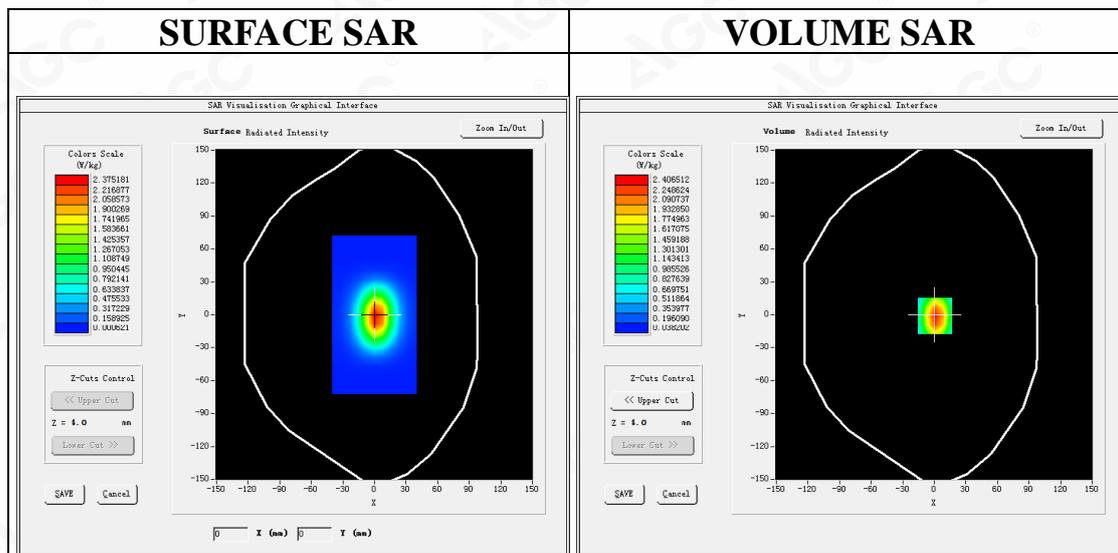



Maximum location: X=1.00, Y=-1.00

SAR Peak: 3.85 W/kg

SAR 10g (W/Kg)	1.237243
SAR 1g (W/Kg)	2.283287

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



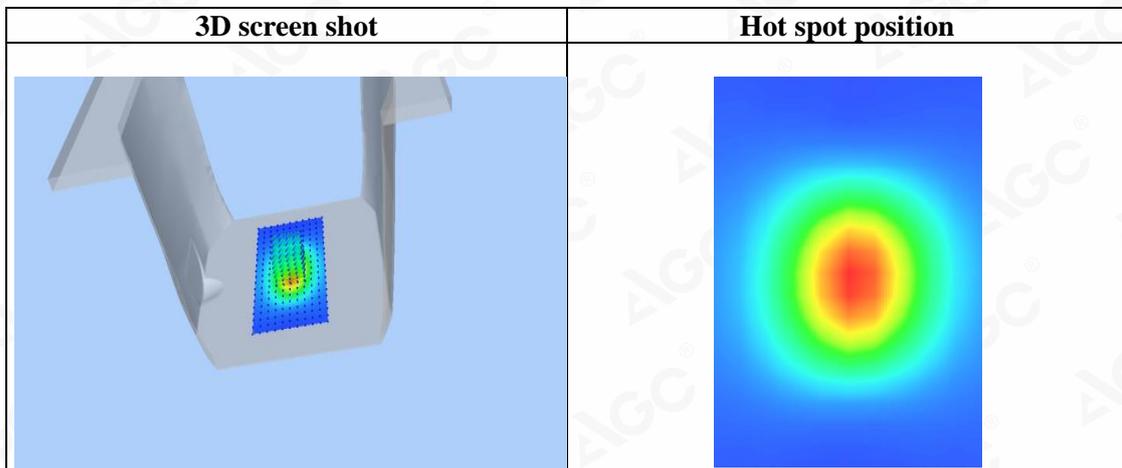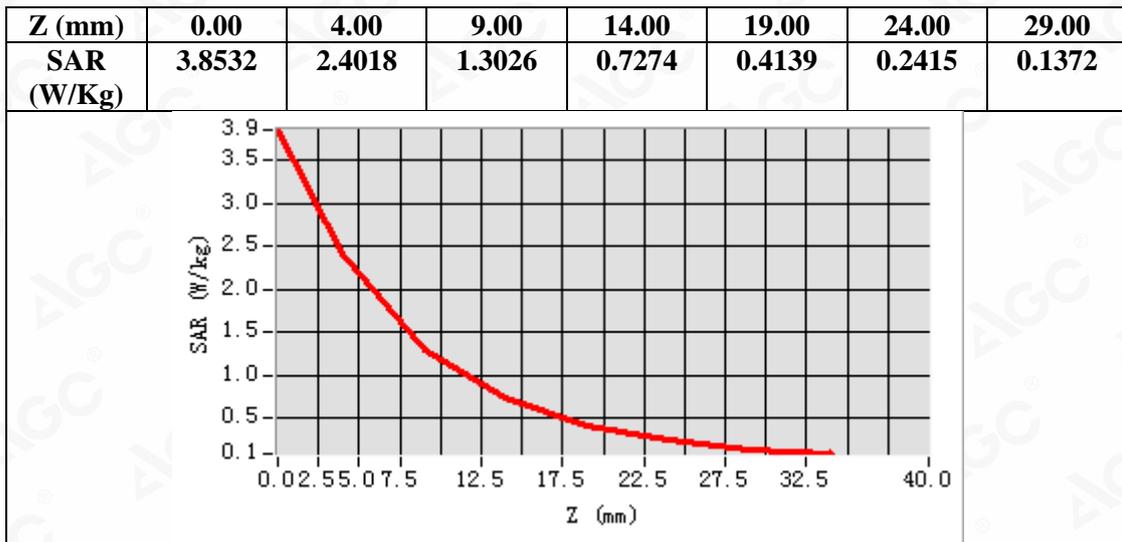

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 2000MHz
DUT: Dipole 2000 MHz; Type: SID 2000

Date: Aug. 01,2020


Communication System: CW; Communication System Band: D2000 (2000.0 MHz); Duty Cycle: 1:1; Conv.F=4.61
Frequency: 2000MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2000 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2000 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 2000
Channels	Middle
Signal	Crest factor: 1.0

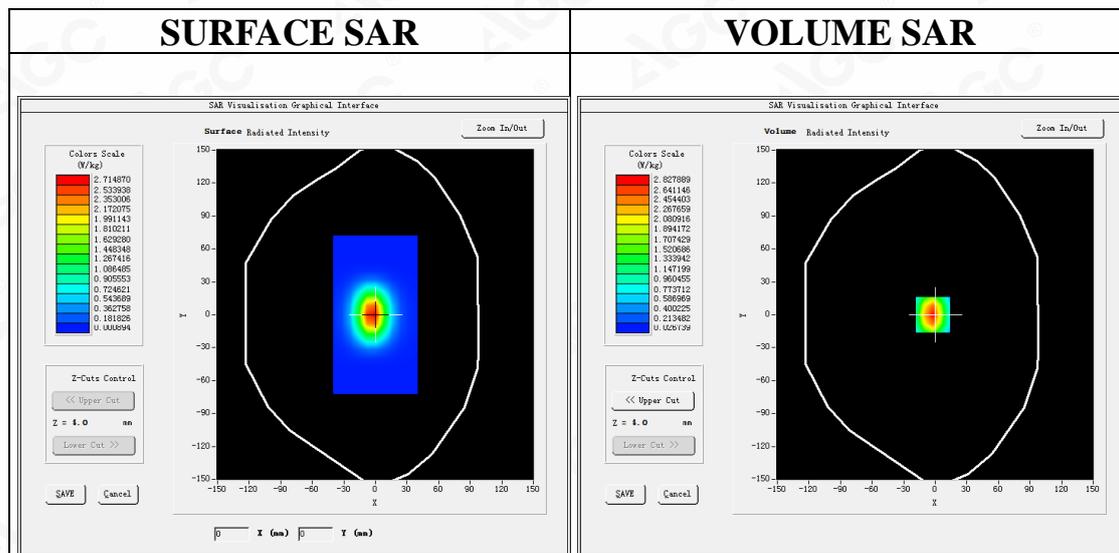



Maximum location: X=-2.00, Y=0.00

SAR Peak: 4.68 W/kg

SAR 10g (W/Kg)	1.296447
SAR 1g (W/Kg)	2.665406

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



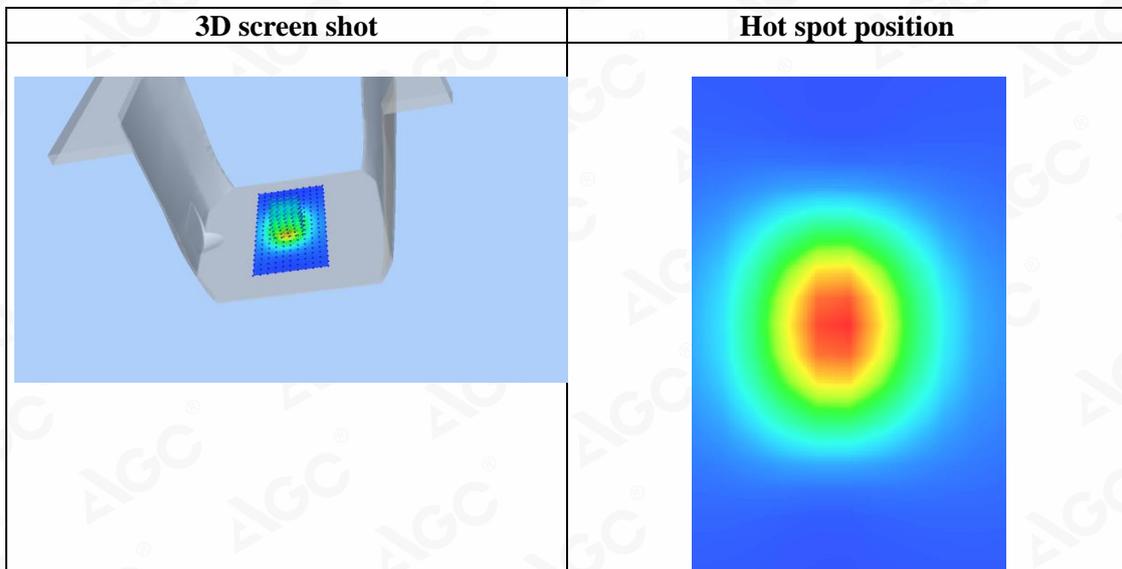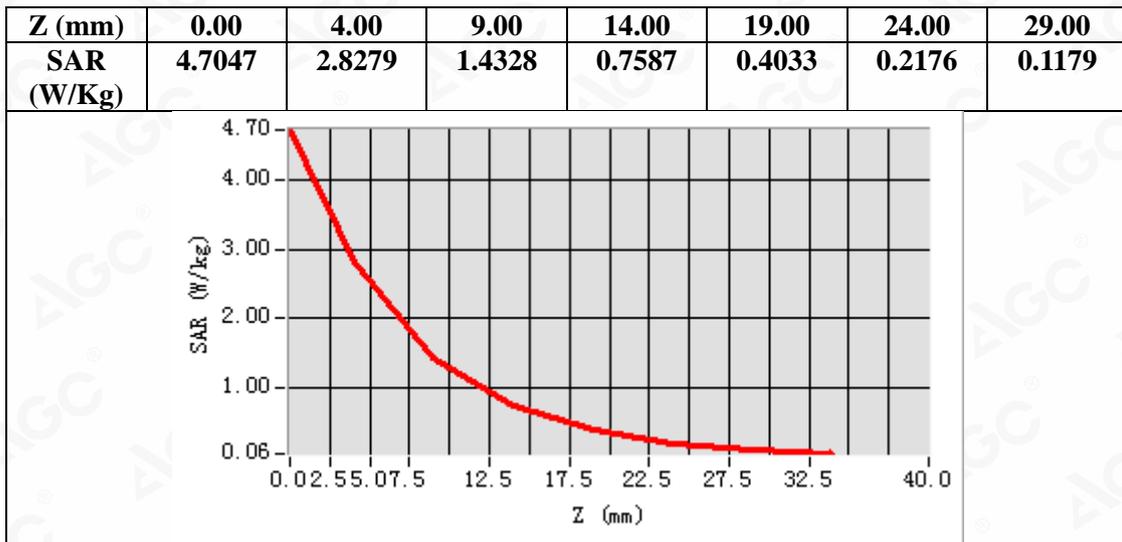

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 835MHz
DUT: Dipole 835 MHz Type: SID 835

Date: Jul. 30,2020


Communication System: CW; Communication System Band: D835(835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26
Frequency: 835MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.88\text{mho/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 19.6, Liquid temperature ($^{\circ}\text{C}$): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 835 Head/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$
Configuration/System Check 835 Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Area Scan	$dx=8\text{mm } dy=8\text{mm}, h= 5.00 \text{ mm}$
ZoomScan	$5x5x7, dx=8\text{mm } dy=8\text{mm } dz=5\text{mm}$
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 835
Channels	Middle
Signal	Crest factor: 1.0

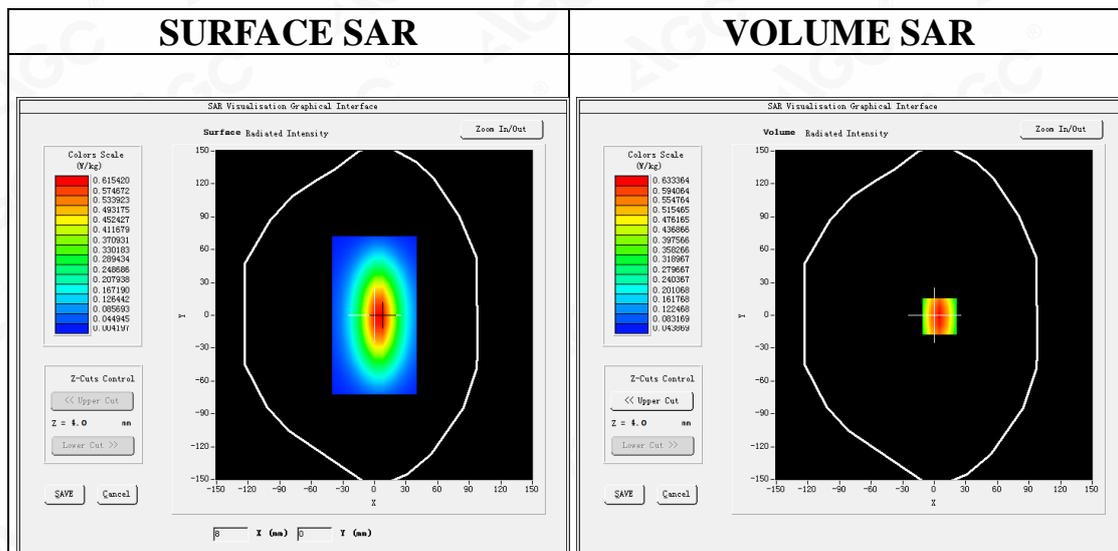


Maximum location: X=5.00, Y=-1.00
SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.378724
SAR 1g (W/Kg)	0.607245

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



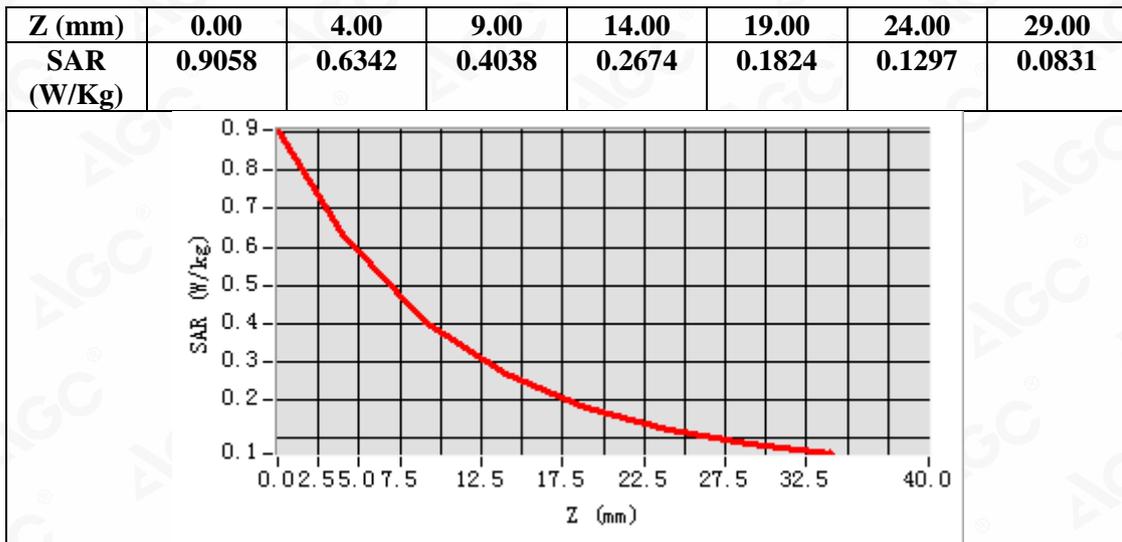

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 900 MHz
DUT: Dipole 900 MHz Type: SID 900

Date: Jul. 21,2020


Communication System: CW; Communication System Band: D900 (900.0 MHz); Duty Cycle: 1:1; Conv.F=5.16
Frequency: 900 MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.98$ mho/m; $\epsilon_r = 40.44$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 900 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 900
Channels	Middle
Signal	Crest factor: 1.0

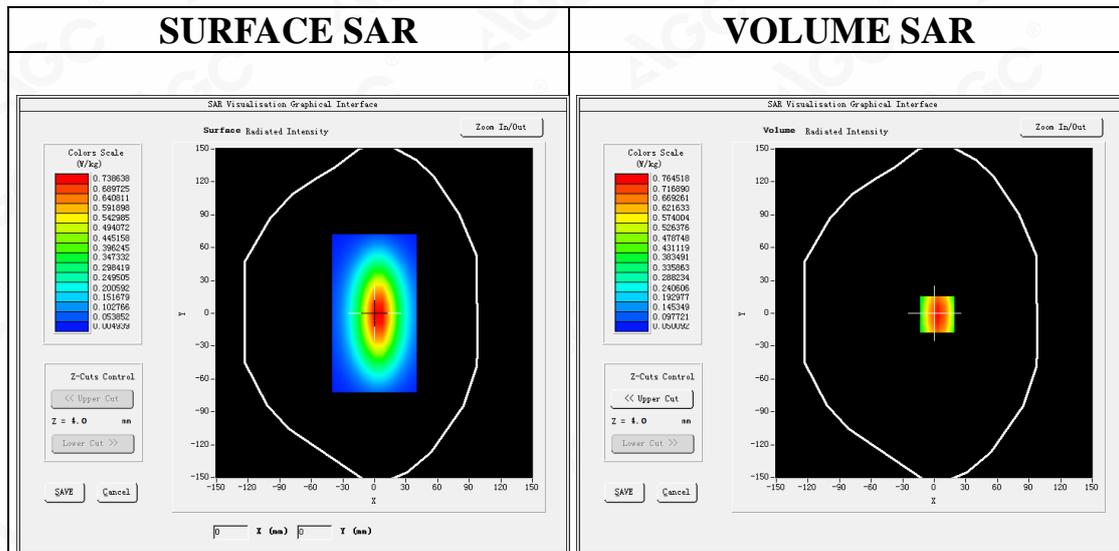

Maximum location: X=3.00, Y=-1.00



SAR Peak: 1.12 W/kg

SAR 10g (W/Kg)	0.453154
SAR 1g (W/Kg)	0.734299

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



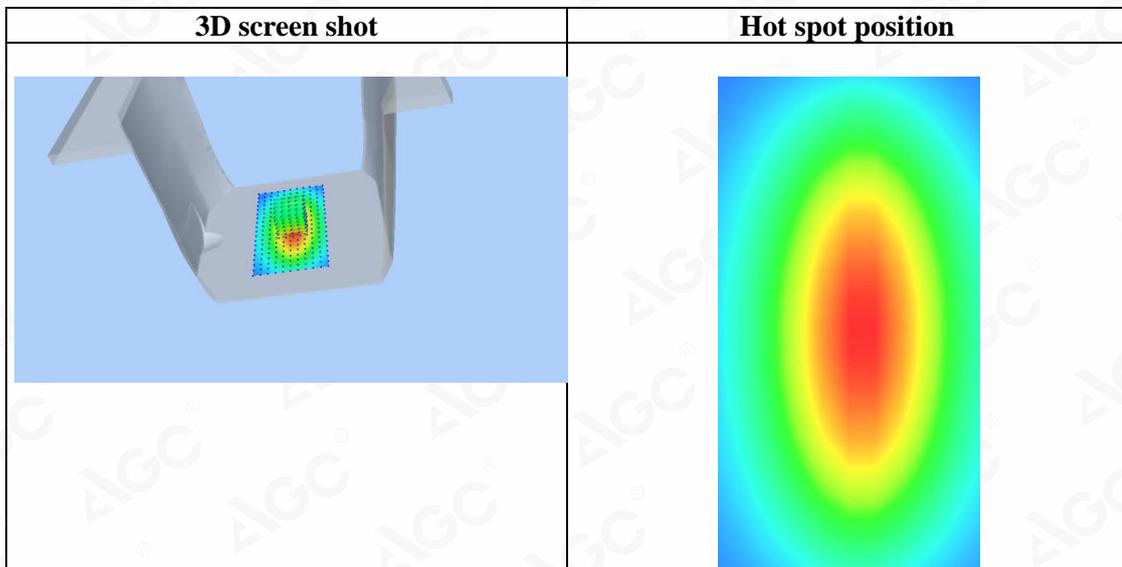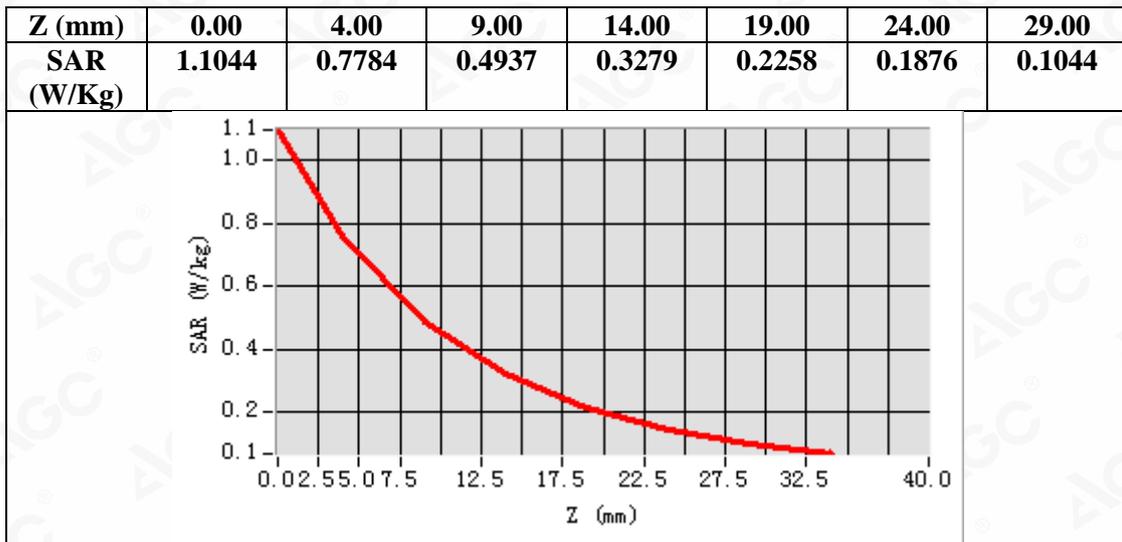

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 2450 MHz
DUT: Dipole 2450 MHz Type: SID 2450

Date: Jul. 22,2020

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.23
Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.6, Liquid temperature (°C): 22.3


SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2450 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450 MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 2450
Channels	Middle
Signal	Crest factor: 1.0

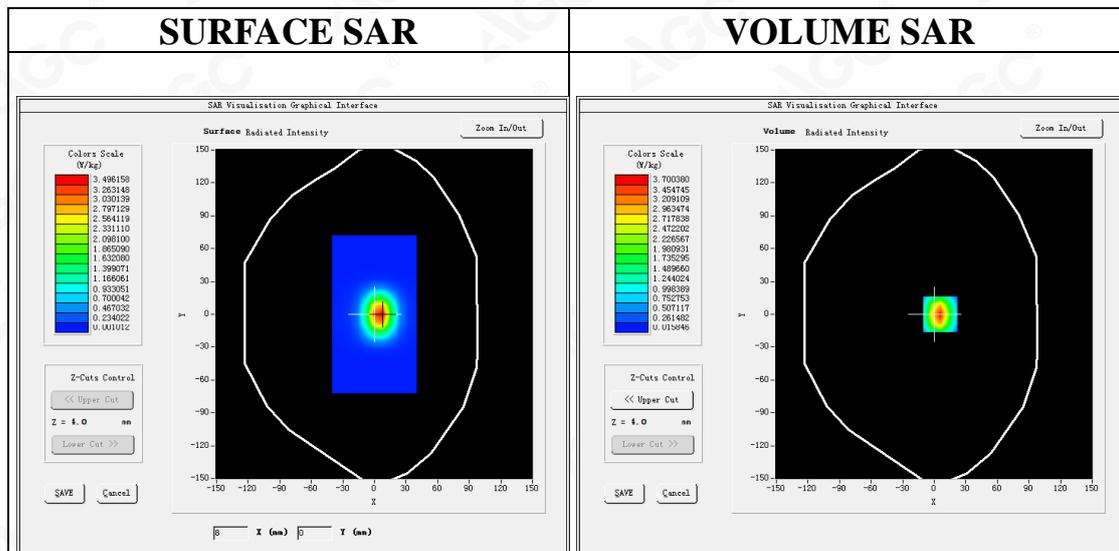



Maximum location: X=6.00, Y=0.00

SAR Peak: 6.43 W/kg

SAR 10g (W/Kg)	1.511584
SAR 1g (W/Kg)	3.436852

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



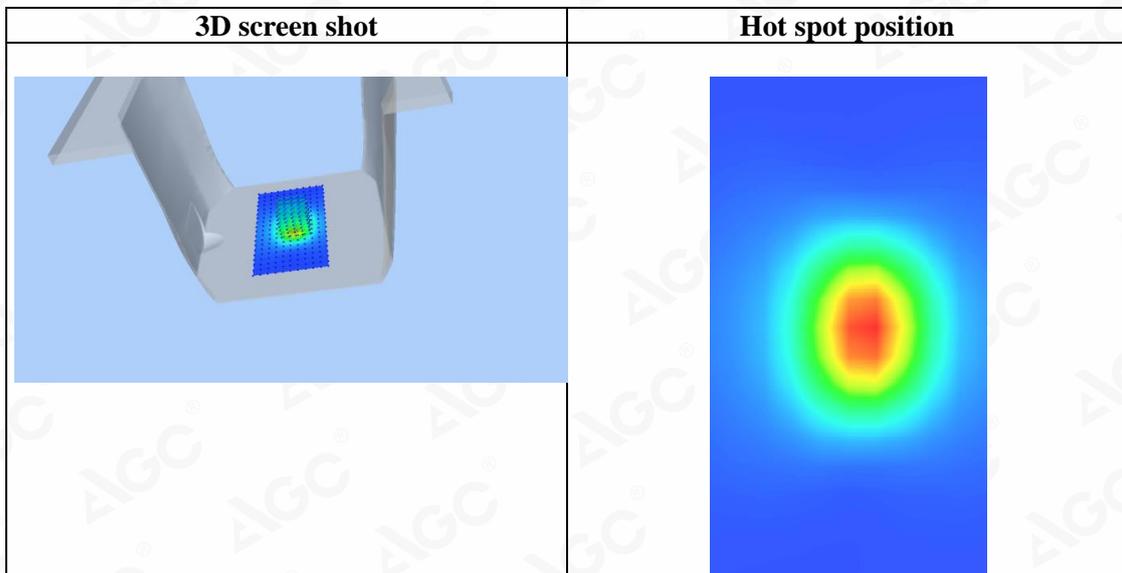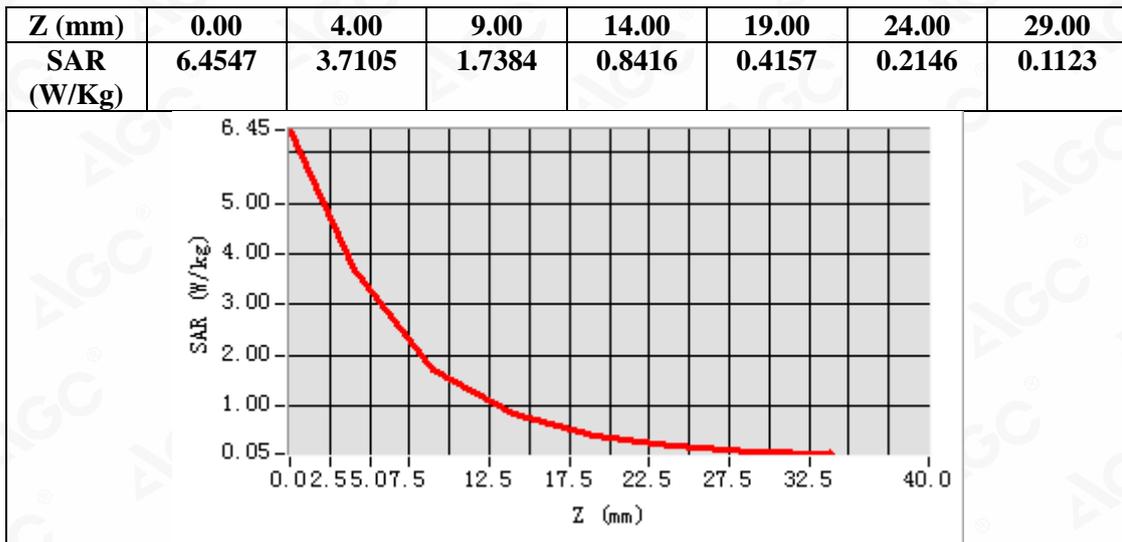

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 2600MHz
DUT: Dipole 2600 MHz; Type: SID 2600

Date: Jul. 25,2020


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=3.81
Frequency:2600 MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 2600
Channels	Middle
Signal	Crest factor: 1.0

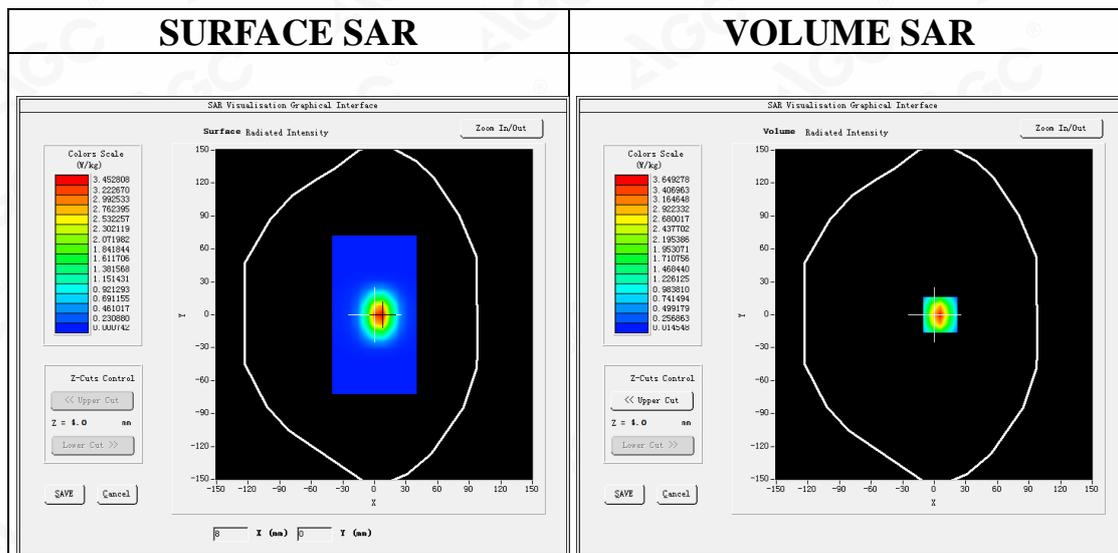

Maximum location: X=6.00, Y=0.00



SAR Peak: 6.33 W/kg

SAR 10g (W/Kg)	1.483958
SAR 1g (W/Kg)	3.390574

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



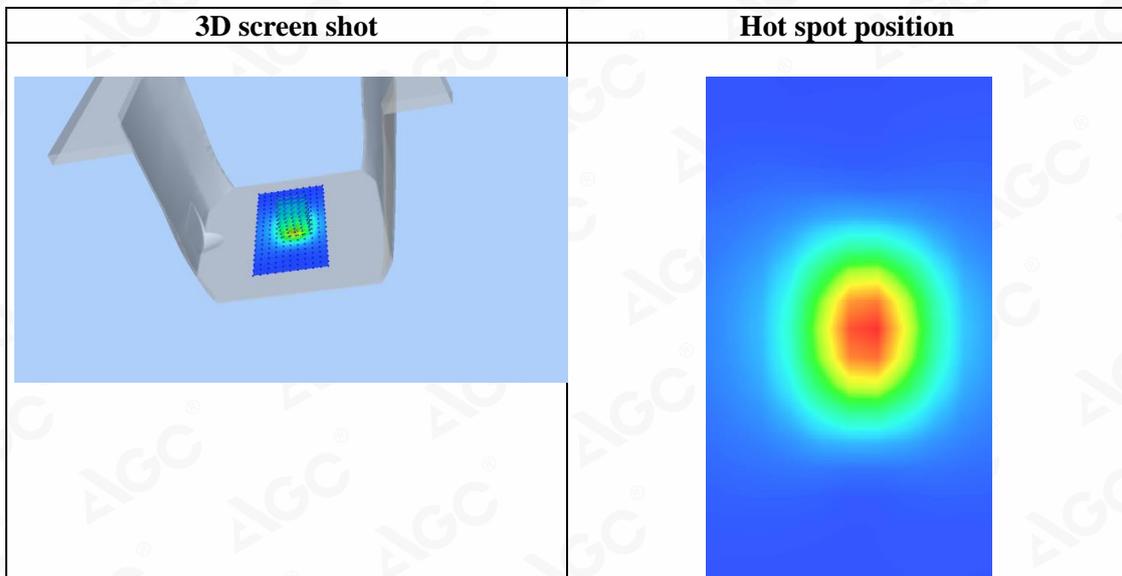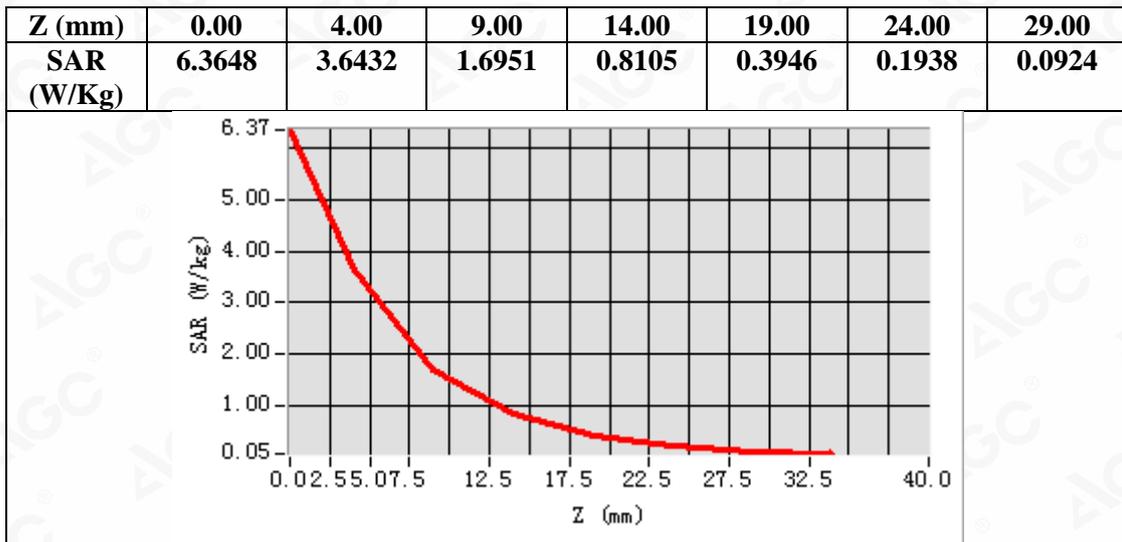

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 900 MHz
DUT: Dipole 900 MHz Type: SID 900

Date: Jul. 31,2020


Communication System: CW; Communication System Band: D900 (900.0 MHz); Duty Cycle: 1:1; Conv.F=5.16
Frequency: 900 MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r = 40.18$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 900 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 900
Channels	Middle
Signal	Crest factor: 1.0

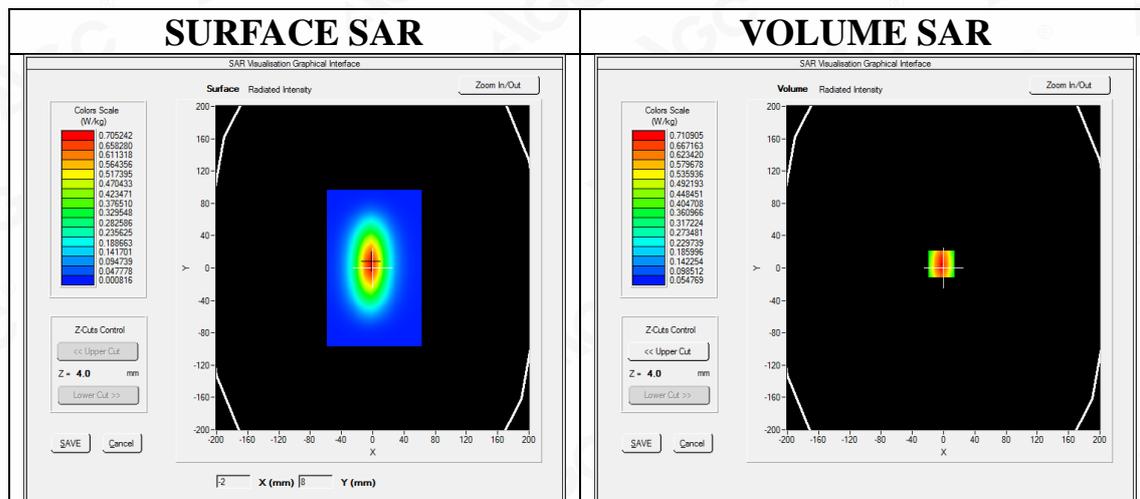



Maximum location: X=-3.00, Y=5.00
SAR Peak: 1.00 W/kg

SAR 10g (W/Kg)	0.426983
SAR 1g (W/Kg)	0.678472

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.0036	0.7115	0.4673	0.3141	0.2136	0.1587	0.1028

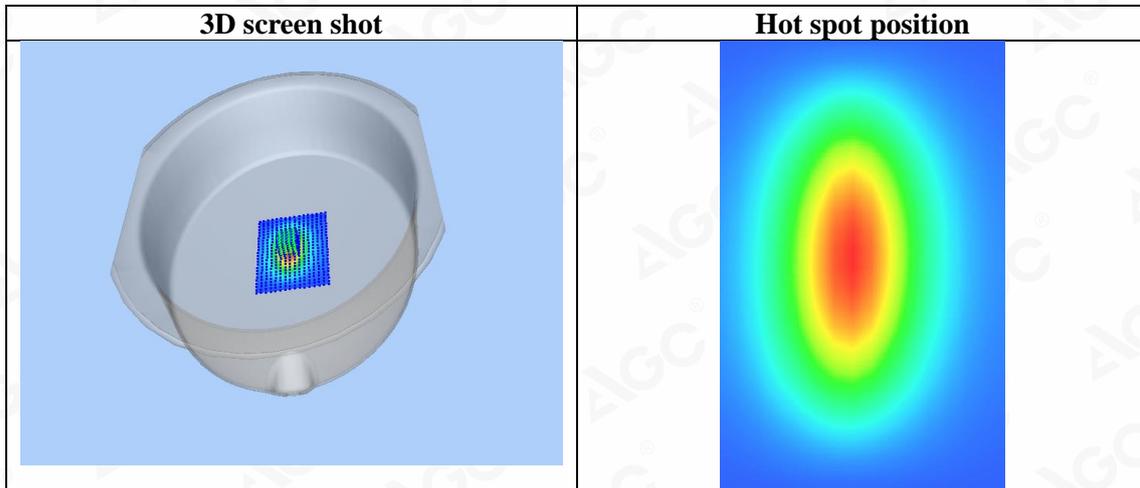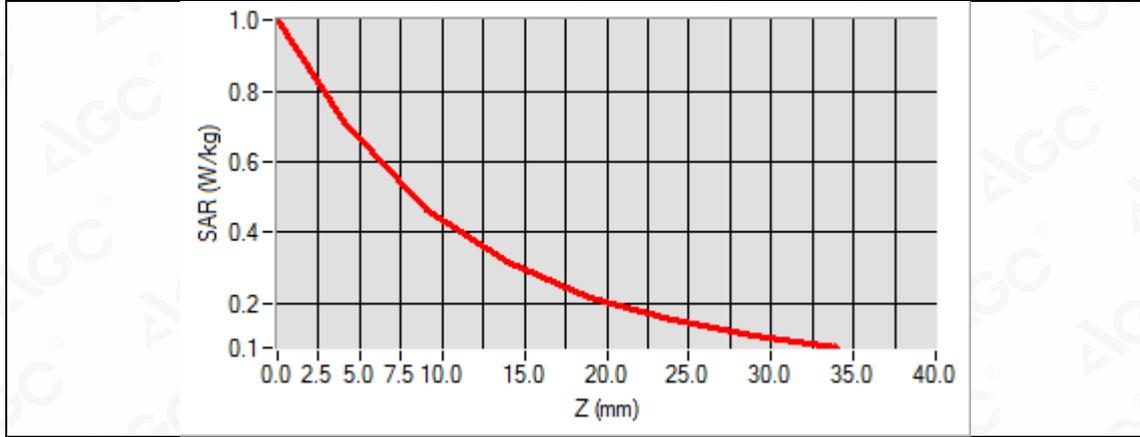

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 1800MHz
DUT: Dipole 1800 MHz; Type: SID 1800

Date: Aug. 03,2020


Communication System: CW; Communication System Band: D1800 (1800.0 MHz); Duty Cycle: 1:1; Conv.F=4.48
Frequency: 1800 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1800 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 1800 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 1800
Channels	Middle
Signal	Crest factor: 1.0

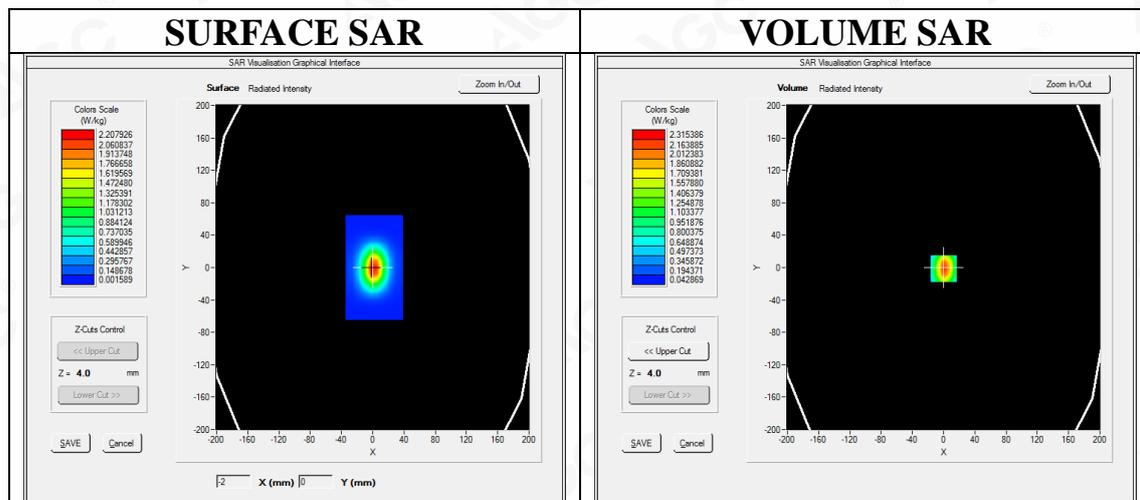

Maximum location: X=0.00, Y=-1.00
SAR Peak: 3.64 W/kg



SAR 10g (W/Kg)	1.207535
SAR 1g (W/Kg)	2.239931

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	3.6315	2.3168	1.2972	0.7563	0.4419	0.2662	0.1674

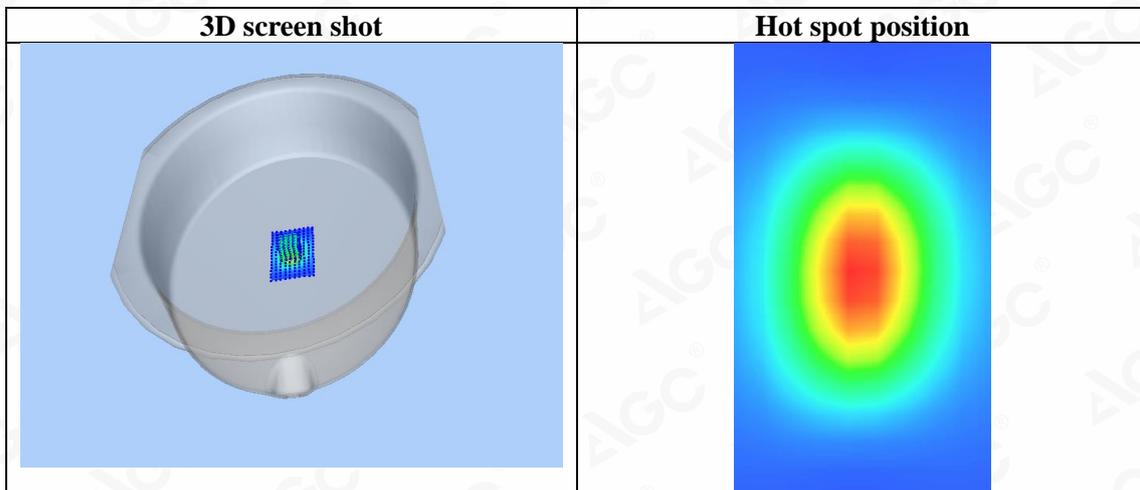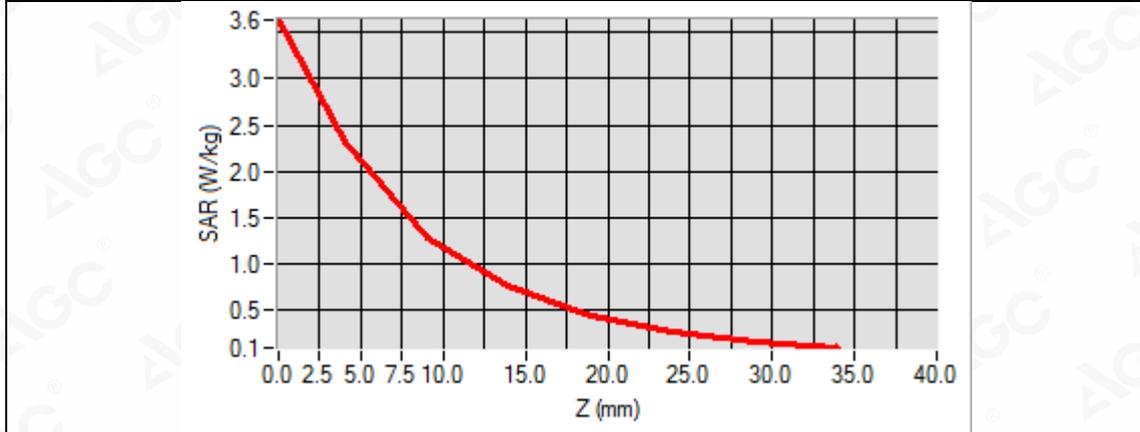

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 2000MHz
DUT: Dipole 2000 MHz; Type: SID 2000

Date: Aug. 01,2020


Communication System: CW; Communication System Band: D2000 (2000.0 MHz); Duty Cycle: 1:1; Conv.F=4.61
Frequency: 2000MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2000 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2000 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 2000
Channels	Middle
Signal	Crest factor: 1.0

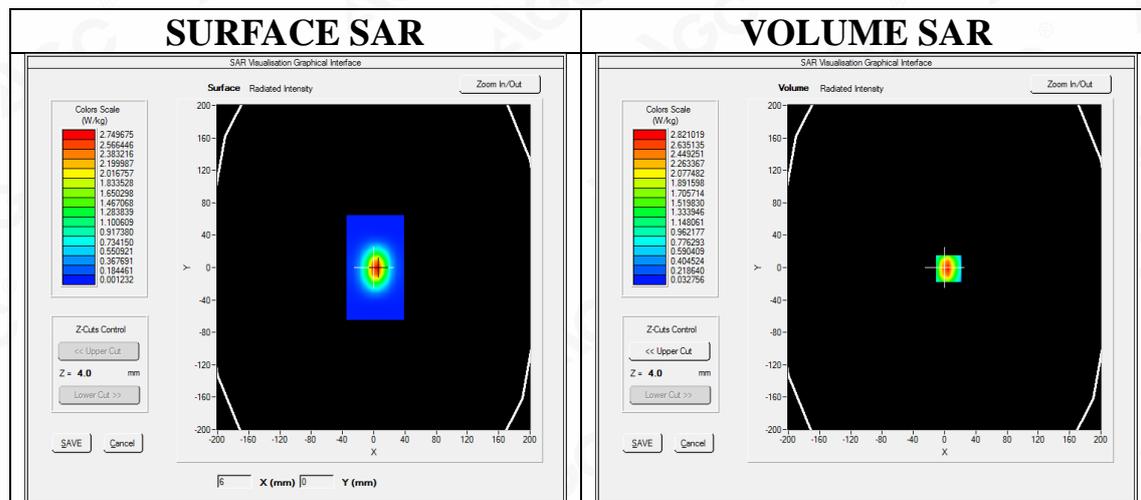




Maximum location: X=5.00, Y=-1.00
SAR Peak: 4.60 W/kg

SAR 10g (W/Kg)	1.331792
SAR 1g (W/Kg)	2.683438

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



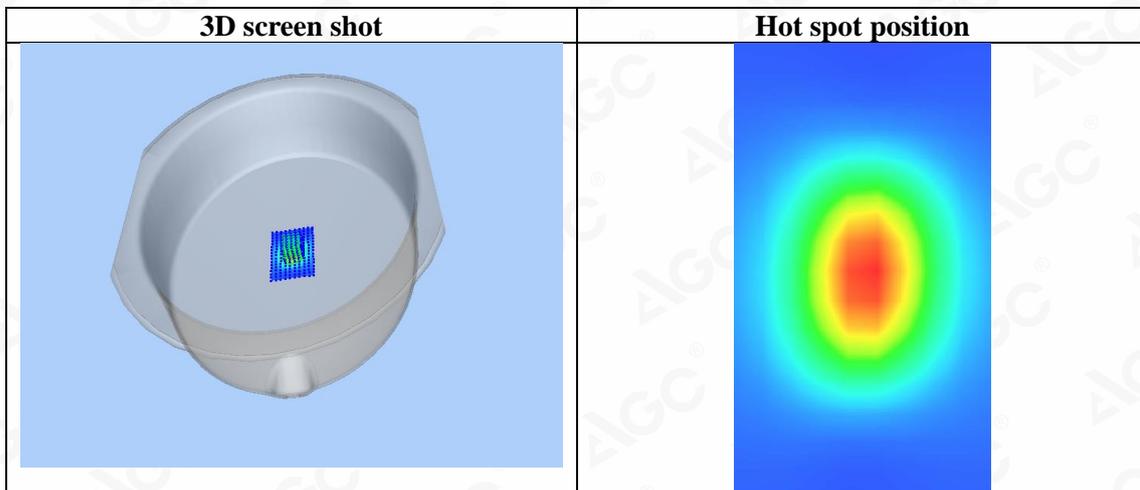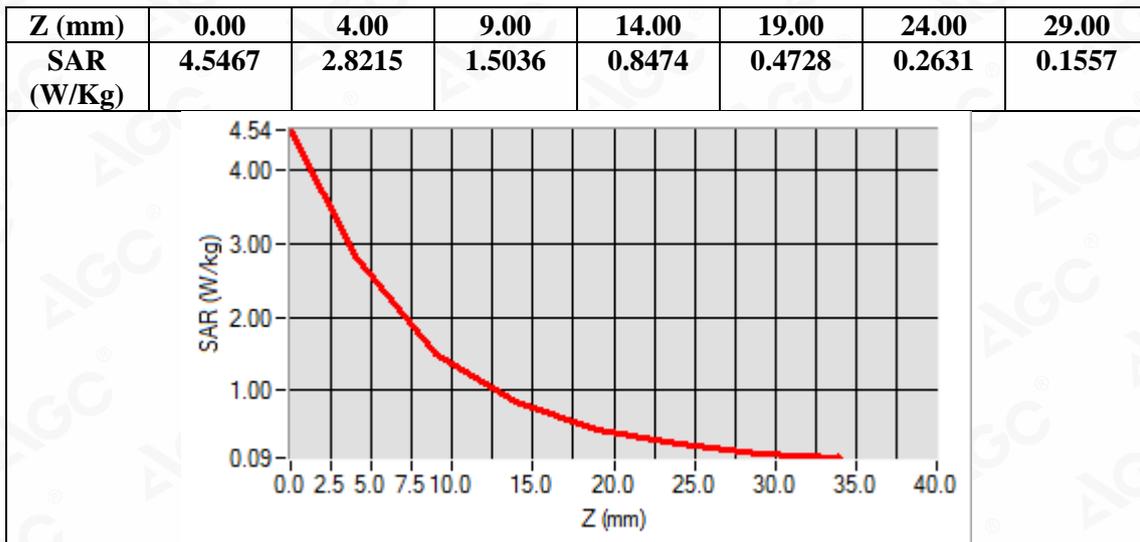

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 835MHz
DUT: Dipole 835 MHz Type: SID 835

Date: Jul. 30,2020


Communication System: CW; Communication System Band: D835(835.0 MHz); Duty Cycle: 1:1; Conv.F=5.26
Frequency: 835MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.88\text{mho/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 19.6, Liquid temperature ($^{\circ}\text{C}$): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 835 Head/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$
Configuration/System Check 835 Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Area Scan	$dx=8\text{mm } dy=8\text{mm}, h= 5.00 \text{ mm}$
ZoomScan	$5x5x7, dx=8\text{mm } dy=8\text{mm } dz=5\text{mm}$
Phantom	ELLI
Device Position	Flat
Band	CW 835
Channels	Middle
Signal	Crest factor: 1.0

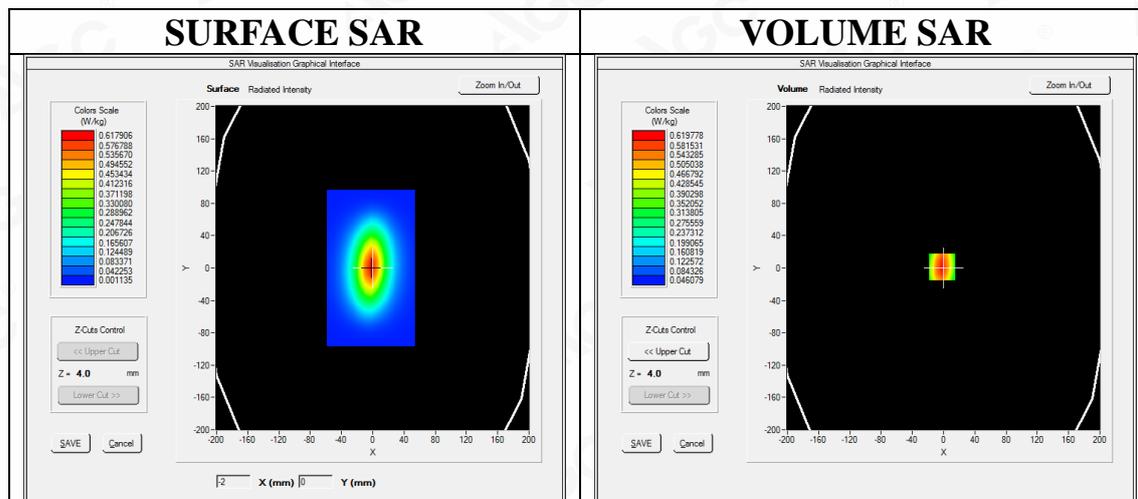

Maximum location: X=-2.00, Y=1.00
SAR Peak: 0.88 W/kg



SAR 10g (W/Kg)	0.374724
SAR 1g (W/Kg)	0.591783

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.8816	0.6172	0.4064	0.2691	0.1874	0.1215	0.0869

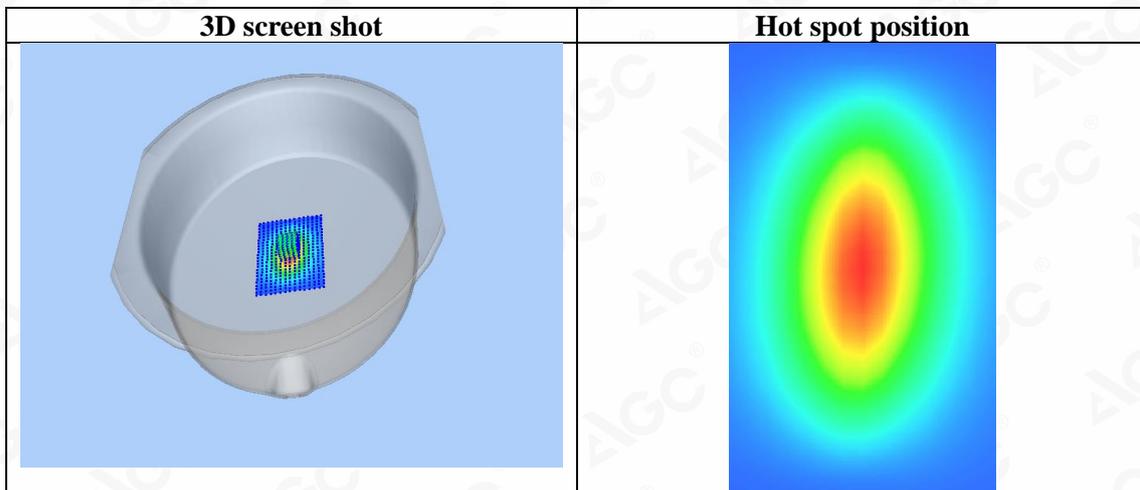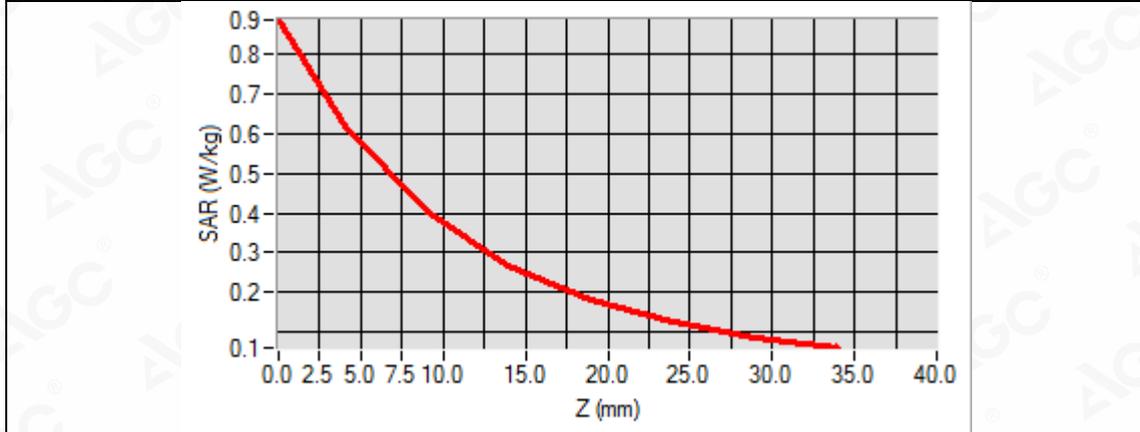

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 900 MHz
DUT: Dipole 900 MHz Type: SID 900

Date: Jul. 21,2020


Communication System: CW; Communication System Band: D900 (900.0 MHz); Duty Cycle: 1:1; Conv.F=5.16
Frequency: 900 MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.98$ mho/m; $\epsilon_r = 40.44$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 900 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 900
Channels	Middle
Signal	Crest factor: 1.0

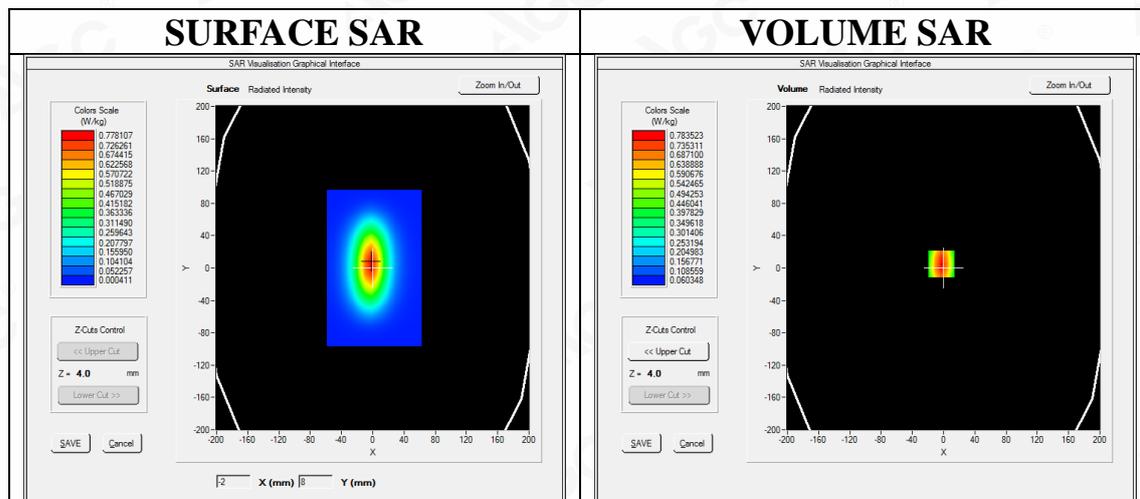



Maximum location: X=-3.00, Y=5.00
SAR Peak: 1.12 W/kg

SAR 10g (W/Kg)	0.476874
SAR 1g (W/Kg)	0.748412

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.1152	0.7921	0.5287	0.3511	0.2480	0.1769	0.1248

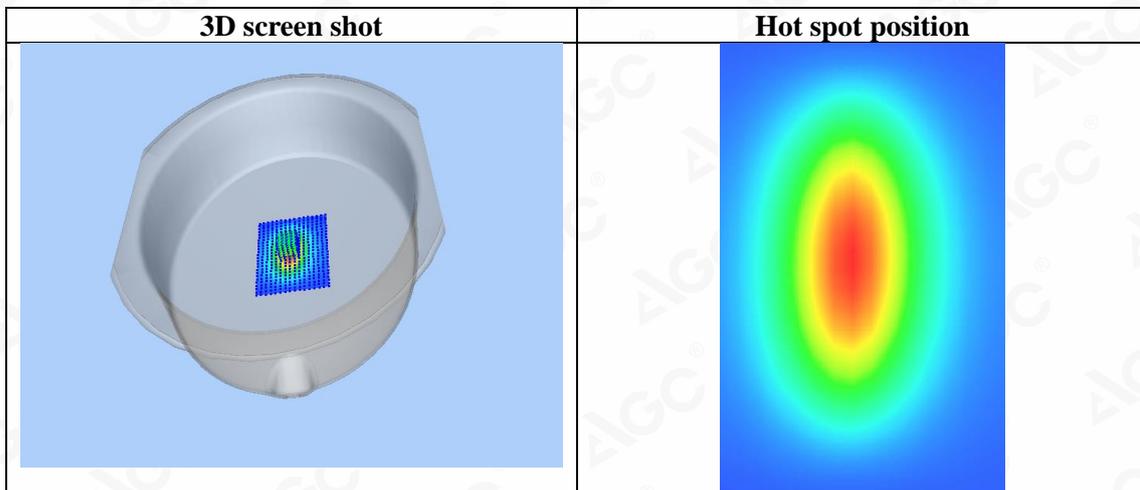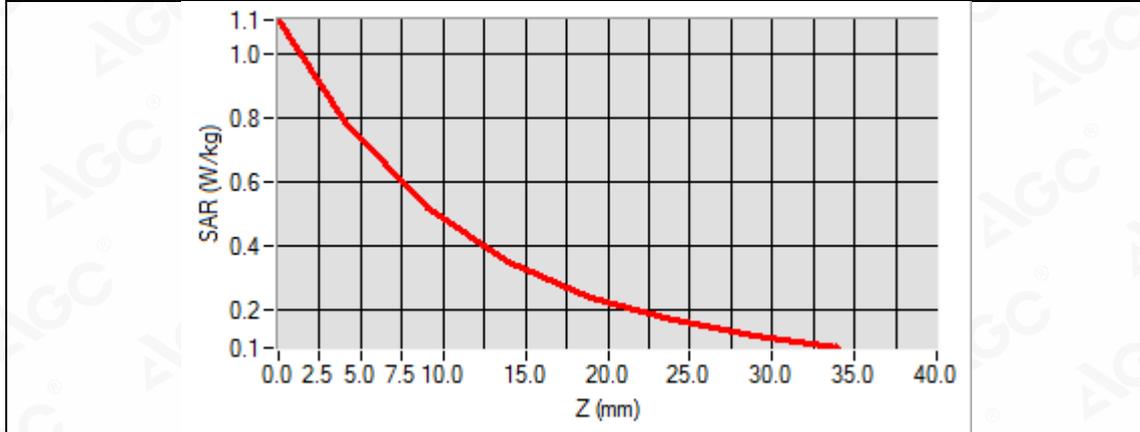

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 2450 MHz
DUT: Dipole 2450 MHz Type: SID 2450

Date: Jul. 22,2020

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.23
Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 22.6, Liquid temperature (°C): 22.3


SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2450 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450 MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 2450
Channels	Middle
Signal	Crest factor: 1.0

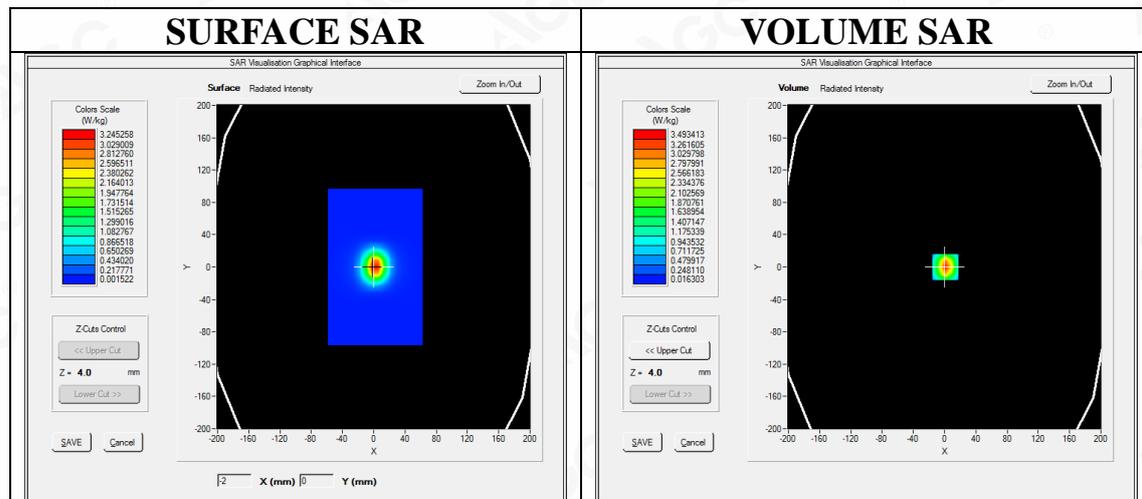



Maximum location: X=1.00, Y=0.00

SAR Peak: 6.01 W/kg

SAR 10g (W/Kg)	1.464937
SAR 1g (W/Kg)	3.251024

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



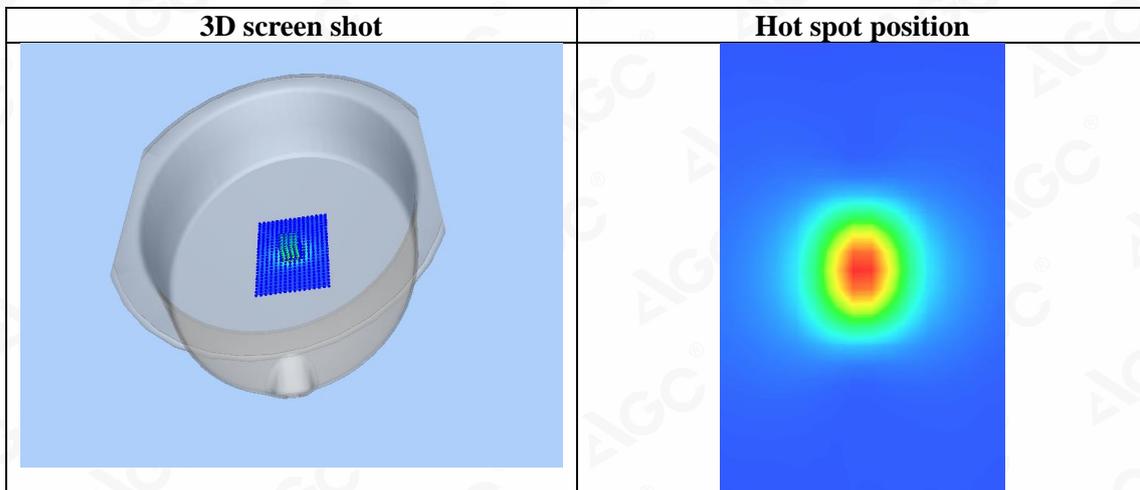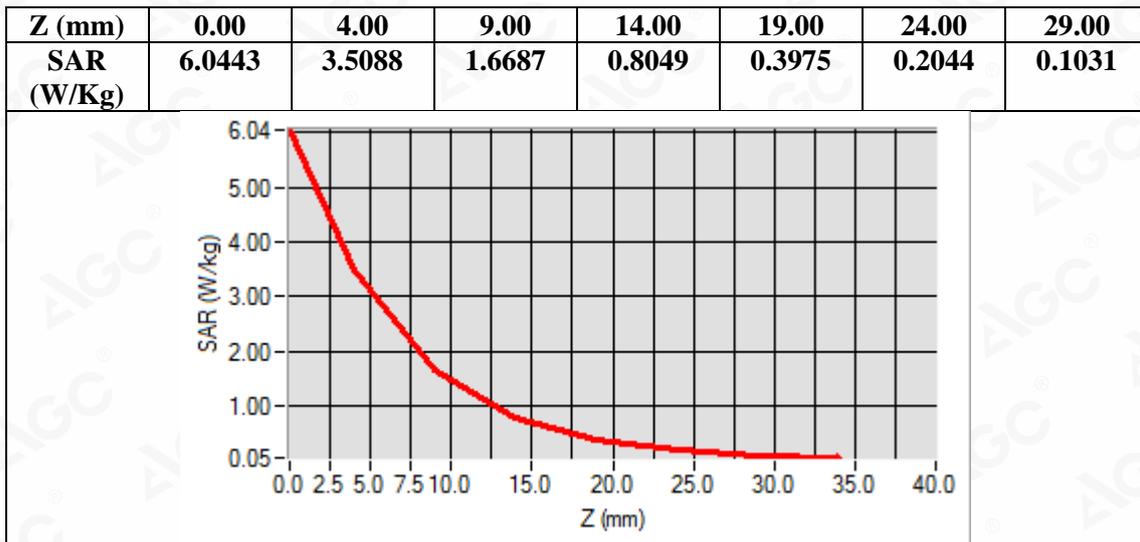

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
System Check Head 2600MHz
DUT: Dipole 2600 MHz; Type: SID 2600

Date: Jul. 25,2020


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=3.81
Frequency:2600 MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 2600
Channels	Middle
Signal	Crest factor: 1.0

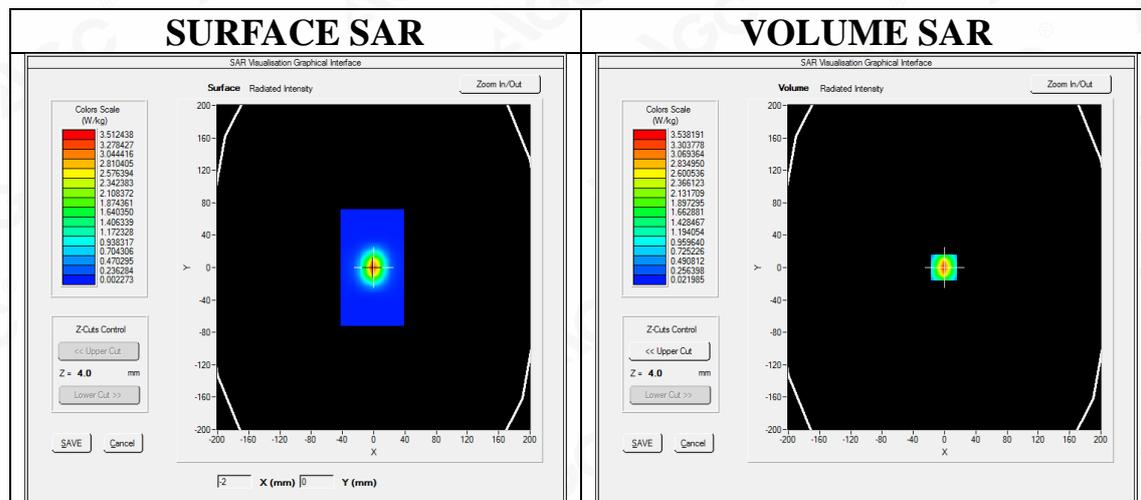



Maximum location: X=-1.00, Y=0.00
SAR Peak: 5.81 W/kg

SAR 10g (W/Kg)	1.482735
SAR 1g (W/Kg)	3.283872

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



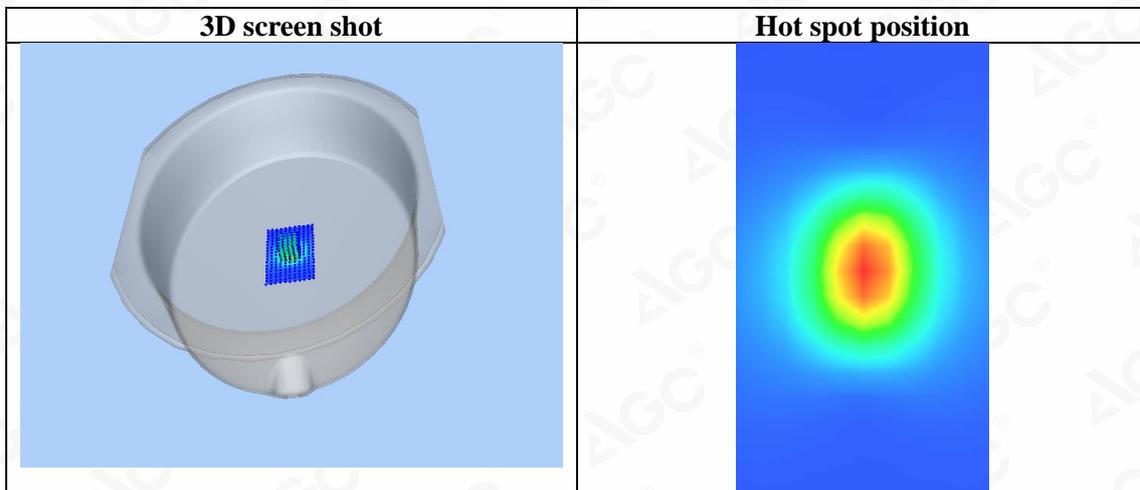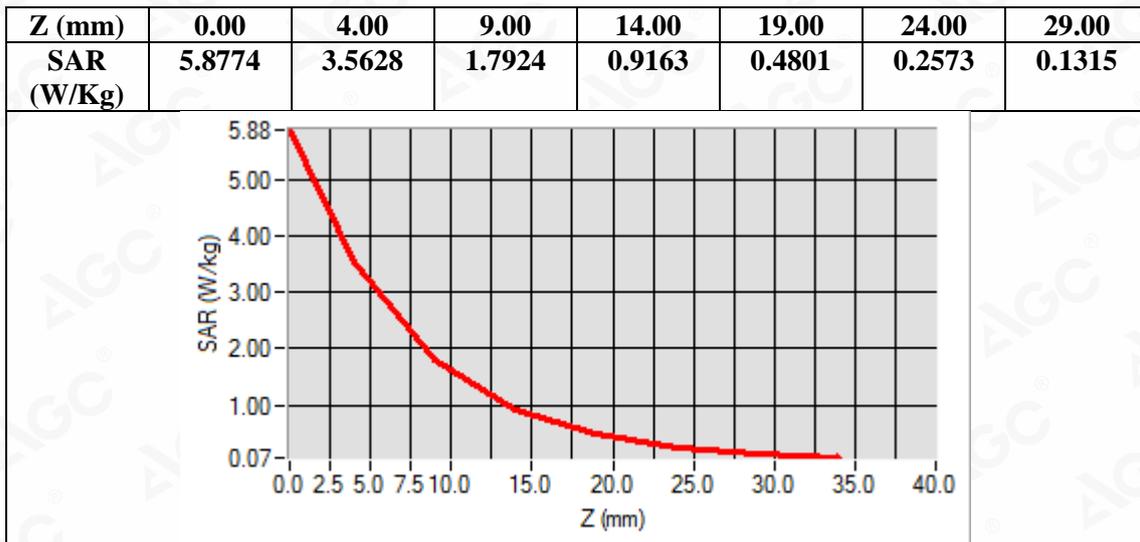

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab

Date: Jul. 31,2020

GSM 900 Low-Touch-Left <SIM 1>

DUT: Smart Phone; Type: NOTE 20 PRO

Communication System: Generic GSM; Communication System Band: GSM 900; Duty Cycle: 1: 8; Conv.F=5.16
Frequency: 880.2 MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336

Sensor-Surface: 4mm (Mechanical Surface Detection)


Phantom: SAM twin phantom

Measurement SW: OpenSAR V4_02_35

Configuration/GSM 900 Low- Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/GSM 900 Low- Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	GSM 900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

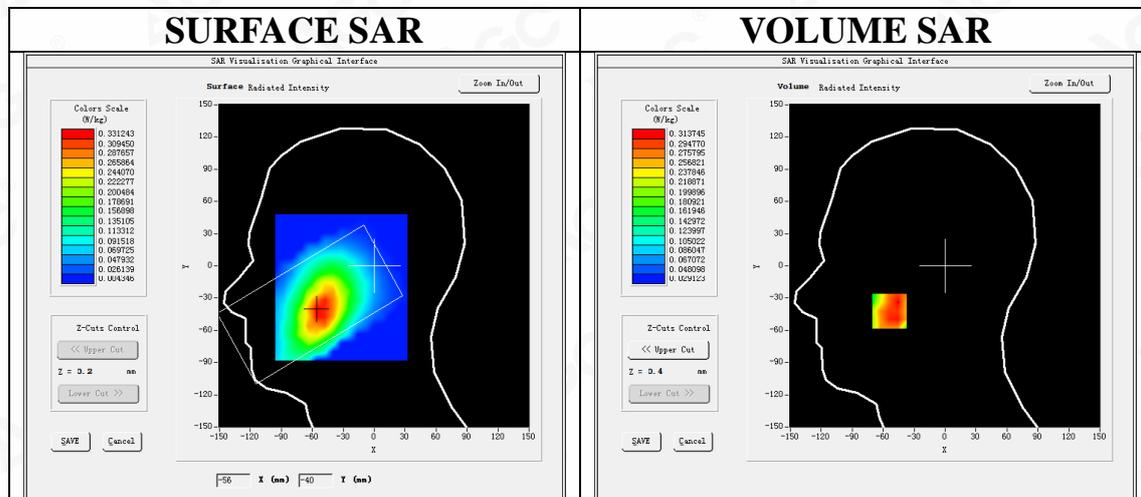

Maximum location: X=-54.00, Y=-42.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.215203
SAR 1g (W/Kg)	0.300629



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



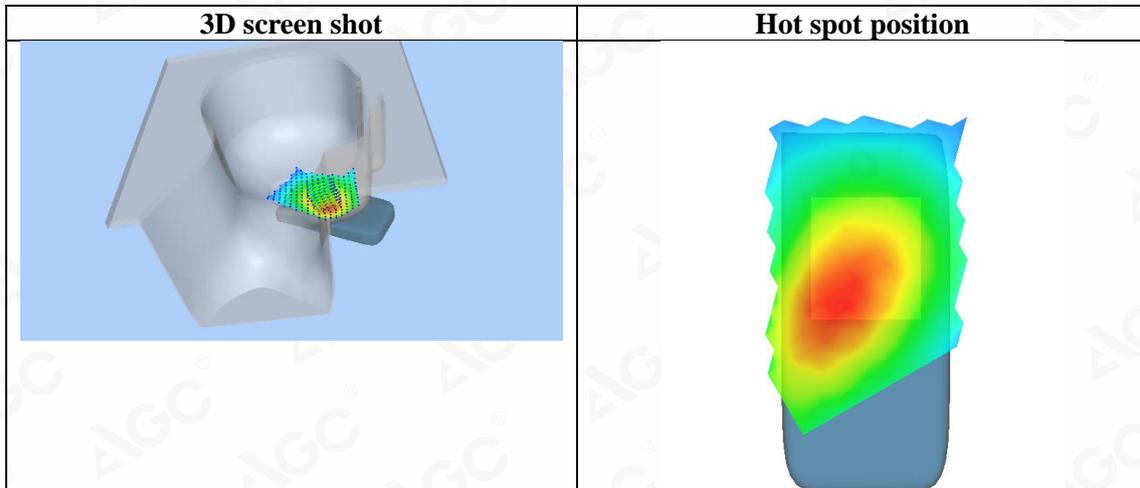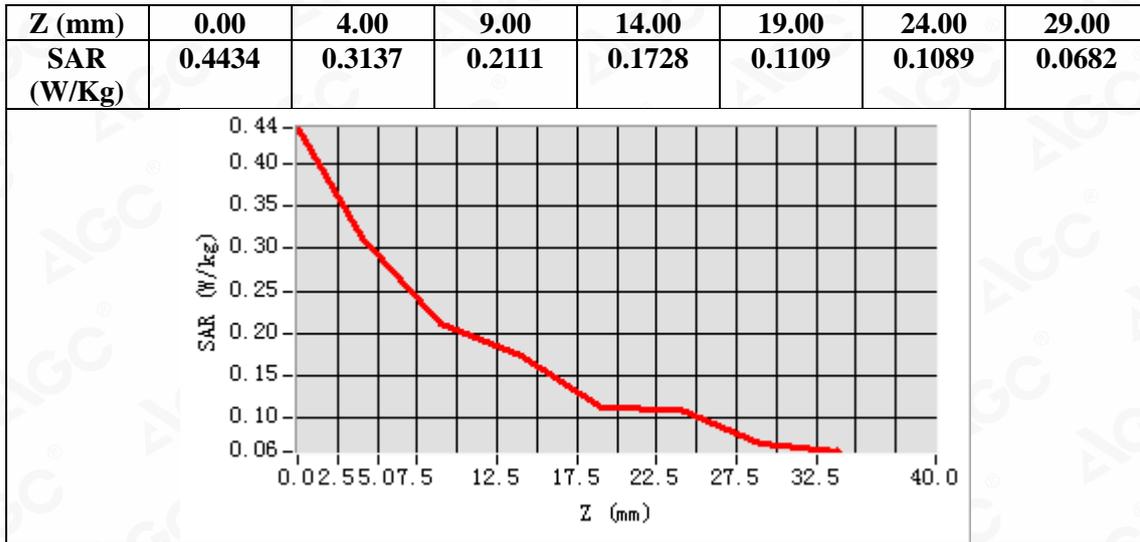

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
GPRS 900 Low-Body- Worn- Back (4up) <SIM 1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: GPRS-4 Slot; Communication System Band: GSM 900;Duty Cycle:1:2.1 ; Conv.F=5.16
Frequency: 880.2MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r = 40.18$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 900 Low- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 900 Low- Body- Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	GSM 900
Channels	Low
Signal	TDMA (Crest factor: 2.0)

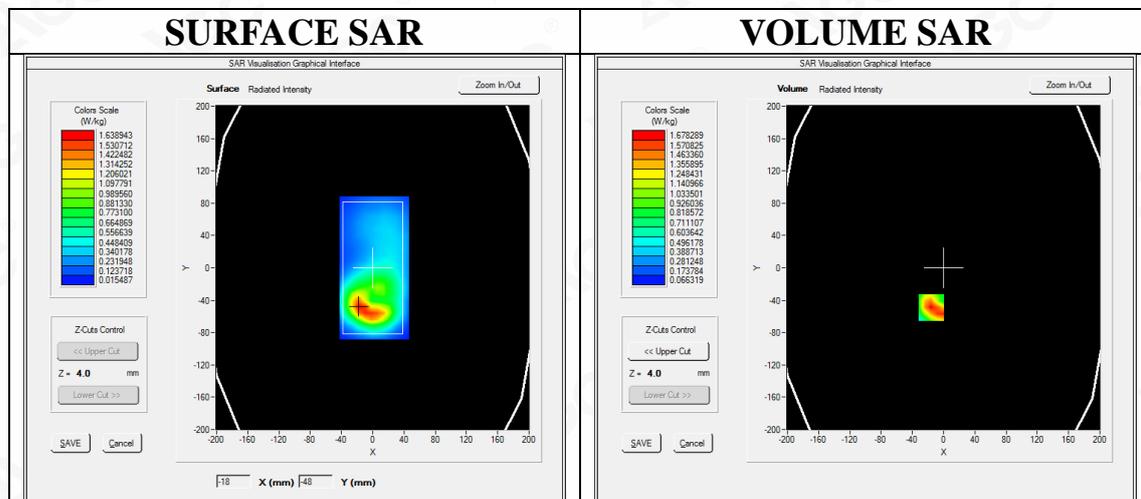

Maximum location: X=-16.00, Y=-49.00

SAR Peak: 2.59 W/kg



SAR 10g (W/Kg)	0.901321
SAR 1g (W/Kg)	1.583455

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.5993	1.6783	0.9507	0.5885	0.3526	0.2225	0.1519

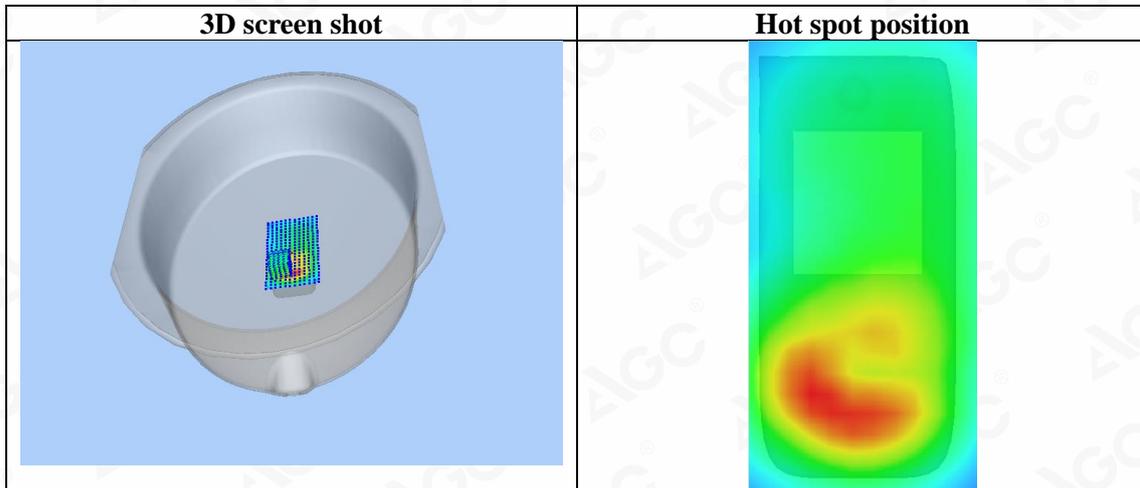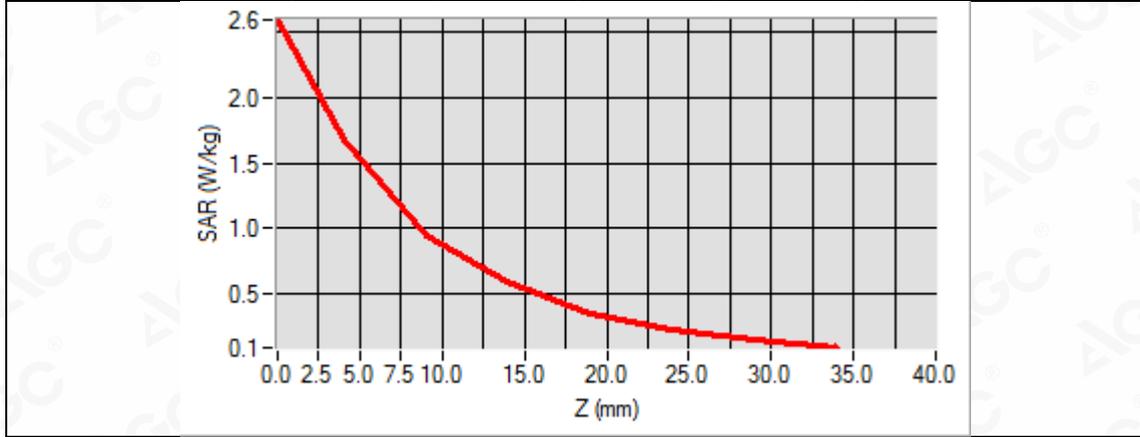

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
GPRS 900 Low- Hotspot - Back (4up) <SIM 1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: GPRS-4 Slot; Communication System Band: GSM 900;Duty Cycle:1:2.1 ; Conv.F=5.16
Frequency: 880.2MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r = 40.18$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 900 Low- Hotspot - Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 900 Low- Hotspot - Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	GSM 900
Channels	Low
Signal	TDMA (Crest factor: 2.0)

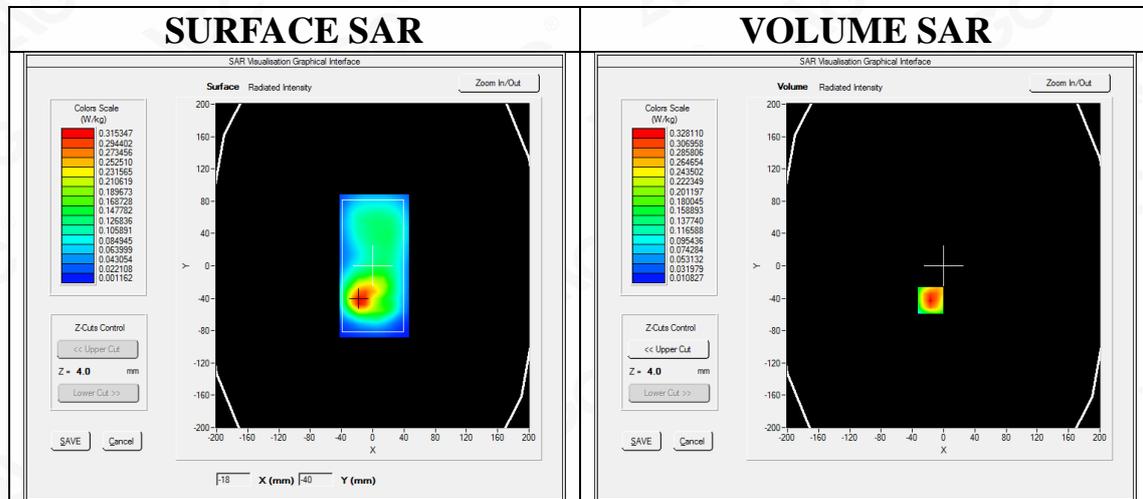

Maximum location: X=-17.00, Y=-43.00



SAR Peak: 0.46 W/kg

SAR 10g (W/Kg)	0.495485
SAR 1g (W/Kg)	0.737099

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



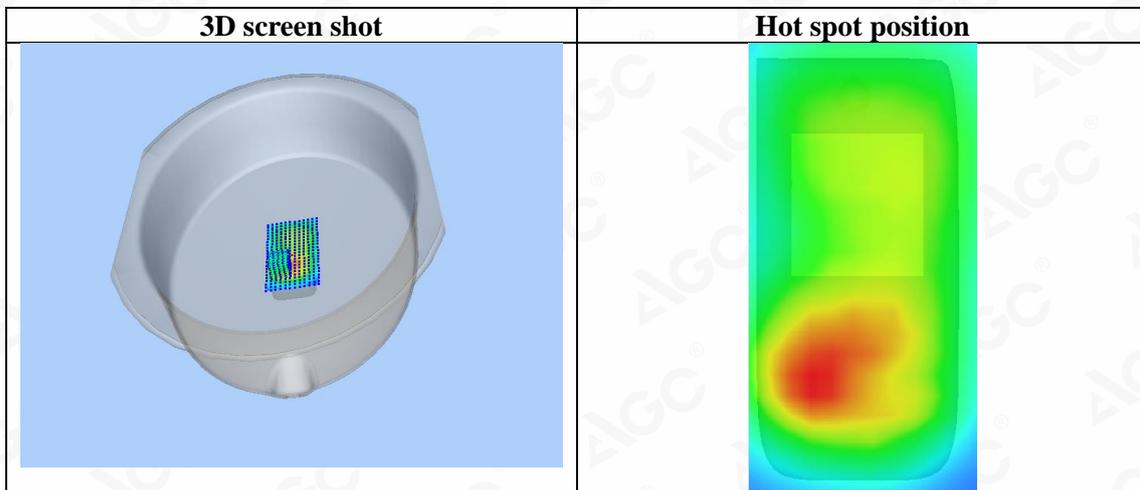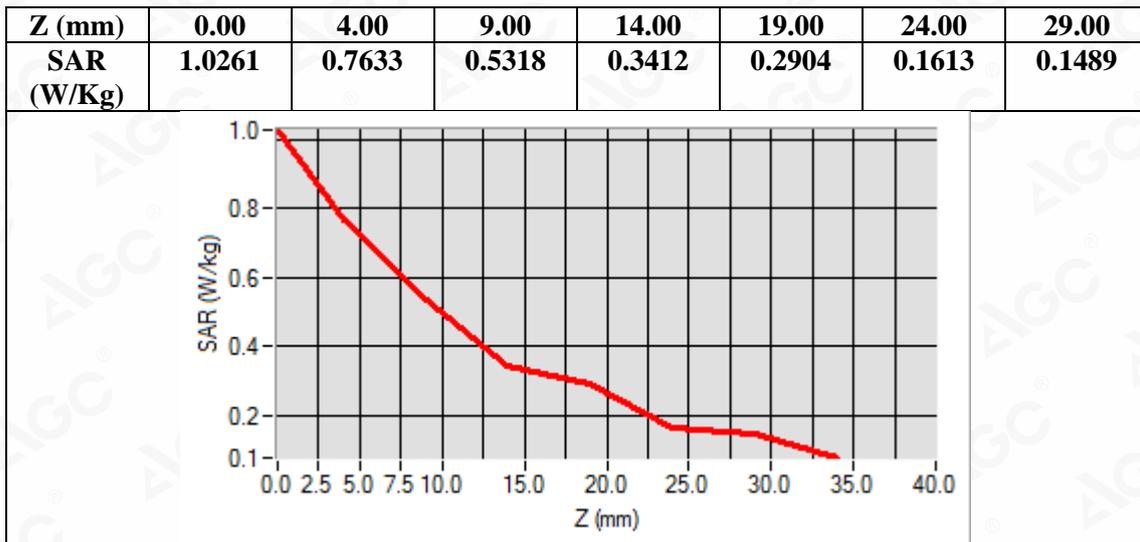

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Test Laboratory: AGC Lab
GPRS 900 Low -Limbs- Back (4up) <SIM 1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: GPRS-4 Slot; Communication System Band: GSM 900;Duty Cycle:1:2.1 ; Conv.F=5.16
Frequency: 880.2 MHz; Medium parameters used: f = 900 MHz; $\sigma=0.96$ mho/m; $\epsilon_r=40.18$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 900 Low - Limbs - Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 900 Low - Limbs - Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	GSM 900
Channels	Low
Signal	TDMA (Crest factor: 2.0)

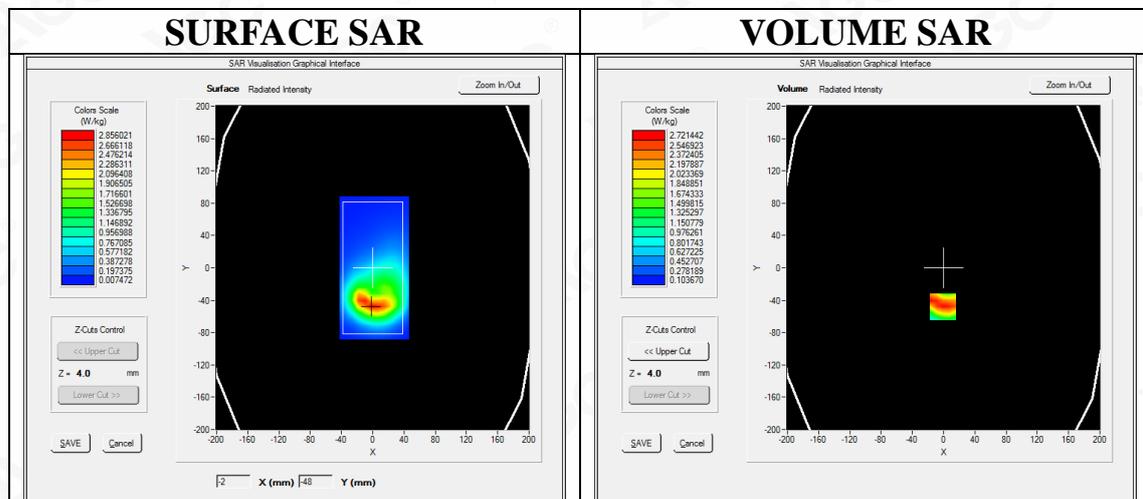

Maximum location: X=-1.00, Y=-48.00

SAR Peak: 4.41 W/kg



SAR 10g (W/Kg)	1.564967
SAR 1g (W/Kg)	2.589483

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.7185	2.7214	1.3471	0.8680	0.6265	0.3086	0.2932

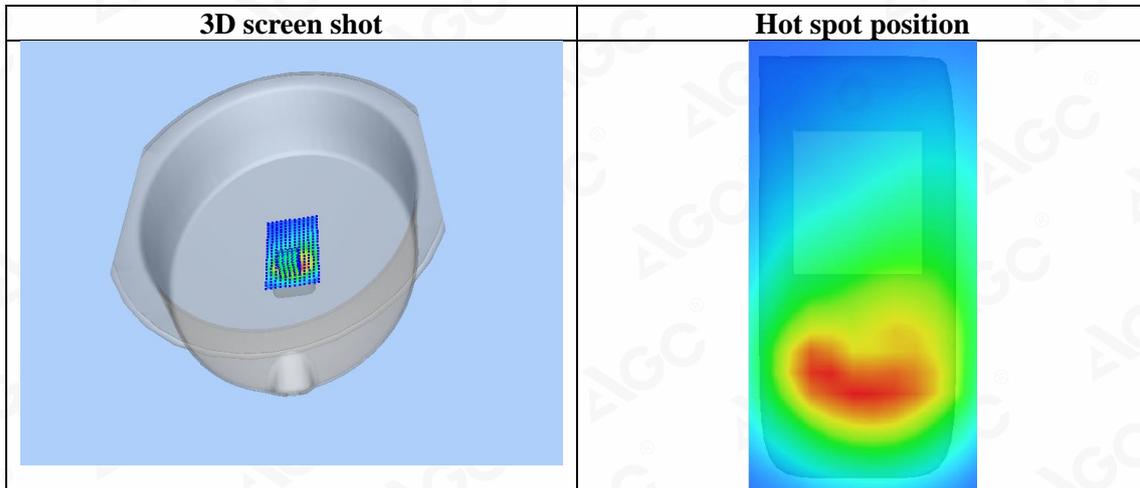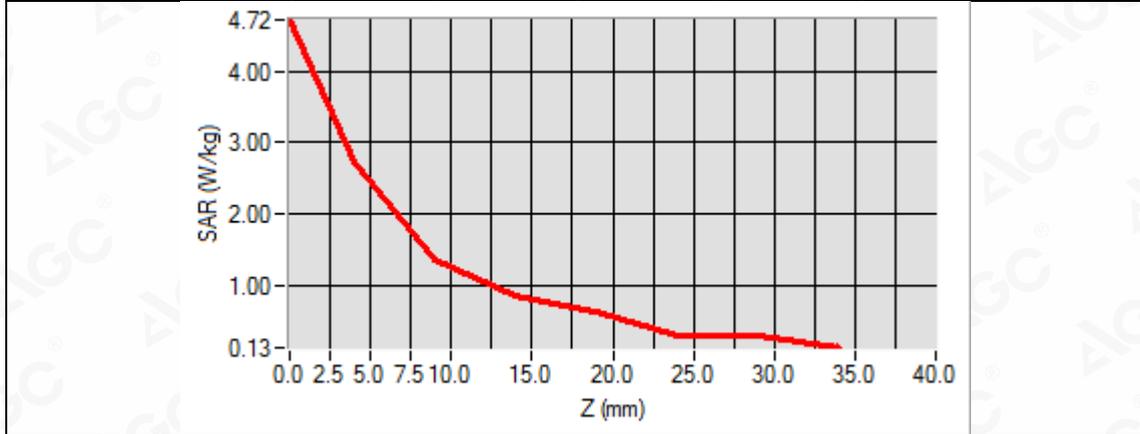

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
DCS 1800 Low-Touch-Left <SIM1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: Generic GSM; Communication System Band: DCS 1800; Duty Cycle: 1:8; Conv.F=4.48
Frequency: 1710.2 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/DCS1800 Low- Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/DCS1800 Low- Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	DCS 1800
Channels	Low
Signal	TDMA (Crest factor: 8.0)


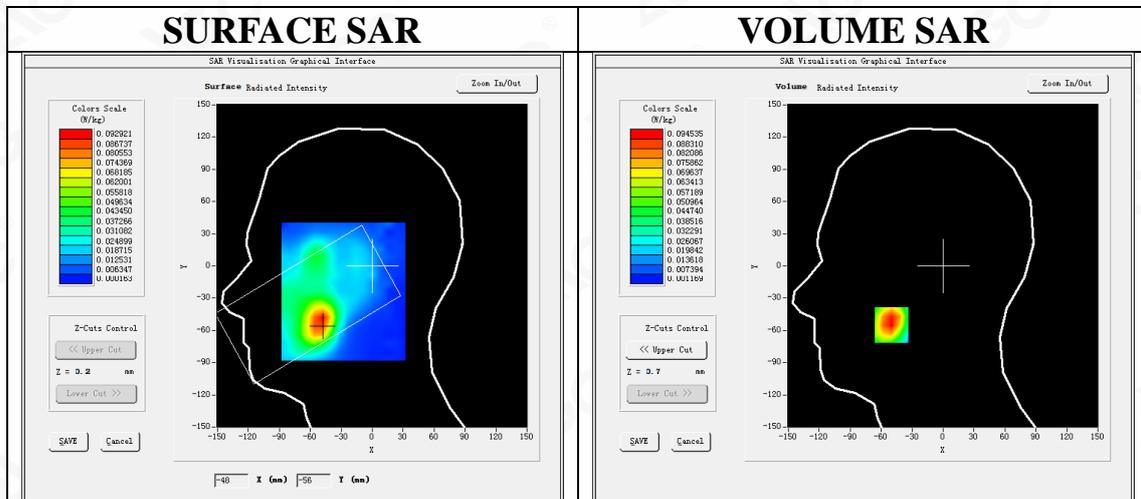


Maximum location: X=-50.00, Y=-55.00
SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.052137
SAR 1g (W/Kg)	0.091054

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



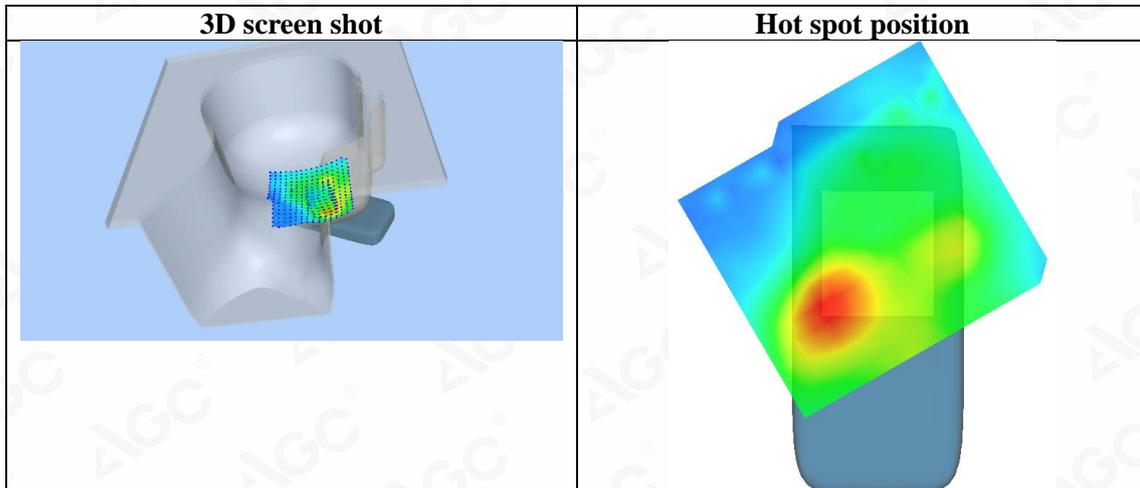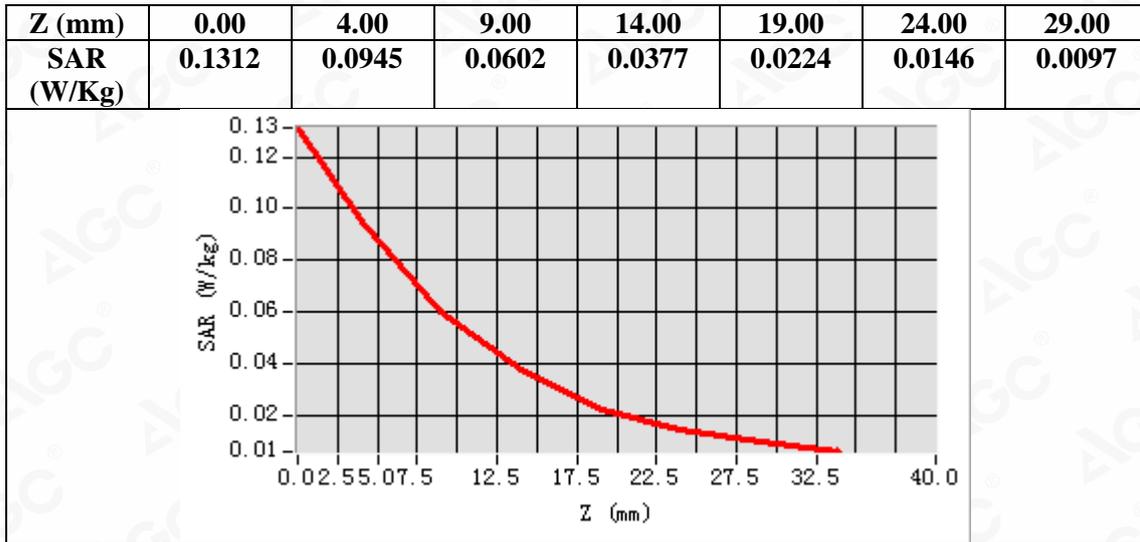

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
DCS 1800 High-Touch-Left <SIM1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: Generic GSM; Communication System Band: DCS 1800; Duty Cycle: 1:8; Conv.F=4.48
Frequency: 1784.8 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/DCS1800 High- Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/DCS1800 High- Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	DCS 1800
Channels	High
Signal	TDMA (Crest factor: 8.0)


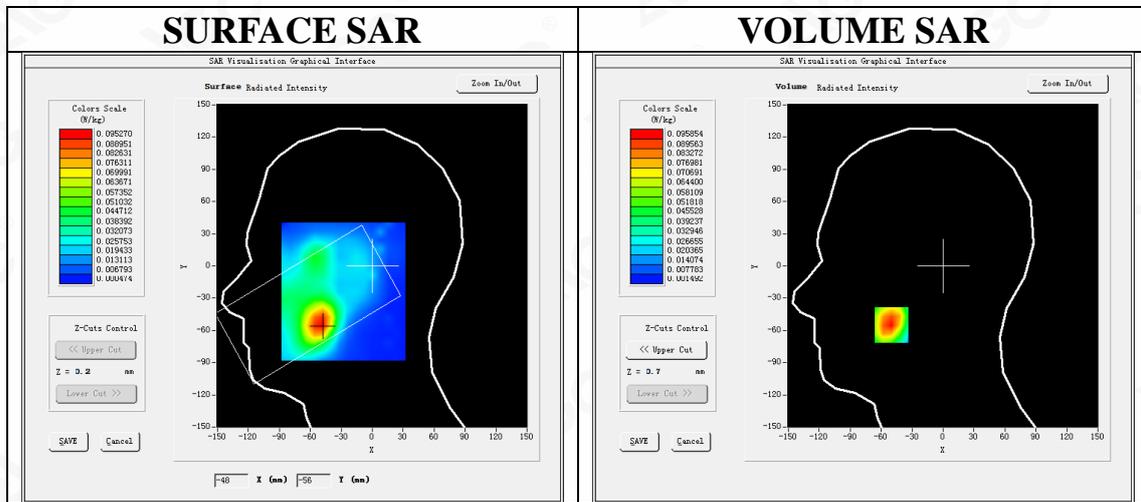


Maximum location: X=-50.00, Y=-55.00
SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.053692
SAR 1g (W/Kg)	0.091862

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



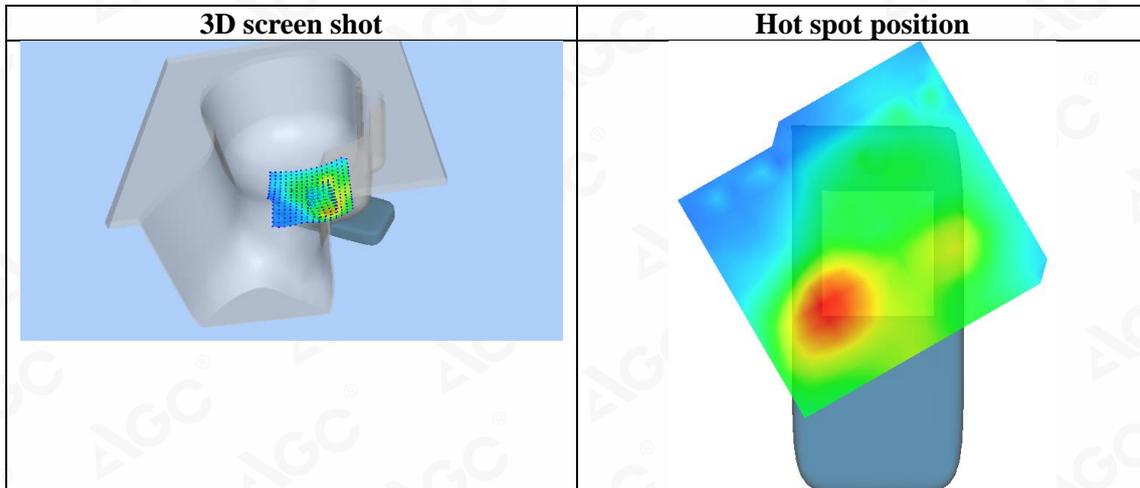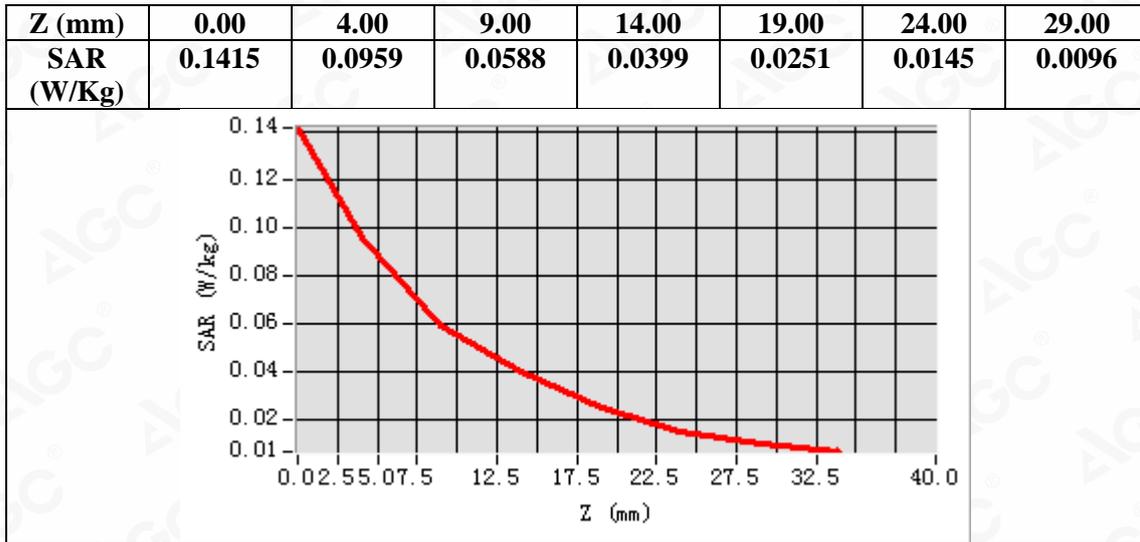

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
GPRS 1800 Mid-Body- Worn- Front (4up) <SIM1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: GPRS-4 Slot; Communication System Band: DCS1800; Duty Cycle: 1:2.1; Conv.F=4.48
Frequency: 1747.4 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 1800 Mid- Body- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 1800 Mid- Body- Front /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	DCS 1800
Channels	Middle
Signal	TDMA (Crest factor: 2.0)

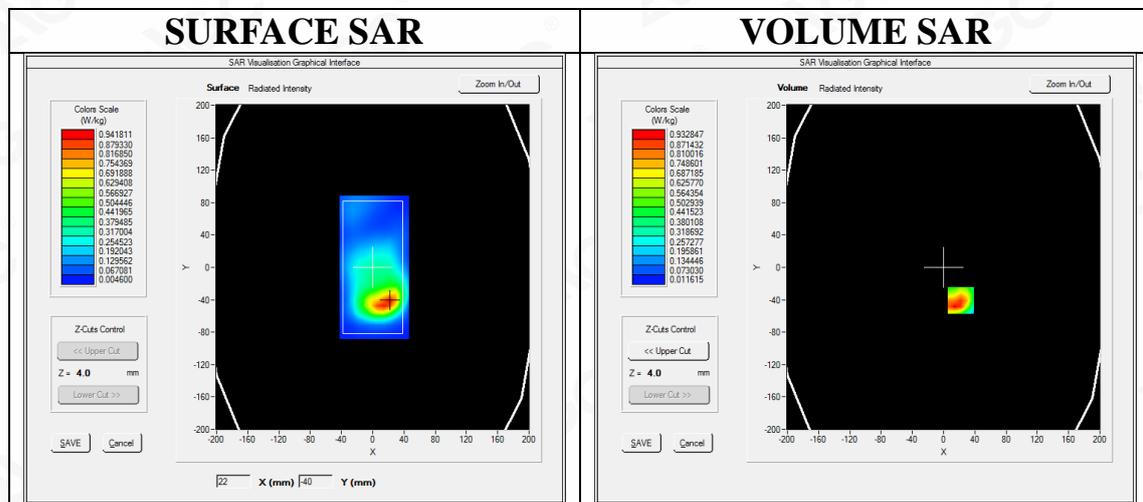

Maximum location: X=22.00, Y=-41.00

SAR Peak: 1.50 W/kg



SAR 10g (W/Kg)	0.508086
SAR 1g (W/Kg)	0.897132

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.6467	0.9328	0.4419	0.3240	0.1735	0.1083	0.0634

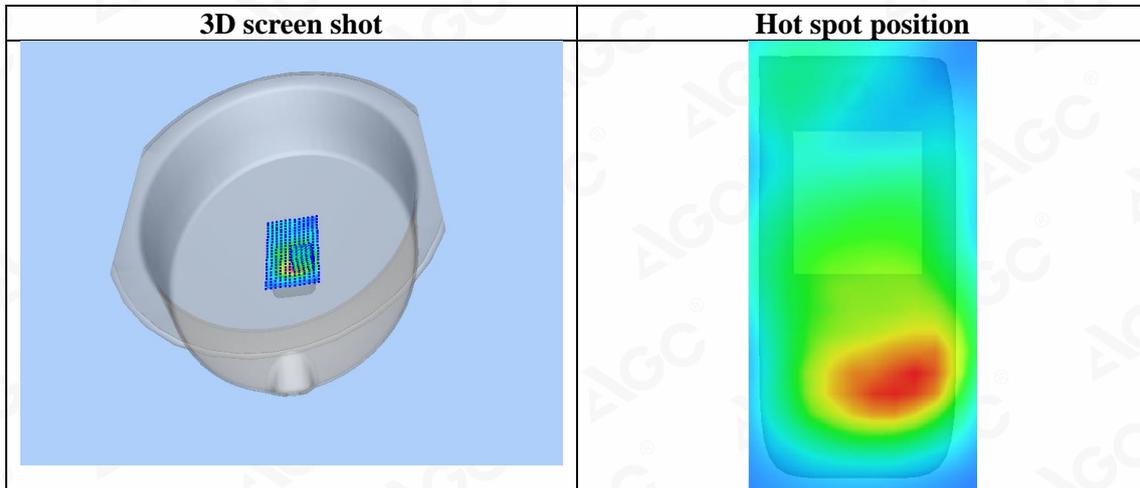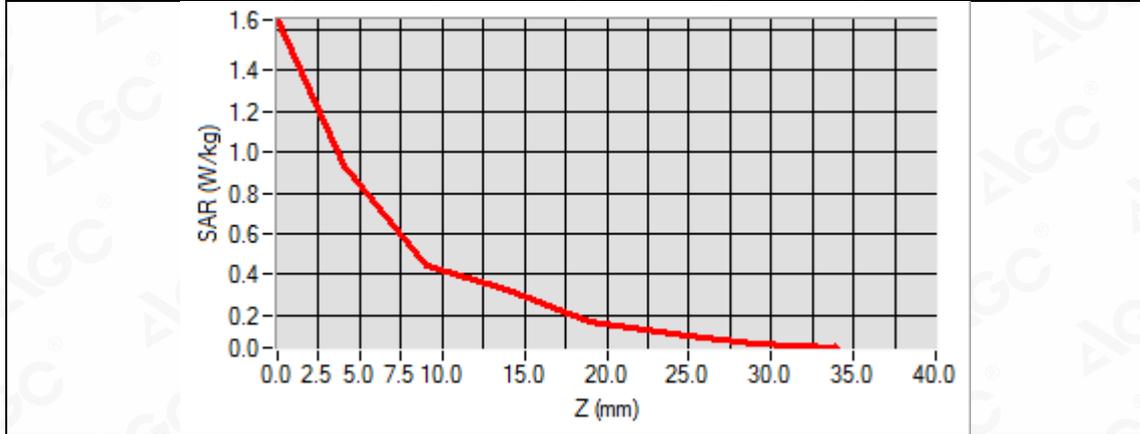

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
GPRS 1800 Low-Hotspot- Back(4up) <SIM1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: GPRS-4 Slot; Communication System Band: DCS1800; Duty Cycle: 1:2.1; Conv.F=4.48
Frequency: 1710.2 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 1800 Low-Hotspot- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 1800 Low-Hotspot- Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	DCS 1800
Channels	Low
Signal	TDMA (Crest factor: 2.0)

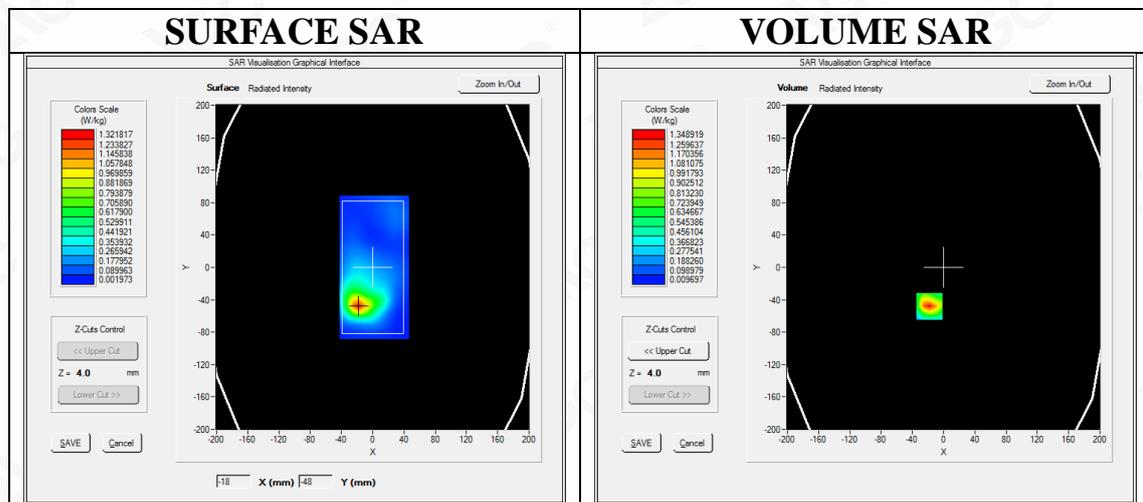



Maximum location: X=-18.00, Y=-48.00
SAR Peak: 2.21 W/kg

SAR 10g (W/Kg)	0.161871
SAR 1g (W/Kg)	0.344896

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



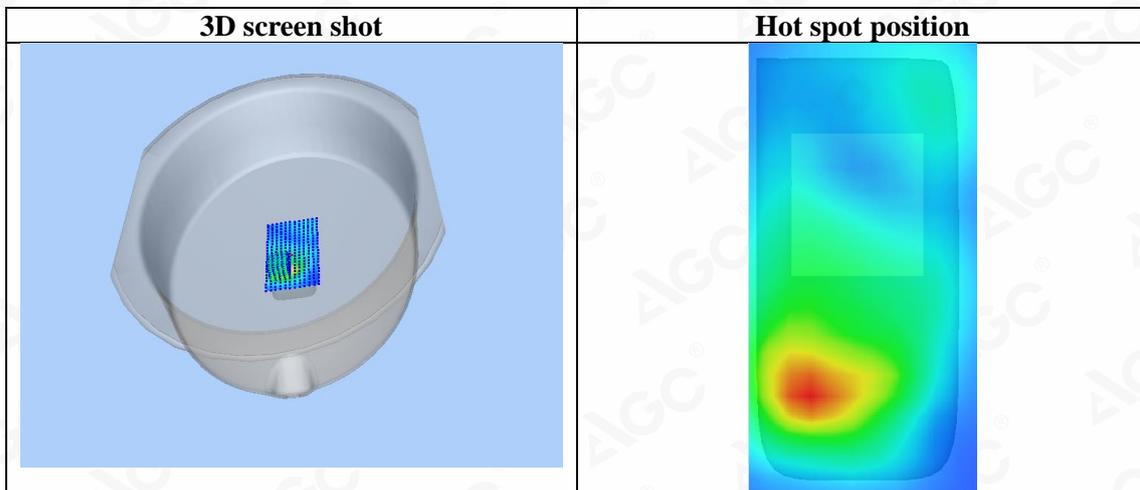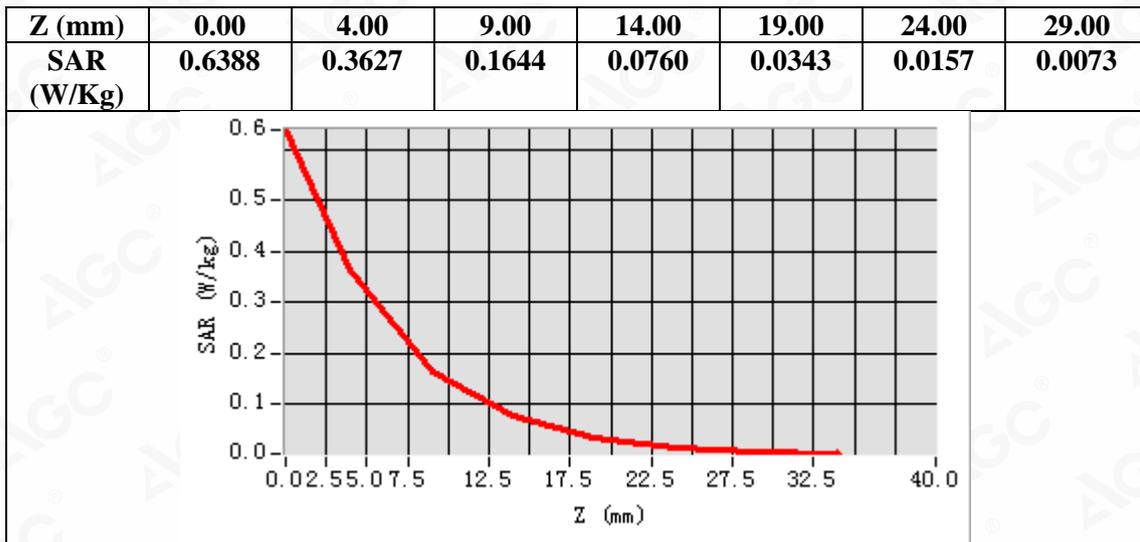

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
GPRS 1800 Mid-Limbs- Edge 3 (4up) <SIM1>
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: GPRS-4 Slot; Communication System Band: DCS1800; Duty Cycle: 1:2.1; Conv.F=4.48
Frequency: 1747.4 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.7, Liquid temperature (°C): 21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 1800 Mid- Limbs - Edge 3 /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 1800 Mid- Limbs - Edge 3 /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Edge 3
Band	DCS 1800
Channels	Middle
Signal	TDMA (Crest factor: 2.0)

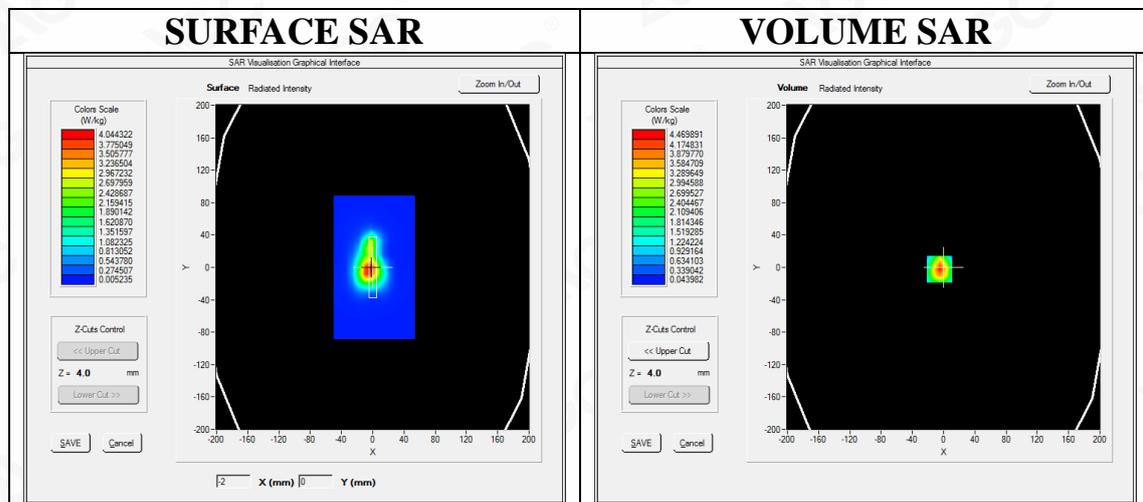

Maximum location: X=-5.00, Y=-2.00
SAR Peak: 7.19 W/kg



SAR 10g (W/Kg)	2.140947
SAR 1g (W/Kg)	4.176382

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	7.3006	4.4699	2.4356	1.5077	0.9684	0.6228	0.3776

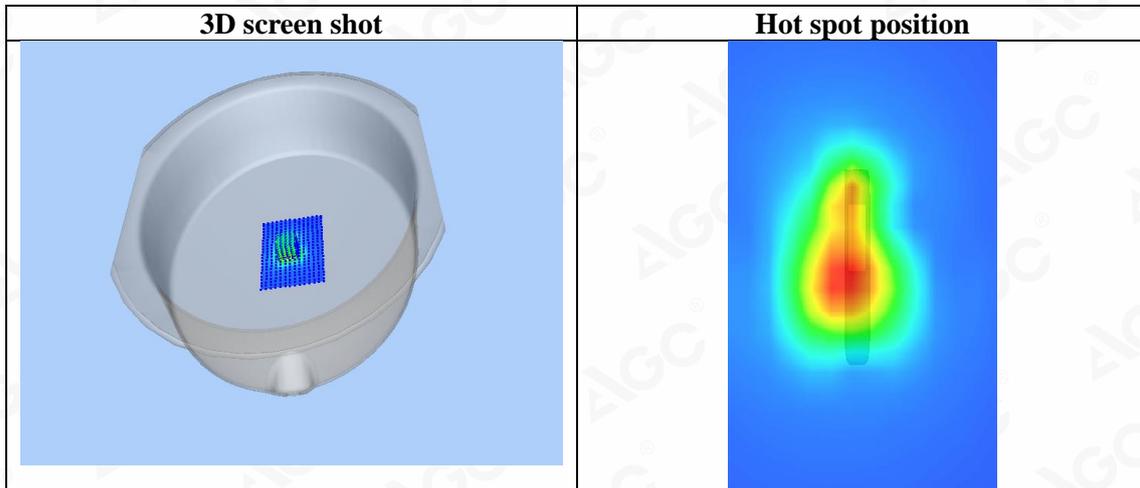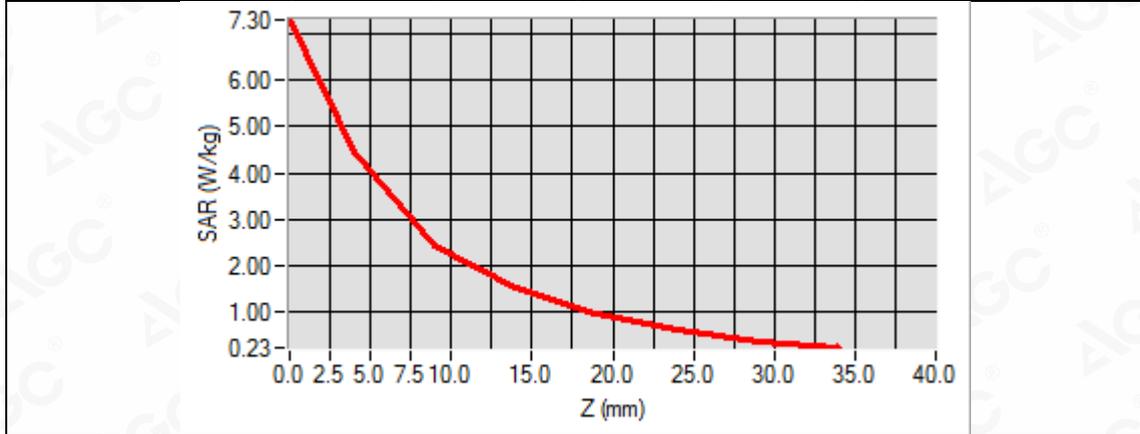

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Low-Touch-Right (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1922.4MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band I Low-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA Band I Low-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band I
Channels	Low
Signal	CDMA (Crest factor: 1.0)

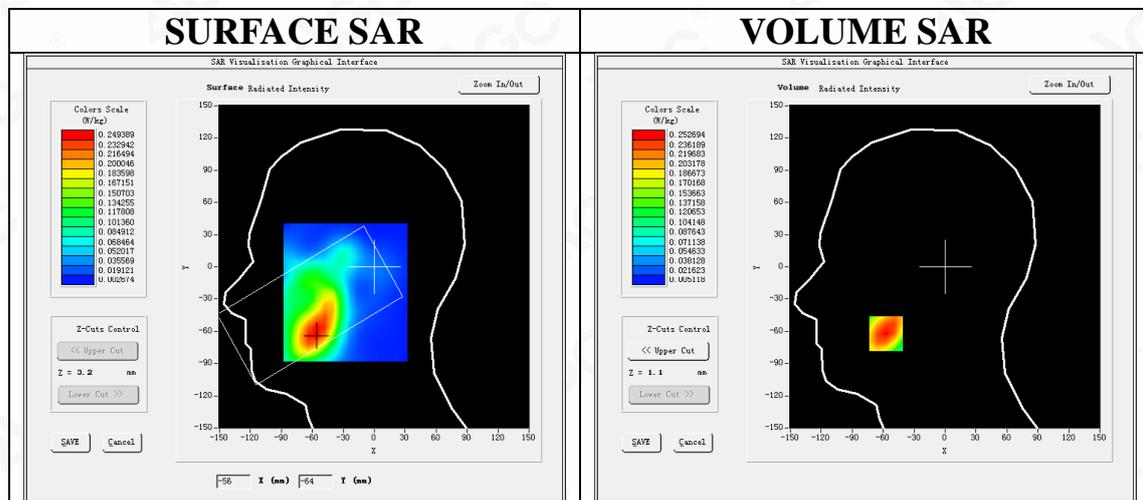

Maximum location: X=-57.00, Y=-62.00
SAR Peak: 0.39 W/kg



SAR 10g (W/Kg)	0.139255
SAR 1g (W/Kg)	0.243562

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3949	0.2527	0.1426	0.0859	0.0514	0.0310	0.0190

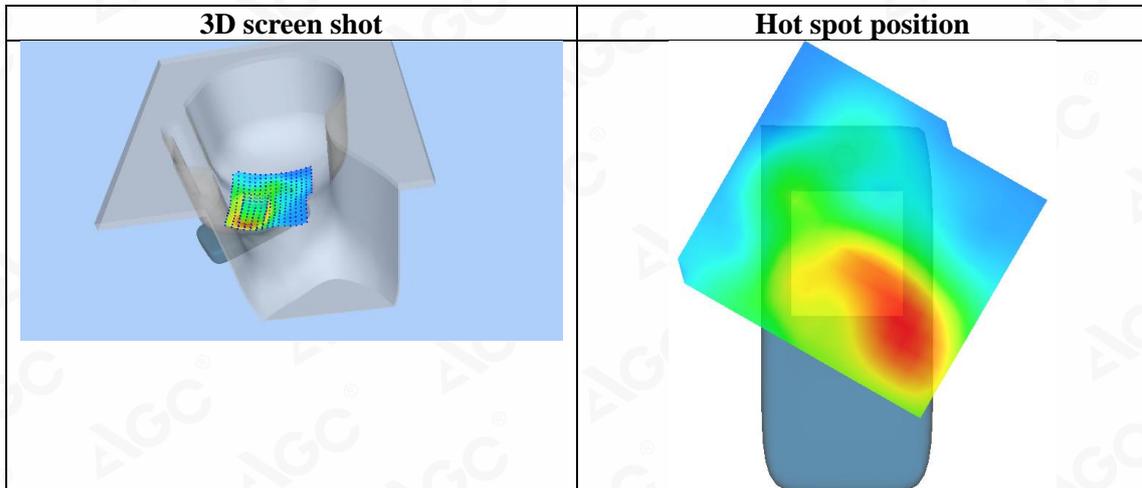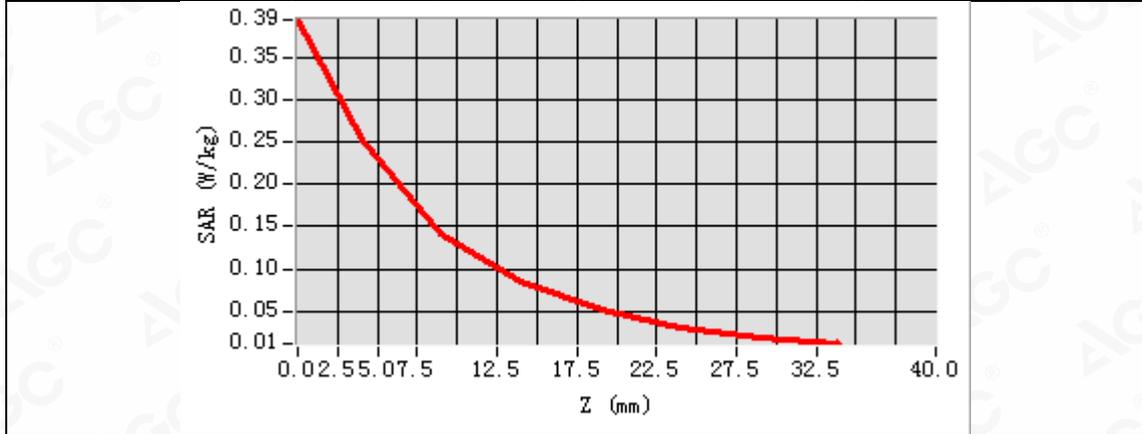

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Mid-Touch-Right (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1950MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band I Mid-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA Band I Mid-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA Band I
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

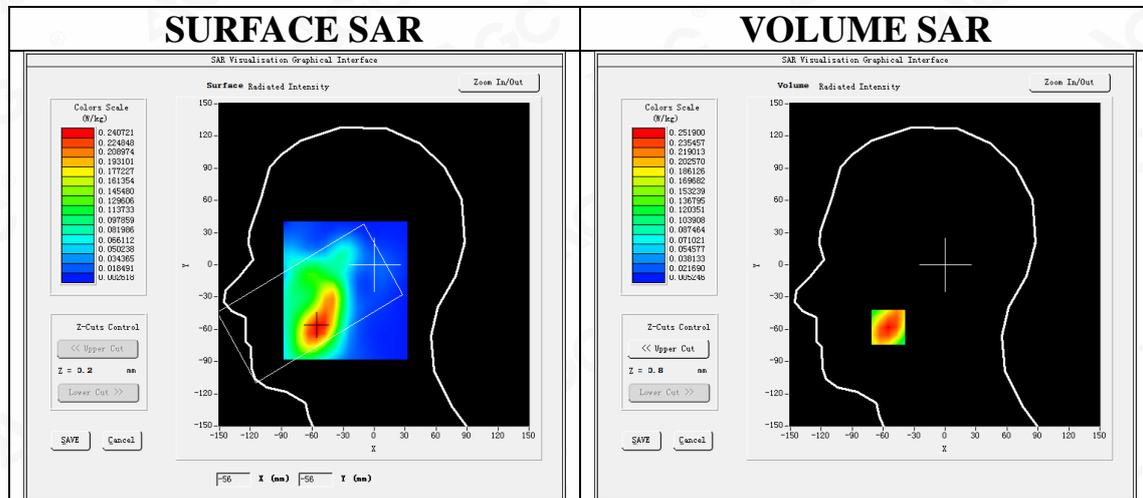

Maximum location: X=-55.00, Y=-58.00
SAR Peak: 0.37 W/kg



SAR 10g (W/Kg)	0.139709
SAR 1g (W/Kg)	0.239951

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3674	0.2519	0.1532	0.0916	0.0546	0.0326	0.0199

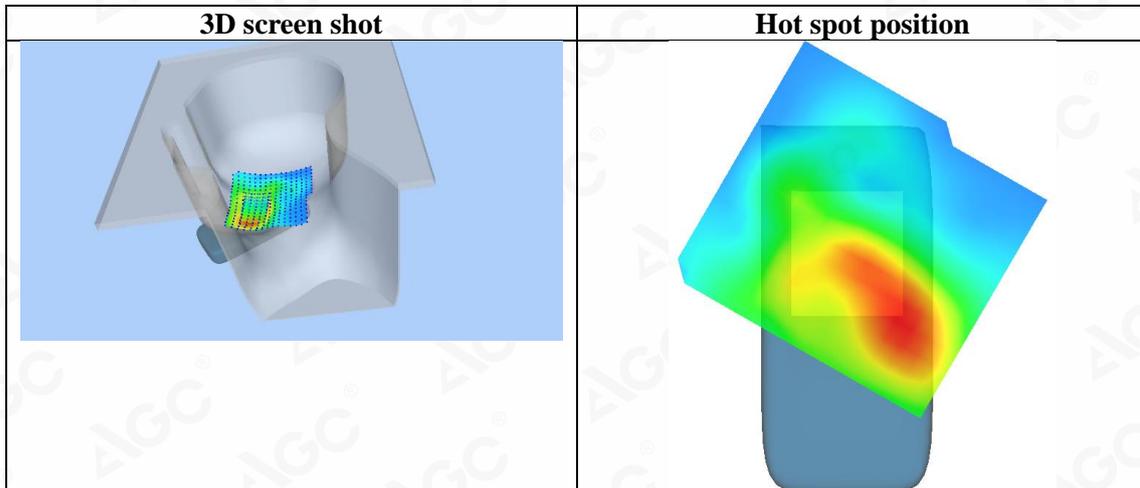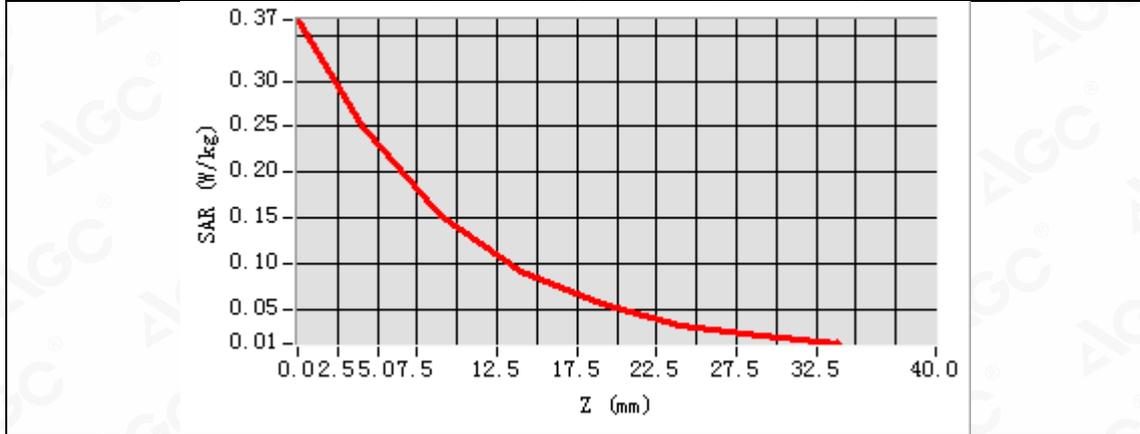

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Low-Body-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1922.4MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I Low-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/WCDMA BAND I Low-Body-Back//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	WCDMA Band I
Channels	Low
Signal	CDMA (Crest factor: 1.0)

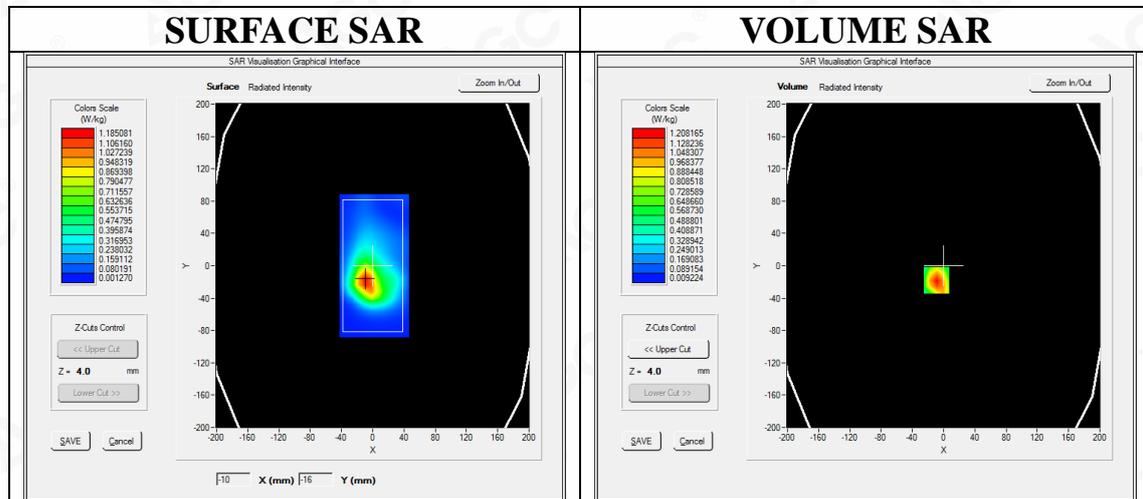

Maximum location: X=-9.00, Y=-18.00



SAR Peak: 1.97 W/kg

SAR 10g (W/Kg)	0.605131
SAR 1g (W/Kg)	1.154038

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.9506	1.2082	0.6370	0.3412	0.1801	0.0948	0.0503

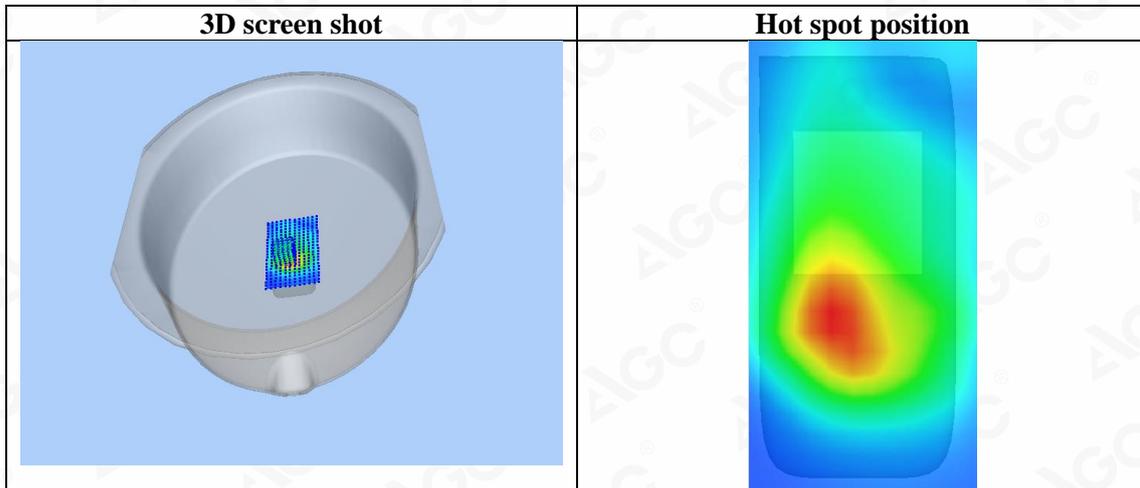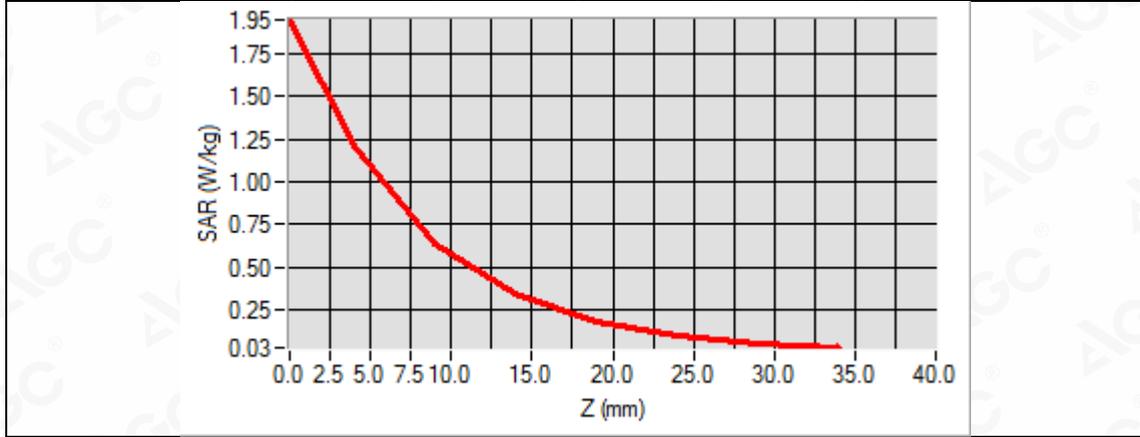

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Mid-Body-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1950MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/WCDMA BAND I Mid-Body-Back//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	WCDMA Band I
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

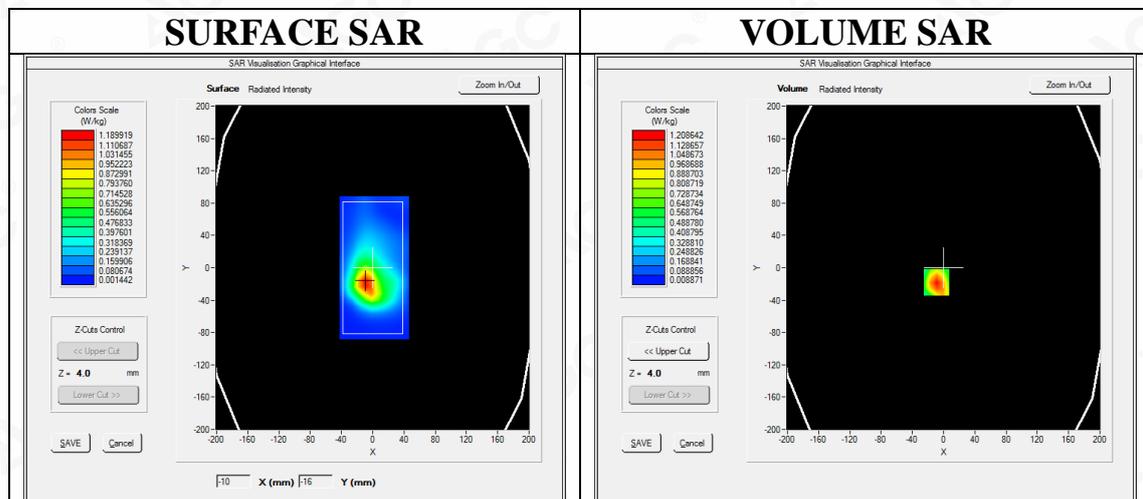

Maximum location: X=-9.00, Y=-18.00

SAR Peak: 1.98 W/kg



SAR 10g (W/Kg)	0.606495
SAR 1g (W/Kg)	1.155640

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.9537	1.2086	0.6365	0.3385	0.1792	0.0944	0.0497

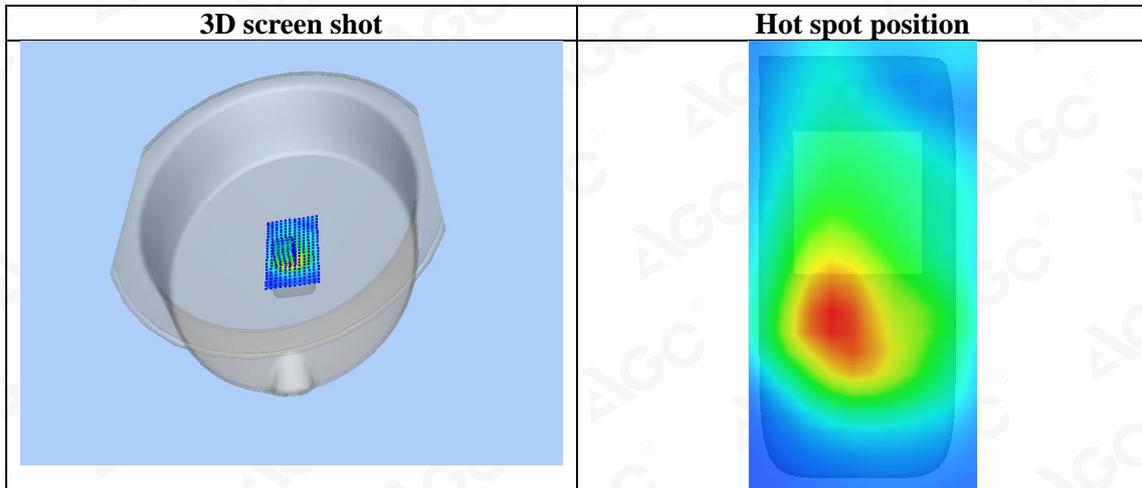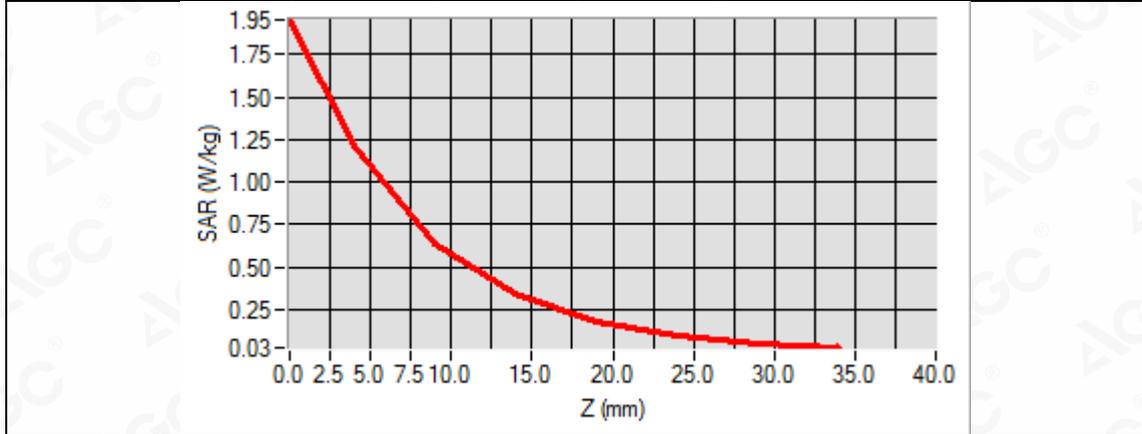

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Low- Hotspot -Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1922.4MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I Low- Hotspot -Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/WCDMA BAND I Low- Hotspot -Back//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	WCDMA Band I
Channels	Low
Signal	CDMA (Crest factor: 1.0)

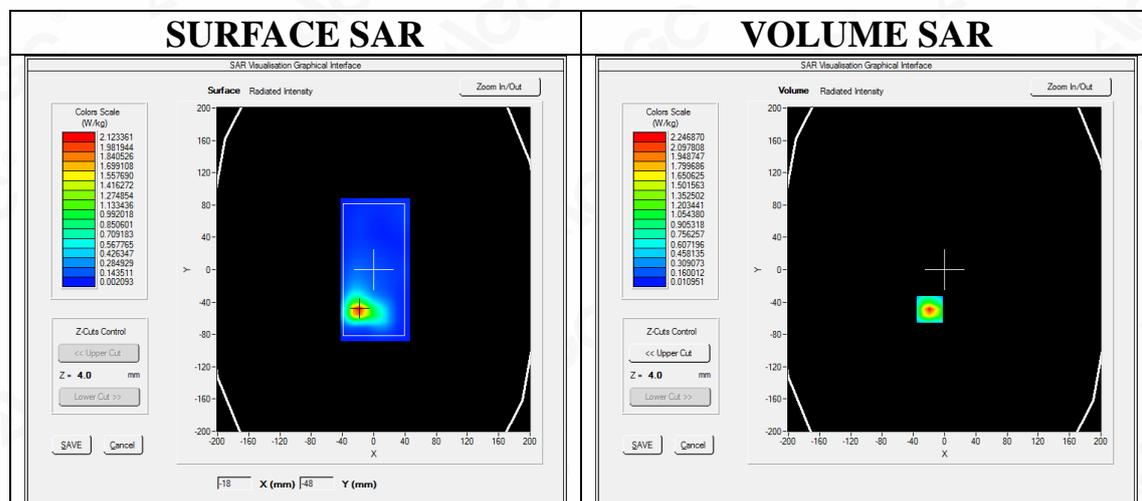



Maximum location: X=-19.00, Y=-49.00
SAR Peak: 3.98 W/kg

SAR 10g (W/Kg)	0.389481
SAR 1g (W/Kg)	0.583905

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



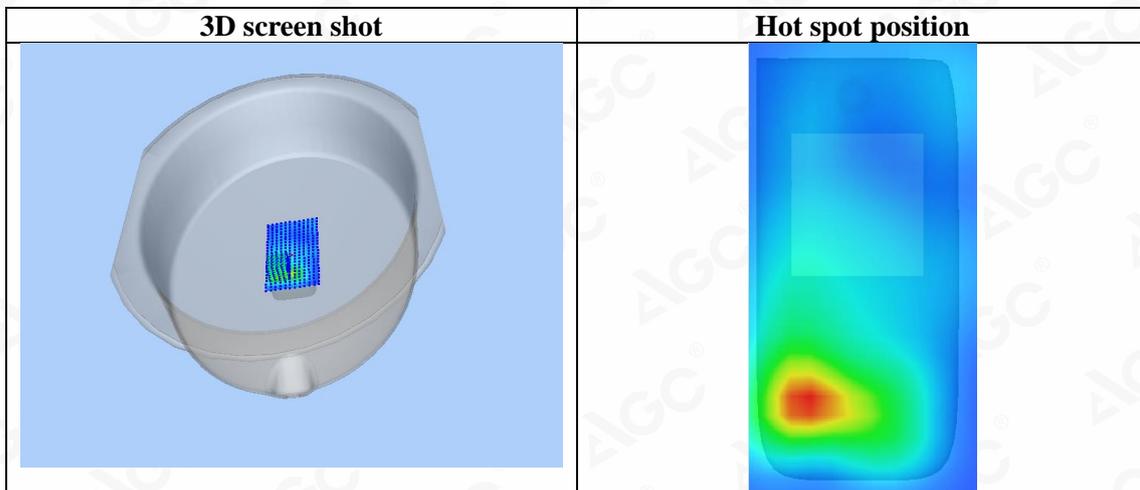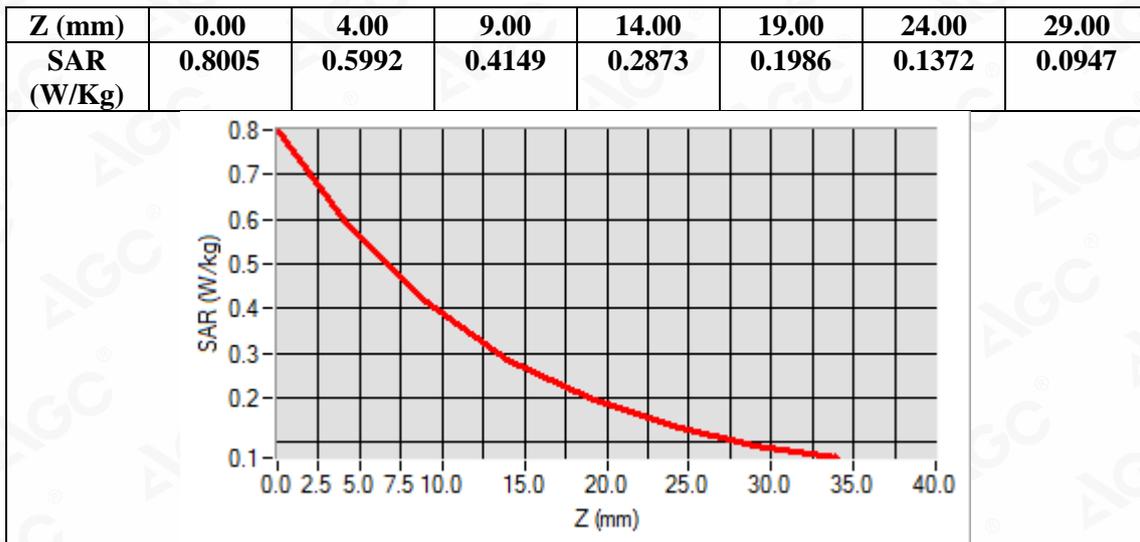

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Low-Limbs-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1922.4MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I Low- Limbs -Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/WCDMA BAND I Low- Limbs -Back//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	WCDMA Band I
Channels	Low
Signal	CDMA (Crest factor: 1.0)

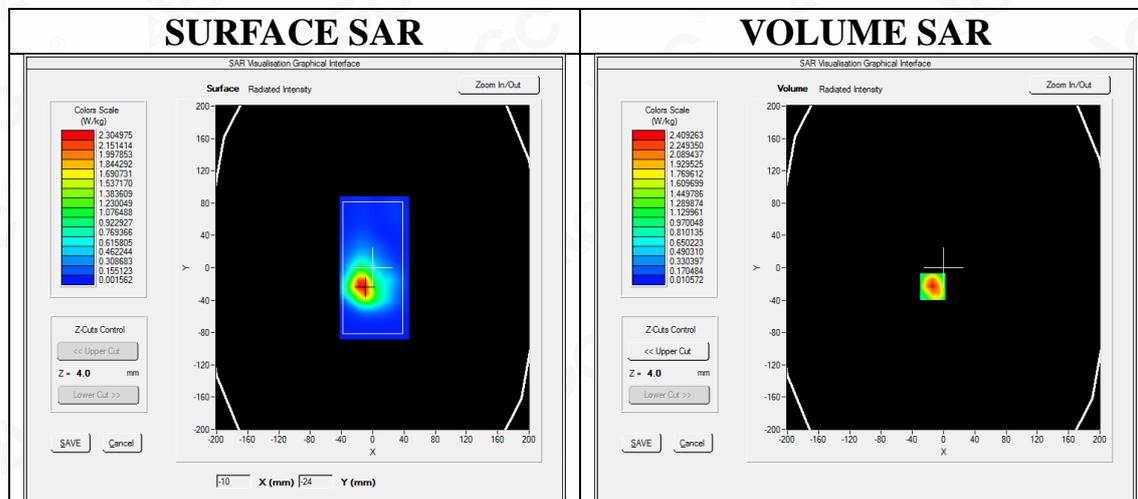

Maximum location: X=-14.00, Y=-23.00
SAR Peak: 4.08 W/kg



SAR 10g (W/Kg)	1.152131
SAR 1g (W/Kg)	2.306223

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.0859	2.4093	1.1723	0.5767	0.2858	0.1424	0.0725

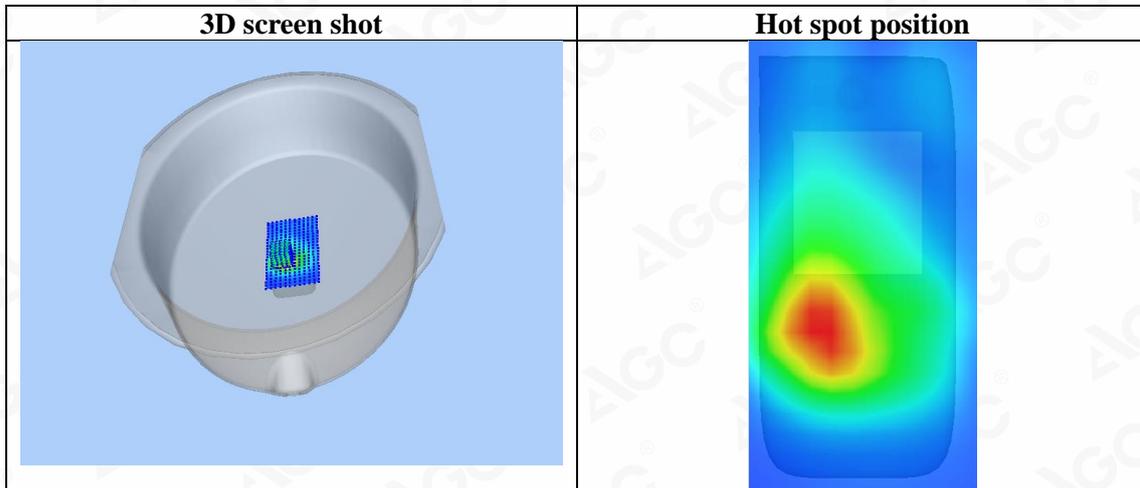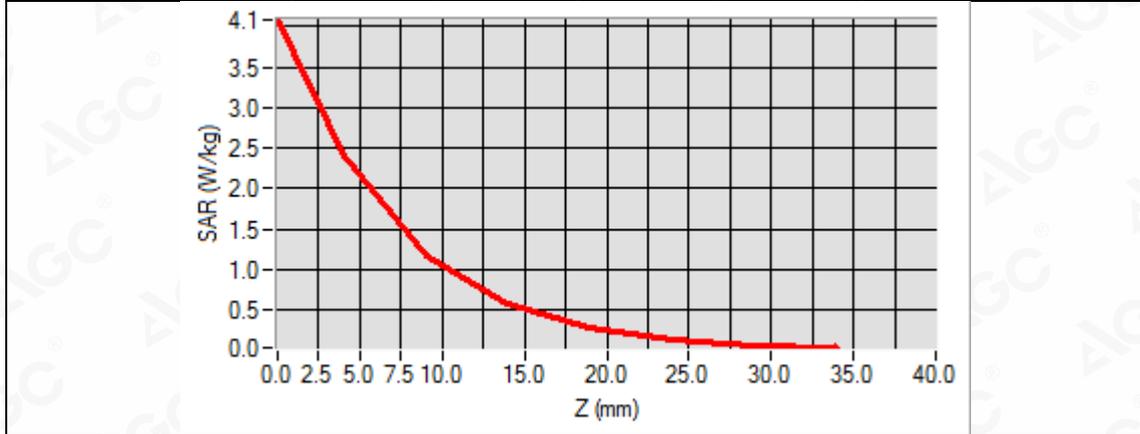

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band I Mid-Limbs-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1950MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I Mid- Limbs -Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/WCDMA BAND I Mid- Limbs -Back//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	WCDMA Band I
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

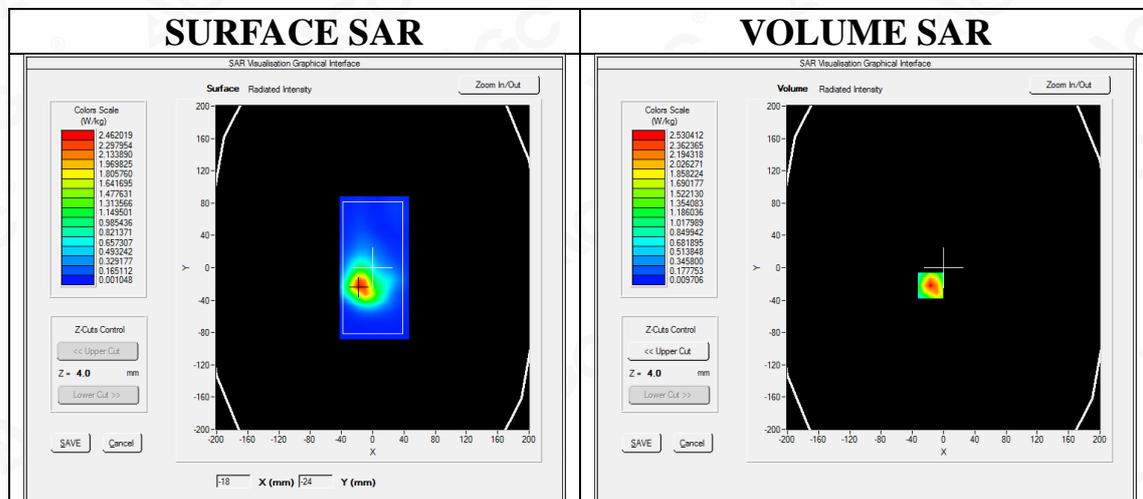

Maximum location: X=-17.00, Y=-22.00
SAR Peak: 4.31 W/kg



SAR 10g (W/Kg)	1.174224
SAR 1g (W/Kg)	2.392629

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.3682	2.5304	1.1938	0.5702	0.2752	0.1335	0.0668

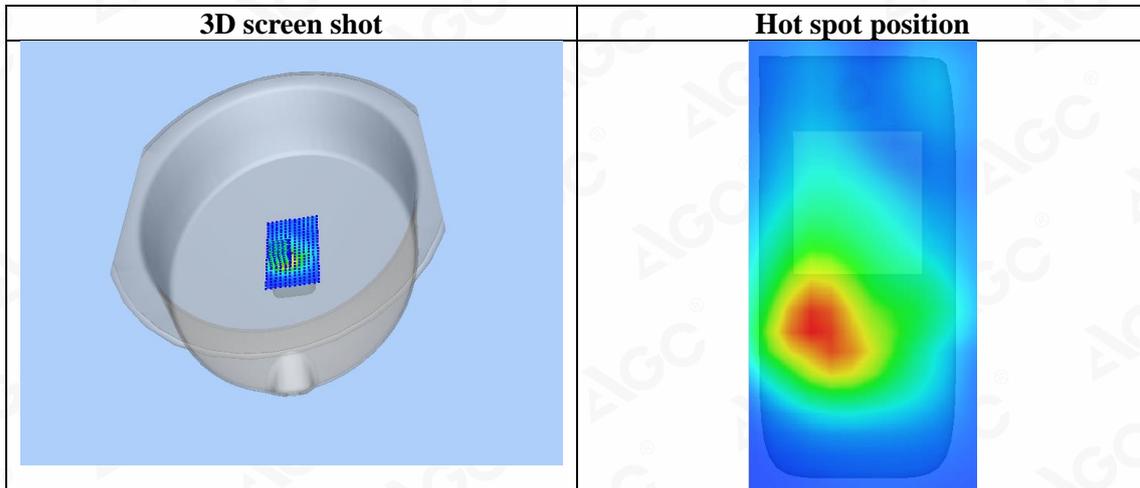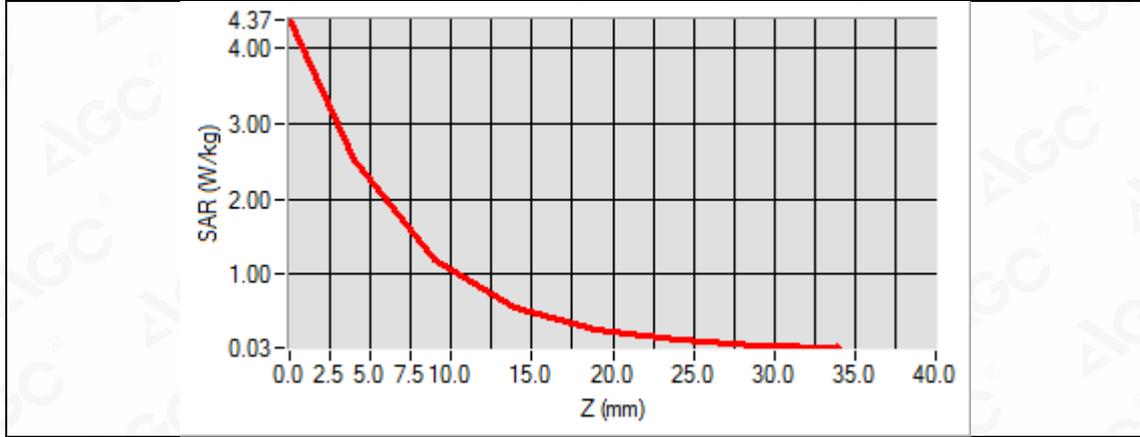

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band VIII Mid-Touch-Left (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.6MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.96$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ WCDMA BAND VIII Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA BAND VIII
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

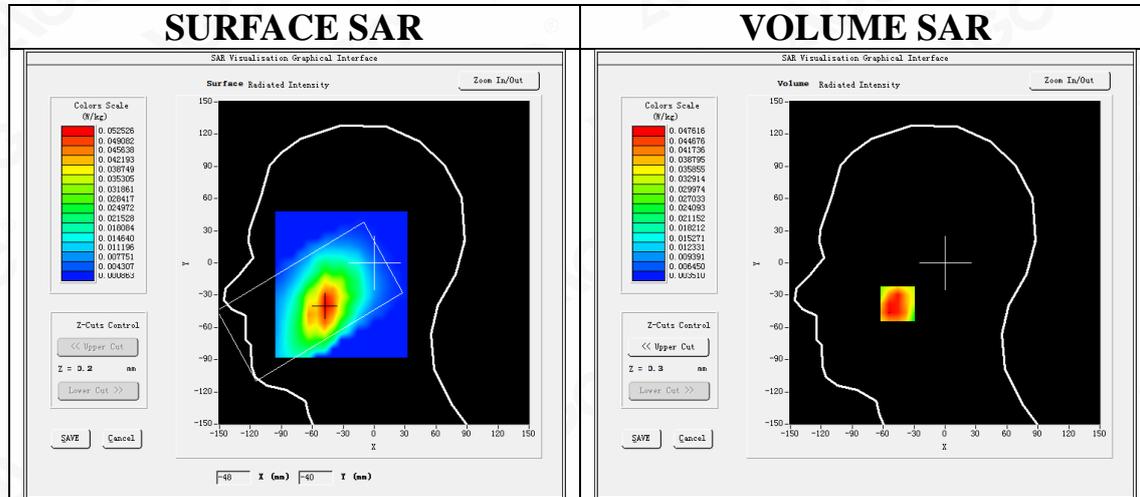



Maximum location: X=-46.00, Y=-38.00

SAR Peak: 0.05 W/kg

SAR 10g (W/Kg)	0.031919
SAR 1g (W/Kg)	0.043437

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



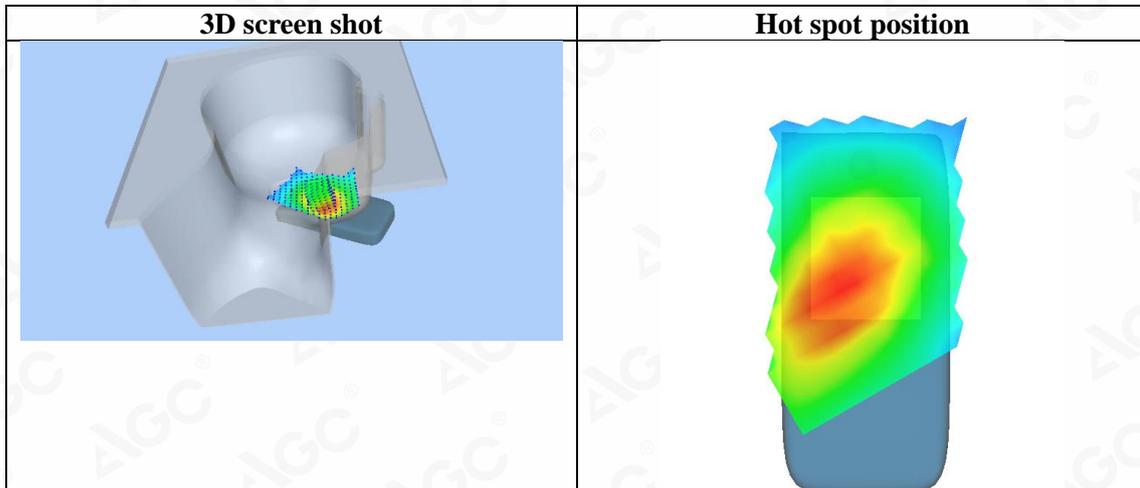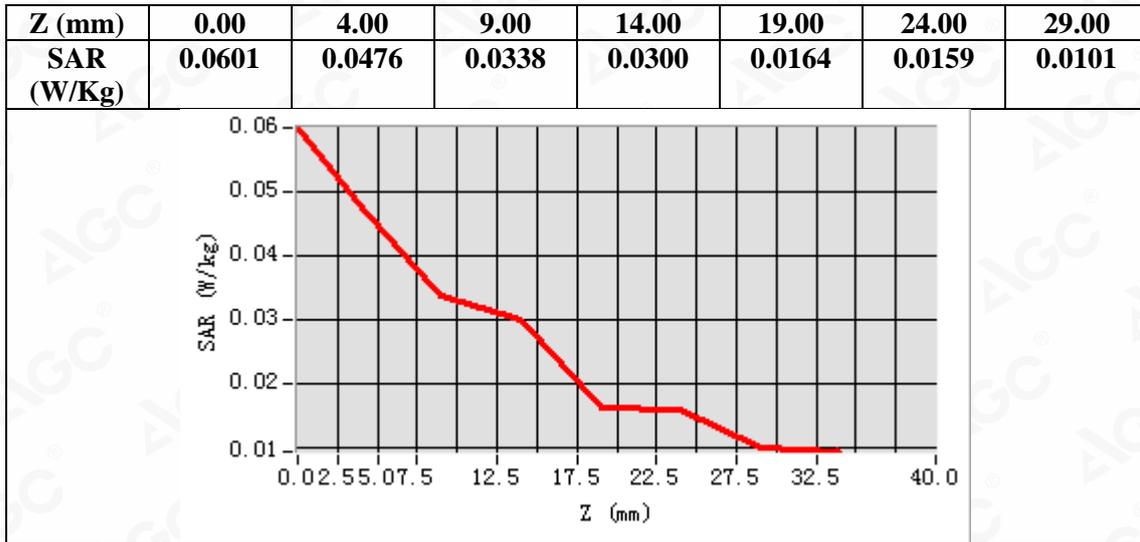

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band VIII Low-Body-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.16
Frequency: 882.4 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Low-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII Low-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	WCDMA BAND VIII
Channels	Low
Signal	CDMA (Crest factor: 1.0)

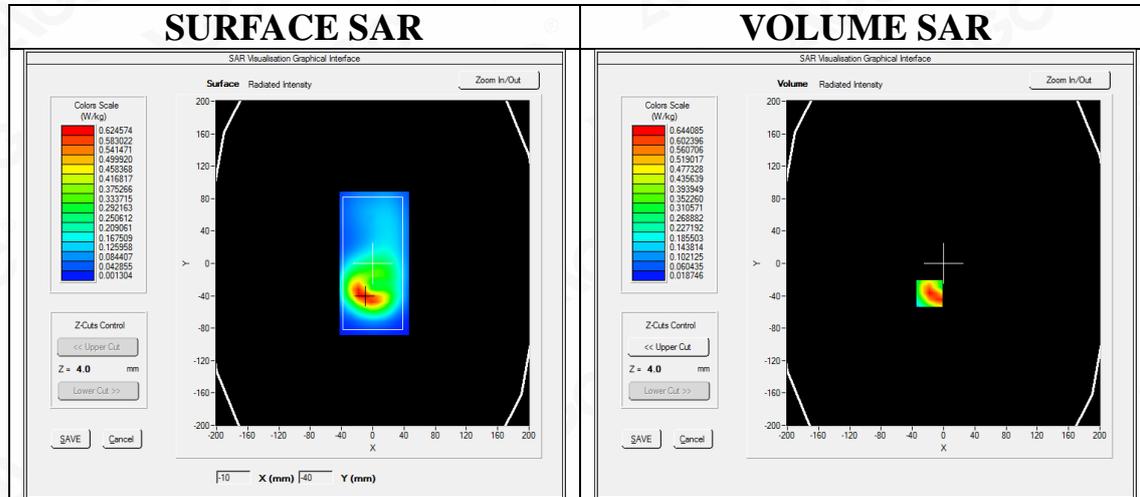



Maximum location: X=-18.00, Y=-37.00
SAR Peak: 1.04 W/kg

SAR 10g (W/Kg)	0.336574
SAR 1g (W/Kg)	0.621548

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.0475	0.6441	0.3430	0.1975	0.1157	0.0710	0.0439

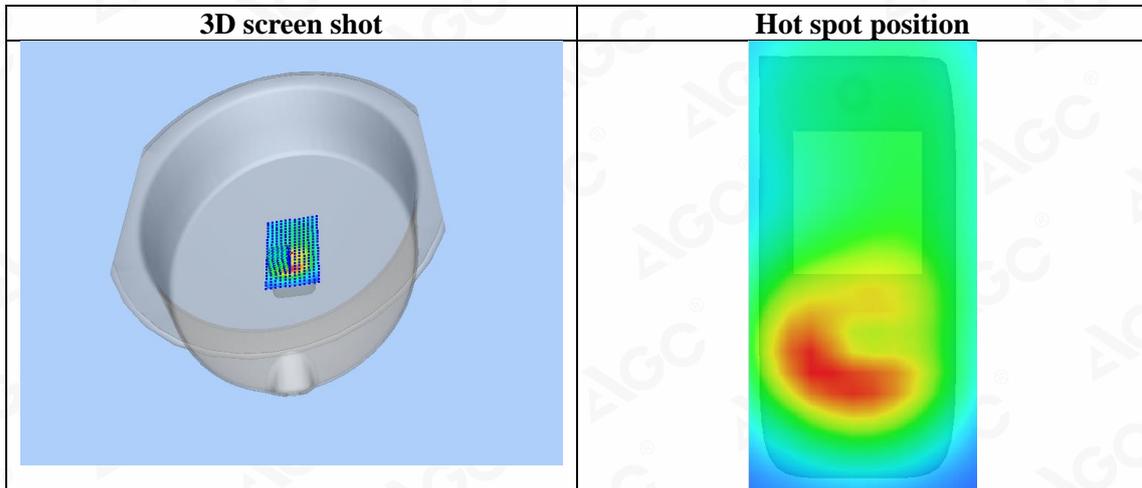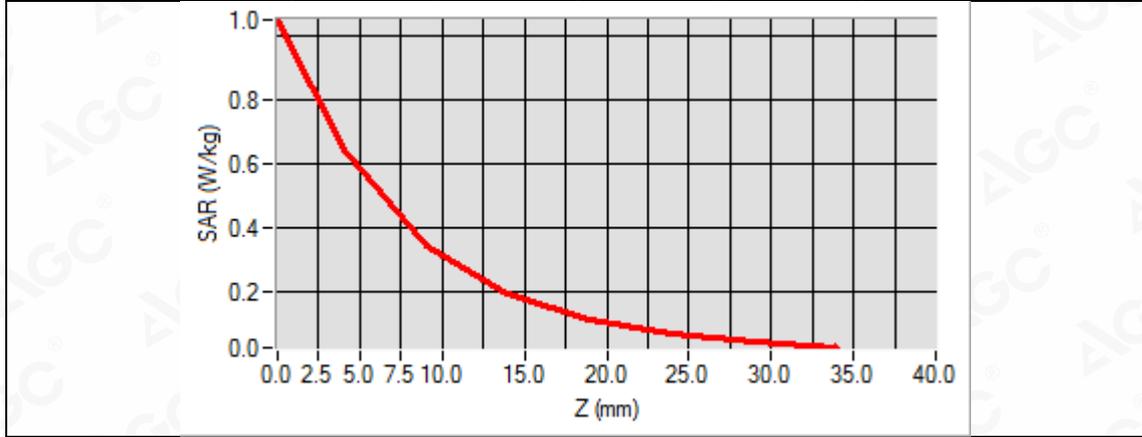

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band VIII Mid-Body-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.6 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	WCDMA BAND VIII
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

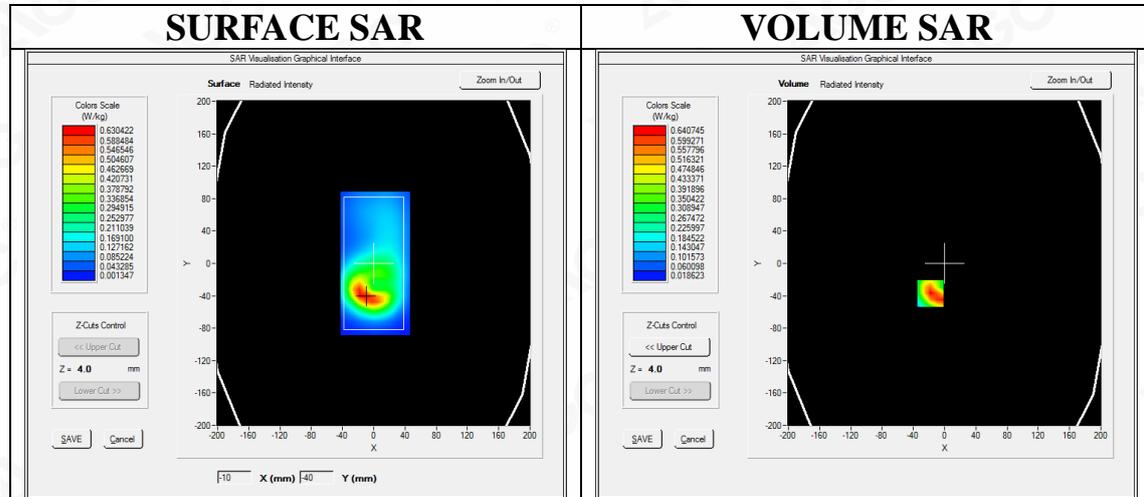

Maximum location: X=-18.00, Y=-37.00

SAR Peak: 1.04 W/kg



SAR 10g (W/Kg)	0.332471
SAR 1g (W/Kg)	0.611584

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.0447	0.6407	0.3413	0.1941	0.1162	0.0704	0.0437

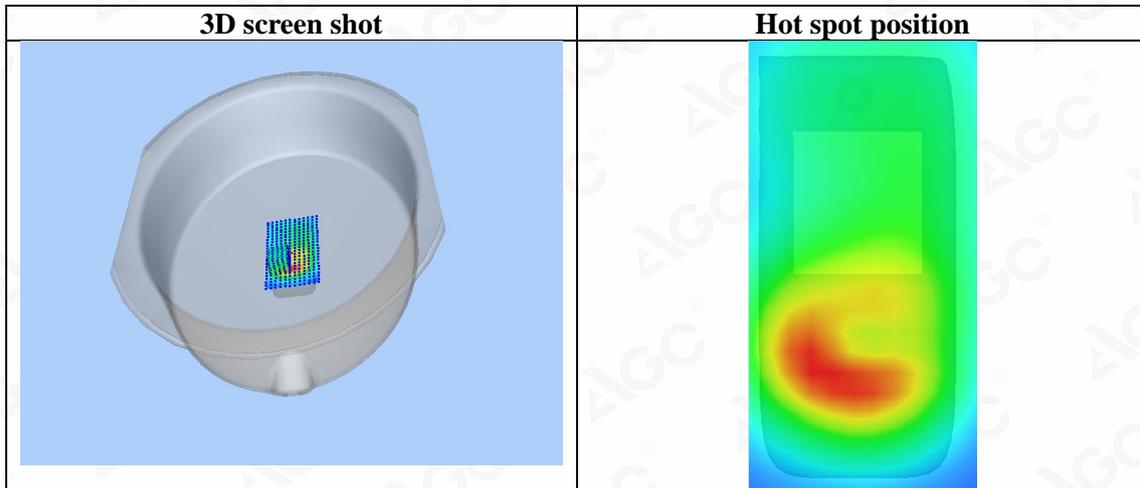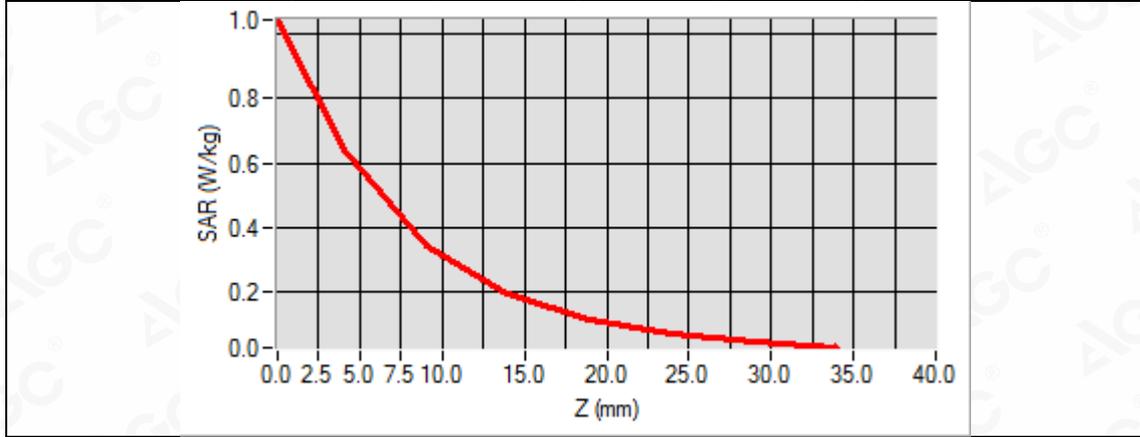

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band VIII Mid- Hotspot -Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.6 MHz; Medium parameters used: f = 900 MHz; $\sigma=0.96$ mho/m; $\epsilon_r=40.18$; $\rho=1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Mid- Hotspot -Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII Mid- Hotspot -Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	WCDMA BAND VIII
Channels	Middle
Signal	CDMA (Crest factor: 1.0)


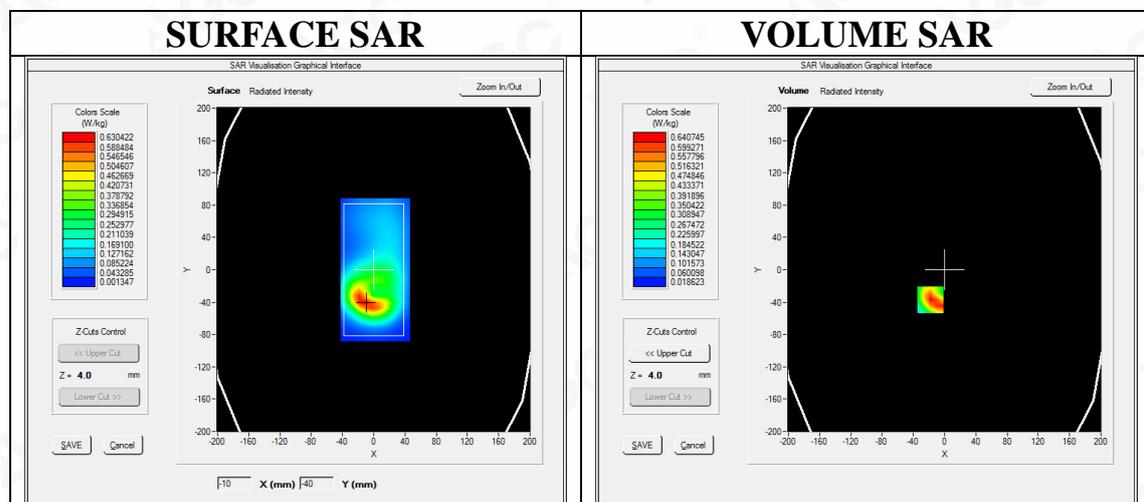


Maximum location: X=-18.00, Y=-37.00
SAR Peak: 1.04 W/kg

SAR 10g (W/Kg)	0.157891
SAR 1g (W/Kg)	0.285399

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



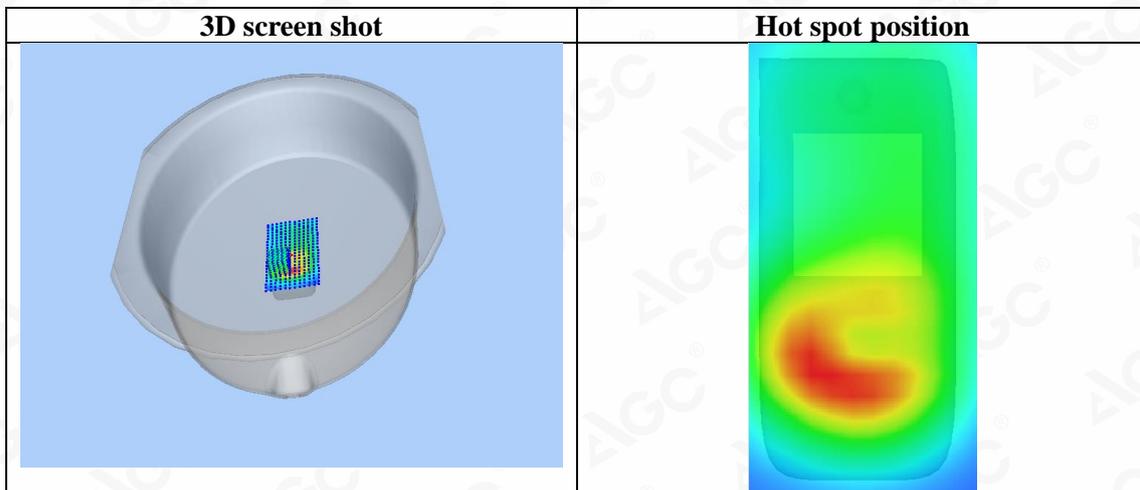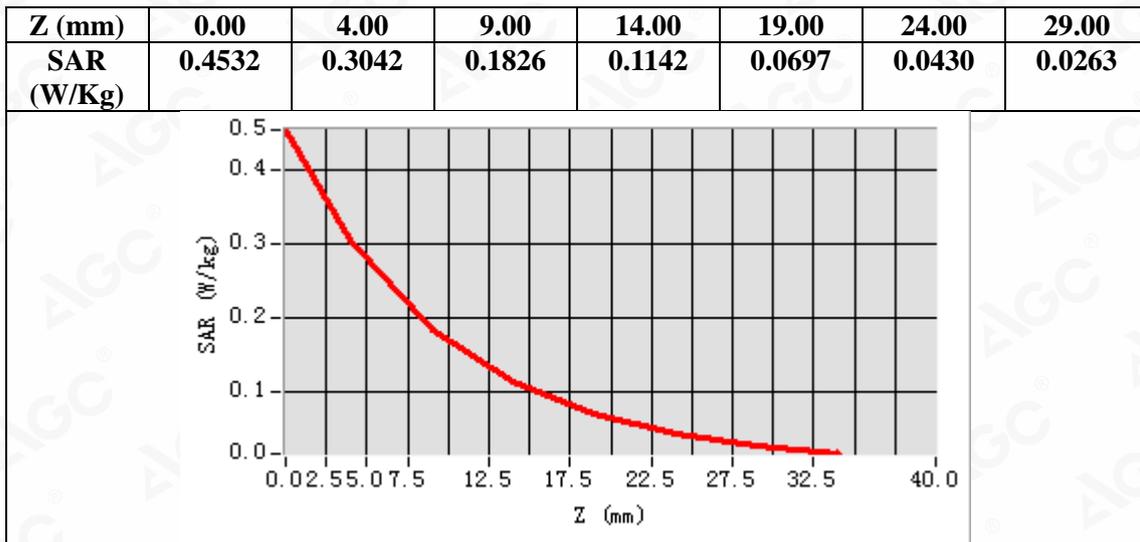

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band VIII Mid-Limbs-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.6 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Mid- Limbs -Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII Mid- Limbs -Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	WCDMA BAND VIII
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

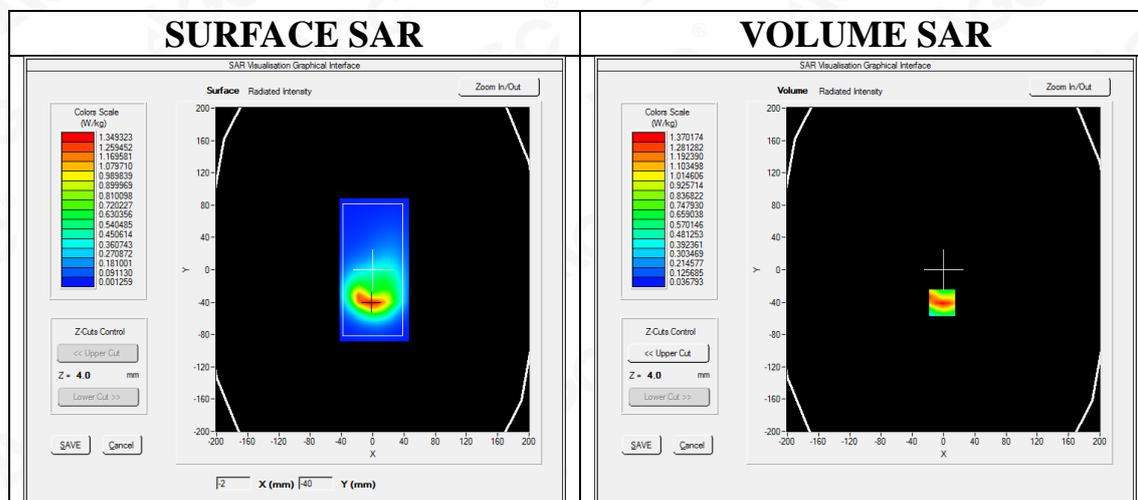

Maximum location: X=-2.00, Y=-41.00
SAR Peak: 2.24 W/kg



SAR 10g (W/Kg)	0.681252
SAR 1g (W/Kg)	1.287165

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.2631	1.3702	0.7167	0.4104	0.2437	0.1496	0.0923

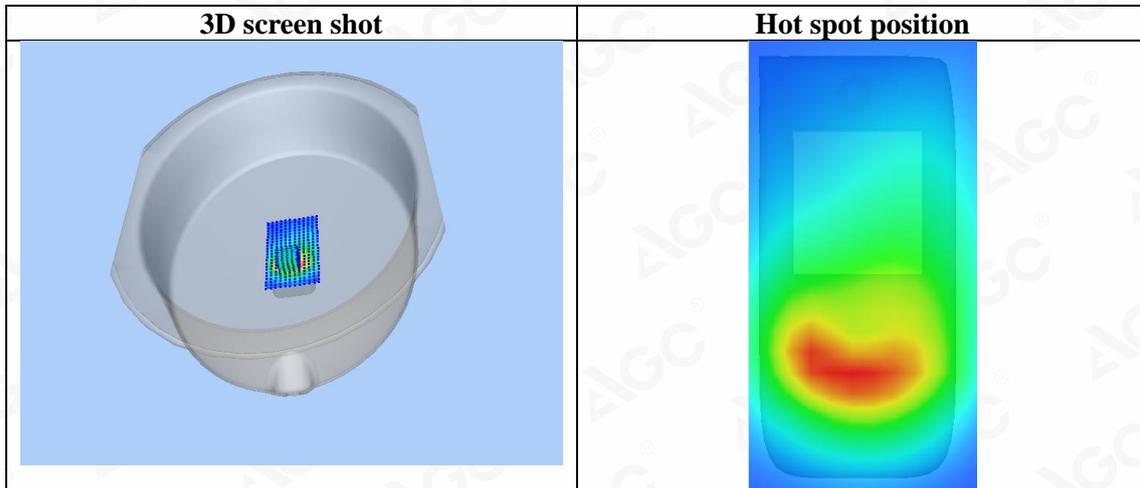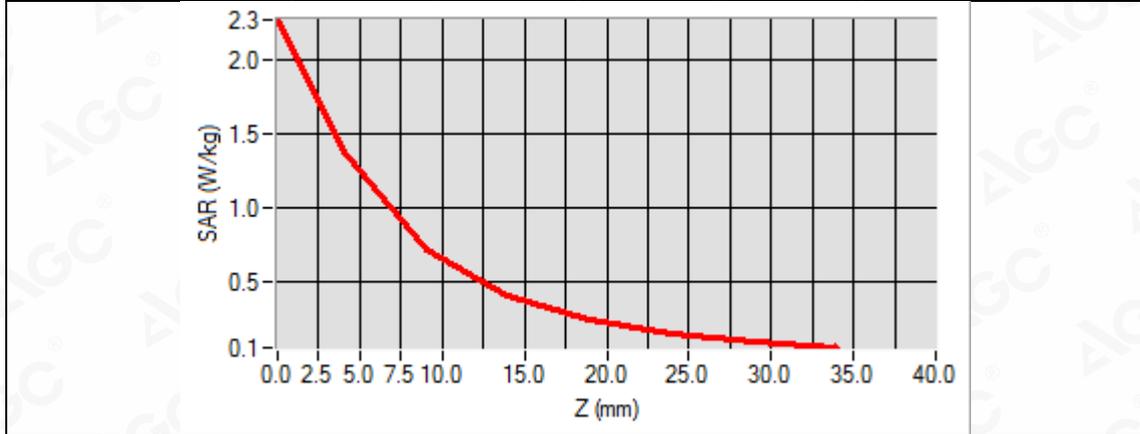

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
WCDMA Band VIII High-Limbs-Towards Grounds (RMC)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 31,2020


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.16
Frequency: 912.6 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.5, Liquid temperature (°C): 22.2

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII High- Limbs -Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII High- Limbs -Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	WCDMA BAND VIII
Channels	High
Signal	CDMA (Crest factor: 1.0)

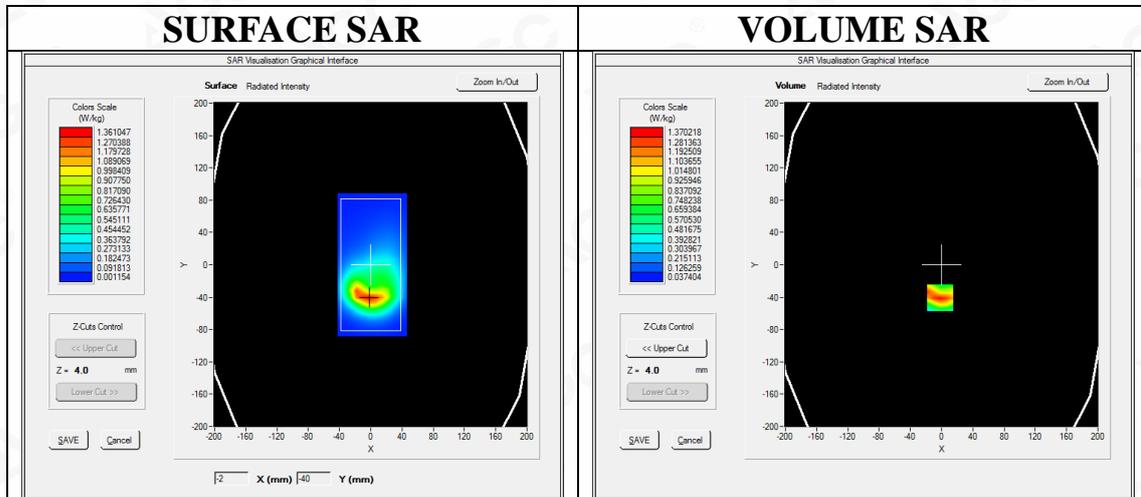

Maximum location: X=-2.00, Y=-41.00

SAR Peak: 2.25 W/kg



SAR 10g (W/Kg)	0.685122
SAR 1g (W/Kg)	1.290900

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.2550	1.3702	0.7207	0.4125	0.2469	0.1489	0.0931

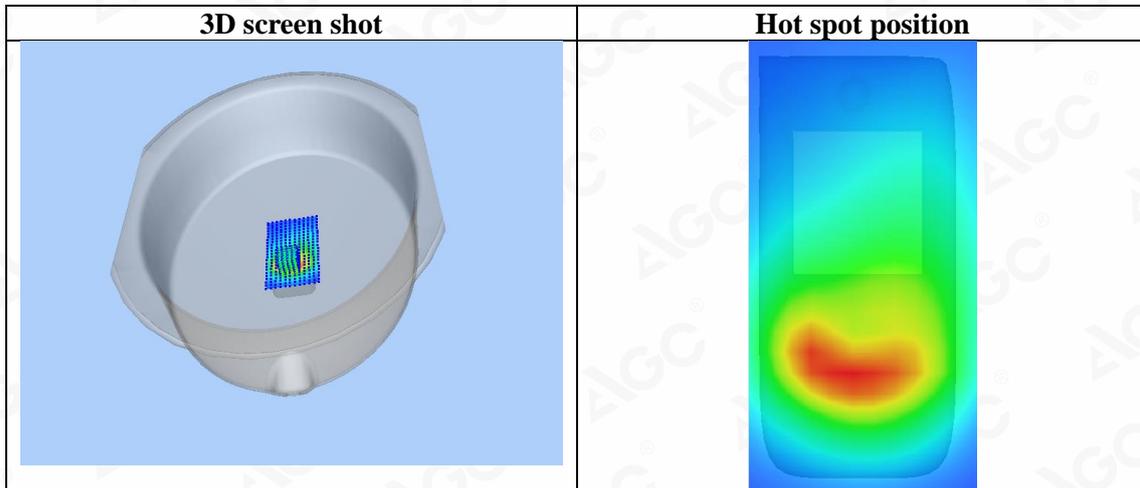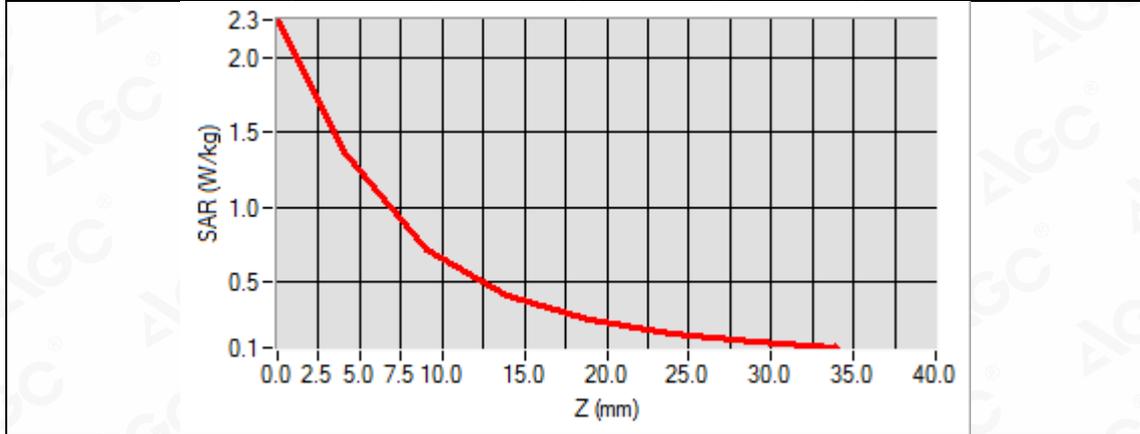

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 1 Mid-Touch-Left(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1950MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):22.1, Liquid temperature (°C):21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 Mid- Touch-Left /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 Mid- Touch-Left /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 1
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

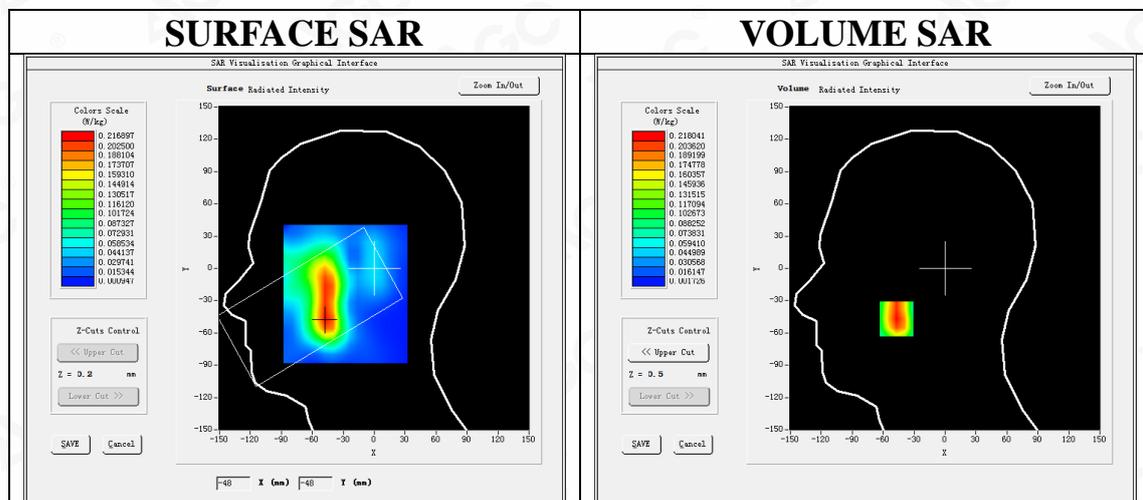

Maximum location: X=-47.00, Y=-47.00
SAR Peak: 0.32 W/kg



SAR 10g (W/Kg)	0.119005
SAR 1g (W/Kg)	0.205927

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3004	0.2180	0.1417	0.0898	0.0544	0.0330	0.0198

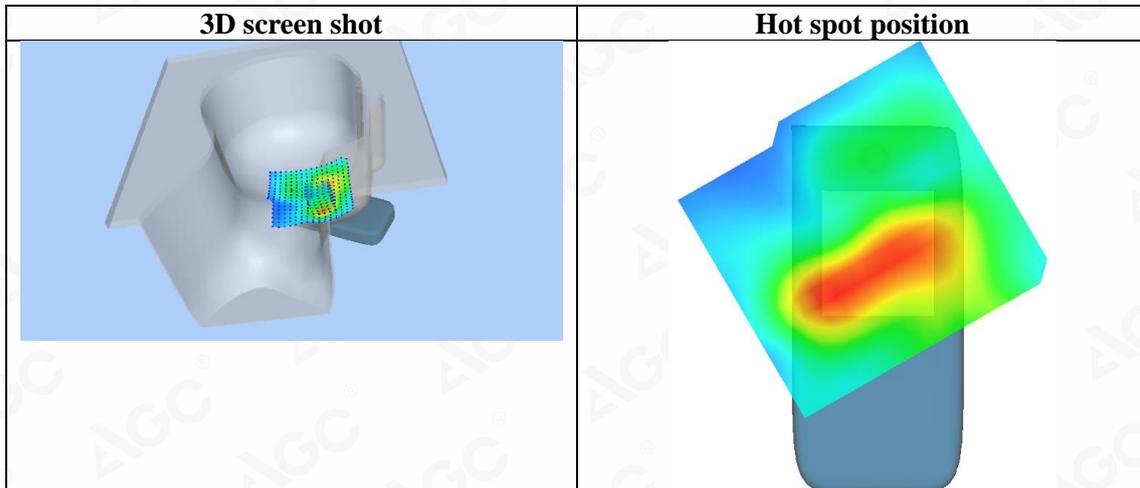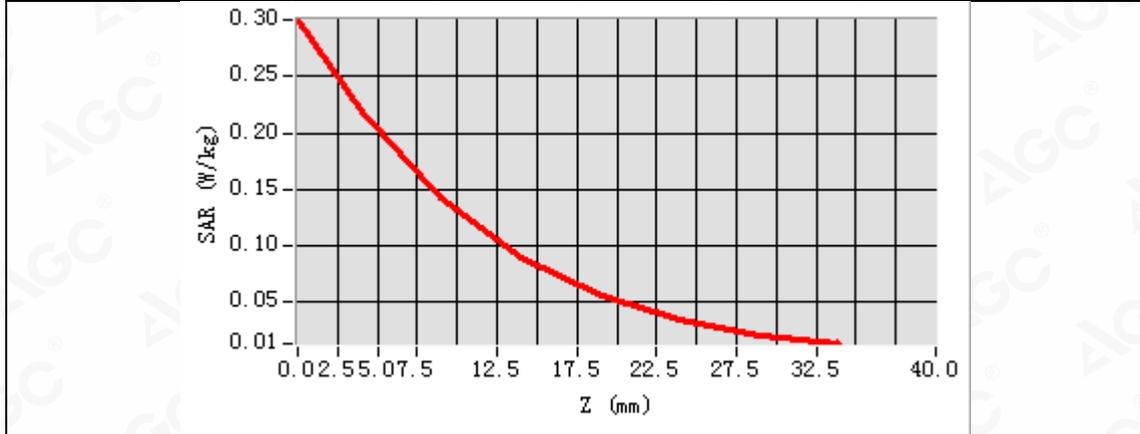

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 1 Mid-Body-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1950MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.1, Liquid temperature (°C):21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 Mid-Body-back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 Mid-Body-back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 1
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

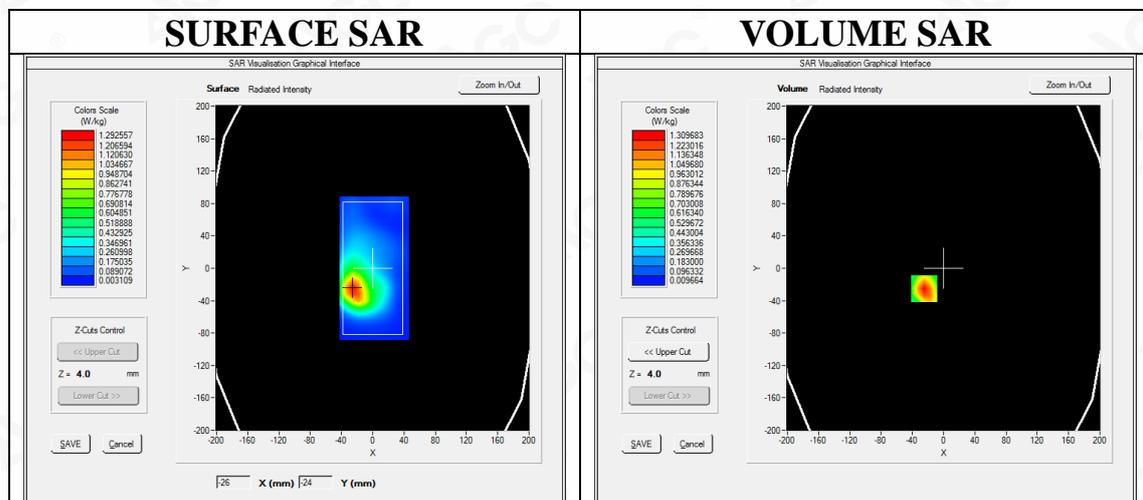



Maximum location: X=-25.00, Y=-25.00
SAR Peak: 2.15 W/kg

SAR 10g (W/Kg)	0.665482
SAR 1g (W/Kg)	1.257541

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.1194	1.3097	0.6886	0.3658	0.1940	0.1027	0.0547

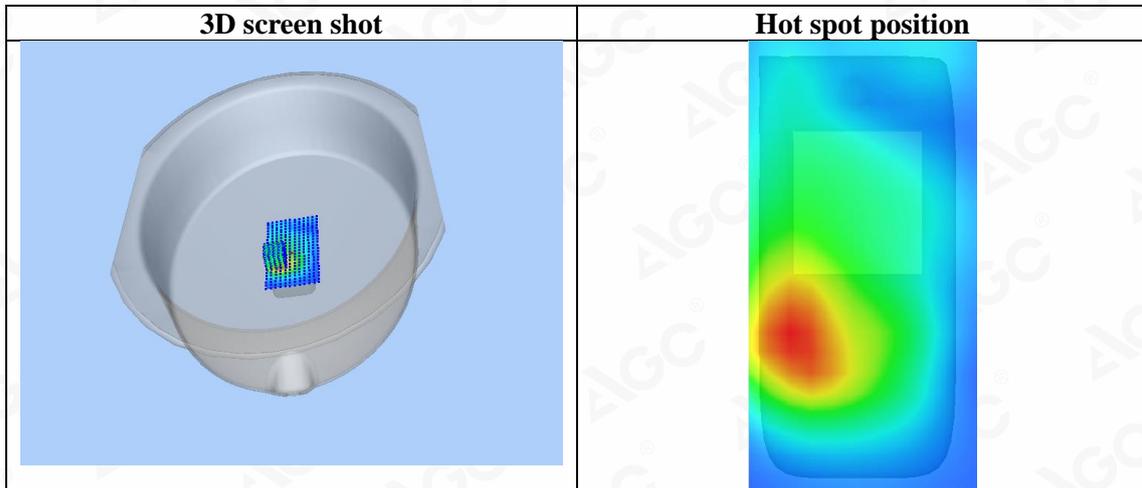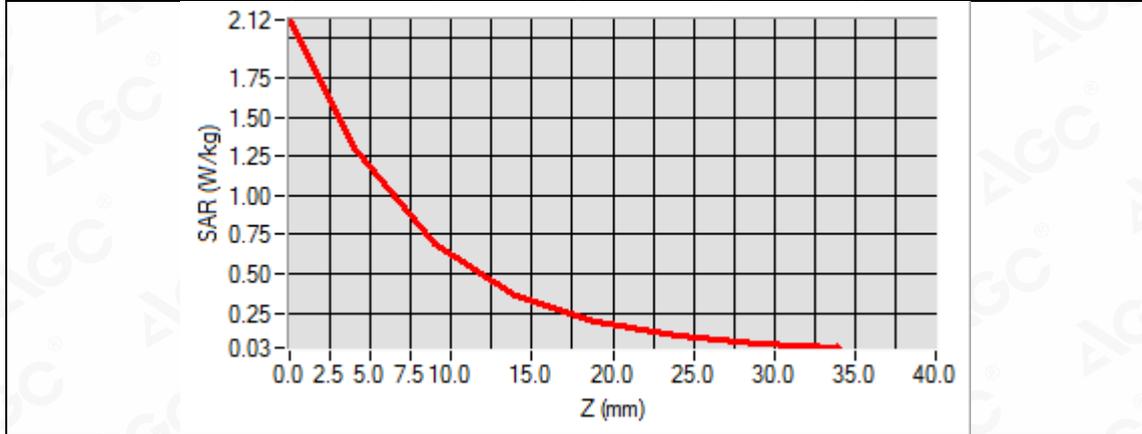

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 1 High-Body-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1970MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.1, Liquid temperature (°C):21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 High-Body-back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 High-Body-back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 1
Channels	High
Signal	OFDM (Crest factor: 1.0)

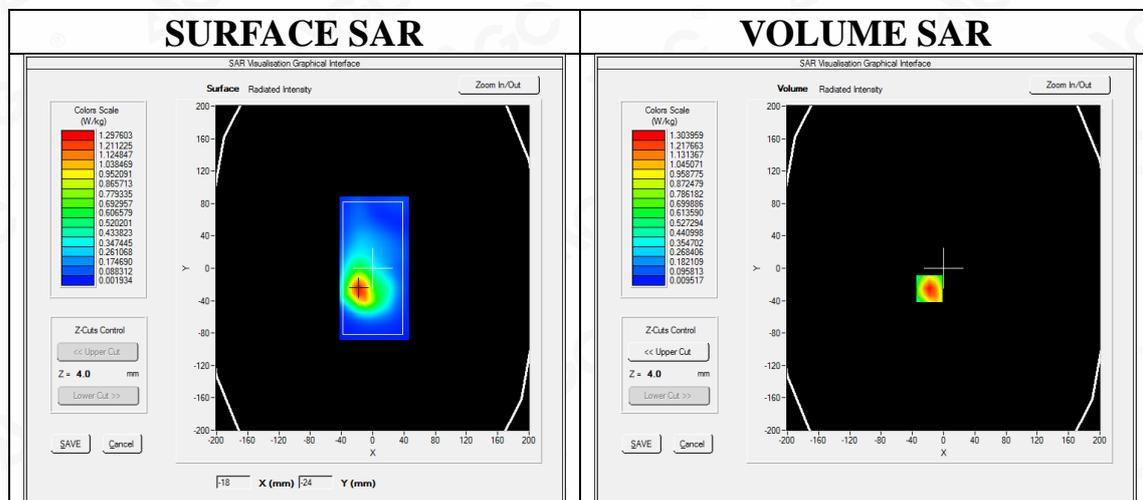

Maximum location: X=-18.00, Y=-25.00



SAR Peak: 2.13 W/kg

SAR 10g (W/Kg)	0.661548
SAR 1g (W/Kg)	1.249845

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.1077	1.3040	0.6864	0.3644	0.1928	0.1015	0.0541

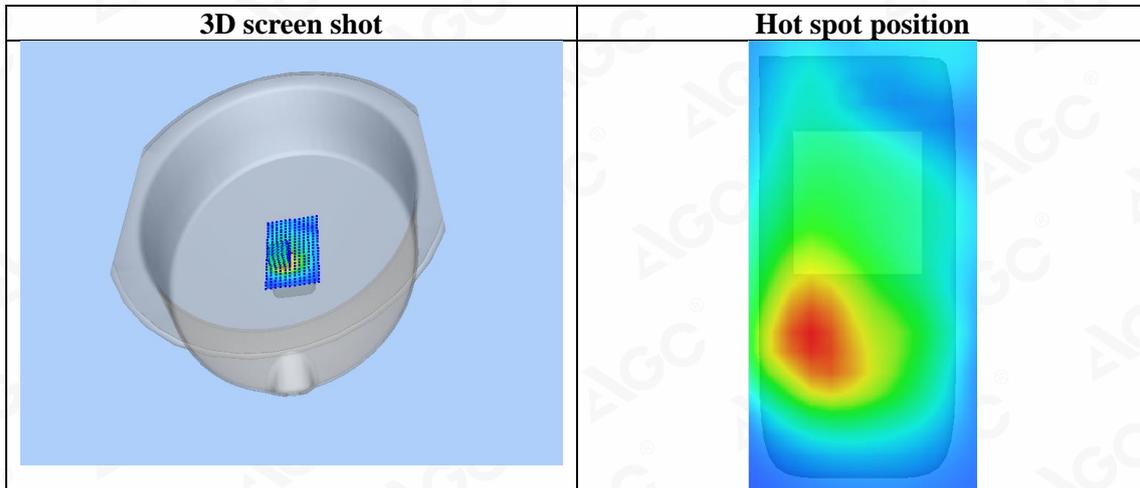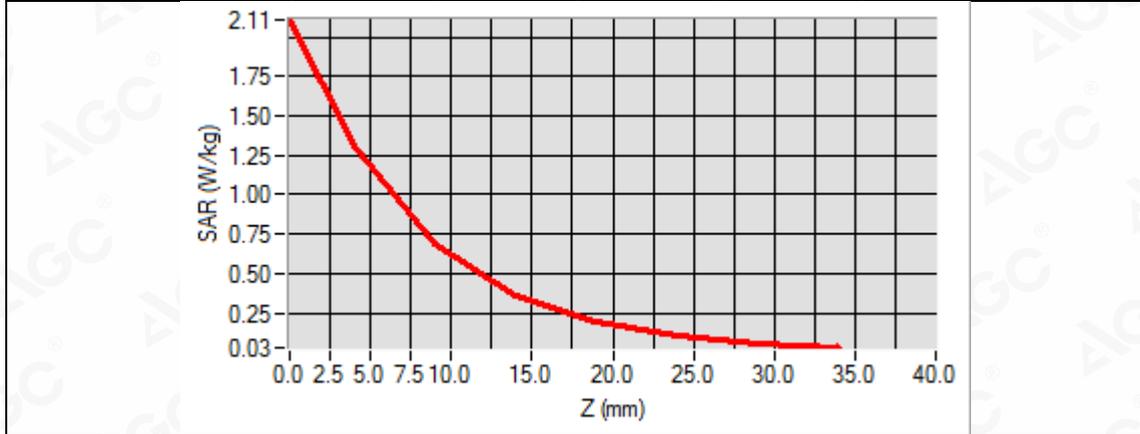

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 1 High- Hotspot -Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1970MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.1, Liquid temperature (°C):21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 High- Hotspot -back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 High- Hotspot -back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	LTE Band 1
Channels	High
Signal	OFDM (Crest factor: 1.0)

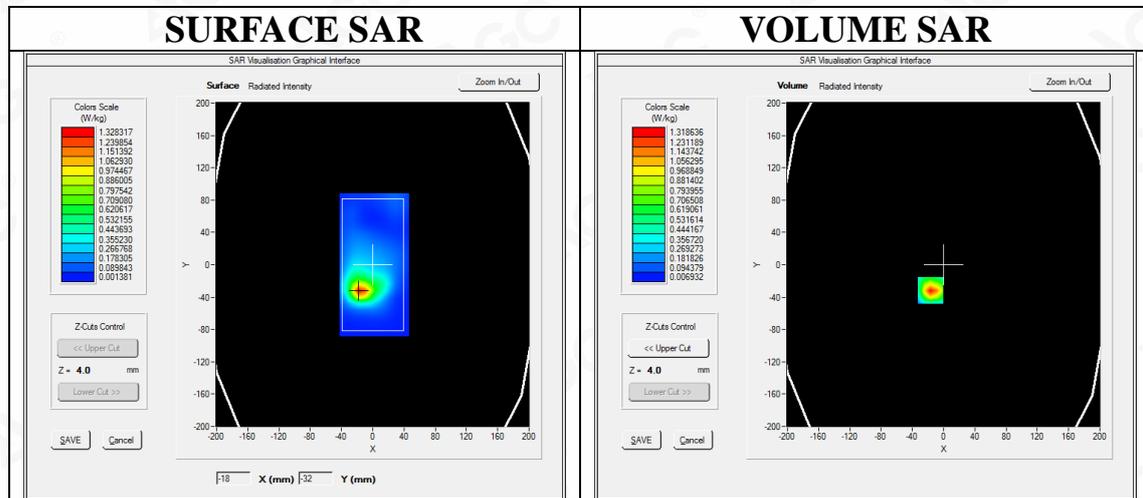



Maximum location: X=-17.00, Y=-32.00
SAR Peak: 2.16 W/kg

SAR 10g (W/Kg)	0.265548
SAR 1g (W/Kg)	0.449147

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



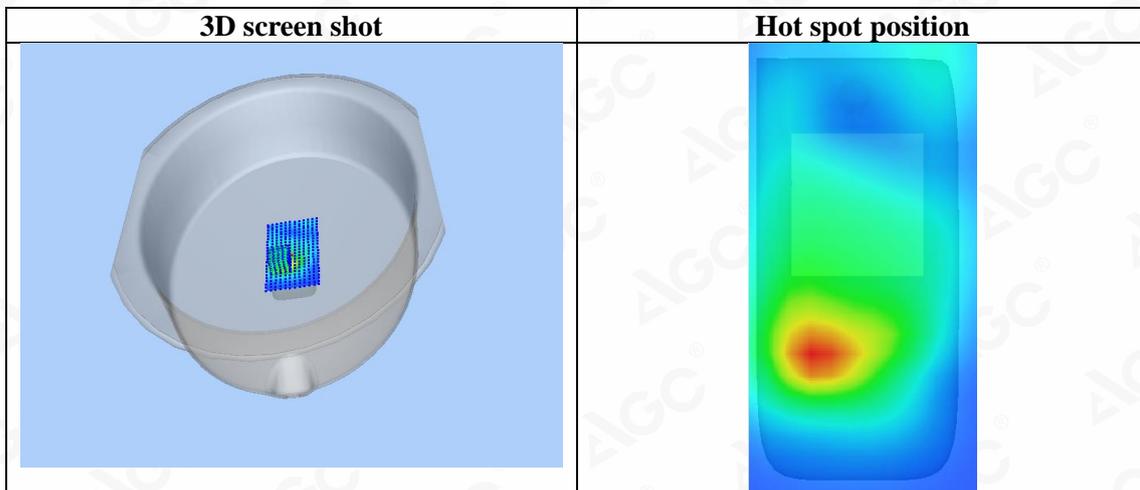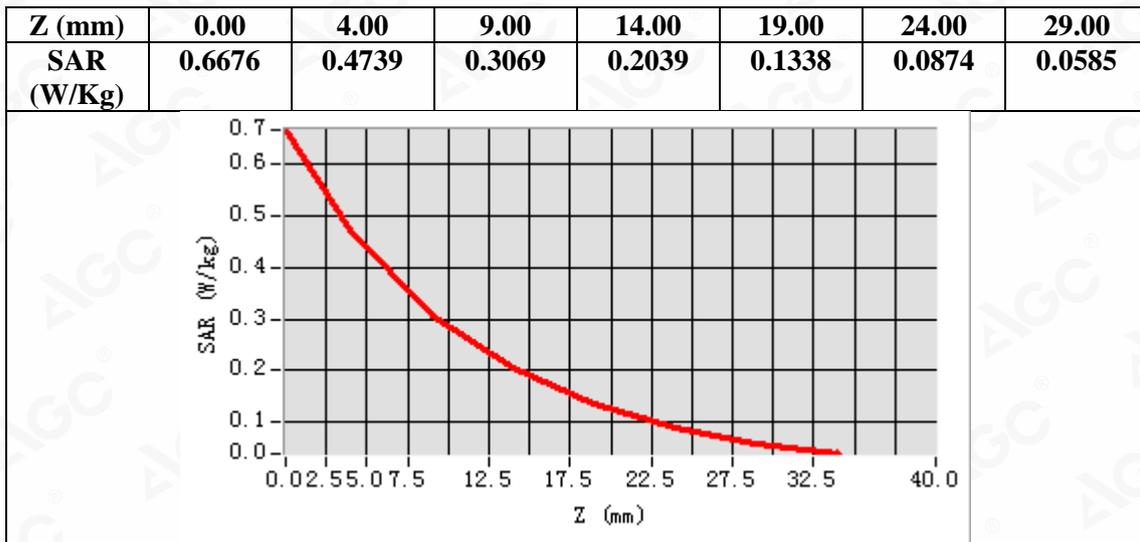

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 1 Low-Limbs-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1930MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.1, Liquid temperature (°C):21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 Low - Limbs -back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 Low - Limbs -back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	LTE Band 1
Channels	Low
Signal	OFDM (Crest factor: 1.0)

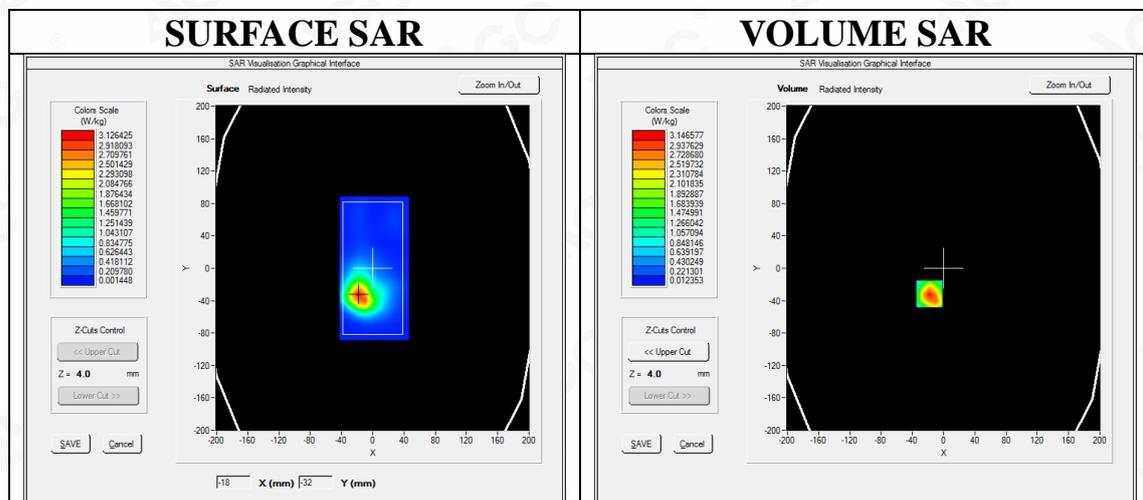

Maximum location: X=-18.00, Y=-32.00

SAR Peak: 5.49 W/kg



SAR 10g (W/Kg)	1.469334
SAR 1g (W/Kg)	2.974503

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	5.3724	3.1466	1.5082	0.7128	0.3431	0.1663	0.0825

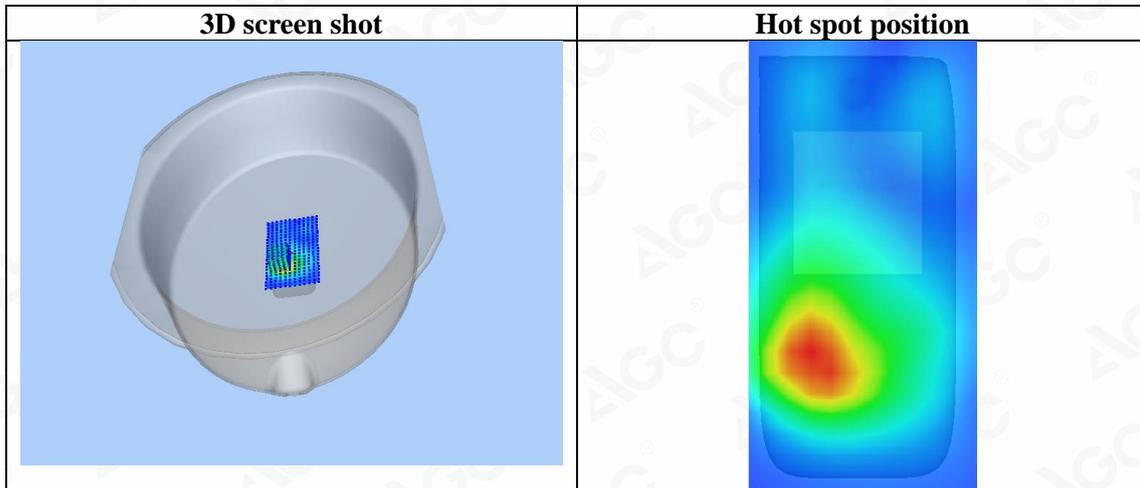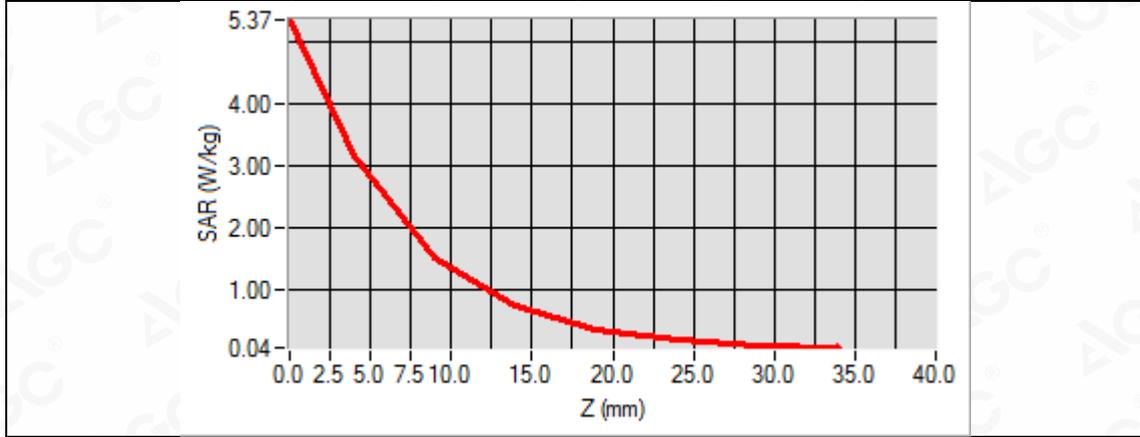

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 1 High-Limbs-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 01,2020


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=4.61;
Frequency: 1970MHz; Medium parameters used: $f = 2000$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.1, Liquid temperature (°C):21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 High - Limbs -back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 High - Limbs -back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	LTE Band 1
Channels	High
Signal	OFDM (Crest factor: 1.0)

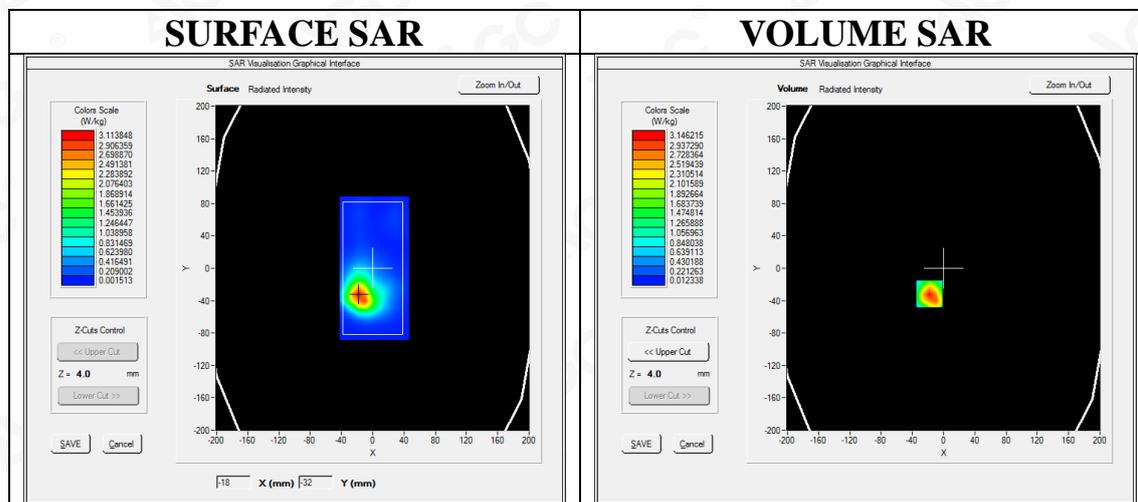

Maximum location: X=-18.00, Y=-32.00
SAR Peak: 5.49 W/kg



SAR 10g (W/Kg)	1.468783
SAR 1g (W/Kg)	2.973939

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	5.3752	3.1462	1.5077	0.7134	0.3451	0.1666	0.0827

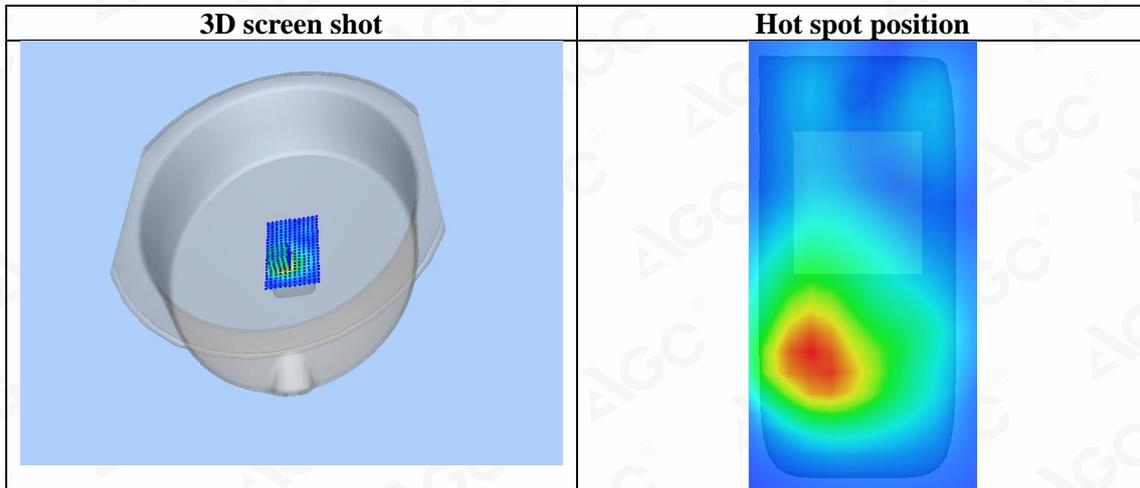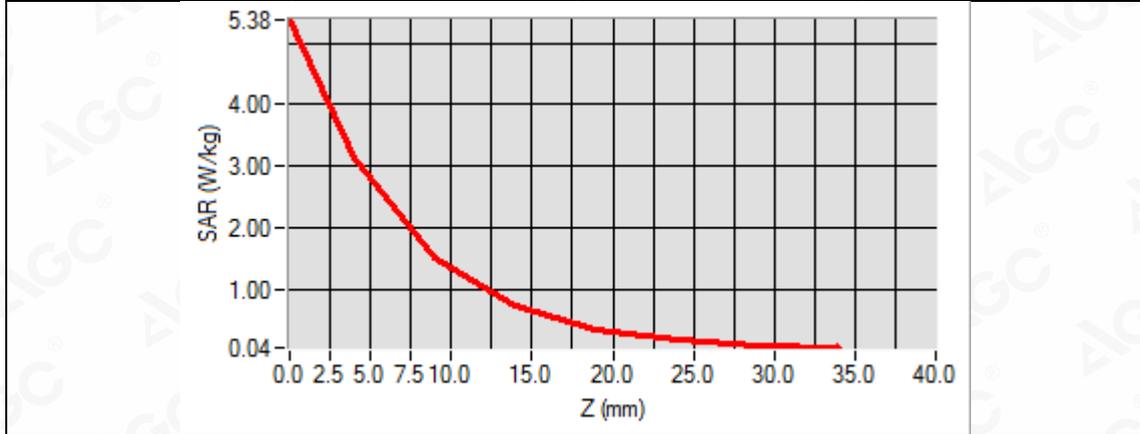

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 3 Mid-Touch-Left (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: LTE; Communication System Band: LTE Band 3; Duty Cycle: 1:1; Conv.F=4.48
Frequency: 1747.5MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):21.7, Liquid temperature (°C):21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE Band 3 Mid- Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE Band 3 Mid- Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 3
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

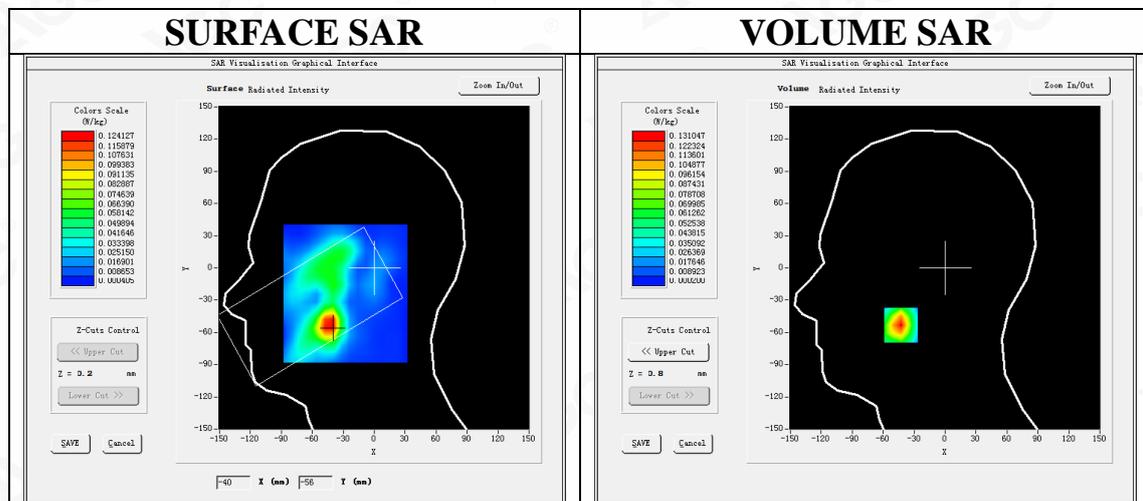



Maximum location: X=-43.00, Y=-53.00
SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.056162
SAR 1g (W/Kg)	0.121145

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.2172	0.1310	0.0656	0.0322	0.0160	0.0078	0.0044

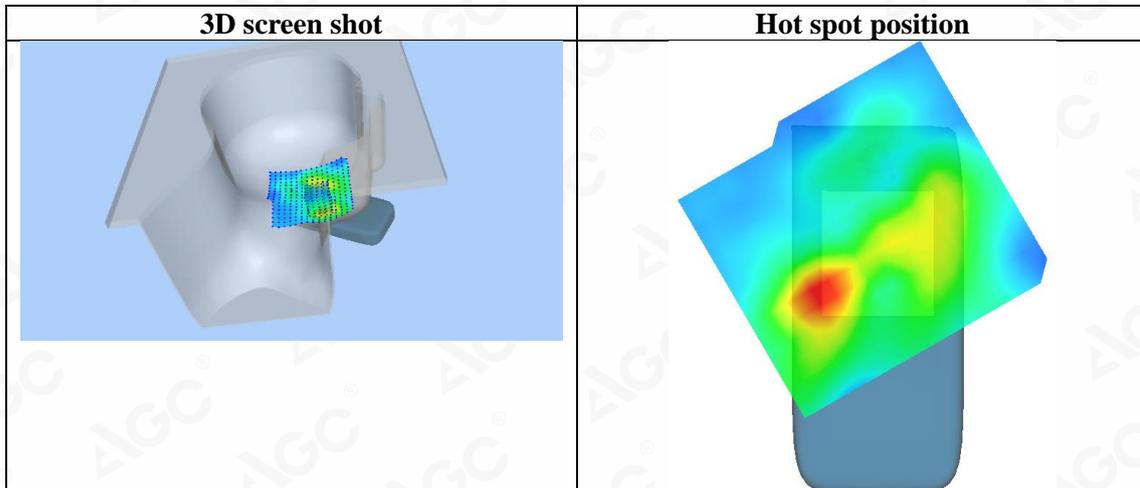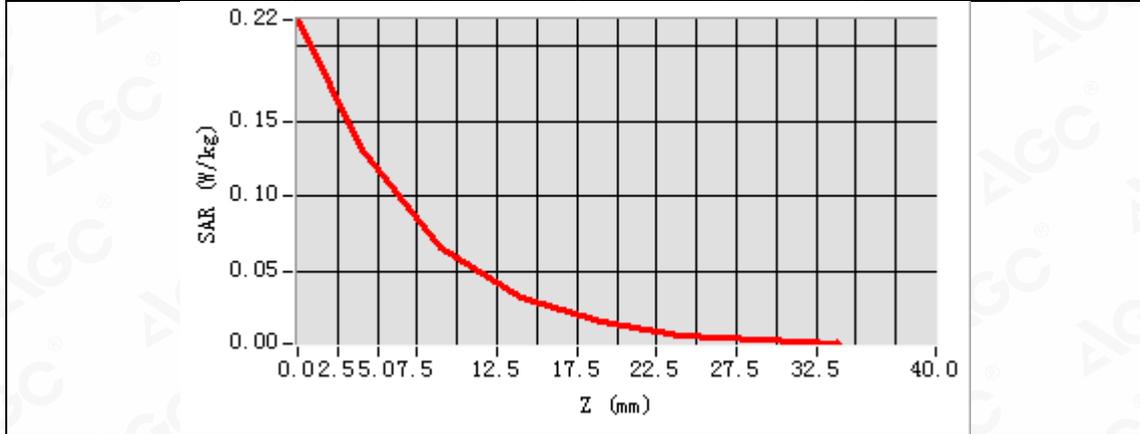

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 3 High-Body-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: LTE; Communication System Band: LTE Band 3; Duty Cycle: 1:1; Conv.F=4.48
Frequency: 1775MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):21.7, Liquid temperature (°C):21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE Band 3 High-Body-back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE Band 3 High-Body-back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 3
Channels	High
Signal	OFDM (Crest factor: 1.0)

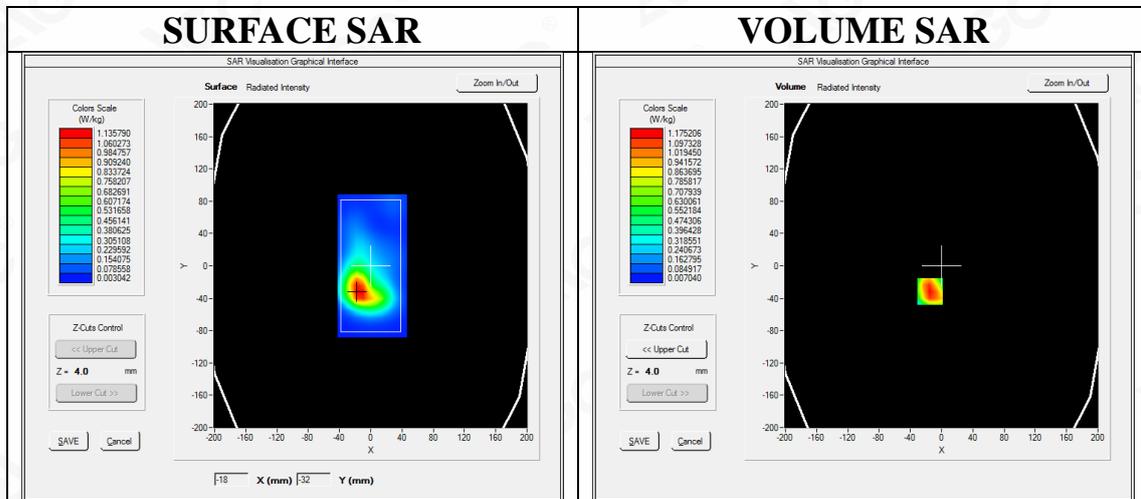

Maximum location: X=-15.00, Y=-32.00

SAR Peak: 2.04 W/kg



SAR 10g (W/Kg)	0.596189
SAR 1g (W/Kg)	1.143934

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.9556	1.1752	0.5950	0.3110	0.1663	0.0892	0.0496

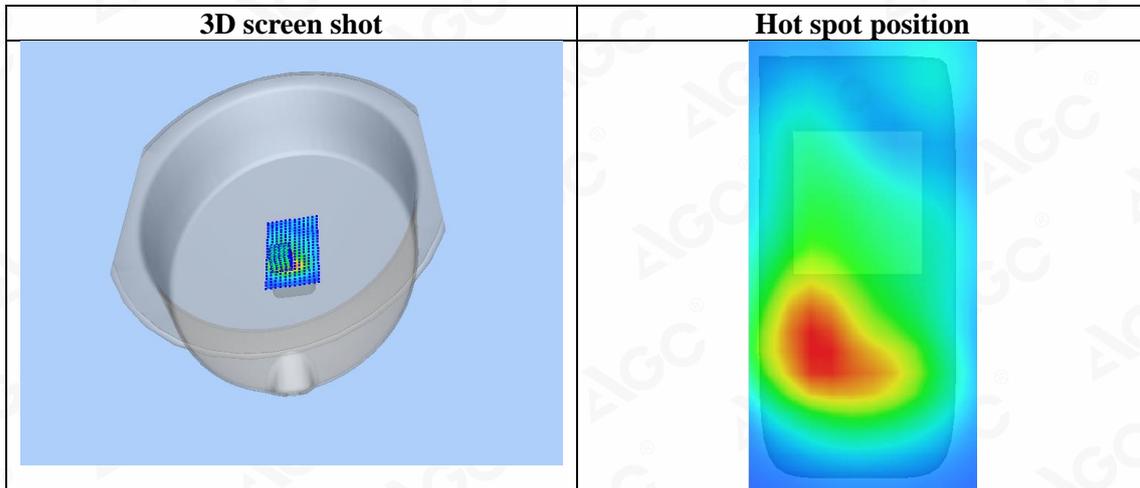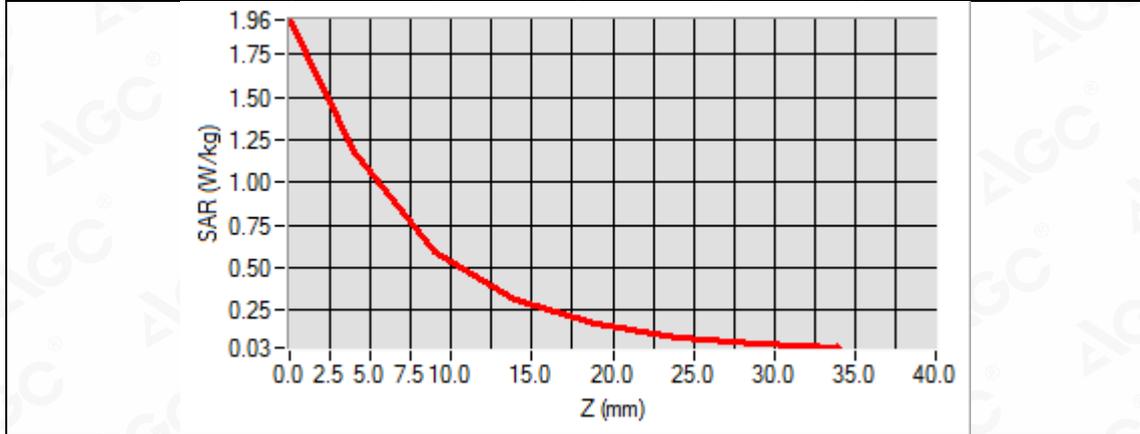

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 3 Mid-Hotspot-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: LTE; Communication System Band: LTE Band 3; Duty Cycle: 1:1; Conv.F=4.48
Frequency: 1747.5MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):21.7, Liquid temperature (°C):21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE Band 3 Mid-Hotspot-Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE Band 3 Mid-Hotspot-Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	LTE Band 3
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

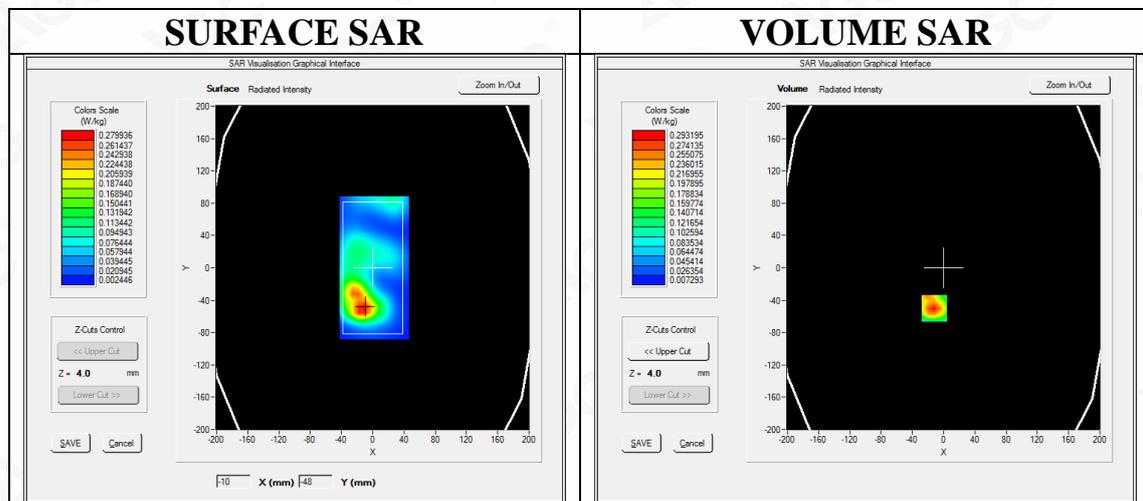

Maximum location: X=-12.00, Y=-50.00

SAR Peak: 0.46 W/kg



SAR 10g (W/Kg)	0.203230
SAR 1g (W/Kg)	0.402799

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.6275	0.4176	0.2495	0.1457	0.0913	0.0536	0.0307

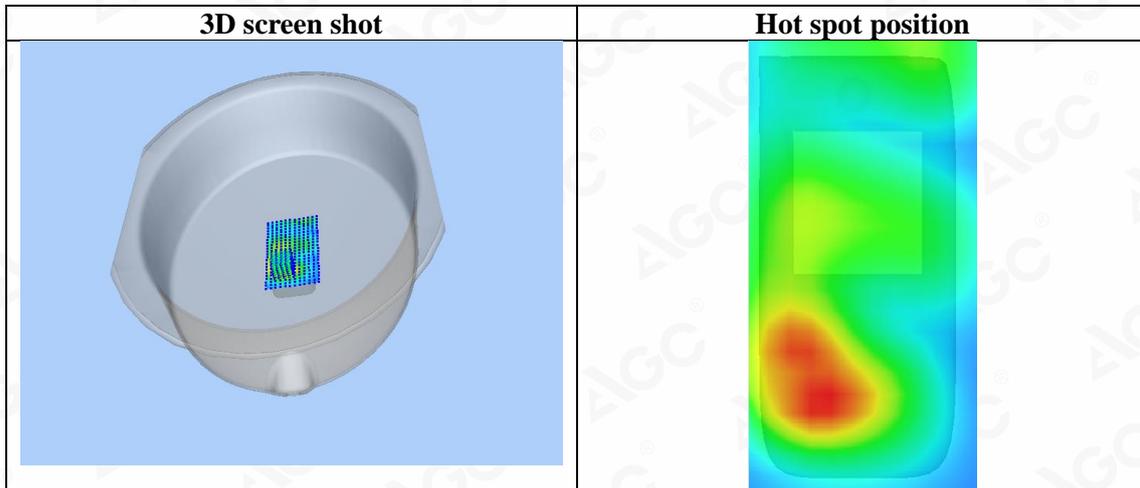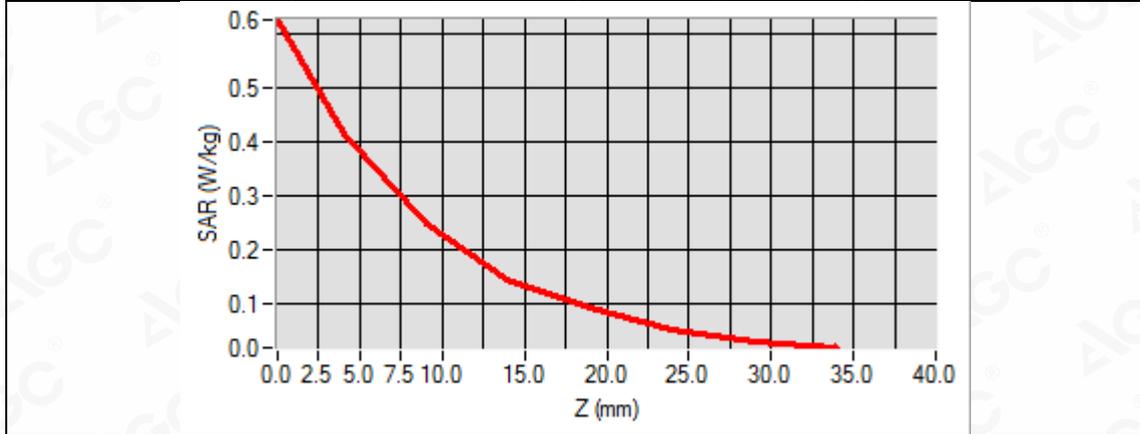

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 3 High-Limbs- Edge 3 (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Aug. 03,2020


Communication System: LTE; Communication System Band: LTE Band 3; Duty Cycle: 1:1; Conv.F=4.48
Frequency: 1775MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.08$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):21.7, Liquid temperature (°C):21.4

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/LTE Band 3 High- Limbs - Edge 3 /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE Band 3 High- Limbs - Edge 3 /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Edge 3
Band	LTE Band 3
Channels	High
Signal	OFDM (Crest factor: 1.0)

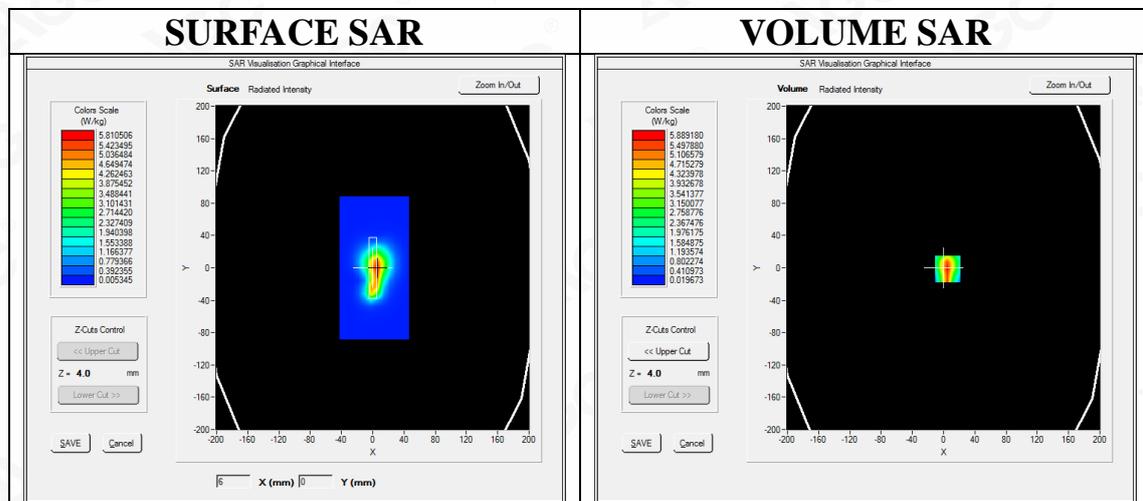

Maximum location: X=5.00, Y=-1.00
SAR Peak: 10.69 W/kg



SAR 10g (W/Kg)	2.607654
SAR 1g (W/Kg)	5.428067

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	10.0258	5.8892	2.9089	1.5659	0.8633	0.4705	0.2575

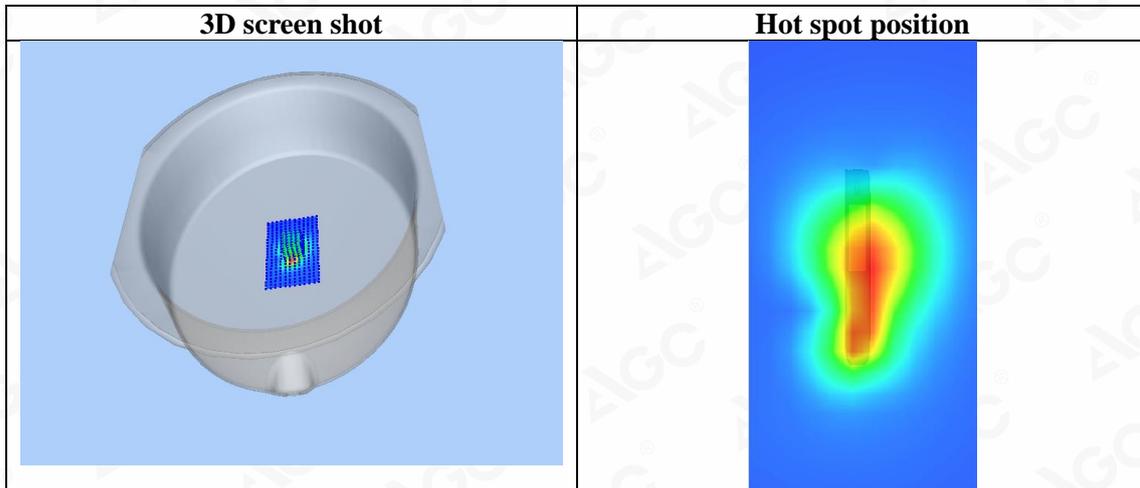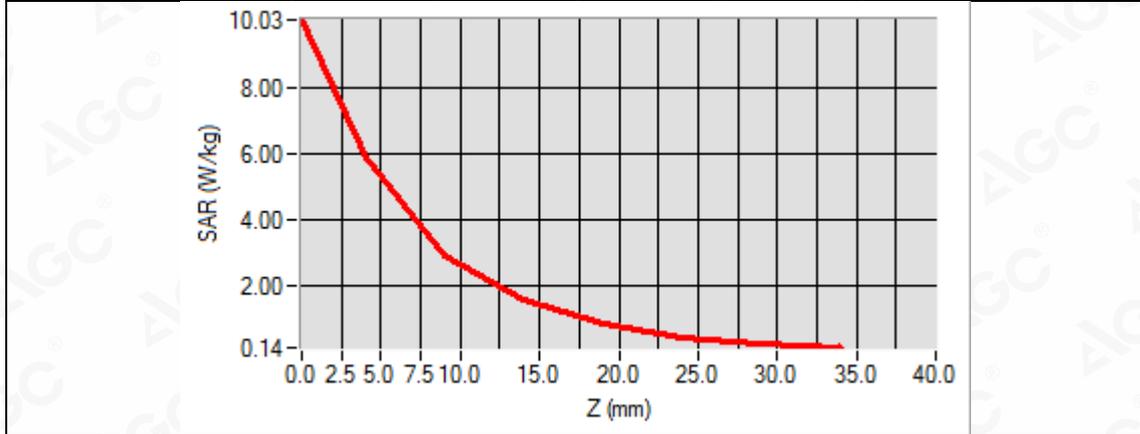

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 7 High-Touch-Left (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 25,2020


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81
Frequency: 2560MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 High-Touch-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

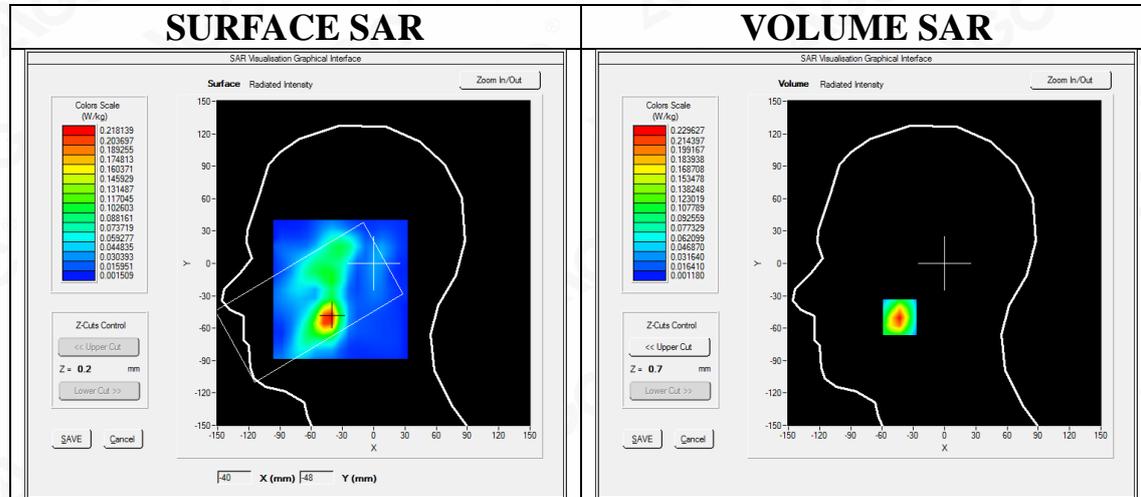

Maximum location: X=-43.00, Y=-50.00



SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.099927
SAR 1g (W/Kg)	0.211473

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3637	0.2296	0.1241	0.0673	0.0356	0.0199	0.0110

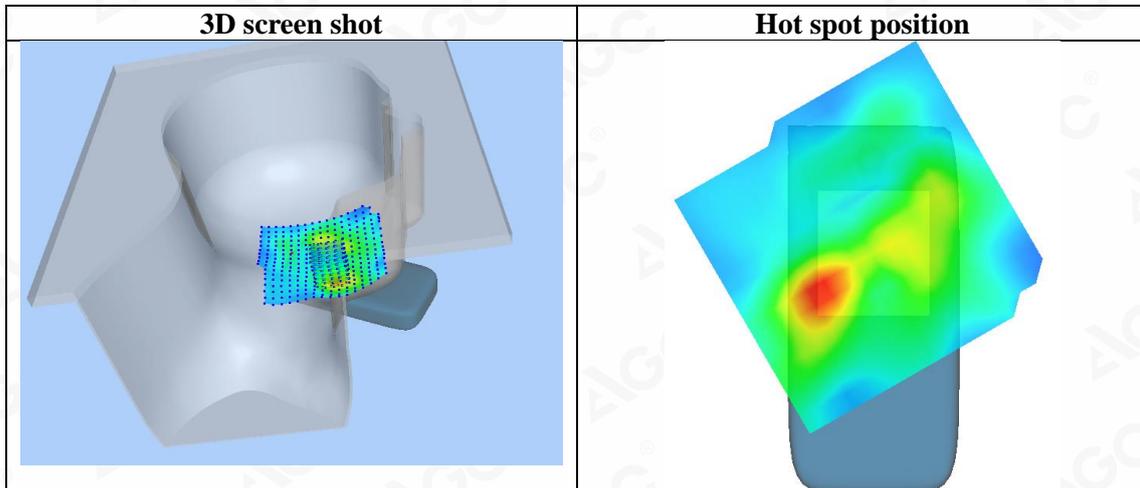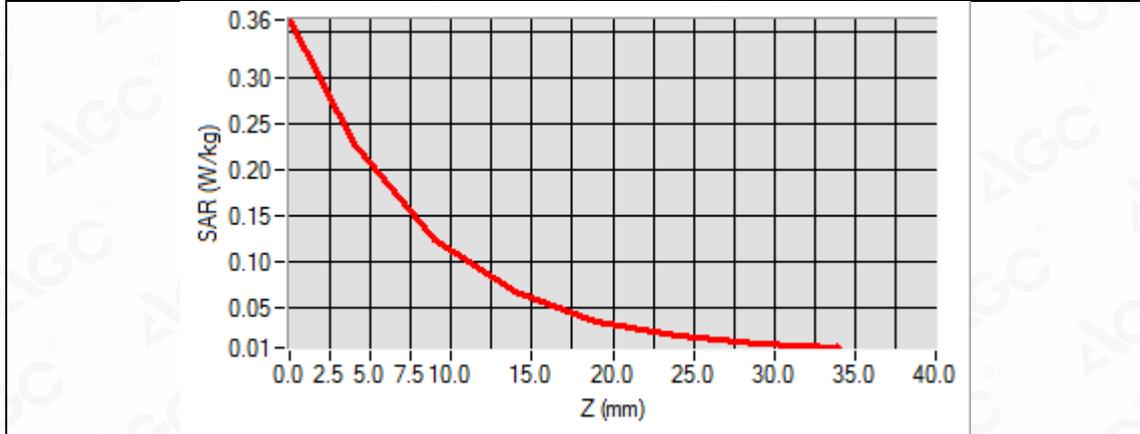

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 7 Mid-Body-Front(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 25,2020


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81
Frequency: 2535MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Mid-Body- Front /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 Mid-Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

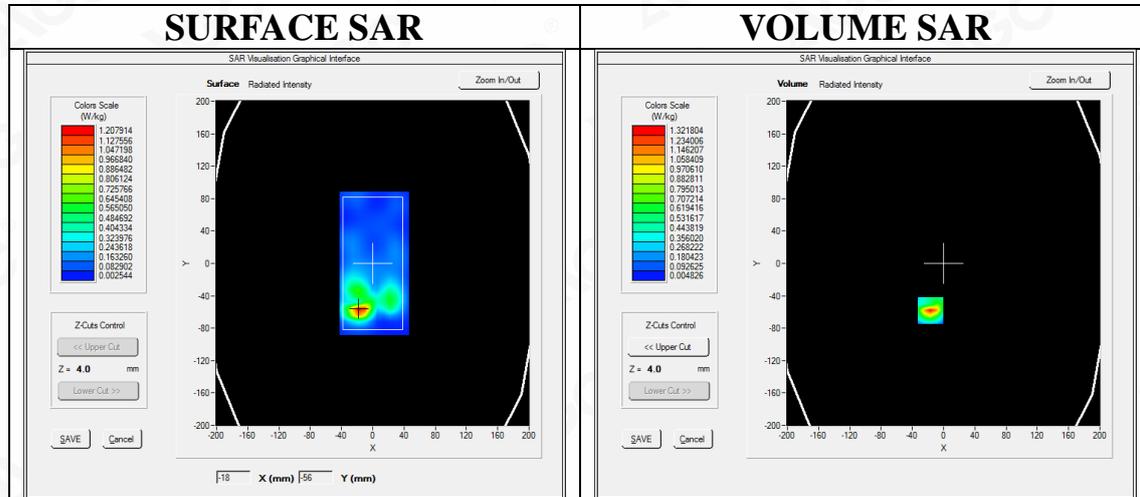

Maximum location: X=-17.00, Y=-58.00
SAR Peak: 2.43 W/kg



SAR 10g (W/Kg)	0.476759
SAR 1g (W/Kg)	1.194211

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.4582	1.3218	0.5428	0.2366	0.1025	0.0459	0.0212

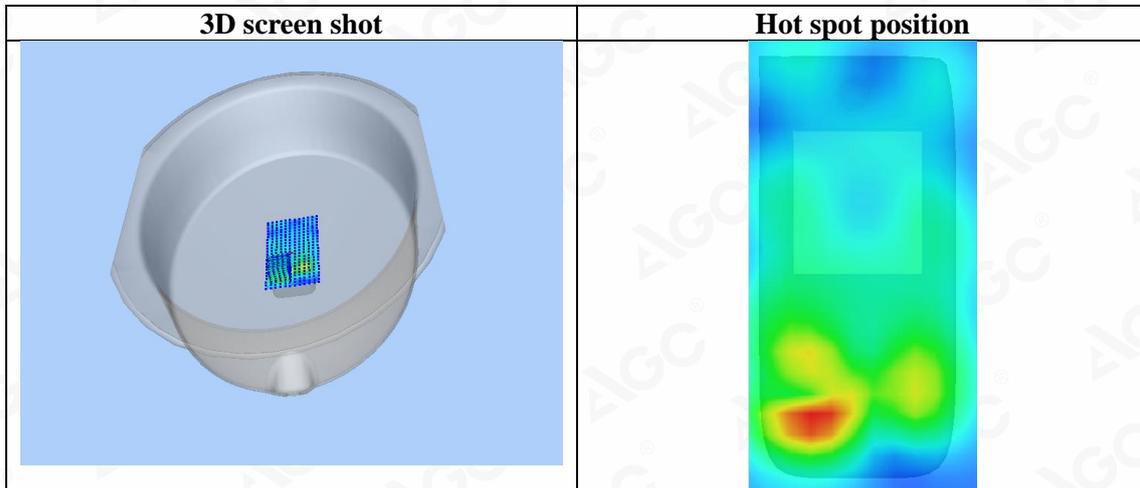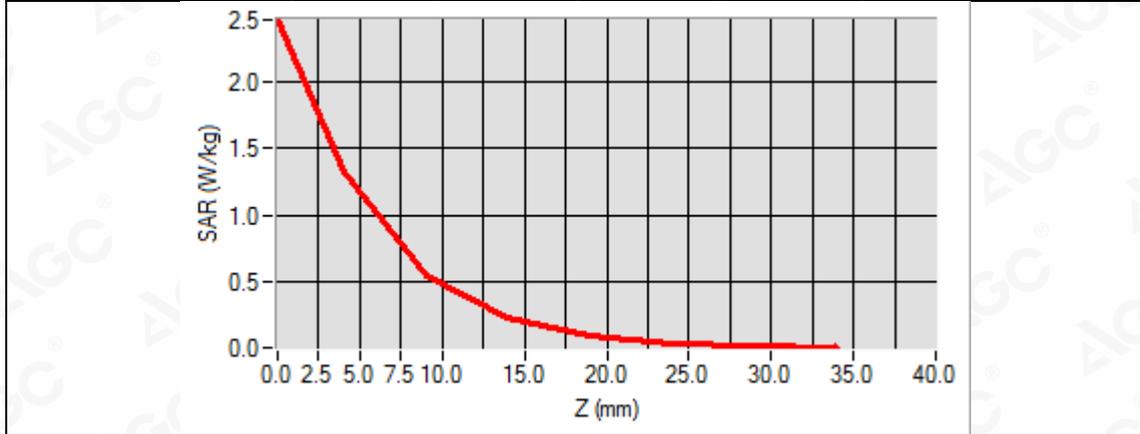

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 7 High-Hotspot-Back(1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 25,2020


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81
Frequency: 2560MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High-Hotspot-Back /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 High-Hotspot-Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

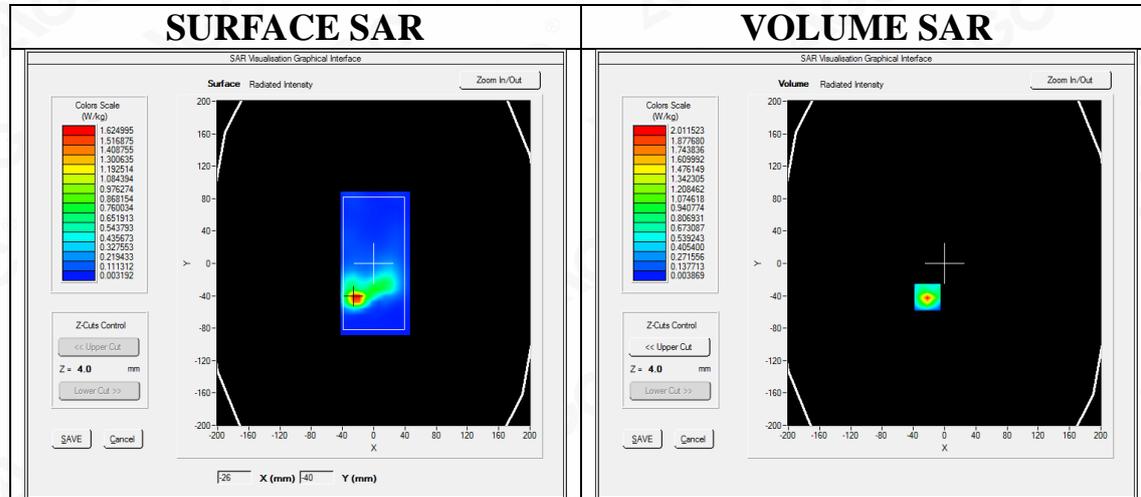



Maximum location: X=-22.00, Y=-42.00
SAR Peak: 3.72 W/kg

SAR 10g (W/Kg)	0.244764
SAR 1g (W/Kg)	0.482856

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



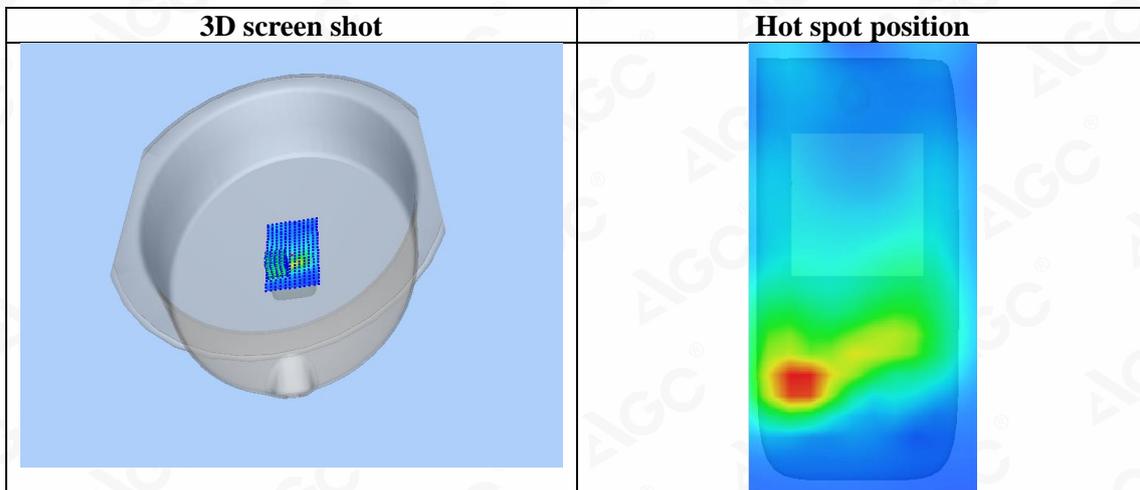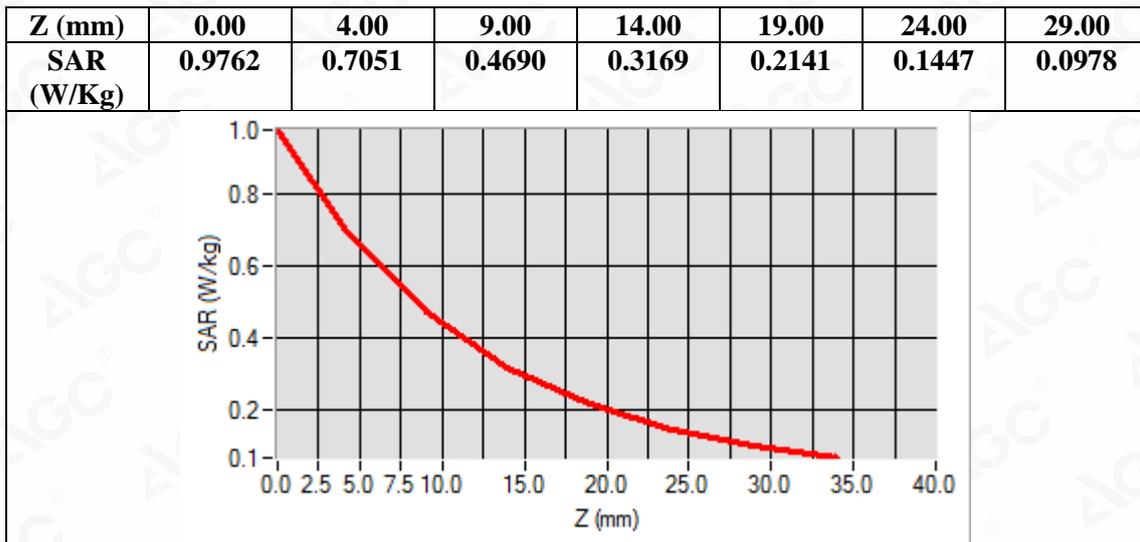

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 7 Mid-Limbs- Edge 3 (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 25,2020


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81
Frequency: 2535MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Mid- Limbs - Edge 3 /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 Mid- Limbs - Edge 3/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Edge 3
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

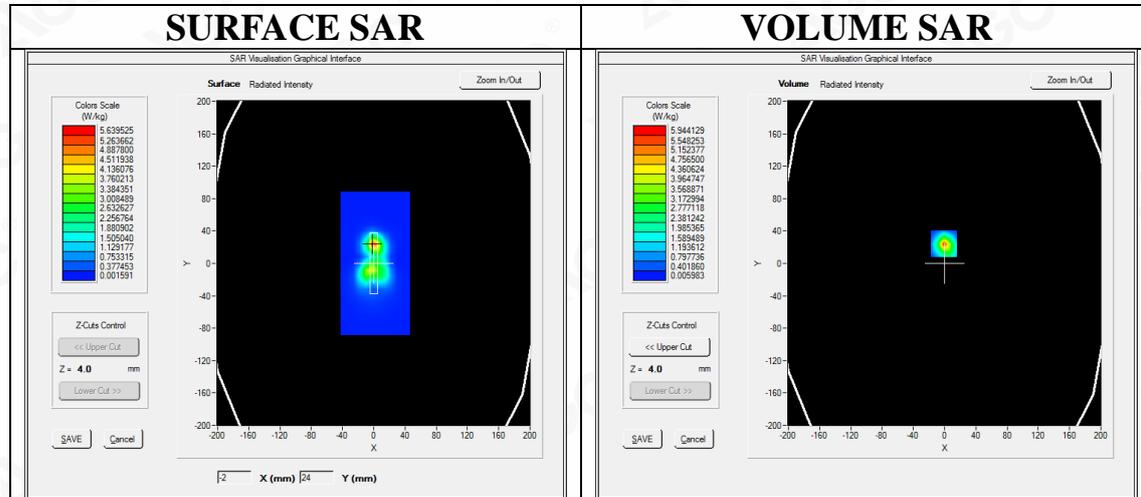

Maximum location: X=-1.00, Y=24.00
SAR Peak: 11.80 W/kg



SAR 10g (W/Kg)	1.736364
SAR 1g (W/Kg)	5.160867

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	11.9308	5.9441	2.0557	0.7518	0.2848	0.1116	0.0459

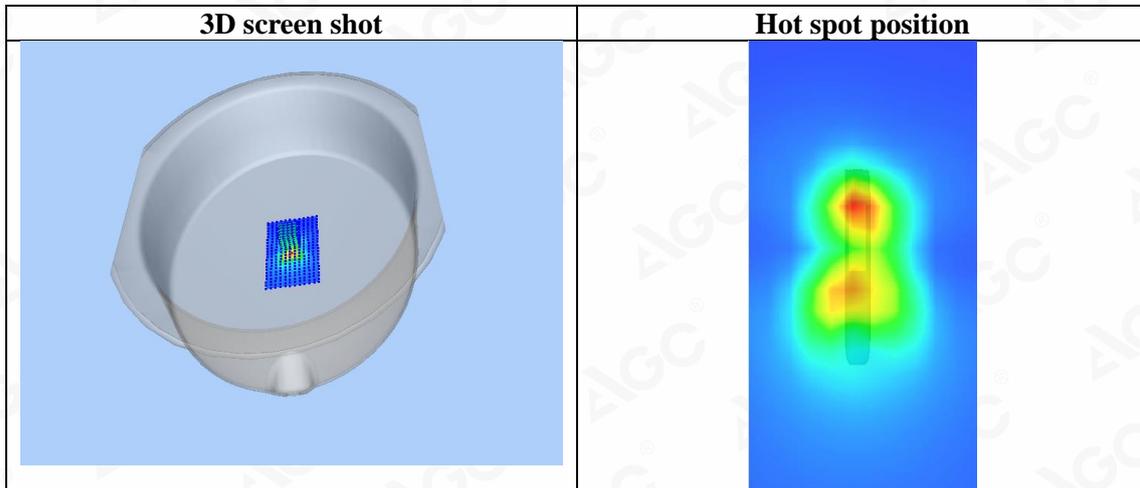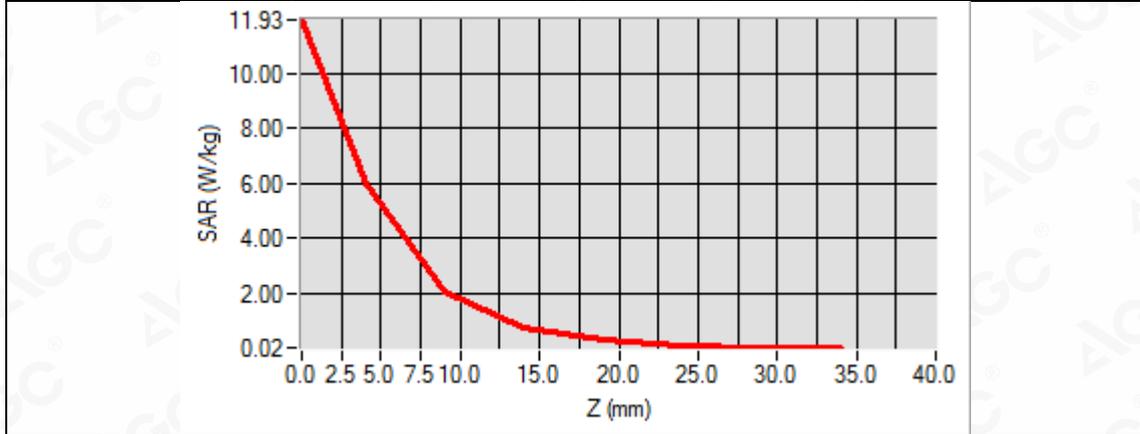

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 7 High-Limbs-Edge 3 (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 25,2020


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=3.81
Frequency: 2560MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 38.59$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 19.6, Liquid temperature (°C): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High - Limbs - Edge 3 /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 High - Limbs - Edge 3 /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Edge 3
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

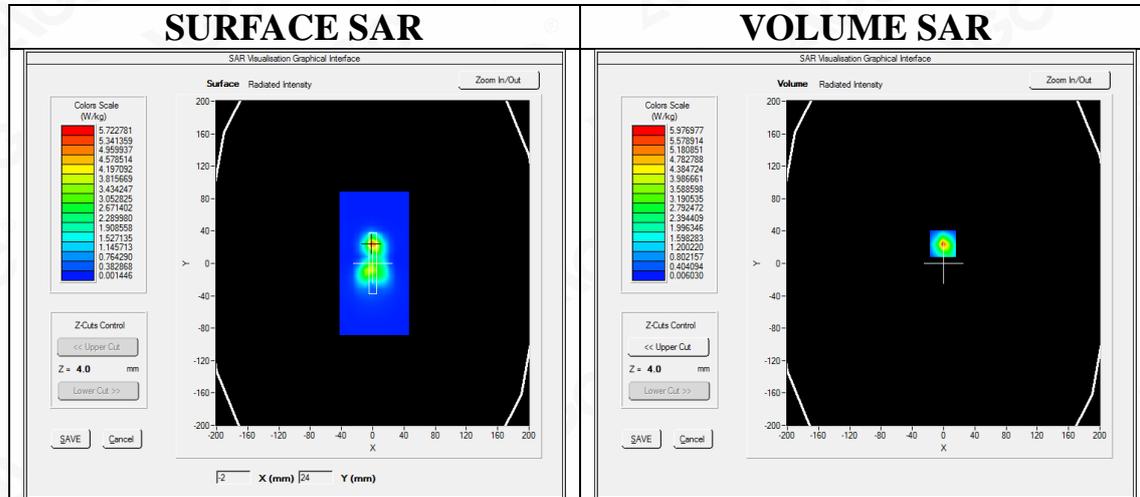

Maximum location: X=-1.00, Y=24.00

SAR Peak: 11.89 W/kg



SAR 10g (W/Kg)	1.748542
SAR 1g (W/Kg)	5.200162

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	12.0124	5.9770	2.0615	0.7539	0.2865	0.1120	0.0456

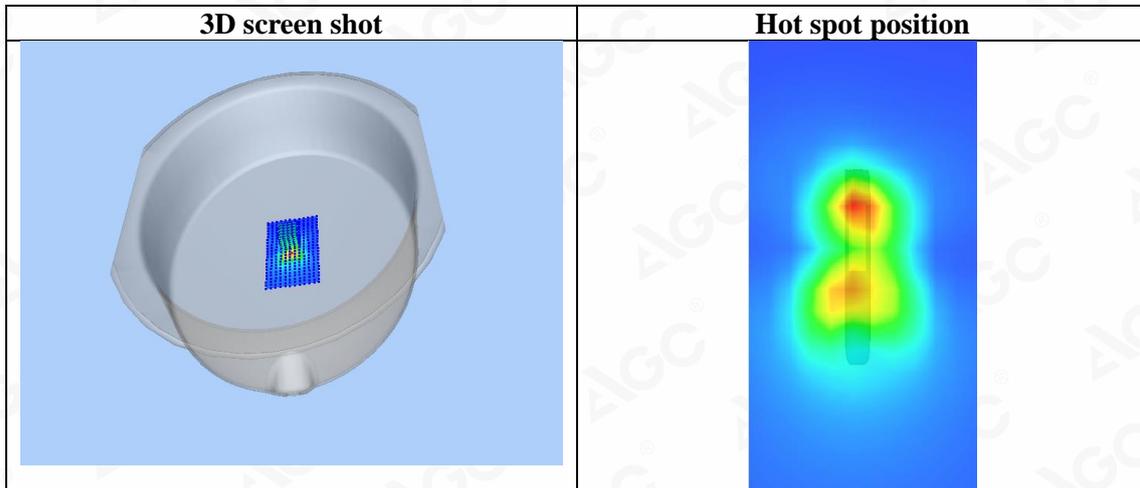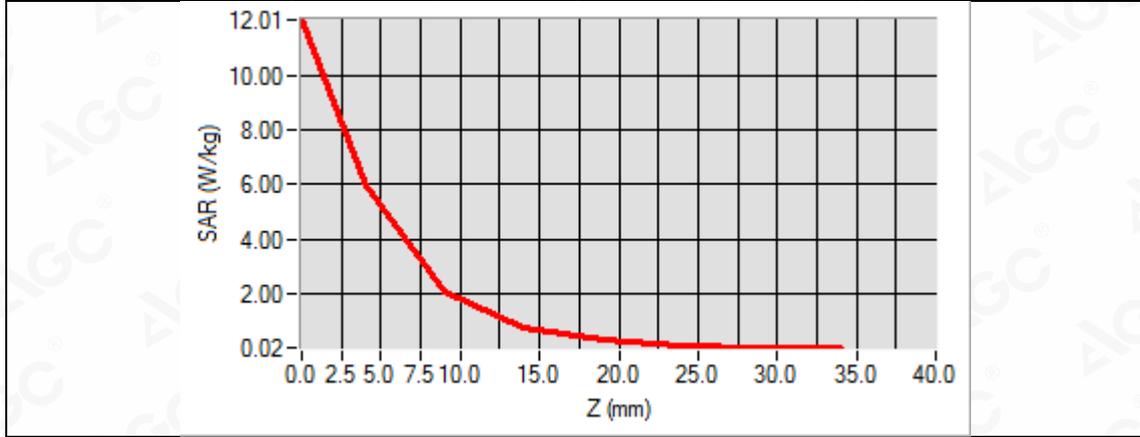

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 8 Mid-Touch-Left (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 21,2020


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.5MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.98$ mho/m; $\epsilon_r = 40.44$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 8 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 8
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

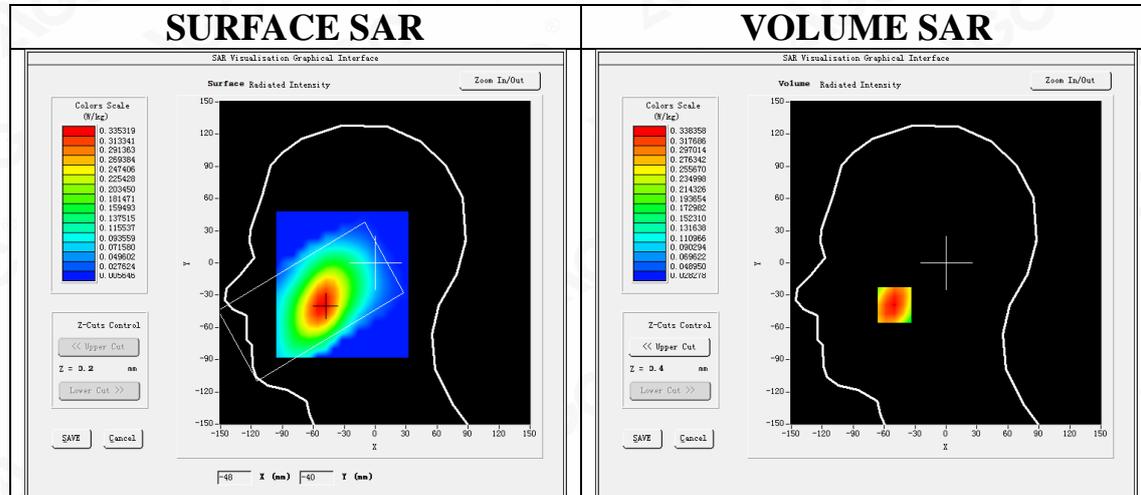

Maximum location: X=-50.00, Y=-39.00

SAR Peak: 0.44 W/kg



SAR 10g (W/Kg)	0.233094
SAR 1g (W/Kg)	0.328433

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.4343	0.3384	0.2513	0.1924	0.1469	0.1107	0.0848

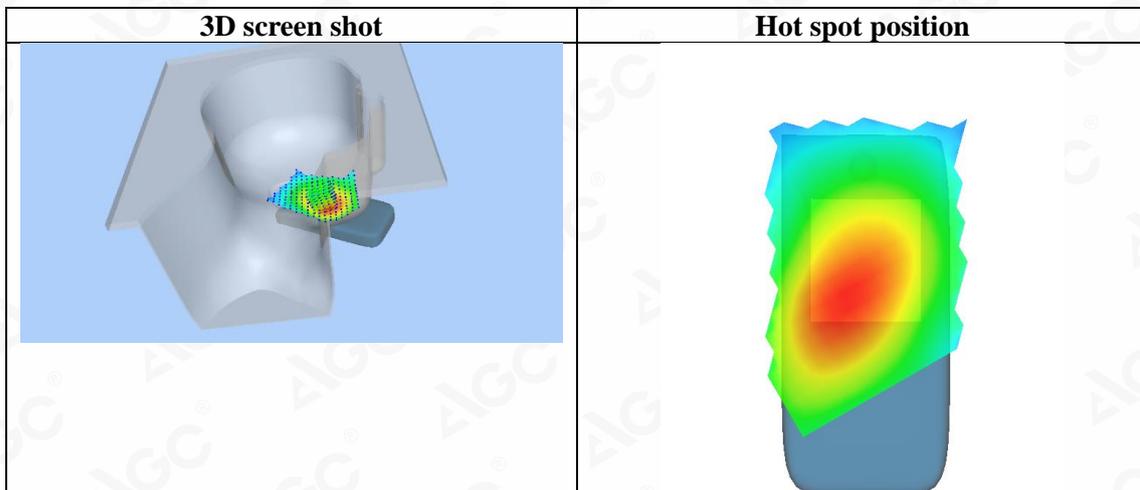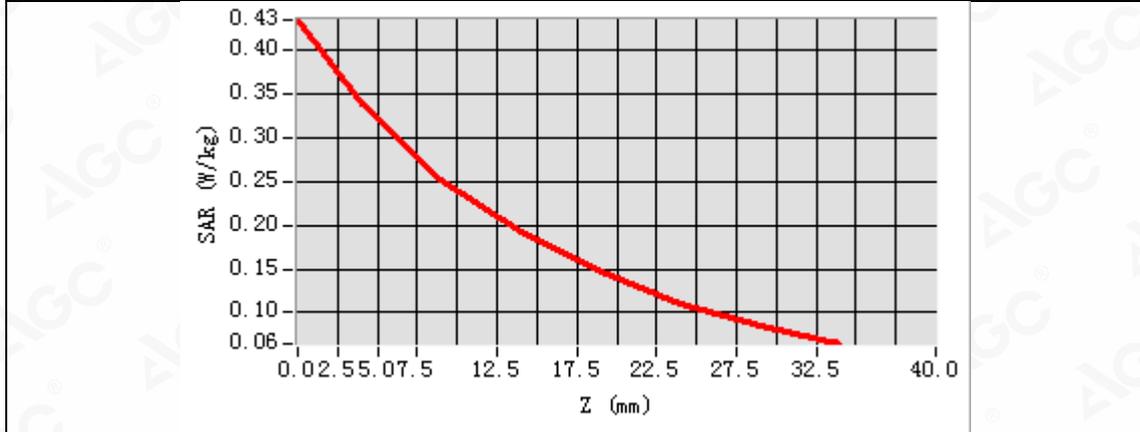

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 8 Mid-Body-Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 21,2020


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.5MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.98$ mho/m; $\epsilon_r = 40.44$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 8 Mid-Body-Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 8
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

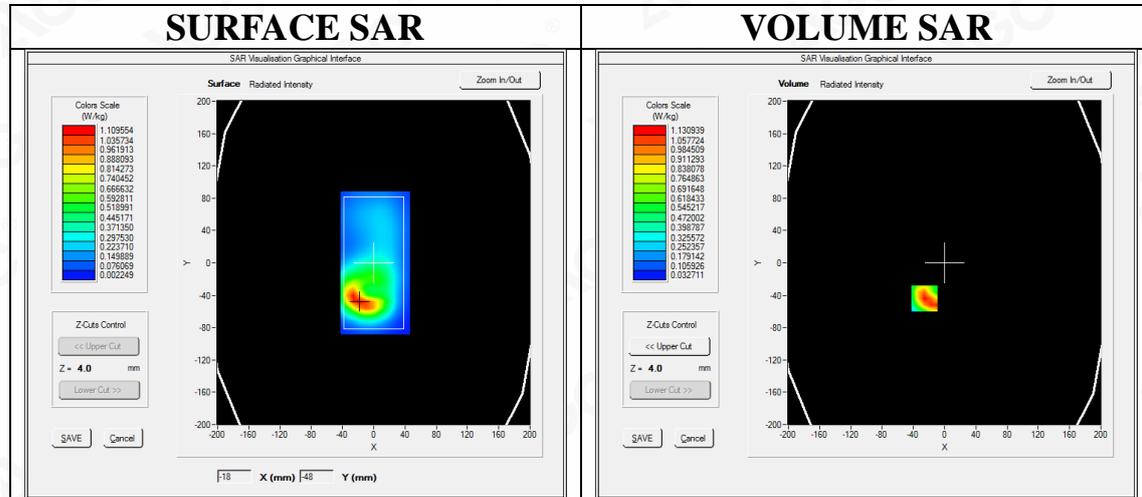

Maximum location: X=-26.00, Y=-44.00
SAR Peak: 1.82 W/kg



SAR 10g (W/Kg)	0.585432
SAR 1g (W/Kg)	1.078628

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.8272	1.1309	0.6086	0.3463	0.2058	0.1256	0.0780

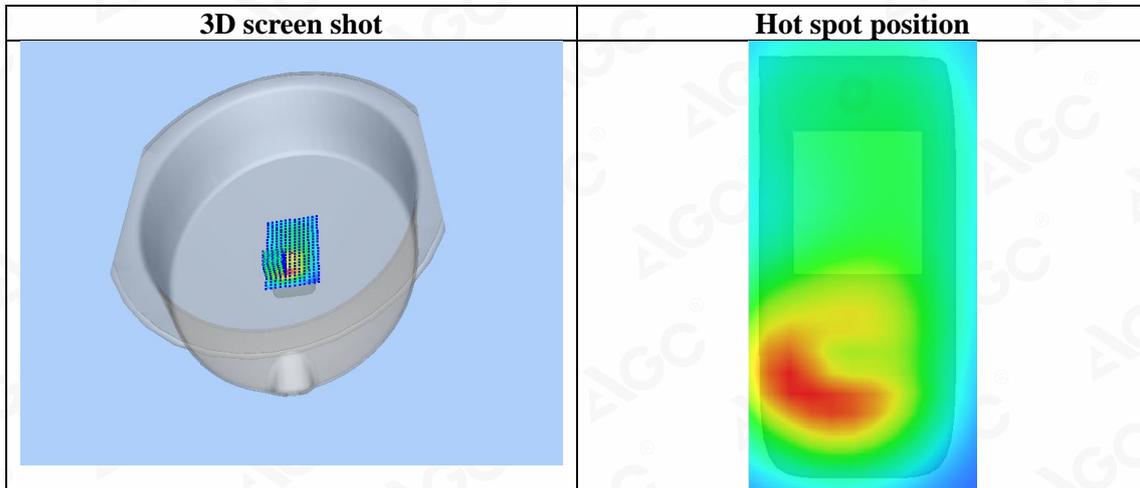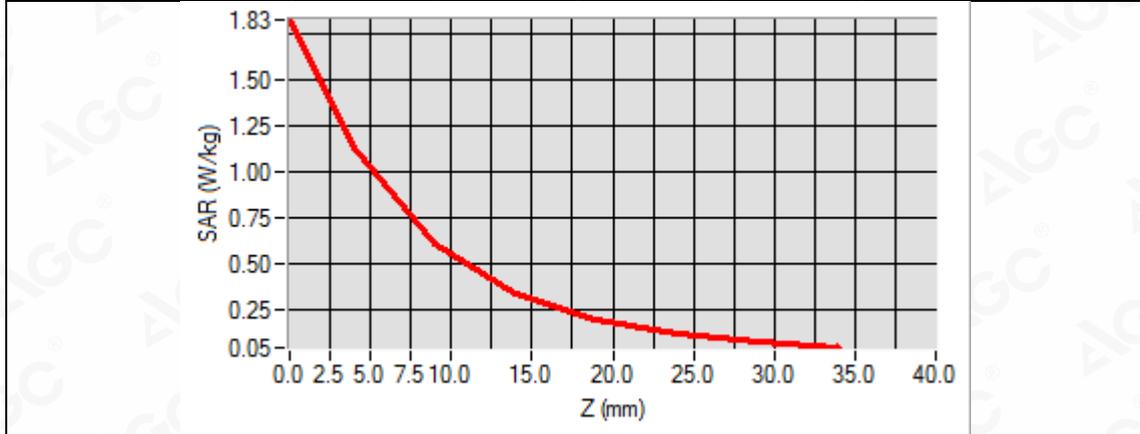

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 8 Low-Hotspot-Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 21,2020


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.16
Frequency: 885MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.98$ mho/m; $\epsilon_r=40.44$; $\rho= 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 Low-Hotspot-Back /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 8 Low-Hotspot-Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	LTE BAND 8
Channels	Low
Signal	OFDM (Crest factor: 1.0)

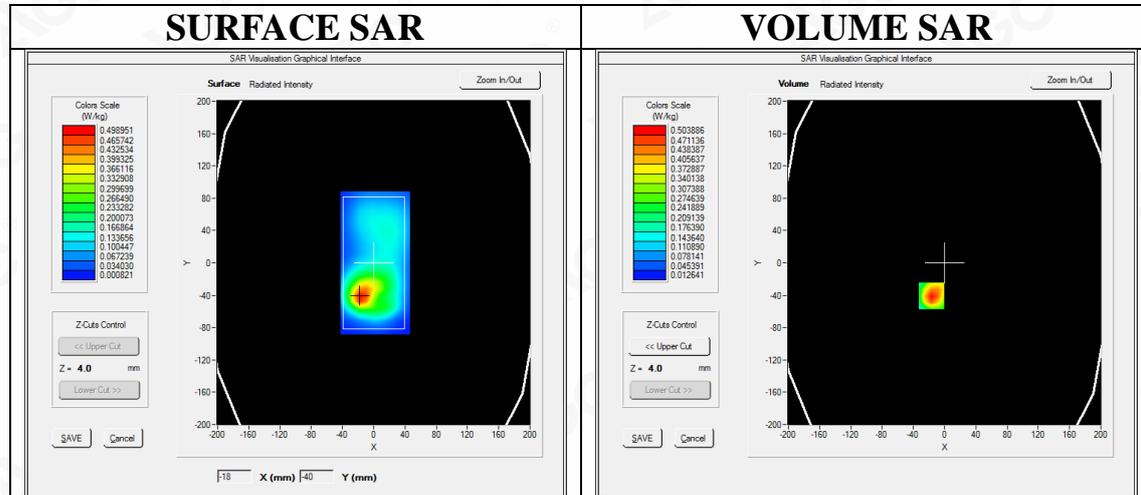

Maximum location: X=-17.00, Y=-41.00

SAR Peak: 0.78 W/kg



SAR 10g (W/Kg)	0.272413
SAR 1g (W/Kg)	0.482437

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.7539	0.5039	0.3001	0.1811	0.1112	0.0692	0.0441

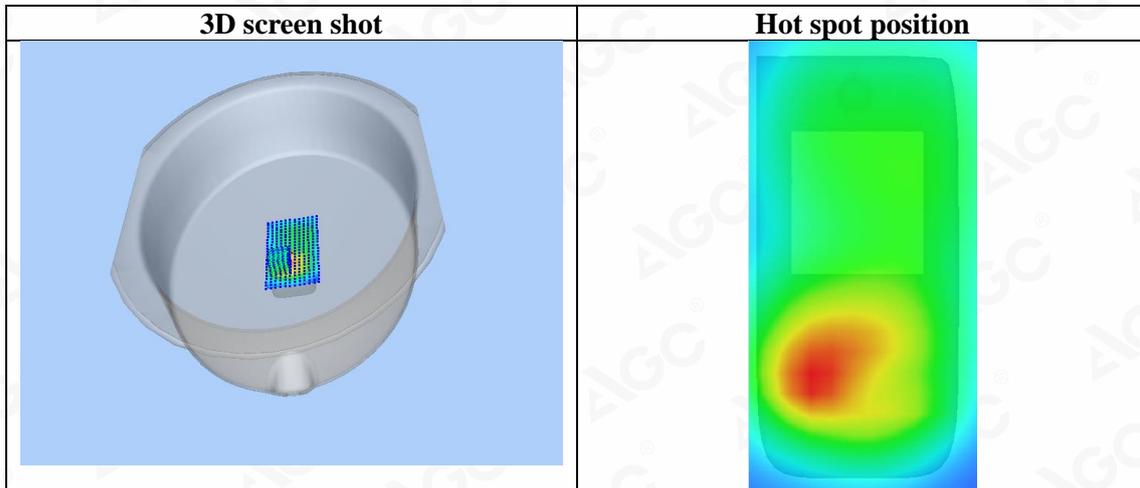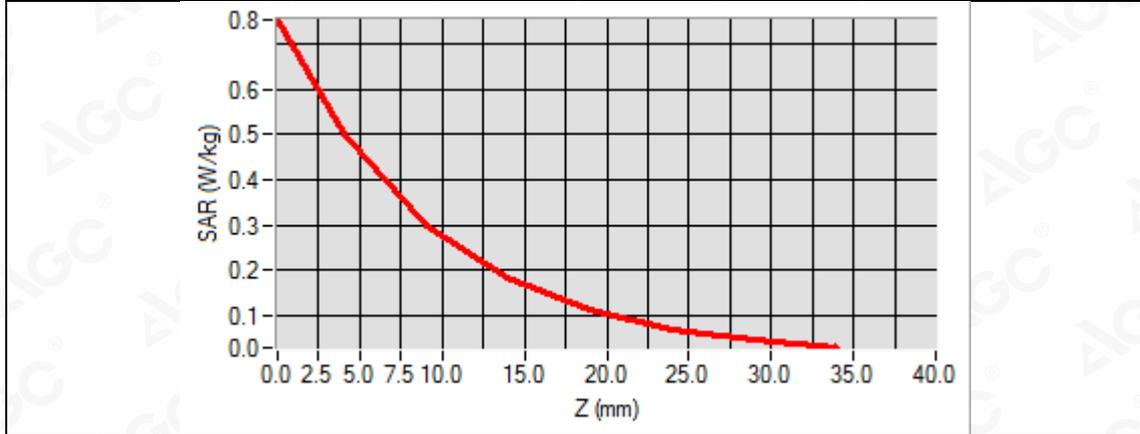

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 8 High-Hotspot-Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 21,2020


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.16
Frequency: 910MHz; Medium parameters used: $f = 900 \text{ MHz}$; $\sigma=0.98 \text{ mho/m}$; $\epsilon_r=40.44$; $\rho= 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 High -Hotspot-Back /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 8 High -Hotspot-Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	LTE BAND 8
Channels	High
Signal	OFDM (Crest factor: 1.0)

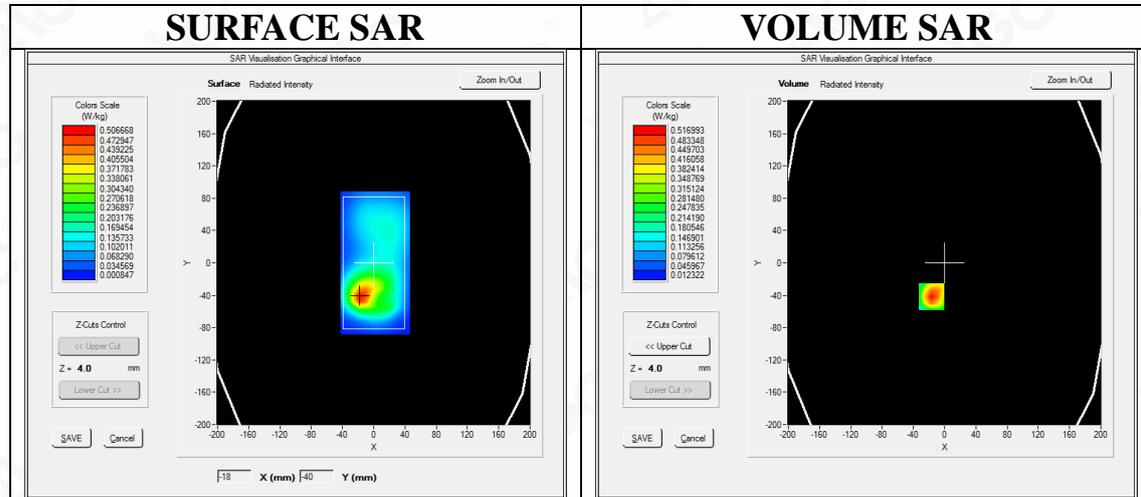

Maximum location: X=-17.00, Y=-42.00

SAR Peak: 0.79 W/kg



SAR 10g (W/Kg)	0.278620
SAR 1g (W/Kg)	0.492129

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.7810	0.5170	0.3041	0.1820	0.1113	0.0692	0.0441

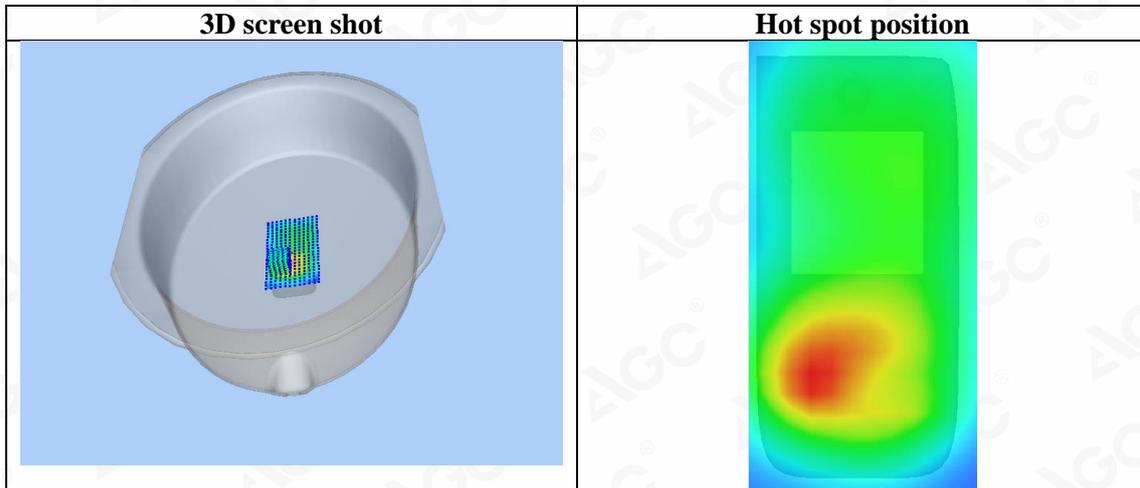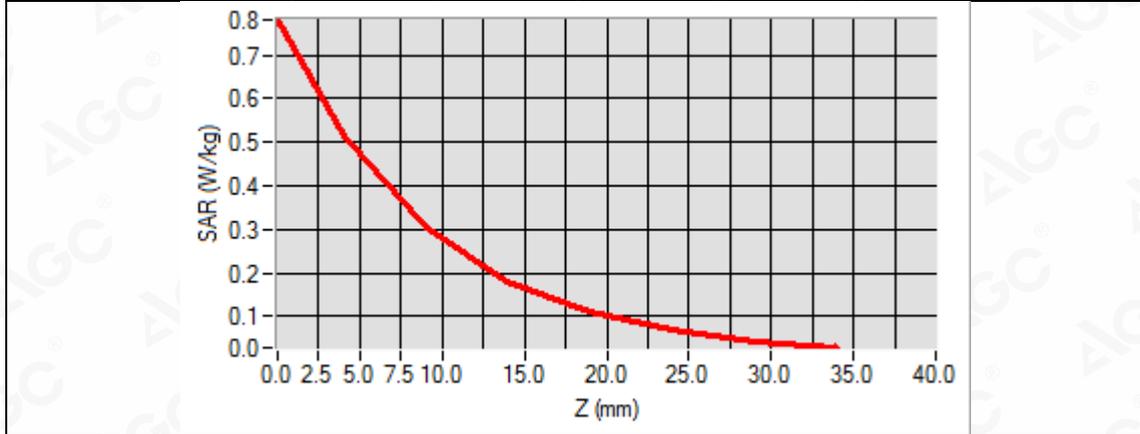

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 8 Mid-Limbs-Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 21,2020


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.16
Frequency: 897.5MHz; Medium parameters used: $f = 900$ MHz; $\sigma=0.98$ mho/m; $\epsilon_r = 40.44$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 Mid- Limbs -Back/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 8 Mid- Limbs -Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	LTE BAND 8
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

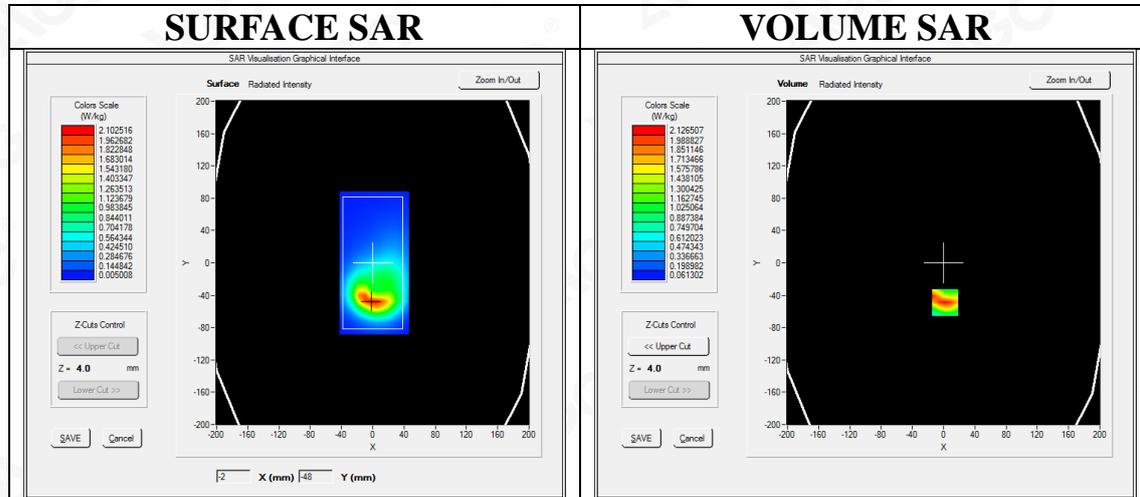

Maximum location: X=2.00, Y=-49.00
SAR Peak: 3.45 W/kg



SAR 10g (W/Kg)	1.062463
SAR 1g (W/Kg)	1.974406

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	3.4558	2.1265	1.1391	0.6491	0.3921	0.2384	0.1495

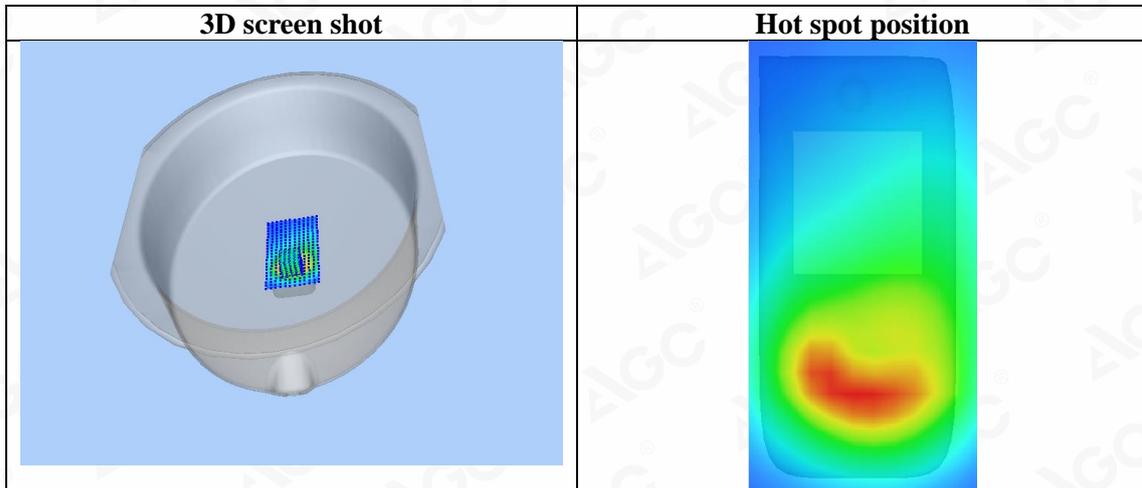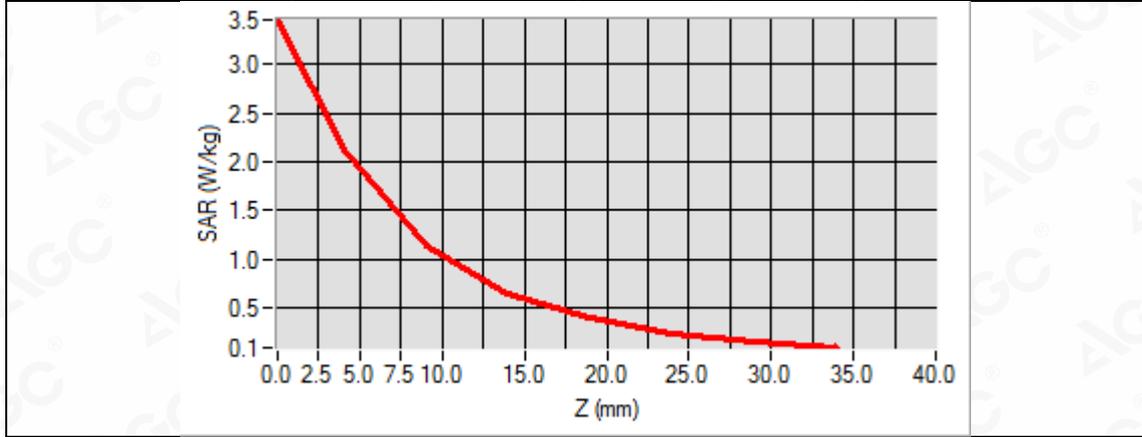

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 20 High-Touch-Left (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 30,2020


Communication System: LTE; Communication System Band: LTE Band 20; Duty Cycle:1:1; Conv.F=5.26
Frequency: 852MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section
Ambient temperature ($^{\circ}\text{C}$): 19.6, Liquid temperature ($^{\circ}\text{C}$): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 20 High-Touch-Left /Area Scan: Measurement grid: $dx=8\text{mm}$, $y=8\text{mm}$
Configuration/ LTE BAND 20 High-Touch-Left /Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Area Scan	$dx=8\text{mm}$ $dy=8\text{mm}$, $h= 5.00 \text{ mm}$
ZoomScan	$5x5x7$, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 20
Channels	High
Signal	OFDM (Crest factor: 1.0)

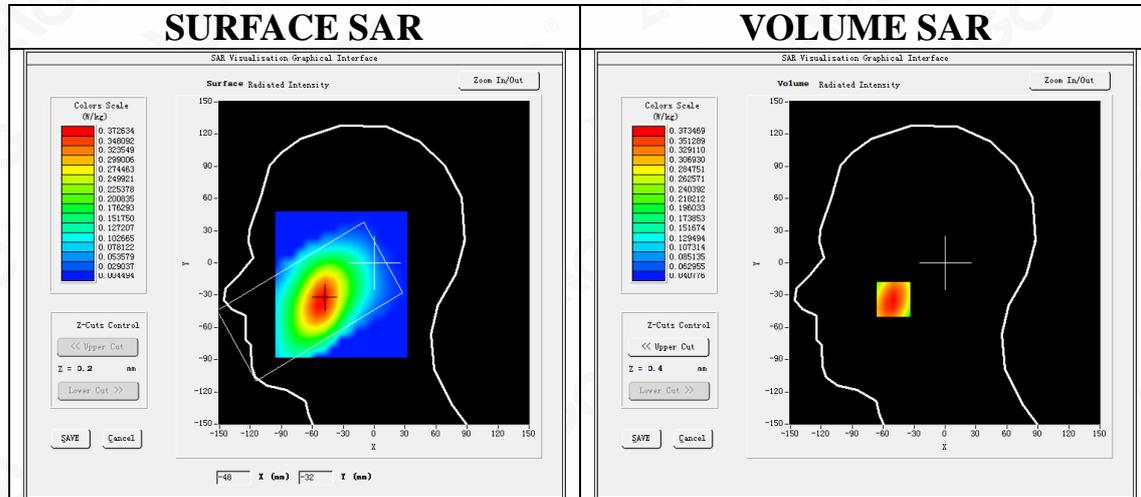

Maximum location: X=-50.00, Y=-34.00



SAR Peak: 0.47 W/kg

SAR 10g (W/Kg)	0.263792
SAR 1g (W/Kg)	0.361860

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.4626	0.3735	0.2882	0.2267	0.1768	0.1380	0.1077

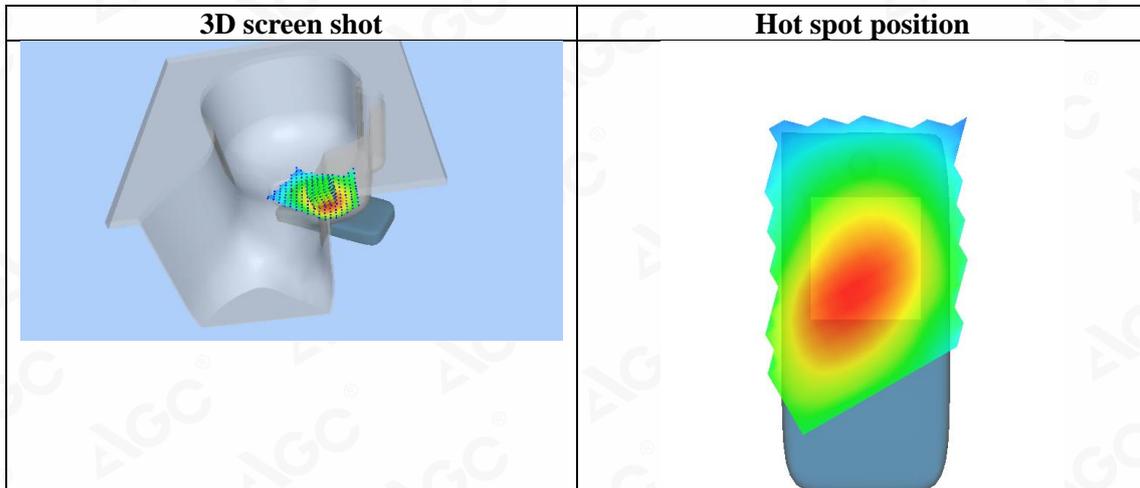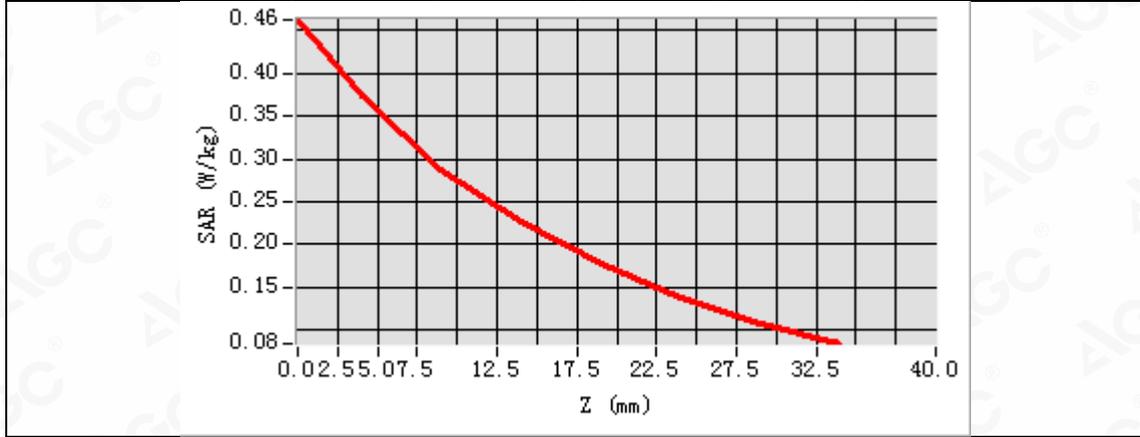

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 20 High-Body-Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 30,2020


Communication System: LTE; Communication System Band: LTE Band 20; Duty Cycle:1:1; Conv.F=5.26
Frequency: 852MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 19.6, Liquid temperature ($^{\circ}\text{C}$): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 20 High-Body-Back /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 20 High-Body-Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 20
Channels	High
Signal	OFDM (Crest factor: 1.0)

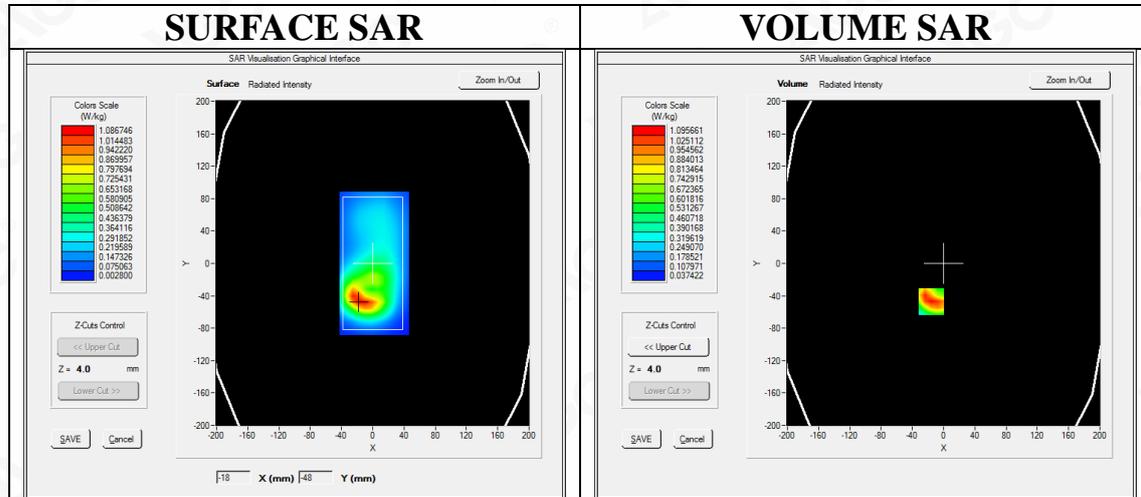

Maximum location: X=-16.00, Y=-47.00
SAR Peak: 1.78 W/kg



SAR 10g (W/Kg)	0.574518
SAR 1g (W/Kg)	1.042172

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.7362	1.0957	0.6080	0.3574	0.2173	0.1359	0.0862

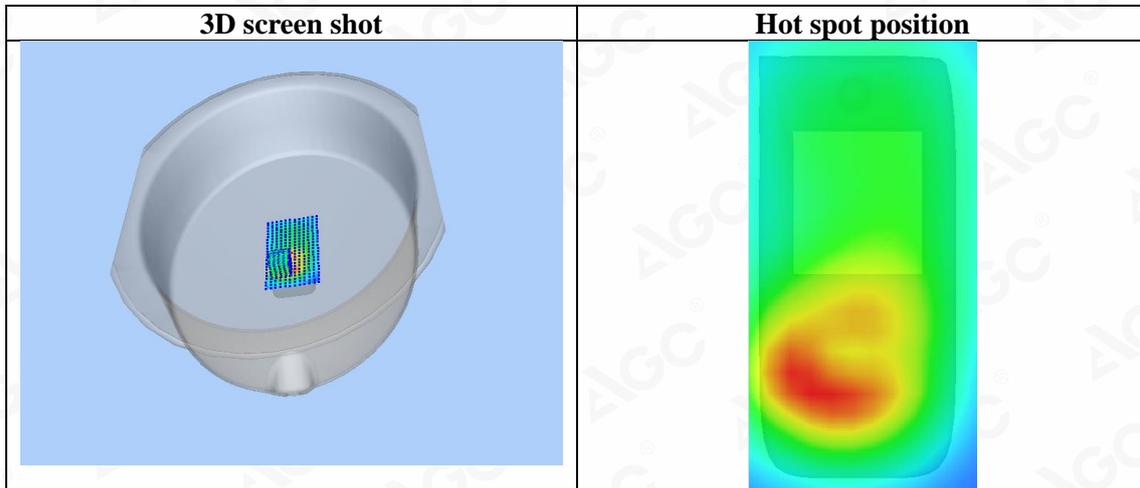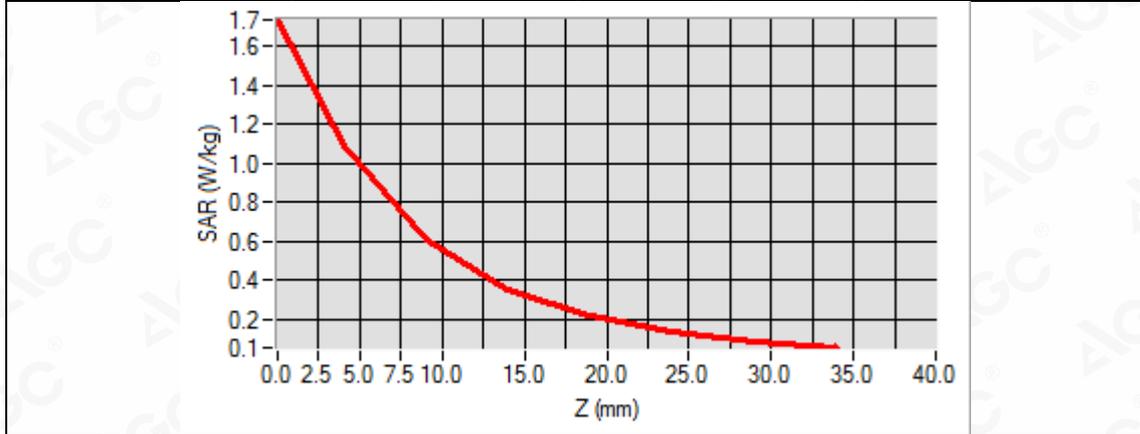

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
LTE Band 20 Mid- Hotspot -Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 30,2020


Communication System: LTE; Communication System Band: LTE Band 20; Duty Cycle:1:1; Conv.F=5.26
Frequency: 847MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 19.6, Liquid temperature ($^{\circ}\text{C}$): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 20 Mid - Hotspot -Back /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 20 Mid - Hotspot -Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	LTE BAND 20
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

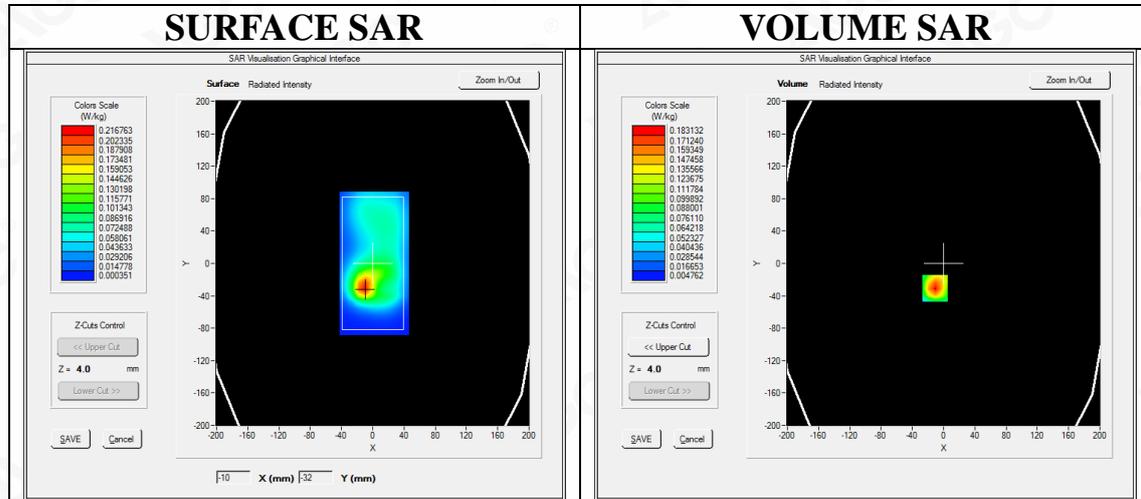

Maximum location: X=-11.00, Y=-31.00



SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.148635
SAR 1g (W/Kg)	0.271567

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



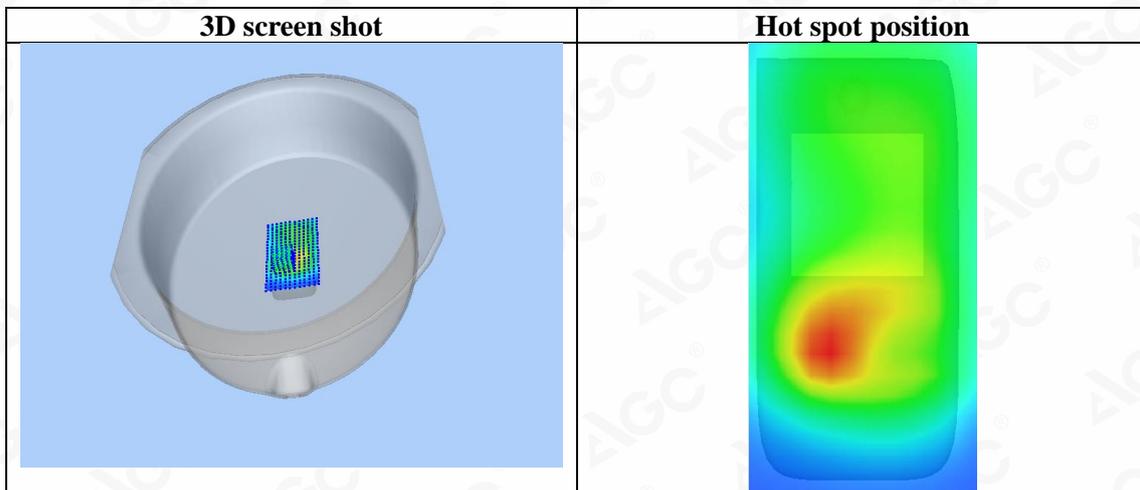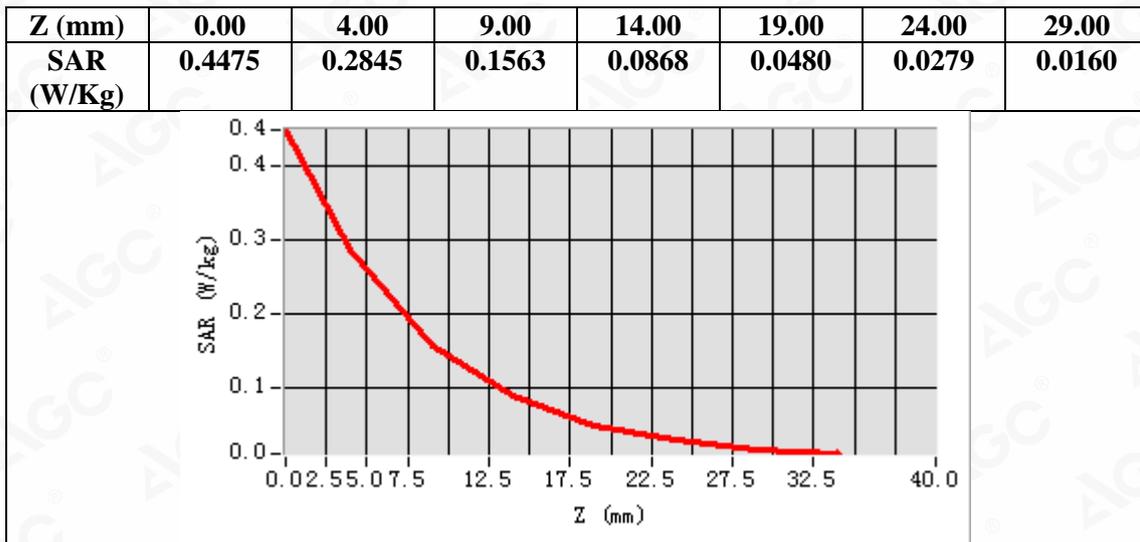

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Test Laboratory: AGC Lab
LTE Band 20 High-Limbs-Back (1RB#0)
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 30,2020


Communication System: LTE; Communication System Band: LTE Band 20; Duty Cycle:1:1; Conv.F=5.26
Frequency: 852MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 40.54$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 19.6, Liquid temperature ($^{\circ}\text{C}$): 19.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 20 High- Limbs -Back /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 20 High- Limbs -Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	LTE BAND 20
Channels	High
Signal	OFDM (Crest factor: 1.0)

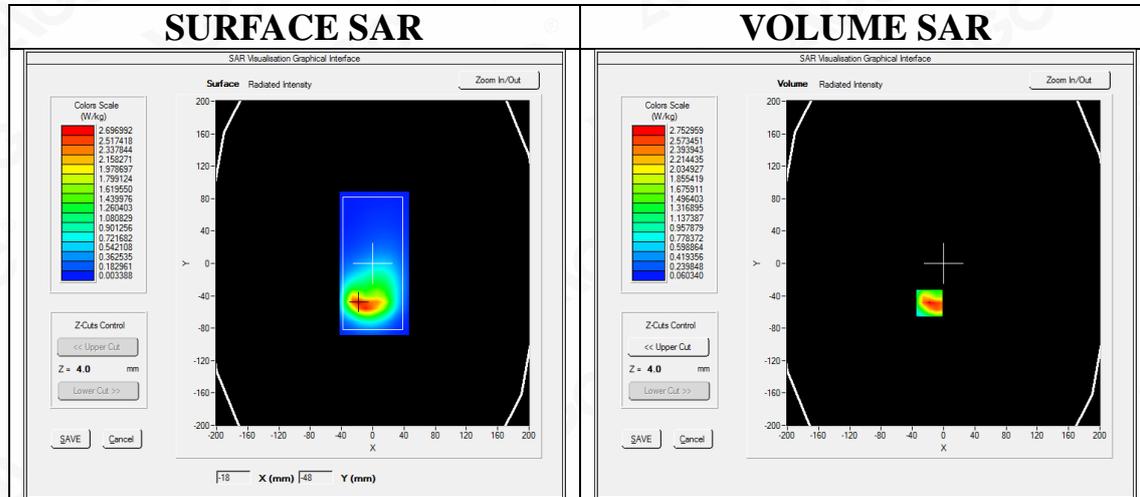

Maximum location: X=-18.00, Y=-49.00
SAR Peak: 4.70 W/kg



SAR 10g (W/Kg)	1.373150
SAR 1g (W/Kg)	2.653910

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.6897	2.7530	1.3695	0.7570	0.4422	0.2676	0.1674

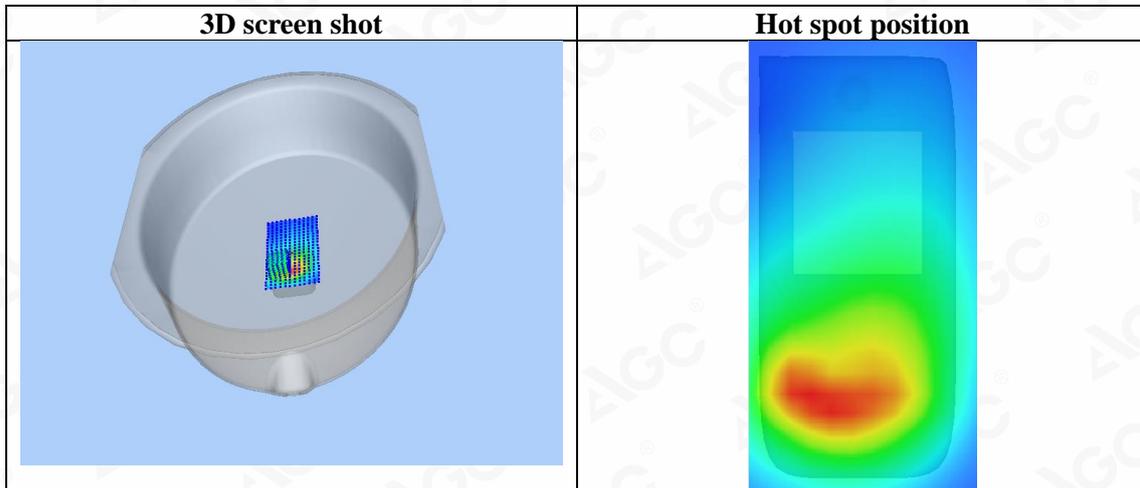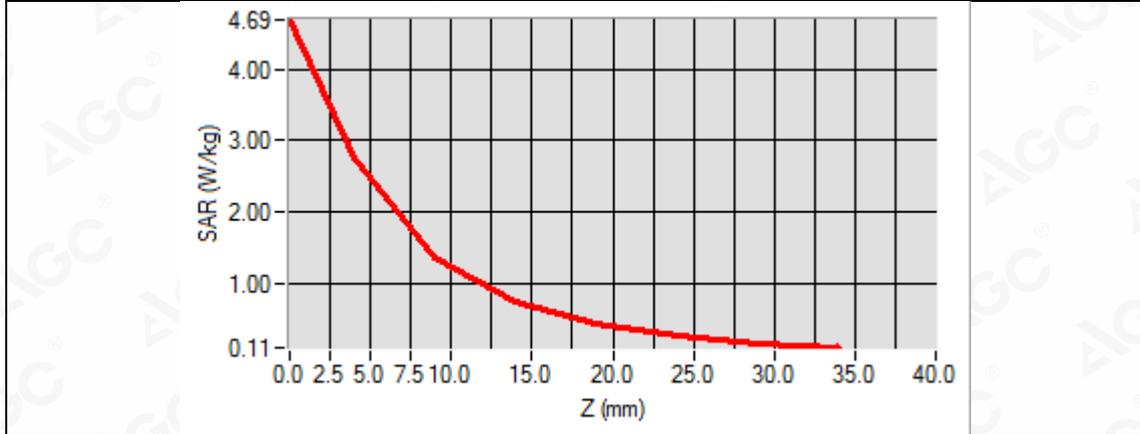

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



WIFI MODE

Test Laboratory: AGC Lab
802.11b Mid- Touch-Right
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 22,2020


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;
Frequency: 2442 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):22.6, Liquid temperature (°C): 22.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b Mid- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

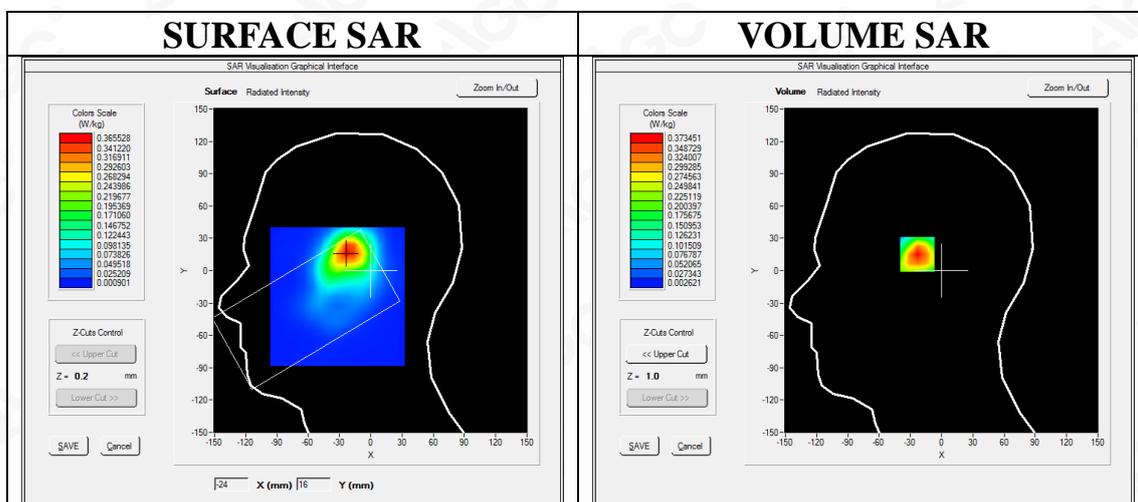

Maximum location: X=-22.00, Y=18.00

SAR Peak: 0.65 W/kg



SAR 10g (W/Kg)	0.172578
SAR 1g (W/Kg)	0.356498

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.6453	0.3735	0.1754	0.0826	0.0392	0.0188	0.0095

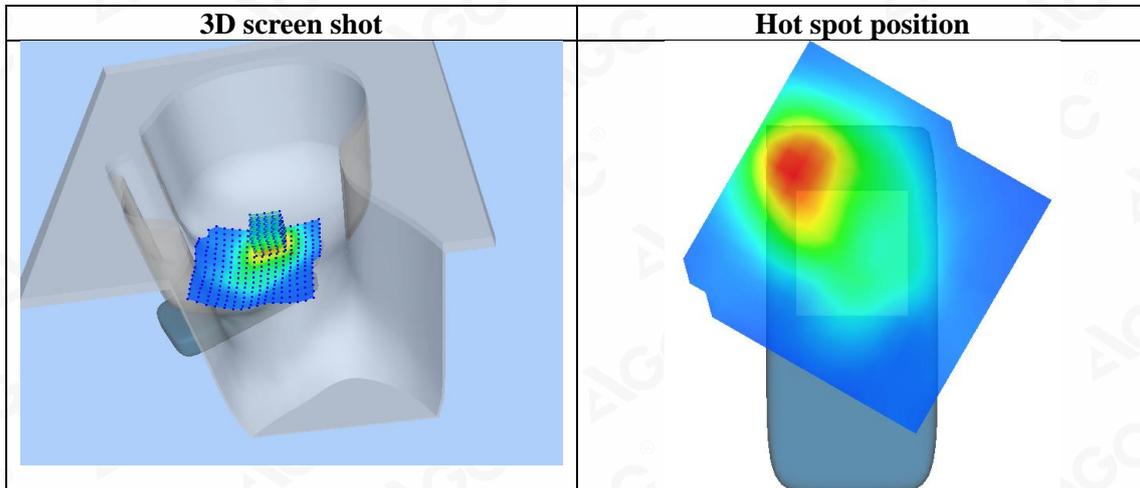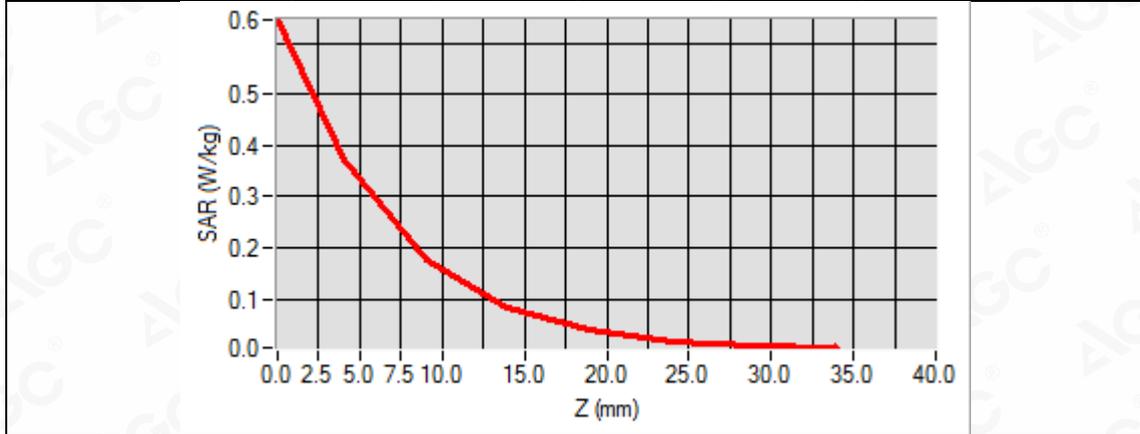

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
802.11b High- Touch-Right
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 22,2020


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;
Frequency: 2472 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):22.6, Liquid temperature (°C): 22.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: SAM twin phantom
Measurement SW: OpenSAR V4_02_35

Configuration/802.11b High- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b High- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	2450MHz
Channels	High
Signal	Crest factor: 1.0

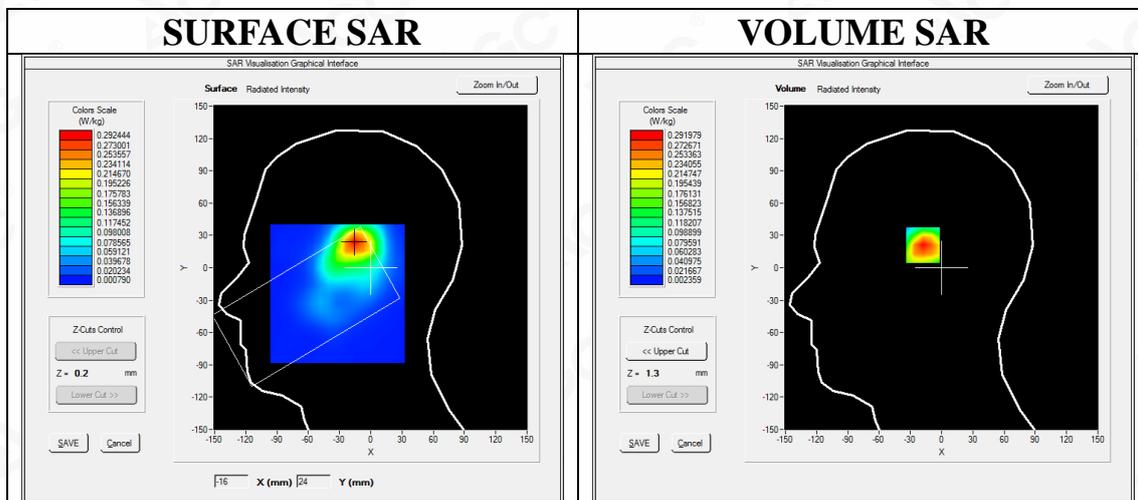



Maximum location: X=-16.00, Y=24.00
SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.136376
SAR 1g (W/Kg)	0.279876

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.5137	0.2920	0.1333	0.0617	0.0291	0.0145	0.0073

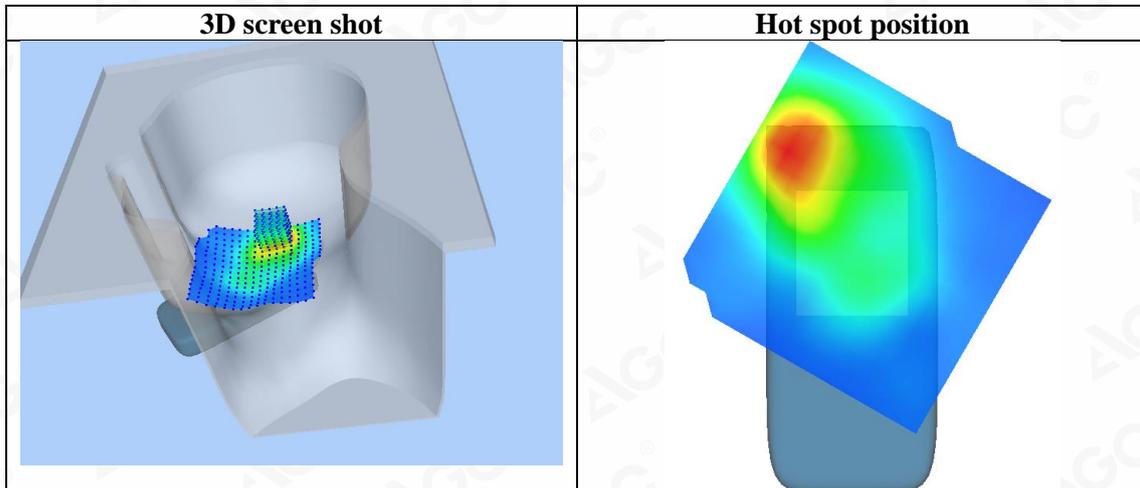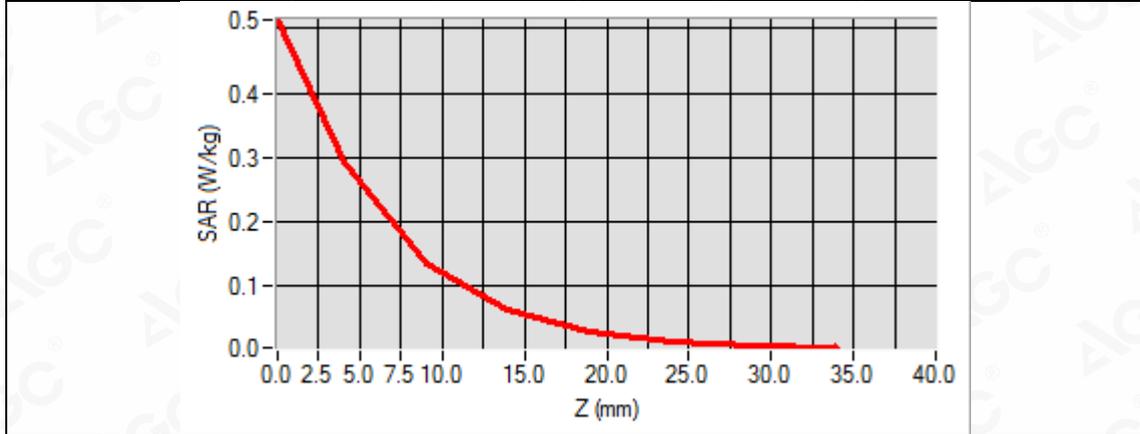

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
802.11b High-Body-Worn- Back
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 22,2020


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;
Frequency: 2472 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.6, Liquid temperature (°C): 22.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/802.11b High- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b High- Body- Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	2450MHz
Channels	High
Signal	Crest factor: 1.0

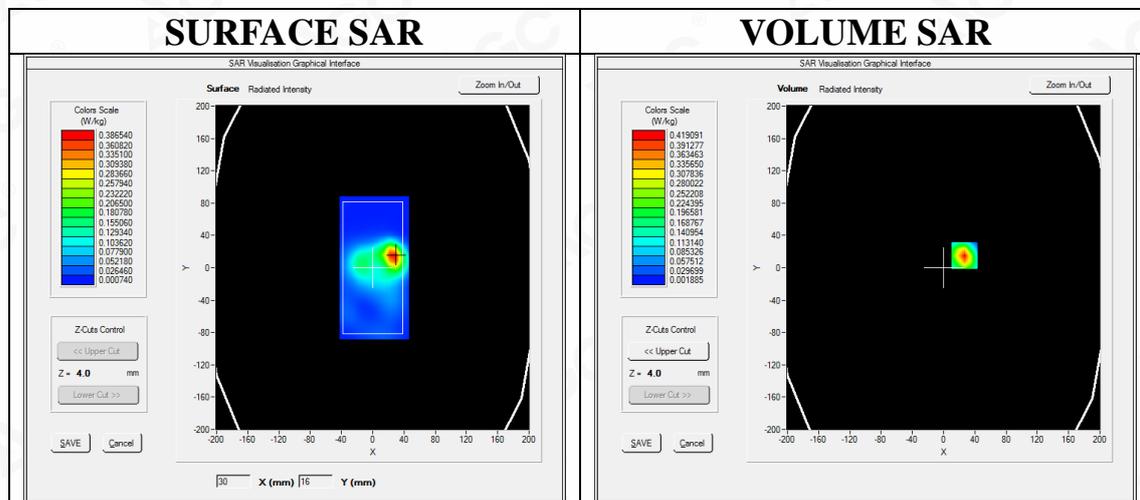



Maximum location: X=27.00, Y=15.00
SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.169069
SAR 1g (W/Kg)	0.389326

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.7701	0.4191	0.1767	0.0788	0.0353	0.0166	0.0079

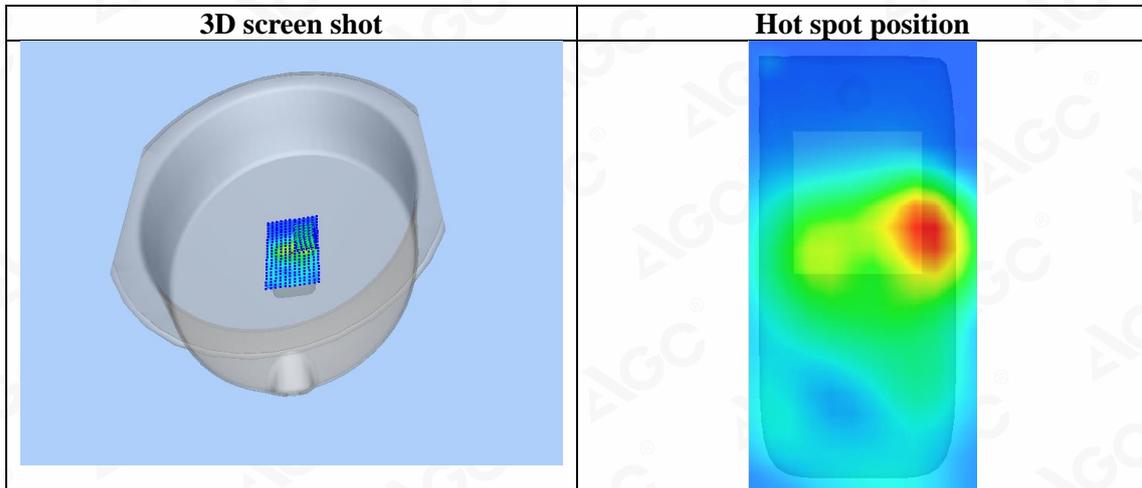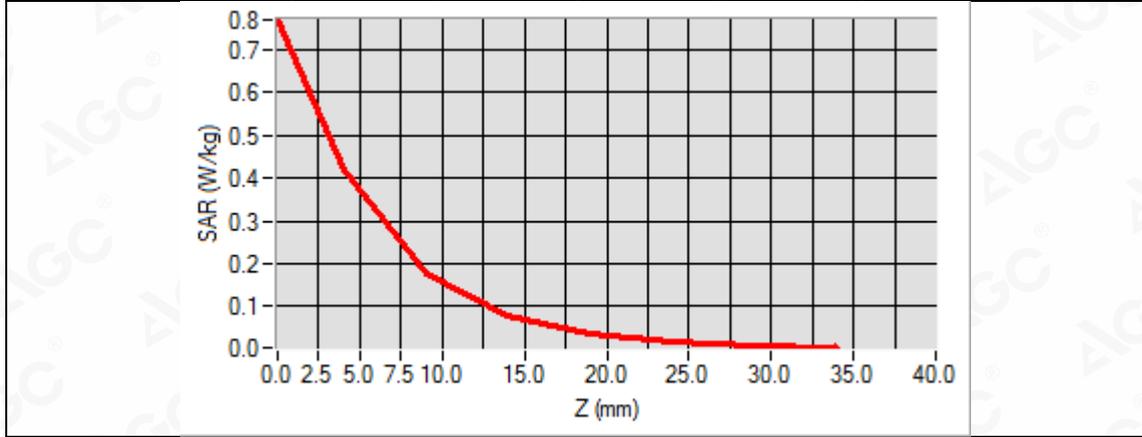

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
802.11b High- Hotspot - Back
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 22,2020


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;
Frequency: 2472 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.6, Liquid temperature (°C): 22.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/802.11b High- Hotspot - Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b High- Hotspot - Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Hotspot Back
Band	2450MHz
Channels	High
Signal	Crest factor: 1.0

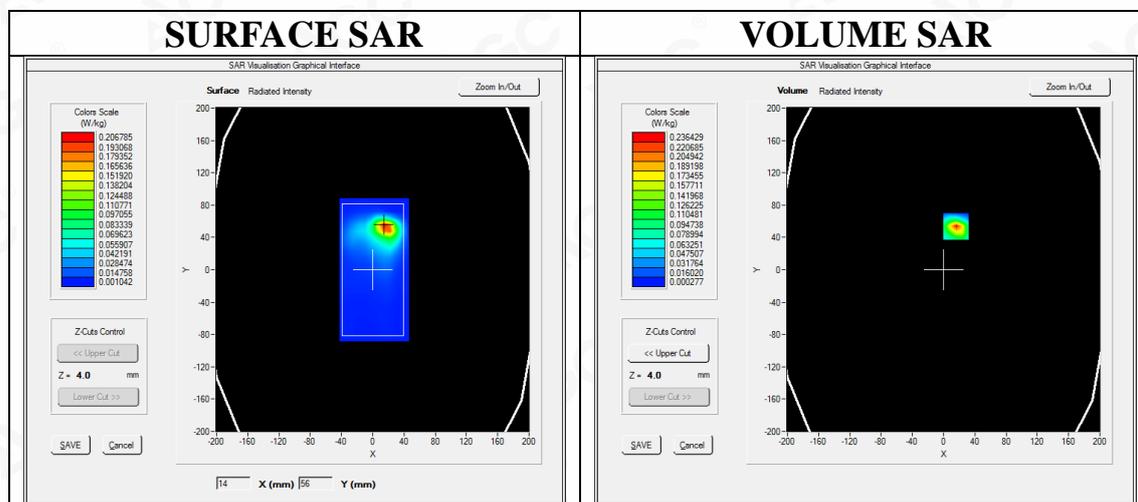

Maximum location: X=16.00, Y=54.00
SAR Peak: 0.48 W/kg



SAR 10g (W/Kg)	0.081116
SAR 1g (W/Kg)	0.215577

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.4869	0.2364	0.0771	0.0286	0.0116	0.0053	0.0028

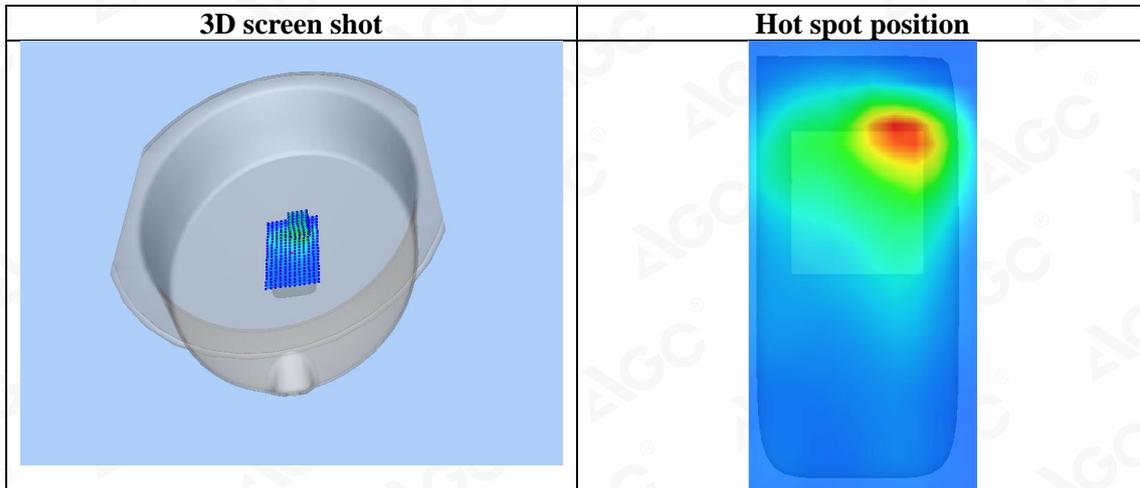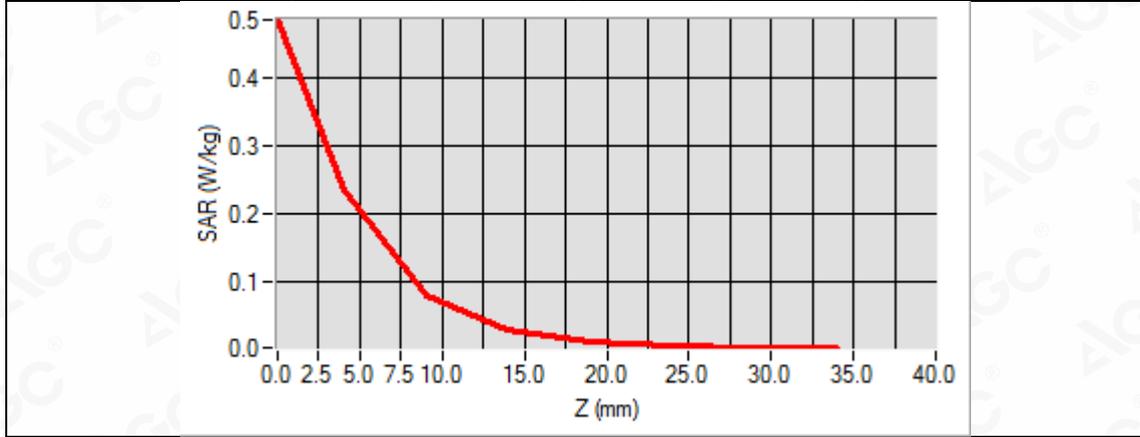

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
802.11b Mid-Limbs- Back
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 22,2020


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;
Frequency: 2442 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.6, Liquid temperature (°C): 22.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Limbs - Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b Mid- Limbs - Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

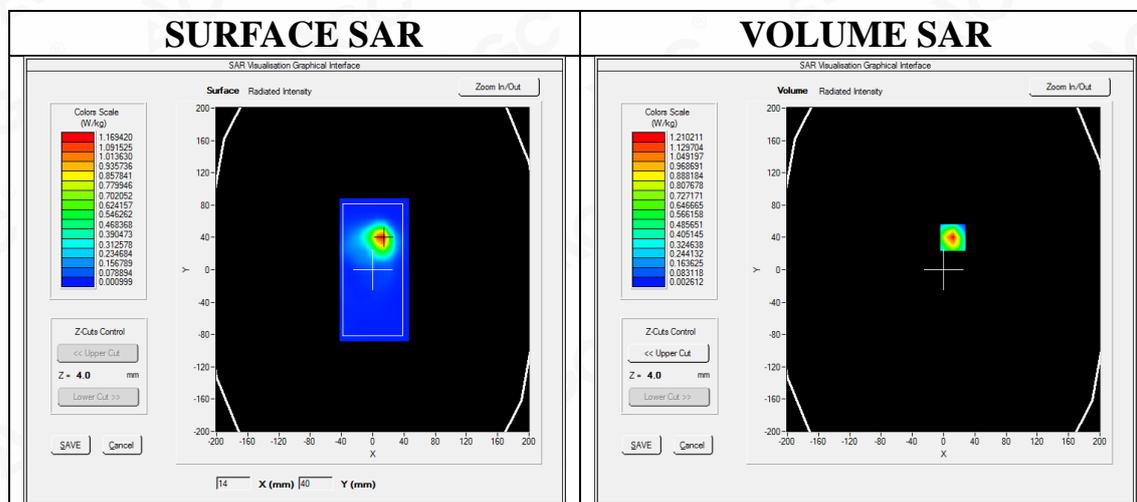

Maximum location: X=12.00, Y=40.00
SAR Peak: 2.26 W/kg



SAR 10g (W/Kg)	0.477878
SAR 1g (W/Kg)	1.132477

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.2828	1.2102	0.4803	0.2017	0.0820	0.0376	0.0174

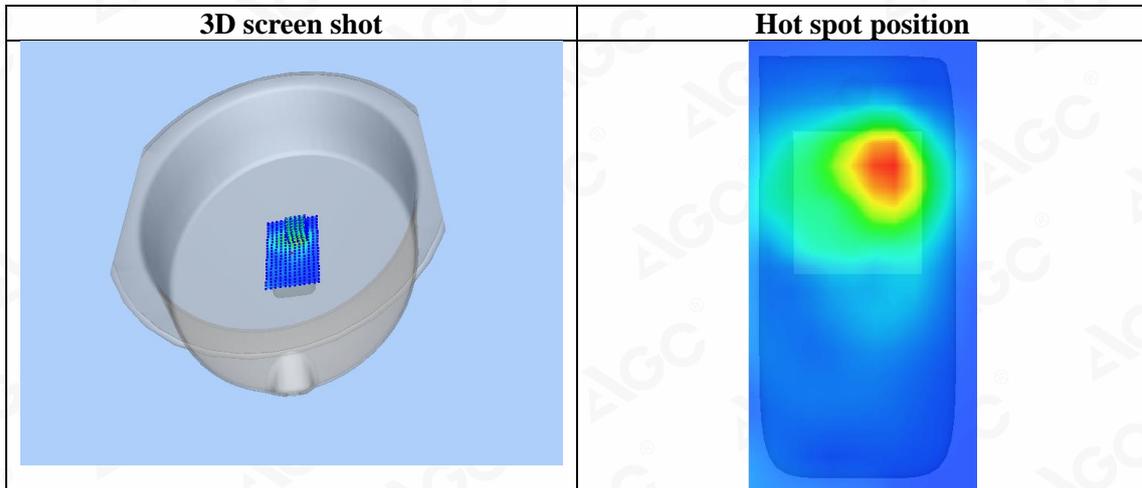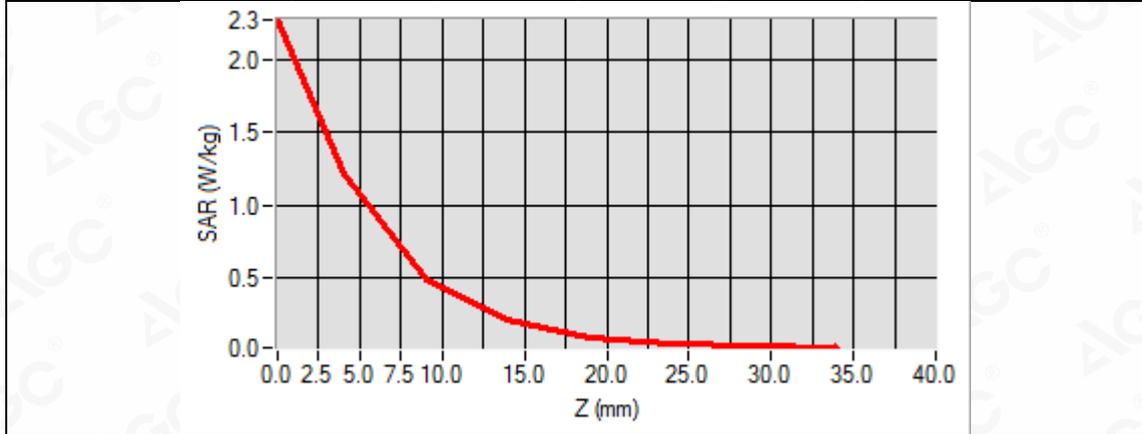

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Test Laboratory: AGC Lab
802.11b High-Limbs- Back
DUT: Smart Phone; Type: NOTE 20 PRO

Date: Jul. 22,2020


Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.23;
Frequency: 2472 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 39.46$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):22.6, Liquid temperature (°C): 22.3

SATIMO Configuration:

Probe: SSE5; Calibrated: Jun. 24,2020; Serial No.: SN 24/20 EP336
Sensor-Surface: 4mm (Mechanical Surface Detection)
Phantom: ELLI39 Phantom
Measurement SW: OpenSAR V4_02_35

Configuration/802.11b High- Limbs - Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b High- Limbs - Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Limbs Back
Band	2450MHz
Channels	High
Signal	Crest factor: 1.0

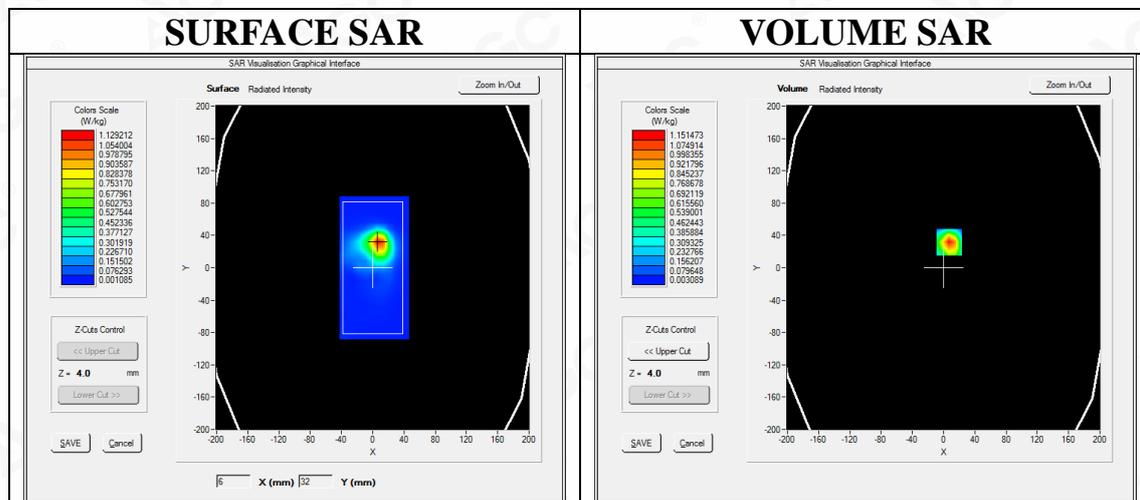

Maximum location: X=7.00, Y=32.00
SAR Peak: 2.20 W/kg



SAR 10g (W/Kg)	0.470252
SAR 1g (W/Kg)	1.099663

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.1900	1.1515	0.4522	0.1949	0.0830	0.0374	0.0174

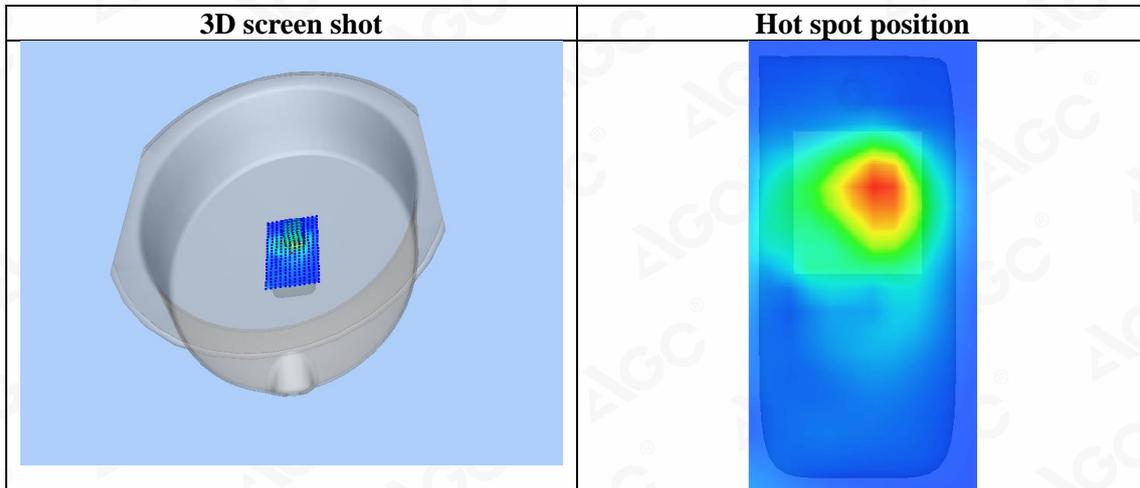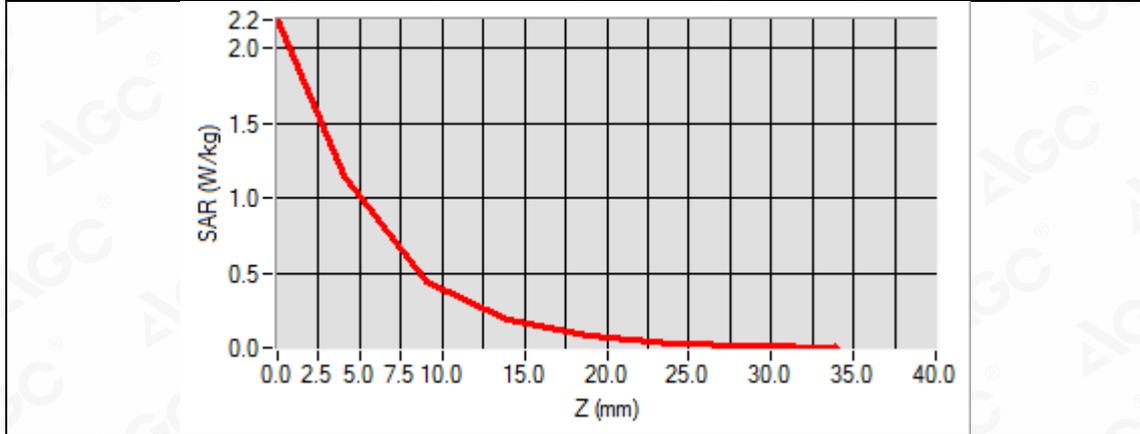


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



APPENDIX C. TEST SETUP PHOTOGRAPHS LEFT-CHEEK TOUCH



LEFT-TILT 15°

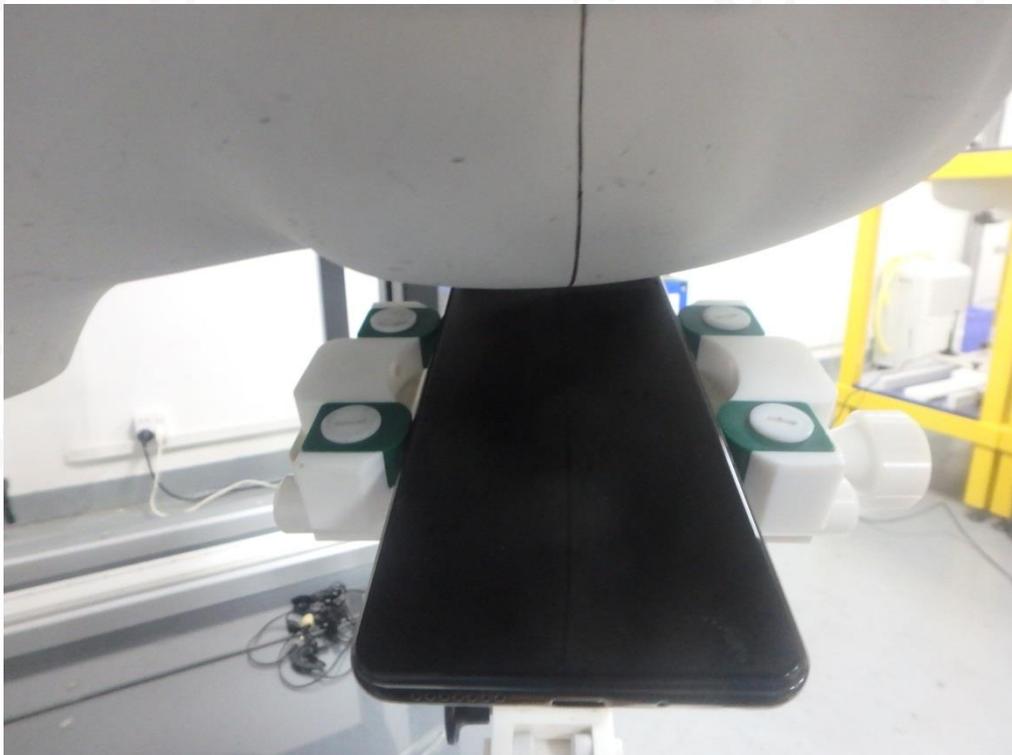


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



RIGHT-CHEEK TOUCH

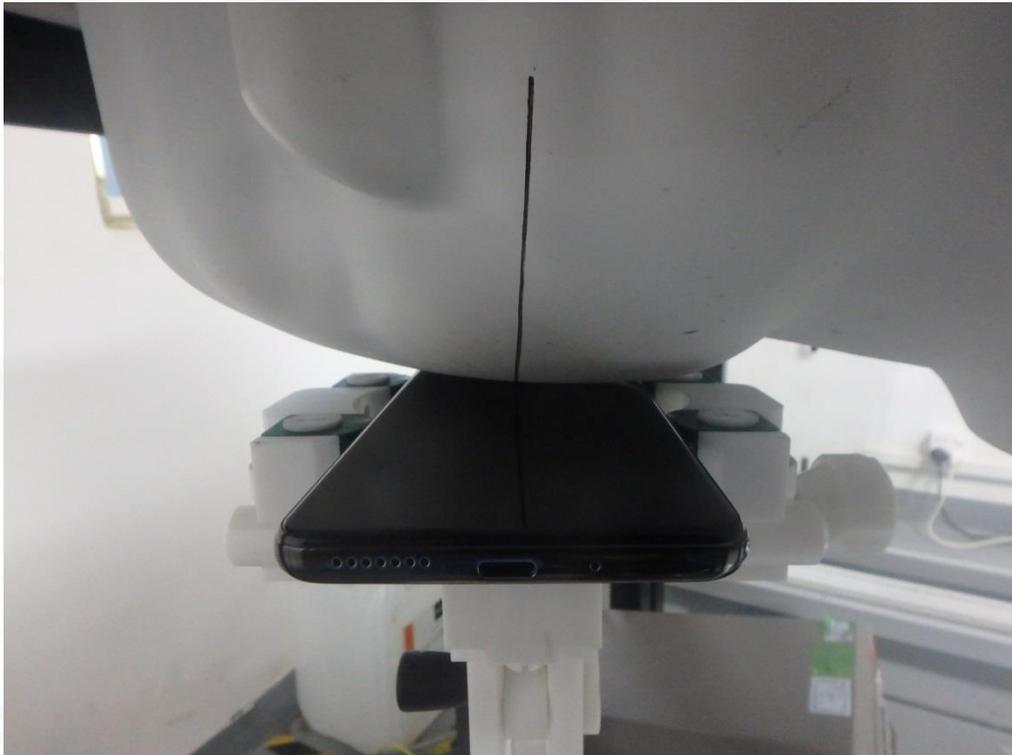

RIGHT-TILT 15°

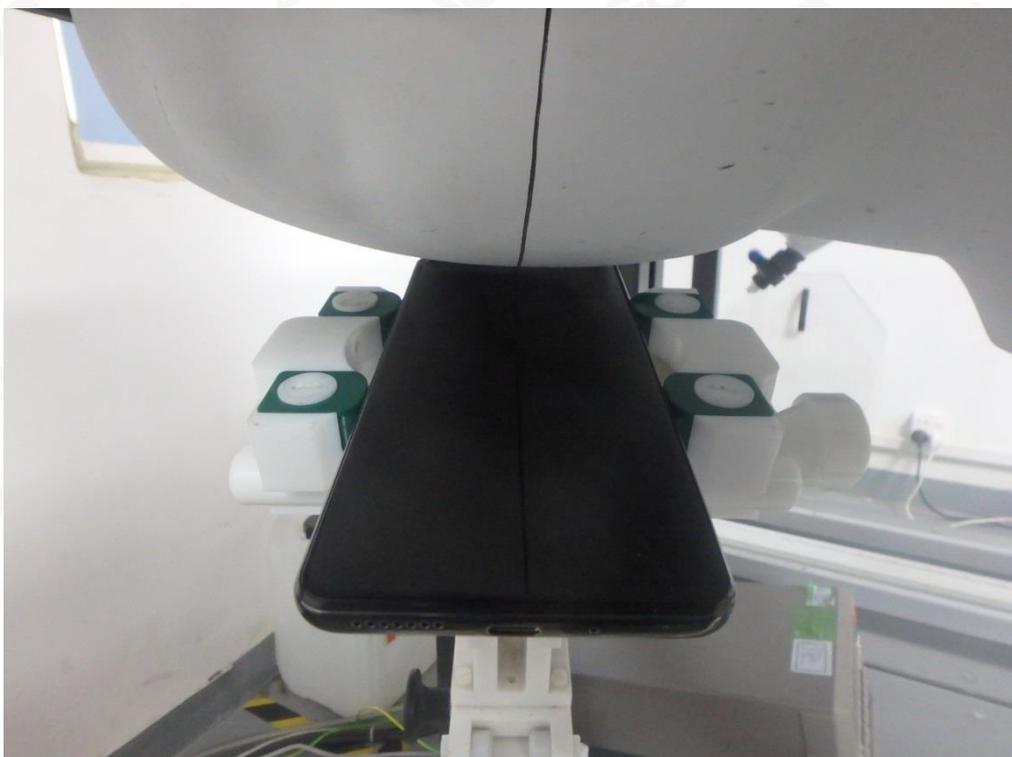


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Body Back 5mm

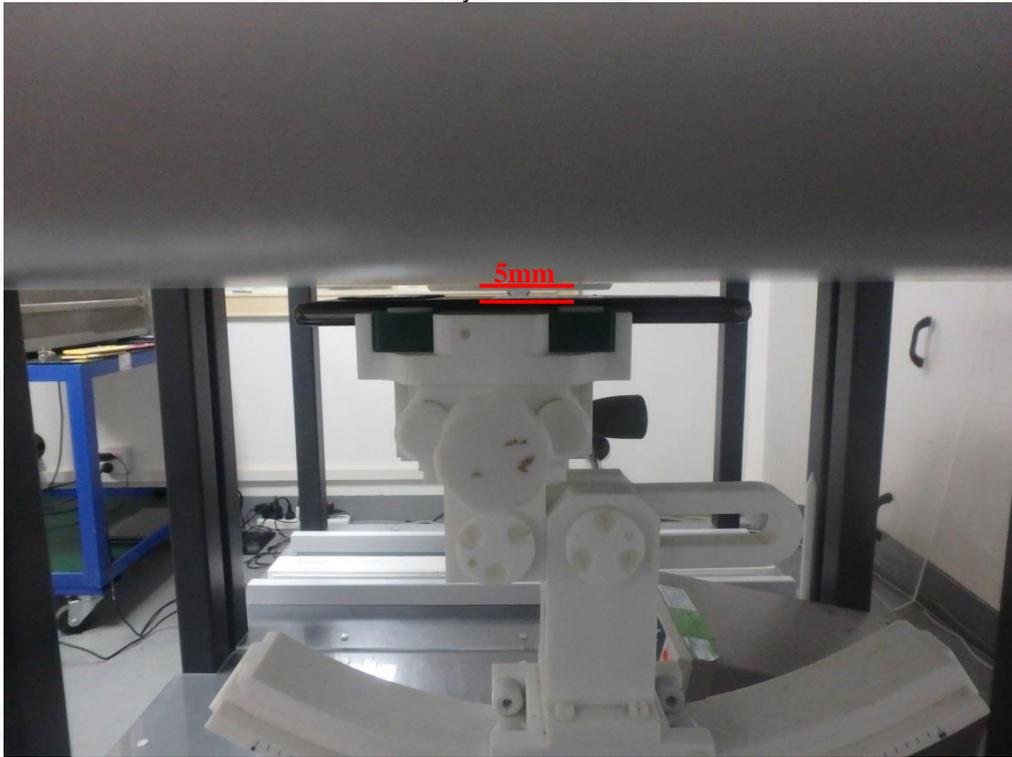

Body Front 5mm

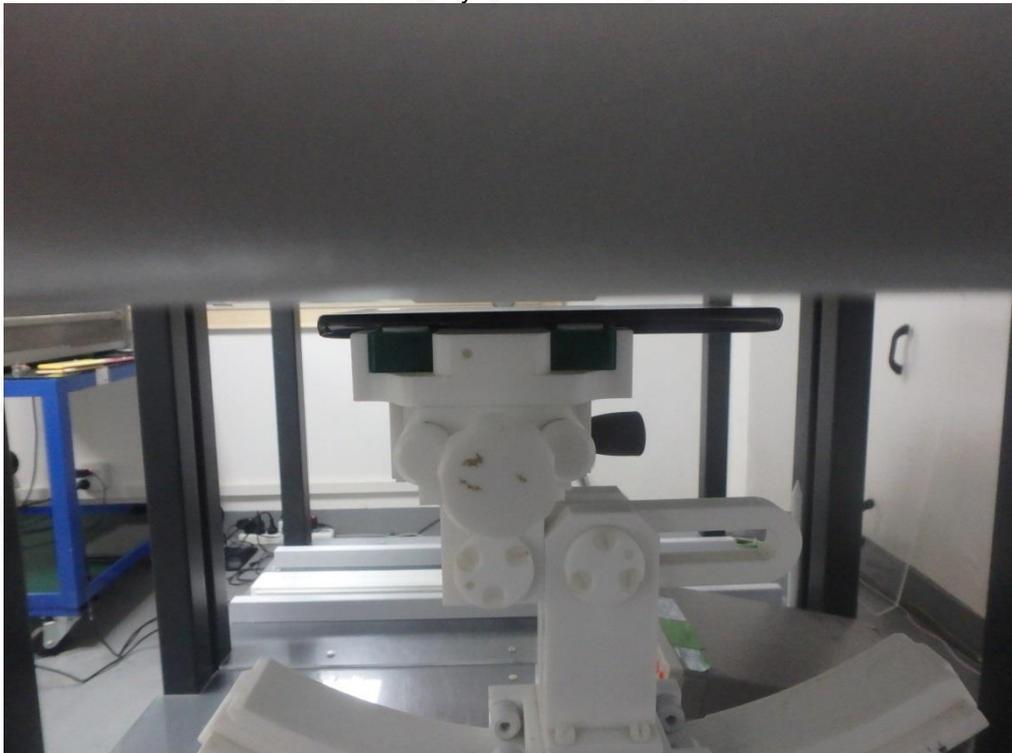


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Body back with earphone 5mm

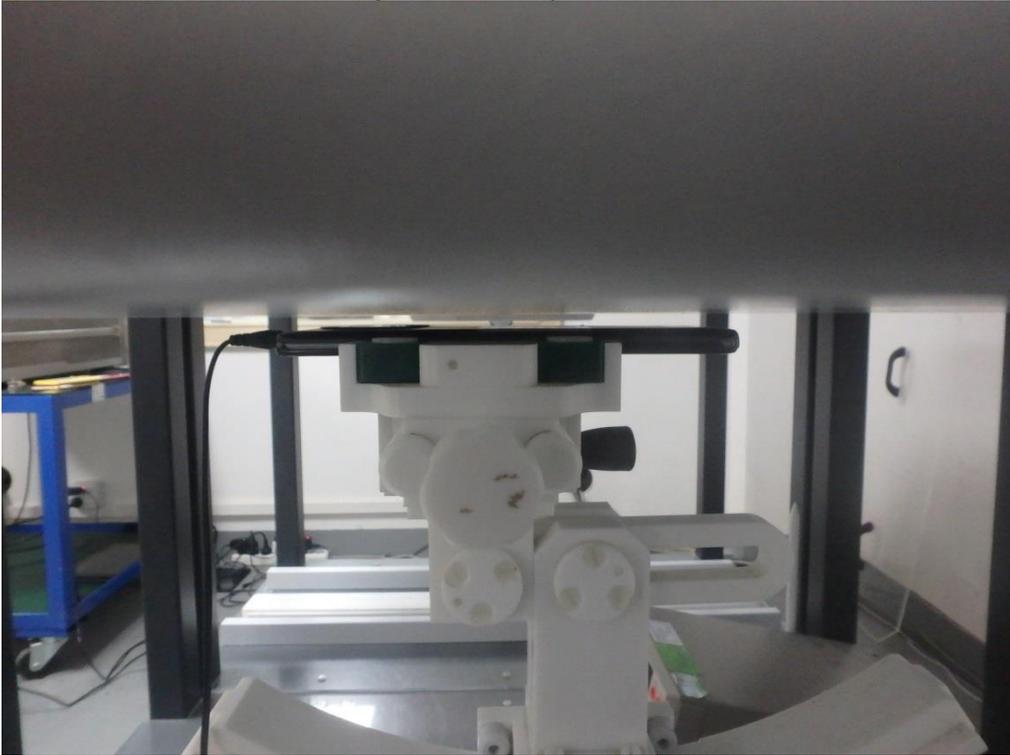

Body front with earphone 5mm

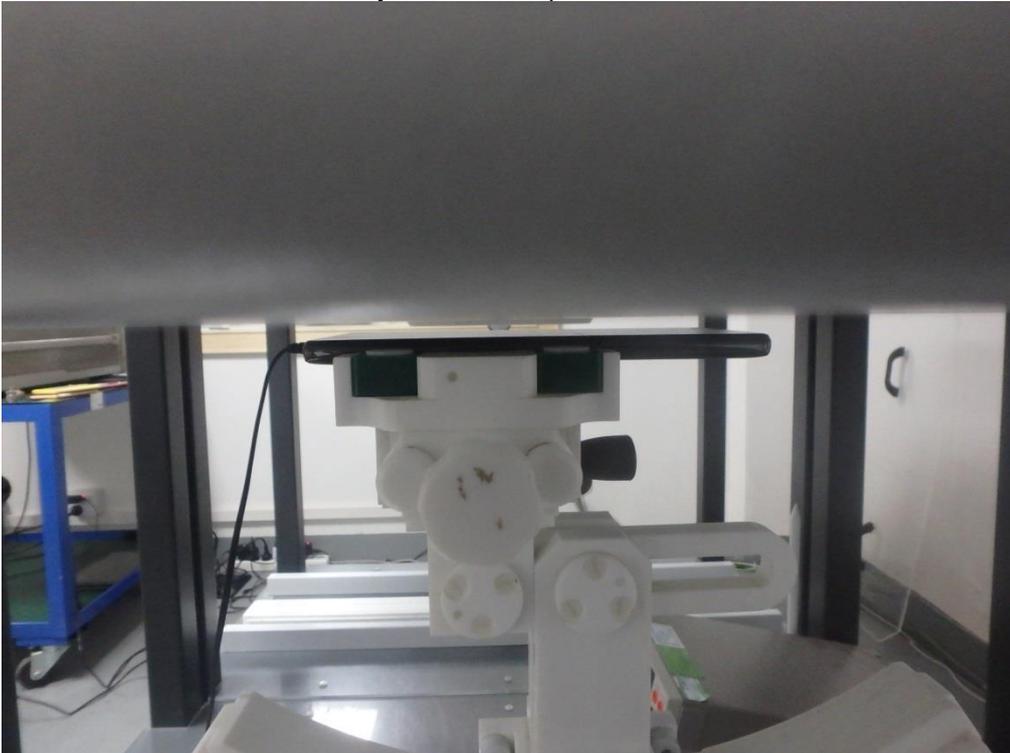


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Hotspot back 10mm

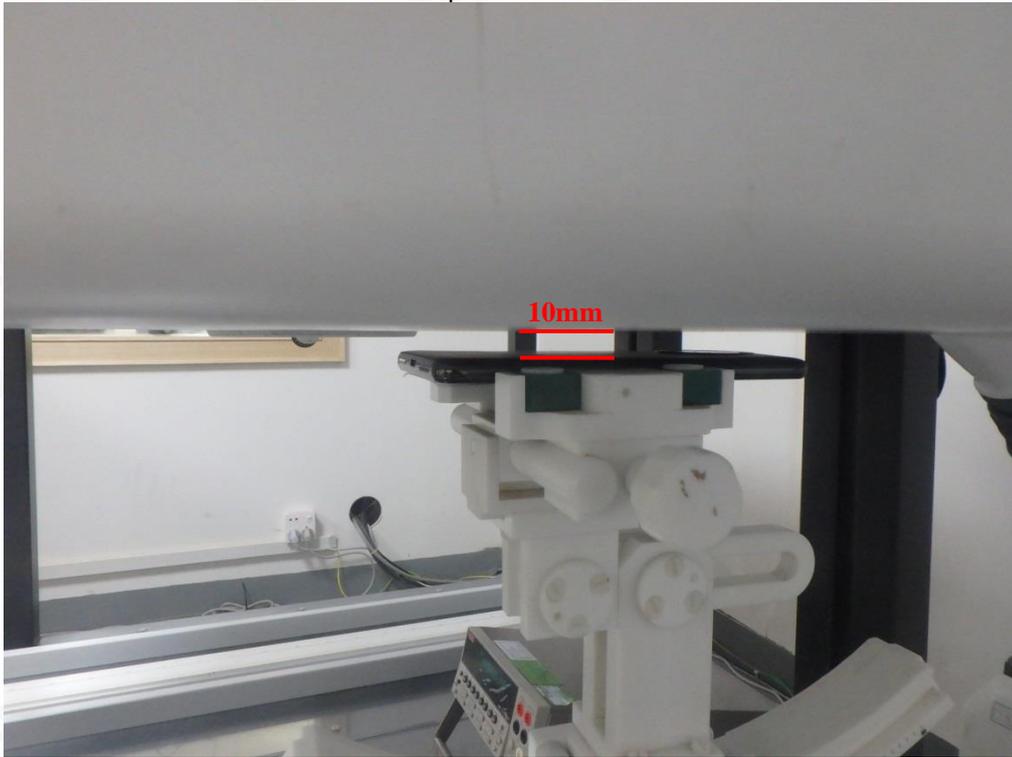

Hotspot Front 10mm

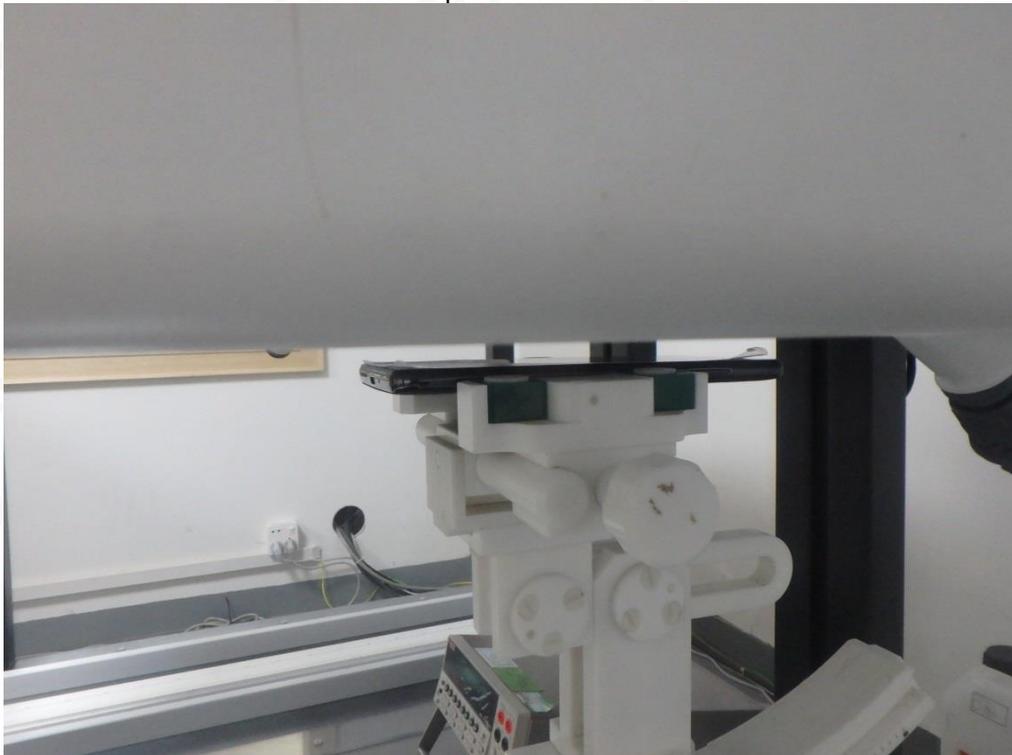


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Hotspot Edge 1(Top) 10mm

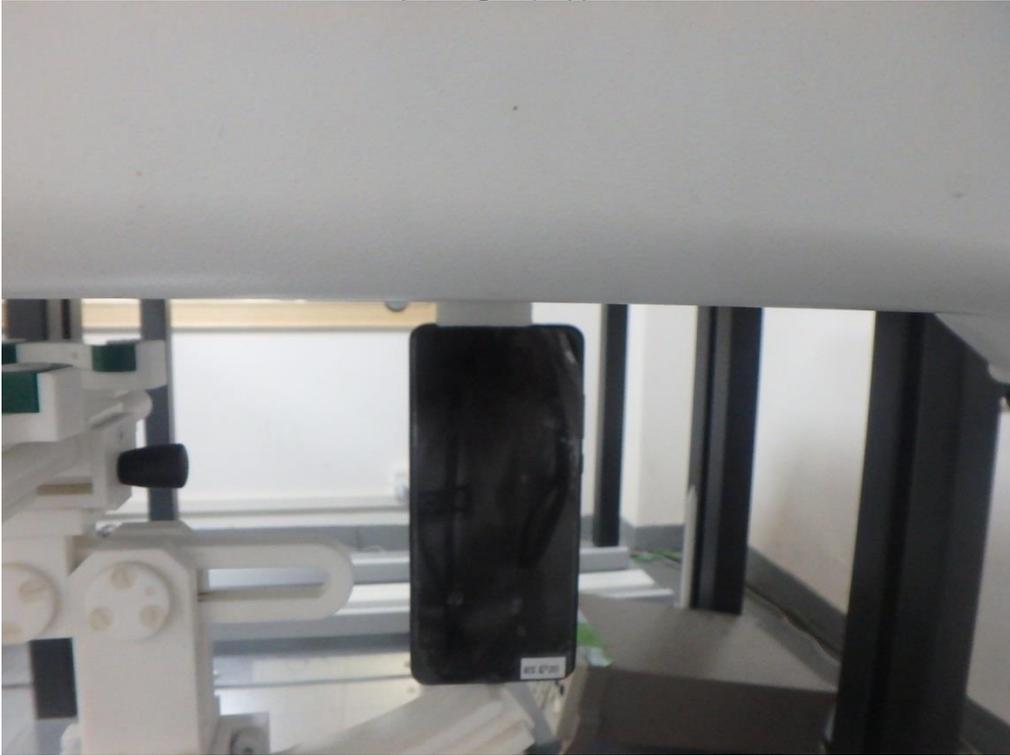

Hotspot Edge 2(Right) 10mm

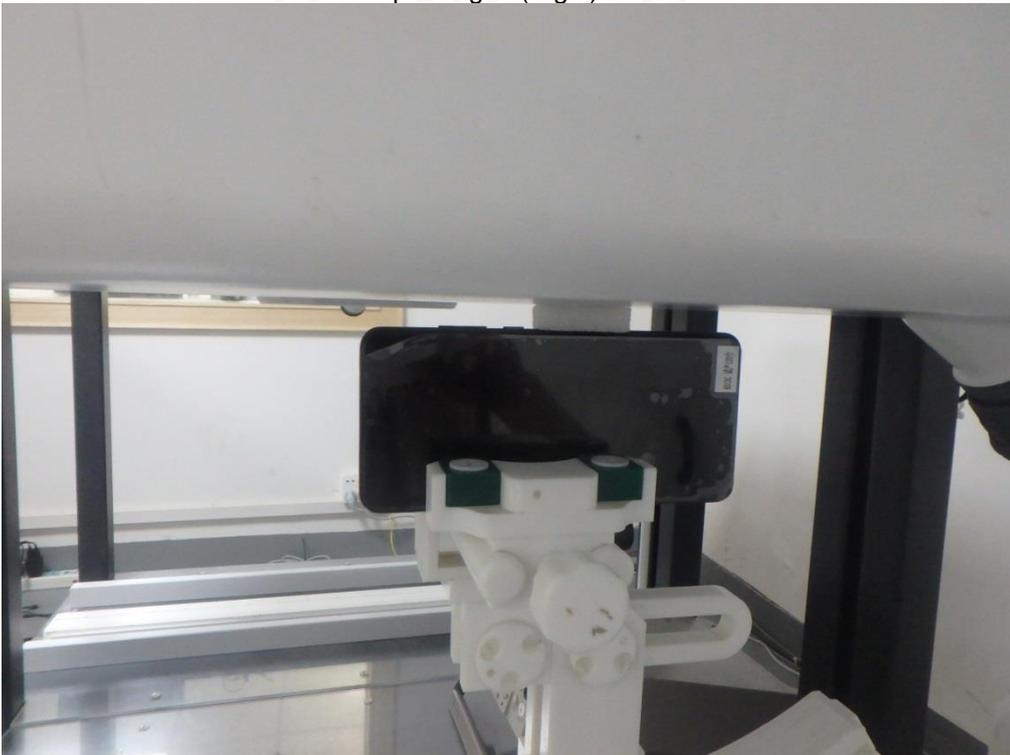


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Hotspot Edge 3(Bottom) 10mm

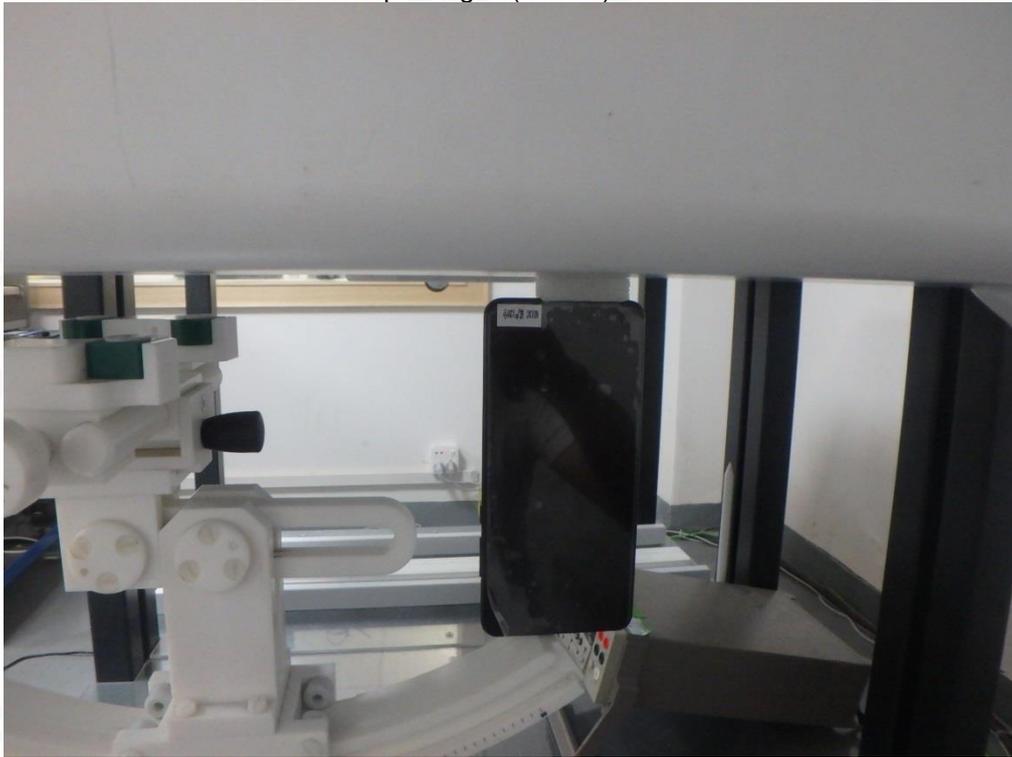

Hotspot Edge 4(Left) 10mm

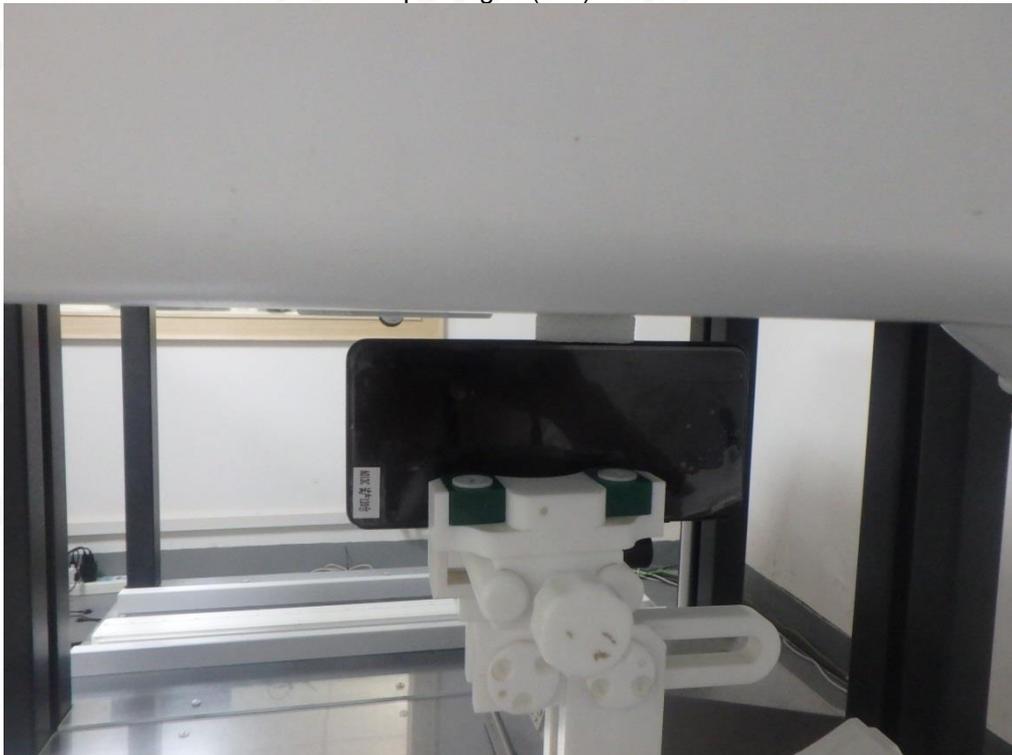


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Limbs Back 0mm

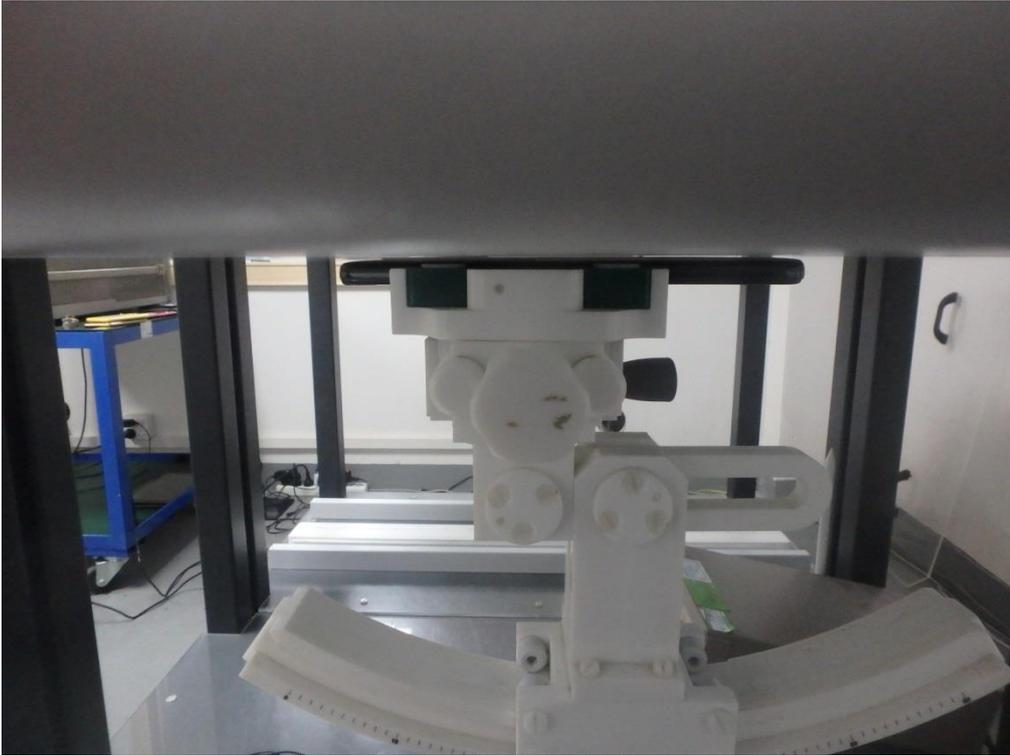

Limbs Front 0mm

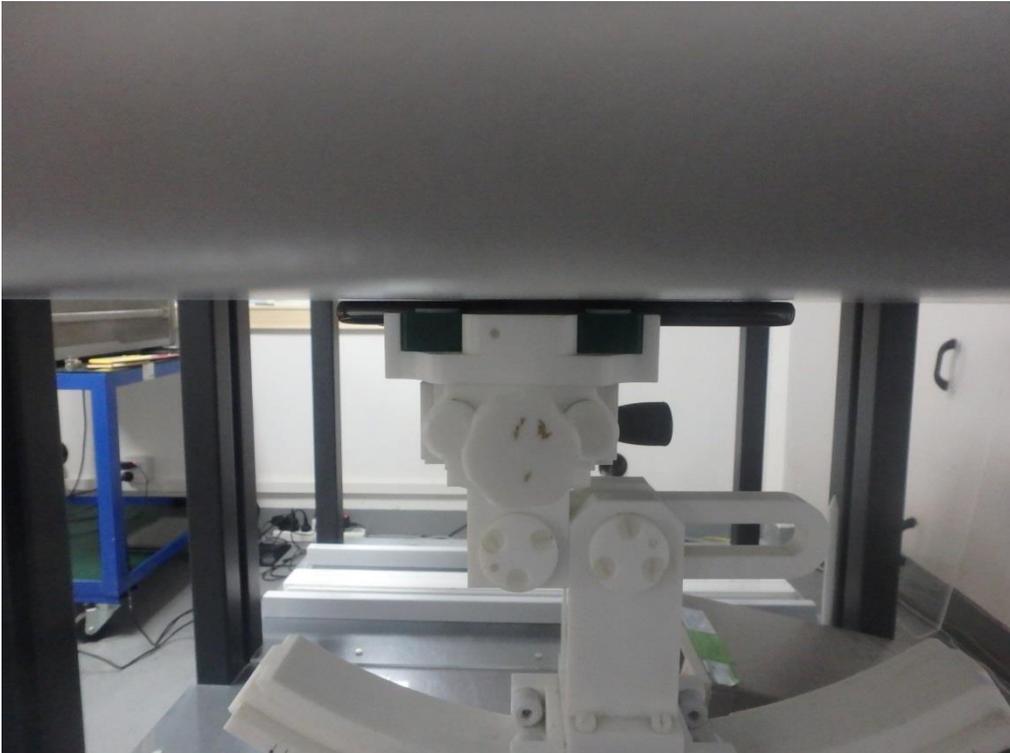


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Limbs Edge1 (Top) 0mm

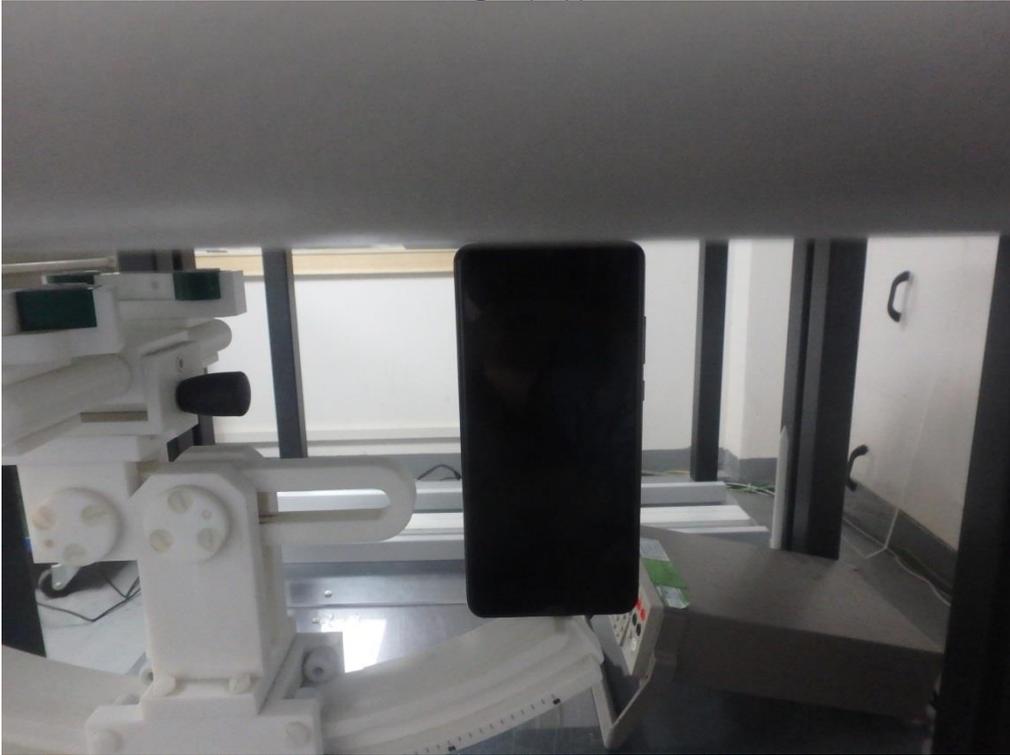

Limbs Edge 2 (Right) 0mm

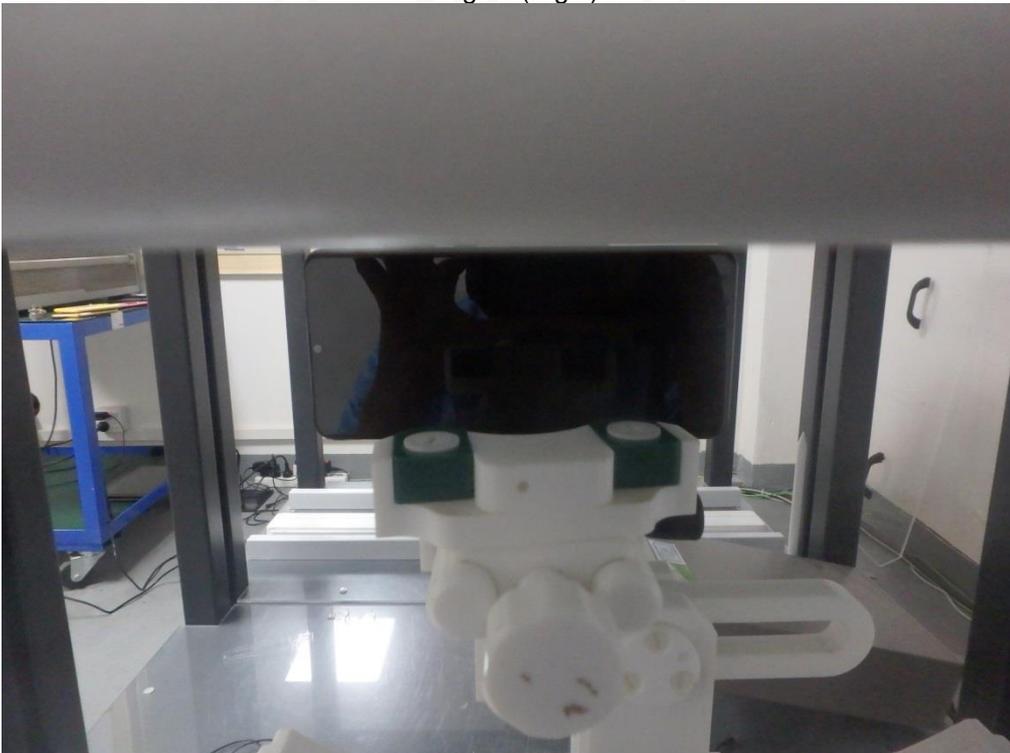


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Limbs Edge 3 (Bottom) 0mm

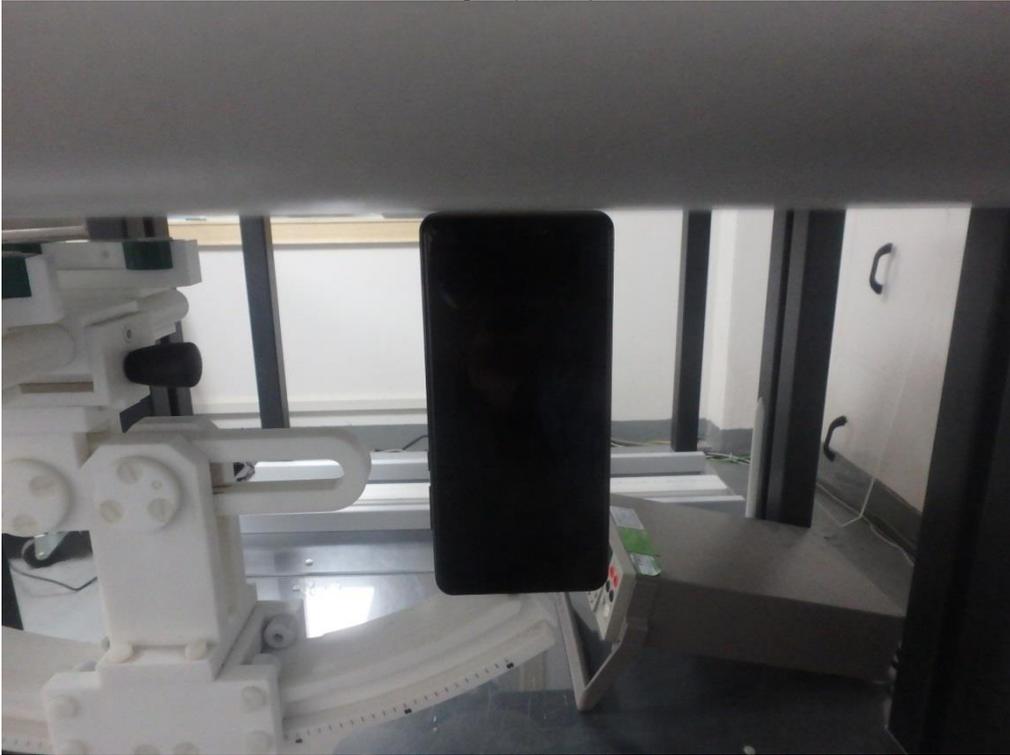

Limbs Edge 4 (Left) 0mm

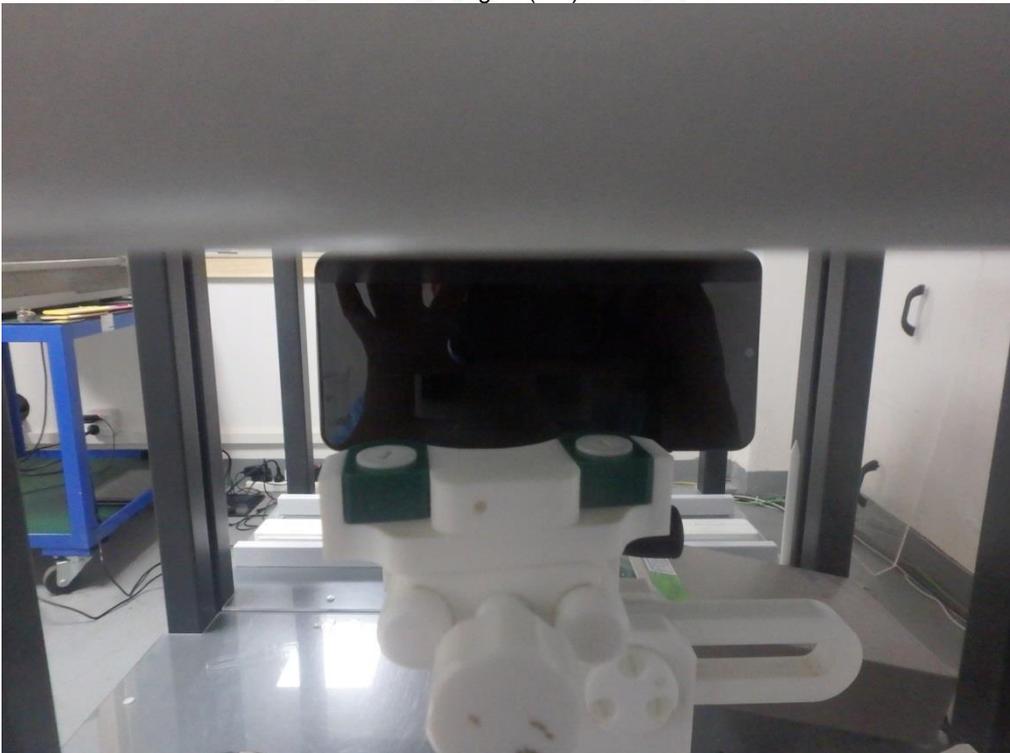


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Limbs back with earphone 0mm

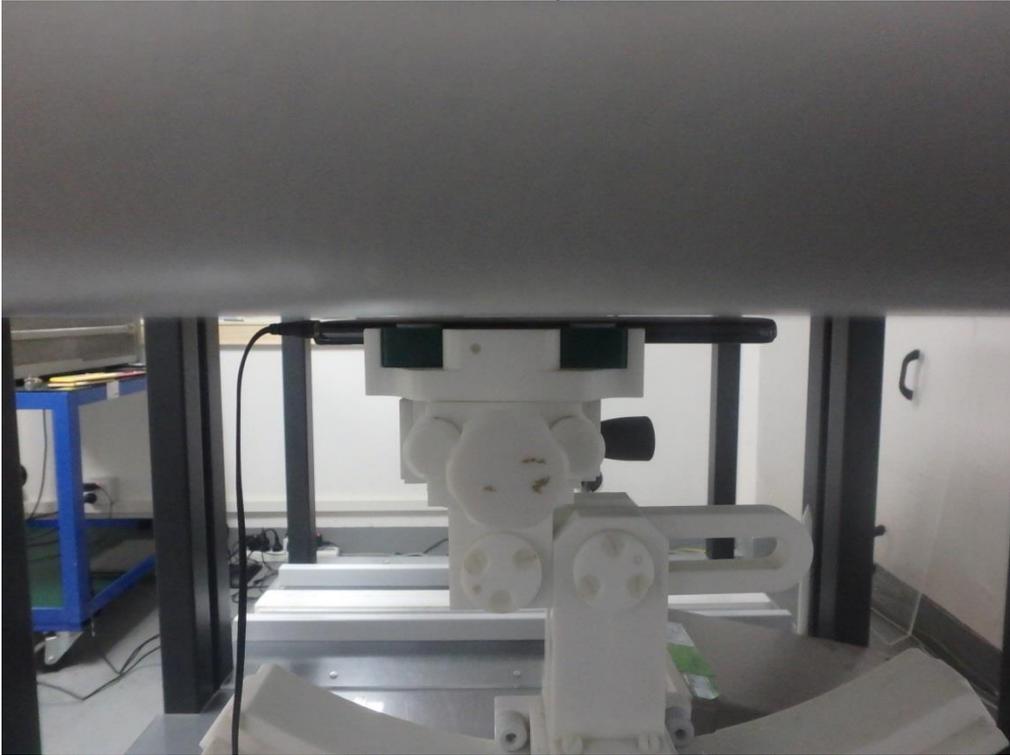

Limbs Edge 3 (Bottom) with earphone 0mm




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Position of the device under test in relation to the phantom

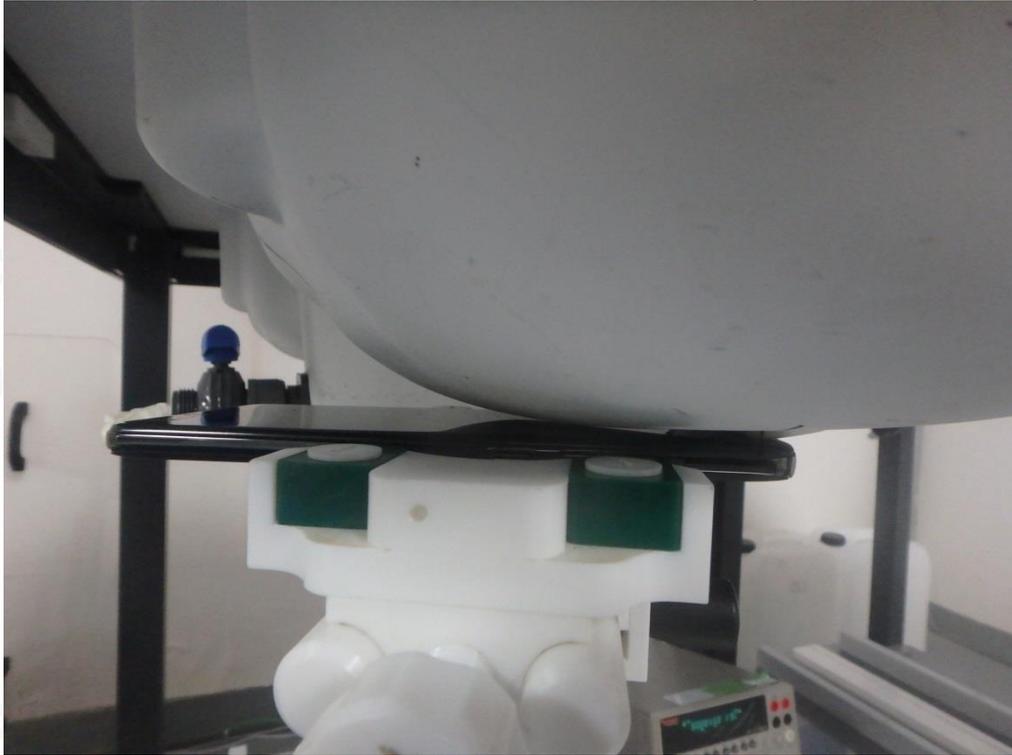


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN


Note : The position used in the measurement were according to EN62209-1/2

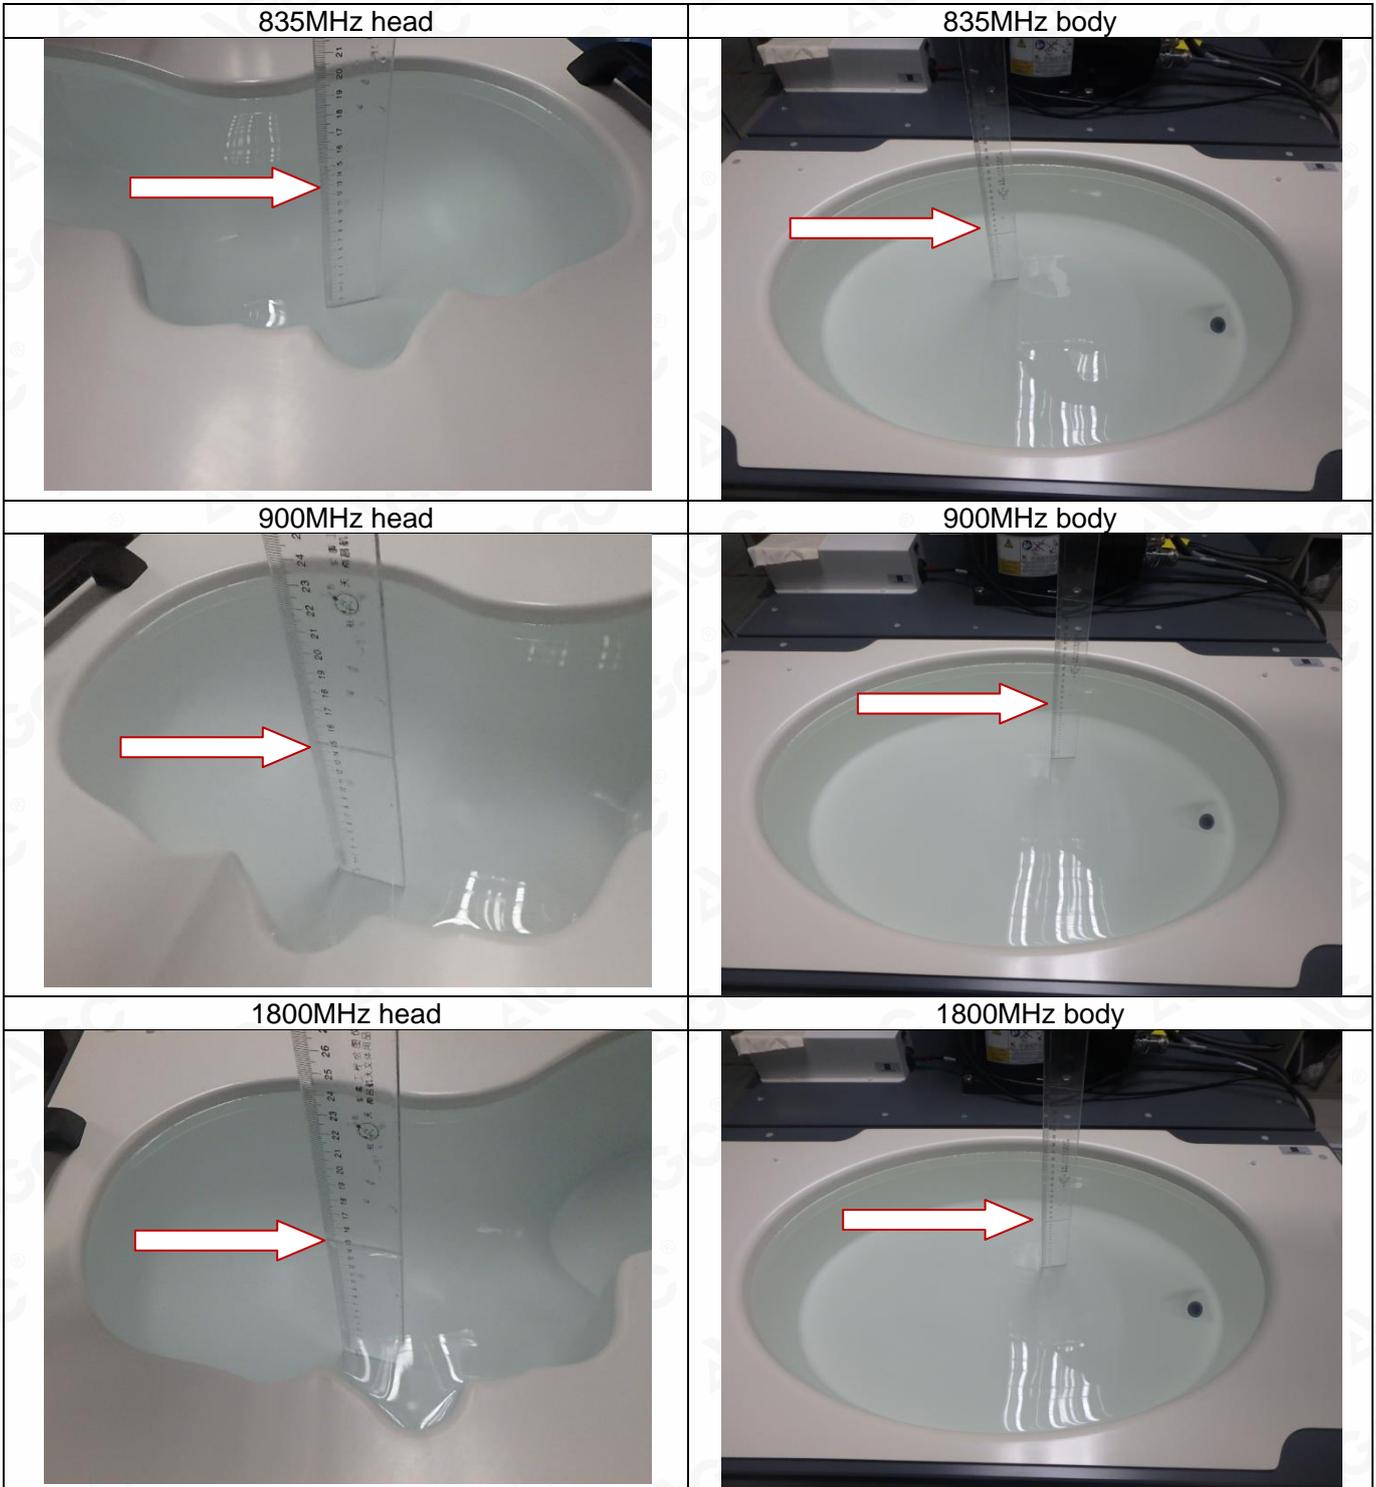

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



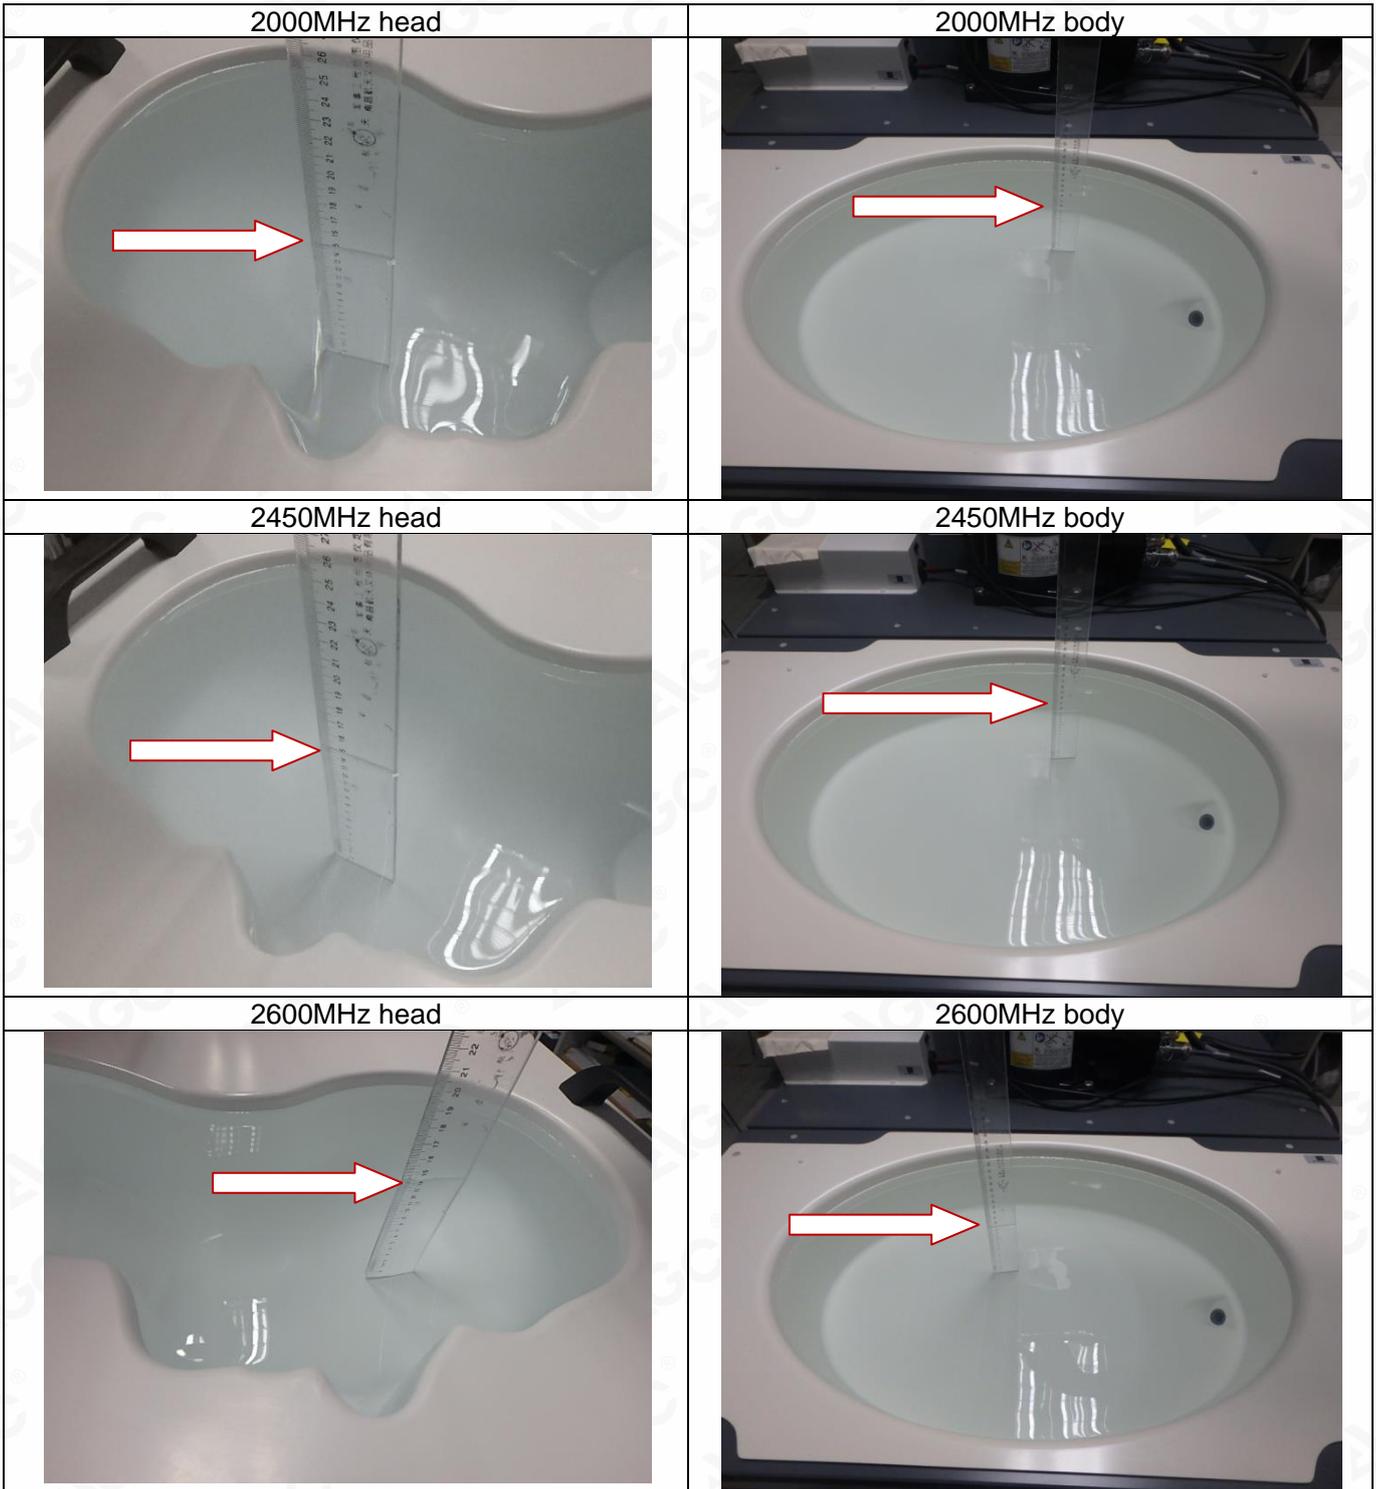

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



APPENDIX D. CALIBRATION DATA

Refer to Attached files.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>





Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the “Company”) solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the “Clients”).
2. Any report issued by Company as a result of this application for testing services (the “Report”) shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

