

# RF Test Report

Report No.: AGC00552180803EE06

**PRODUCT DESIGNATION** : Smart Phone  
**BRAND NAME** : CUBOT  
**MODEL NAME** : KINGKONG 3  
**MANUFACTURER** : Shenzhen Huafurui Technology Co., Ltd  
**DATE OF ISSUE** : Oct. 08, 2018  
**STANDARD(S)** : ETSI EN 303 413 V1.1.1 2017-06  
**REPORT VERSION** : V1.1

## Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 14, 2018	Invalid	Initial release
V1.1	1 <sup>st</sup>	Oct. 08, 2018	Valid	Revise Page 8

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**TABLE OF CONTENTS**

**1. TEST REPORT CERTIFICATION..... 4**  
**2. GENERAL INFORMATION ..... 5**  
**3. MEASUREMENT UNCERTAINTY..... 6**  
**4. TEST MODE ..... 7**  
**5. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION..... 8**  
**6. REQUIREMENT TO RECEIVER ..... 9**  
    6.1 ETSI EN 303 413 SUB. 4.2.1: ADJACENT CHANNEL BAND SELECTIVITY..... 9  
    6.2 ETSI EN 303 413 SUB. 4.2.2: SPURIOUS EMISSIONS..... 11  
**APPENDIX A: PHOTOGRAPHS OF TEST SETUP ..... 13**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**1. TEST REPORT CERTIFICATION**

<b>Manufacturer</b>	Shenzhen Huafurui Technology Co., Ltd.
<b>Address</b>	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen, P.R. China
<b>Factory Name</b>	Shenzhen Huafurui Technology Co., Ltd.
<b>Address</b>	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen, P.R. China
<b>Product Designation</b>	Smart Phone
<b>Brand Name</b>	CUBOT
<b>Test Model</b>	KINGKONG 3
<b>Date of test</b>	Aug. 29, 2018 to Sep. 13, 2018
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-EC-SRD1/RF

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the European Standard ETSI EN 303 413. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

The test results of this report relate only to the tested sample identified in this report.


Tested By



Dojon Huang( Huang Dongyang)

Sep. 13, 2018

Reviewed By



Bart Xie(Xie Xiaobin)

Oct. 08, 2018

Approved By



 Forrest Lei(Lei Yonggang)  
 Authorized Officer

Oct. 08, 2018

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 2. GENERAL INFORMATION

Details of technical specification refer to the description in follows:

<b>Test Mode</b>	GPS Mode(Only receive)
<b>Hardware Version</b>	A756_MAIN_PCB_V1.2
<b>Software Version</b>	A756_63_O1_LWTG_V0.3.2_S180807
<b>Receiver Frequency</b>	(GPS)1575.42MHz
<b>Modulation Type</b>	BPSK
<b>Antenna Gain</b>	1.0dBi
<b>Power Supply</b>	DC 3.85V

**Note:** For more details, please refer to the user's manual.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 3. MEASUREMENT UNCERTAINTY

All the measurement equipments and accessories have been carefully selected to meet the maximum measurement uncertainty specified below:

Parameters	Uncertainty
Radio frequency	$\pm 1 \cdot 10^{-7}$
Radiated emission of receiver, valid to 26.5GHz	$\pm 6\text{dB}$
Radiated emission of receiver, valid between 26.5GHz and 66GHz	$\pm 8\text{dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
Voltage (DC)	$\pm 1\%$
Voltage (AC, < 10kHz)	$\pm 2\%$

Note: For radiated emissions above 26.5GHz it may not be possible to achieve measurement uncertainties complying with the levels specified in this table. In these cases alone it is acceptable to employ the alternative interpretation procedure specified in clause 10.1

For the test methods, according to the present document the uncertainty figures shall be calculated according to the methods described in the TR 100 028 [i.4] and shall correspond to an expansion factor (coverage factor)  $k = 1,96$  or  $k = 2$  (which provide confidence levels of respectively 95 % and 95,45 % in case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

#### 4. TEST MODE

NO.	TEST MODE DESCRIPTION
1	RX( Operating Channel)
2	Standby

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

### 5. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

<b>Site</b>	Attestation of Global Compliance (Shenzhen) Co., Ltd
<b>Location</b>	2F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

### LIST OF EQUIPMENTS USED


Description	Manufacturer	Model No.	Calibration Date	Calibration Due.
EMI TEST RECEIVER	R&S	ESCI	June 12,2018	June 11,2019
WIDEBAND REQUENCY ANTENNA	SCHWARZBECK	VULB9168	Mar.01,2018	Feb.28,2020
Amplifier	Schwarzbeck	BBV 9718	June 12,2018	June 11,2019
Double-Ridged Waveguide Horn Antenna	ETS LINDGREN	3117	Mar.01,2018	Feb.28,2020
Climate Chamber	ESPEC	EL-10KA	June 27,2018	June 26,2019
Signal Generator	Aglient	N5182B	Sep. 21, 2017	Sep. 20, 2018
Signal Generator	Aglient	E8257D	Sep. 21, 2017	Sep. 20, 2018
ANTENNA	A.H.	SAS-521-4	Mar. 01, 2018	Feb. 28, 2020
ANTENNA	Schwarzbeck	9168	Mar. 01, 2018	Feb. 28, 2020
HORN ANTENNA	E.M.	EM-AH-10180	Mar. 01, 2018	Feb. 28, 2020
HORN ANTENNA	ETS	3117	Mar. 01, 2018	Feb. 28, 2020
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	Mar. 01, 2018	Feb. 28, 2020
Horn Ant (18G-40GHz)	ETS	QWH_SL_18_40_K_SG	Mar. 01, 2018	Feb. 28, 2020

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

## 6. REQUIREMENT TO RECEIVER

### 6.1 ETSI EN 303 413 SUB. 4.2.1: ADJACENT CHANNEL BAND SELECTIVITY

#### TEST SETUP:

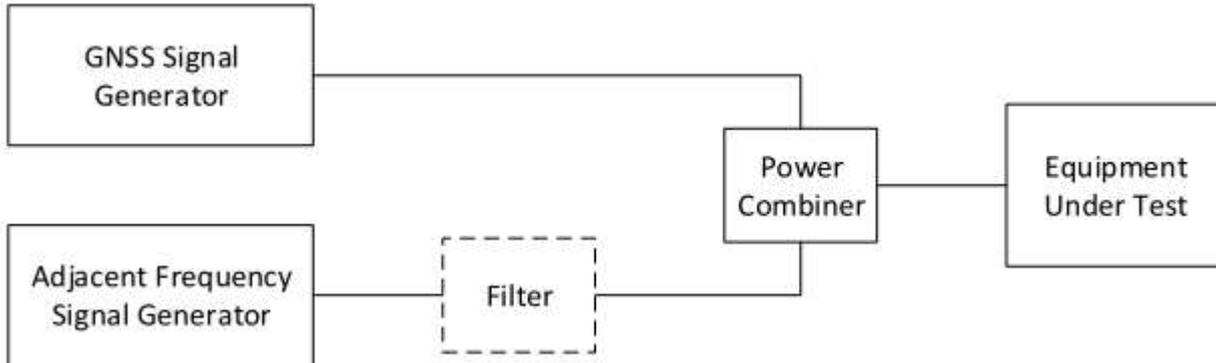

#### Specifications:

The  $C/N_0$  metric reported by the GUE for all GNSS and GNSS signals given in table 4-1 and supported by the GUE shall not degrade by more than the value given in equation 4-1 when an adjacent frequency signal is applied.

Equation 4-1: Maximum degradation in  $C/N_0$

$$\Delta C/N_0 \leq 1 \text{ dB}$$

**Table 4-1: GNSS, GNSS signals and RNSS frequency bands**

GNSS	GNSS Signal Designations	RNSS Frequency Band (MHz)
BDS	B1I	1 559 to 1 610
Galileo	E1	1 559 to 1 610
	E5a	1 164 to 1 215
	E5b	1 164 to 1 215
	E6	1 215 to 1 300
GLONASS	G1	1 559 to 1 610
	G2	1 215 to 1 300
GPS	L1	1 559 to 1 610
	L2	1 215 to 1 300
	L5	1 164 to 1 215
SBAS	L1	1 559 to 1 610
	L5	1 164 to 1 215

#### TEST PROCEDURE:

1. Configure the GNSS signal generator to simulate those GNSS and GNSS signals from table 4-1 declared as supported by the GUE, with power levels and other details as specified in clause B.2..
2. With the adjacent frequency signal switched off, the EUT shall be given sufficient time to acquire all simulated satellites from the declared GNSS system(s).
3. Record the baseline  $C/N_0$  value(s) reported by the EUT. Sufficient filtering shall be used to obtain a stable value.  $C/N_0$  may be averaged across all the satellites in view for each GNSS constellation. However,  $C/N_0$  shall not be averaged across satellite signals in different GNSS constellations. For a multi-GNSS EUT, there shall be a separate  $C/N_0$  value recorded for each GNSS constellation and each GNSS signal supported.
4. The adjacent frequency signal shall be switched on, and the EUT's  $C/N_0$  value(s) recorded as in step 3) to measure the degradation with respect to the baseline value(s) recorded in step 3).

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5. Test point Pass/Fail Criteria: If the C/N<sub>0</sub> degradation from step 5) does not exceed the value in equation 4-1, then this test point is set to "pass". If the C/N<sub>0</sub> degradation exceeds the value in equation 4-1, then this test point is set to "fail." For a multi-GNSS and multi-signal EUT, there shall be a separate pass/fail determination for each GNSS and for each GNSS signal supported. If the C/N<sub>0</sub> degradation exceeds the value in equation 4-1 for any supported GNSS or supported GNSS signal, then this test point is set to "fail".

**TEST RESULT:**

Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	No interfering signal	With interfering signal	Limit	Measurement value (Max Hold) (dB)	Result
1 554MHz	-105 dBm	40.06	39.85	Decrease ≤ 1 dB	0.21	Pass
1 615MHz	-105 dBm	40.06	39.92	Decrease ≤ 1 dB	0.14	Pass
1 548MHz	-95 dBm	40.06	39.90	Decrease ≤ 1 dB	0.16	Pass
1 627MHz	-85 dBm	40.06	39.98	Decrease ≤ 1 dB	0.08	Pass
1 524MHz	-65 dBm	40.06	39.95	Decrease ≤ 1 dB	0.11	Pass


If the EUT passes the C/N<sub>0</sub> degradation test for all test points for all GNSS constellations and all GNSS signals declared as supported from table 4-1, the EUT shall be deemed to "pass".

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**6.2 ETSI EN 303 413 SUB. 4.2.2: SPURIOUS EMISSIONS**

**TEST SETUP:**

**Reference:** ETSI EN 300 328 V2.2.0.Subclasses Annex B

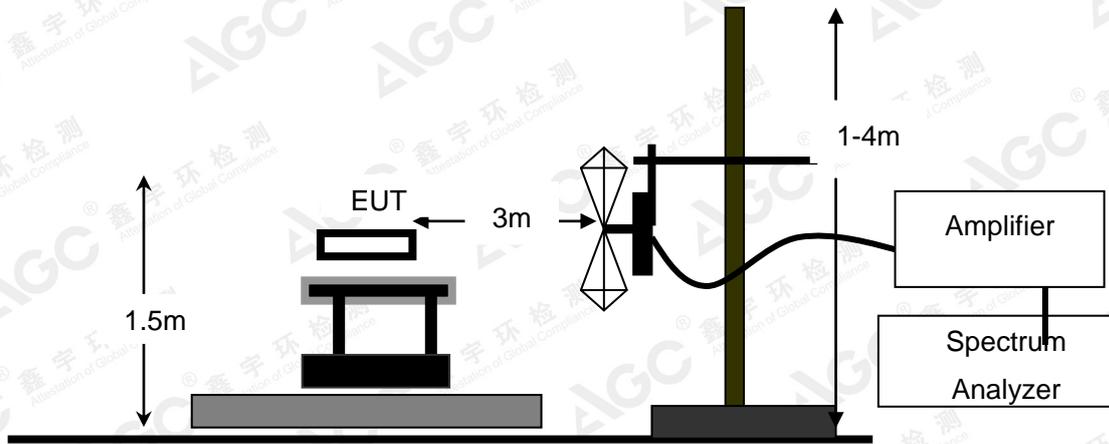

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

**TEST LIMITS:**

The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.

**THE PROCEDURE:**

EUT was placed on a 1.5m outdoor wooden table. The search antenna is placed at 3m distances from the EUT and search antenna height is from 1-4m. With the transmitter operating at continuously mode, the turntable was slowly rotated to locate the direction of maximum emission. Once maximum direction is determined, the search antenna was raised and lowered in both vertical and horizontal polarizations.

The EUT was removed from the turntable and replaced with a linearly polarized antenna connected to a calibrated RF signal generator. The RF generator was set to a measured emission frequency and the search antenna was raised and lowered to produce a maximum received reading. The generator output was increased to match the radiated emission reading measured previously, and the result expressed in dB EIRP or ERP, correcting for substitution antenna gain at each frequency.


**TEST RESULTS:**

Frequency (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power (dBm)	Limit (dBm)
239.135	H	-84.09	12.26	-71.83	-57
1458.206	H	-82.17	12.16	-69.91	-47
3863.007	H	-74.30	11.63	-62.67	-47
358.037	V	-82.44	12.78	-69.66	-57
1817.392	V	-78.89	12.12	-66.77	-47
3152.986	V	-72.28	12.25	-60.03	-47
Other (25-1000)	~	~	~	~	-57
Other (1G-26G)	~	~	~	~	-47


**Note:**

"~" in the table above means that the emissions are too small to be measured and are at least 20 dB below the limit. The frequency range below 1GHz is 30MHz to 1GHz and the frequency range above 1GHz is 1GHz to 26GHz.

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
**RADIATED SPURIOUS EMISSION TEST SETUP**

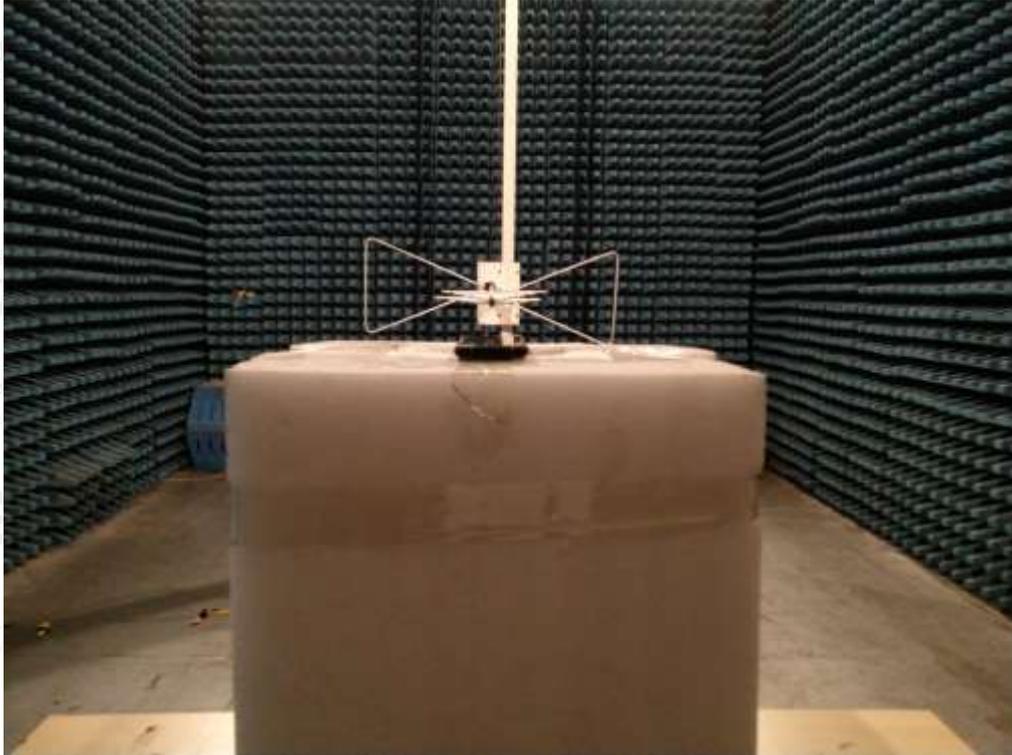

**RADIATED SPURIOUS EMISSION\_ABOVE 1G TEST SETUP**

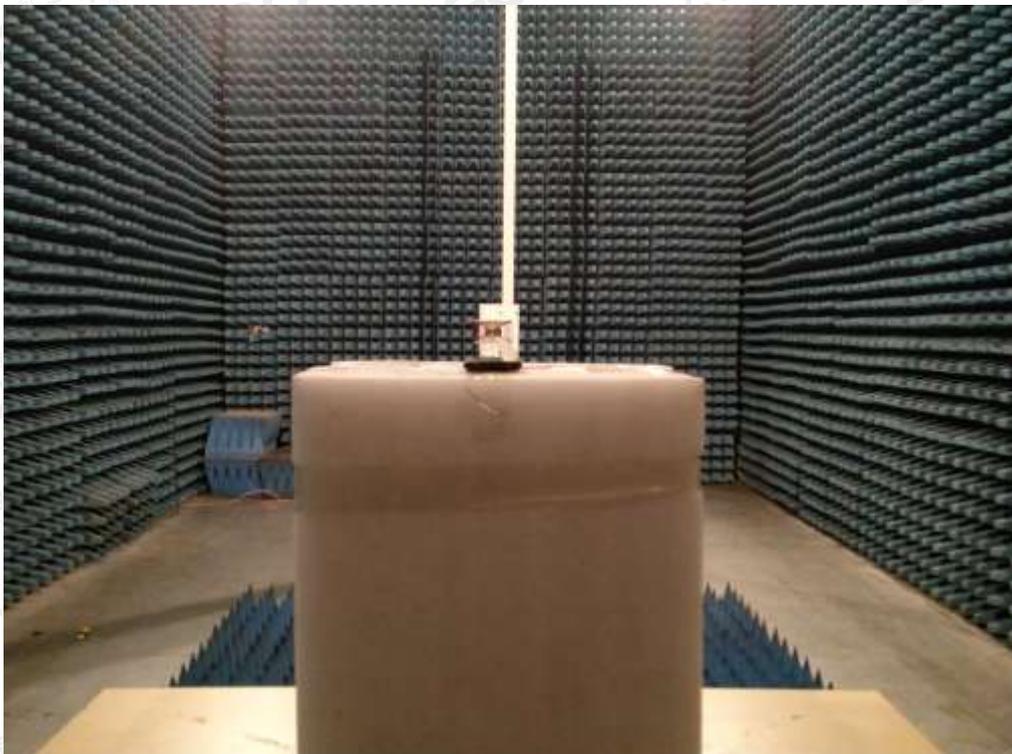

**----END OF REPORT----**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.