FCC EMC Test Report

Subject to
Supplier's Declaration of Conformity
Procedure

Product :	Smartphone
Trade Mark :	CUBOT
Model Number :	KINGKONG MINI 4, KINGKONG ACE 5, KINGKONG ACE 6, KINGKONG MINI 5, KINGKONG 11, X100

Prepared for

Shenzhen Huafurui Technology Co., Ltd.
Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
No. 24 Xinfa East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China
Tel.: 0755-2320 0050 Website: http://www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's Name ..... :	Shenzhen Huafurui Technology Co., Ltd.
Address ..... :	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Manufacturer's Name ..... :	Shenzhen Huafurui Technology Co., Ltd.
Address ..... :	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Product description

Product Name ..... :	Smartphone
Model Number ..... :	KINGKONG MINI 4, KINGKONG ACE 5, KINGKONG ACE 6, KINGKONG MINI 5, KINGKONG 11, X100
Standards ..... :	47 CFR FCC part 15 subpart B, 10-1-2024 ANSI C63.4:2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Test Sample Number ..... :	S2507310108-1#
Date of Test ..... :	
Date (s) of performance of tests ..... :	01 Aug. 2025 ~ 25 Aug. 2025
Date of Issue ..... :	25 Aug. 2025
Test Result ..... :	**Pass**

Testing Engineer	:	Allen Huang (Allen Huang)
Technical Manager	:	Sky Zhang (Sky Zhang)
Authorized Signatory	:	Alex (Alex)

Shenzhen NTEK Testing Technology Co., Ltd. NTEK Report Seal

Table of Contents **Page**

1 . TEST SUMMARY 4
1.1 TEST FACILITY 4
1.2 MEASUREMENT UNCERTAINTY 4
2 . GENERAL INFORMATION 6
2.1 GENERAL DESCRIPTION OF EUT 6
2.2 DESCRIPTION OF TEST MODES 7
2.3 DESCRIPTION OF TEST SETUP 7
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL 7
2.5 MEASUREMENT INSTRUMENTS LIST 8
2.6 MEASUREMENT SOFTWARE 9
3 . EMC EMISSION TEST 10
3.1 CONDUCTED EMISSION MEASUREMENT 10
3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz) 10
3.1.2 TEST PROCEDURE 10
3.1.3 TEST SETUP 10
3.1.4 EUT OPERATING CONDITIONS 10
3.1.5 TEST RESULTS 11
3.2 RADIATED EMISSION MEASUREMENT 13
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz) 13
3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz) 13
3.2.3 TEST PROCEDURE 13
3.2.4 TEST SETUP 14
3.2.5 EUT OPERATING CONDITIONS 14
3.2.6 TEST RESULTS (30-1000MHz) 15
3.2.7 TEST RESULTS (Above 1000MHz) 17
4 . EUT TEST PHOTO 19
ATTACHMENT PHOTOGRAPHS OF EUT 21

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
47 CFR FCC part 15 subpart B, 10-1-2024 ANSI C63.4:2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : No. 24 Xinfa East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, China

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2018 (identical to ISO/IEC 17025:2017)
The Certificate Registration Number is L5516

ISED-Registration : The Company Number: 9270A.
CAB identifier: CN0074.

FCC- Accredited : Test Firm Registration Number: 463705
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y** ± **U**, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95** %.

Test Item	Measurement Frequency Range	K	U(dB)
Conducted Emission	0.009MHz ~ 0.15MHz	2	3.7
Conducted Emission	0.15MHz ~ 30MHz	2	3.3
Radiated Emission(#1)	30MHz ~ 1000MHz	2	4.9
Radiated Emission(#1)	1000MHz ~ 18000MHz	2	5.1

Revision History

Report No.	Version	Description	Issued Date
N25073100106E	Rev.01	Initial issue of report	Aug. 25, 2025

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smartphone
Model Number	KINGKONG MINI 4
Additional Model Number(s)	KINGKONG ACE 5, KINGKONG ACE 6, KINGKONG MINI 5, KINGKONG 11, X100
Model Difference	All models are identical except model's name and color.
Product Description	The EUT is a Smartphone. Operating frequency: N/A Based on the application, features, or specification exhibited in User's Manual. More details of EUT technical specification, please refer to the User's Manual.
Power Source	AC Voltage
Power Rating	Adapter Model: TPA-418G050200UU01 Adapter Rating: Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2.0A, 10.0W Battery Rating: DC 3.85V, 4700mAh, 18.095Wh

2.2 DESCRIPTION OF TEST MODES


To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively. All test modes in the table below are tested, the worst case is listed on this report.

Pretest Mode	Description
Mode 1	Charging + REC(Front / Rear)
Mode 2	Charging + TF Playing
Mode 3	Data Transmission
Mode 4	TF Playing + Earphone

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging + REC(Front / Rear)
Mode 2	Charging + TF Playing
Mode 3	Data Transmission

For Radiated Test	
Final Test Mode	Description
Mode 1	Charging + REC(Front / Rear)
Mode 2	Charging + TF Playing
Mode 3	Data Transmission
Mode 4	TF Playing + Earphone

2.3 DESCRIPTION OF TEST SETUP



2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Smartphone	CUBOT	KINGKONG MINI 4	N/A	EUT
E-2	Adapter	TIANYIN	TPA-418G050200UU01	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	100cm	

Note:
(1) The support equipment was authorized by Declaration of Confirmation.
(2) For detachable type I/O cable should be specified the length in cm in『Length』column.
(3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 CONDUCTED TEST

Item	Name of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Single Phase LISN	R&S	ENV216	101490	Apr. 16, 2025	Apr. 15, 2026	1 year
2	Single Phase LISN	R&S	ENV216	101313	Apr. 16, 2025	Apr. 15, 2026	1 year
3	Three-Phase LISN	SCHWARZBECK	NNLK 8129	8129245	Apr. 16, 2025	Apr. 15, 2026	1 year
4	Low Frequency Cable	N/A	R-03	N/A	Apr. 25, 2024	Apr. 24, 2027	3 years
5	50Ω Coaxial Switch	Anritsu	MP59B	6200983704	Apr. 26, 2024	Apr. 25, 2027	3 years
6	EMI Test Receiver	R&S	ESCI	101160	Apr. 17, 2025	Apr. 16, 2026	1 year
7	EMI Test Receiver	R&S	ESPI3	101417	Jul. 23, 2025	Jul. 22, 2026	1 year
8	EMI Test Receiver	R&S	ESPI3	100145	Apr. 16, 2025	Apr. 15, 2026	1 year
9	DC-AMN LISN	SCHWARZBECK	PVDC 8301	8301-00117	Apr. 16, 2025	Apr. 15, 2026	1 year
10	Single Phase LISN	R&S	ENV216	102849	Apr. 16, 2025	Apr. 15, 2026	1 year
11	Single Phase LISN	R&S	ENV216	102827	Apr. 16, 2025	Apr. 15, 2026	1 year

2.5.2 RADIATED TEST

Item	Name of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	3m Anechoic Chamber	N/A	9*6*6	N/A	Jun. 07, 2024	Jun. 06, 2027	3 years
2	3m Anechoic Chamber	N/A	9*6*6	N/A	Jun. 18, 2024	Jun. 17, 2027	3 years
3	EMI Test Receiver	R&S	ESPI7	101318	Apr. 17, 2025	Apr. 16, 2026	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	Apr. 26, 2024	Apr. 25, 2027	3 years
5	Cable	Talent Microwave	A81-NWMSMAM-12M	21120897	Apr. 26, 2024	Apr. 25, 2027	3 years
6	Cable	Talent Microwave	A81-NMNM-10M	24012011	Apr. 26, 2024	Apr. 25, 2027	3 years
7	Cable	Talent Microwave	A81-NMNM-10M	22084896	Apr. 26, 2024	Apr. 25, 2027	3 years
8	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	675	Apr. 29, 2025	Apr. 28, 2026	1 year
9	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	584	Apr. 19, 2025	Apr. 18, 2026	1 year
10	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	586	Apr. 24, 2025	Apr. 23, 2026	1 year
11	Cable	Talent Microwave	A81-NMNM-2M	22084895	Apr. 26, 2024	Apr. 25, 2027	3 years
12	Attenuator	Eastsheep	5W-N-JK-6G-6DB	N/A	Apr. 17, 2025	Apr. 16, 2026	1 year
13	Attenuator	Eastsheep	5W-N-JK-6G-6DB	1#	Jul. 11, 2025	Jul. 10, 2026	1 year
14	Attenuator	Eastsheep	5W-N-JK-6G-6DB	2#	Jul. 11, 2025	Jul. 10, 2026	1 year
15	Attenuator	Eastsheep	5W-N-JK-6G-6DB	3#	Jul. 11, 2025	Jul. 10, 2026	1 year
16	Broadband Horn Antenna	EM	EM-AH-10180	2011071402	May 12, 2024	May 11, 2027	3 years
17	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	May 18, 2024	May 17, 2027	3 years
18	Broadband Horn Antenna	SCHWARZBECK	BBHA 9120 D	2817	May 12, 2024	May 11, 2027	3 years
19	Spectrum Analyzer	Keysight	N9020A	MY53280244	Apr. 16, 2025	Apr. 15, 2026	1 year
20	Spectrum Analyzer	Agilent	E4440A	MY41000130	Apr. 24, 2025	Apr. 23, 2026	1 year

21	Pre-Amplifier	EMC	EMC051835SE	980246	Apr. 17, 2025	Apr. 16, 2026	1 year
22	PREAMPLIFIER	Agilent	8449B	30008A01520	Apr. 16, 2025	Apr. 15, 2026	1 year
23	Low Noise Amplifier	B&Z	BZ-P540-550850-452727	16476-11729	Apr. 17, 2025	Apr. 16, 2026	1 year
24	Cable	Keysight	A40-2.92M 2.92M-2M	1808041	Apr. 26, 2024	Apr. 25, 2027	3 years
25	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	803	May 12, 2024	May 11, 2027	3 years

2.6 MEASUREMENT SOFTWARE

CONDUCTED TEST		
Software name	Manufacturer	Version number
EZ-EMC_CE	Farad	AIT-03A
RADIATED TEST		
Software name	Manufacturer	Version number
EZ-EMC_RE	Farad	EMEC-3A1+

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

Frequency Range (MHz)	☐Class A (dBμV)		☒Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.


b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.1.3 TEST SETUP

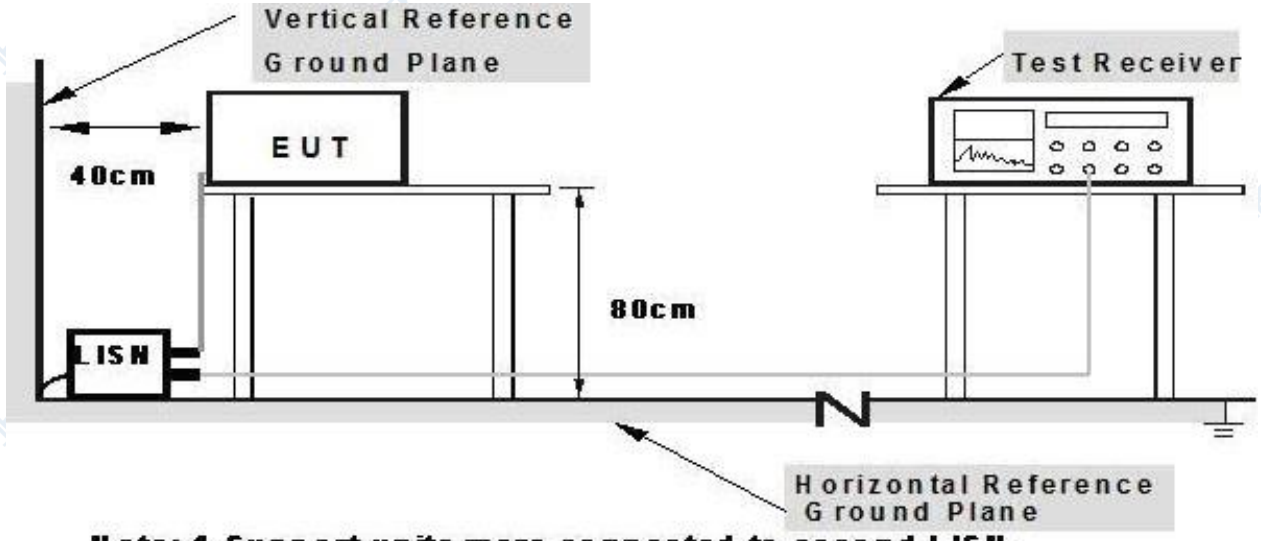


Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.5 TEST RESULTS


EUT:	Smartphone	Model Name:	KINGKONG MINI 4
Temperature:	21.5℃	Relative Humidity:	63.0%RH
Pressure:	1010hPa	Test Date:	2025-08-05
Test Mode:	Charging + REC(Front)	Phase:	L
Test Voltage:	AC 120V/60Hz		

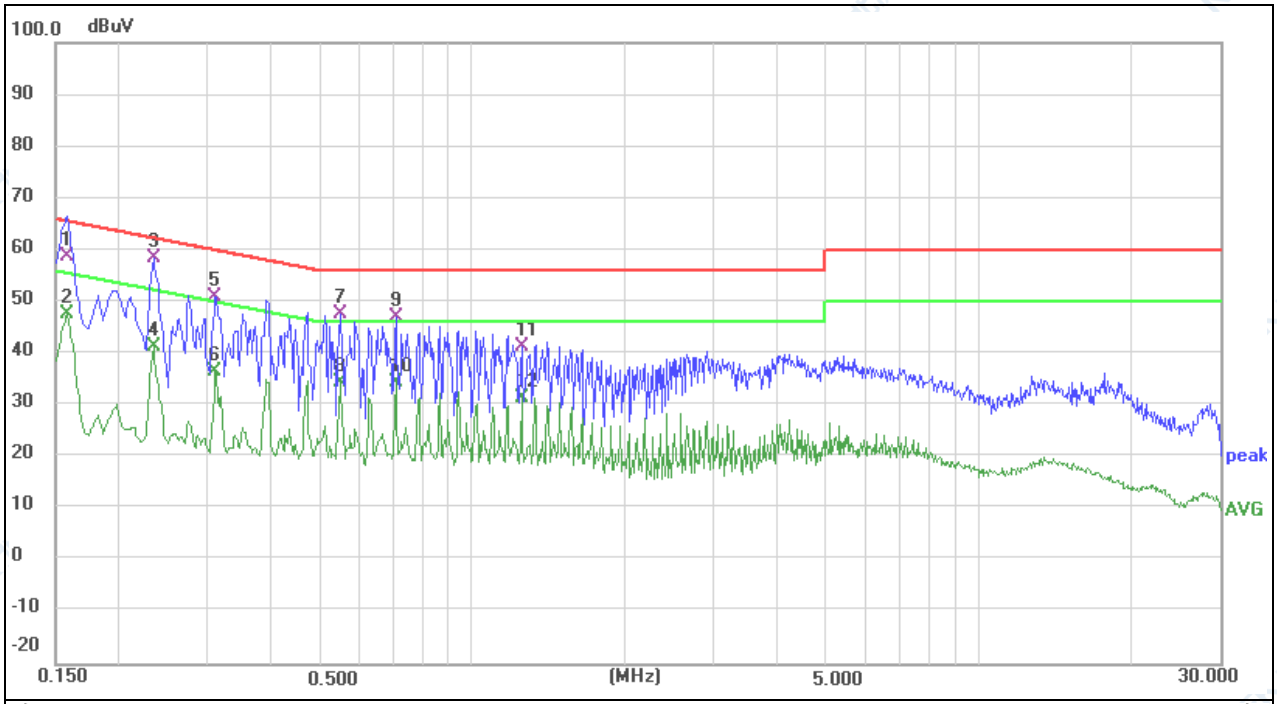

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1580	48.63	10.03	58.66	65.57	-6.91	QP	P	
2	0.1580	37.49	10.03	47.52	55.57	-8.05	AVG	P	
3 *	0.2340	48.28	10.18	58.46	62.31	-3.85	QP	P	
4	0.2340	31.20	10.18	41.38	52.31	-10.93	AVG	P	
5	0.3100	40.61	10.35	50.96	59.97	-9.01	QP	P	
6	0.3100	26.25	10.35	36.60	49.97	-13.37	AVG	P	
7	0.5460	36.78	10.83	47.61	56.00	-8.39	QP	P	
8	0.5460	23.77	10.83	34.60	46.00	-11.40	AVG	P	
9	0.7060	35.85	11.18	47.03	56.00	-8.97	QP	P	
10	0.7060	23.24	11.18	34.42	46.00	-11.58	AVG	P	
11	1.2500	29.17	12.33	41.50	56.00	-14.50	QP	P	
12	1.2500	19.22	12.33	31.55	46.00	-14.45	AVG	P	

Remark:
Correct Factor = Insertion Loss + Cable Loss
Measurement Level = Reading Level + Correct Factor
Over Level = Measurement Level - Limit

EUT:	Smartphone	Model Name:	KINGKONG MINI 4
Temperature:	21.5℃	Relative Humidity:	63.0%RH
Pressure:	1010hPa	Test Date:	2025-08-05
Test Mode:	Charging + REC(Front)	Phase:	N
Test Voltage:	AC 120V/60Hz		

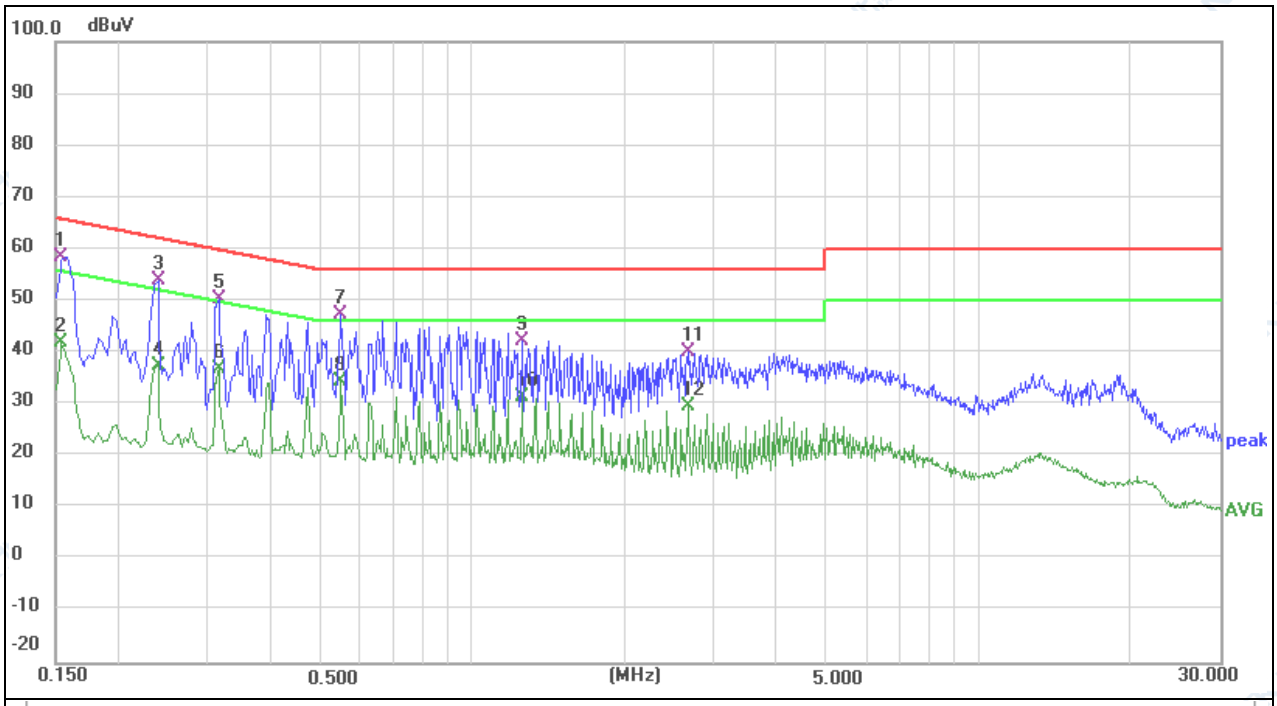

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1539	48.55	10.00	58.55	65.79	-7.24	QP	P	
2	0.1539	32.01	10.00	42.01	55.79	-13.78	AVG	P	
3	0.2380	43.64	10.20	53.84	62.17	-8.33	QP	P	
4	0.2380	27.14	10.20	37.34	52.17	-14.83	AVG	P	
5	0.3140	39.93	10.35	50.28	59.86	-9.58	QP	P	
6	0.3140	26.64	10.35	36.99	49.86	-12.87	AVG	P	
7	0.5500	36.56	10.84	47.40	56.00	-8.60	QP	P	
8	0.5500	23.60	10.84	34.44	46.00	-11.56	AVG	P	
9	1.2540	30.03	12.32	42.35	56.00	-13.65	QP	P	
10	1.2540	19.11	12.32	31.43	46.00	-14.57	AVG	P	
11	2.6700	24.81	15.27	40.08	56.00	-15.92	QP	P	
12	2.6700	14.49	15.27	29.76	46.00	-16.24	AVG	P	

Remark:
Correct Factor = Insertion Loss + Cable Loss
Measurement Level = Reading Level + Correct Factor
Over Level = Measurement Level - Limit

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	At 3m	
	☐Class A (dBμV/m)	☒Class B (dBμV/m)
30 ~ 88	49.5	40.0
88 ~ 216	53.9	43.5
216 ~ 960	56.9	46.0
960 ~ 1000	60.0	54.0

3.2.2 LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	At 3m			
	☐Class A (dBμV/m)		☒Class B (dBμV/m)	
	Average	Peak	Average	Peak
Above 1000	60	80	54	74

Note:

(1) The limit for radiated test was performed according to as following: FCC PART 15B.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBμV/m)=20log Emission level (μV/m).

3.2.3 TEST PROCEDURE

a. The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.

b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.


d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.

e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.


f. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

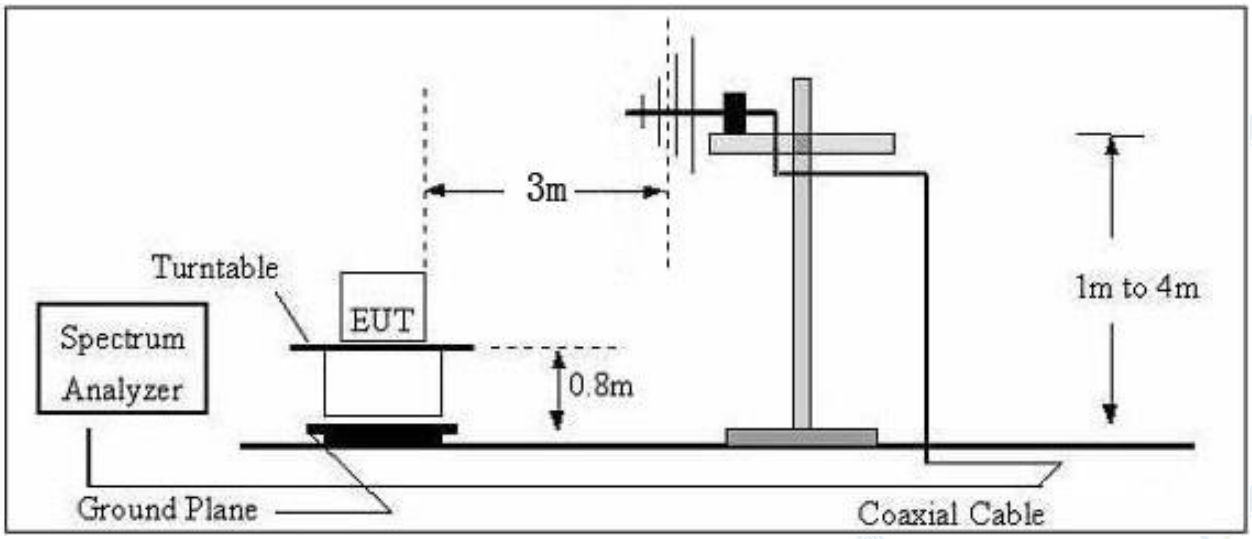

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

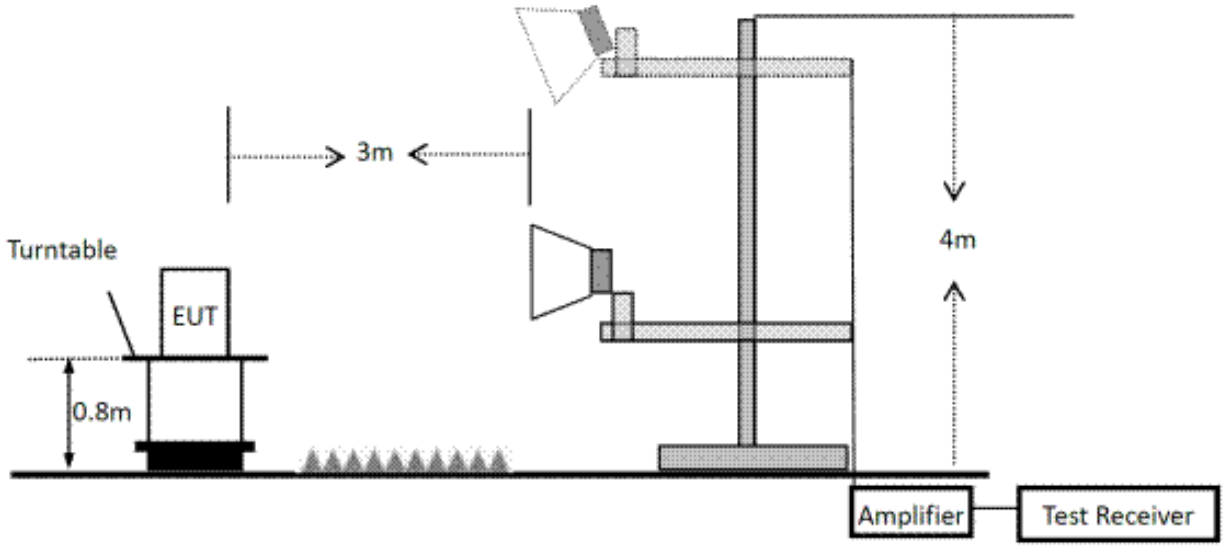


3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (30-1000MHz)


EUT:	Smartphone	Model Name:	KINGKONG MINI 4
Temperature:	25.6℃	Relative Humidity:	54%RH
Pressure:	1010hPa	Test Date:	2025-08-04
Test Mode:	Charging + REC(Front)	Polarization:	Horizontal
Test Power:	AC 120V/60Hz		

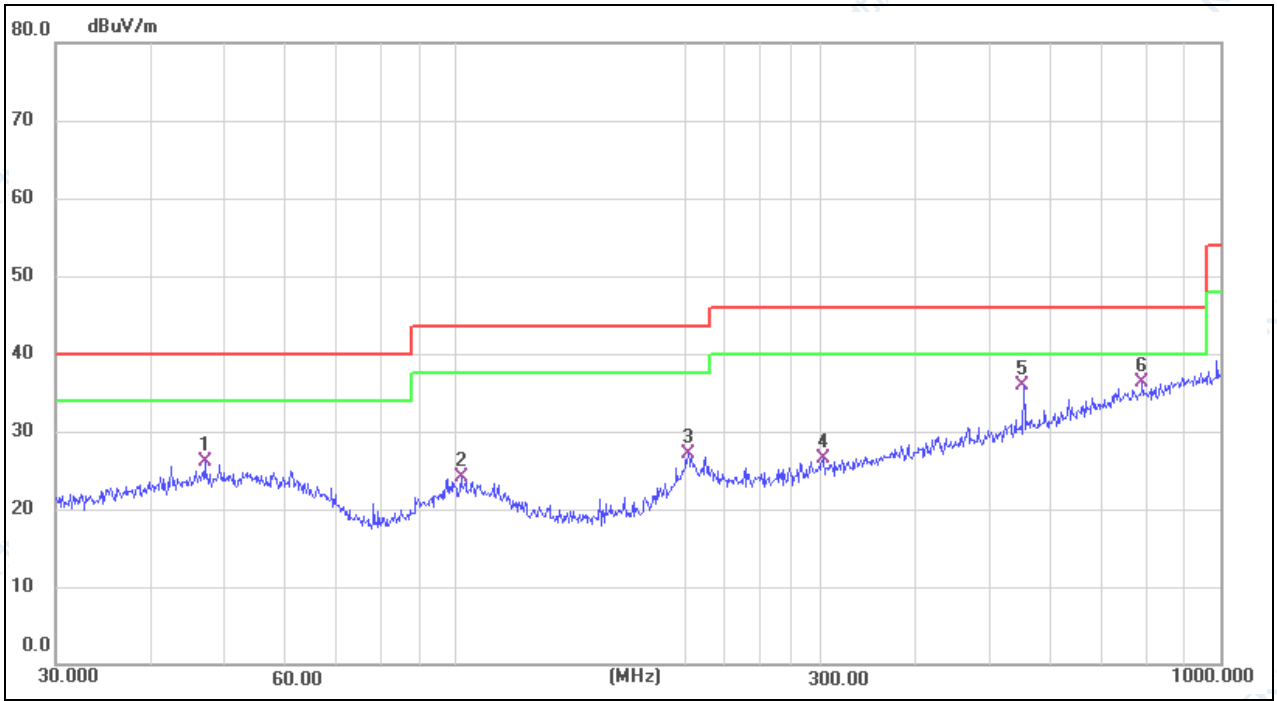

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F			Remark
1	46.9948	6.35	19.66	26.01	40.00	-13.99	QP	P			
2	101.6443	6.25	17.95	24.20	43.50	-19.30	QP	P			
3	201.3930	9.02	18.11	27.13	43.50	-16.37	QP	P			
4	302.4812	6.03	20.50	26.53	46.00	-19.47	QP	P			
5	552.8832	10.18	25.64	35.82	46.00	-10.18	QP	P			
6 *	790.6188	6.59	29.64	36.23	46.00	-9.77	QP	P			

Remark:
Correct Factor = Antenna Factor + Cable Loss
Measurement Level = Reading Level + Correct Factor
Over Level = Measurement Level - Limit

EUT:	Smartphone	Model Name:	KINGKONG MINI 4
Temperature:	25.6℃	Relative Humidity:	54%RH
Pressure:	1010hPa	Test Date:	2025-08-04
Test Mode:	Charging + REC(Front)	Polarization:	Vertical
Test Power:	AC 120V/60Hz		

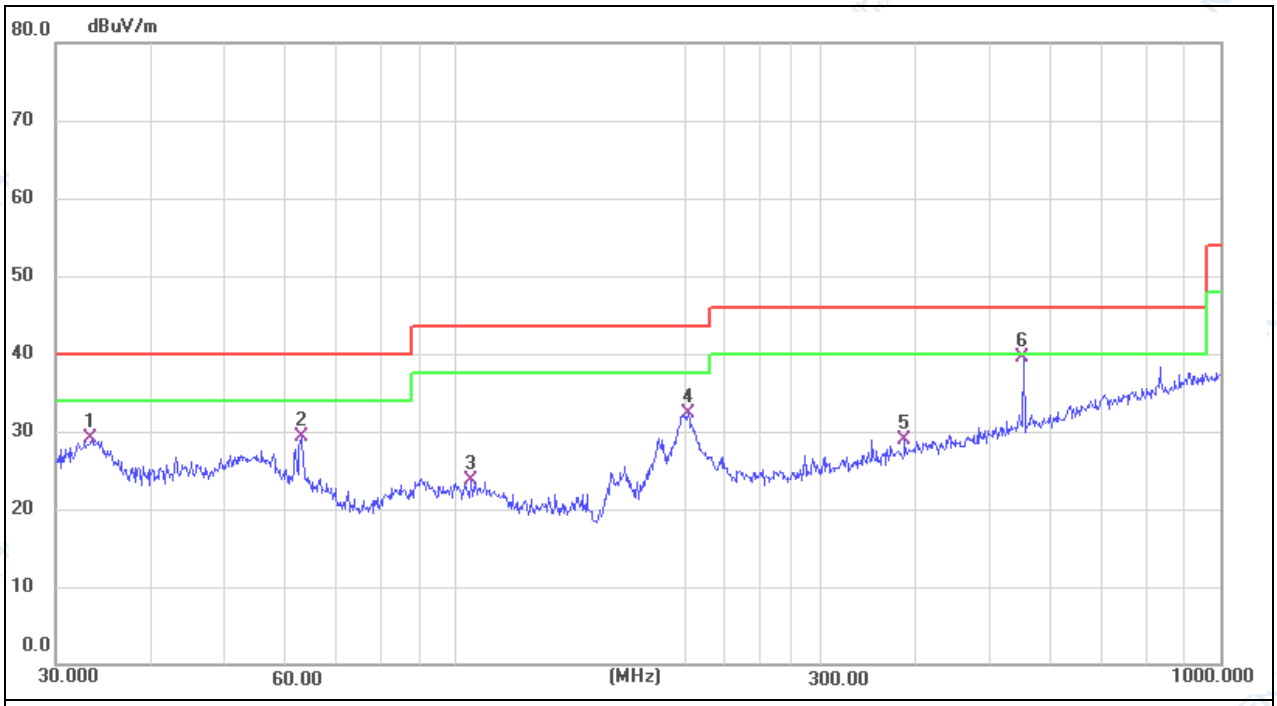


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F			Remark
1	33.4449	12.01	17.04	29.05	40.00	-10.95	QP	P			
2	62.8708	10.85	18.47	29.32	40.00	-10.68	QP	P			
3	104.9033	5.50	18.19	23.69	43.50	-19.81	QP	P			
4	201.3930	14.19	18.11	32.30	43.50	-11.20	QP	P			
5	386.6338	6.33	22.66	28.99	46.00	-17.01	QP	P			
6 *	552.8832	13.84	25.64	39.48	46.00	-6.52	QP	P			

Remark:
Correct Factor = Antenna Factor + Cable Loss
Measurement Level = Reading Level + Correct Factor
Over Level = Measurement Level - Limit

3.2.7 TEST RESULTS (Above 1000MHz)


EUT:	Smartphone	Model Name:	KINGKONG MINI 4
Temperature:	24.8℃	Relative Humidity:	53%RH
Pressure:	1010hPa	Test Date:	2025-08-05
Test Mode:	Charging + REC(Front)	Polarization:	Horizontal
Test Power:	AC 120V/60Hz		

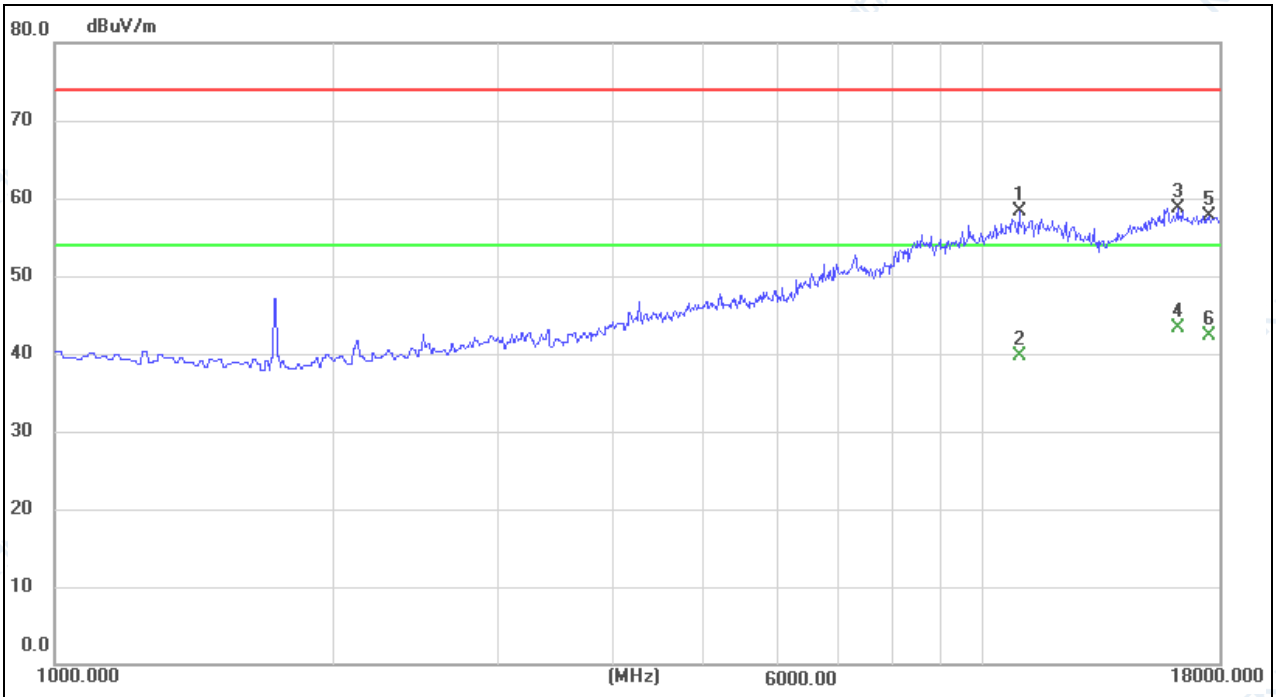

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F			Remark
1	10945.000	46.21	12.16	58.37	74.00	-15.63	peak	P			
2	10945.000	27.64	12.16	39.80	54.00	-14.20	AVG	P			
3	16181.000	45.59	13.16	58.75	74.00	-15.25	peak	P			
4 *	16181.000	30.14	13.16	43.30	54.00	-10.70	AVG	P			
5	17524.000	42.38	15.25	57.63	74.00	-16.37	peak	P			
6	17524.000	27.15	15.25	42.40	54.00	-11.60	AVG	P			

Remark:
Correct Factor = Antenna Factor + Cable Loss
Measurement Level = Reading Level + Correct Factor
Over Level = Measurement Level - Limit

EUT:	Smartphone	Model Name:	KINGKONG MINI 4
Temperature:	24.8℃	Relative Humidity:	53%RH
Pressure:	1010hPa	Test Date:	2025-08-05
Test Mode:	Charging + REC(Front)	Polarization:	Vertical
Test Power:	AC 120V/60Hz		

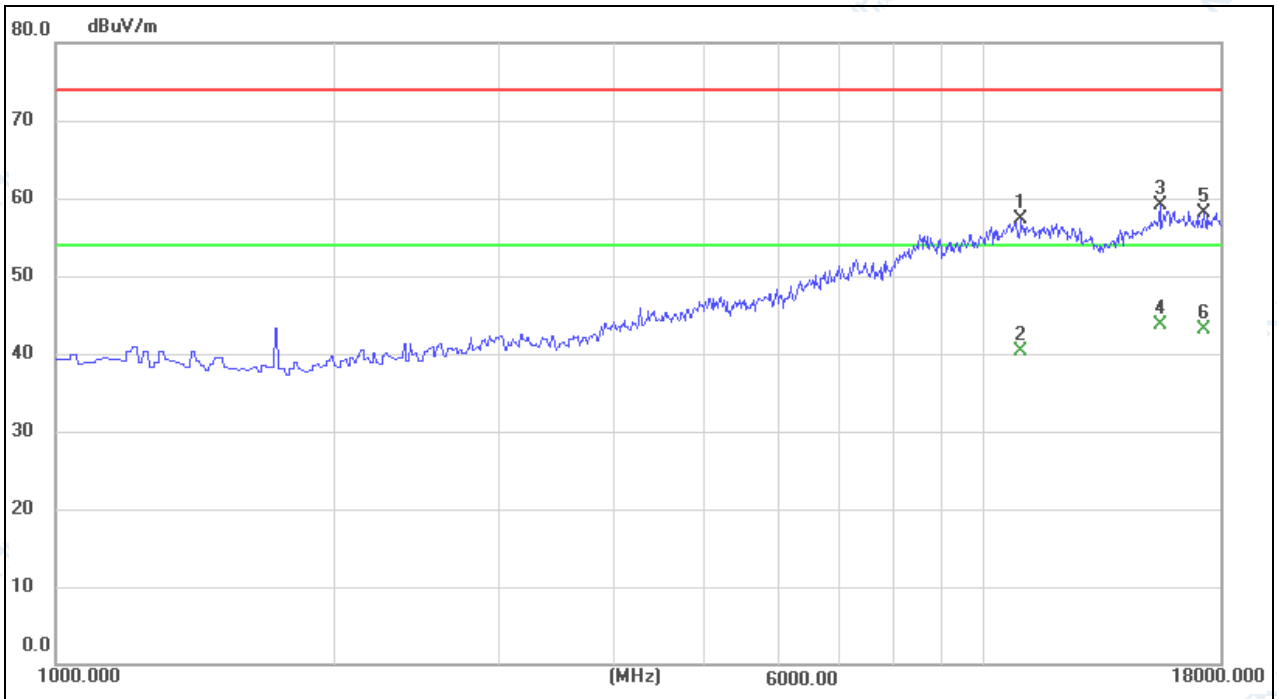



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F			Remark
1	10979.000	45.09	12.13	57.22	74.00	-16.78	peak	P			
2	10979.000	28.27	12.13	40.40	54.00	-13.60	AVG	P			
3	15450.000	45.29	13.80	59.09	74.00	-14.91	peak	P			
4 *	15450.000	29.87	13.80	43.67	54.00	-10.33	AVG	P			
5	17269.000	43.64	14.49	58.13	74.00	-15.87	peak	P			
6	17269.000	28.61	14.49	43.10	54.00	-10.90	AVG	P			

Remark:
Correct Factor = Antenna Factor + Cable Loss
Measurement Level = Reading Level + Correct Factor
Over Level = Measurement Level - Limit


4. EUT TEST PHOTO

Radiated Measurement Photo

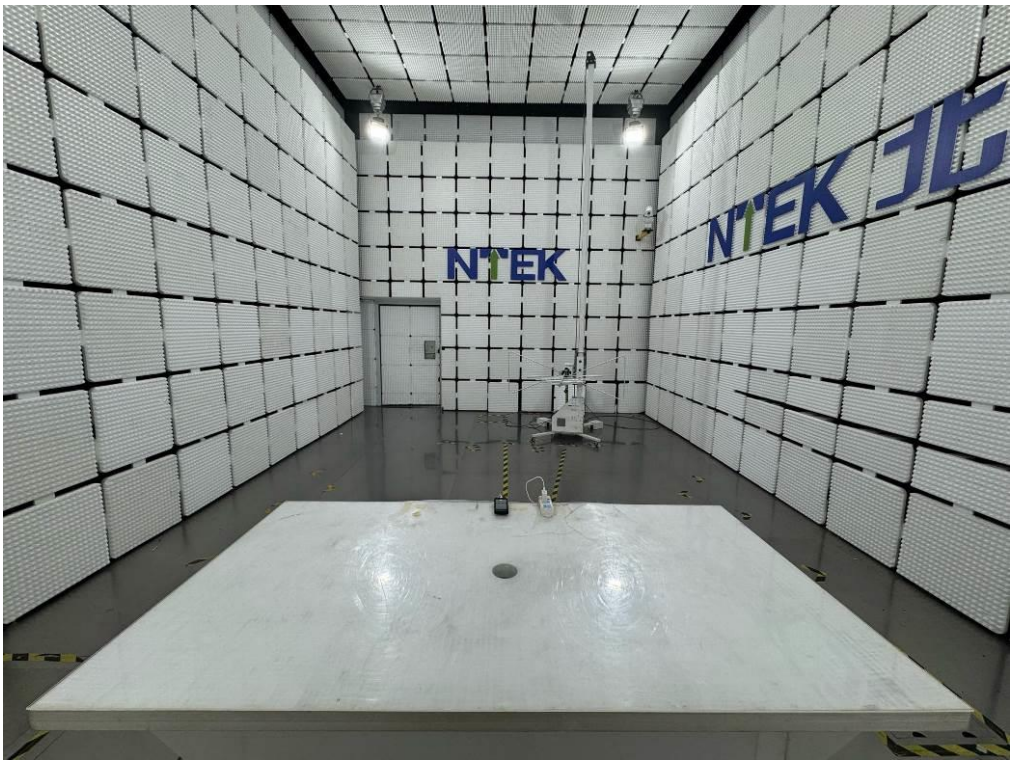

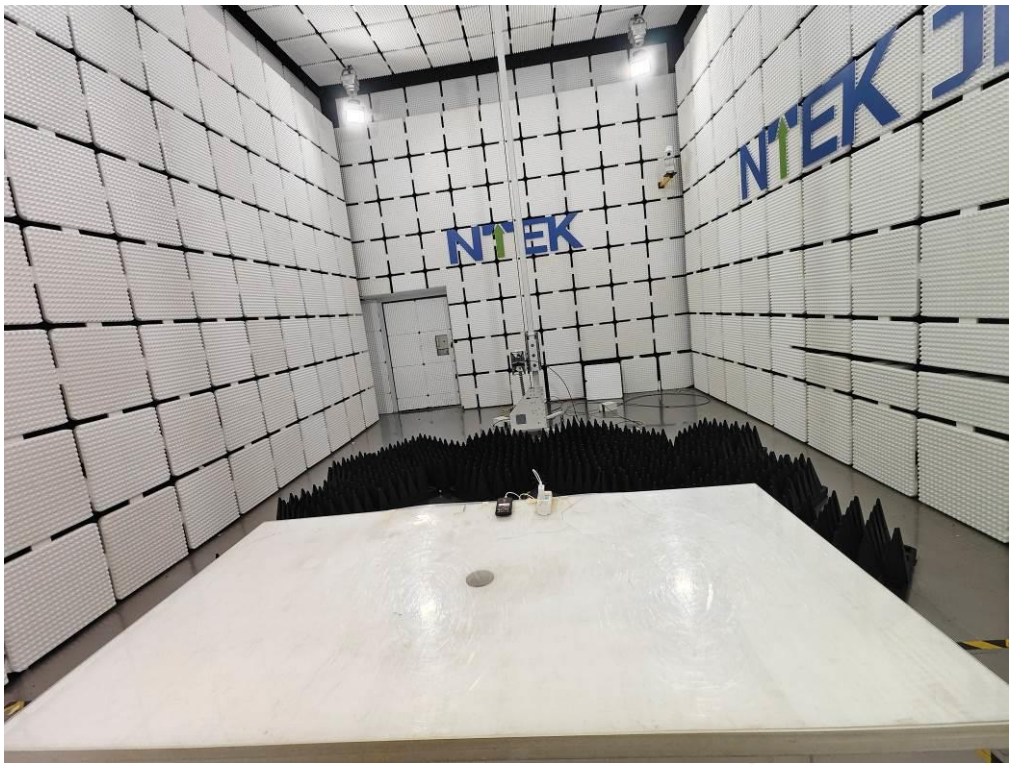

Conducted Measurement Photo

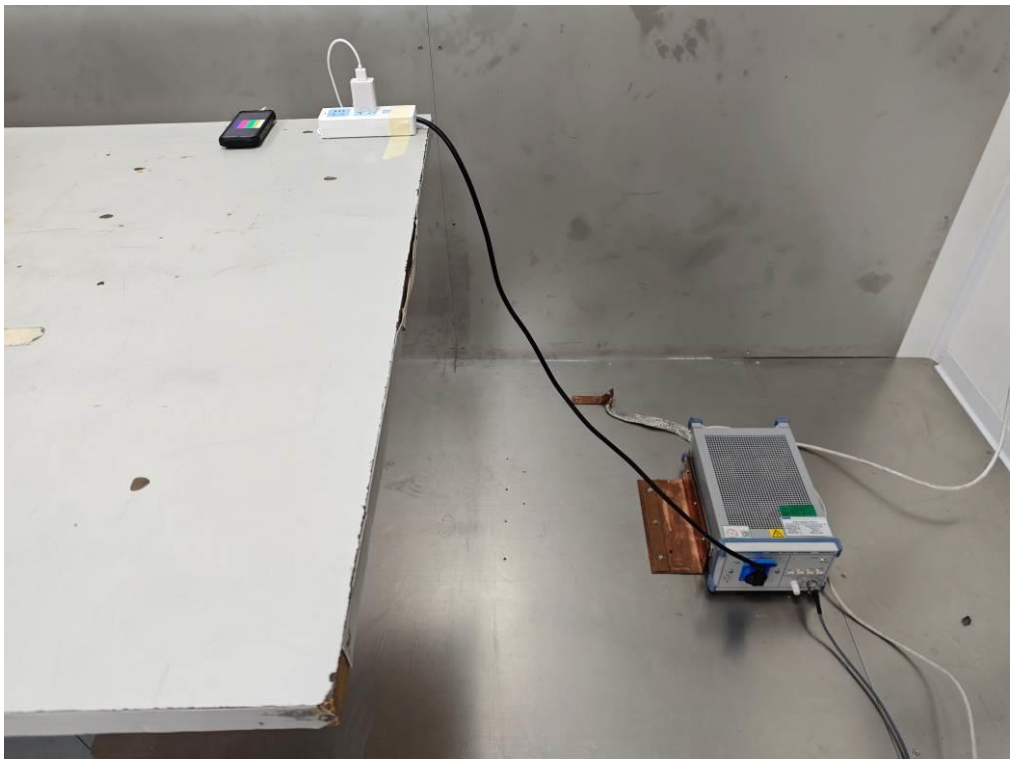

ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7



Photo 8



Photo 9

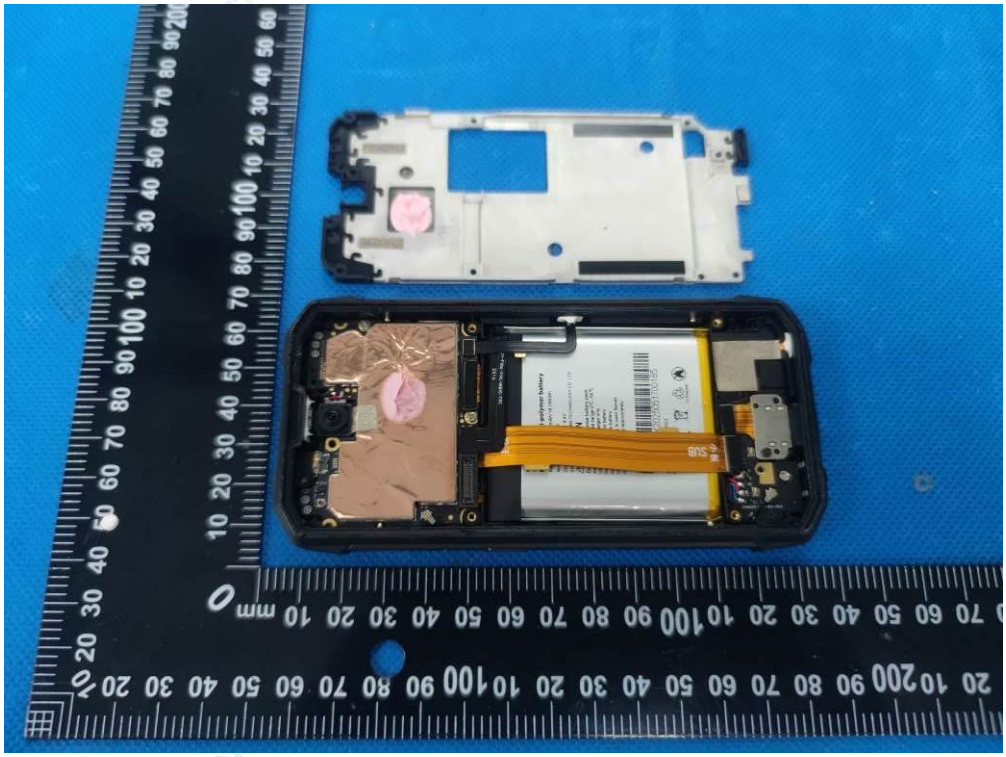


Photo 10



Photo 11

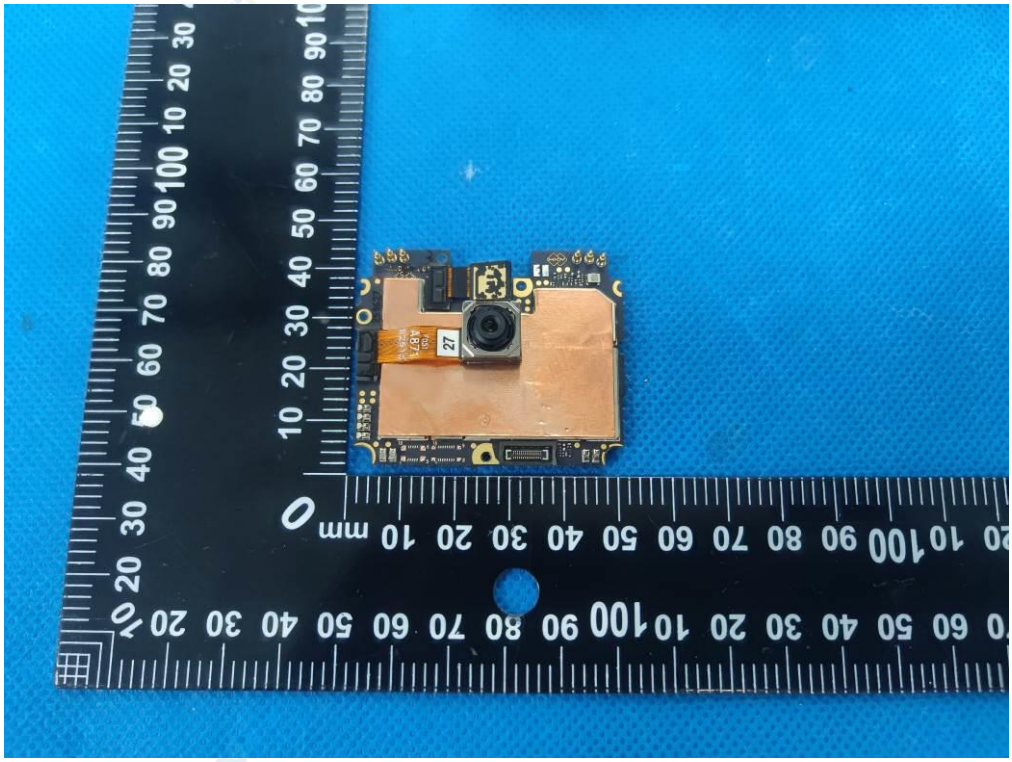


Photo 12

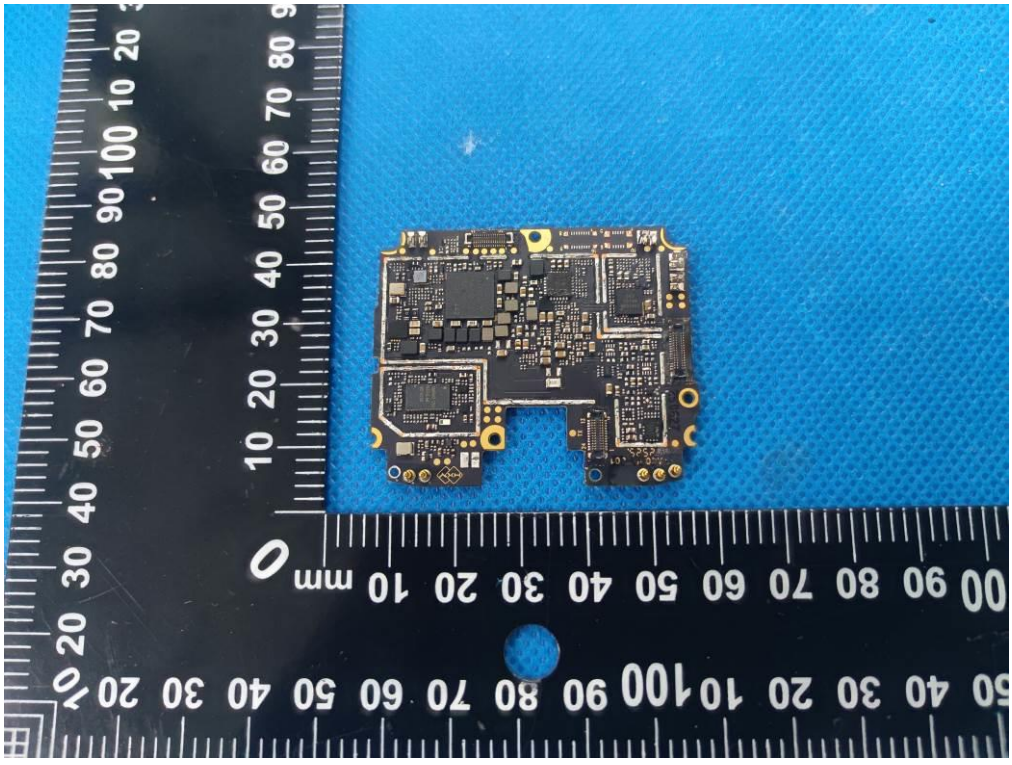


Photo 13

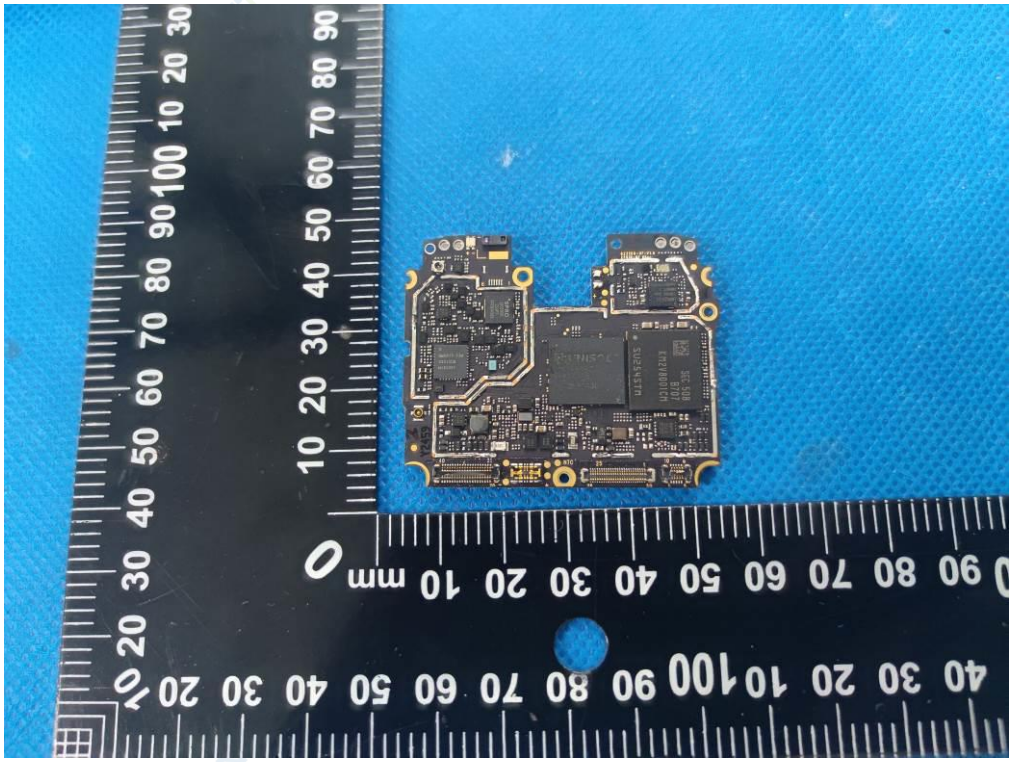


Photo 14

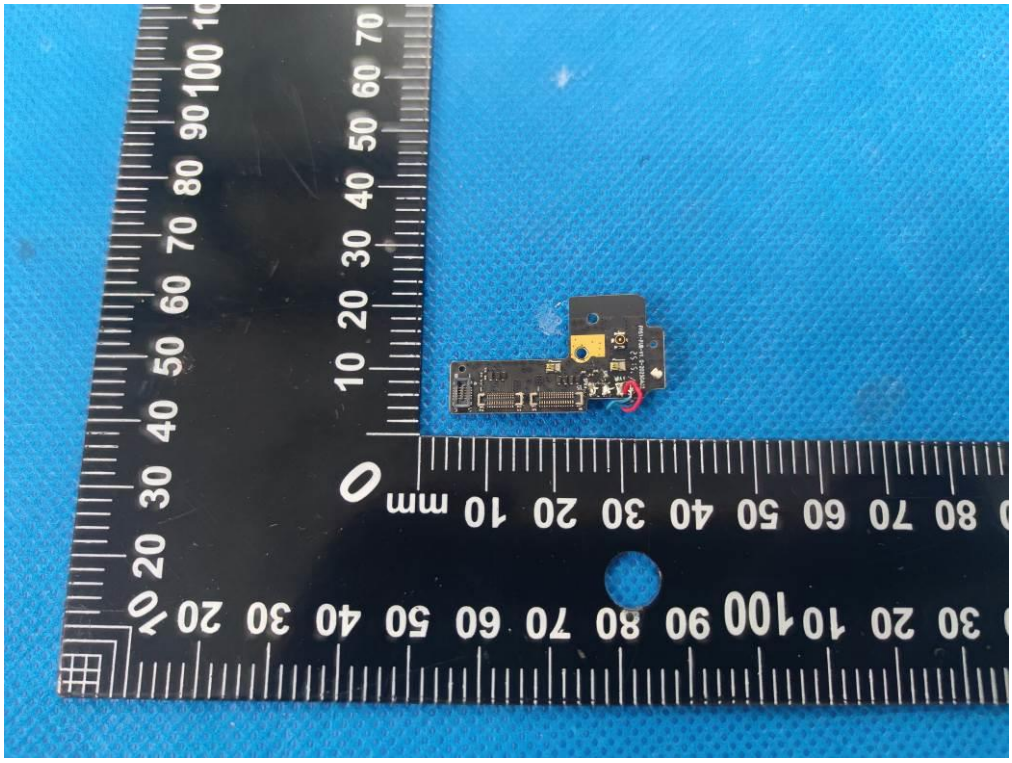


Photo 15

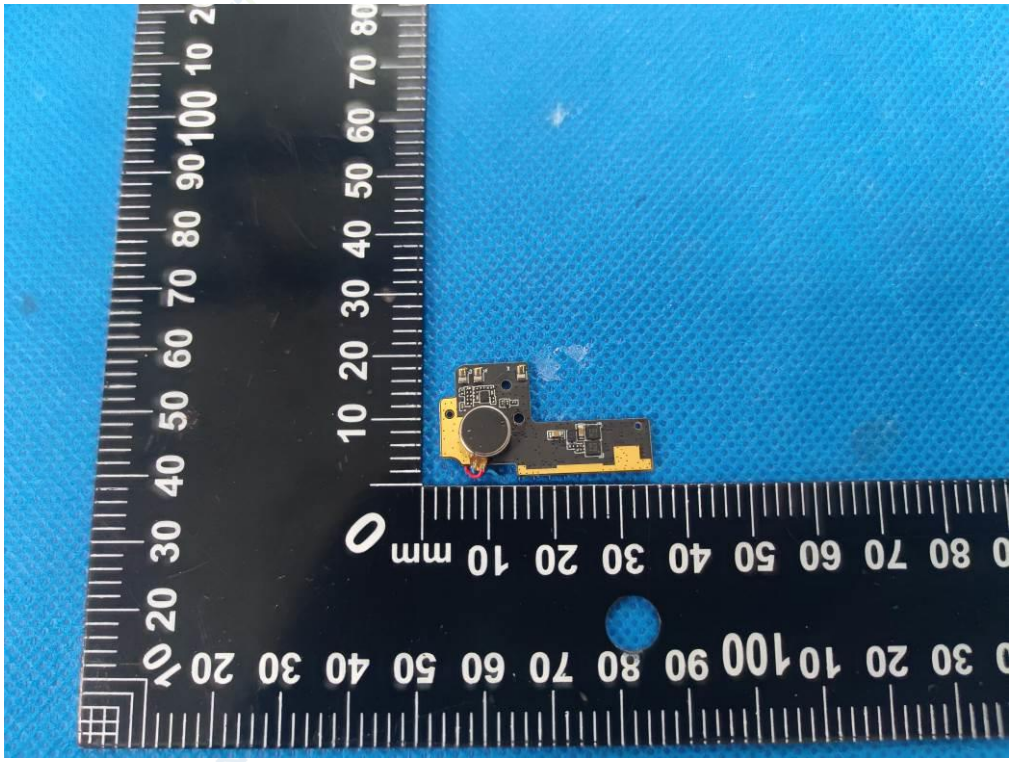


Photo 16

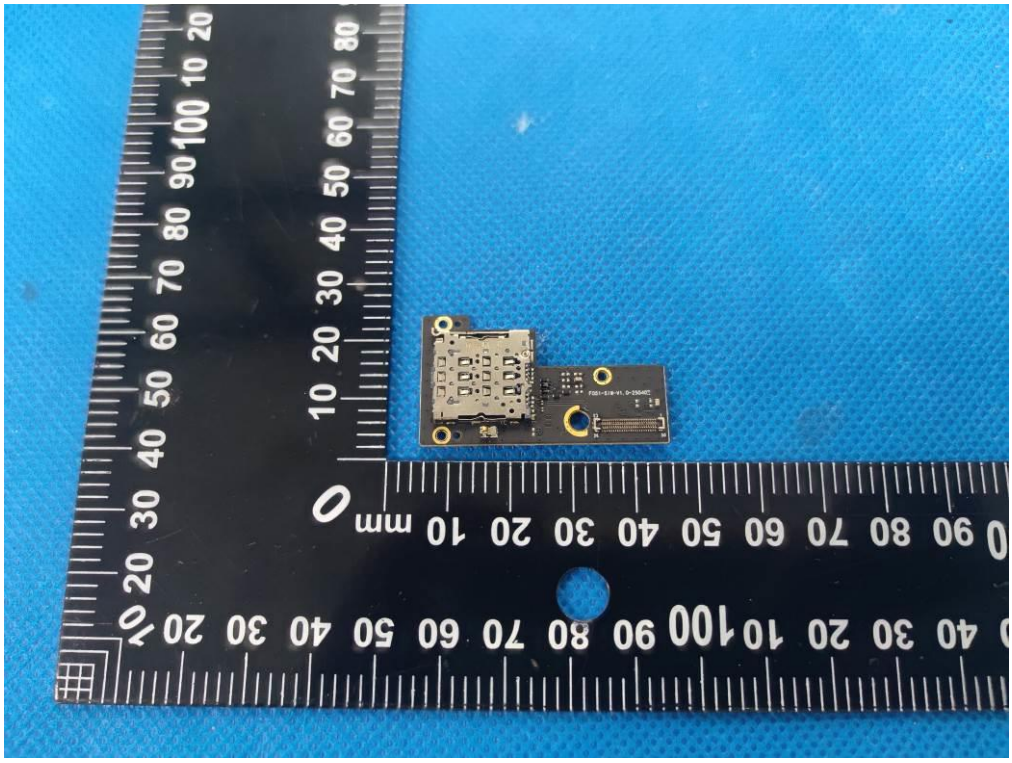


Photo 17

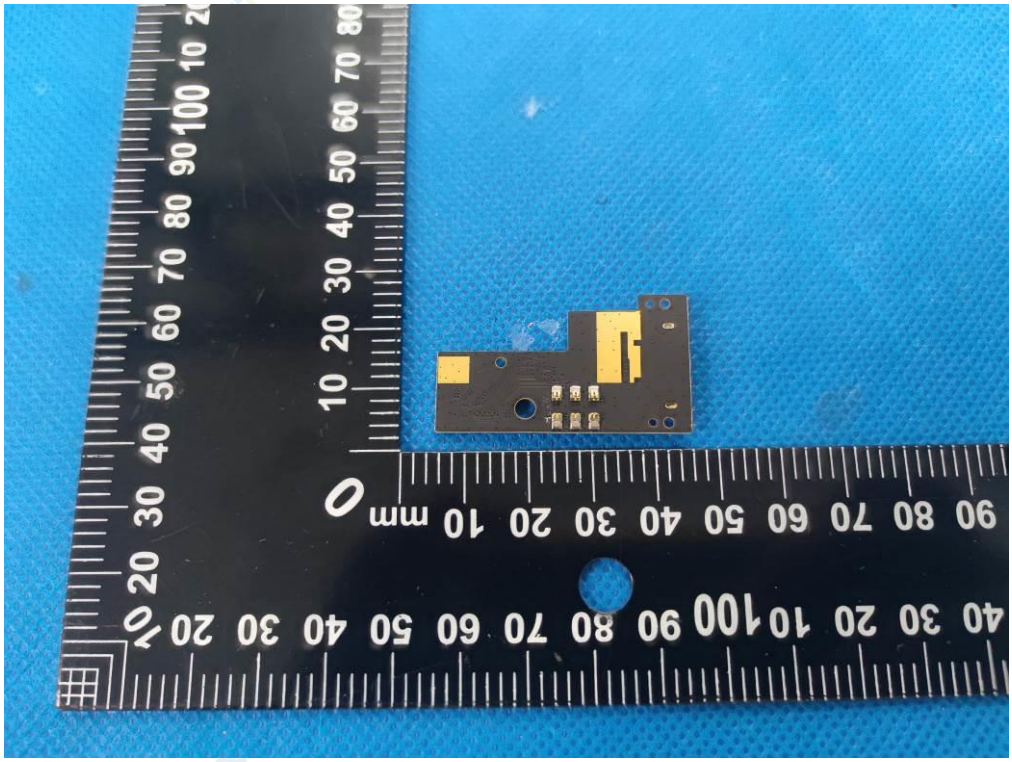


Photo 18



Photo 19

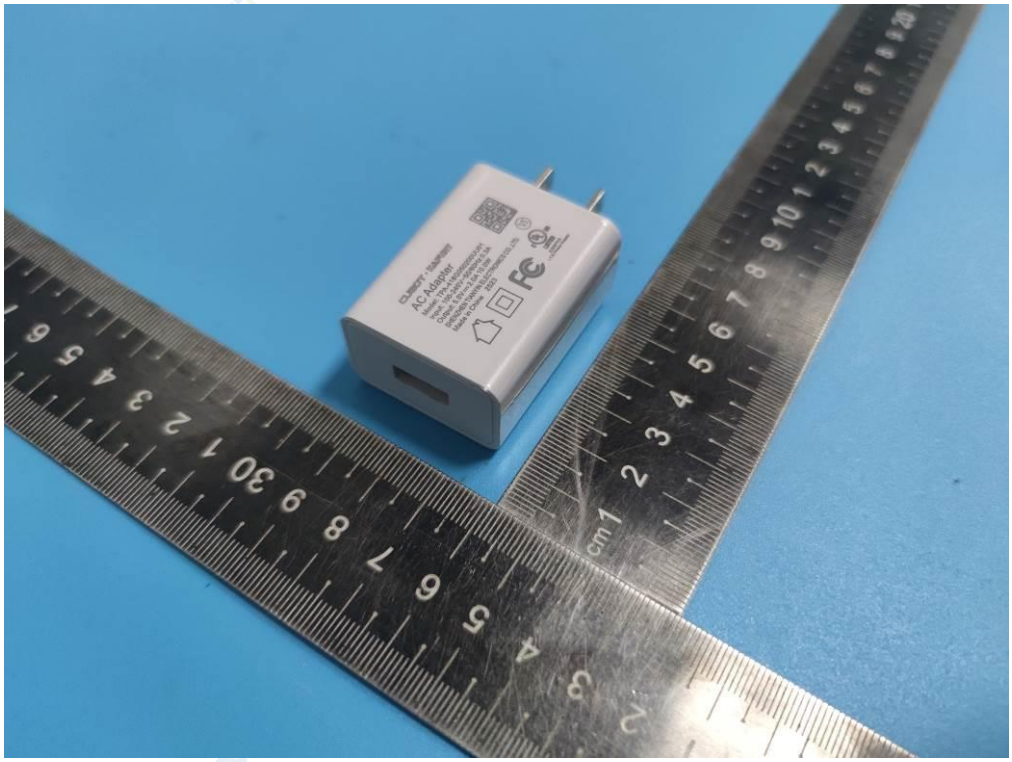


Photo 20

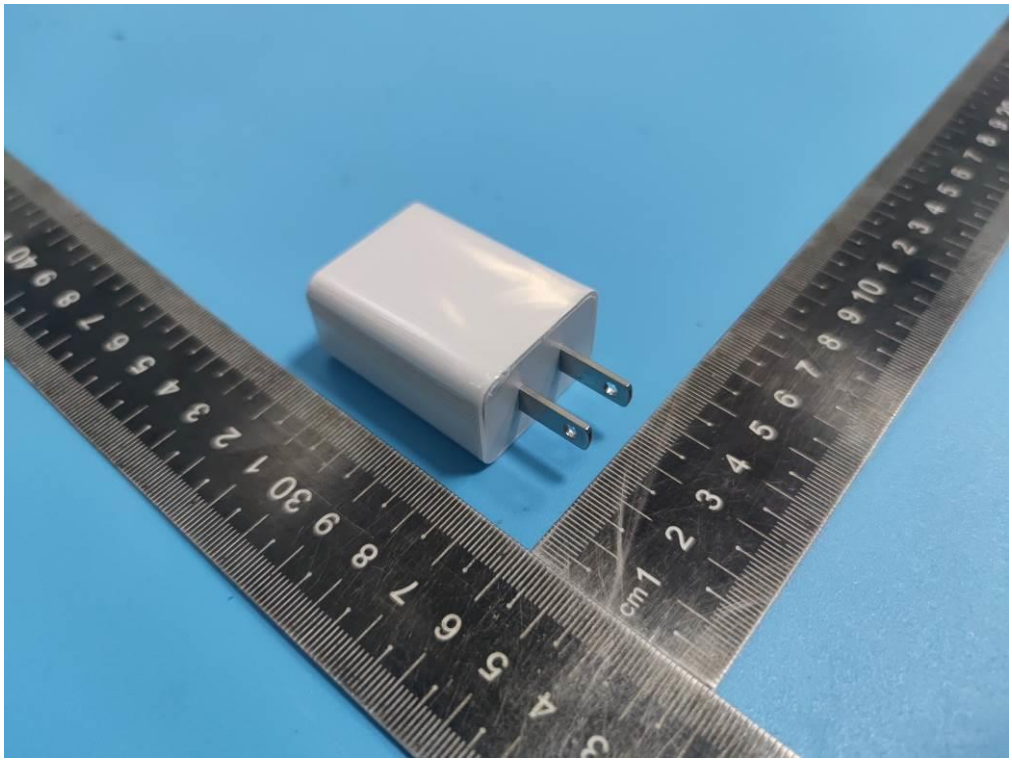


Photo 21



------ End of Report ------