




# Test Report

Test Report No. ....:	TCT250916E032	
Date of issue .....	Oct. 14, 2025	
Testing laboratory .....	Shenzhen TCT Testing Technology Co., Ltd.	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China	
Applicant's name .....	Shenzhen Huafurui Technology Co., Ltd.	
Address .....	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China	
Manufacturer's name .....	Shenzhen Huafurui Technology Co., Ltd.	
Address .....	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China	
Standard(s) .....	ETSI EN 303 413 V1.2.1 (2021-04)	
Product Name .....	Smartphone	
Trade Mark .....	CUBOT	
Model/Type reference .....	KINGKONG ACE 5	
Rating(s) .....	Refer to EUT description of page 3	
Date of receipt of test item .....	Sep. 16, 2025	
Date (s) of performance of test .....	Sep. 16, 2025 ~ Oct. 14, 2025	
Tested by (+signature) .....	Rleo LIU	
Check by (+signature) .....	Beryl ZHAO	
Approved by (+signature):	Tomsin	

**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of Shenzhen TCT Testing Technology Co., Ltd.. This document may be altered or revised by Shenzhen TCT Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

<b>1. General Product Information .....</b>	<b>3</b>
1.1. EUT description .....	3
1.2. Model(s) list.....	3
<b>2. Test Result Summary .....</b>	<b>4</b>
<b>3. General Information.....</b>	<b>5</b>
3.1. Test environment and mode.....	5
3.2. Description of Support Units.....	5
3.3. Test Instruments List .....	6
<b>4. Test Facilities.....</b>	<b>7</b>
<b>5. Measurement Uncertainty .....</b>	<b>7</b>
<b>6. Receiver Requirement.....</b>	<b>8</b>
6.1. GUE adjacent frequency band selectivity performance.....	9
6.2. Receiver Spurious Radiation.....	11
<b>7. Photographs of Test Configuration.....</b>	<b>15</b>
<b>8. Photographs of EUT .....</b>	<b>16</b>

## 1. General Product Information

### 1.1. EUT description

Product Name.....:	Smartphone
Model/Type reference.....:	KINGKONG ACE 5
Hardware Version.....:	G2510T-UF-V1.0
Software Version .....	CUBOT_KINGKONG_ACE_5_F101_V1.0
Operation Frequency .....	GPS: 1.57542GHz Galileo: 1.57542GHz GLONASS: 1.602GHz
Modulation Technology .....	GPS: BPSK Galileo: BPSK GLONASS: FDMA
Antenna Type.....:	FPC Antenna
Antenna Gain.....:	1.20dBi
Rating(s).....:	Adapter Information1: Model: HJ-PD33W-EU Input: AC 100-240V, 50/60Hz, 0.8A Output: DC 5.0V, 3.0A, 15.0W OR DC 9.0V, 3.0A, 27.0W OR DC 12.0V, 2.75A, 33.0W MAX Adapter Information2: Model: TD-203G2000170VF01 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5V, 3A/ DC 9V, 3 A/ DC 12V, 2.5A/ DC 15V, 2A/ DC 20V, 1.5A PPS: DC 3.3-16V, 2A/ DC 3.3-11V, 3A Total Output Power: 33W Max Rechargeable Li-ion Battery DC 3.87V

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

None.

## 2. Test Result Summary

Radio Spectrum Matter (RSM) Part				
Test Item	Test Requirement	Test Method	Limit/Severity	Result
Adjacent signal selectivity	Clause 4.2.1	Clause 5.4.3	Clause 4.2.1.2	PASS
Spurious Radiations	Clause 4.2.2	Clause 5.5	Clause 4.2.2.2	PASS
<b>Note:</b> 1. Pass: Test item meets the requirement. 2. N/A: Test case does not apply to the test object. 3. The test result judgment is decided by the limit of test standard.				

### 3. General Information

#### 3.1. Test environment and mode

Item	Normal condition	Extreme condition			
		HVHT	LVHT	HVLT	LVLT
Temperature	+25°C	+40°C	+40°C	-20°C	-20°C
Voltage	DC 3.87V	DC 4.35V	DC 3.5V	DC 4.35V	DC 3.5V
Humidity	20%-75%				
Atmospheric Pressure:	1008 mbar				
Test Mode:					
Receiving mode:			Keep the EUT in receiving mode.		

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 3.3. Test Instruments List

Radiated Emission				
Name	Model No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESCI7	R&S	Jan. 21, 2025	Jan. 20, 2026
Spectrum Analyzer	FSQ40	R&S	Jun. 26, 2025	Jun. 25, 2026
Signal Generator	N5182A	Agilent	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	8447D	HP	Jun. 26, 2025	Jun. 25, 2026
Pre-amplifier	LNPA_0118G-45	SKET	Jan. 21, 2025	Jan. 20, 2026
Pre-amplifier	LNPA_1840G-50	SKET	Apr. 11, 2025	Apr. 10, 2026
Broadband Antenna	VULB9163	Schwarzbeck	Jun. 29, 2025	Jun. 28, 2026
Horn Antenna	BBHA 9120D	Schwarzbeck	Jan. 24, 2025	Jan. 23, 2026
Horn Antenna	BBHA 9170	Schwarzbeck	Jan. 24, 2025	Jan. 23, 2026
Universal Radio Communication Tester	CMU200	R&S	Jun. 26, 2025	Jun. 25, 2026
Coaxial cable	RE-03-D	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-03-M	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-03-L	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-04-D	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-04-M	SKET	Jun. 27, 2025	Jun. 26, 2026
Coaxial cable	RE-04-L	SKET	Jun. 27, 2025	Jun. 26, 2026
Loop antenna	FMZB1519B	Schwarzbeck	Jun. 30, 2025	Jun. 29, 2026
Spectrum Analyzer	N9020A	Agilent	Jan. 21, 2025	Jan. 20, 2026
EMI Test Software	FA-03A2 RE+	EZ EMC	/	/

## 4. Test Facilities

Shenzhen TCT Testing Technology Co., Ltd.

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict,  
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

## 5. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB
7	Temperature	$\pm 0.1^{\circ}\text{C}$
8	Humidity	$\pm 1.0\%$

## 6. Receiver Requirement


### Receiver Frequency

GNSS Constellation	GNSS Signal Designations	RNSS Frequency Band (MHz)
BDS	B1I	1 559 to 1 610
	B1C	1 559 to 1 610
Galileo	E1	1 559 to 1 610
	E5a	1 164 to 1 215
	E5b	1 164 to 1 215
	E6	1 215 to 1 300
GLONASS	G1	1 559 to 1 610
	G2	1 215 to 1 300
GPS	L1 C/A	1 559 to 1 610
	L1C	1 559 to 1 610
	L2C	1 215 to 1 300
	L5	1 164 to 1 215
SBAS	L1	1 559 to 1 610
	L5	1 164 to 1 215



## 6.1. GUE adjacent frequency band selectivity performance

### 6.1.1. Test Specification
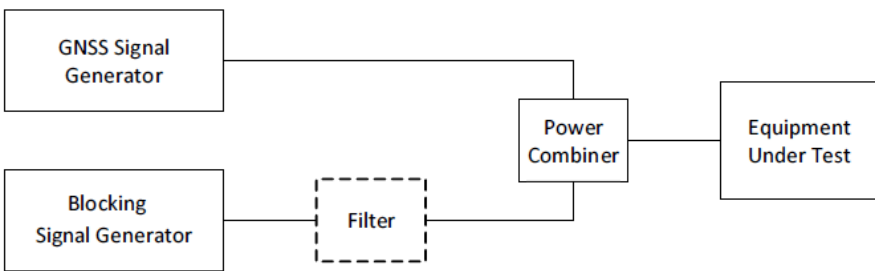
<b>Test Requirement:</b>	EN 303 413 clause 4.2
<b>Test Method:</b>	EN 303 413 clause 5.4
<b>Test Setup:</b>	 <pre> graph LR     A[GNSS Signal Generator] --&gt; D[Power Combiner]     B[Blocking Signal Generator] --&gt; C[Filter]     C --&gt; D     D --&gt; E[Equipment Under Test]         </pre>
<b>Test Procedure:</b>	<p>The following test equipment is recommended for performing the tests:</p> <ol style="list-style-type: none"> <li>1. GNSS signal generator capable of simulating the GNSS constellations and GNSS signals declared as supported by the EUT.</li> <li>2. Blocking signal generator capable of generating the adjacent frequency signal specified in table 4-4.</li> <li>3. Filter for ensuring the test is not adversely affected by OOB from the RF signal generator into the RNSS band if necessary.</li> <li>4. Power combiner for combining the GNSS signal(s) and the adjacent frequency signal.</li> <li>5. Recording C/ N0 as reported by the EUT before and after application of the adjacent frequency signal.</li> <li>6. Establishing the RF power of the test signals at the input to the EUT (this may be accomplished by means of a directional coupler and power meter, or by appropriate calibration prior to the test).</li> </ol>
<b>Test Instrument:</b>	Refer to Item 3.3 for details
<b>Test Mode:</b>	Receiver mode
<b>Test Result:</b>	PASS

## 6.1.2. Test Data

Frequency band (MHz)	Test point centre frequency (MHz)	Adjacent frequency signal power level (dBm)	Measured C/N <sub>0</sub> (dB-Hz)			
			No interfering signal	With interfering signal	Decrease of C/N <sub>0</sub>	Decrease ≤ 1 dB?
1 518 to 1 525	1524	-65	/	/	/	BDS N/A
			34.9	34.9	0	Galileo Pass
			37.9	37.8	0.1	GLONASS Pass
			37.8	37.8	0	GPS Pass
			/	/	/	SBAS N/A
1 525 to 1 549	1548	-95	/	/	/	BDS N/A
			34.8	34.8	0	Galileo Pass
			37.9	37.8	0.1	GLONASS Pass
			37.7	37.7	0	GPS Pass
			/	/	/	SBAS N/A
1 549 to 1 559	1554	-105	/	/	/	BDS N/A
			34.8	34.8	0	Galileo Pass
			37.8	37.8	0	GLONASS Pass
			37.9	37.9	0	GPS Pass
			/	/	/	SBAS N/A
1 610 to 1 626	1615	-105	/	/	/	BDS N/A
			34.9	34.8	0.1	Galileo Pass
			37.9	37.8	0.1	GLONASS Pass
			37.8	37.8	0	GPS Pass
			/	/	/	SBAS N/A
1 626 to 1 640	1627	-85	/	/	/	BDS N/A
			34.9	34.9	0	Galileo Pass
			37.9	37.9	0	GLONASS Pass
			37.7	37.7	0	GPS Pass
			/	/	/	SBAS N/A

## 6.2. Receiver Spurious Radiation

### 6.2.1. Test Specification

Test Requirement:	EN 303 413 clause 5.5									
Test Method:	EN 303 413 clause 5.5.2									
Limit:	<div>Table 4-5: Spurious emission limits</div> <table><tr><th>Frequency range</th><th>Maximum power</th><th>Bandwidth</th></tr><tr><td>30 MHz to 1 GHz</td><td>-57 dBm</td><td>100 kHz</td></tr><tr><td>1 GHz to 8,3 GHz</td><td>-47 dBm</td><td>1 MHz</td></tr></table>	Frequency range	Maximum power	Bandwidth	30 MHz to 1 GHz	-57 dBm	100 kHz	1 GHz to 8,3 GHz	-47 dBm	1 MHz
Frequency range	Maximum power	Bandwidth								
30 MHz to 1 GHz	-57 dBm	100 kHz								
1 GHz to 8,3 GHz	-47 dBm	1 MHz								
Test Setup:	<div><div>GNSS Signal Generator</div><div>Equipment Under Test</div><div>Spectrum</div></div>									
Test Procedure:	<p>In case of conducted measurements, the EUT shall be connected to the measuring equipment via an attenuator. If required, the necessary GNSS signals shall be applied to the EUT.</p> <p>The spectrum in the spurious domain shall be searched for emissions that exceed the limit values given in table 4-5 or that come to within 6 dB below these limits. Each occurrence shall be recorded.</p> <p>The measurement procedure contains 2 parts.</p> <p>4.3.1. Pre-scan</p> <p>The procedure in step 1) to step 4) below shall be used to identify potential unwanted emissions of the EUT:</p> <p>1) The sensitivity of the spectrum analyser should be such that the noise floor is at least 12 dB below the limits given in table 4-5.</p> <p>2) The emissions over the range 30 MHz to 1 000 MHz shall be identified.</p> <p>Spectrum analyser settings:</p> <ul style="list-style-type: none"><li>Resolution bandwidth: 100 kHz</li><li>Video bandwidth: 300 kHz</li><li>Filter type: 3 dB (Gaussian)</li><li>Detector mode: Peak</li><li>Trace Mode: Max Hold</li><li>Sweep Points: ≥ 19 400 (for spectrum analysers not supporting this high number of sweep points, the frequency band may be segmented)<ul style="list-style-type: none"><li>Sweep time: Auto</li></ul></li></ul> <p>Wait for the trace to stabilize. Any emissions identified during the sweeps above and that fall within the 6 dB range below the applicable limit or above, shall be individually</p>									

measured using the procedure in clause 4.3.2 and compared to the limits given in table 4-5.

3) The emissions over the range 1 GHz to 8,3 GHz shall be identified.

Spectrum analyser settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 3 MHz
- Filter type: 3 dB (Gaussian)
- Detector mode: Peak
- Trace Mode: Max Hold
- Sweep Points:  $\geq 14\ 600$  (for spectrum analysers not supporting this high number of sweep points, the frequency band may be segmented)
- Sweep time: Auto

Wait for the trace to stabilize. Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit or above, shall be individually measured using the procedure in clause 4.3.2 and compared to the limits given in table 4-5.

4) In case of conducted measurements on smart antenna systems (equipment with multiple receive chains), step 2) and step 3) shall be repeated for each of the active receive chains, Ach.

The limits used to identify emissions during this pre-scan shall be reduced by  $10 \times \log_{10}(Ach)$ .

4.3.2. Measurement of the emissions identified during the pre-scan

The procedure in step 1) to step 4) below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above. This method assumes the spectrum analyser has a Time Domain Power function.

1) The level of the emissions shall be measured using the following spectrum analyser settings:


- Measurement Mode: Time Domain Power.
- Centre Frequency: Frequency of the emission identified during the pre-scan.
- Resolution Bandwidth: 100 kHz ( $< 1\text{ GHz}$ ) / 1 MHz ( $> 1\text{ GHz}$ ).
- Video Bandwidth: 300 kHz ( $< 1\text{ GHz}$ ) / 3 MHz ( $> 1\text{ GHz}$ ).
- Frequency Span: Zero Span.
- Sweep mode: Single Sweep.
- Sweep time: 30 ms.
- Sweep points:  $\geq 30\ 000$ .
- Trigger: Video (for burst signals) or Manual (for continuous signals).
- Detector: RMS.

2) Set a window where the start and stop indicators match the start and end of the burst with the highest level and


	<p>record the RMS value of the power measured within this window. If the spurious emission to be measured is a continuous transmission, the measurement window shall be set to the start and stop times of the sweep.</p> <p>3) In case of conducted measurements on smart antenna systems (equipment with multiple receive chains), step 2) shall be repeated for each of the active receive chains, Ach. Sum the measured power (within the observed window) for each of the active receive chains.</p> <p>4) The value defined in step 3) shall be compared to the limits defined in table 4-5.</p>
<b>Test Instrument:</b>	Refer to Item 3.3 for details
<b>Test Mode:</b>	Receiver mode
<b>Test Result:</b>	PASS

## 6.2.2. Test Data


For e.r.p (30 MHz to 1 000 MHz):

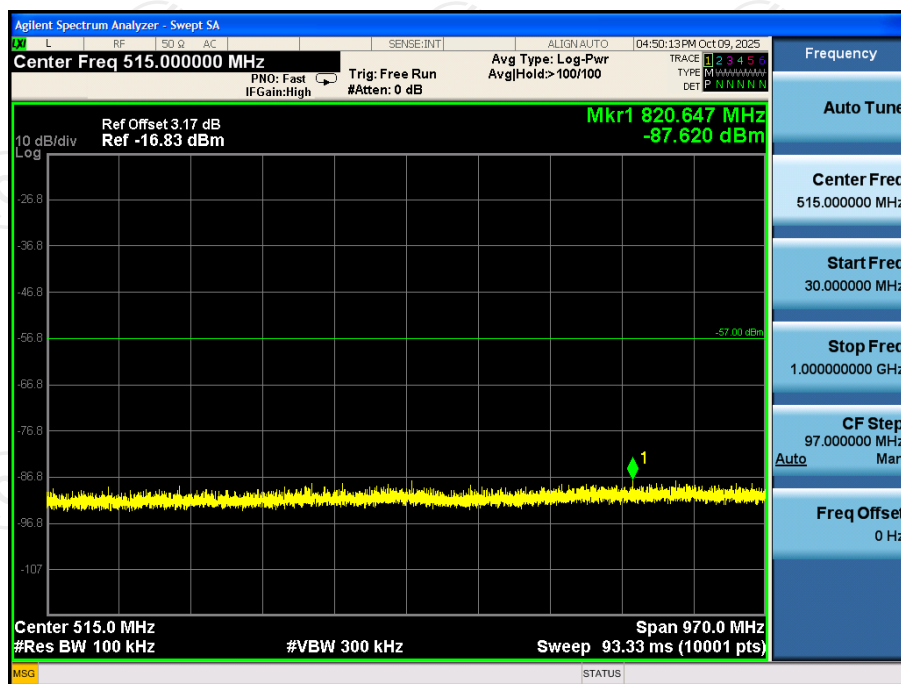

For e.i.r.p (1 GHz to 8.3 GHz):

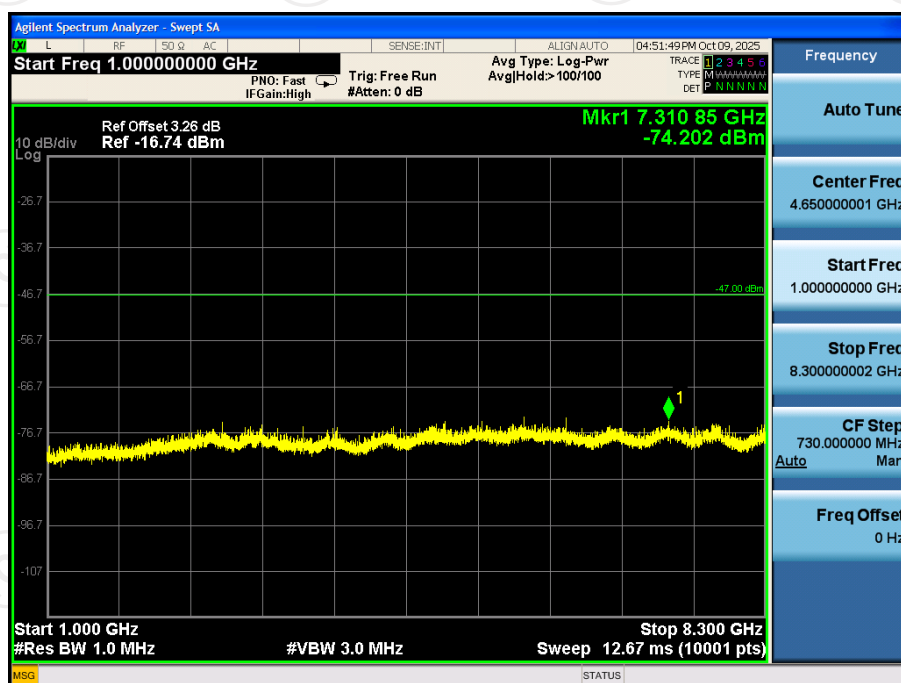

## 7. Photographs of Test Configuration

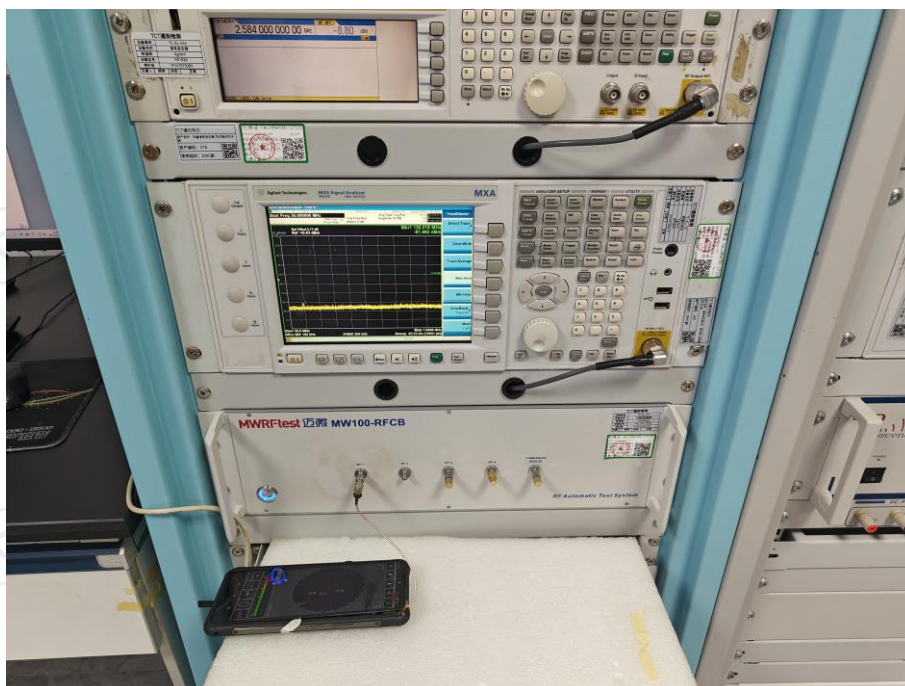



## 8. Photographs of EUT

Please refer to document Appendix No.: TCT250916E023-B & TCT250916E023-C

**\*\*\*\*\*END OF REPORT\*\*\*\*\***