



## RADIO TEST REPORT

For

Shenzhen Huafurui Technology Co., Ltd.

Smartphone

Test Model: KINGKONG X

Prepared for : Shenzhen Huafurui Technology Co., Ltd.  
Address : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 01, 2024  
Number of tested samples : 2  
Sample No. : A240319085-1, A240319085-2  
Serial number : Prototype  
Date of Test : April 01, 2024 ~ May 09, 2024  
Date of Report : May 10, 2024



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: + (86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**RADIO TEST REPORT**  
**ETSI EN 300 330 V2.1.1 (2017-02)**

Short Range Devices (SRD); Radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU

**Report Reference No. .... : LCSA03214077EM**

Date Of Issue..... : May 10, 2024

**Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Testing Location/Procedure..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □**Applicant's Name..... : Shenzhen Huafurui Technology Co., Ltd.**

Address..... : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

**Test Specification**

Standard..... : ETSI EN 300 330 V2.1.1 (2017-02)

Test Report Form No. .... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2017-06

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description..... : Smartphone**

Trade Mark..... : CUBOT

Test Model..... : KINGKONG X

Ratings..... : Please Refer to Page 6

**Result ..... : Positive****Compiled by:**

Kevin Huang/ Administrator

**Supervised by:**

Cary Luo/ Technique principal

**Approved by:**

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## RADIO -- TEST REPORT

**Test Report No. : LCSA03214077EM**May 10, 2024

Date of issue

Test Model..... : KINGKONG X

EUT..... : Smartphone

**Applicant..... : Shenzhen Huafurui Technology Co., Ltd.**

Address..... : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Telephone..... : /

Fax..... : /

**Manufacturer..... : Shenzhen Huafurui Technology Co., Ltd.**

Address..... : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Telephone..... : /

Fax..... : /

**Factory..... : Shenzhen Huafurui Technology Co., Ltd.**

Address..... : Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China

Telephone..... : /

Fax..... : /

**Test Result****Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	May 10, 2024	Initial Issue	---





## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>6</b>
1.1. Product Description for Equipment Under Test (EUT)	6
1.2. Support Equipment List	10
1.3. External I/O	10
1.3. Objective	10
1.4. Test Methodology	10
1.5. List Of Measuring Equipment	11
1.6. Measurement Uncertainty (95% confidence levels, k=2)	12
1.7. Description of Test Facility	12
1.8. Description Of Test Mode	12
1.9. Test Environment	12
<b>2. SYSTEM TEST CONFIGURATION</b>	<b>13</b>
2.1. Justification	13
2.2. EUT Exercise Software	13
2.3. Special Accessories	13
2.4. Block Diagram/Schematics	13
2.5. Equipment Modifications	13
2.6. Configuration of Test Setup	13
<b>3. SUMMARY OF TEST RESULTS</b>	<b>14</b>
<b>4. H-FIELD (RADIATED)</b>	<b>15</b>
4.1. Definition	15
4.2. Limit	15
4.3. Test Setup	16
4.4. Test Procedure	16
4.5. Test Result	17
<b>5. PERMITTED RANGE OF OPERATING FREQUENCIES</b>	<b>18</b>
5.1. Definition	18
5.2. Limit	18
5.3. Test Procedure	18
5.4. Test Result	18
<b>6. MODULATION BANDWIDTH</b>	<b>19</b>
6.1. Definition	19
6.2. Limit	19
6.3. Test Setup	19
6.4. Test Procedure	19
6.5. Test Result	19
<b>7. TRANSMITTER SPURIOUS EMISSIONS</b>	<b>21</b>
7.1. Definition	21
7.2. Limit	21
7.3. Test Procedure	21
7.4. Test Result	22
<b>8. RECEIVER SPURIOUS EMISSIONS</b>	<b>23</b>
8.1. Definition	23
8.2. Limit	23
8.4. Test Procedure	23
8.5. Test Result	23
<b>9. PHOTOGRAPHS OF TEST SETUP</b>	<b>24</b>
<b>10. PHOTOGRAPHS OF THE EUT</b>	<b>24</b>



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 1. GENERAL INFORMATION

### 1.1. Product Description for Equipment Under Test (EUT)

EUT	: Smartphone
Test Model	: KINGKONG X
Ratings	: Input: DC 5.0V, 3.0A Adapter1 Model: HJ-PD33W-EU For AC Adapter Input: 100-240V~, 50/60Hz, 0.8A Adapter Output: 5.0V=3.0A 15.0W OR 9.0V=3.0A 27.0W OR 12.0V=2.75A 33.0W MAX Adapter2 Model: ZYH-J330 For AC Adapter Input: 200-240V~, 50/60Hz, 1.2A Max Adapter Output: 5.0V=3.0A, 15.0W; 9.0V=3.0A, 27.0W; 12.0V=2.5A, 30.0W; 15.0V=2.0A, 30.0W; 20.0V=1.5A, 30.0W MAX DC 3.87V by Rechargeable Li-ion Battery, 10200mAh
Hardware Version	: G2365-MUB-V2-BOM3
Software Version	: CUBOT_KINGKONG X_E021C_V01
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V5.2 (BDR/EDR) 40 channels for Bluetooth V5.2 (BT LE/ BT 2LE)
Channel Spacing	: 1MHz for Bluetooth V5.2 (BDR/EDR) 2MHz for Bluetooth V5.2 (BT LE/ BT 2LE)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V5.2 (BDR/EDR) GFSK for Bluetooth V5.2 (BT LE/ BT 2LE)
Bluetooth Version	: V5.2
Antenna Description	: FPC Antenna, 0.6dBi(Max.)
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz~2472MHz
Channel Spacing	: 5MHz
Channel Number	: 13 Channel for 20MHz bandwidth(2412~2472MHz) 9 channels for 40MHz bandwidth(2422~2462MHz)
Modulation Type	: 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: FPC Antenna, 0.6dBi(Max.)
WIFI(5.2G Band)	:
Frequency Range	: 5180MHz~5240MHz
Channel Number	: 4 channels for 20MHz bandwidth(5180~5240MHz) 2 channels for 40MHz bandwidth(5190~5230MHz) 1 channels for 80MHz bandwidth(5210MHz)
Modulation Type	: 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK) 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Antenna Description : Ant6: FPC Antenna, 0.4dBi(Max.)  
Ant7: FPC Antenna, -1.6dBi(Max.)

WIFI(5.8G Band) :

Frequency Range : 5745MHz~5825MHz

Channel Number : 5 channels for 20MHz bandwidth(5745~5825MHz)  
2 channels for 40MHz bandwidth(5755~5795MHz)  
1 channels for 80MHz bandwidth(5775MHz)

Modulation Type : 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)  
802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna Description : Ant6: FPC Antenna, 0.4dBi(Max.)  
Ant7: FPC Antenna, -1.6dBi(Max.)

**2G**

Support Band : ☒ GSM 900 (EU-Band) ☒ DCS 1800 (EU-Band)  
☒ GSM 850 (U.S.-Band) ☒ PCS 1900 (U.S.-Band)

Release Version : R99

GPRS Class : Class 12

EGPRS Class : Class 12

Uplink : GSM 900: 880MHz~915MHz  
DCS 1800: 1710MHz~1785MHz

Downlink : GSM 900: 925MHz~960MHz  
DCS 1800: 1805MHz~1880MHz

Type Of Modulation : GMSK for GSM/GPRS; GMSK/8PSK for EGPRS

Antenna Description : FPC Antenna  
-1.3dBi (max.) For GSM 900  
-3.0dBi (max.) For DCS 1800

Power Class : GSM 900: Level 5, DCS 1800: Level 0  
EGPRS 900: Level 8, EGPRS 1800: Level 2

**3G**

Support Band : ☒ WCDMA Band I (EU-Band)  
☒ WCDMA Band VIII (EU-Band)

Release Version : R8

Uplink : WCDMA Band I: 1920MHz~1980MHz  
WCDMA Band VIII: 880MHz~915MHz

Downlink : WCDMA Band I: 2110MHz~2170MHz  
WCDMA Band VIII: 925MHz~960MHz

Type Of Modulation : QPSK/16QAM

Antenna Description : FPC Antenna  
-2.5dBi (max.) For WCDMA Band I  
-1.3dBi (max.) For WCDMA Band VIII

Power Class : Level 3

**LTE**

Support Band : ☒ E-UTRA Band 1(EU-Band)  
☒ E-UTRA Band 3(EU-Band)  
☒ E-UTRA Band 7(EU-Band)



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





- ☒ E-UTRA Band 8(EU-Band)
- ☒ E-UTRA Band 20(EU-Band)
- ☒ E-UTRA Band 28(EU-Band)
- ☒ E-UTRA Band 38(EU-Band)
- ☒ E-UTRA Band 40(EU-Band)

LTE Release Version : R12

FDD Band : Uplink: E-UTRA Band 1: 1920MHz~1980MHz  
E-UTRA Band 3: 1710MHz~1785MHz  
E-UTRA Band 7: 2500MHz~2570MHz  
E-UTRA Band 8: 880MHz~915MHz  
E-UTRA Band 20: 832MHz~862MHz  
E-UTRA Band 28: 703MHz~748MHz  
Downlink: E-UTRA Band 1: 2110MHz~2170MHz  
E-UTRA Band 3: 1805MHz~1880MHz  
E-UTRA Band 7: 2620MHz~2690MHz  
E-UTRA Band 8: 925MHz~960MHz  
E-UTRA Band 20: 791MHz~821MHz  
E-UTRA Band 28: 758MHz~803MHz

TDD Band : E-UTRA Band 38: 2570MHz ~ 2620MHz  
E-UTRA Band 40: 2300MHz ~ 2400MHz

Type Of Modulation : QPSK/16QAM

Antenna Description : FPC Antenna  
-2.5dBi (max.) For E-UTRA Band 1  
-2.6dBi (max.) For E-UTRA Band 3  
-0.6dBi (max.) For E-UTRA Band 7  
-1.3dBi (max.) For E-UTRA Band 8  
-1.0dBi (max.) For E-UTRA Band 20  
-3.3dBi (max.) For E-UTRA Band 28  
-0.6dBi (max.) For E-UTRA Band 38  
-1.5dBi (max.) For E-UTRA Band 40

Power Class : Class 3

NR :

Operation Band : N1: UL: 1920MHz~1980MHz, DL: 2110MHz~2170MHz  
N3: UL: 1710MHz~1785MHz, DL: 1805MHz~1880MHz  
N7: UL: 2500MHz~2570MHz, DL: 2620MHz~2690MHz

Support Type : ☒ SA

Sub carrier Spacing : 15KHz

Modulation Type : DFT-BPSK, DFT-QPSK, DFT-16QAM, DFT-64QAM, DFT-256QAM,  
CP-QPSK, CP-16QAM, CP-64QAM, CP-256QAM

NR Release Version : 15

Power Class : NR Band 1/3/7: PC3

Antenna Description : FPC Antenna  
N1: -2.5dBi Max  
N3: -2.6dBi Max  
N7: -0.6dBi Max



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





GPS Receiver :  
Receive Frequency : 1575.42MHz  
Channel Number : 1  
Antenna Description : FPC Antenna, 3.9dBi(Max.)

GLONASS Receiver :  
Receive Frequency : 1602.5625MHz  
Channel Number : 1  
Antenna Description : FPC Antenna, 3.9dBi(Max.)

Galileo Receiver :  
Receive Frequency : 1589.74MHz  
Channel Number : 1  
Antenna Description : FPC Antenna, 3.9dBi(Max.)

BDS Receiver :  
Receive Frequency : 1561.098MHz  
Channel Number : 1  
Antenna Description : FPC Antenna, 3.9dBi(Max.)

NFC :  
Frequency Range : 13.56MHz  
Modulation Type : ASK  
Antenna Description : FPC Antenna, 0dBi(Max.)





## 1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen Huajin Electronics Co., Ltd	Fast Charger	HJ-PD33W-EU	---	CE
Zhengyuhong Electronics (dongguan) Co., Ltd	AC Power Adapter	ZYH-J330	---	CE

## 1.3. External I/O

I/O Port Description	Quantity	Cable
Type-C USB Port	1	USB Cable: 1.0m, unshielded
Headphone Port	1	Headphone Cable: 1.2m, unshielded

## 1.3. Objective

The following report of is prepared on behalf of the **Shenzhen Huafurui Technology Co., Ltd.** in accordance with ETSI EN 300 330 V2.1.1 (2017-02): Short Range Devices (SRD); Radio equipment in the frequency range 9 kHz to 25 MHz and inductive loop systems in the frequency range 9 kHz to 30 MHz; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU.

The objective is to determine compliance with ETSI EN 300 330 V2.1.1 (2017-02).

## 1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 300 330 V2.1.1 (2017-02).



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



### 1.5. List Of Measuring Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	R&S	SL3	101507	2023-06-09	2024-06-08
2	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2023-10-18	2024-10-17
3	DC Power Supply	Agilent	E3642A	N/A	2023-10-18	2024-10-17
4	Temperature & Humidity Chamber	GUANGZHOU GOGN WEN	GDS-100	70932	2023-10-05	2024-10-04
5	MXG Vector Signal Generator	Agilent	E4438C	MY42081396(6G)	2023-10-18	2024-10-17
6	ESG Vector Signal Generator	Agilent	E4438C	MY49072627(3G)	2023-06-09	2024-06-08
7	EMI Test Software	Farad	EZ	/	N/A	N/A
8	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2022-08-17	2025-08-16
9	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
10	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
11	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
12	EMI Test Receiver	R&S	ESR 7	101181	2023-08-15	2024-08-14
13	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2023-10-18	2024-10-17
14	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2023-10-18	2024-10-17



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**1.6. Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Radio Frequency	$0.9 \times 10^{-4}$
Total RF Power, Conducted	1.0 dB
RF Power Density, Conducted	1.8 dB
Spurious Emissions, Conducted	1.8 dB
All Emissions, Radiated	3.1 dB
Temperature	0.5°C
Humidity	1 %
DC And Low Frequency Voltages	1 %

**1.7. Description of Test Facility**

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

**1.8. Description Of Test Mode**

The EUT has been tested under typical operating condition.

\*\*\*Note: Only recorded the worst case in this report.

**1.9. Test Environment**

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	23.6
Humidity (%RH)	25-75	52.8
Barometric pressure (mbar)	860-1060	950-1000

**1.10 .Test Conditions**

Conditions	Temperature	Voltage
Normal	21-25°C	DC 3.87V
Low extreme Temperature/Low extreme Voltage (TL/VL);	-20°C	DC 3.48V
Low extreme Temperature/High extreme Voltage (TL/VH);	-20°C	DC 4.45V
High extreme Temperature/Low extreme Voltage (TH/VL);	45°C	DC 3.48V
High extreme Temperature/High extreme Voltage (TH/VH).	45°C	DC 4.45V

Note1: The High Voltage DC 4.45V and Low Voltage DC 3.48V was declared by manufacturer



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 2. SYSTEM TEST CONFIGURATION

### 2.1. Justification

The system was configured for testing in engineering mode.

### 2.2. EUT Exercise Software

N/A.

### 2.3. Special Accessories

N/A.

### 2.4. Block Diagram/Schematics

Please refer to the related document.

### 2.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

### 2.6. Configuration of Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





### 3. SUMMARY OF TEST RESULTS

ETSI EN 300 330 V2.1.1 (2017-02)

Reference Clause No.	Description Of Test Item	Result
§4.3.1&§4.3.2	Permitted range of operating frequencies	Compliant
§4.3.3	Modulation bandwidth	Compliant
§4.3.4	Transmitter H-field requirements	Compliant
§4.3.5	Transmitter RF carrier current	N/A
§4.3.6	Transmitter radiated E-field	N/A
§4.3.7	Transmitter conducted spurious emissions	N/A
§4.3.8	Transmitter radiated spurious domain emission limits < 30 MHz	Compliant
§4.3.9	Transmitter radiated spurious domain emission limits > 30 MHz	Compliant
§4.3.10	Transmitter Frequency stability	N/A
§4.4.2	Receiver spurious emissions	Compliant
§4.4.3	Adjacent channel selectivity	N/A
§4.4.4	Receiver blocking or desensitization	N/A
Note: 1. N/A means not applicable; 2. Product Class: Class 1.		



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 4. H-FIELD (RADIATED)

### 4.1. Definition

In the case of a transmitter with an integral or dedicated antenna, the radiated H-field is defined in the direction of maximum field strength under specified conditions of measurement.

### 4.2. Limit

Table 2 H-field limits at 10 m

Frequency range (MHz)	H-field strength limit ( $H_f$ ) dB $\mu$ A/m at 10 m or specified in mW e.r.p.
$0,009 \leq f < 0,090$	72 descending 3 dB/oct above 0,03 MHz or according to note 1 (see note 5)
$0,09 \leq f < 0,119$	42
$0,119 \leq f < 0,135$	66 descending 3 dB/oct above 0,119 MHz or according to note 1 (see notes 3 and 5)
$0,135 \leq f < 0,140$	42
$0,140 \leq f < 0,1485$	37.7
$0,1485 \leq f < 30$	-5 (see note 4)
$0,315 \leq f < 0,600$	-5
$3,155 \leq f < 3,400$	13.5
4,234	9 (see note 9)
4,516	7
$7,400 \leq f < 8,800$	9
$10,2 \leq f < 11,00$	9
$12,5 \leq f \leq 20$	-7
$6,765 \leq f \leq 6,795$	42 (see notes 3 and 7)
$26,957 \leq f \leq 27,283$	42 (see notes 3)
$13,410 \leq f \leq 13,553, 13,567 \leq f \leq 13,710$	9 (see note 6)
$13,110 \leq f \leq 13,410, 13,710 \leq f \leq 14,010$	-3,5 (see note 6)
$12,660 \leq f \leq 13,110, 14,010 \leq f \leq 14,460$	-10 (see note 6)
$11,810 \leq f \leq 12,660, 14,460 \leq f \leq 15,310$	-16 (see note 6)
$13,460 \leq f \leq 13,553, 13,567 \leq f \leq 13,660$	27 (see note 6)
$13,360 \leq f \leq 13,460, 13,660 \leq f \leq 13,760$	Linear transition from 27 to -3,5 (see note 6)
$13,110 \leq f \leq 13,360, 13,760 \leq f \leq 14,010$	-3,5 (see note 6)
$12,660 \leq f \leq 13,110, 14,010 \leq f \leq 14,460$	-5 (see note 6)
$13,553 \leq f \leq 13,567$	42 (see note 3) or 60 (see notes 2 and 3)
27,095	42
26,995, 27,045, 27,095, 27,145, 27,195 (see note 8)	100mw



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

NOTE 1: For the frequency ranges 9 kHz to 135 kHz, the following additional restrictions apply to limits above 42 dB $\mu$ A/m:

- for loop coil antennas with an area  $\geq 0,16$  m<sup>2</sup> this table and table B.1 with the antenna limitations apply;
- for loop coil antennas with an area between 0,05 m<sup>2</sup> and 0,16 m<sup>2</sup> table B.1 applies with a correction factor. The limit is: table value +  $10 \times \log (\text{area}/0,16 \text{ m}^2)$ ;
- for loop coil antennas with an area  $< 0,05$  m<sup>2</sup> the limit is 10 dB below table B.1.

NOTE 2: For RFID (incl. NFC) and EAS applications only.

NOTE 3: Spectrum mask limit, see annex I.

NOTE 4: For further information see annex G.

NOTE 5: Limit is 42 dB $\mu$ A/m for the following spot frequencies:

60 kHz  $\pm$  250 Hz, 66,6 kHz  $\pm$  750 Hz, 75 kHz  $\pm$  250 Hz, 77,5 kHz  $\pm$  250 Hz, and 129,1 kHz  $\pm$  500 Hz.

NOTE 6: Only in conjunction with spectrum mask, see annex I.

NOTE 7: The frequency range 6,765 MHz - 6,795 MHz is not a harmonised ISM frequency band


according article 5.138 of the ITU Radio Regulations [i.13].

NOTE 8: Center frequencies for channelized systems by using  $\leq 10$  kHz bandwidth.

NOTE 9: The limit is valid in the range 984 kHz - 7 484 kHz for Transmitting only on receipt of a

Balise/Eurobalise tele-powering signal from a train.

### 4.3. Test Setup

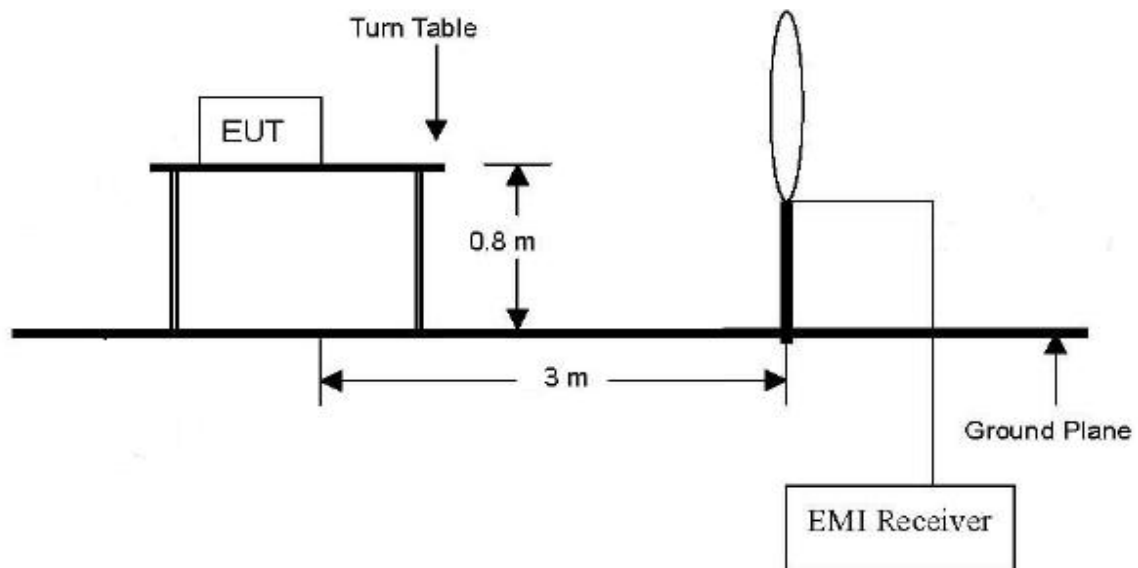

### 4.4. Test Procedure

Please refer to ETSI EN 300 330 V2.1.1 (2017-02) clause 6.2.4 for the measurement method.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#### 4.5. Test Result

Product	:	Smartphone
Test Engineer	:	Paddi Chen
Environmental Conditions	:	23.6°C / 52.8%
Conclusion	:	Pass

Test Mode: Tx-13.56MHz

Test Temperature (°C)	Test Voltage (Vdc)	Antenna Polarity	Measure Level At 3m (dBuA/m)	Calculated Factor (dB, C <sub>3</sub> )	Result At 10m (dBuA/m)	Limit At 10m (dBuA/m)
TL	VL	--	39.94	23.5	16.44	60
	VH	--	40.11	23.5	16.61	60
TN	VN	--	39.82	23.5	16.32	60
TH	VL	--	39.86	23.5	16.36	60
	VH	--	39.81	23.5	16.31	60

\*\*\*Note:

$$H_{10m} = H_{3m} - C_3$$

The correct factor C<sub>3</sub> is equal to or approximately equal to 23.5dB



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 5. PERMITTED RANGE OF OPERATING FREQUENCIES

### 5.1. Definition

The permitted range of operating frequencies is the frequency range over which the equipment is authorized to operate.

### 5.2. Limit

The permitted range of operating frequencies for intentional emissions shall be entirely within the frequency bands in ETSI EN 300 330 V2.1.1 (2017-02) table 1.

### 5.3. Test Procedure

Please refer to ETSI EN 300 330 V2.1.1 (2017-02) clause 6.2.2 for the measurement method.

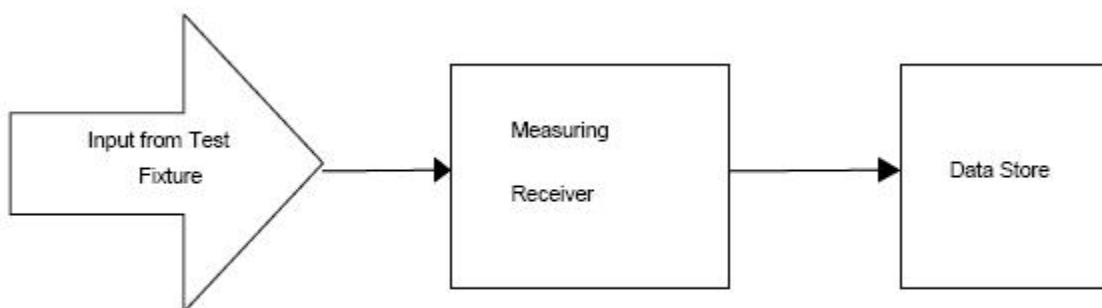


Figure 1: Test set-up for measuring the operating frequency range

### 5.4. Test Result

Product	:	Smartphone
Test Engineer	:	Paddi Chen
Environmental Conditions	:	23.6°C / 52.8%
Conclusion	:	Pass

Test Result (Tx-13.56MHz)				
Test Temperature (°C)	Test Voltage (Vdc)	Lower Frequency (MHz)	Upper Frequency (MHz)	Limit
TL	VL	13.559	13.566	13.553MHz<f<13.567MHz
	VH	13.563	13.564	13.553MHz<f<13.567MHz
TN	VN	13.562	13.565	13.553MHz<f<13.567MHz
TH	VL	13.555	13.562	13.553MHz<f<13.567MHz
	VH	13.560	13.563	13.553MHz<f<13.567MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## 6. MODULATION BANDWIDTH

### 6.1. Definition

The modulation bandwidth contains all associated side bands above the following level:

- a) For carrier frequencies below 135 kHz:
  - 23 dB below the carrier, for RFID within the transmitter emission boundary of figure I.1, and for RFID and EAS systems within the transmitter mask of figures I.2, I.3 and I.4, see CISPR 16-1-4 [2] or the appropriate spurious limit as defined in clauses 4.3.7, 4.3.8, 4.3.9.
- b) For carrier frequencies in the range 135 kHz to 30 MHz:
  - 15 dB below the carrier or the appropriate spurious limit as defined in clauses 4.3.7, 4.3.8, 4.3.9.

### 6.2. Limit

The modulation bandwidth shall be within the assigned frequency band see table 1 or  $\pm 7,5\%$  of the carrier frequency whichever is the smallest. For RFID and EAS Systems, the modulation bandwidth shall be within the transmitter emission boundary of figures I.1, I.2, I.3 and I.4. For further information, see CEPT/ERC/REC 70-03 [i.1] or ERC/ECC/CEPT Decisions as implemented through National Radio Interfaces (NRI) and additional NRI as relevant.

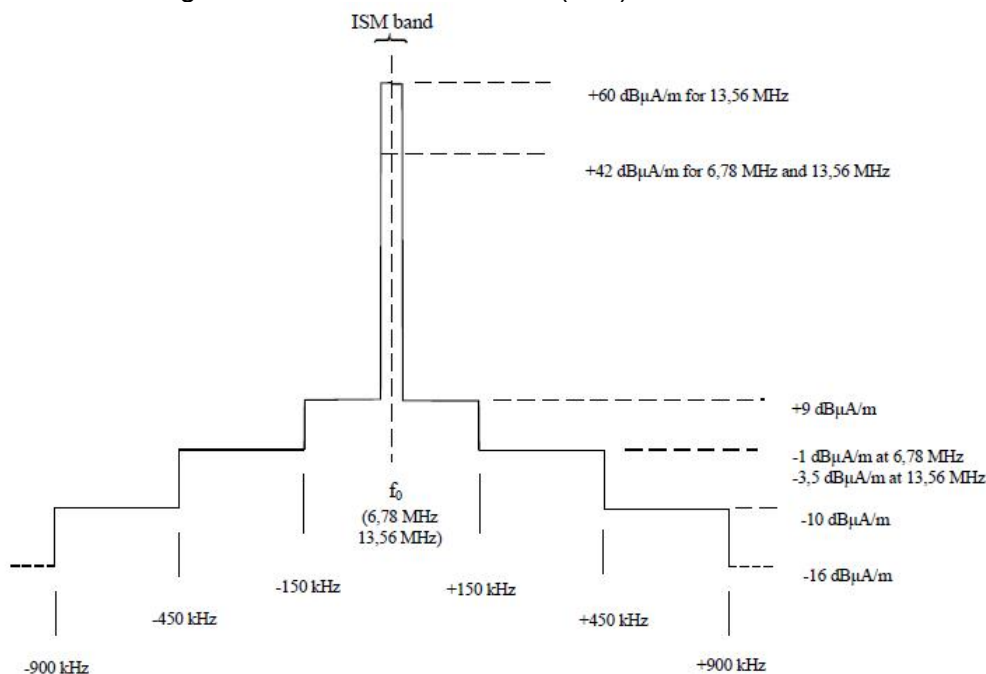


Figure I.2: Spectrum mask limit for RFIDs and EAS in the 6,78 MHz and 13,56 MHz range

### 6.3. Test Setup

The same as section 4.3

### 6.4. Test Procedure

Please refer to ETSI EN 300 330 V2.1.1 (2017-02) clause 6.2.3 for the measurement method.

### 6.5. Test Result

Pass

The test data please refer to following page.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Product	Smartphone	Test Engineer	Paddi Chen
Environmental Conditions	23.6°C, 52.2% RH	TNVN (Worst mode)	

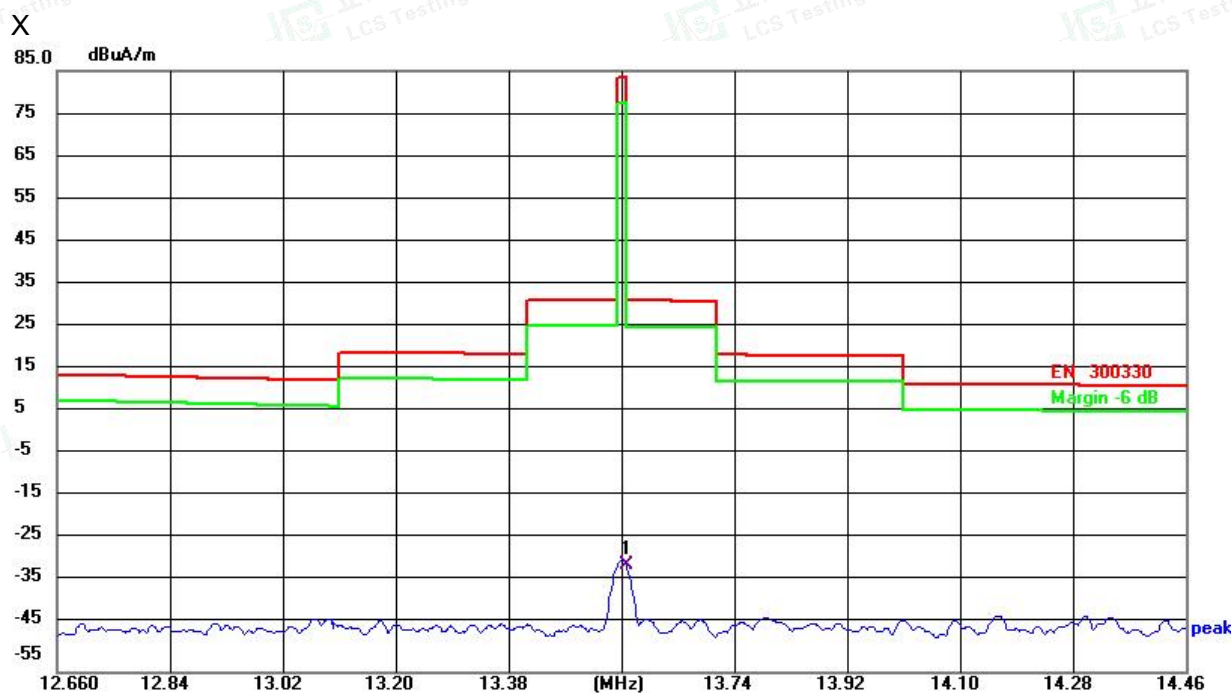

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuA/m)	Limit (dBuA/m)	Margin (dB)	Detector
1	13.5671	31.59	-61.57	-29.98	31.50	-61.48	QP

Note: X Y Z direction Both normal and extreme test conditions passed the test and only the worst mode data was represente.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 7. TRANSMITTER SPURIOUS EMISSIONS

### 7.1. Definition

Spurious domain emission limits are limits on emissions at frequencies other than those of the carrier and sidebands associated (clauses 4.3.2 and 4.3.3) with normal test modulation (clause 5.8).

### 7.2. Limit

#### Below 30MHz:

The radiated field strength of the spurious domain emissions below 30 MHz shall not exceed the generated H-field dB $\mu$ A/m at 10 m given in table 5.

**Table 5**

State	Frequency 9 kHz $\leq f < 10$ MHz	Frequency 10 MHz $\leq f < 30$ MHz
Operating	27 dB $\mu$ A/m at 9 kHz descending 3 dB/oct	-3,5 dB $\mu$ A/m
Standby	5,5 dB $\mu$ A/m at 9 kHz descending 3 dB/oct	-25 dB $\mu$ A/m

#### Above 30MHz:

The power of any radiated emission shall not exceed the values given in table 6.

**Table 6**

State	47 MHz to 74 MHz 87,5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	Other frequencies between 30 MHz to 1 000 MHz
Operating	4 nW	250 nW
Standby	2 nW	2 nW

### 7.3. Test Procedure

Please refer to ETSI EN 300 330 V2.1.1 (2017-02) clause 6.2.8 & clause 6.2.9 for the measurement method.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



#### 7.4. Test Result

Product	:	Smartphone
Test Engineer	:	Paddi Chen
Environmental Conditions	:	23.6°C / 52.8%
Conclusion	:	Pass

Test Result for Operating Mode (9KHz~30MHz)			
Frequency (MHz)	Measure Level (dBuA/m)	Limit (dBuA/m)	Margin (dB)
--	--	27 dBμA/m at 9 kHz descending 3 dB/oct (9KHz – 10MHz)	--
--	--		--
--	--	-3,5 dBμA/m (10MHz – 30MHz)	--
--	--		--
Test Result for Standby Mode (9KHz~30MHz)			
Frequency (MHz)	Measure Level (dBuA/m)	Limit (dBuA/m)	Margin (dB)
--	--	5.5 dBμA/m at 9 kHz descending 3 dB/oct (9KHz – 10MHz)	--
--	--		--
--	--	-25 dBμA/m (10MHz – 30MHz)	--
--	--		--

**Remark:**

Data of measurement within this frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The Test Result for Operating Mode, Tx-13.56MHz (Above 30MHz)					
Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Pol./Phase	Remark
53.76	-66.89	-54.00	-12.89	Horizontal	Peak
335.67	-61.13	-36.00	-25.13	Horizontal	Peak
461.09	-64.25	-36.00	-28.25	Horizontal	Peak
72.72	-70.44	-54.00	-16.44	Vertical	Peak
423.92	-64.21	-36.00	-28.21	Vertical	Peak
912.47	-61.41	-36.00	-25.41	Vertical	Peak

The Test Result for Standby Mode (Above 30MHz)					
Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Pol./Phase	Remark
59.20	-71.30	-57	-14.30	Horizontal	Peak
337.43	-64.07	-57	-7.07	Horizontal	Peak
461.67	-61.68	-57	-4.68	Horizontal	Peak
69.69	-70.07	-57	-13.07	Vertical	Peak
423.14	-60.77	-57	-3.77	Vertical	Peak
916.74	-62.07	-57	-5.07	Vertical	Peak



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## 8. RECEIVER SPURIOUS EMISSIONS

### 8.1. Definition

Spurious radiation from receivers are emissions radiated from the antenna, the chassis and case of the receiver. It is specified as the radiated power of a discrete signal.

### 8.2. Limit

#### Below 30MHz:

The spurious components below 30 MHz shall not exceed the generated H-field dB $\mu$ A/m values at 10 m according to table 8.

Table 8: Receiver spurious radiation limits

Frequency 9 kHz $\leq f < 10$ MHz	Frequency 10 MHz $\leq f < 30$ MHz
5,5 dB $\mu$ A/m at 9 kHz descending 3 dB/oct	-25 dB $\mu$ A/m

#### Above 30MHz:

The spurious components above 30 MHz measured values shall not exceed 2 nW.

### 8.4. Test Procedure

Please refer to ETSI EN 300 330 V2.1.1 (2017-02) clause 6.3.1 for the measurement method.

### 8.5. Test Result

Product	:	Smartphone
Test Engineer	:	Paddi Chen
Environmental Conditions	:	23.6°C / 52.8%
Conclusion	:	Pass

Test Result for Receiving Mode (9KHz~30MHz)			
Frequency (MHz)	Measure Level (dB $\mu$ A/m)	Limit (dB $\mu$ A/m)	Margin (dB)
--	--	5,5 dB $\mu$ A/m at 9 kHz descending 3 dB/oct (9KHz~10MHz)	--
--	--		--
--	--	-25 dB $\mu$ A/m (10MHz – 30MHz)	--
--	--		--
--	--		--

#### Remark:

Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. Measured in frequency range from 9k~10th harmonic or 1GHz (which is greater).

The Test Result for Receiving Mode, RX-13.56MHz (Above 30MHz)					
Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Pol./Phase	Remark
58.61	-64.56	-57	-7.56	Horizontal	Peak
341.55	-61.13	-57	-4.13	Horizontal	Peak
464.43	-63.53	-57	-6.53	Horizontal	Peak
71.57	-71.06	-57	-14.06	Vertical	Peak
420.85	-63.54	-57	-6.54	Vertical	Peak
914.23	-64.33	-57	-7.33	Vertical	Peak



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





## 9. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix D for Photographs of Test Setup\_NFC.

## 10. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity