

**TEST REPORT**  
**IEC 62133-2****Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems**

Report Number.....: STE04222627S

Date of issue.....: 2026-06-23

Total number of pages.....: 28 pages

Applicant's name.....: Shenzhen Huafurui Technology Co., Ltd

Address.....: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen.

**Test specification:**

Standard.....: IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure.....: Type Test

Non-standard test method.....: N/A

TRF template used.....: IEC 62133-2:2017, Ed.1.4

Test Report Form No.....: IEC62133\_2C

Test Report Form(s) Originator.....: DEKRA Certification B.V.

Master TRF.....: Dated 2022-07-01

**Copyright © 2017 IEC System of Conformity Assessment Schemes for Electro technical Equipment and Components (IECEE System). All rights reserved.**


This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**General disclaimer:**

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of Shenzhen STE Testing Laboratory Co., Ltd. The authenticity of this Test Report and its contents can be verified by contacting the Shenzhen STE Testing Laboratory Co., Ltd., responsible for this Test Report.

|                            |                                                                                                                                                                                           |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test item description..... | Rechargeable Li-polymer battery                                                                                                                                                           |
| Trade Mark.....            | N/A                                                                                                                                                                                       |
| Manufacturer.....          | Zhongshanshi Jiuliyuan New Energy Technology Co., Ltd.<br>2nd-4th Floor, Building 5, 2nd-3th Floor, Building 4. No. 20 Beichen Road, Cuiheng New District. Nanlang Subdistrict, Zhongshan |
| Model/Type reference.....  | C67                                                                                                                                                                                       |
| Ratings.....               | 3.7V, 4850mAh, 17.945Wh                                                                                                                                                                   |

|                                                                                                   |                                        |                                                                                                                          |
|---------------------------------------------------------------------------------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b> |                                        |                                                                                                                          |
| <input checked="" type="checkbox"/>                                                               | <b>Testing Laboratory:</b>             | Shenzhen STE Testing Laboratory Co., Ltd.                                                                                |
| <b>Testing location/ address..... :</b>                                                           |                                        | 3/F, Building 9, Hongde Factory, No. 63 Yuchang Road, Niuhe Community, Guanlan Street, Longhua District, Shenzhen, China |
| <b>Tested by (name + signature)..... :</b>                                                        |                                        | Pierce Xie                            |
| <b>Checked by (name, signature)..... :</b>                                                        |                                        | Thomas Wang                           |
| <b>Approved by (name + signature)....:</b>                                                        |                                        | Allen Huang                           |
|                                                                                                   |                                        |                                                                                                                          |
| <input type="checkbox"/>                                                                          | <b>Testing procedure: CTF Stage 1:</b> |                                                                                                                          |
| <b>Testing location/ address..... :</b>                                                           |                                        |                                                                                                                          |
| <b>Tested by (name, function, signature)..... :</b>                                               |                                        |                                                                                                                          |
| <b>Approved by (name, function, signature)... :</b>                                               |                                        |                                                                                                                          |
|                                                                                                   |                                        |                                                                                                                          |
| <input type="checkbox"/>                                                                          | <b>Testing procedure: CTF Stage 2:</b> |                                                                                                                          |
| <b>Testing location/ address..... :</b>                                                           |                                        |                                                                                                                          |
| <b>Tested by (name + signature)..... :</b>                                                        |                                        |                                                                                                                          |
| <b>Witnessed by (name, function, signature).. :</b>                                               |                                        |                                                                                                                          |
| <b>Approved by (name, function, signature)... :</b>                                               |                                        |                                                                                                                          |
|                                                                                                   |                                        |                                                                                                                          |
| <input type="checkbox"/>                                                                          | <b>Testing procedure: CTF Stage 3:</b> |                                                                                                                          |
| <input type="checkbox"/>                                                                          | <b>Testing procedure: CTF Stage 4:</b> |                                                                                                                          |
| <b>Testing location/ address..... :</b>                                                           |                                        |                                                                                                                          |
| <b>Tested by (name, function, signature)..... :</b>                                               |                                        |                                                                                                                          |
| <b>Witnessed by (name, function, signature).. :</b>                                               |                                        |                                                                                                                          |
| <b>Approved by (name, function, signature)... :</b>                                               |                                        |                                                                                                                          |
| <b>Supervised by (name, function, signature) :</b>                                                |                                        |                                                                                                                          |

**List of Attachments (including a total number of pages in each attachment):**

Attachment 1: Photo Documentation (3 pages).

**Summary of testing:**
**Tests performed (name of test and test clause):**

cl.5.6.2 Design recommendation;

cl.7.1 Charging procedure for test purposes (for Cells and Batteries);

cl.7.2.1 Continuous charging at constant voltage (Cells);

cl.7.2.2 Case stress at high ambient temperature (Batteries);

cl.7.3.1 External short-circuit (Cells);

cl.7.3.2 External short-circuit (Batteries);

cl.7.3.3 Free fall (Cells and Batteries);

cl.7.3.4 Thermal abuse (Cells);

cl.7.3.5 Crush (Cells);

cl.7.3.6 Over-charging of battery;

cl.7.3.7 Forced discharge (Cells);

cl.7.3.8 Mechanical tests (Batteries);

cl.7.3.9 Design evaluation – Forced internal short-circuit (cells).

cl.8.2 Small cell and battery safety information.

Tests are made with the number of cells and batteries specified in IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 Table 1.

**Testing location:**

**Shenzhen STE Testing Laboratory Co., Ltd.**  
3/F, Building 9, Hongde Factory, No. 63 Yuchang Road, Niuhe Community, Guanlan Street, Longhua District, Shenzhen, China

**Summary of compliance with National Differences (List of countries addressed): N/A**
**Use of uncertainty of measurement for decisions on conformity (decision rule):**

☒ No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

☐ Other: (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

**Information on uncertainty of measurement:**

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

**Copy of marking plate:**

**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

|                                                        |            |
|--------------------------------------------------------|------------|
| (+)                                                    | (-)        |
| Rechargeable Li-polymer battery                        |            |
| Model: C67                                             |            |
| 3.7V, 4850mAh, 17.945Wh                                |            |
| 1ICP6/63/80                                            | YYYY/MM/DD |
| Zhongshanshi Jiuliyuan New Energy Technology Co., Ltd. |            |
| WARNING:                                               |            |
| Do not disassemble, puncture, crush, heat, or burn.    |            |

**Remark:**

1. “YYYY” means year for manufacture;

“MM” means month for manufacture;

“DD” means day for manufacture.

2. The applicant and manufacturer information, product name, model, trademark and other information in this report are all provided by the applicant, and this laboratory is not responsible for verifying its authenticity.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Test item particulars.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                   |
| <b>Classification of installation and use.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | To be defined in final product                                                                                                    |
| <b>Supply Connection.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | DC terminal                                                                                                                       |
| <b>Recommend charging method declared by the manufacturer.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Charging the battery with 970mA constant current and 4.45V constant voltage until the current reduces to 97mA at ambient 20°C±5°C |
| <b>Discharge current (0,2 It A).....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 970mA                                                                                                                             |
| <b>Specified final voltage.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2.8V                                                                                                                              |
| <b>Upper limit charging voltage per cell.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4.45V                                                                                                                             |
| <b>Maximum charging current.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 3000mA                                                                                                                            |
| <b>Charging temperature upper limit.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 45°C                                                                                                                              |
| <b>Charging temperature lower limit.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20°C                                                                                                                              |
| <b>Polymer cell electrolyte type.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A               |
| <b>Possible test case verdicts:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                   |
| - test case does not apply to the test object.....:                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | N/A                                                                                                                               |
| - test object does meet the requirement.....:                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | P (Pass)                                                                                                                          |
| - test object does not meet the requirement.....:                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | F (Fail)                                                                                                                          |
| <b>Testing.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                   |
| <b>Date of receipt of test item.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 2026-04-22                                                                                                                        |
| <b>Date (s) of performance of tests.....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 2026-04-22 to 2026-05-29                                                                                                          |
| <b>General remarks:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                   |
| <p>The test results presented in this report relate only to the object tested.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p> <p>"(See Enclosure #)" refers to additional information appended to the report.</p> <p>"(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p> |                                                                                                                                   |
| <b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 62133-2:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                   |
| The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:                                                                                                                                                                                                                                               | <input type="checkbox"/> Yes<br><input checked="" type="checkbox"/> Not applicable                                                |
| <b>When differences exist; they shall be identified in the General product information section.</b>                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                   |
| <b>Name and address of factory (ies).....:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Same as manufacturer.                                                                                                             |

**General product information and other remarks:**

This battery is constructed with one li-ion cell, and has overcharge, over-discharge, over current and short-circuits proof circuit.

The main features of the battery are shown as below (clause 7.1.1):

| Model | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|-------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| C67   | 4850mAh          | 3.7V            | 970mA                  | 970mA                     | 3000mA                 | 3000mA                    | 4.45V                  | 2.8V            |


The main features of the cell in the battery are shown as below (clause 7.1.1):

| Model  | Nominal capacity | Nominal voltage | Nominal Charge Current | Nominal Discharge Current | Maximum Charge Current | Maximum Discharge Current | Maximum Charge Voltage | Cut-off Voltage |
|--------|------------------|-----------------|------------------------|---------------------------|------------------------|---------------------------|------------------------|-----------------|
| 546380 | 4900mAh          | 3.87V           | 980mA                  | 980mA                     | 6370mA                 | 4900mA                    | 4.45V                  | 2.75V           |

The main features of the cell in the battery are shown as below (clause 7.1.2):


| Model  | Upper limit charge voltage | Taper-off current | Lower charge temperature | Upper charge temperature |
|--------|----------------------------|-------------------|--------------------------|--------------------------|
| 546380 | 4.45V                      | 245mA             | 20°C                     | 45°C                     |

### Construction:

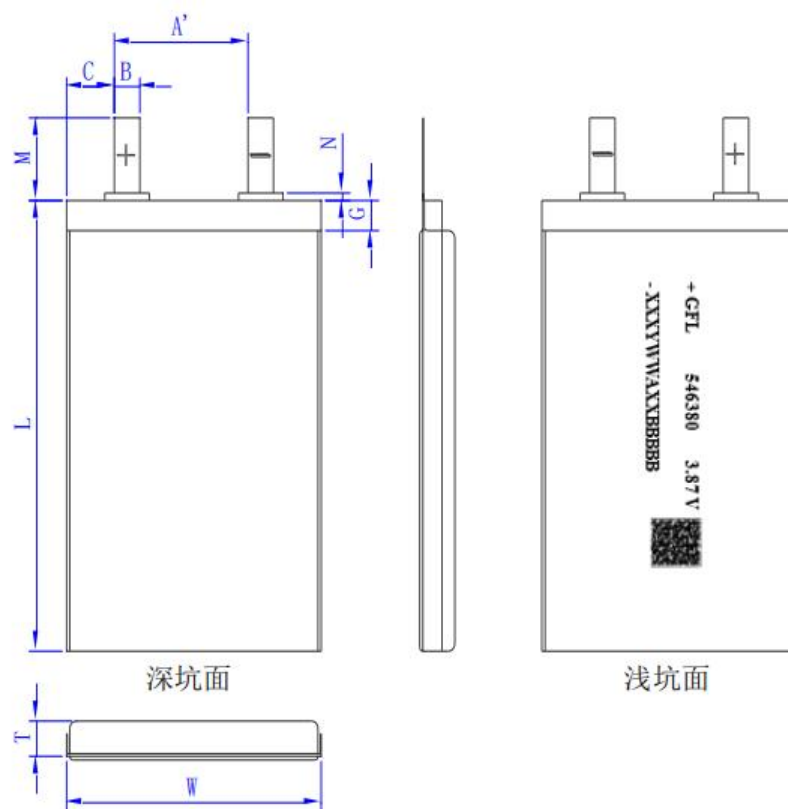


L=80mm(max), W=63mm(max), T=5.84mm(max)

### Cell

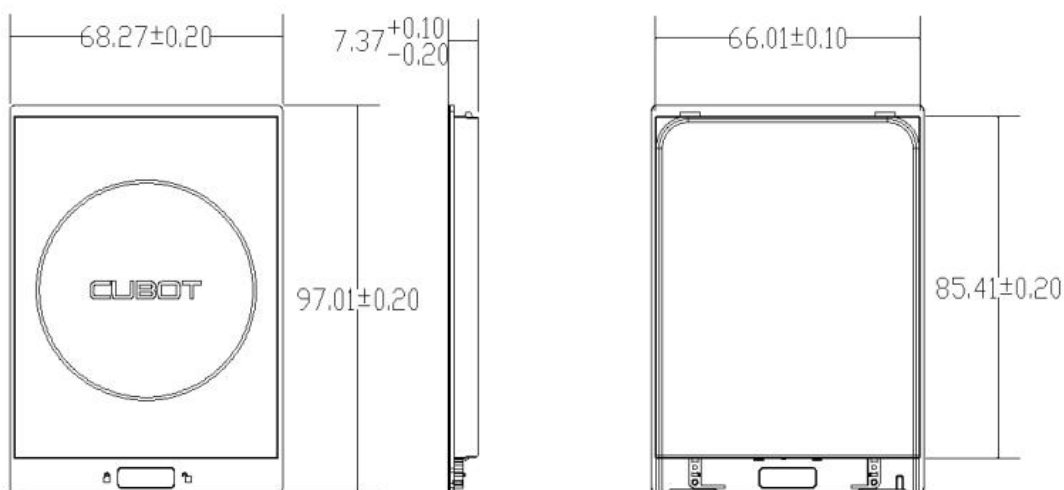

Battery Unit(mm)

### Circuit diagram:

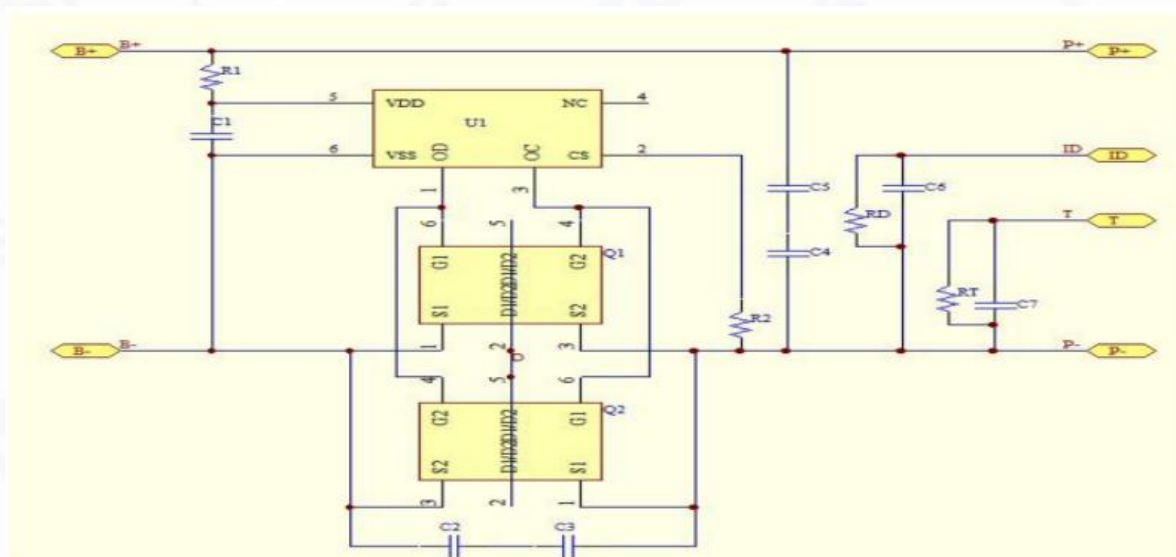

| IEC 62133-2 |                                                                                                                                                                                                                            |                                                                                                                       |         |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                         | Result - Remark                                                                                                       | Verdict |
| <b>4</b>    | <b>PARAMETER MEASUREMENT TOLERANCES</b>                                                                                                                                                                                    |                                                                                                                       | P       |
|             | Parameter measurement tolerances                                                                                                                                                                                           |                                                                                                                       | P       |
| <b>5</b>    | <b>GENERAL SAFETY CONSIDERATIONS</b>                                                                                                                                                                                       |                                                                                                                       | P       |
| <b>5.1</b>  | <b>General</b>                                                                                                                                                                                                             |                                                                                                                       | P       |
|             | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse                                                                                 |                                                                                                                       | P       |
| <b>5.2</b>  | <b>Insulation and wiring</b>                                                                                                                                                                                               |                                                                                                                       | P       |
|             | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ                                                 | No metal surface exists.                                                                                              | N/A     |
|             | Insulation resistance (MΩ) :                                                                                                                                                                                               |                                                                                                                       | —       |
|             | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements                                                                                               |                                                                                                                       | P       |
|             | Orientation of wiring maintains adequate clearances and creepage distances between conductors                                                                                                                              |                                                                                                                       | P       |
|             | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse                                                                                                                                    |                                                                                                                       | P       |
| <b>5.3</b>  | <b>Venting</b>                                                                                                                                                                                                             |                                                                                                                       | P       |
|             | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition            | Venting mechanism exists on narrow side of pouch cell.                                                                | P       |
|             | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief                                                                      |                                                                                                                       | N/A     |
| <b>5.4</b>  | <b>Temperature, voltage and current management</b>                                                                                                                                                                         |                                                                                                                       | P       |
|             | Batteries are designed such that abnormal temperature rise conditions are prevented                                                                                                                                        | Overcharge, over discharge, over current and short-circuit proof circuit used in this battery. See tests of clause 7. | P       |
|             | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer                                                                                                             | See above.                                                                                                            | P       |
|             | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified | The charging limits specified in the manufacturer's specification.                                                    | P       |
| <b>5.5</b>  | <b>Terminal contacts</b>                                                                                                                                                                                                   |                                                                                                                       | P       |
|             | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current                                                                                                                     | DC terminal complied with the requirements.                                                                           | P       |
|             | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance                                                                                             | Complied.                                                                                                             | P       |

| IEC 62133-2 |                                                                                                                                                                                                                                                                                                                                                          |                                                                                            |         |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                                                                                                                                       | Result - Remark                                                                            | Verdict |
|             | Terminal contacts are arranged to minimize the risk of short circuits                                                                                                                                                                                                                                                                                    |                                                                                            | P       |
| <b>5.6</b>  | <b>Assembly of cells into batteries</b>                                                                                                                                                                                                                                                                                                                  |                                                                                            | P       |
| 5.6.1       | General                                                                                                                                                                                                                                                                                                                                                  |                                                                                            | P       |
|             | Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region                                                                                                                                                             | Protective circuit equipped on battery.                                                    | P       |
|             | This protection may be provided external to the battery such as within the charger or the end devices                                                                                                                                                                                                                                                    |                                                                                            | N/A     |
|             | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation                                                                                                                                                                                |                                                                                            | N/A     |
|             | If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions                                                                                                                                                                                      | Single cell battery.                                                                       | N/A     |
|             | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly                                                                                                                                                                                                   | Current, voltage and temperature limits specified by cell manufacturer.                    | P       |
|             | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer                                                                                                                                           |                                                                                            | N/A     |
|             | Protective circuit components are added as appropriate and consideration given to the end-device application                                                                                                                                                                                                                                             |                                                                                            | P       |
|             | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance                                                                                                               | Safety analysis report provided by manufacturer.                                           | P       |
| 5.6.2       | Design recommendation                                                                                                                                                                                                                                                                                                                                    |                                                                                            | P       |
|             | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2                                                                                                                                                  | Max. charging voltage of cell: 4.45V, not exceed 4.45V specified in Clause 7.1.2, Table 2. | P       |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks |                                                                                            | N/A     |

| IEC 62133-2 |                                                                                                                                                                                                                                                                                                                                           |                                                                                           |         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                                                                                                                        | Result - Remark                                                                           | Verdict |
|             | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks |                                                                                           | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection                                                                                                                                                                                                     |                                                                                           | N/A     |
|             | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer                                                                                                                                               |                                                                                           | N/A     |
|             | It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage                                                                                                                                                                                                                | Final voltage of cell: 2.8V, not exceed the final voltage specified by cell manufacturer. | P       |
|             | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system                                                                                                                                                                                           |                                                                                           | N/A     |
| 5.6.3       | Mechanical protection for cells and components of batteries                                                                                                                                                                                                                                                                               |                                                                                           | P       |
|             | Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse                                                                                                                                                    | Mechanical protection for cell connections and control circuits provided.                 | P       |
|             | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product                                                                                                                                                            | Build-in batteries, mechanical protection for cells should be provided by end product.    | P       |
|             | The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer                                                                                                                                                           | To be evaluated in final system.                                                          | N/A     |
|             | For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests                                                                                                                                                                 |                                                                                           | N/A     |
| 5.7         | <b>Quality plan</b>                                                                                                                                                                                                                                                                                                                       |                                                                                           | P       |
|             | The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery                                                                                                             | Complied.<br>Quality plan provided.                                                       | P       |
| 5.8         | <b>Battery safety components</b>                                                                                                                                                                                                                                                                                                          | See TABLE: Critical components information                                                | P       |
| 6           | <b>TYPE TEST AND SAMPLE SIZE</b>                                                                                                                                                                                                                                                                                                          |                                                                                           | P       |

| IEC 62133-2 |                                                                                                                                                                                                           |                   |         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                        | Result - Remark   | Verdict |
|             | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old                                                                  |                   | P       |
|             | The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 $\Omega$ are tested in accordance with Table 1                 | Not coin cells    | N/A     |
|             | Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C $\pm$ 5 °C                                                                                                           |                   | P       |
|             | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and over discharge protection                                            |                   | P       |
|             | When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test | See clause 7.3.2. | P       |

|            |                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                              |   |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|---|
| <b>7</b>   | <b>SPECIFIC REQUIREMENTS AND TESTS</b>                                                                                                                                                                                                                                                                                                                                           |                                                                                                              | P |
| <b>7.1</b> | <b>Charging procedure for test purposes</b>                                                                                                                                                                                                                                                                                                                                      |                                                                                                              | P |
| 7.1.1      | First procedure                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                              | P |
|            | This charging procedure applies to subclauses other than those specified in 7.1.2                                                                                                                                                                                                                                                                                                |                                                                                                              | P |
|            | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C $\pm$ 5 °C, using the method declared by the manufacturer                                                                                                                                                                                   | See page 5.                                                                                                  | P |
|            | Prior to charging, the battery has been discharged at 20 °C $\pm$ 5 °C at a constant current of 0,2 It A down to a specified final voltage                                                                                                                                                                                                                                       | See page 5.                                                                                                  | P |
| 7.1.2      | Second procedure                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                              | P |
|            | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9                                                                                                                                                                                                                                                                                                           |                                                                                                              | P |
|            | After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method | Charge temperature 20~45°C declared.<br>45°C used for upper limit tests,<br>20°C used for lower limit tests. | P |
| <b>7.2</b> | <b>Intended use</b>                                                                                                                                                                                                                                                                                                                                                              |                                                                                                              | P |
| 7.2.1      | Continuous charging at constant voltage (cells)                                                                                                                                                                                                                                                                                                                                  | Tested complied.                                                                                             | P |
|            | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer                                                                                                                                                                                                                           | Charging for 7 days with 970mA                                                                               | P |
|            | Results: no fire, no explosion, no leakage :                                                                                                                                                                                                                                                                                                                                     | (See appended table 7.2.1)                                                                                   | P |
| 7.2.2      | Case stress at high ambient temperature (battery)                                                                                                                                                                                                                                                                                                                                | Tested as client requested.                                                                                  | P |
|            | Oven temperature (°C) :                                                                                                                                                                                                                                                                                                                                                          | 70°C                                                                                                         | — |

| IEC 62133-2 |                                                                                                                                                                                                |                                                    |         |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                             | Result - Remark                                    | Verdict |
|             | Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells                                                                          | No physical distortion of the battery case.        | P       |
| <b>7.3</b>  | <b>Reasonably foreseeable misuse</b>                                                                                                                                                           |                                                    | P       |
| 7.3.1       | External short-circuit (cell)                                                                                                                                                                  | Tested complied.                                   | P       |
|             | The cells were tested until one of the following occurred:                                                                                                                                     |                                                    | P       |
|             | - 24 hours elapsed; or                                                                                                                                                                         |                                                    | N/A     |
|             | - The case temperature declined by 20 % of the maximum temperature rise                                                                                                                        |                                                    | P       |
|             | Results: no fire, no explosion:                                                                                                                                                                | (See appended table 7.3.1)                         | P       |
| 7.3.2       | External short-circuit (battery)                                                                                                                                                               | Tested complied.                                   | P       |
|             | The batteries were tested until one of the following occurred:                                                                                                                                 |                                                    | P       |
|             | - 24 hours elapsed; or                                                                                                                                                                         |                                                    | N/A     |
|             | - The case temperature declined by 20 % of the maximum temperature rise                                                                                                                        |                                                    | P       |
|             | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition                     |                                                    | P       |
|             | A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test            | Single fault conducted on four samples.            | P       |
|             | A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive temperature coefficient (PTC) thermistor | Single fault applies on MOSFET (Q1) short circuit. | P       |
|             | Results: no fire, no explosion:                                                                                                                                                                | (See appended table 7.3.2)                         | P       |
| 7.3.3       | Free fall                                                                                                                                                                                      | Tested complied.                                   | P       |
|             | Results: no fire, no explosion                                                                                                                                                                 | No fire. No explosion                              | P       |
| 7.3.4       | Thermal abuse (cells)                                                                                                                                                                          | Tested complied.                                   | P       |
|             | Oven temperature (°C) :                                                                                                                                                                        | 130°C                                              | —       |
|             | Results: no fire, no explosion                                                                                                                                                                 | No fire. No explosion                              | P       |
| 7.3.5       | Crush (cells)                                                                                                                                                                                  | Tested complied.                                   | P       |
|             | The crushing force was released upon:                                                                                                                                                          |                                                    | P       |
|             | - The maximum force of 13 kN ± 0,78 kN has been applied; or                                                                                                                                    |                                                    | P       |
|             | - An abrupt voltage drop of one-third of the original voltage has been obtained                                                                                                                |                                                    | N/A     |
|             | Results: no fire, no explosion:                                                                                                                                                                | (See appended table 7.3.5)                         | P       |
| 7.3.6       | Over-charging of battery                                                                                                                                                                       | Tested complied.                                   | P       |
|             | The supply voltage which is:                                                                                                                                                                   |                                                    | P       |
|             | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or                                                          | 6V applied.                                        | P       |

| IEC 62133-2 |                                                                                                                                                                                                                                                                       |                                                                    |         |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                                                                                                                    | Result - Remark                                                    | Verdict |
|             | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and                                                                                                                                            |                                                                    | N/A     |
|             | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached                                                                                                                                             |                                                                    | P       |
|             | Test was continued until the temperature of the outer casing:                                                                                                                                                                                                         |                                                                    | P       |
|             | - Reached steady state conditions (less than 10 °C change in 30-minute period); or                                                                                                                                                                                    |                                                                    | N/A     |
|             | - Returned to ambient                                                                                                                                                                                                                                                 |                                                                    | P       |
|             | Results: no fire, no explosion:                                                                                                                                                                                                                                       | (See appended table 7.3.6)                                         | P       |
| 7.3.7       | Forced discharge (cells)                                                                                                                                                                                                                                              | Tested complied.                                                   | P       |
|             | Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer                                                                                                                                                                       | Lower limit discharge voltage 2.8V.                                | P       |
|             | The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage                                                                                                                                       |                                                                    | P       |
|             | - The discharge voltage reaches the negative value of upper limit charging voltage within the testing duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration |                                                                    | N/A     |
|             | - The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration                                                                                      |                                                                    | P       |
|             | Results: no fire, no explosion:                                                                                                                                                                                                                                       | (See appended table 7.3.7)                                         | P       |
| 7.3.8       | Mechanical tests (batteries)                                                                                                                                                                                                                                          |                                                                    | P       |
| 7.3.8.1     | Vibration                                                                                                                                                                                                                                                             | Tested complied.                                                   | P       |
|             | Results: no fire, no explosion, no rupture, no leakage or venting. :                                                                                                                                                                                                  | (See appended table 7.3.8.1)                                       | P       |
| 7.3.8.2     | Mechanical shock                                                                                                                                                                                                                                                      | Tested complied.                                                   | P       |
|             | Results: no leakage, no venting, no rupture, no explosion and no fire :                                                                                                                                                                                               | (See appended table 7.3.8.2)                                       | P       |
| 7.3.9       | Design evaluation – Forced internal short-circuit (cells)                                                                                                                                                                                                             | Tested complied.                                                   | P       |
|             | The cells complied with national requirement for :                                                                                                                                                                                                                    | France, Japan, Korea, Switzerland                                  | —       |
|             | The pressing was stopped upon:                                                                                                                                                                                                                                        |                                                                    | P       |
|             | - A voltage drop of 50 mV has been detected; or                                                                                                                                                                                                                       |                                                                    | N/A     |
|             | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached                                                                                                                                                                         | 400N for prismatic cells.                                          | P       |
|             | Results: no fire :                                                                                                                                                                                                                                                    | (See appended table 7.3.9)                                         | P       |
| <b>8</b>    | <b>INFORMATION FOR SAFETY</b>                                                                                                                                                                                                                                         |                                                                    | P       |
| <b>8.1</b>  | <b>General</b>                                                                                                                                                                                                                                                        |                                                                    | P       |
|             | Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products                                                                                                                                                 | Information for safety mentioned in manufacturer's specifications. | P       |

| IEC 62133-2 |                                                                                                                                                                     |                                                                    |         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                                  | Result - Remark                                                    | Verdict |
|             | Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users                              | Information for safety mentioned in manufacturer's specifications. | P       |
|             | Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product           |                                                                    | N/A     |
|             | As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user                                           |                                                                    | N/A     |
|             | Do not allow children to replace batteries without adult supervision                                                                                                |                                                                    | N/A     |
| <b>8.2</b>  | <b>Small cell and battery safety information</b>                                                                                                                    | Not small cells and batteries                                      | N/A     |
|             | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them:                          |                                                                    | N/A     |
|             | - Keep small cells and batteries which are considered swallowable out of the reach of children                                                                      |                                                                    | N/A     |
|             | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion                                               |                                                                    | N/A     |
|             | - In case of ingestion of a cell or battery, seek medical assistance promptly                                                                                       |                                                                    | N/A     |
| <b>9</b>    | <b>MARKING</b>                                                                                                                                                      |                                                                    | P       |
| <b>9.1</b>  | <b>Cell marking</b>                                                                                                                                                 | The final product is battery                                       | N/A     |
|             | Cells are marked as specified in IEC 61960, except coin cells                                                                                                       |                                                                    | N/A     |
|             | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity                                      |                                                                    | N/A     |
|             | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked |                                                                    | N/A     |
| <b>9.2</b>  | <b>Battery marking</b>                                                                                                                                              |                                                                    | P       |
|             | Batteries are marked as specified in IEC 61960, except for coin batteries                                                                                           | See marking plate on page 4.                                       | P       |
|             | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity                              | Not coin batteries.                                                | N/A     |
|             | Batteries are marked with an appropriate caution statement                                                                                                          | Batteries marked with an appropriate caution statement.            | P       |
|             | - Terminals have clear polarity marking on the external surface of the battery, or                                                                                  |                                                                    | N/A     |

| IEC 62133-2 |                                                                                                                                                      |                                                                                                            |         |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|---------|
| Clause      | Requirement + Test                                                                                                                                   | Result - Remark                                                                                            | Verdict |
|             | - Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections                                 | Special designed connector used. Also the connector construction designed wrong polarity insert prevented. | P       |
| <b>9.3</b>  | <b>Caution for ingestion of small cells and batteries</b>                                                                                            |                                                                                                            | N/A     |
|             | Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2         | Not coin cells and batteries.                                                                              | N/A     |
|             | Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package | Not intended for direct sale.                                                                              | N/A     |
| <b>9.4</b>  | <b>Other information</b>                                                                                                                             |                                                                                                            | P       |
|             | The following information are marked on or supplied with the battery:                                                                                | Information for storage and disposal instructions mentioned in manufacturer's specifications.              | P       |
|             | - Storage and disposal instructions                                                                                                                  |                                                                                                            | P       |
|             | - Recommended charging instructions                                                                                                                  |                                                                                                            | P       |
| <b>10</b>   | <b>PACKAGING AND TRANSPORT</b>                                                                                                                       |                                                                                                            | N/A     |
|             | Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3                                         | Not coin cells.                                                                                            | N/A     |

|                |                                                                                   |                                                                   |     |
|----------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------|-----|
| <b>ANNEX A</b> | <b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b> |                                                                   | P   |
| <b>A.1</b>     | <b>General</b>                                                                    |                                                                   | P   |
| <b>A.2</b>     | <b>Safety of lithium ion secondary battery</b>                                    | Complied.                                                         | P   |
| <b>A.3</b>     | <b>Consideration on charging voltage</b>                                          | Complied.                                                         | P   |
| A.3.1          | General                                                                           |                                                                   | P   |
| A.3.2          | Upper limit charging voltage                                                      | 4.45V applied.                                                    | P   |
| A.3.2.1        | General                                                                           |                                                                   | P   |
| A.3.2.2        | Explanation of safety viewpoint                                                   |                                                                   | P   |
| A.3.2.3        | Safety requirements, when different upper limit charging voltage is applied       | 4.45V applied.                                                    | P   |
| <b>A.4</b>     | <b>Consideration of temperature and charging current</b>                          |                                                                   | P   |
| A.4.1          | General                                                                           |                                                                   | P   |
| A.4.2          | Recommended temperature range                                                     | See A.4.2.2.                                                      | P   |
| A.4.2.1        | General                                                                           |                                                                   | P   |
| A.4.2.2        | Safety consideration when a different recommended temperature range is applied    | Charging temperature declared by client is: 20-45°C               | P   |
| A.4.3          | High temperature range                                                            | Not higher than the temperature range specified in this standard. | N/A |
| A.4.3.1        | General                                                                           |                                                                   | N/A |
| A.4.3.2        | Explanation of safety viewpoint                                                   |                                                                   | N/A |

| IEC 62133-2    |                                                                                               |                                                                  |         |
|----------------|-----------------------------------------------------------------------------------------------|------------------------------------------------------------------|---------|
| Clause         | Requirement + Test                                                                            | Result - Remark                                                  | Verdict |
| A.4.3.3        | Safety considerations when specifying charging conditions in the high temperature range       |                                                                  | N/A     |
| A.4.3.4        | Safety considerations when specifying a new upper limit in the high temperature range         |                                                                  | N/A     |
| A.4.4          | Low temperature range                                                                         | Not lower than the temperature range specified in this standard. | N/A     |
| A.4.4.1        | General                                                                                       |                                                                  | N/A     |
| A.4.4.2        | Explanation of safety viewpoint                                                               |                                                                  | N/A     |
| A.4.4.3        | Safety considerations, when specifying charging conditions in the low temperature range       |                                                                  | N/A     |
| A.4.4.4        | Safety considerations when specifying a new lower limit in the low temperature range          |                                                                  | N/A     |
| A.4.5          | Scope of the application of charging current                                                  |                                                                  | P       |
| A.4.6          | Consideration of discharge                                                                    |                                                                  | P       |
| A.4.6.1        | General                                                                                       |                                                                  | P       |
| A.4.6.2        | Final discharge voltage and explanation of safety viewpoint                                   |                                                                  | P       |
| A.4.6.3        | Discharge current and temperature range                                                       |                                                                  | P       |
| A.4.6.4        | Scope of application of the discharging current                                               |                                                                  | P       |
| <b>A.5</b>     | <b>Sample preparation</b>                                                                     |                                                                  | P       |
| A.5.1          | General                                                                                       |                                                                  | P       |
| A.5.2          | Insertion procedure for nickel particle to generate internal short                            |                                                                  | P       |
| A.5.3          | Disassembly of charged cell                                                                   |                                                                  | P       |
| A.5.4          | Shape of nickel particle                                                                      |                                                                  | P       |
| A.5.5          | Insertion of nickel particle in cylindrical cell                                              |                                                                  | N/A     |
| A.5.5.1        | Insertion of nickel particle in winding core                                                  |                                                                  | N/A     |
| A.5.5.2        | Marking the position of the nickel particle on both ends of the winding core of the separator |                                                                  | N/A     |
| A.5.6          | Insertion of nickel particle in prismatic cell                                                |                                                                  | P       |
| <b>A.6</b>     | <b>Experimental procedure of the forced internal short-circuit test</b>                       |                                                                  | P       |
| A.6.1          | Material and tools for preparation of nickel particle                                         |                                                                  | P       |
| A.6.2          | Example of a nickel particle preparation procedure                                            |                                                                  | P       |
| A.6.3          | Positioning (or placement) of a nickel particle                                               |                                                                  | P       |
| A.6.4          | Damaged separator precaution                                                                  |                                                                  | P       |
| A.6.5          | Caution for rewinding separator and electrode                                                 |                                                                  | P       |
| A.6.6          | Insulation film for preventing short-circuit                                                  |                                                                  | P       |
| A.6.7          | Caution when disassembling a cell                                                             |                                                                  | P       |
| A.6.8          | Protective equipment for safety                                                               |                                                                  | P       |
| A.6.9          | Caution in the case of fire during disassembling                                              |                                                                  | P       |
| A.6.10         | Caution for the disassembling process and pressing the electrode core                         |                                                                  | P       |
| A.6.11         | Recommended specifications for the pressing device                                            |                                                                  | P       |
| <b>ANNEX B</b> | <b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b>                      |                                                                  | N/A     |

| IEC 62133-2 |                    |                 |         |
|-------------|--------------------|-----------------|---------|
| Clause      | Requirement + Test | Result - Remark | Verdict |

|                |                                         |     |
|----------------|-----------------------------------------|-----|
| <b>ANNEX C</b> | <b>RECOMMENDATIONS TO THE END-USERS</b> | N/A |
|----------------|-----------------------------------------|-----|

| ANNEX D | MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS                                                                           |                          | N/A |
|---------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----|
| D.1     | General                                                                                                                            | Not coin cells           | N/A |
| D.2     | Method                                                                                                                             |                          | N/A |
|         | A sample size of three coin cells is required for this measurement.....:                                                           | (See appended table D.2) | N/A |
|         | Coin cells with an internal resistance of less than or equal to 3 Ω are subjected to the testing according to Clause 6 and Table 1 |                          | N/A |
|         | Coin cells with an internal resistance greater than 3 Ω require no further testing                                                 |                          | N/A |

|                |                                |     |
|----------------|--------------------------------|-----|
| <b>ANNEX E</b> | <b>PACKAGING AND TRANSPORT</b> | N/A |
|----------------|--------------------------------|-----|

|                |                                       |     |
|----------------|---------------------------------------|-----|
| <b>ANNEX F</b> | <b>COMPONENT STANDARDS REFERENCES</b> | N/A |
|----------------|---------------------------------------|-----|

| TABLE: Critical components information |                                                     |                                          |                                                                                         |                                              | P                                   |
|----------------------------------------|-----------------------------------------------------|------------------------------------------|-----------------------------------------------------------------------------------------|----------------------------------------------|-------------------------------------|
| Object/part no.                        | Manufacturer/trademark                              | Type/model                               | Technical data                                                                          | Standard                                     | Mark(s) of conformity <sup>1)</sup> |
| Cell                                   | Huizhou Ganfeng Lithium Technology Co., LTD         | 546380                                   | 4900mAh/4.45V                                                                           | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 | Tested with appliance               |
| Case                                   | Dongguan Zhuoyue New Material Technology Co., Ltd   | 116                                      | PP+Al+Nylon                                                                             |                                              |                                     |
| - Positive Electrode                   | XTC New Energy Materials (Xiamen) LTD               | CPC091                                   | LiCoCo2、PVDF、CNT、Conductive                                                             | --                                           | --                                  |
| - Negative Electrode                   | Jiangxi Zichen Technology CO.,LTD                   | C                                        | Graphite, CMC, SBR, Conductive, Copper Foil                                             | --                                           | --                                  |
| - Electrolyte                          | Zhuhai Saiwei Electronic Materials Co., Ltd         | A010                                     | LiPF6,EMC, EC, DEC, PC                                                                  | --                                           | --                                  |
| - Separator                            | Advanced Electronic Technology Co., Ltd             | 9um                                      | PE+Al2O3+PVDF shutdown temperature: min. 168°C                                          | --                                           | --                                  |
| PCM                                    | SHEN ZHEN SHI AUTO TEK INTERNATON ELECTRONIC CO;LTD | JLY-G051-546380-4.45V-PCB-A0             | FR4,62.1*5.3*0.9mm                                                                      |                                              |                                     |
| Protection IC (U1)                     | ABLIC Inc                                           | IC:S-8261D AQ                            | Overcharge detection voltage:4.4750±0.025V, Overdischarge detection voltage:2.50±0.01V, | --                                           | Tested with appliance               |
| MOSFET (Q1, Q2)                        | Shenzhen Zhuolang Technology Co.,LTD                | ZL8205B*2                                | VDSS:20V, VGSS:±12V, ID:6.0A, TJ:-55-150°C, SOT-23-6                                    | --                                           | Tested with appliance               |
| PCB                                    | DONGGUAN HUAHAIXING ELECTRONIC TECHNOLOGY CO.,LTD   | JRD-S                                    | V-0, 130°C                                                                              | --                                           | --                                  |
| NTC                                    | MURATA MFG CO LTD                                   | NCP15XH103F03RC,0402,10KΩ±1%,B=3380, HF, | R020 =10K±1%,B=3380K Topr: -40°C-125°C, 0402                                            | UL 1434                                      | UL E258805                          |

|                 |                                       |               |            |  |  |
|-----------------|---------------------------------------|---------------|------------|--|--|
| Insulation tape | Shenzhen Runhai Electronics Co., Ltd. | 0.05*10mm     | Min. 130°C |  |  |
| Connector       | Shenzhen Shengya Hardware Products    | 1.5*1.5*1.0mm | 6pins      |  |  |

**Supplementary information:**

**1) Provided evidence ensures the agreed level of compliance.**



|                                                                                                          |                                                        |                                                       |                       |         |   |
|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------|-----------------------|---------|---|
| 7.2.1                                                                                                    | TABLE: Continuous charging at constant voltage (cells) |                                                       |                       |         | P |
| Sample no.                                                                                               | Recommended charging voltage<br>V <sub>c</sub> (Vdc)   | Recommended charging current<br>I <sub>rec</sub> (mA) | OCV before test (Vdc) | Results |   |
| Cell #1                                                                                                  | 4.45                                                   | 970                                                   | 4.43                  | P       |   |
| Cell #2                                                                                                  | 4.45                                                   | 970                                                   | 4.42                  | P       |   |
| Cell #3                                                                                                  | 4.45                                                   | 970                                                   | 4.42                  | P       |   |
| Cell #4                                                                                                  | 4.45                                                   | 970                                                   | 4.43                  | P       |   |
| Cell #5                                                                                                  | 4.45                                                   | 970                                                   | 4.43                  | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No leakage<br>- Others (please explain) |                                                        |                                                       |                       |         |   |

|                                                            |                                       |                       |                            |                                                 |         |   |
|------------------------------------------------------------|---------------------------------------|-----------------------|----------------------------|-------------------------------------------------|---------|---|
| 7.3.1                                                      | TABLE: External short-circuit (cells) |                       |                            |                                                 |         | P |
| Sample no.                                                 | Ambient T (°C)                        | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise $\Delta T_c$ (°C) | Results |   |
| Samples charged at charging temperature upper limit (45°C) |                                       |                       |                            |                                                 |         |   |
| Cell #6                                                    | 55.7                                  | 4.43                  | 81                         | 118.5                                           | P       |   |
| Cell #7                                                    | 55.7                                  | 4.42                  | 82                         | 118.0                                           | P       |   |
| Cell #8                                                    | 55.7                                  | 4.42                  | 88                         | 116.2                                           | P       |   |
| Cell #9                                                    | 55.7                                  | 4.43                  | 85                         | 115.3                                           | P       |   |
| Cell #10                                                   | 55.7                                  | 4.43                  | 83                         | 112.4                                           | P       |   |
| Samples charged at charging temperature lower limit (20°C) |                                       |                       |                            |                                                 |         |   |
| Cell #11                                                   | 55.1                                  | 4.38                  | 78                         | 114.1                                           | P       |   |
| Cell #12                                                   | 55.1                                  | 4.38                  | 83                         | 112.2                                           | P       |   |
| Cell #13                                                   | 55.1                                  | 4.37                  | 82                         | 113.0                                           | P       |   |
| Cell #14                                                   | 55.1                                  | 4.38                  | 89                         | 110.7                                           | P       |   |
| Cell #15                                                   | 55.1                                  | 4.38                  | 81                         | 114.6                                           | P       |   |
| Supplementary information:                                 |                                       |                       |                            |                                                 |         |   |
| - No fire or explosion                                     |                                       |                       |                            |                                                 |         |   |
| - Others (please explain)                                  |                                       |                       |                            |                                                 |         |   |

| 7.3.2                                                                                    | TABLE: External short-circuit (batteries) |                       |                            |                                                 |                                  | P       |
|------------------------------------------------------------------------------------------|-------------------------------------------|-----------------------|----------------------------|-------------------------------------------------|----------------------------------|---------|
| Sample no.                                                                               | Ambient (°C)                              | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise $\Delta T$ , (°C) | Component single fault condition | Results |
| Battery #4                                                                               | 23.3                                      | 4.43                  | 81                         | 24.1                                            | MOSFET (Q1)<br>Short circuit     | P       |
| Battery #5                                                                               | 23.3                                      | 4.42                  | 87                         | 23.7                                            | MOSFET (Q1)<br>Short circuit     | P       |
| Battery #6                                                                               | 23.3                                      | 4.42                  | 83                         | 24.2                                            | MOSFET (Q2)<br>Short circuit     | P       |
| Battery #7                                                                               | 23.3                                      | 4.43                  | 81                         | 24.7                                            | MOSFET (Q2)<br>Short circuit     | P       |
| Battery #8                                                                               | 23.3                                      | 4.43                  | 80                         | 23.9                                            | --                               | P       |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- Others (please explain) |                                           |                       |                            |                                                 |                                  |         |

| 7.3.5                                                      | TABLE: Crush (cells)  |                                        |                                                     |         | P |
|------------------------------------------------------------|-----------------------|----------------------------------------|-----------------------------------------------------|---------|---|
| Sample no.                                                 | OCV before test (Vdc) | OCV at removal of crushing force (Vdc) | Maximum force applied to the cell during crush (kN) | Results |   |
| Samples charged at charging temperature upper limit (45°C) |                       |                                        |                                                     |         |   |
| Cell #29                                                   | 4.42                  | 4.42                                   | 13                                                  | P       |   |
| Cell #30                                                   | 4.42                  | 4.41                                   | 13                                                  | P       |   |
| Cell #31                                                   | 4.43                  | 4.43                                   | 13                                                  | P       |   |
| Cell #32                                                   | 4.43                  | 4.42                                   | 13                                                  | P       |   |
| Cell #33                                                   | 4.42                  | 4.42                                   | 13                                                  | P       |   |
| Samples charged at charging temperature lower limit (20°C) |                       |                                        |                                                     |         |   |
| Cell #34                                                   | 4.42                  | 4.42                                   | 13                                                  | P       |   |
| Cell #35                                                   | 4.43                  | 4.43                                   | 13                                                  | P       |   |
| Cell #36                                                   | 4.43                  | 4.43                                   | 13                                                  | P       |   |
| Cell #37                                                   | 4.42                  | 4.41                                   | 13                                                  | P       |   |
| Cell #38                                                   | 4.42                  | 4.42                                   | 13                                                  | P       |   |
| Supplementary information:                                 |                       |                                        |                                                     |         |   |
| - No fire or explosion                                     |                       |                                        |                                                     |         |   |
| - Others (please explain)                                  |                       |                                        |                                                     |         |   |

| 7.3.6                               | TABLE: Over-charging of battery |                              |                                     |         | P |
|-------------------------------------|---------------------------------|------------------------------|-------------------------------------|---------|---|
| Constant charging current (A).....: |                                 | 9.7                          |                                     |         | — |
| Supply voltage (Vdc).....:          |                                 | 6                            |                                     |         | — |
| Sample no.                          | OCV before charging (Vdc)       | Total charging time (minute) | Maximum outer case temperature (°C) | Results |   |
| Battery #12                         | 3.12                            | 122                          | 35.7                                | P       |   |
| Battery #13                         | 3.13                            | 122                          | 32.4                                | P       |   |
| Battery #14                         | 3.11                            | 122                          | 33.3                                | P       |   |
| Battery #15                         | 3.10                            | 122                          | 35.0                                | P       |   |
| Battery #16                         | 3.11                            | 122                          | 36.1                                | P       |   |
| Supplementary information:          |                                 |                              |                                     |         |   |
| - No fire or explosion              |                                 |                              |                                     |         |   |
| - Others (please explain)           |                                 |                              |                                     |         |   |

| 7.3.7                                                                                    | TABLE: Forced discharge (cells)                |                                    |                                     |         | P |
|------------------------------------------------------------------------------------------|------------------------------------------------|------------------------------------|-------------------------------------|---------|---|
| Sample no.                                                                               | OCV before application of reverse charge (Vdc) | Measured reverse charge $I_t$ (mA) | Lower limit discharge voltage (Vdc) | Results |   |
| Cell #39                                                                                 | 3.10                                           | 800                                | 2.8                                 | P       |   |
| Cell #40                                                                                 | 3.11                                           | 800                                | 2.8                                 | P       |   |
| Cell #41                                                                                 | 3.13                                           | 800                                | 2.8                                 | P       |   |
| Cell #42                                                                                 | 3.11                                           | 800                                | 2.8                                 | P       |   |
| Cell #43                                                                                 | 3.10                                           | 800                                | 2.8                                 | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- Others (please explain) |                                                |                                    |                                     |         |   |

| 7.3.8.1                                                                                                                                  | TABLE: Vibration      |                      |                      |                     |         | P |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|----------------------|---------------------|---------|---|
| Sample no.                                                                                                                               | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results |   |
| Battery #17                                                                                                                              | 4.43                  | 4.43                 | 88.408               | 88.405              | P       |   |
| Battery #18                                                                                                                              | 4.43                  | 4.43                 | 88.413               | 88.411              | P       |   |
| Battery #19                                                                                                                              | 4.42                  | 4.42                 | 88.407               | 88.406              | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No rupture<br>- No leakage<br>- No venting<br>- Others (please explain) |                       |                      |                      |                     |         |   |

| 7.3.8.2                                                                                                                                  |                       | TABLE: Mechanical shock |                      |                     |         | P |
|------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|---------------------|---------|---|
| Sample no.                                                                                                                               | OCV before test (Vdc) | OCV after test (Vdc)    | Mass before test (g) | Mass after test (g) | Results |   |
| Battery #20                                                                                                                              | 4.43                  | 4.43                    | 88.414               | 88.414              | P       |   |
| Battery #21                                                                                                                              | 4.43                  | 4.42                    | 88.408               | 88.407              | P       |   |
| Battery #22                                                                                                                              | 4.42                  | 4.42                    | 88.421               | 88.418              | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No rupture<br>- No leakage<br>- No venting<br>- Others (please explain) |                       |                         |                      |                     |         |   |

| 7.3.9                                                                                                                                                                                                                                                                                                                            |                        | TABLE: Forced internal short circuit (cells) |                                 |                              |         | P |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------------------------------------|---------------------------------|------------------------------|---------|---|
| Sample no.                                                                                                                                                                                                                                                                                                                       | Chamber ambient T (°C) | OCV before test (Vdc)                        | Particle location <sup>1)</sup> | Maximum applied pressure (N) | Results |   |
| Samples charged at charging temperature upper limit (45°C)                                                                                                                                                                                                                                                                       |                        |                                              |                                 |                              |         |   |
| Cell #44                                                                                                                                                                                                                                                                                                                         | 45                     | 4.43                                         | 1                               | 400                          | P       |   |
| Cell #45                                                                                                                                                                                                                                                                                                                         | 45                     | 4.43                                         | 1                               | 400                          | P       |   |
| Cell #46                                                                                                                                                                                                                                                                                                                         | 45                     | 4.42                                         | 1                               | 400                          | P       |   |
| Cell #47                                                                                                                                                                                                                                                                                                                         | 45                     | 4.43                                         | 1*                              | 400                          | P       |   |
| Cell #48                                                                                                                                                                                                                                                                                                                         | 45                     | 4.43                                         | 1*                              | 400                          | P       |   |
| Samples charged at charging temperature lower limit (20°C)                                                                                                                                                                                                                                                                       |                        |                                              |                                 |                              |         |   |
| Cell #49                                                                                                                                                                                                                                                                                                                         | 20                     | 4.39                                         | 1                               | 400                          | P       |   |
| Cell #50                                                                                                                                                                                                                                                                                                                         | 20                     | 4.40                                         | 1                               | 400                          | P       |   |
| Cell #51                                                                                                                                                                                                                                                                                                                         | 20                     | 4.39                                         | 1                               | 400                          | P       |   |
| Cell #52                                                                                                                                                                                                                                                                                                                         | 20                     | 4.40                                         | 1*                              | 400                          | P       |   |
| Cell #53                                                                                                                                                                                                                                                                                                                         | 20                     | 4.40                                         | 1*                              | 400                          | P       |   |
| <b>Supplementary information:</b><br><sup>1)</sup> Identify one of the following:<br>1: Nickel particle inserted between positive and negative (active material) coated area.<br>2: Nickel particle inserted between positive aluminium foil and negative active material coated area.<br>- No fire<br>- Others (please explain) |                        |                                              |                                 |                              |         |   |

| D.2        |                | TABLE: Internal AC resistance for coin cells |                    |                       | N/A |
|------------|----------------|----------------------------------------------|--------------------|-----------------------|-----|
| Sample no. | Ambient T (°C) | Store time (h)                               | Resistance Rac (Ω) | Results <sup>1)</sup> |     |
|            |                |                                              |                    |                       |     |
|            |                |                                              |                    |                       |     |
|            |                |                                              |                    |                       |     |

**Supplementary information:**

<sup>1)</sup> Coin cells with an internal resistance less than or equal to 3 Ω, see test result on corresponding tables according to Clause 6 and Table 1.

-- End of Report --



Product: Rechargeable Li-polymer battery

Type Designation: C67



Figure 1 Front view of battery



Figure 2 Back view of battery

Product: Rechargeable Li-polymer battery

Type Designation: C67

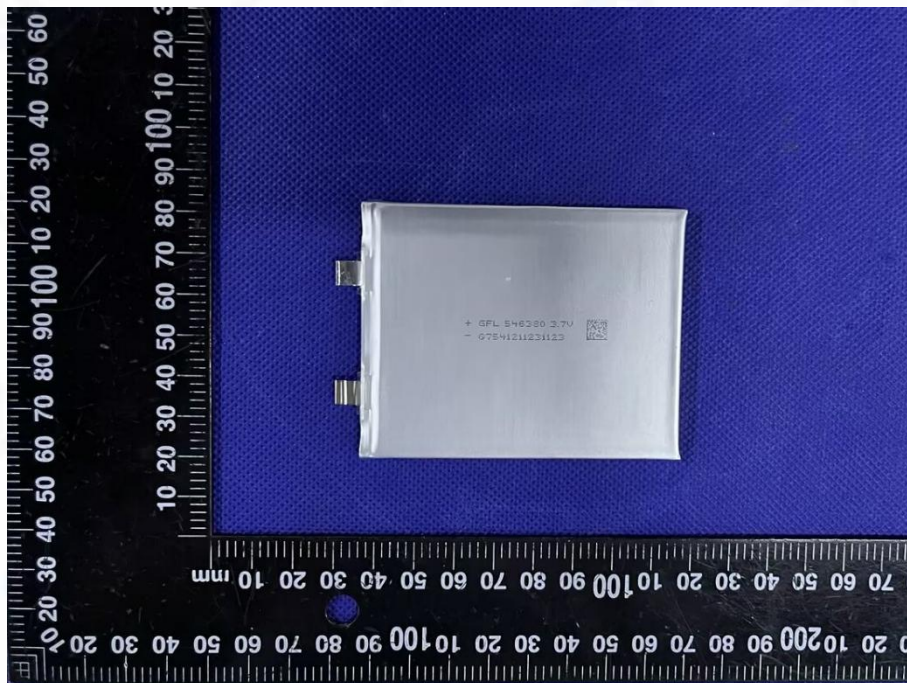


Figure 3 Front view of cell

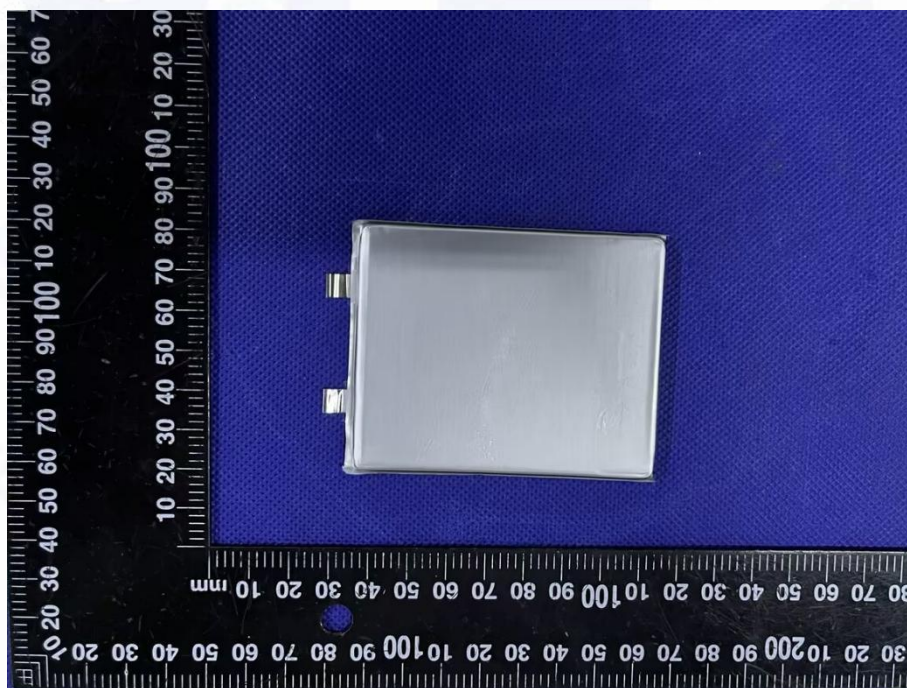


Figure 4 Back view of cell

Product: Rechargeable Li-polymer battery

Type Designation: C67

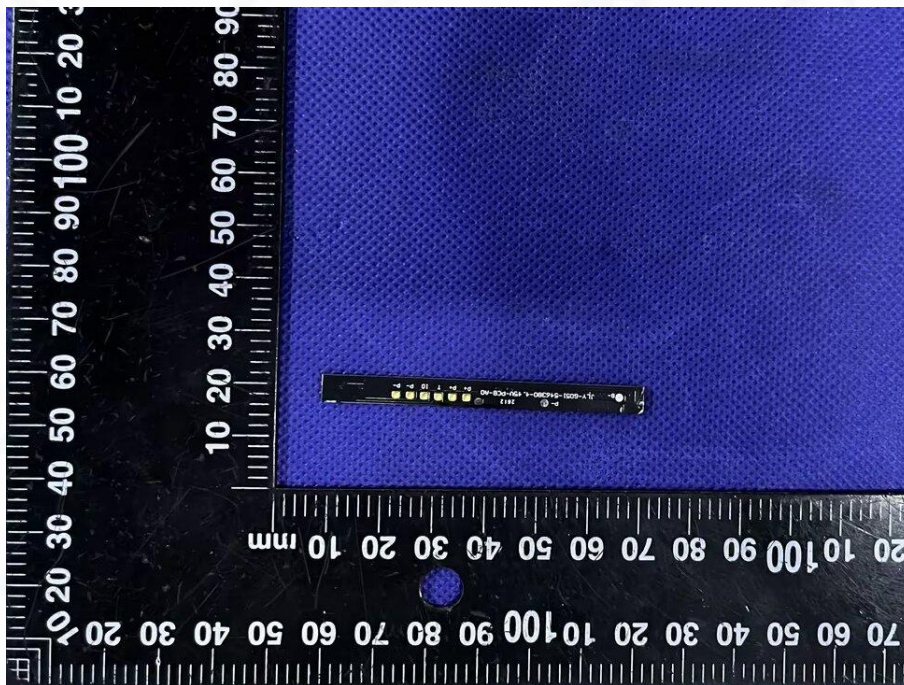


Figure 5 Front view of PCM

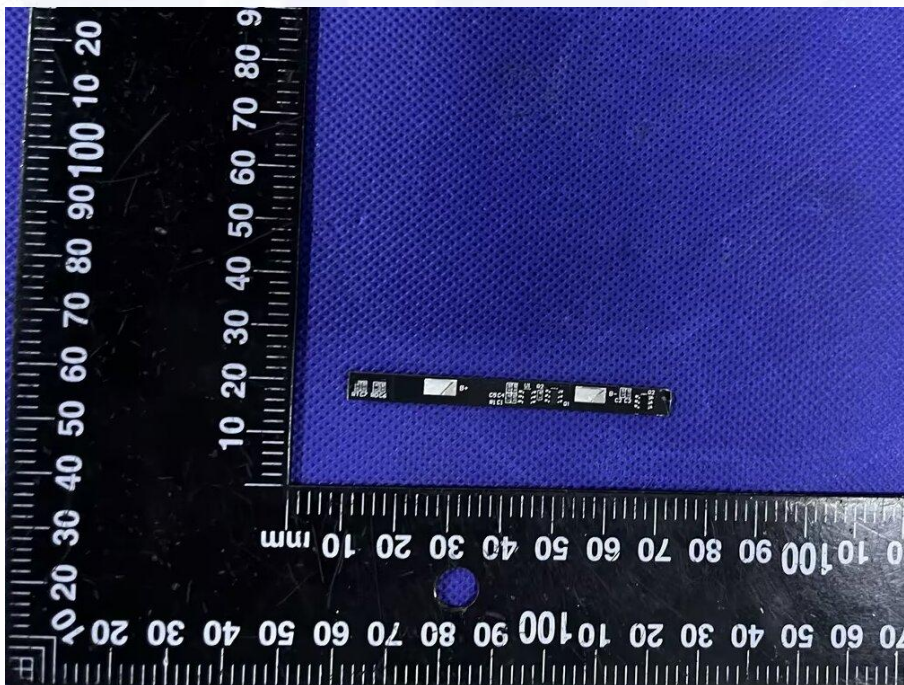


Figure 6 Back view of PCM