

TEST REPORT

Applicant/Manufacturer: Shenzhen Huafurui Technology Co., Ltd.
Address: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Report Number: 2601R49433E-RF-02

Test Standard (s)

ETSI EN 301 489-1 V2.2.3 (2019-11); ETSI EN 301 489-3 V2.3.2 (2023-01);
ETSI EN 301 489-17 V3.3.1 (2024-09); ETSI EN 301 489-19 V2.2.1 (2022-09);
ETSI EN 301 489-52 V1.3.1 (2024-11)

Sample Description

Product Type: Smartphone
Model No.: KINGKONG ES 5
Multiple Model(s) No.: N/A
Trade Mark: CUBOT
Date Received: 2026-03-08
Issue Date: 2026-05-29

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Ga La Liu

GaLa Liu
RF Engineer

Approved By:

Moon Liu
EMC Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
PERFORMANCE CRITERION	6
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
§7.1 - RADIATED EMISSIONS	12
TEST SYSTEM SETUP	12
EMI TEST RECEIVER AND SPECTRUM ANALYZER SETUP	13
TEST PROCEDURE	13
LEVEL & OVER LIMIT CALCULATION	14
TEST DATA	14
§7.1 - CONDUCTED EMISSIONS	19
EUT SETUP	19
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
LEVEL & OVER LIMIT CALCULATION	20
TEST DATA	20
§7.1 - HARMONIC CURRENT EMISSIONS	23
§7.1-VOLTAGE FLUCTUATION AND FLICKER.....	24
TEST SYSTEM SETUP	24
TEST STANDARD	24
TEST DATA AND SETUP PHOTO	25
§7.2 - RF ELECTROMAGNETIC FIELD (80 MHZ TO 6000 MHZ).....	27
TEST SYSTEM SETUP	27
TEST STANDARD	27
TEST PROCEDURE	28
TEST DATA AND SETUP PHOTO	28
§7.2 - ELECTROSTATIC DISCHARGE.....	30
TEST SYSTEM SETUP	30
TEST STANDARD	30
TEST PROCEDURE	31
TEST DATA AND SETUP PHOTO	31

§7.2 - ELECTRICAL FAST TRANSIENT IMMUNITY	37
TEST SYSTEM SETUP	37
TEST STANDARD	37
TEST PROCEDURE	38
TEST DATA AND SETUP PHOTO	38
§7.2 - RF COMMON MODE.....	40
TEST SETUP.....	40
TEST STANDARD	40
TEST PROCEDURE	40
TEST DATA AND SETUP PHOTO	41
§7.2 - VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST	42
TEST SETUP.....	42
TEST STANDARD	42
TEST PROCEDURE	42
TEST DATA AND SETUP PHOTO	43
§7.2 - SURGES, LINE TO LINE AND LINE TO GROUND	44
TEST SYSTEM SETUP	44
TEST STANDARD	44
TEST PROCEDURE	45
TEST DATA AND SETUP PHOTO	45
EXHIBIT A - EUT PHOTOGRAPHS.....	47
EXHIBIT B - TEST SETUP PHOTOGRAPHS	48
RADIATED EMISSIONS - FRONT VIEW (BELOW 1 GHz).....	48
RADIATED EMISSIONS - REAR VIEW (BELOW 1 GHz).....	48
RADIATED EMISSIONS - FRONT VIEW (ABOVE 1 GHz)	49
RADIATED EMISSIONS - REAR VIEW (ABOVE 1 GHz).....	49
CONDUCTED EMISSIONS - FRONT VIEW	50
CONDUCTED EMISSIONS - SIDE VIEW	50

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601R49433E-RF-02	Original Report	2026-05-29

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Voltage Range	DC 5/9V from adapter or DC 3.91V from Battery
Highest operating Frequency [#]	5825MHz (Provided by the applicant)
Sample serial number	3IUC-5 (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: TD-203G200170VF01 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 5V/3A, 9V/3A, 12V/2.5A, 15V/2A, 20V/1.5A PPS: 3.3V-16V/2A, 3.3V-11V/3A

Objective

This test report is in accordance with ETSI EN 301 489-1 V2.2.3 (2019-11), Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for Electromagnetic Compatibility. ETSI EN 301 489-3 V2.3.2 (2023-01), ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard for Electromagnetic Compatibility. ETSI EN 301 489-17 V3.3.1 (2024-09), ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband and Wideband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility. ETSI EN 301 489-19 V2.2.1 (2022-09), Electromagnetic Compatibility (EMC) standard for radio equipment and services; Part 19: Specific conditions for Receive Only Mobile Earth Stations (ROMES) operating in the 1,5 GHz band providing data communications and GNSS receivers operating in the RNSS band providing positioning, navigation, and timing data; Harmonised Standard for Electromagnetic Compatibility. ETSI EN 301 489-52 V1.3.1 (2024-11), ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 52: Specific conditions for Cellular Communication User Equipment (UE) radio and ancillary equipment; Harmonised Standard for ElectroMagnetic Compatibility.

The objective is to determine compliance with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-3 V2.3.2 (2023-01), ETSI EN 301 489-17 V3.3.1 (2024-09), ETSI EN 301 489-19 V2.2.1 (2022-09) and ETSI EN 301 489-52 V1.3.1 (2024-11).

Performance criterion**Performance criterion A**

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criterion C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Measurement Uncertainty

Item	Frequency Range		Expanded Measurement uncertainty
Conducted Emissions	AC Mains	150 kHz ~30MHz	3.72dB(k=2, 95% level of confidence)
Radiated Disturbance	30MHz~1000MHz	Horizontal	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz	Vertical	6.28dB(k=2, 95% level of confidence)
	1GHz~6GHz	/	6.18dB(k=2, 95% level of confidence)

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

Each test item follows test standards and with no deviation.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user)

Test Mode1: Charging+GNSS receiving+BT link+NFC+Wi-Fi link+DCS 1800M link

Test Mode2: Charging+GNSS receiving+BT link+NFC + Wi-Fi link+WCDMA(B1) link

Test Mode3: Charging+GNSS receiving+BT link+NFC +Wi-Fi link+LTE(B1) link

Test Mode4: Charging+GNSS receiving+BT link+NFC +Wi-Fi link+WCDMA(B1) idle

Note: All of the above test modes were evaluated, but for EMI test item, only the worst-case data was shown in the test report.

EUT exercise software

No exercise software was used.

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SAGEM	Router	SAGEM F@ST™ 2604 White	N/A
KEYSIGHT	Vector signal source	N5182B	MY53051503
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh
/	BT earphone	/	/

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-Shielding Un-Detachable AC Cable	1.2	Socket	Mains
Shielding Detachable USB Cable	1.0	EUT	Adapter
Un-Shielding un-Detachable earphone Cable	1.2	EUT	Earphone
Shielding Detachable RF Cable	8.0	Antenna	N5182B/CMW500

Block Diagram of Test Setup

Test Mode 1&2&3&4

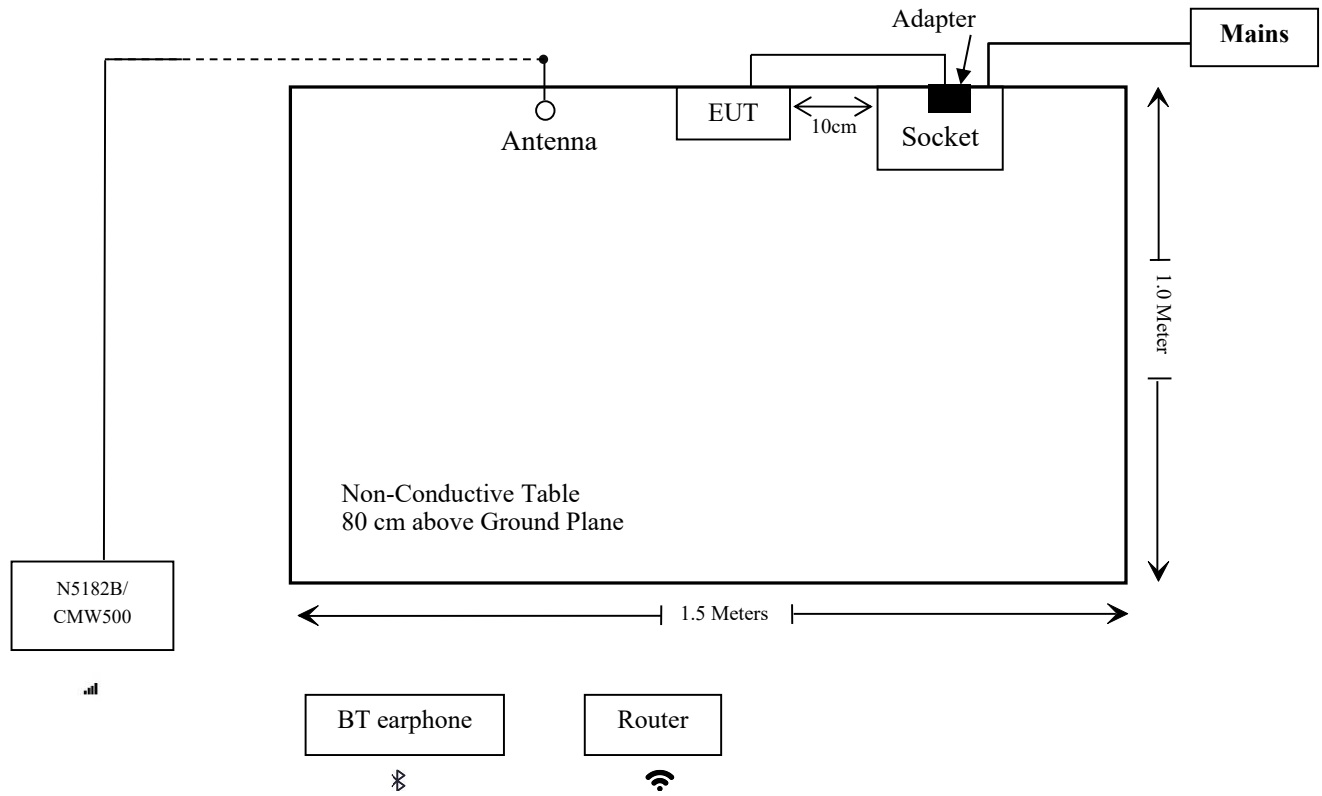

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
§7.1	Reference to clauses EN 301 489-1 §8.2 Enclosure port of ancillary equipment measured on a stand alone basis	Compliant
	Reference to clauses EN 301 489-1 §8.3 DC power input/output ports	Not Applicable
	Reference to clauses EN 301 489-1 §8.4 AC mains power input/output ports	Compliant
	Reference to clauses EN 301 489-1 §8.5 Harmonic current emissions (AC mains input port)	Compliant*
	Reference to clauses EN 301 489-1 §8.6 Voltage fluctuations and flicker (AC mains input port)	Compliant
	Reference to clauses EN 301 489-1 §8.7 Wired network ports	Not Applicable
§7.2	Reference to clauses EN 301 489-1 §9.2 Radio frequency electromagnetic field (80 MHz to 6000 MHz) (EN 61000-4-3)	Compliant
	Reference to clauses EN 301 489-1 §9.3 Electrostatic discharge (EN 61000-4-2)	Compliant
	Reference to clauses EN 301 489-1 §9.4 Fast transients, common mode (EN 61000-4-4)	Compliant
	Reference to clauses EN 301 489-1 §9.5 Radio frequency, common mode (EN 61000-4-6)	Compliant
	Reference to clauses EN 301 489-1 §9.6 Transients and surges in the vehicular environment (ISO 7637-2)	Not Applicable
	Reference to clauses EN 301 489-1 §9.7 Voltage dips and interruptions (EN 61000-4-11)	Compliant
	Reference to clauses EN 301 489-1 §9.8 Surges (EN 61000-4-5)	Compliant

Not Applicable: Please refer to Applicability overview tables in sections 7.1 and 7.2 of EN 301 489-1 requirements for Radio and ancillary equipment.

Compliant*: Equipment rated at 75w or below is exempt from testing.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMI					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2025/09/01	2026/08/31
Rohde & Schwarz	LISN	ENV216	101613	2025/09/18	2026/09/17
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2025/09/18	2026/09/17
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2025/09/18	2026/09/17
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Audix	EMI Test software	E3	191218 V9(c)	NCR	NCR
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13
EM TEST	Harmonics/flicker Analyzer	DPA 500N	V0939105176	2025/05/26	2026/05/25
EM TEST	AC Source	ACS500	303276	2026/05/19	2027/05/18
EM Test	DPA.Control test software	V5.0.3.0	Unknown	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
EMS					
TESEQ	ESD Generator	NSG 438	1476	2025/07/15	2026/07/14
Agilent	Signal Generator	8665B	3744A01675	2025/09/22	2026/09/21
AR	Power Amplifier	200W1000/M2	H1004497	NCR	NCR
AR	Amplifier	60S1G6	348712	NCR	NCR
AR	Antenna	ATL80M1G	348837	NCR	NCR
AR	Antenna	ATT700M12G	349411	NCR	NCR
BACL	Test Software	VEE PRO	V2.6 VXE	NCR	NCR
BK Precision	Sound Level Meter	735	0735 0087 309110025	2025/05/22	2026/05/21
EMTEST	Continuous Wave Simulator	CWS 500N1	V1026106837	2025/08/12	2026/08/11
WEINSCHEL	6dB Attenuator	50-6	R4376	NCR	NCR
Com-Power Corporation	CDN	CDN M325E	521145	2025/06/20	2026/06/19
EMTEST	Icd control	V 5.0.18	002440	NCR	NCR
EM TEST	AC Source	MV2616	V0939105173	2025/09/11	2026/09/10
THERMO	IMMUNITY TESTER	EMC PRO PLUS	1108237	2025/09/01	2026/08/31
EM TEST	Ultra Compact Generator	UCS 500-M6 B	V0616101357	2025/09/22	2026/09/21


Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§7.1 - RADIATED EMISSIONS


Test System Setup

B


Below 1GHz for Radiated Emissions

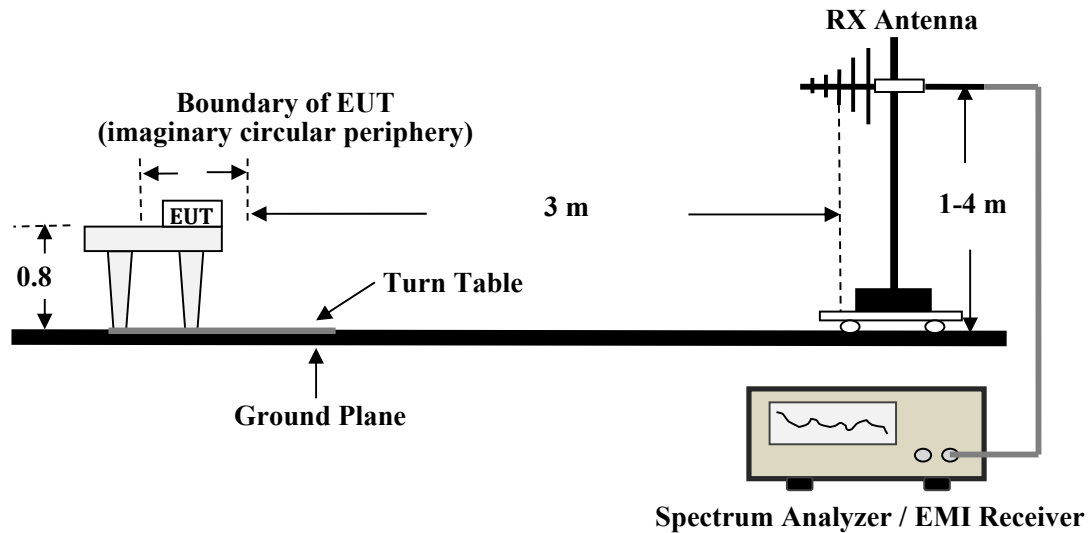

Above 1GHz for Radiated Emissions

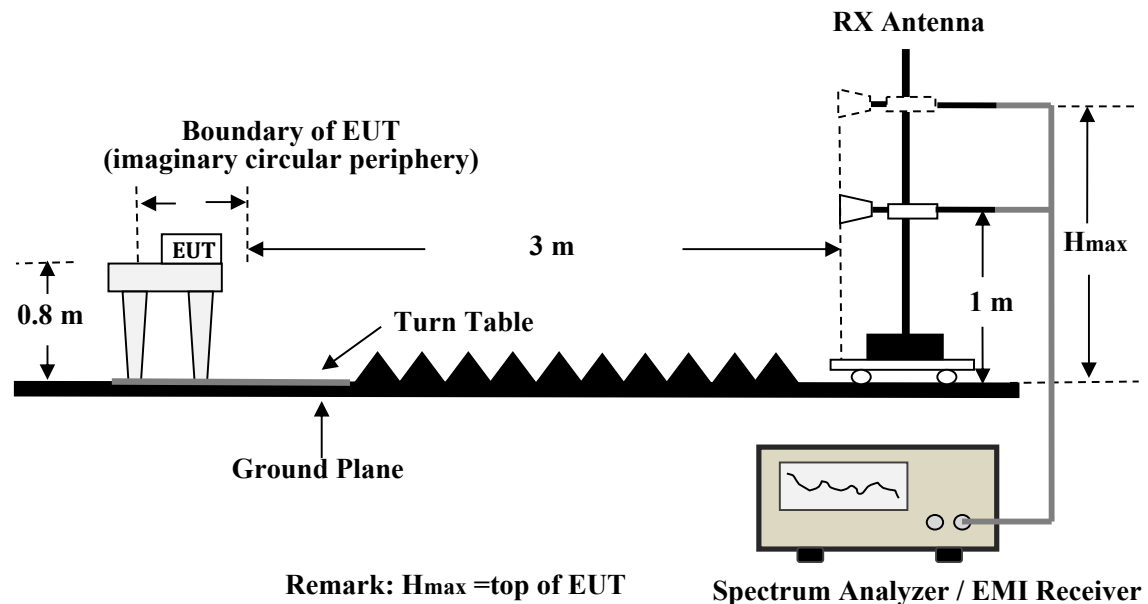

Radiated Emissions Setup Configuration

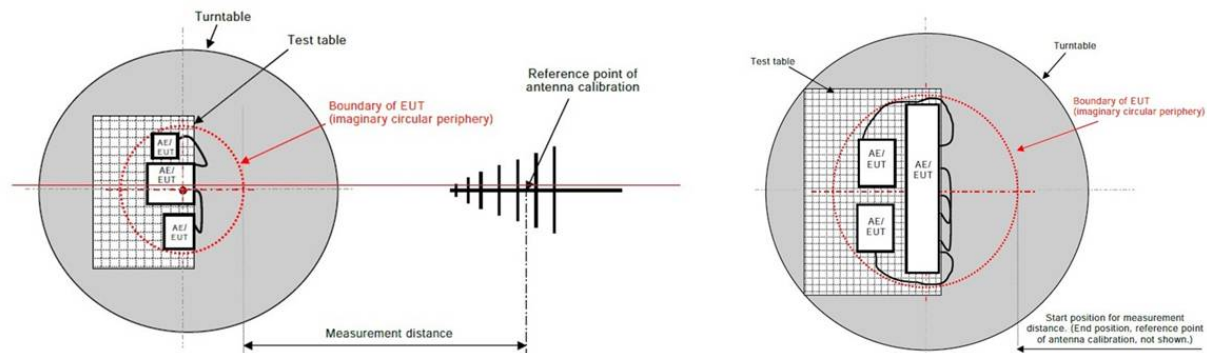

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the CISPR 16-1-4:2012, CISPR 16-2-3:2010. The limit was specified in EN 301 489-1.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver and Spectrum analyzer Setup

During the radiated emission test, the EMI test receiver and spectrum analyzer setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
1 GHz – 6 GHz	1 MHz	3 MHz	-	Peak
1 GHz – 6 GHz	1 MHz	10 Hz	-	Peak

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If emission level of the EUT in Peak measurement mode is 20dB lower than peak limit line (that means the emission level in Peak measurement mode complies with both Peak and average limit lines) then only Peak measurement result is reported .Otherwise, Emission in average measurement mode shall be measured, and reported for frequency range above 1GHz.

Level & Over Limit Calculation

The Level is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Read Level. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$


The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -6 dB means the emission is 6 dB below the limit for Class B. The equation for margin calculation is as follows:

$$\text{Over limit} = \text{Level} - \text{Limit}$$

Test Data**Environmental Conditions**

Temperature:	22.8~24.8 °C
Relative Humidity:	51~60 %
ATM Pressure:	99.9~101.2 kPa


The testing was performed by Anson Su on 2026-05-15 for below 1GHz and Wing K Ji on 2026-05-16 for above 1GHz.

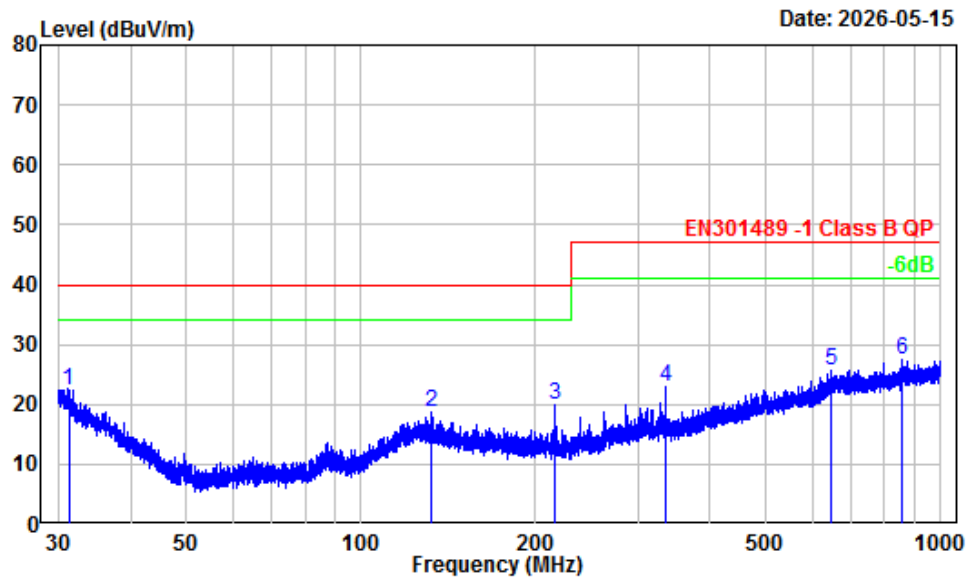*Test Mode2 (worst case)***30 MHz~1 GHz****Horizontal**

Site : Chamber A
Condition : 3m Horizontal
Project Number : 2601R49433E-RF
Test Mode : Mode 2
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq		Factor	Read	Level	Limit	Over	Remark
	MHz			dBuV	dBuV/m	dBuV/m	Limit	
1	31.29	-6.55		28.86	22.31	40.00	-17.69	Peak
2	131.82	-11.67		30.32	18.65	40.00	-21.35	Peak
3	215.27	-14.55		34.43	19.88	40.00	-20.12	Peak
4	334.86	-10.93		34.00	23.07	47.00	-23.93	Peak
5	647.67	-3.71		29.38	25.67	47.00	-21.33	Peak
6	857.02	-2.18		29.67	27.49	47.00	-19.51	Peak

Vertical

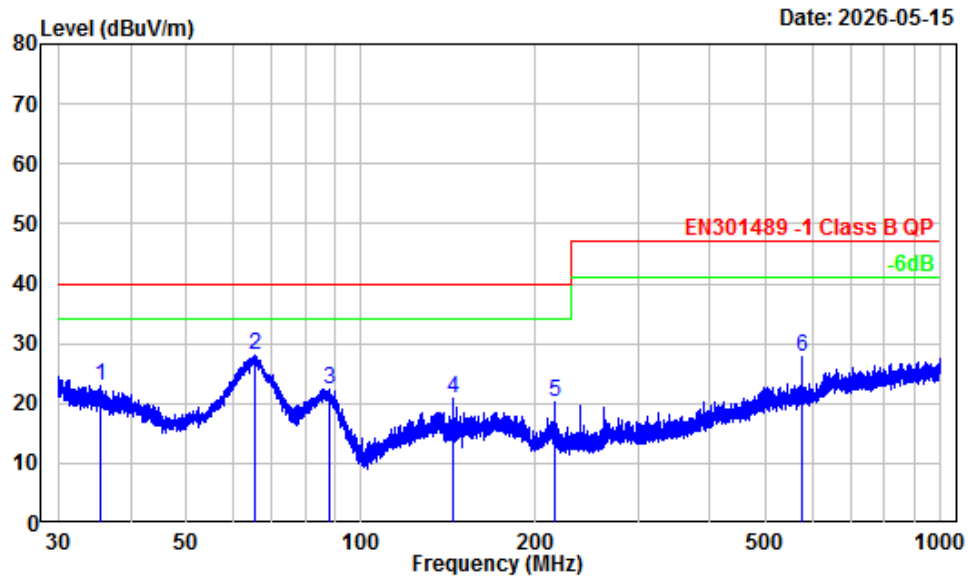


Site : Chamber A
Condition : 3m Vertical
Project Number : 2601R49433E-RF
Test Mode : Mode 2
Detector: Peak RBW/VBW: 100/300kHz
Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.50	-9.13	32.12	22.99	40.00	-17.01	Peak
2	65.63	-18.03	46.15	28.12	40.00	-11.88	Peak
3	88.34	-18.25	40.56	22.31	40.00	-17.69	Peak
4	144.33	-12.52	33.48	20.96	40.00	-19.04	Peak
5	215.27	-14.55	34.70	20.15	40.00	-19.85	Peak
6	577.66	-5.79	33.62	27.83	47.00	-19.17	Peak

1-6 GHz


Horizontal

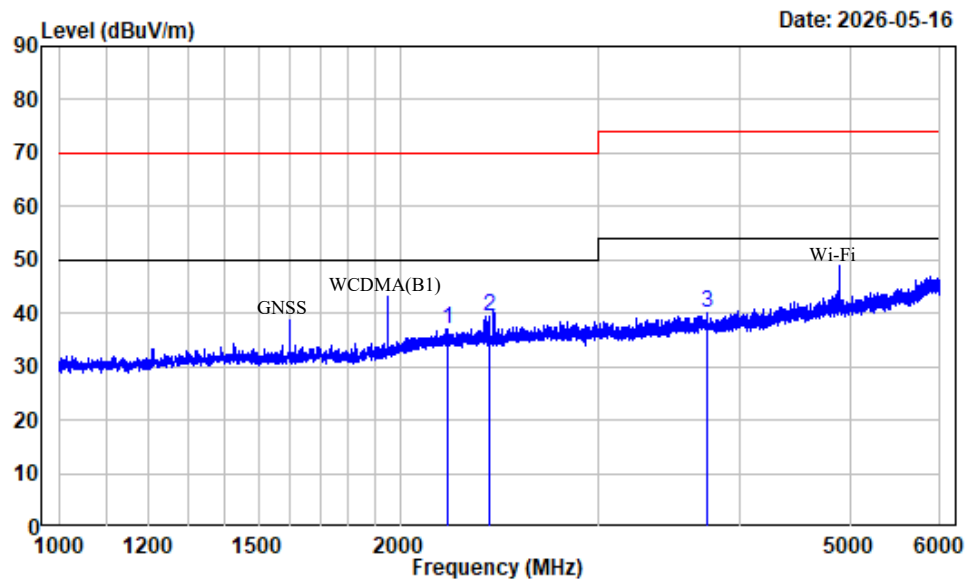

Site : chamber B
Condition : Horizontal
Project Number : 2601R49433E-RF
Test mode : Mode2
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

Freq Factor		Read Level		Limit	Over	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2206.250	-10.39	47.57	37.18	70.00	-32.82 Peak
2	2398.125	-10.51	50.07	39.56	70.00	-30.44 Peak
3	3738.750	-8.71	48.88	40.17	74.00	-33.83 Peak

Vertical

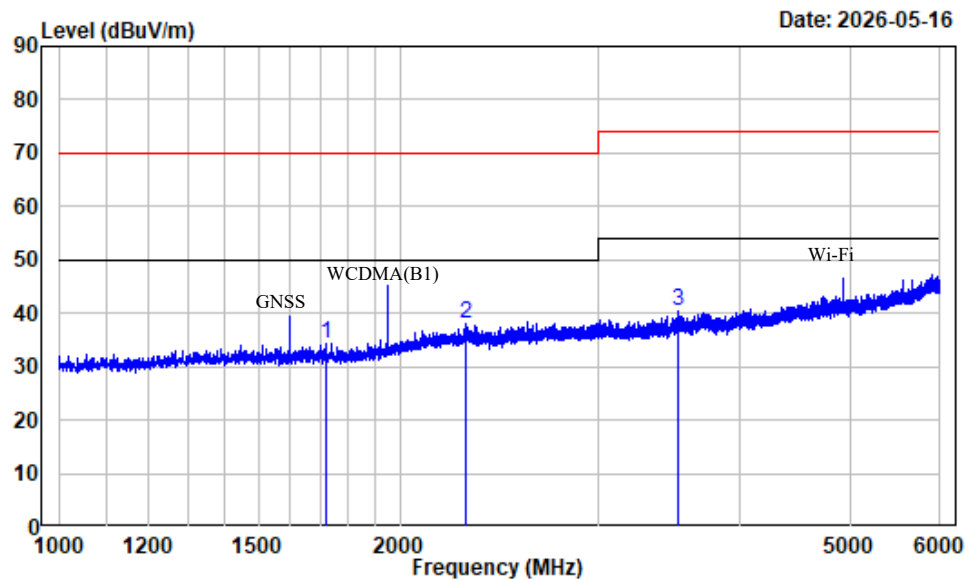


Site : chamber B
Condition : Vertical
Project Number : 2601R49433E-RF
Test mode : Mode2
Tester : Wing K Ji
Spectrum setting: Peak reading: RBW:1MHz VBW:3MHz Detector:Peak

Freq Factor		Read Level	Level	Limit Line	Over Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	1720.000	-13.61	47.82	34.21	70.00	-35.79 Peak
2	2286.875	-10.41	48.41	38.00	70.00	-32.00 Peak
3	3520.000	-8.94	49.19	40.25	74.00	-33.75 Peak

§7.1 - CONDUCTED EMISSIONS

EUT Setup

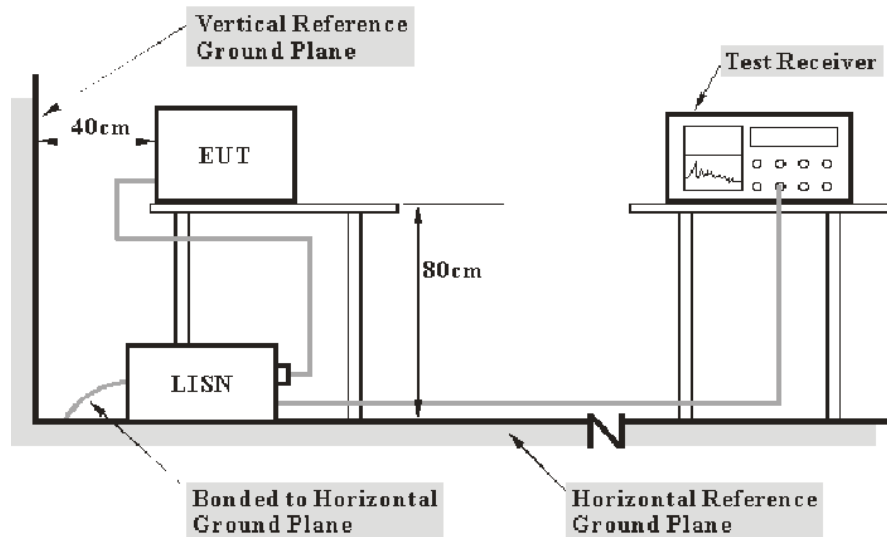

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per EN 301 489-1 measurement procedures. The specification used was with the EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Level & Over Limit Calculation

The Level is calculated by adding the LISN Factor, Cable Loss and the Read Level. The basic equation is as follows:

$$\text{Level (dBuV)} = \text{Read Level (dBuV)} + \text{LISN Factor} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit.


$$\text{Over Limit (dB)} = \text{Level (dBuV)} - \text{Limit Line (dBuV)}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data**Environmental Conditions**

Temperature:	24.7 °C
Relative Humidity:	63 %
ATM Pressure:	99.9 kPa

The testing was performed by Alex Yan on 2026-05-14.

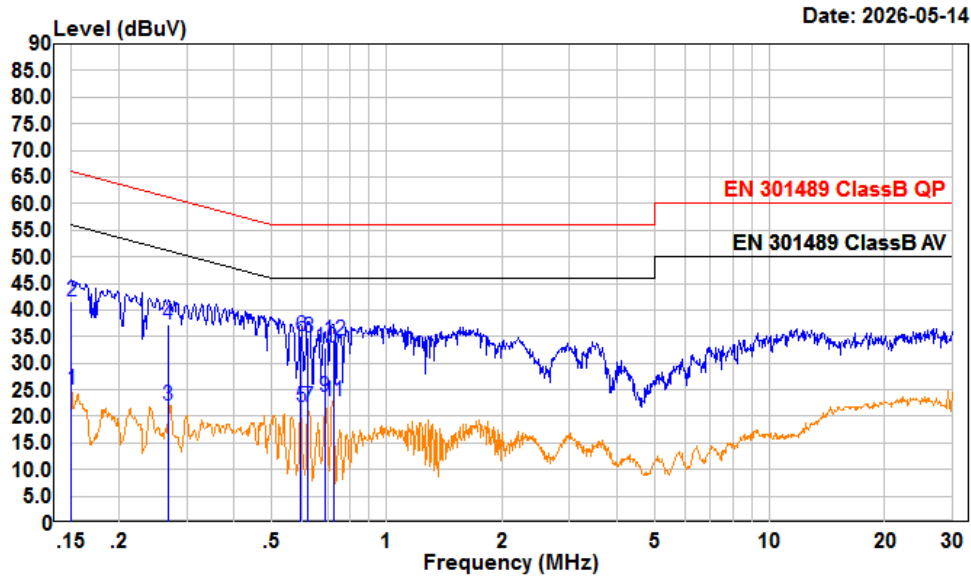*Test Mode4 (worst case)***AC 230V/50 Hz, Line**

Condition: Line


Project : 2601R49433E-RF

test Mode: Mode4

tester : Alex Yan Setting:RBW:9kHz

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	5.07	24.89	9.80	10.02	56.00	-31.11	Average
2	0.150	21.76	41.58	9.80	10.02	66.00	-24.42	QP
3	0.269	2.29	22.12	9.80	10.03	51.16	-29.04	Average
4	0.269	17.53	37.36	9.80	10.03	61.16	-23.80	QP
5	0.597	1.90	21.74	9.80	10.04	46.00	-24.26	Average
6	0.597	15.36	35.20	9.80	10.04	56.00	-20.80	QP
7	0.624	2.00	21.84	9.80	10.04	46.00	-24.16	Average
8	0.624	14.88	34.72	9.80	10.04	56.00	-21.28	QP
9	0.689	3.84	23.68	9.80	10.04	46.00	-22.32	Average
10	0.689	13.12	32.96	9.80	10.04	56.00	-23.04	QP
11	0.725	3.08	22.92	9.80	10.04	46.00	-23.08	Average
12	0.725	14.55	34.39	9.80	10.04	56.00	-21.61	QP

AC 230V/50 Hz, Neutral

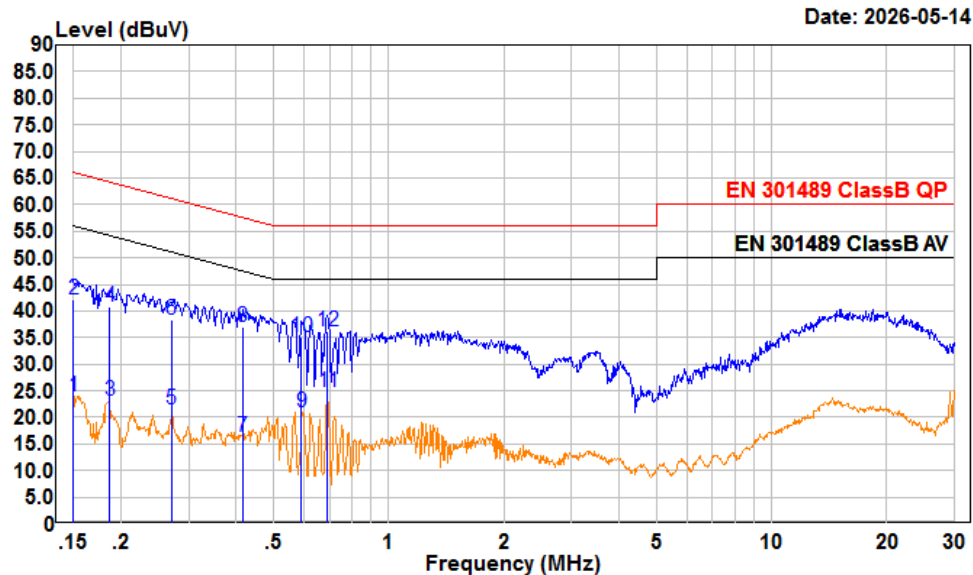

Condition: neutral

Project : 2601R49433E-RF

test Mode: Mode4

tester : Alex Yan Setting:RBW:9kHz


	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.150	4.19	24.01	9.80	10.02	56.00	-31.99	Average
2	0.150	22.24	42.06	9.80	10.02	66.00	-23.94	QP
3	0.187	3.39	23.22	9.80	10.03	54.18	-30.96	Average
4	0.187	21.03	40.86	9.80	10.03	64.18	-23.32	QP
5	0.270	1.53	21.36	9.80	10.03	51.11	-29.75	Average
6	0.270	18.65	38.48	9.80	10.03	61.11	-22.63	QP
7	0.415	-3.60	16.23	9.80	10.03	47.55	-31.32	Average
8	0.415	17.29	37.12	9.80	10.03	57.55	-20.43	QP
9	0.591	1.04	20.88	9.80	10.04	46.00	-25.12	Average
10	0.591	15.12	34.96	9.80	10.04	56.00	-21.04	QP
11	0.693	4.95	24.79	9.80	10.04	46.00	-21.21	Average
12	0.693	16.37	36.21	9.80	10.04	56.00	-19.79	QP

§7.1 - HARMONIC CURRENT EMISSIONS

According to EN IEC 61000-3-2 (2019) + A1(2021) section 7: Equipment with a rated power of 75 Watt or less, other than lighting equipment, are not included in this standard.

§7.1-VOLTAGE FLUCTUATION AND FLICKER

Test System Setup

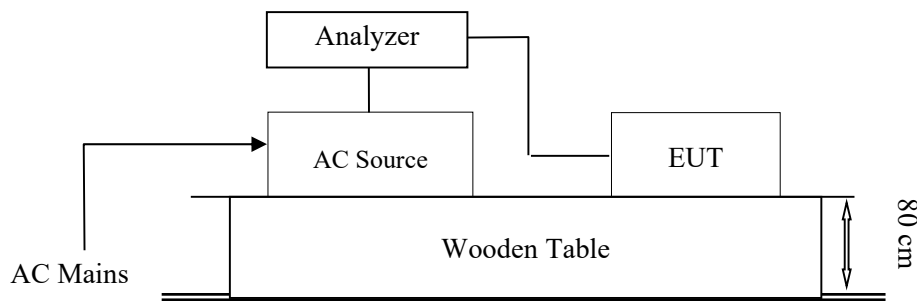

Test Standard

EN 61000-3-3 (2013) + A2(2021)

Flicker Test Limits:

The limits shall be applicable to voltage fluctuations and flicker at the supply terminals of the equipment under test, measured or calculated according to clause 4 under test conditions described in clause 6 and annex A. Tests made to prove compliance with the limits are considered to be type tests.

The following limits apply:

- the value of Pst shall not be greater than 1,0;
- the value of Plt shall not be greater than 0,65;
- the value of d(t) during a voltage change shall not exceed 3,3 % for more than 500 ms;
- the relative steady-state voltage change, dc, shall not exceed 3,3 %;
- the maximum relative voltage change dmax, shall not exceed
 - a) 4 % without additional conditions;
 - b) 6 % for equipment which is:
 - switched manually, or
 - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

Note: The cycling frequency will be further limited by the Pst and Plt limit. For example: a dmax of 6 % producing a rectangular voltage change characteristic twice per hour will give a Plt of about 0,65.

c) 7 % for equipment which is

- attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or
- switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

In the case of equipment having several separately controlled circuits in accordance with 6.6, limits b) and c) shall apply only if there is delayed or manual restart after a power supply interruption; for all equipment with automatic switching which is energized immediately on restoration of supply after a power supply interruption, limits a) shall apply; for all equipment with manual switching, limits b) or c) shall apply depending on the rate of switching. Pst and Plt requirements shall not be applied to voltage changes caused by manual switching. The limits shall not be applied to voltage changes associated with emergency switching or emergency interruptions.

Test Data and Setup Photo

Environmental Conditions

Temperature:	26.2 °C
Relative Humidity:	66 %
ATM Pressure:	100.1 kPa

Date of test:	11:06 25 May 2026
Tester:	Jason Li
Standard used:	EN/IEC 61000-3-3 Flicker
Short time (Pst):	10 min
Observation time:	120 min (12 Flicker measurements)
Flicker meter:	230V / 50Hz
Flicker Impedance:	Zref (IEC 60725)
Model:	KINGKONG ES 5
Test mode	Test Mode4 (worst case)

Maximum Flicker results


	EUT values	Limit	Result
Pst	0.028	1.00	Pass
Plt	0.028	0.65	Pass
dc [%]	0.015	3.30	Pass
dmax [%]	0.064	4.00	Pass
dt [s]	0.000	0.50	Pass



Test Setup Photo

§7.2 - RF ELECTROMAGNETIC FIELD (80 MHz to 6000 MHz)

Test System Setup

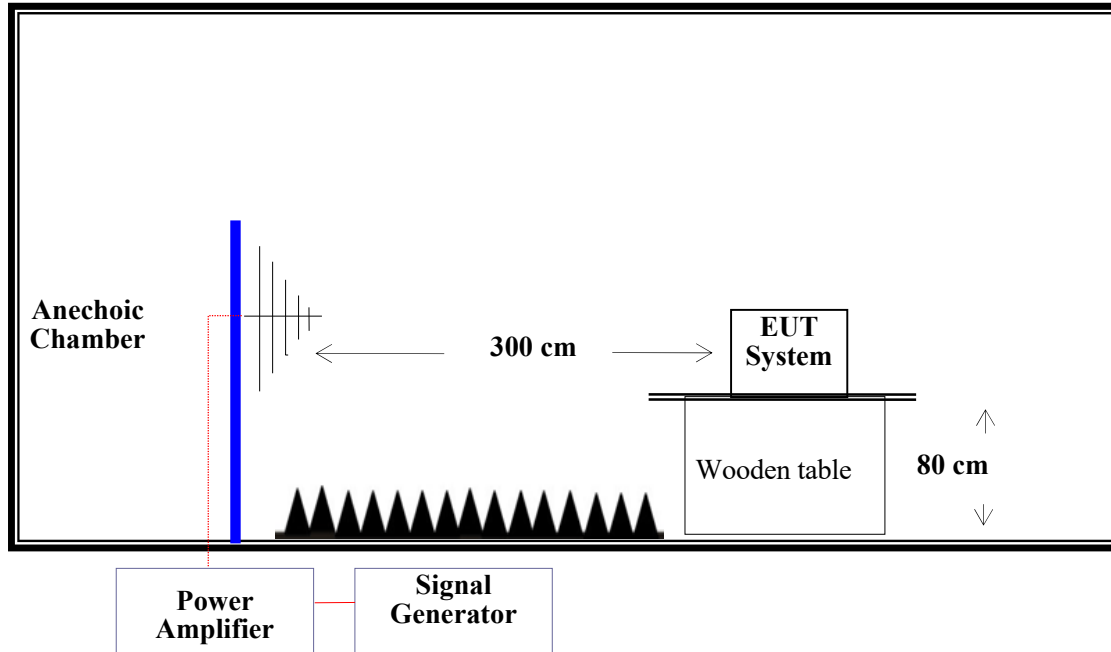

Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-3:2006+A1:2008+A2:2010

Test Level

Level	Field Strength (V/m)
1.	1
2.	3
3.	10
X.	Special

Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarizations of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera, Antenna, N5182B ,CMW500,Router and BT earphone are used to monitor the EUT and an artificial ear and sound level meter were used to monitor the sound pressure level.

All the scanning conditions are as follows:

Condition of Test	Remarks
-----	-----
1. Field Strength	3 V/m (Test Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 - 6000 MHz
4. Frequency step	1%
5. Dwell Time	1 Sec.

Test Data and Setup Photo

Environmental Conditions

Temperature:	26.4 °C
Relative Humidity:	48 %
ATM Pressure:	100.3 kPa

The testing was performed by Jason Li on 2026-05-16.

Test Mode 1&2&3&4

Modulation: Amplitude 80%, 1 kHz sine wave

Frequency Range (MHz)	Front Side (3 V/m)		Rear Side (3 V/m)		Left Side (3 V/m)		Right Side (3 V/m)	
	VERT	HORI	VERT	HORI	VERT	HORI	VERT	HORI
80-6000	A	A	A	A	A	A	A	A

EUT Operation Mode(GNSS&NFC)

Note: "A" stand for, during test, operate as intended No loss function, and after test, operate as intended.

EUT Operation Mode (BT&WIFI)

Note: "A" stand for, during test, operate as intended No loss function, no degradation of performance, no unintentional transmissions. and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

EUT Operation Mode (DCS)

Note: “A” stand for, the uplink/downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check). The RXQUAL of the downlink is not exceeding the value of three, measured during each individual exposure in the test sequence. Or during and after the test, the apparatus continue to operate as intended. No degradation of performance or loss of function is allowed below a permissible performance level

EUT Operation Mode (WCDMA)

Note: “A” stand for, In the data transfer mode, the BER (as referred in TS 134 109 [8]) is used, it shall not exceed 0,001 during the test sequence, in the speech mode, the performance criteria shall be that the up link and downlink speech output levels shall be at least 35 dB less than the recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz. in idle mode, the transmitter is not unintentionally operate.

EUT Operation Mode (LTE)


Note: “A” stand for, In the data transfer mode, the performance criteria shall be that the throughput shall be $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in annex C in TS 136 101 [13] with parameters specified in tables 7.3.1-1 and 7.3.1-2 in TS 136 101 [13] during the test sequence.



Test Setup Photo

§7.2 - ELECTROSTATIC DISCHARGE

Test System Setup

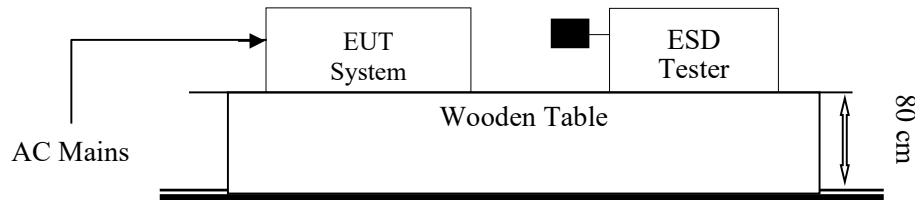

Remark: ■ is the tip of the electrode

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.6 by 0.8-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-2:2009

Test Level

Level	Test Voltage Contact Discharge (±kV)	Test Voltage Air Discharge (±kV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

Performance criterion: B

Test Procedure**Air Discharge:**

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Contact Discharge:

All the procedure shall be same as Section 8.3.1 of EN 61000-4-2, except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

Indirect discharge for vertical coupling plane

At least 20 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

Test Data and Setup Photo**Environmental Conditions**

Temperature:	26.5 °C
Relative Humidity:	49 %
ATM Pressure:	100.3 kPa

The testing was performed by Jason Li on 2026-05-16.

*Test Mode 1&2&3&4***Table 1: Electrostatic Discharge Immunity (Air Discharge)**

IEC 61000-4-2 Test Points		Test Levels							
		-2 kV	+2 kV	-4 kV	+4 kV	-8 kV	+8 kV	-15 kV	+15 kV
Front	(4 points)	A	A	A	A	A	A	/	/
Back	(2 points)	A	A	A	A	A	A	/	/
Left	(1 point)	A	A	A	A	A	A	/	/
Top	(1 point)	A	A	A	A	A	A	/	/

Table 2: Electrostatic Discharge Immunity (Direct Contact)

IEC 61000-4-2 Test Points		Test Levels							
		-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Left	(1 point)	A	A	A	A	/	/	/	/
Right	(2 points)	A	A	A	A	/	/	/	/

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

IEC 61000-4-2 Test Points		Test Levels							
		-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Front Side		A	A	A	A	/	/	/	/
Back Side		A	A	A	A	/	/	/	/
Left Side		A	A	A	A	/	/	/	/
Right Side		A	A	A	A	/	/	/	/
Top Side		A	A	A	A	/	/	/	/
Bottom Side		A	A	A	A	/	/	/	/

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

IEC 61000-4-2 Test Points		Test Levels							
		-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Front Side		A	A	A	A	/	/	/	/
Back Side		A	A	A	A	/	/	/	/
Left Side		A	A	A	A	/	/	/	/
Right Side		A	A	A	A	/	/	/	/



Note: ➡ represents air discharge, ➡ represents direct contact

Note: The list is only for photos of the location where the discharge can be made, the others not listed are without discharge points, or not the EUT part.

*For Adapter***Table 1: Electrostatic Discharge Immunity (Air Discharge)**

IEC 61000-4-2 Test Points	Test Levels							
	-2 kV	+2 kV	-4 kV	+4 kV	-8 kV	+8 kV	-15 kV	+15 kV
Back (1 points)	A	A	A	A	A	A	/	/

Table 2: Electrostatic Discharge Immunity (Direct Contact)

IEC 61000-4-2 Test Points	Test Levels							
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
/	/		/	/	/	/	/	/

Table 3: Electrostatic Discharge Immunity (Indirect Contact HCP)

IEC 61000-4-2 Test Points	Test Levels							
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Front Side	A	A	A	A	/	/	/	/
Back Side	A	A	A	A	/	/	/	/
Left Side	A	A	A	A	/	/	/	/
Right Side	A	A	A	A	/	/	/	/
Top Side	A	A	A	A	/	/	/	/
Bottom Side	A	A	A	A	/	/	/	/

Table 4: Electrostatic Discharge Immunity (Indirect Contact VCP)

IEC 61000-4-2 Test Points	Test Levels							
	-2 kV	+2 kV	-4 kV	+4 kV	-6 kV	+6 kV	-8 kV	+8 kV
Front Side	A	A	A	A	/	/	/	/
Back Side	A	A	A	A	/	/	/	/
Left Side	A	A	A	A	/	/	/	/
Right Side	A	A	A	A	/	/	/	/



Note: ➡ represents air discharge, ➡ represents direct contact

Note: The list is only for photos of the location where the discharge can be made, the others not listed are without discharge points, or not the EUT part.




stand-alone



Test Setup Photos

§7.2 - ELECTRICAL FAST TRANSIENT IMMUNITY

Test System Setup

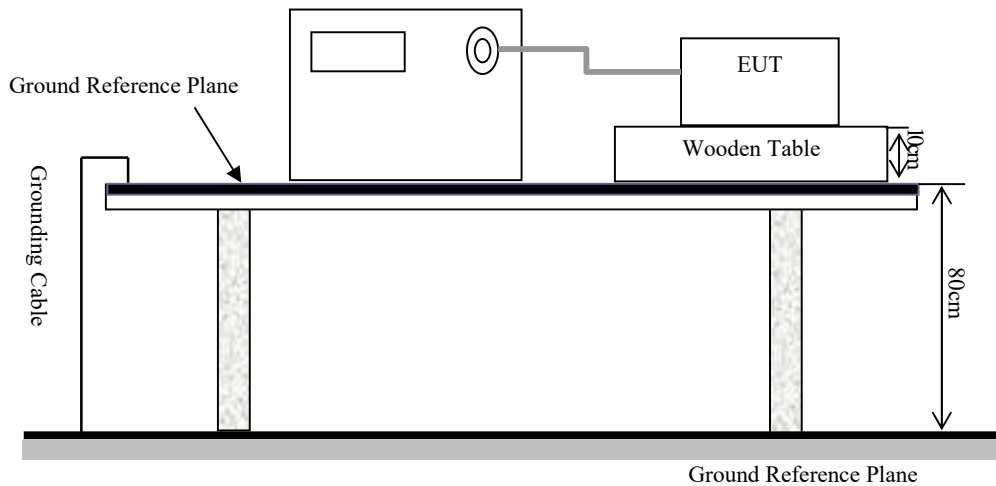

Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-4: 2012

Test Level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special

Test instrument setting

Port under test	Pulse repetition rate	Burst duration/ Burst period	Duration of test port
AC power port DC power port Wired network ports (excluding xDSL)	5 kHz	15 ms/300 ms	1 minute
xDSL	100 kHz	0.75 ms/300 ms	1 minute

Performance Criterion: B

Test Procedure

The EUT was arranged for Power Line Coupling and for I/O Line Coupling through a capacitive clamp, where applicable. (Note: The I/O coupling test using a capacitive clamp is performed on the I/O interface cables that are longer in length than 3 meters.) A metal ground plane 2.4 meter by 2.0 meter was placed between the floor and the table and is connected to the earth by a 2.0 meter ground rod. The ground rod is connected to the test facility's electrical earth.

Test Data and Setup Photo

Environmental Conditions

Temperature:	27.5 °C
Relative Humidity:	56 %
ATM Pressure:	100.3 kPa

The testing was performed by Jason Li on 2026-05-16.

Test Mode 1&2&3&4


EN 61000-4-4 Test Points		Test Levels (kV)							
		+0.5	-0.5	+1.0	-1.0	+2.0	-2.0	+4.0	-4.0
AC Mains Power Input Ports	L1	/	/	A	A	/	/	/	/
	N	/	/	A	A	/	/	/	/
	PE	/	/	/	/	/	/	/	/
	L1/N	/	/	A	A	/	/	/	/
	L1/PE	/	/	/	/	/	/	/	/
	N/PE	/	/	/	/	/	/	/	/
	L1/N/PE	/	/	/	/	/	/	/	/
Signal Port	/	/	/	/	/	/	/	/	/



Test Setup Photo

§7.2 - RF COMMON MODE

Test Setup

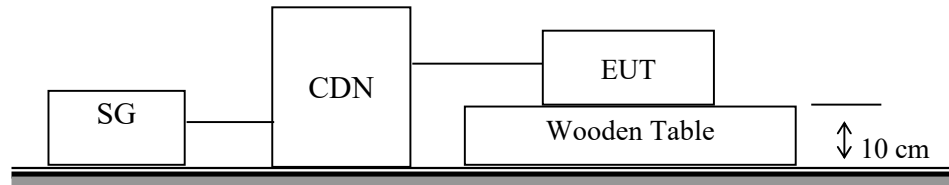

Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) /EN 61000-4-6: 2014

Test Level

Level	Voltage Level (r.m.s.) (U ₀)
1	1
2	3
3	10
X	Special

Performance Criterion: A

Note: “A” stand for, during test, operate as intended no loss function, no degradation of performance, no unintentional retransmissions and after test, no degradation of performance, no loss of function, no loss of stored data or user programmable functions.

Test Procedure

- 1) Let the EUT work in test mode and test it.
- 2) The EUT are placed on an insulating support 0.1 m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 3) The disturbance signal described below is injected to EUT through CDN.
- 4) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 5) The frequency range is swept from 150 kHz to 80 MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1 kHz sine wave.
- 6) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 7) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

Test Data and Setup Photo**Environmental Conditions**

Temperature:	26.5 °C
Relative Humidity:	49 %
ATM Pressure:	100.3 kPa

The testing was performed by Jason Li on 2026-05-16.

Test Mode 1&2&3&4


Table 1: AC mains power input port

Frequency range: 150 kHz to 80 MHz

Modulation: Amplitude 80%, 1 kHz sine wave

Test level: 3V r.m.s.


Level	Voltage Level (r.m.s.) U_0	Pass	Fail
1	1	/	/
2	3	A	/
3	10	/	/
X	Special	/	/

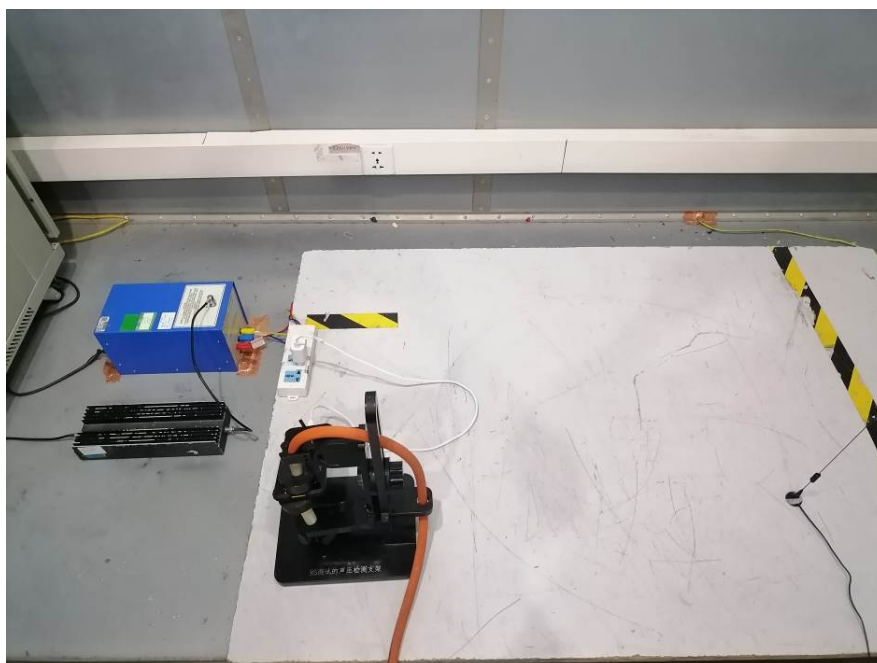

Test Setup Photo

§7.2 - VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST

Test Setup

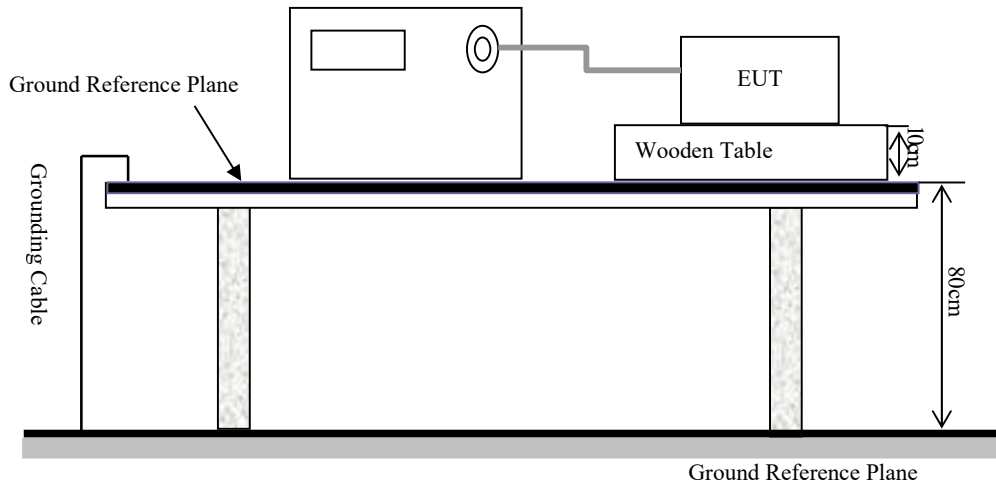

Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-11:2004

Test Level

Test Level	Voltage dip and short interruptions (% Residual Voltage)	Duration (in period)	Performance criterion:
1	0	0.5	B
2	0	1	B
3	70	25	C
4	0	250	C

Test Procedure

- 1) The interruption is introduced at selected phase angles with specified duration.
- 2) Record any degradation of performance.

Test Data and Setup Photo**Environmental Conditions**


Temperature:	27.5 °C
Relative Humidity:	56 %
ATM Pressure:	100.3 kPa

The testing was performed by Jason Li on 2026-05-16.

Test Mode 1&2&3&4

Level	Voltage dip and short interruptions (% Residual Voltage)	Periods	Phase Angle	N	Result
1	0	0.5	0/180	3	A
2	0	1	0/180	3	A
3	70	25	0/180	3	A
4	0	250	0/180	3	B


Note: B means charging interrupt and restore automatically.

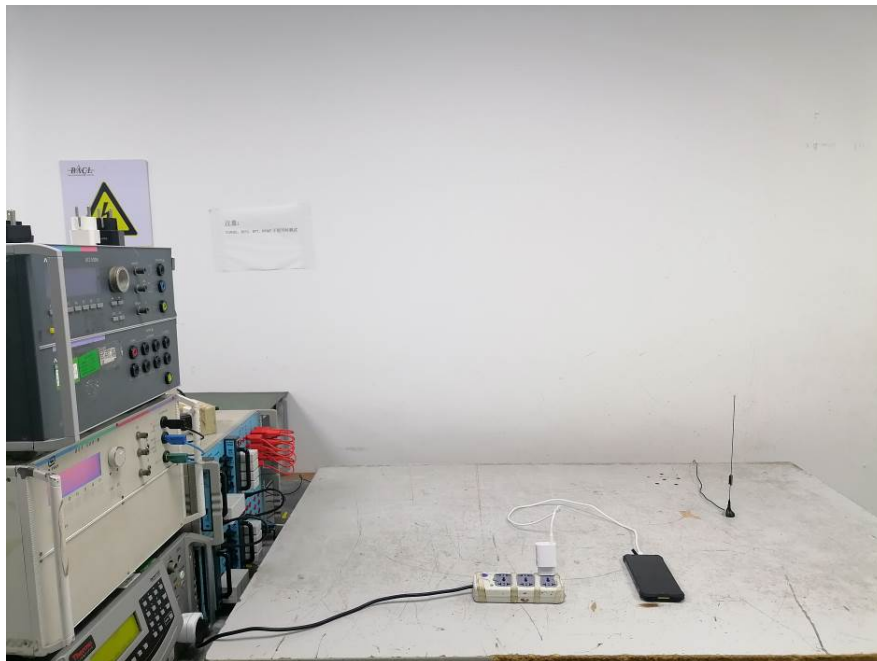

Test Setup Photo

§7.2 - SURGES, LINE TO LINE AND LINE TO GROUND

Test System Setup

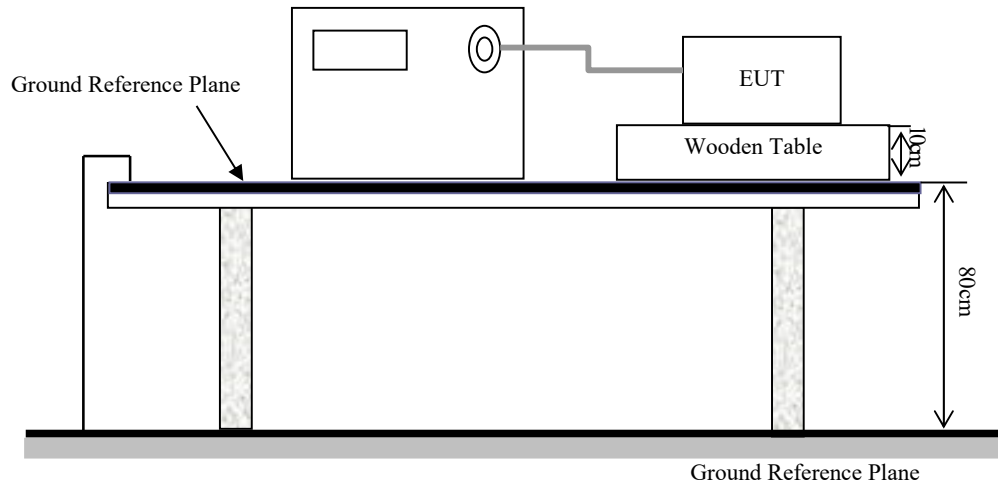

Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-5: 2014+A1:2017

Test Level

Level	Open Circuit Output Test Voltage $\pm 10\%$	Performance Criterion	
		AC Mains	Signal Port
1	0.5 kV	B	C
2	1 kV	B	C
3	2 kV	B	C
4	4 kV	B	C
X	Special	/	/

Test Procedure

- 1) For line to line coupling mode, provide a 1.2/50 μ s voltage surge (at open-circuit condition) and a 8/20 μ s current surge into a short circuit.
- 2) For telecommunication port, provide a 10/700 μ s voltage surge (at open-circuit condition) and a 5/320 μ s current surge into a short circuit.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

Test Data and Setup Photo

Environmental Conditions

Temperature:	27.5 °C
Relative Humidity:	56 %
ATM Pressure:	100.3 kPa

The testing was performed by Jason Li on 2026-05-16.

Test Mode 1&2&3&4

Table 1: AC mains power input port

Level	Voltage	Poll	Path	Pass	Fail
1	0.5 kV	\pm	L-N	A	/
2	1 kV	\pm	L-N	A	/
3	2 kV	\pm	/	/	/
4	4 kV	\pm	/	/	/




Test Setup Photo

EXHIBIT A - EUT PHOTOGRAPHS


Please refer to the report number is 2601R49433E-EUT.

EXHIBIT B - TEST SETUP PHOTOGRAPHS


Radiated Emissions - Front View (Below 1 GHz)

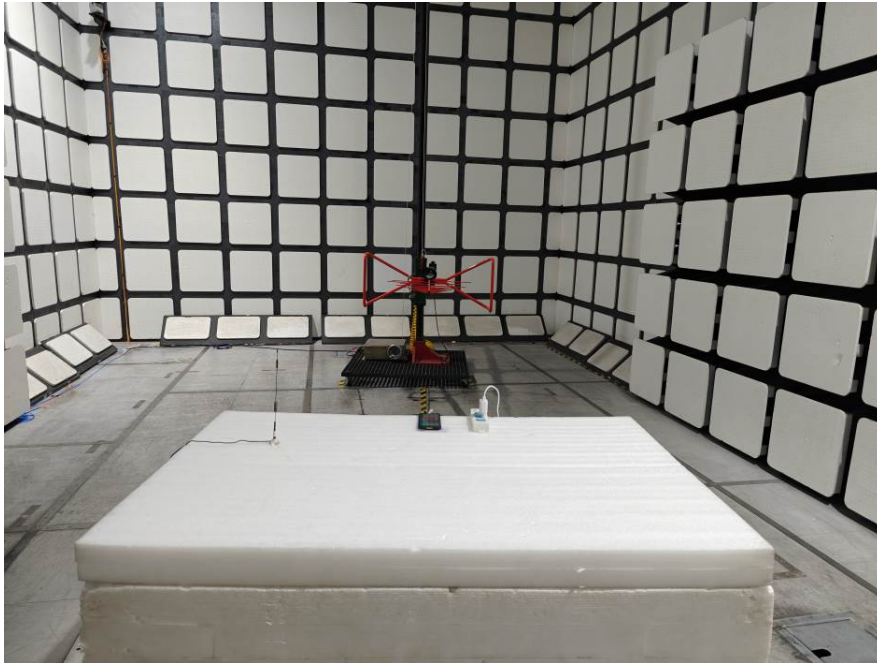


Radiated Emissions - Rear View (Below 1 GHz)

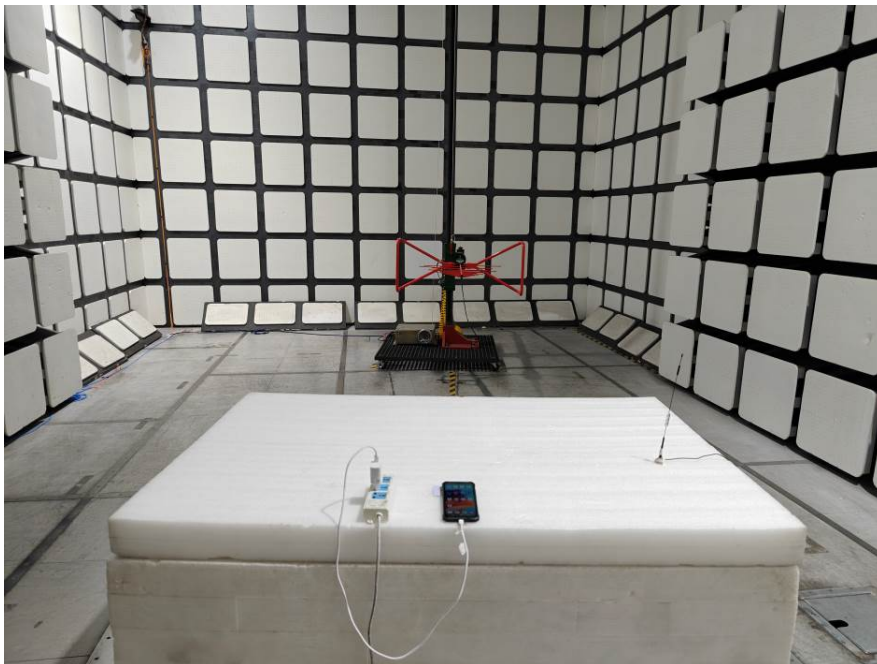


Radiated Emissions - Front View (Above 1 GHz)

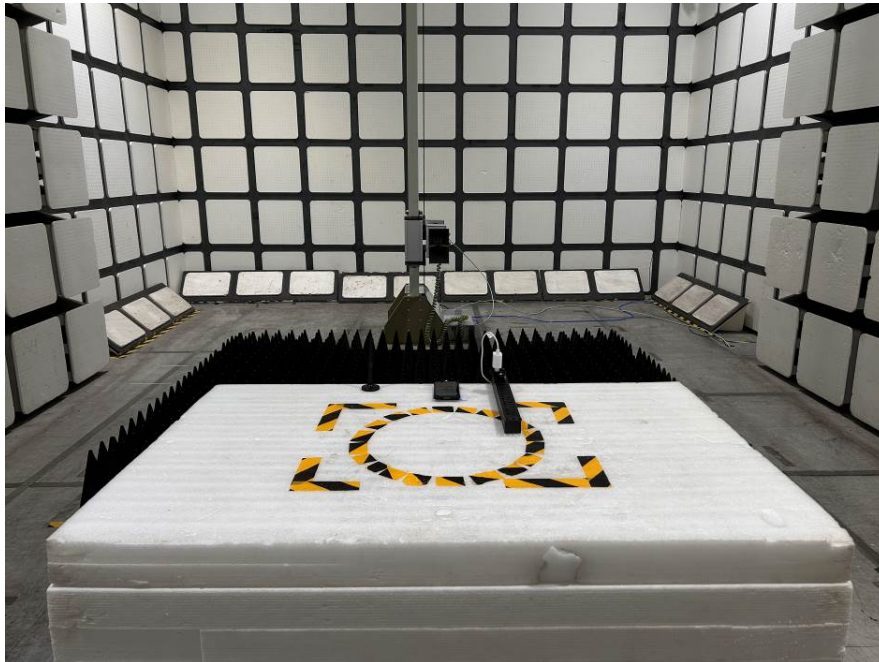

Radiated Emissions - Rear View (Above 1 GHz)

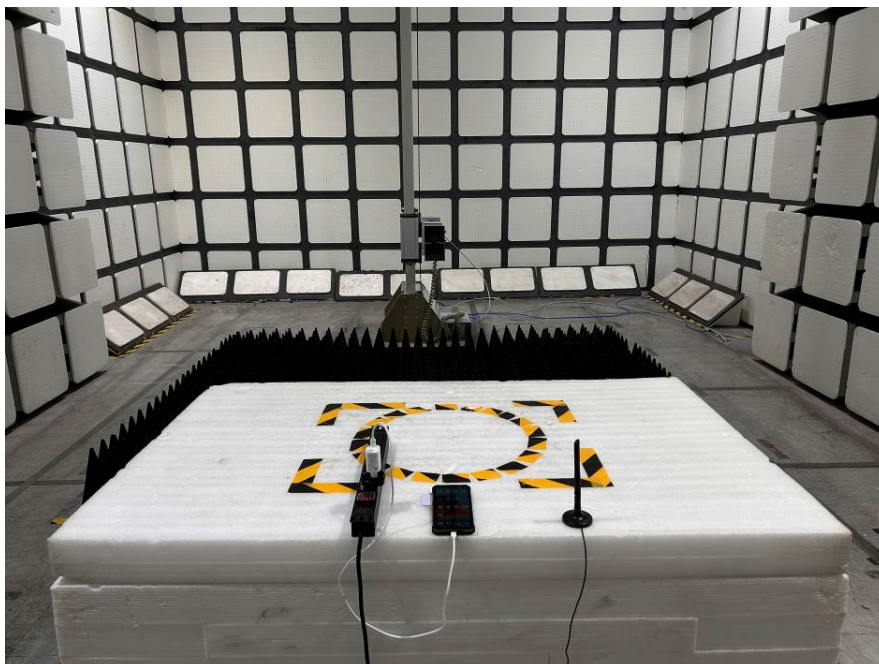

Conducted Emissions - Front View

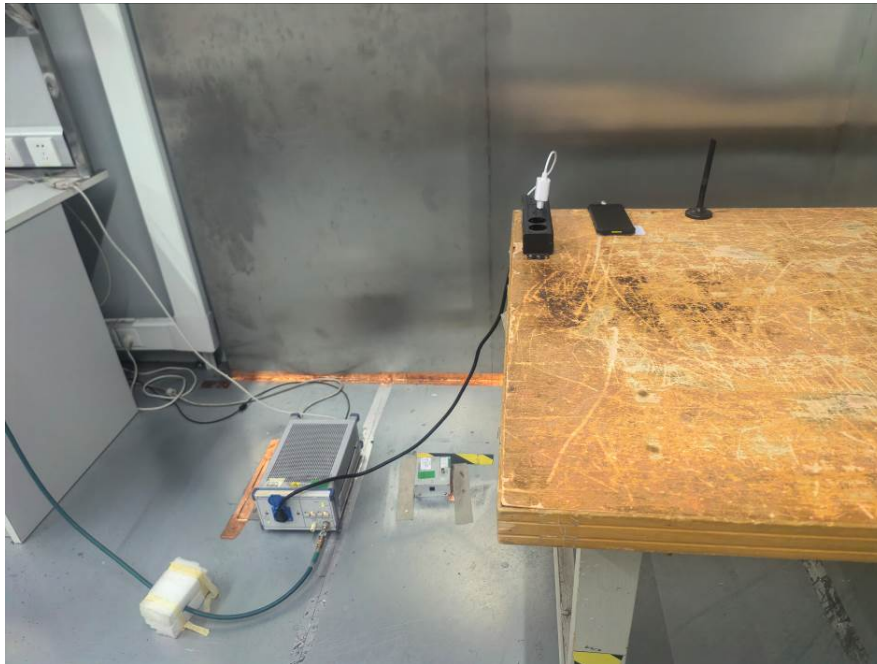

Conducted Emissions - Side View



******* END OF REPORT *******