

EMC TEST REPORT

For

Shenzhen Huafurui Technology Co., Ltd.

Wireless Earphone

Test Model: Vibe R3


Additional Model No.: Please Refer to Page 6

Prepared for	:	Shenzhen Huafurui Technology Co., Ltd.
Address	:	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Prepared by	:	Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address	:	101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Tel	:	(+86)755-29871520
Fax	:	(+86)755-29871521
Web	:	www.slcslab.com
Mail	:	info@slcslab.com
Date of receipt of test sample	:	May 13, 2026
Number of tested samples	:	2
Sample No.	:	A260511063-1, A260511063-2
Serial number	:	Prototype
Date of Test	:	May 13, 2026 ~ May 27, 2026
Date of Report	:	May 28, 2026



EMC TEST REPORT	
ETSI EN 301 489-1 V2.2.3 (2019-11) & ETSI EN 301 489-17 V3.3.1 (2024-09)	
Report Reference No.	: LCSB05126044EA
Date Of Issue.....	: May 28, 2026
Testing Laboratory Name.....	: Shenzhen Southern LCS Compliance Testing Co., Ltd.
Address.....	: 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.
Testing Location/ Procedure ...	: Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
Applicant's Name.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Test Specification	
Standard	: ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-17 V3.3.1 (2024-09)
Test Report Form No.	: TRF-4-E-132 A/0
TRF Originator	: Shenzhen Southern LCS Compliance Testing Co., Ltd.
Master TRF	: Dated 2017-06
Shenzhen Southern LCS Compliance Testing Co., Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test Item Description.	: Wireless Earphone
Trade Mark	: CUBOT
Test Model	: Vibe R3
Ratings.....	: Please Refer to Page 6
Result	: PASS

Compiled by:



Sean Huang/ Administrator

Reviewed by:



Kris Mai/ Project Engineer

Approved by:



DM Gu/ Manager

EMC -- TEST REPORT

Test Report No. : LCSB05126044EA	<u>May 28, 2026</u> Date of issue
---	--------------------------------------

Test Model.....	: Vibe R3
EUT.....	: Wireless Earphone
Applicant.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /
Manufacturer.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /
Factory.....	: Shenzhen Huafurui Technology Co., Ltd.
Address.....	: Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China
Telephone.....	: /
Fax.....	: /

Test Result	PASS
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Report Version	Issue Date	Revision Content	Revised By
000	May 28, 2026	Initial Issue	---



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	6
1.2. OBJECTIVE	7
1.3. RELATED SUBMITTAL(S)/GRANT(S).....	7
1.4. TEST METHODOLOGY.....	7
1.5. DESCRIPTION OF TEST FACILITY	7
1.6. SUPPORT EQUIPMENT LIST	8
1.7. EXTERNAL I/O	8
1.8. MEASUREMENT UNCERTAINTY.....	8
1.9. DESCRIPTION OF TEST MODES.....	8
2. SUMMARY OF TEST RESULTS.....	9
3. TEST RESULTS	10
3.1. LINE CONDUCTED EMISSION	10
3.2. CONDUCTED EMISSION (WIRED NETWORK PORT)	12
3.3. RADIATED DISTURBANCE	13
3.4. HARMONIC CURRENT EMISSIONS	16
3.5. VOLTAGE FLUCTUATION AND FLICKER.....	17
3.6. RF ELECTROMAGNETIC FIELD (80 MHz - 6000 MHz).....	18
3.7. ELECTROSTATIC DISCHARGE.....	20
3.8. ELECTRICAL FAST TRANSIENT IMMUNITY.....	22
3.9. RF COMMON MODE	23
3.10. SURGES, LINE TO LINE AND LINE TO GROUND	25
3.11. VOLTAGE DIPS/INTERRUPTIONS IMMUNITY TEST.....	26
4. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST	27
4.1. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO TRANSMITTER (CT)	27
4.2. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO TRANSMITTER (TT)	27
4.3. PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA APPLIED TO RECEIVER (CR).....	27
4.4. PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA APPLIED TO RECEIVER (TR)	27
5. LIST OF MEASURING EQUIPMENT	29
6. PHOTOGRAPHS OF TEST SETUP.....	31
7. PHOTOGRAPHS OF THE EUT.....	31

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	: Wireless Earphone
Test Model	: Vibe R3
Additional Model No.	: Vibe R5, Vibe R7, Vibe R8, Vibe R9, Vibe RS, Vibe RS3, Vibe RS5, Vibe R Lite, Vibe R Mini, Vibe R Pro, Vibe Fit, Vibe Mini, Vibe Lite, Vibe Air, Vibe Bass, Vibe Box, Vibe Pro
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Ratings	: Input: DC 5V, 1A Headset: DC 3.7V by Li-ion Battery(28mAh) Charging case: DC 3.7V by Li-ion Battery(230mAh)
Hardware Version	: XRX-CBDL-C98-MCU-V1.3
Software Version	: F-010_L_(CUBOT Vibe R3)_v164_P4_CBDL
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V6.0 (BDR/EDR)
Channel Spacing	: 1MHz for Bluetooth V6.0 (BDR/EDR)
Modulation Type	: GFSK, $\pi/4$ -DQPSK for Bluetooth V6.0 (BDR/EDR)
Bluetooth Version	: V6.0
Antenna Description	: Internal Antenna, 1.7dBi(Max.)

1.2. Objective

ETSI EN 301 489-1	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-17	ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband and Wideband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility

The objective is to determine compliance with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-17 V3.3.1 (2024-09).

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Test Methodology

All measurements contained in this report were conducted with ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-17 V3.3.1 (2024-09).

1.5. Description of Test Facility

Test Location	Shenzhen Southern LCS Compliance Testing Co., Ltd. 101-201, Building 39, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160.
---------------	--

1.6. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200 UU	---	CE

Note: Auxiliary equipment is provided by the laboratory.

1.7. External I/O

I/O Port Description	Quantity	Cable
Type-C Port	1	N/A

1.8. Measurement Uncertainty

Item	MU	Remark
Uncertainty for Power point Conducted Emissions Test	2.42dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.54dB	Polarize: V
	4.1dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	2.08dB	Polarize: H
	2.56dB	Polarize: V
Uncertainty for radio frequency	0.01ppm	
Uncertainty for conducted RF Power	0.65dB	
Uncertainty for temperature	0.2℃	
Uncertainty for humidity	1%	
Uncertainty for DC and low frequency voltages	0.06%	

1.9. Description of Test Modes

There was 2 test Modes. TM1 to TM2 were shown below:

TM1 : Operate in Bluetooth mode

TM2 : Idle mode

***Note:

1. All test modes were tested, but we only recorded the worst case in this report.

2. SUMMARY OF TEST RESULTS

Rule	Description of Test Items	Result
§7.1	Reference to clause 8.4 of ETSI EN 301 489-1 Conducted Emission (AC mains input/output port)	Compliant
§7.1	Reference to clause 8.3 of ETSI EN 301 489-1 Conducted Emission (DC power input/output port)	N/A*
§7.1	Reference to clause 8.7 of ETSI EN 301 489-1 Conducted Emission (Wired network port)	N/A*
§7.1	Reference to clause 8.2 of ETSI EN 301 489-1 Radiated Emission (Enclosure of ancillary equipment)	Compliant
§7.1	Reference to clause 8.5 of ETSI EN 301 489-1 Harmonic current emissions (AC mains input port)	N/A*
§7.1	Reference to clause 8.6 of ETSI EN 301 489-1 Voltage fluctuations and flicker (AC mains input port)	Compliant
§7.2	Reference to clause 9.3 of ETSI EN 301 489-1 Electrostatic discharge (Enclosure port) (EN 61000-4-2)	Compliant
§7.2	Reference to clause 9.2 of ETSI EN 301 489-1 RF electromagnetic field (80MHz to 6000MHz) (Enclosure port) (EN 61000-4-3)	Compliant
§7.2	Reference to clause 9.4 of ETSI EN 301 489-1 Fast transients common mode (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-4)	Compliant
§7.2	Reference to clause 9.8 of ETSI EN 301 489-1 Surges, line to line and line to ground (AC mains power input ports, wired network ports) (EN 61000-4-5)	Compliant
§7.2	Reference to clause 9.5 of ETSI EN 301 489-1 RF common mode 0.15MHz to 80MHz (signal, wired network and control ports, DC and AC power ports) (EN 61000-4-6)	Compliant
§7.2	Reference to clause 9.6 of ETSI EN 301 489-1 Transients and surges in the vehicular environment (ISO 7637-2)	N/A*
§7.2	Reference to clause 9.7 of ETSI EN 301 489-1 Voltage dips and interruptions (AC mains power input ports) (EN 61000-4-11)	Compliant

3. TEST RESULTS

3.1. Line Conducted Emission


3.1.1 Conducted Emission Limit

Relevant Standard(s): ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032:2015/A11:2020
Class B

Limits for Line Conducted Emission		
Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

3.1.2 Test Configuration

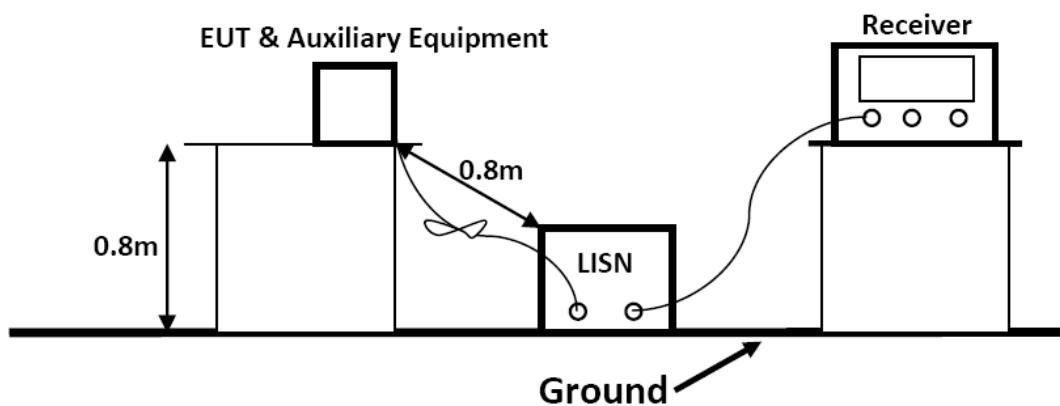

The setup of EUT is according with per ETSI EN 301 489-1 measurement procedure. The specification used was with the ETSI EN 301 489-1 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The EUT received charging power from the charger which received power through a LISN supplying power of AC 230V/50Hz.

3.1.3 EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

3.1.4 Test Procedure

Power on the EUT, the EUT begins to work. Make sure the EUT operates normally during the test.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

3.1.5 Test Results

PASS

Please refer to Appendix A.1 for Emission and Immunity test results.



3.2. Conducted Emission (Wired Network Port)


3.2.1 Conducted Emission Limit(Wired Network Port)

Limits for asymmetric mode conducted emissions				
Frequency (MHz)	Class B voltage limits (dB μ V)		Class B current limits (dB μ A)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	84.0~74.0	74.0~64.0	40.0~30.0	30.0~20.0
0.50 ~ 30.00	74.0	64.0	30.0	20.0

NOTE 1-The limits decrease linearly with the logarithm of the frequency in the range 0,15 MHz to 0,5 MHz.

NOTE 2-The current and voltage disturbance limits are derived for use with an impedance stabilization network (ISN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the telecommunication port under test (conversion factor is $20 \log_{10} 150 / 1 = 44$ dB).

3.2.2 Test Configuration

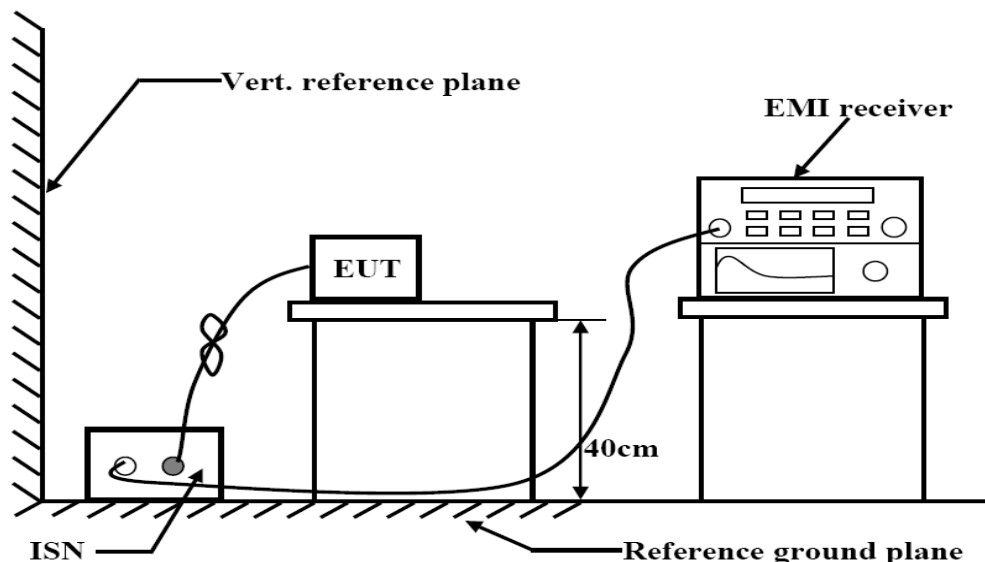

3.2.3 EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	150KHz ~ 30MHz
(IF)RBW	9kHz

All data was recorded in the Quasi-peak and average detection mode.

3.2.4 Test Procedure

Please refer to ETSI EN 301 489-1 Clause 8.7.2 and EN 55032 Clause 6 for the measurement methods.

3.2.5 Test Results

Not applicable.

3.3. Radiated Disturbance

3.3.1 Radiated Emission Limit

Relevant Standard(s): ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 55032:2015/A11:2020
Class B

Limits for Radiated Disturbance Below 1GHz			
Frequency (MHz)	Facility	Distance (Meters)	Field Strengths Limit (dB μ V/m)
30 ~ 230	SAC	3	40
230 ~ 1000	SAC	3	47
***Note: (1) The smaller limit shall apply at the combination point between two frequency bands. (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.			
Limits for Radiated Disturbance Above 1GHz			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

Limits for Radiated Disturbance Below 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Class B Limit (dB μ V/m)	
		Fundamental	Harmonics
30 ~ 230	3	60	52
230 ~ 300	3		52
300 ~ 1000	3		56
***Note: These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the LO. Signals at all other frequencies shall be compliant with the limits given in above Table.			
Limits for Radiated Disturbance Above 1GHz (For FM Receivers)			
Frequency (MHz)	Distance (Meters)	Peak Limit (dB μ V/m)	Average Limit (dB μ V/m)
1000 ~ 3000	3	70	50
3000 ~ 6000	3	74	54
***Note: The lower limit applies at the transition frequency.			

3.3.2 Test Configuration

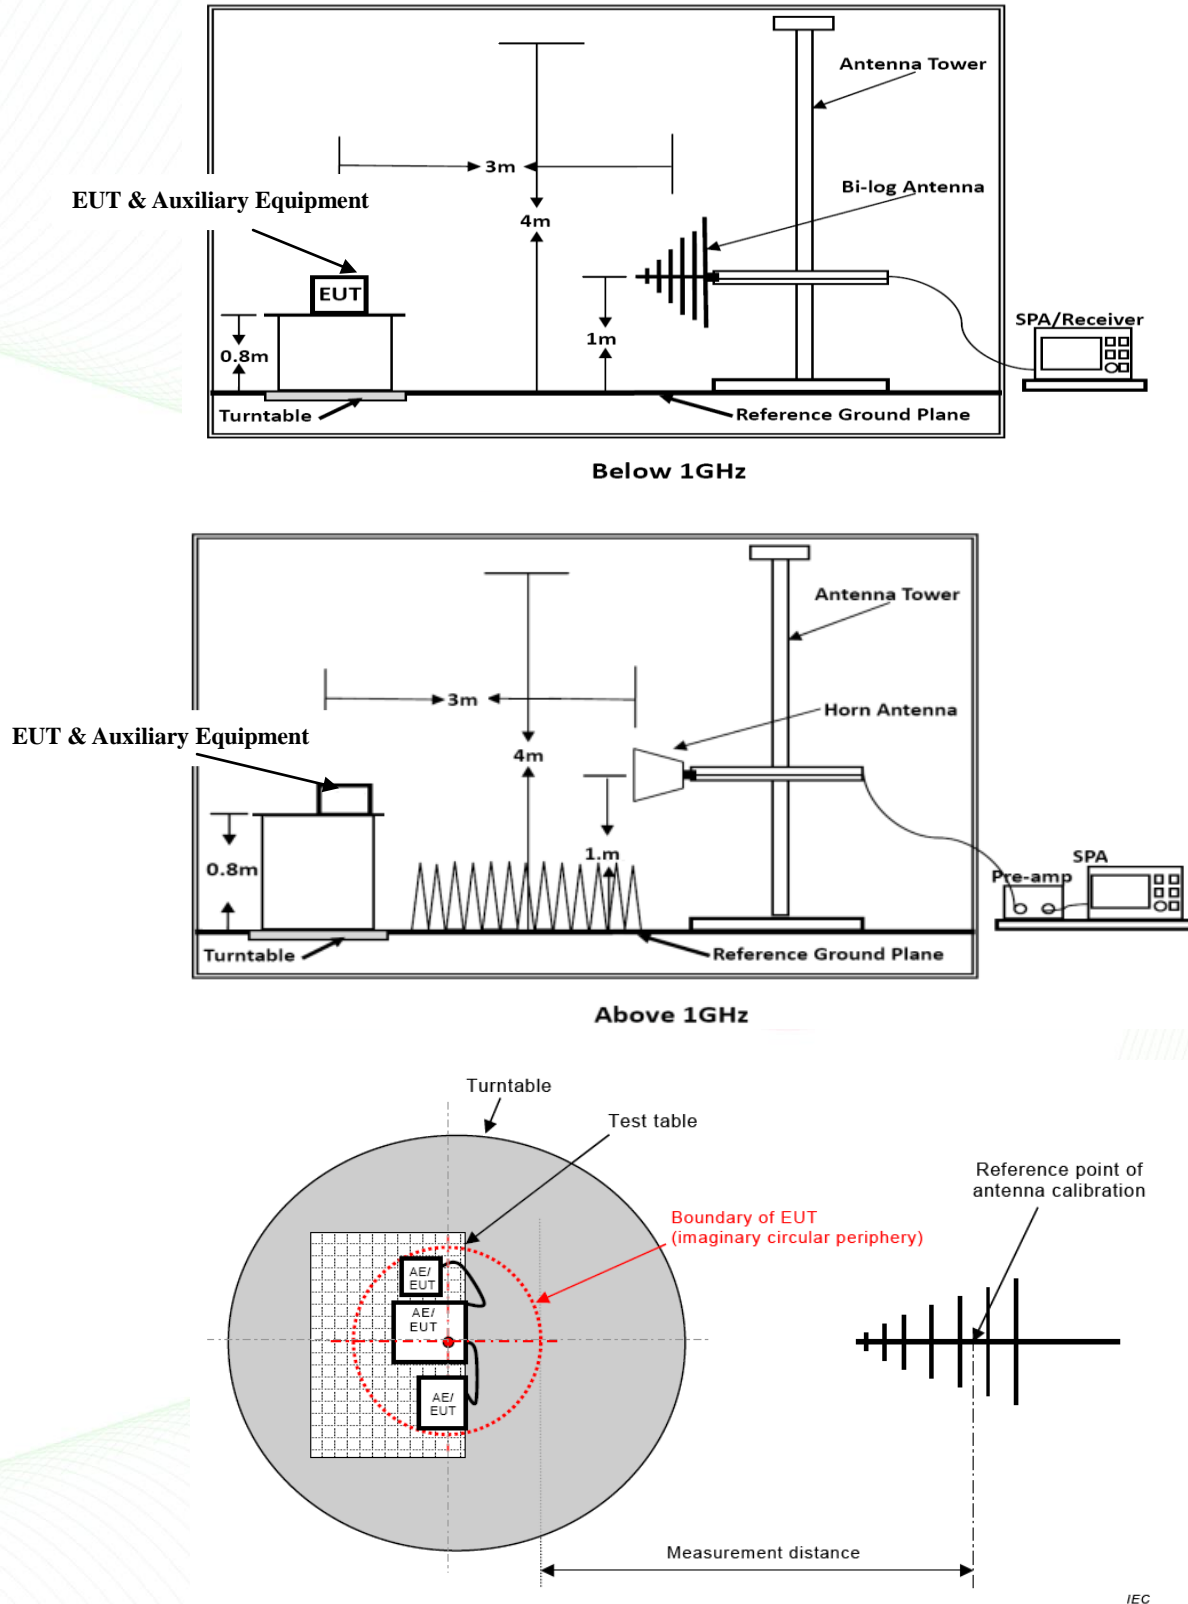


Figure C.1 – Measurement distance

Test Setup for FM Receiver

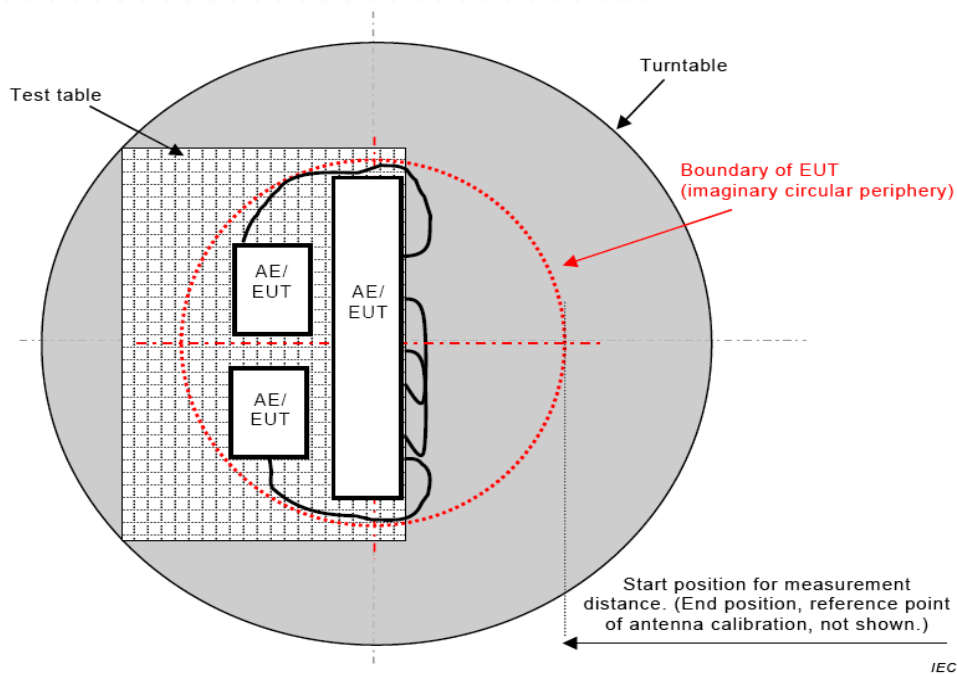


Figure C.2 – Boundary of EUT, Local AE and associated cabling

Test Setup for FM Receiver

3.3.3 Test Procedure

The test method shall be in accordance with CENELEC EN 55032 [1], annex A.3.


3.3.4 Test Results

PASS

The worst test mode of the EUT was TM1, and its test data please refer to Appendix A.3 for Emission and Immunity test results.

3.4. Harmonic Current Emissions

3.4.1 Test Configuration

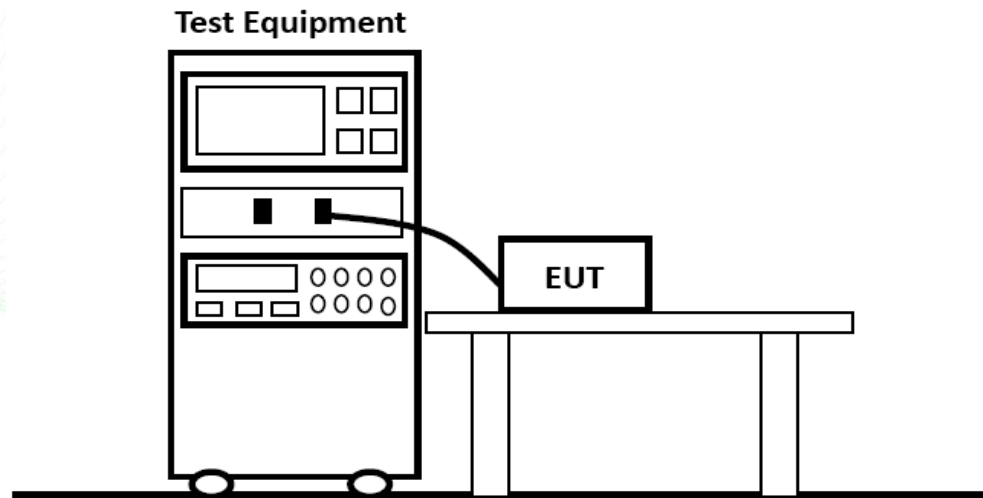

3.4.2 Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11) & EN 61000-3-2: 2014


3.4.3 Test Results

N/A

Please refer to Appendix A.4 for Emission and Immunity test results.

3.5. Voltage Fluctuation and Flicker

3.5.1 Test Configuration

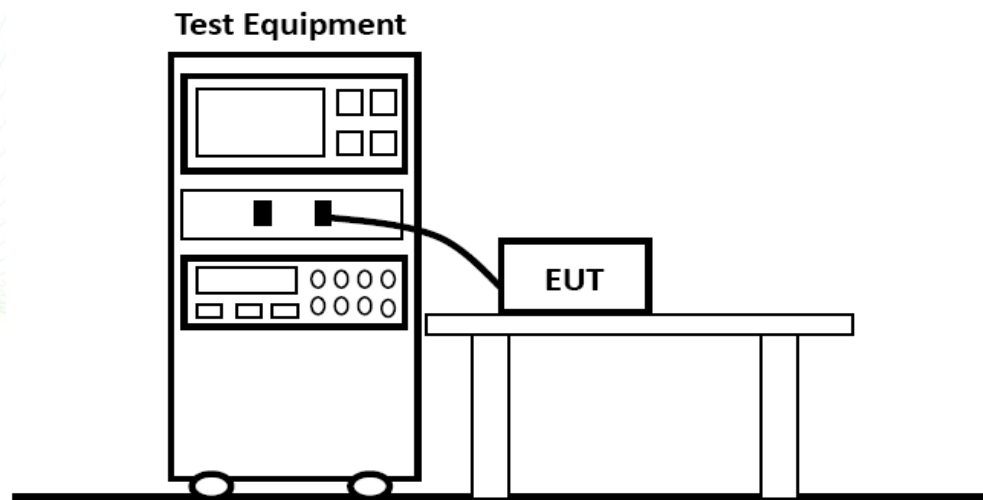

3.5.2 Test Standard

According to ETSI EN 301 489-1 V2.2.3 (2019-11) & EN 61000-3-3: 2013


3.5.3 Test Results

PASS

Please refer to Appendix A.5 for Emission and Immunity test results.

3.6. RF Electromagnetic Field (80 MHz - 6000 MHz)

3.6.1 Test Configuration

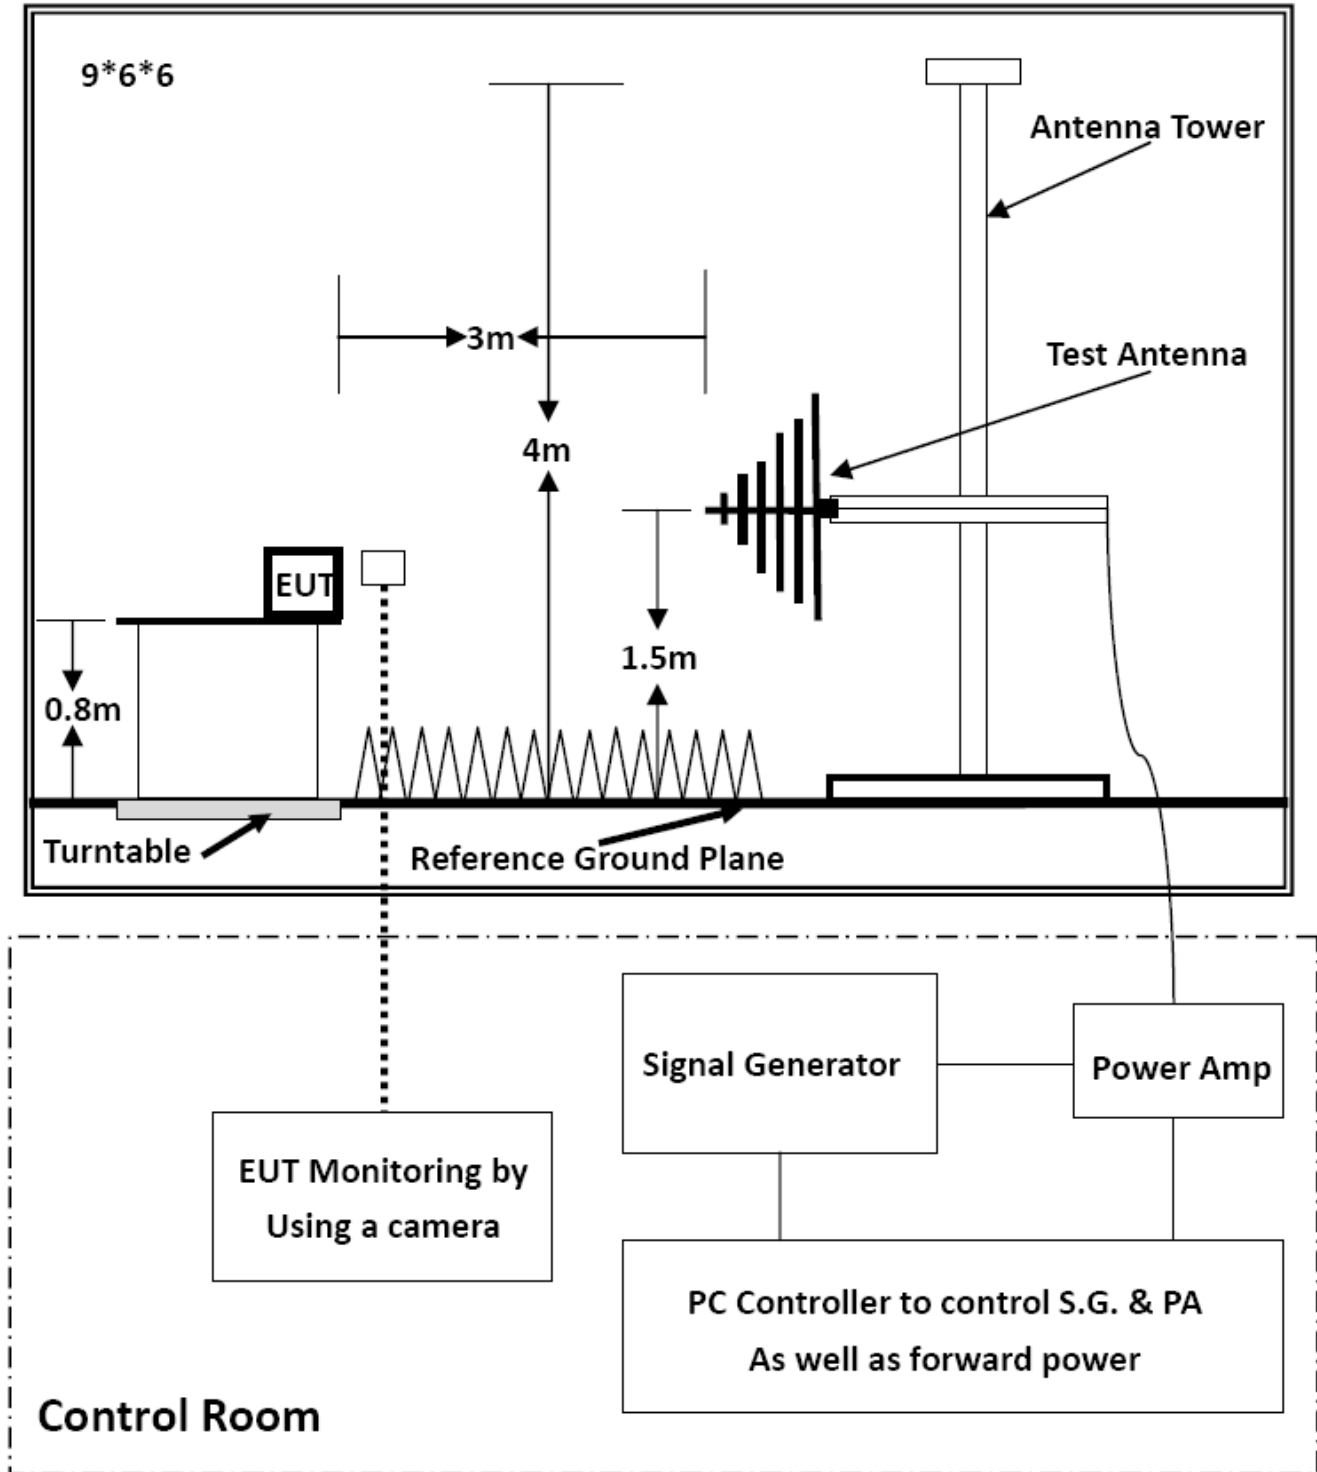

3.6.2 Test Standard

ETSI EN 301 489-1, ETSI EN 301 489-17 (EN 61000-4-3: 2006+A2: 2010)

Test level 2 at 3V/m.

3.6.3 Severity Level

Level	Field Strength (V/m)
1	1
2	3
3	10
X	Special
Performance Criterion: A	

3.6.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor EUT screen. All the scanning conditions are as follows:

Condition of Test	Remark
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Unmodulated
Scanning Frequency	80-6000MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	3 Sec.


3.6.5 Test Results

PASS

Please refer to Appendix A.6 for Emission and Immunity test results.

3.7. Electrostatic Discharge

3.7.1 Test Configuration

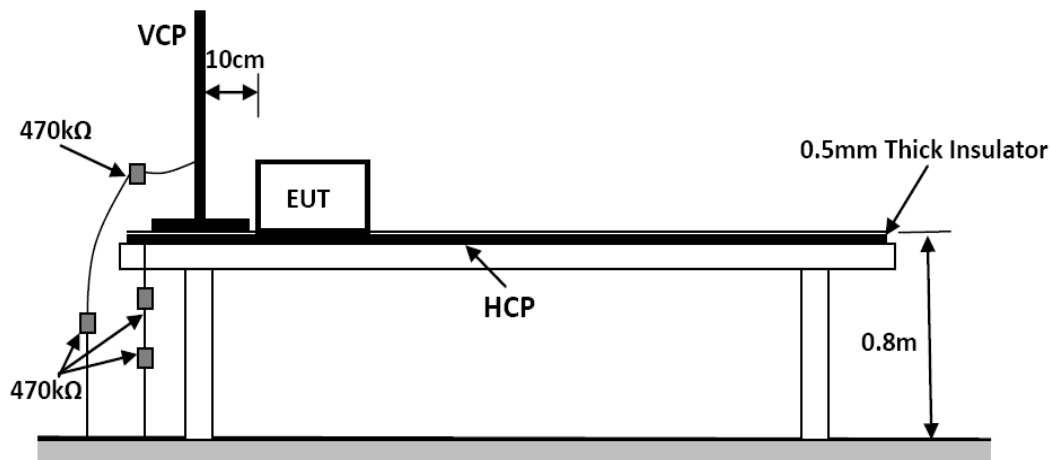

EN 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.5 by 1.0-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

3.7.2 Test Procedure

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-2: 2009

Test level 3 for Air Discharge at ± 8 kV

Test level 2 for Contact Discharge at ± 4 kV

3.7.2.1 Air Discharge

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

3.7.2.2 Contact Discharge

All the procedure shall be same as Section 3.7.2.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

3.7.2.3 Indirect Discharge For Horizontal Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

3.7.2.4 Indirect Discharge For Vertical Coupling Plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

3.7.3 Test Results


PASS

Please refer to Appendix A.7 for Emission and Immunity test results.



3.8. Electrical Fast Transient Immunity

3.8.1 Test Configuration

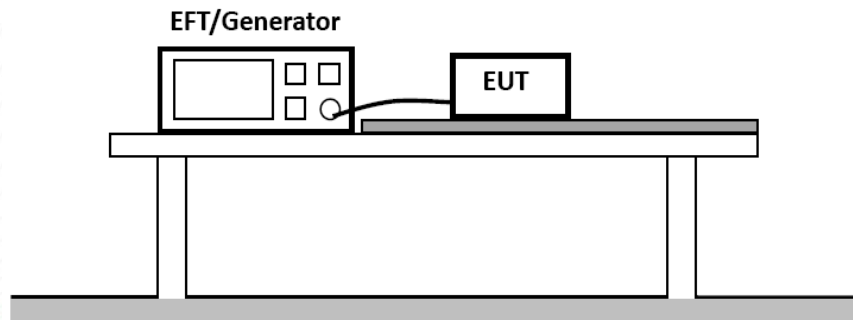

3.8.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN61000-4-4: 2012

Test level 2 at 1 kV

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special
Performance Criterion: B		

3.8.3 Test Procedure

The EUT is put on the table, which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

3.8.3.1 For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device, which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

3.8.3.2 For signal lines and control lines ports: No I/O ports. It's unnecessary to test.

3.8.3.3 For DC output line ports: It's unnecessary to test.


3.8.4 Test Results

PASS

Please refer to Appendix A.8 for Emission and Immunity test results.

3.9. RF Common Mode

3.9.1 Test Configuration

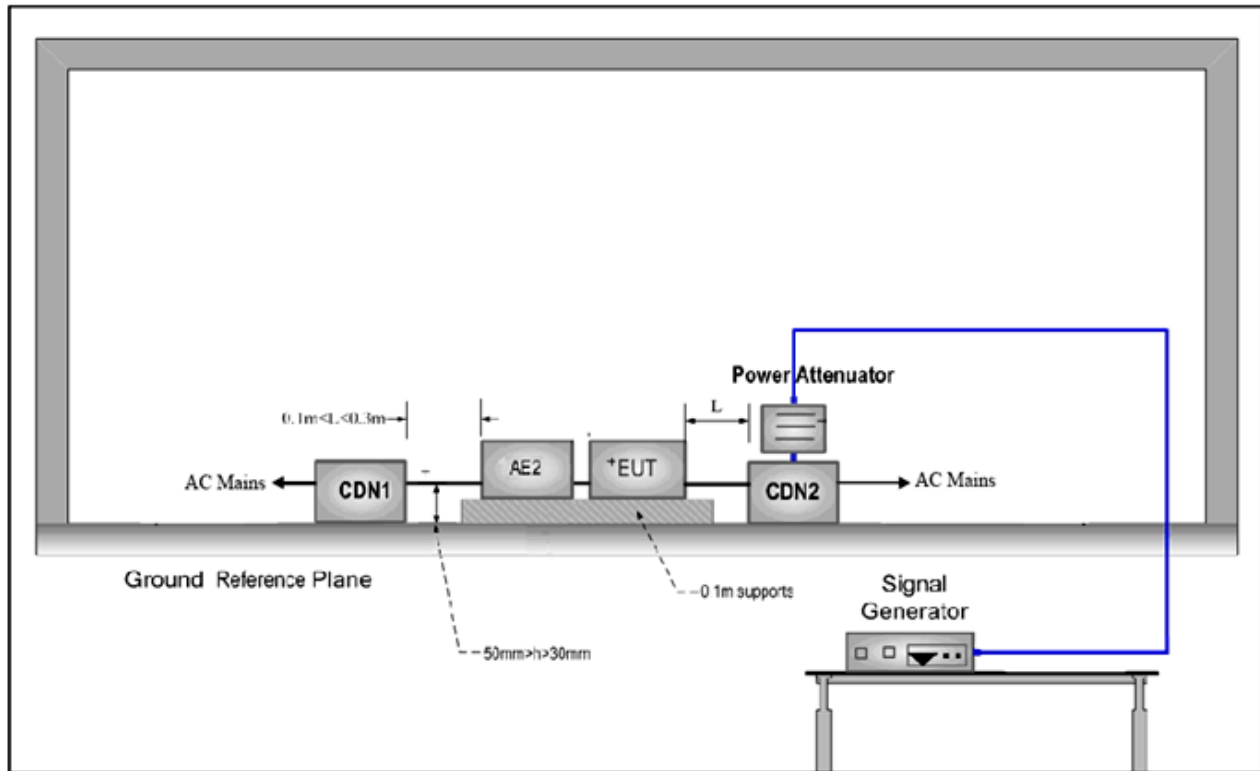

3.9.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-6: 2014

Test level: 3V (r.m.s.) for 0.15MHz ~ 10MHz; 3V (r.m.s.) to 1V (r.m.s.) for 10MHz ~ 30MHz;
1V (r.m.s.) for 30MHz ~ 80MHz

Modulation type: AM

Modulation depth: 80%

Modulation signal: 1 kHz

Test Level	
Level	Voltage Level (r.m.s.) (V)
1	1
2	3
3	10
X	Special
Performance Criterion: A	

3.9.3 Test Procedure

3.9.3.1 Let the EUT work in test mode and test it.

3.9.3.2 The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50mm (where possible).

3.9.3.3 The disturbance signal described below is injected to EUT through CDN.

3.9.3.4 The EUT operates within its operational mode(s) under intended climatic conditions after power on.

3.9.3.5 The frequency range is swept from 150kHz to 10MHz using 3V signal level, 10MHz to 30MHz using 3V to 1V signal level, 30MHz to 80MHz using 1V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.

3.9.3.6 The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.

3.9.3.7 Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.


3.9.4 Test Results

PASS

Please refer to Appendix A.9 for Emission and Immunity test results.

3.10. Surges, Line to Line and Line to Ground

3.10.1 Test Configuration

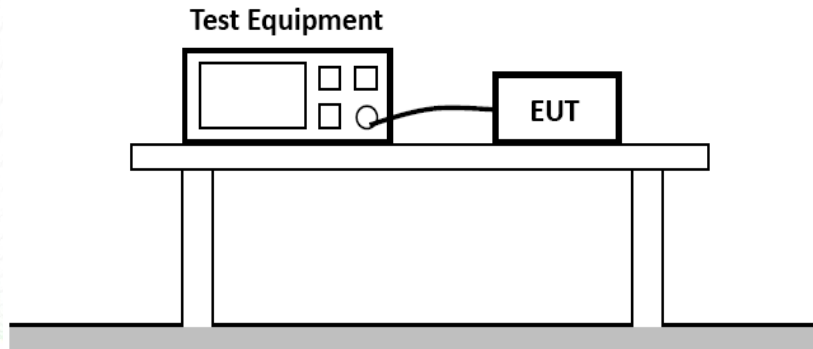

3.10.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11) / EN 61000-4-5: 2014+A1:2017

L-N: Test level 2 at 1 kV

L-PE, N-PE Test Level 3 at 2kV

Test Level		
Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1	0.5 kV	0.25 kV
2	1 kV	0.5 kV
3	2 kV	1 kV
4	4 kV	2 kV
X	Special	Special
Performance Criterion: B		

3.10.3 Test Procedure

3.10.3.1 For line to line coupling mode, provide a 0.5 kV 1.2/50us voltage surge (at open-circuit condition).

3.10.3.2 At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.

3.10.3.3 Different phase angles are done individually.

3.10.3.4 Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


3.10.4 Test Results

PASS

Please refer to Appendix A.10 for Emission and Immunity test results.

3.11. Voltage Dips/Interruptions Immunity Test

3.11.1 Test Configuration

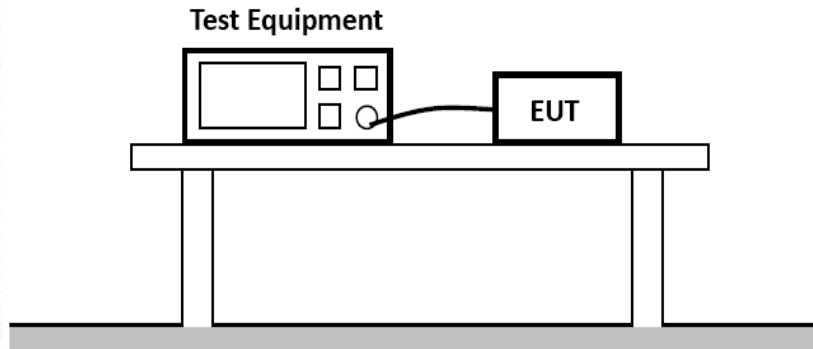

3.11.2 Test Standard

ETSI EN 301 489-1 V2.2.3 (2019-11)/ EN 61000-4-11: 2004

Test levels and Performance Criterion

Test Level		
Voltage Reduction $\%U_T$	Voltage Dips $\%U_T$	Duration (in Period)
100	0	0.5
100	0	1
30	70	5
Voltage Reduction $\%U_T$	Voltage Dips $\%U_T$	Duration (in Period)
100	0	250
Performance Criterion: B&C		

3.11.3 Test Procedure

3.11.3.1 The interruption is introduced at selected phase angles with specified duration.

3.11.3.2 Record any degradation of performance.

3.11.4 Test Results

PASS

Please refer to Appendix A.11 for Emission and Immunity test results.

4. GENERAL PERFORMANCE CRITERIA FOR IMMUNITY TEST

4.1. Performance criteria for Continuous phenomena applied to Transmitter (CT)

For equipment of type II or type III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

4.2. Performance criteria for Transient phenomena applied to Transmitter (TT)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transmitter, tests shall be repeated with the EUT in standby mode to ensure that any unintentional transmission does not occur.

4.3. Performance criteria for Continuous phenomena applied to Receiver (CR)

For equipment of type II or III that requires a communication link that is maintained during the test, it shall be verified by appropriate means supplied by the manufacturer that the communication link is maintained during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

4.4. Performance criteria for Transient phenomena applied to Receiver (TR)

For equipment of type II or type III that requires a communication link that is maintained during the test, this shall be verified by appropriate means supplied by the manufacturer during each individual exposure in the test sequence. Where the EUT is a transceiver, under no circumstances shall the transmitter operate unintentionally during the test.

Performance criteria for ETSI EN 301 489-17 V3.3.1 (2024-09)

Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.
NOTE: Operate as intended during the test shall be considered as: <ul style="list-style-type: none">• For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.• For equipment that does not support a PER or a FER, (e.g. audio equipment and equipment transmitting sporadic messages) the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.		



5. LIST OF MEASURING EQUIPMENT

CONDUCTED DISTURBANCE #1						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Shield Room #1	CHENGYU	843	/	2026-04-14	2029-04-13
2	EMI Test Receiver	R&S	ESCI	101142/003 (4.42 SP1)	2026-04-14	2027-04-13
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2026-04-14	2027-04-13
4	Artificial Mains Network	SCHWARZBECK	NSLK 8163	00043	2026-04-14	2027-04-13
5	ISN	SCHWARZBECK	NTFM 8158	NTFM8158#120	2026-04-14	2027-04-13
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2026-04-14	2027-04-13
7	Current Probe	R&S	EZ-17	101921	2025-12-12	2026-12-11
8	EMI Test Software	Farad	EZ EMC	1.1.4.4	/	/
9	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

RADIATED DISTURBANCE #2						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Semi Anechoic Chamber #2	Maorui	966	202512	2025-12-31	2030-12-30
2	Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
3	Log-periodic Antenna	SCHWARZBECK	VULB 9163	1865	2025-12-13	2028-12-12
4	Horn Antenna	ETS	3115	EABF-018	2025-07-19	2028-07-18
5	EMI Test Receiver	R&S	ESCI7	100967	2025-12-12	2026-12-11
6	Spectrum Analyzer	Agilent	N9020A	MY49061051	2026-04-14	2027-04-13
7	CDNE	SCHWARZBECK	CDNE M2	00251	2026-04-14	2027-04-13
8	CDNE	SCHWARZBECK	CDNE M3	00248	2026-04-14	2027-04-13
9	6dB Attenuator	EMC Solutions	ATT-6G-6dB	25002	2025-12-12	2026-12-11
10	Amplifier	EMC Solutions	TRLA-010180G50 N	25111101	2025-12-12	2026-12-11
11	EMI Test Software	Farad	EZ EMC	1.1.4.4	/	/
12	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

HARMONIC CURRENT & FLICKER						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Harmonic and Flicker Analyzer	HTEC	AC2000A	/	2026-04-14	2027-04-13
2	Pure Power Supply	HTEC	HHF-5010	/	2026-04-14	2027-04-13
3	Test Software	HTEC	Harmonic	V2.1.8	/	/
4	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

ELECTROSTATIC DISCHARGE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	TESEQ	NSG 437	1615	2025-12-15	2026-12-14
2	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

ELECTRICAL FAST TRANSIENT / BURST						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EFT Generator	HTEC	HEFT51	162201	2026-04-14	2027-04-13
2	EFT Coupling Clamp	HTEC	H3C	163701	2026-04-14	2027-04-13
3	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

SURGE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Surge Generator	3CTEST	SG5006G	EC5581070	2026-04-14	2027-04-13
2	Coupling / Decoupling Network	3CTEST	SGN-5010G	EC5591033	2026-04-14	2027-04-13
3	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Shield Room #2	Maorui	743	#2	2025-12-30	2030-12-29
2	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2026-04-14	2027-04-13
3	CDN	HTEC	CDN-M2+3	A22/0382/2016	2026-04-14	2027-04-13
4	6dB Attenuator	HTEC	ATT6	HA1601	2026-04-14	2027-04-13
5	Electromagnetic Clamp	LUTHI	EM101	35535	2026-04-14	2027-04-13
6	Test Software	HUBERT	CDG 6000	V1.4.1	/	/
7	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

VOLTAGE DIPS AND SHORT INTERRUPTIONS						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage Dips and Up Generator	HTEC	HPFS161P	162202	2026-04-14	2027-04-13
2	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

RADIO-FREQUENCY ELECTROMAGNETIC FIELDS						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Semi Anechoic Chamber #2	Maorui	966	202512	2025-12-31	2030-12-30
2	Power Meter	R&S	NRP-Z11	115232	2025-12-12	2026-12-11
3	Power Meter	R&S	NRP-Z11	117755	2025-12-12	2026-12-11
4	Power Amplifier	SKET	LPA 0810-150	202302457	2025-12-12	2026-12-11
5	Power Amplifier	OPHIR	5273F	1019	2026-04-14	2027-04-13
6	Power Amplifier	SKET	HAP-0306G-50W	/	2026-04-14	2027-04-13
7	RF Signal Generator	Agilent	E4438C	MY42081396	2026-04-14	2027-04-13
8	Field Generating Antenna	SKET	STLP 9129 Plus	/	/	/
9	Test Software	SKET	EMC-S	V2.1.3.23	/	/
10	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2025-07-16	2026-07-15

Note: N/A means no calibration requirement

6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix B for Photographs of Test Setup_EMC

7. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.

-----THE END OF REPORT-----

