




SAR Test Report

Test Report No.:	TCT250207E028	
Date of issue:	Mar. 21, 2025	
Testing laboratory	Shenzhen TCT Testing Technology Co., Ltd.	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China	
Applicant's name	Shenzhen Huafurui Technology Co., Ltd.	
Address	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China	
Manufacturer's name.....:	Shenzhen Huafurui Technology Co., Ltd.	
Address	Unit 601-03, 6/F, Block A, Building 1, Ganfeng Technology Building, No. 993 Jiaxian Road, Xiangjiaotang Community, Bantian Street, Longgang District, Shenzhen, P.R. China	
Test item description	Smartphone	
Trade Mark.....:	CUBOT	
Model/Type reference	KINGKONG POWER 5	
SAR Max. Values.....:	0.33/Kg (10g) for Head; 1.21/Kg (10g) for Body ; 1.93Kg (10g) for Limbs	
Simultaneous Reported SAR.....:	0.48/Kg (10g) for Head; 1.43Kg (10g) for Body ; 2.13g (10g) for Limbs	
Date of receipt of test item	Feb. 07, 2025	
Date (s) of performance of test	Feb. 07, 2025 ~ Mar. 21, 2025	
Tested by (+signature).....:	Karl WANG	
Check by (+signature)	Beryl Zhao	
Approved by (+signature):	Tomsin	

General disclaimer:

This report shall not be reproduced except in full, without the written approval of Shenzhen TCT Testing Technology Co., Ltd. This document may be altered or revised by Shenzhen TCT Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	4
1.1. EUT description	4
1.2. Model(s) list	5
2. Test standard	6
3. Facilities and Accreditations	6
3.1. Facilities	6
3.2. Location.....	6
3.3. Environment Condition.....	6
4. Test Result Summary	7
5. RF Exposure Limit	9
6. SAR Measurement System Configuration	10
6.1. SAR Measurement Set-up	10
6.2. E-field Probe	11
6.3. Phantom	11
6.4. Device Holder	12
6.5. Data Storage and Evaluation	13
6.6. Position of the wireless device in relation to the phantom	14
6.7. Tissue Dielectric Parameters	16
6.8. Tissue-equivalent Liquid Properties	16
6.9. System Check.....	17
7. Measurement Procedure	18
7.1. Measurement Process Diagram.....	18
7.2. Measurement Procedure	19
8. Conducted Output Power.....	20
9. SAR Test Results Summary.....	34
9.1. Head SAR 10g Value	34
9.2. Body-Worn 10g SAR Value.....	37
9.3. Wrist Worn 10g SAR	42
9.4. Simultaneous Transmission Considerations	43
9.5. Measurement Uncertainty (450MHz-6GHz).....	46
9.6. Test Equipment List	48
10. System Check Results	49
11. SAR Test Data.....	69
Appendix A: EUT Photos	179

Appendix B: Test Setup Photos	182
Appendix C: Probe Calibration Certificate.....	184
Appendix D: Dipole Calibration Report.....	195

1. General Product Information

1.1. EUT description

Test item description.....:	Smartphone
Model/Type reference.....:	KINGKONG POWER 5
Hardware Version.....:	E233-C1
Software Version.....:	CUBOT_KINGKONG POWER 5_F011C_V01
Rating(s).....:	Rechargeable Li-polymer Battery DC 3.87V
2G	
Operation Band.....:	GSM900,GSM1800
Supported type.....:	GSM/GPRS/EGPRS
Power Class.....:	GSM900:Power Class 5; GSM1800:Power Class 0
Modulation Type.....:	GMSK for GSM/GPRS; 8PSK for EGPRS
GSM Release Version.....:	R99
GPRS Multislot Class.....:	12
EGPRS Multislot Class.....:	12
3G	
Operation Band.....:	WCDMA Band I & Band VIII
Power Class.....:	Power Class 3
Modulation Type.....:	QPSK for WCDMA/HSDPA/HSUPA
WCDMA Release Version.....:	R99
HSDPA Release Version.....:	Release 5
HSUPA Release Version.....:	Release 6
DC-HSUPA Release Version.....:	Not Supported
LTE	
Operation Band.....:	LTE Band 1 & LTE Band 3 & LTE Band 7 & LTE Band 8 & LTE Band 20 & LTE Band 28& LTE Band 38 & LTE Band 40
Power Class.....:	Power Class 3
Modulation Type.....:	QPSK &16-QAM for LTE
WiFi 2.4G	
Supported type.....:	802.11b/802.11g/802.11n
Modulation Type.....:	802.11b: DSSS; 802.11g/802.11n:OFDM
Operation Frequency.....:	802.11b/802.11g/802.11n(HT20):2412MHz~2472MHz; 802.11n(HT40):2422MHz~2462MHz
Channel number.....:	802.11b/802.11g/802.11n(HT20):13; 802.11n(HT40):9
Channel separation.....:	5MHz

Bluetooth	
Bluetooth Version.....:	Supported BT5.0
Modulation.....:	GFSK(1Mbps) , $\pi/4$ -DQPSK(2Mbps) , 8-DPSK(3Mbps)
Operation Frequency.....:	2402MHz~2480MHz
Channel number.....:	79/40
Channel separation.....:	1MHz
Wi-Fi 5G	
Operation Frequency.....:	Band 1: 5150 MHz -5250 MHz Band 2A:5250 MHz -5350 MHz Band 2C:5470 MHz -5725 MHz Band 3: 5725 MHz -5875 MHz
Channel Bandwidth.....:	802.11a: 20MHz 802.11n: 20MHz, 40MHz 802.11ac: 20MHz, 40MHz, 80MHz
Modulation Technology.....:	Orthogonal Frequency Division Multiplexing(OFDM)
Modulation Type.....:	256QAM, 64QAM, 16QAM, BPSK, QPSK
NFC	
Operation Frequency.....:	13.56MHz
Antenna Type.....:	PIFA Antenna

1.2. Model(s) list

None.

2. Test standard

The tests were performed according to following standards:

EN 50566:2017+A1:2023

EN 50663:2017

EN IEC/IEEE 62209-1528:2021

EN 50360:2017+A1:2023

EN 62479:2010

3. Facilities and Accreditations

3.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Innovation, Science and Economic Development Canada for radio equipment testing.

3.2. Location

Shenzhen TCT Testing Technology Co., Ltd.

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

3.3. Environment Condition

Temperature:	18°C ~25°C
Humidity:	35%~75% RH
Atmospheric Pressure:	1011 mbar

4. Test Result Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:
<Highest Reported standalone SAR Summary>

Highest Reported Standards SAR Summary				
Exposure Position	Frequency Band	Reported 10g SAR (W/kg)	Equipment Class	Highest Reported 10-g SAR (W/kg)
Head	GSM 900	0.15	PCE	0.33
	GSM 1800	0.09		
	WCDMA Band I	0.10		
	WCDMA Band VIII	0.12		
	LTE Band 1	0.31		
	LTE Band 3	0.26		
	LTE Band 7	0.33		
	LTE Band 8	0.14		
	LTE Band 20	0.17		
	LTE Band 28	0.14		
	LTE Band 38	0.08		
	LTE Band 40	0.18		
	5.2GWLAN	0.08	NII	
	5.3GWLAN	0.09		
	5.6GWLAN	0.14		
	5.8GWLAN	0.15		
	2.4GWLAN	0.07	DTS	
Body (5 mm Gap)	GSM900	0.25	PCE	1.21
	GSM1800	0.45		
	WCDMA Band I	0.69		
	WCDMA Band VIII	0.24		
	LTE Band 1	0.90		
	LTE Band 3	0.65		
	LTE Band 7	1.21		
	LTE Band 8	0.22		
	LTE Band 20	0.58		
	LTE Band 28	0.33		
	LTE Band 38	0.52		
	LTE Band 40	0.33		
	5.2GWLAN	0.10	NII	
	5.3GWLAN	0.11		
	5.6GWLAN	0.22		
	5.8GWLAN	0.18		
	2.4GWLAN	0.09	DTS	

Exposure Position	Frequency Band	Reported 10g SAR (W/kg)	Equipment Class	Highest Reported 10-g SAR (W/kg)
Wrist Worn (0 mm Gap)	GSM900	0.28	PCE	1.93
	GSM1800	0.90		
	WCDMA Band I	1.13		
	WCDMA Band VIII	0.34		
	LTE Band 1	1.15		
	LTE Band 3	1.07		
	LTE Band 7	1.93		
	LTE Band 8	0.72		
	LTE Band 20	0.81		
	LTE Band 28	0.71		
	LTE Band 38	0.89		
	LTE Band 40	0.75		
	5.2GWLAN	0.12	NII	
	5.3GWLAN	0.12		
	5.6GWLAN	0.16		
	5.8GWLAN	0.20		
2.4GWLAN	0.13	DTS		

<Highest Reported simultaneous SAR Summary>

Exposure Position	Highest Reported Simultaneous Transmission SAR (W/kg)	Limit (W/Kg)
Head 10-g SAR	0.48	2
Body-worn 10-g SAR (5 mm Gap)	1.43	2
Wrist Worn (0 mm Gap)	2.13	4

The EUT battery must be fully charged and checked periodically during the test to ascertain inform power output

5. RF Exposure Limit

Type Exposure	AR (W kg)
	Uncontrolled Exposure Limit
Spatial Peak SAR (10g cube tissue for head and trunk)	2.00
Spatial Peak SAR (10g cube tissue for limbs)	4.00
Spatial Peak SAR (10g cube tissue for whole body)	0.08

Note:

1. This limit is according to recommendation 1999/519/EC, Annex II (Basic Restrictions)
2. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation)

6.1. SAR Measurement Set-up

A standard high precision 6-axis robot (KUKA) with controller and software.


A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with a Video Positioning System (VPS).

OPENSAR software Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.

The Position device for handheld EUT

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles to validate the proper functioning of the system.

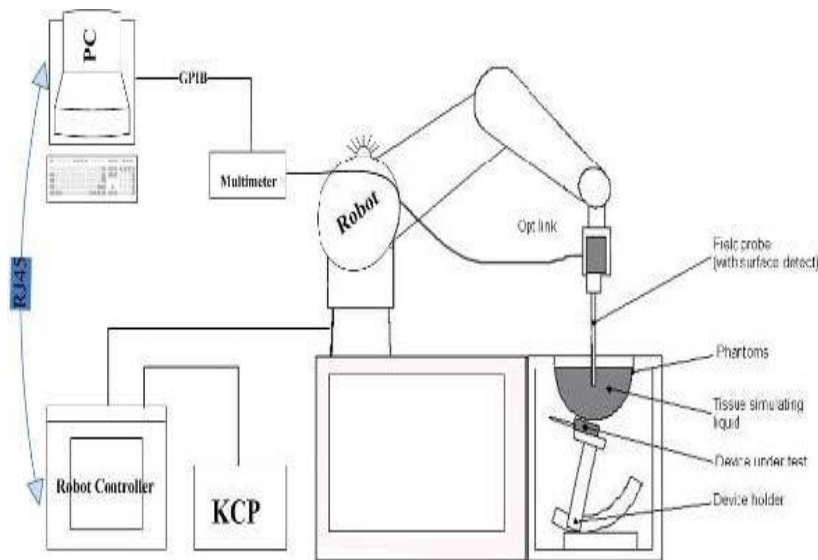

KUKA SAR Test Sysytem Configuration

6.2. E-field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG).
The probe is specially designed and calibrated for use in liquid with high permittivity.
The dosimetric probe has special calibration in liquid at different frequency.
This probe has a built in optical surface detection system to prevent from collision with phantom.

Probe Specification

Construction Symmetrical design with triangular core
Interleaved sensors
Built-in shielding against static charges
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration ISO/IEC 17025 calibration service available.

Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 25/22 EPGO375
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.197 M Dipole 2: R2=0.230 M Dipole 3: R3=0.208 M




Photo of E-Field Probe

6.3. Phantom

The SAM Phantom SAM120 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is in compliance with the specification set in IEEE P1528 and CENELEC EN IEC/IEEE 62209-1528:2021.

The phantom enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region.

A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot


System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections.

Body SAR testing also used the flat section between the head profiles.

Name: COMOSAR IEEE SAM PHANTOM

S/N: SN 19/15 SAM 120

Manufacture: MVG

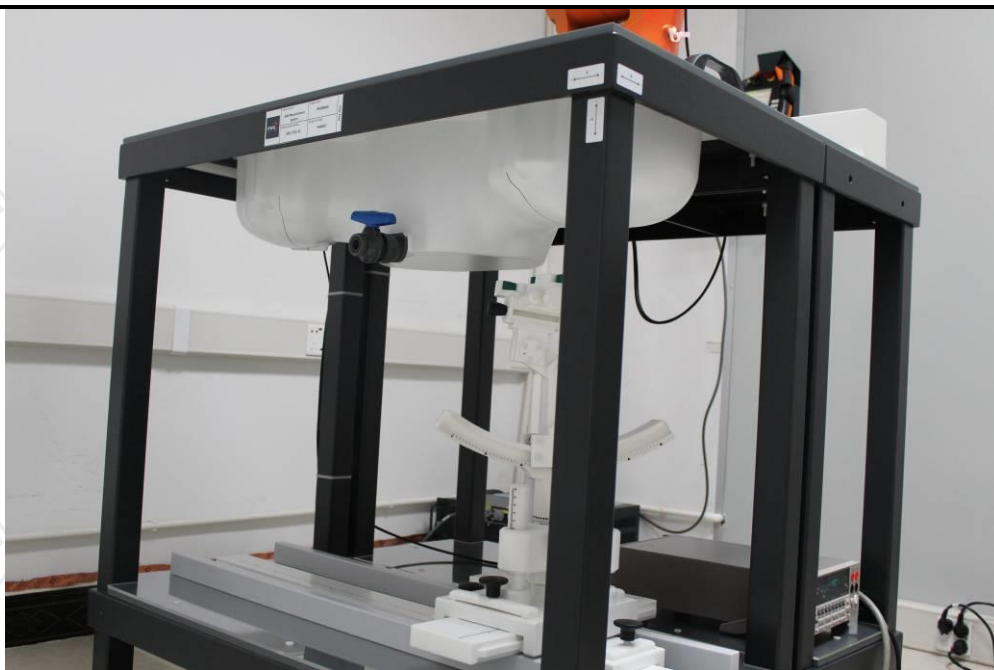
**SAM Twin Phantom**

6.4. Device Holder

In combination with the Generic Twin Phantom SAM120, the Mounting Device enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening.

The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications.

The device holder can be locked at different phantom locations (left head, right head, flat phantom).

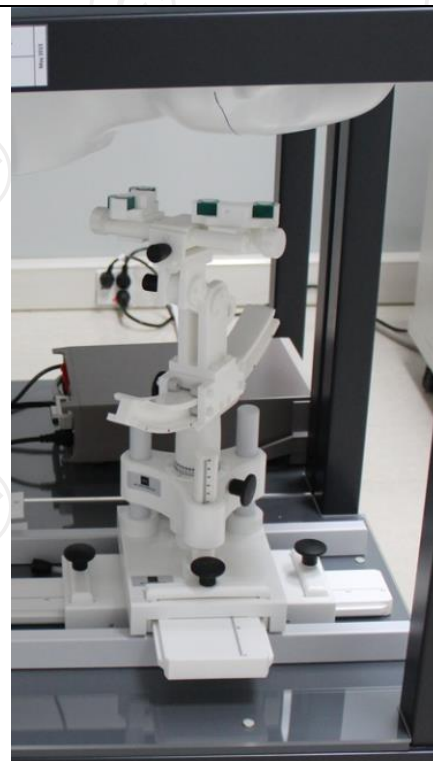**COMOSAR Mobile
phone positioning
system**

6.5. Data Storage and Evaluation

Data Storage

The OPENSAR software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The OPENSAR software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	<i>Normi, ai0, ai1, ai2</i>
	- Conversion factor	<i>ConvFi</i>
	- Diode compression point	<i>Dcpi</i>
Device parameters:	- Frequency	<i>f</i>
	- Crest factor	<i>cf</i>
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the OPENSAR components. In the direct measuring mode of the millimetre option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$Vi = Ui + Ui^2 \cdot cf / dcpi$$

With *Vi* = compensated signal of channel *i* (*i* = x, y, z)
Ui = input signal of channel *i* (*i* = x, y, z)
cf = crest factor of exciting field (MVG parameter)
dcpi = diode compression point (MVG parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E\text{-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$H\text{-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With	V_i	= compensated signal of channel i	($i = x, y, z$)
	Norm_i	= sensor sensitivity of channel i	($i = x, y, z$)
		[mV/(V/m) ²] for E-field Probes	
	ConvF	= sensitivity enhancement in solution	
	a_{ij}	= sensor sensitivity factors for H-field probes	
	f	= carrier frequency [GHz]	
	E_i	= electric field strength of channel i in V/m	
	H_i	= magnetic field strength of channel i in A/m	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with	SAR	= local specific absorption rate in mW/g
	E_{tot}	= total field strength in V/m
	σ	= conductivity in [mho/m] or [Siemens/m]
	ρ	= equivalent tissue density in g/cm ³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

6.6. Position of the wireless device in relation to the phantom

Handset Reference Points


$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m



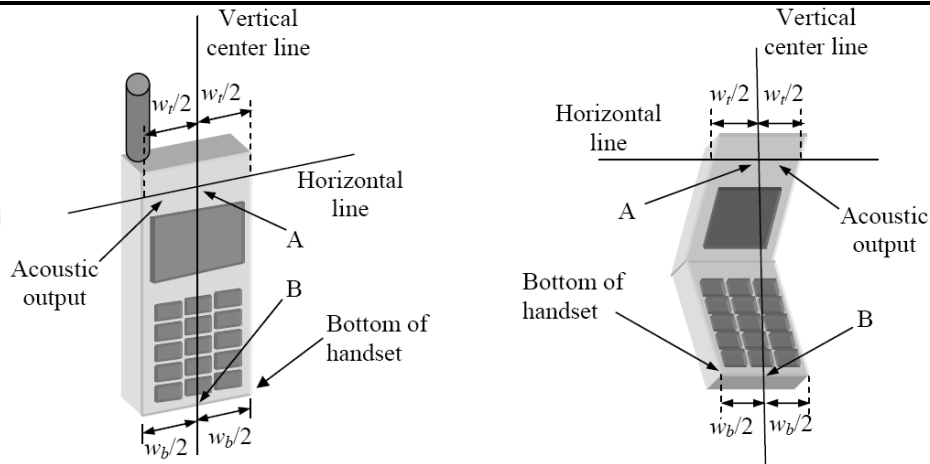

W_t Width of the handset at the level of the acoustic

W_b Width of the bottom of the handset


A Midpoint of the width w_t of the handset at the level of the acoustic output

B Midpoint of the width w_b of the bottom of the handset

Positioning for Cheek / Touch



Positioning for Ear / 15° Tilt

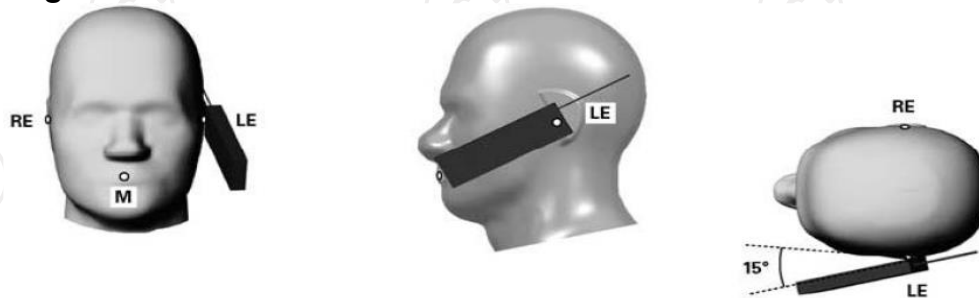

Body Worn Accessory Configurations

To position the device parallel to the phantom surface with either keypad up or down.

To adjust the device parallel to the flat phantom.

To adjust the distance between the device surface and the flat phantom to 5mm or holster surface and the flat phantom to 0 mm.

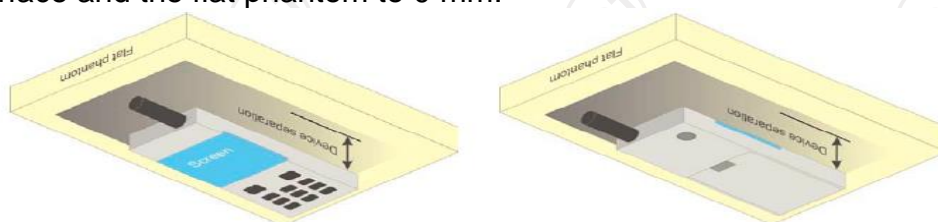


Illustration for Body Worn Position

6.7. Tissue Dielectric Parameters

According to EN IEC/IEEE 62209-1528:2021, the liquid parameters for head are the same as body requirements. For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid a depth of at least 15cm, For head SAR testing, the liquid height from the ear reference point(ERP) of the phantom to the liquid top surface is larger than 15cm, For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

Frequency (MHz)	Liquid Type	Liquid Type (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
300	Head	0.87	0.83~0.91	45.3	43.04~47.57
750	Head	0.87	0.83~0.91	43.5	41.33~45.68
835	Head	0.90	0.86~0.95	41.5	39.43~43.58
900	Head	0.97	0.92~1.02	41.5	39.43~43.58
1800-2000	Head	1.40	1.33~1.47	40.0	38.00~42.00
2450	Head	1.80	1.71~1.89	39.2	37.24~41.16
2600	Head	1.96	1.86~2.06	39.0	37.05~40.95
3000	Head	2.40	2.28~2.52	38.5	36.58~40.43
5800	Head	5.27	5.01~5.53	35.3	33.54~37.07

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

6.8. Tissue-equivalent Liquid Properties


Frequency (MHz)	Test Date	Temp $^{\circ}\text{C}$	ϵ_r	$\sigma(\text{s/m})$
750	03/10/2025	22	41.71	0.90
900	03/10/2025	22	41.70	0.95
1800	03/12/2025	22	39.74	1.37
2000	02/28/2025	22	39.58	1.42
2450	02/25/2025	22	38.61	1.82
2600	02/25/2025	22	39.42	1.93
5200	03/03/2025	22	36.11	4.89
5400	03/03/2025	22	35.76	4.96
5600	03/03/2025	22	35.81	5.00
5800	03/03/2025	22	34.51	5.12

6.9. System Check

The SAR system must be validated against its performance specifications before it is deployed. When SAR probe and system component or software are changed, upgraded or recalibrated, these must be validated with the SAR system(s) that operates with such component. Reference dipoles are used with the required tissue-equivalent media for system validation.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the OPENSAR system.

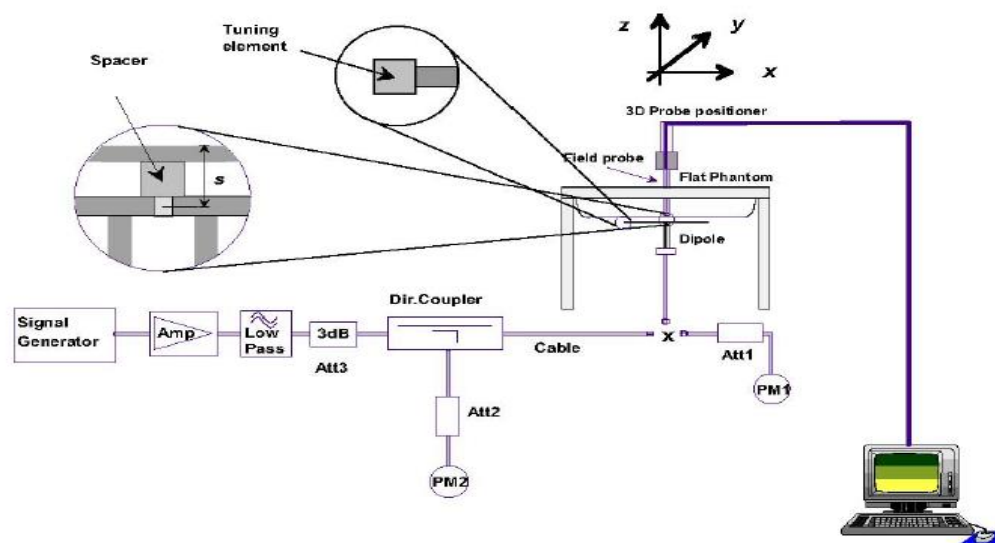

System Check Set-up


Verification Results:

Data	Frequency (MHz)	Measured Value in 100mW (W/kg)		Normalized to 1W (W/kg)		Target Value (W/kg)		Deviation (%)	
		1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average	10 g Average
03/10/2025	750	0.82	0.57	8.20	5.70	8.31	5.71	-1.32	-0.17
03/10/2025	900	1.12	0.67	11.20	6.70	10.63	6.81	5.36	-1.62
03/12/2025	1800	3.64	2.08	36.40	20.80	37.67	20.23	-3.37	2.82
02/28/2025	2000	4.37	2.24	43.70	22.40	42.16	21.18	3.65	5.76
02/25/2025	2450	5.12	2.54	51.20	25.40	53.26	24.15	-3.87	5.18
02/25/2025	2600	5.65	2.37	56.50	23.70	54.31	24.14	4.03	-1.82
03/03/2025	5200	15.50	5.58	155.00	55.80	163.88	57.29	-5.41	-2.60
03/03/2025	5400	15.76	5.36	157.60	53.60	172.23	59.16	-8.49	-9.40
03/03/2025	5600	16.75	5.58	167.50	55.80	181.28	61.57	-7.60	-9.37
03/03/2025	5800	17.57	5.82	175.70	58.20	188.95	63.45	-7.01	-8.27

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Section 10 of this report.

7. Measurement Procedure

7.1. Measurement Process Diagram

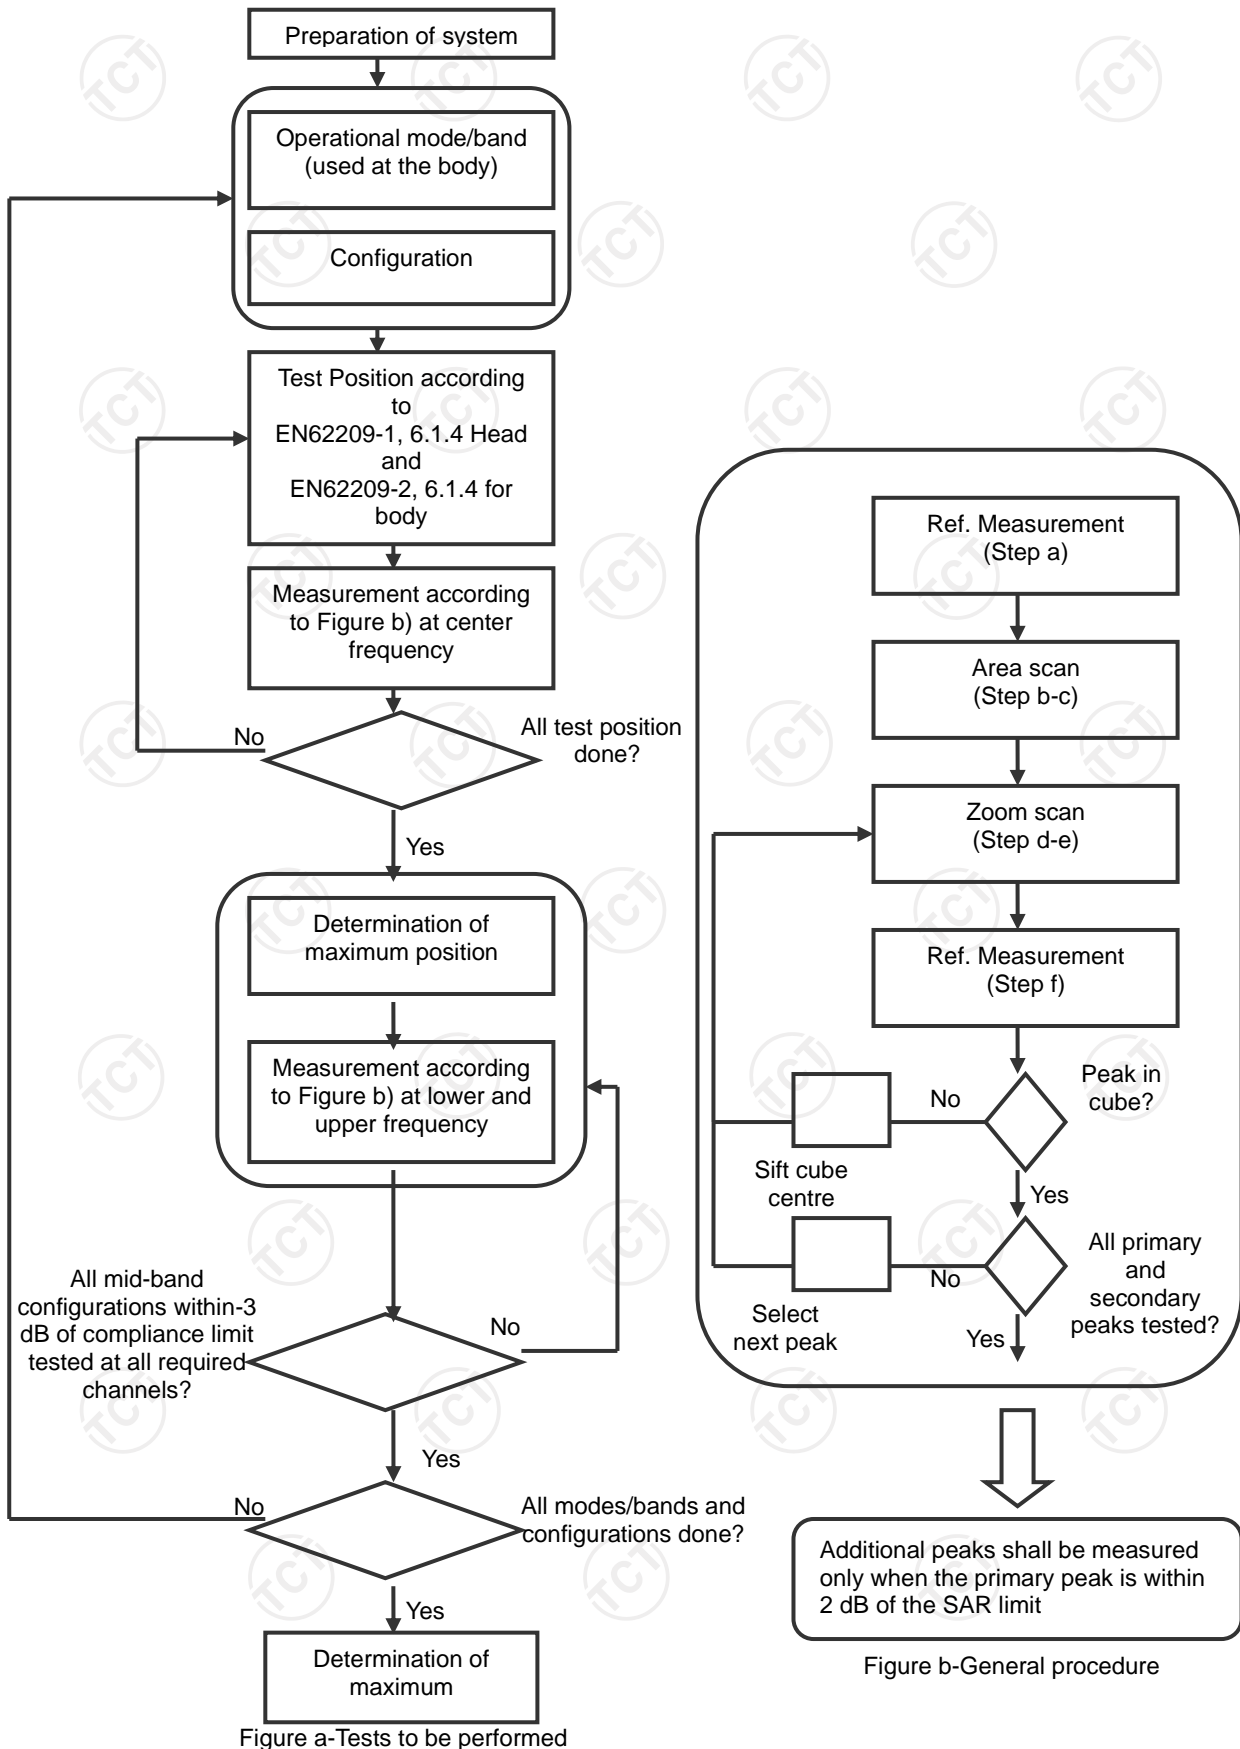

7.2. Measurement Procedure

Setup a Call Connection

Establish a call in handset at the maximum power level with a base station simulator via air interface, or make the EUT estimate by itself in testing band.

Power Reference Measurement

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

Area Scan

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard.

Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 4 points within a cube whose base faces are cantered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

Power Drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have OPENSAR software stop the measurements if this limit is exceeded. If the power drifts more than 5%, the SAR will be retested.

8. Conducted Output Power

Band: GSM 900	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
Channel	975	60	124		975	60	124
Frequency	880.2	902	914.8		880.2	902	914.8
GSM (GMSK, Voice)	32.27	32.29	32.25	-9.03	23.24	23.26	23.22
GPRS (GMSK, 1-slot)	32.37	32.37	32.38	-9.03	23.34	23.34	23.35
GPRS (GMSK, 2-slot)	31.61	31.67	31.68	-6.02	25.59	25.65	25.66
GPRS (GMSK, 3-slot)	29.89	29.90	29.93	-4.26	25.63	25.64	25.67
GPRS (GMSK, 4-slot)	28.72	28.78	28.75	-3.01	25.71	25.77	25.74
EGPRS (GMSK, 1-slot)	26.83	26.81	26.66	-9.03	17.80	17.78	17.63
EGPRS (GMSK, 2-slot)	25.69	25.71	25.58	-6.02	19.67	19.69	19.56
EGPRS (GMSK, 3-slot)	23.45	23.44	23.35	-4.26	19.19	19.18	19.09
EGPRS (GMSK, 4-slot)	22.03	22.05	22.03	-3.01	19.02	19.04	19.02
Band: GSM 1800	Measured Power (dBm)			Calculation (dB)	Averaged Power (dBm)		
Channel	512	700	885		512	700	885
Frequency	1710.2	1747.8	1784.8		1710.2	1747.8	1784.8
GSM (GMSK, Voice)	29.75	29.88	29.78	-9.03	20.72	20.85	20.75
GPRS (GMSK, 1-slot)	28.77	29.91	29.82	-9.03	19.74	20.88	20.79
GPRS (GMSK, 2-slot)	28.74	28.66	28.67	-6.02	22.72	22.64	22.65
GPRS (GMSK, 3-slot)	27.39	27.38	27.41	-4.26	23.13	23.12	23.15
GPRS (GMSK, 4-slot)	26.66	26.67	26.52	-3.01	23.65	23.66	23.51
EGPRS (GMSK, 1-slot)	25.87	25.10	24.40	-9.03	16.84	16.07	15.37
EGPRS (GMSK, 2-slot)	24.33	24.03	23.21	-6.02	18.31	18.01	17.19
EGPRS (GMSK, 3-slot)	22.03	21.94	21.03	-4.26	17.77	17.68	16.77
EGPRS (GMSK, 4-slot)	20.18	20.02	19.57	-3.01	17.17	17.01	16.56

Note:

1. Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

2. According to the conducted power as above, the body measurements are performed with 4Txslots for 900MHz and 1800 MHz for GPRS.

Band	WCDMA Band I			WCDMA Band VIII		
Channel	9612	9750	9888	2712	2788	2863
Frequency	1922.4	1950	1977.6	882.4	897.6	912.6
RMC 12.2Kbps	22.28	22.23	22.61	22.35	22.43	22.34
HSDPA Subtest-1	21.82	21.95	21.87	22.05	22.18	22.10
HSDPA Subtest-2	21.52	21.64	21.59	21.75	21.87	21.82
HSDPA Subtest-3	21.46	21.59	21.53	21.69	21.82	21.76
HSDPA Subtest-4	21.40	21.57	21.52	21.63	21.80	21.75
HSUPA Subtest-1	21.16	21.29	21.19	21.39	21.52	21.42
HSUPA Subtest-2	21.06	21.19	21.11	21.29	21.42	21.34
HSUPA Subtest-3	21.01	20.82	20.79	21.24	21.05	21.02
HSUPA Subtest-4	20.62	20.76	20.67	20.85	20.99	20.90
HSUPA Subtest-5	20.53	20.60	20.58	20.76	20.83	20.81

Note:

1. According to the power listed above, the HSDPA and HSUPA were not determined for SAR testing.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2kbps RMC(reference measurement channel) configuration in test loop mode

WLAN 2.4G						
Mode	802.11b			802.11g		
Channel	1	7	13	1	7	13
Frequency	2412	2442	2472	2412	2442	2472
Average Power (dBm)	14.51	15.28	13.49	12.69	13.19	11.65
Mode	802.11n(HT20)			802.11n(HT40)		
Channel	1	7	13	3	7	11
Frequency	2412	2442	2472	2422	2442	2462
Average Power (dBm)	12.22	13.35	11.63	12.13	12.13	10.96
BDR+EDR						
Mode	GFSK		Pi/4DQPSK		8DPSK	
Average Power (dBm)	8.86		6.45		6.39	
Mode	BLE(1M)					
Frequency	2402		2440		2480	
Average Power (dBm)	-5.12		-3.99		-6.58	
Note: 1. Because the output power(eirp) of Bluetooth of the EUT is less than 20mW(13dBm), so standalone SAR are exempt according to EN62479.						

WLAN 5.2G		
Mode	IEEE 802.11a	IEEE 802.11n HT20
Channel	36	36
Frequency	5180	5180
Average Power (dBm)	11.97	11.27
Mode	IEEE 802.11n HT40	IEEE 802.11ac VHT20
Channel	38	36
Frequency	5190	5180
Average Power (dBm)	11.50	11.90
Mode	IEEE 802.11ac VHT40	IEEE 802.11ac VHT80
Channel	38	42
Frequency	5190	5210
Average Power (dBm)	11.42	11.38
WLAN 5.3G		
Mode	IEEE 802.11a	IEEE 802.11n HT20
Channel	64	64
Frequency	5320	5320
Average Power (dBm)	12.36	12.15
Mode	IEEE 802.11n HT40	IEEE 802.11ac VHT20
Channel	62	64
Frequency	5310	5320
Average Power (dBm)	12.26	12.66
Mode	IEEE 802.11ac VHT40	IEEE 802.11ac VHT80
Channel	62	58
Frequency	5310	5290
Average Power (dBm)	12.20	12.13

WLAN 5.6G						
Mode	IEEE 802.11a			IEEE 802.11n HT20		
Channel	100	140		100	140	
Frequency	5500	5700		5500	5700	
Average Power (dBm)	10.29	10.62		10.21	10.46	
Mode	IEEE 802.11n HT40			IEEE 802.11ac VHT20		
Channel	102	134		100	140	
Frequency	5510	5670		5500	5700	
Average Power (dBm)	9.73	9.66		10.18	10.24	
Mode	IEEE 802.11ac VHT40			IEEE 802.11ac VHT80		
Channel	102	134		106	122	
Frequency	5510	5670		5530	5610	
Average Power (dBm)	9.31	9.58		9.40	9.36	
WLAN 5.8G						
Mode	IEEE 802.11a6m			IEEE 802.11n HT20		
Channel	149	157	165	149	157	165
Frequency	5745	5785	5825	5745	5785	5825
Average Power (dBm)	13.91	13.80	11.44	12.92	13.32	11.08
Mode	IEEE 802.11n HT40			IEEE 802.11ac VHT20		
Channel	151	159		149	157	165
Frequency	5755	5795		5745	5785	5825
Average Power (dBm)	11.70	11.77		13.36	13.21	11.33
Mode	IEEE 802.11ac VHT40			IEEE 802.11ac VHT80		
Channel	151	159		155		
Frequency	5755	5795		5775		
Average Power (dBm)	12.83	12.48		12.25		

NFC

About NFC reference to Reference levels for electric, magnetic and electromagnetic fields (0Hz to 300GHz, unperturbed ms values)

Frequency range	E-field strength (V/m)	H-field strength (A/m)	B-field (uT)	Equivalent plane wave power density Seq(W/m2)
0-1Hz	--	3.2×10^4	4×10^4	--
1-8Hz	10000	$3.2 \times 10^4/f^2$	$4 \times 10^4/f^2$	--
8-25Hz	10000	$4000/f$	$5000/f$	--
0.025-0.8KHz	$250/f$	$4/f$	$5/f$	--
0.8-3KHz	$250/f$	5	6.25	--
3-150KHz	87	5	6.25	--
0.15-1MHz	87	$0.73/f$	$0.92/f$	--
1-10MHz	$87/f^{1/2}$	$0.73/f$	$0.92/f$	--
10-400MHz	28	0.073	0.092	2
400-2000MHz	$1.375f^{1/2}$	$0.0037f^{1/2}$	$0.0046f^{1/2}$	$f/200$
2-300GHz	61	0.16	0.20	10

Reference to TCT250207E050 en 62311

H-Filed Strength at 10 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Test Position A (A/m)	Test Position B (A/m)	Test Position C (A/m)	Result (A/m)	Limits Test (A/m)
13.56	0.04	0.03	0.04	0.064	0.073

$$H = \sqrt{A^2 + B^2 + C^2} = \sqrt{0.04^2 + 0.03^2 + 0.04^2} \text{ A/m} = 0.064 \text{ A/m}$$

Limit = 0.073 A/m

So the SAR measurement for the of NFC is not necessary

The conducted power measurement results for LTE

LTE-BAND 1

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	5MHz	Low range	1	0	22.11	21.93
				max	22.15	21.97
			Partial	0	22.06	21.88
				max	22.07	21.89
		Mid range	1	0	22.14	21.96
				max	22.15	21.97
			Partial	0	22.06	21.88
				max	22.11	21.93
		High range	1	0	22.25	22.07
				max	22.26	22.08
			Partial	0	22.18	22.00
				max	22.23	22.04
	20MHz	Low range	1	0	22.15	21.96
				max	22.06	21.88
			Partial	0	21.92	21.74
				max	21.92	21.74
		Mid range	1	0	22.01	21.83
				max	22.11	21.93
			Partial	0	21.92	21.74
				max	22.06	21.88
		High range	1	0	21.92	21.74
				max	22.08	21.90
			Partial	0	22.07	21.89
				max	22.10	21.92

LTE-BAND 3

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	1.4MHz	Low range	1	0	22.10	21.92
				max	22.10	21.92
			Partial	0	22.21	22.03
				max	22.16	21.98
		Mid range	1	0	22.16	21.98
				max	21.98	21.80
			Partial	0	22.05	21.87
				max	22.06	21.88
		High range	1	0	21.78	21.60
				max	21.74	21.56
			Partial	0	22.02	21.84
				max	21.99	21.80
	5 MHz	Low range	1	0	22.34	22.15
				max	22.29	22.11
			Partial	0	22.27	22.09
				max	22.24	22.06
		Mid range	1	0	22.14	21.96
				max	22.09	21.91
			Partial	0	22.12	21.94
				max	22.06	21.88
		High range	1	0	22.05	21.87
				max	22.05	21.87
			Partial	0	21.94	21.76
				max	21.98	21.80
	20 MHz	Low range	1	0	22.21	22.03
				max	22.19	22.01
			Partial	0	22.02	21.84
				max	22.02	21.84
		Mid range	1	0	22.09	21.91
				max	22.12	21.95
			Partial	0	22.06	21.87
				max	22.02	21.85
		High range	1	0	21.84	21.66
				max	21.87	21.69
			Partial	0	21.97	21.85
				max	21.96	21.84

LTE-BAND 7

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	5MHz	Low range	1	0	21.64	21.46
				max	21.61	21.43
			Partial	0	21.64	21.46
				max	21.64	21.46
		Mid range	1	0	21.76	21.58
				max	21.65	21.47
			Partial	0	21.21	21.03
				max	21.25	21.07
		High range	1	0	21.31	21.13
				max	21.30	21.12
			Partial	0	21.32	21.14
				max	21.34	21.15
	20MHz	Low range	1	0	21.57	21.38
				max	21.58	21.40
			Partial	0	21.11	20.93
				max	21.05	20.87
		Mid range	1	0	21.60	21.42
				max	21.18	21.00
			Partial	0	20.99	20.81
				max	21.10	20.92
		High range	1	0	21.05	20.87
				max	21.10	20.92
			Partial	0	21.14	20.96
				max	21.15	20.97

LTE-BAND 8

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	1.4MHz	Low range	1	0	23.21	23.03
				max	23.18	23.00
			Partial	0	23.34	23.16
				max	23.38	23.20
		Mid range	1	0	23.28	23.10
				max	23.25	23.07
			Partial	0	23.43	23.25
				max	23.44	23.26
		High range	1	0	23.11	22.93
				max	22.59	22.41
			Partial	0	22.86	22.68
				max	22.85	22.66
	5 MHz	Low range	1	0	23.42	23.23
				max	23.39	23.21
			Partial	0	23.45	23.27
				max	23.33	23.15
		Mid range	1	0	23.47	23.29
				max	23.48	23.30
			Partial	0	23.44	23.26
				max	23.44	23.26
		High range	1	0	23.48	23.30
				max	23.18	23.00
			Partial	0	22.93	22.75
				max	22.80	22.62
	10 MHz	Low range	1	0	23.39	23.21
				max	23.39	23.21
			Partial	0	23.42	23.24
				max	23.41	23.23
		Mid range	1	0	23.45	23.28
				max	23.43	23.25
			Partial	0	23.14	22.95
				max	22.90	22.73
		High range	1	0	23.38	23.20
				max	22.85	22.67
			Partial	0	22.88	22.76
				max	22.76	22.64

LTE-BAND 20

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	5MHz	Low range	1	0	23.39	23.21
				max	23.34	23.16
			Partial	0	23.32	23.14
				max	23.39	23.21
		Mid range	1	0	23.30	23.12
				max	23.09	22.91
			Partial	0	22.81	22.63
				max	22.77	22.59
		High range	1	0	22.99	22.81
				max	22.98	22.80
			Partial	0	23.00	22.82
				max	22.84	22.65
	20MHz	Low range	1	0	23.34	23.15
				max	23.31	23.13
			Partial	0	23.10	22.92
				max	23.14	22.96
		Mid range	1	0	23.21	23.03
				max	23.21	23.03
			Partial	0	23.18	23.00
				max	23.28	23.10
		High range	1	0	23.06	22.88
				max	23.00	22.82
			Partial	0	22.70	22.52
				max	22.58	22.40

LTE-BAND 28

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	3MHz	Low range	1	0	23.01	22.83
				max	22.97	22.79
			Partial	0	22.94	22.76
				max	23.00	22.82
		Mid range	1	0	23.03	22.85
				max	23.01	22.83
			Partial	0	22.98	22.80
				max	22.94	22.76
		High range	1	0	22.72	22.54
				max	22.72	22.54
			Partial	0	22.69	22.51
				max	22.76	22.57
	5MHz	Low range	1	0	23.31	23.12
				max	23.27	23.09
			Partial	0	23.16	22.98
				max	23.20	23.02
		Mid range	1	0	23.31	23.13
				max	23.32	23.14
			Partial	0	23.26	23.08
				max	23.22	23.04
		High range	1	0	23.10	22.92
				max	23.11	22.93
			Partial	0	23.01	22.83
				max	22.91	22.73
	20MHz	Low range	1	0	23.21	23.03
				max	23.27	23.09
			Partial	0	23.02	22.84
				max	23.16	22.98
		Mid range	1	0	23.22	23.04
				max	23.07	22.90
			Partial	0	23.03	22.84
				max	22.91	22.74
		High range	1	0	23.01	22.83
				max	22.90	22.72
			Partial	0	23.04	22.92
				max	22.83	22.71

LTE-BAND 38

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	5MHz	Low range	1	0	21.67	21.49
				max	21.62	21.44
			Partial	0	21.73	21.55
				max	21.71	21.53
		Mid range	1	0	21.74	21.56
				max	21.73	21.55
			Partial	0	21.74	21.56
				max	21.76	21.58
		High range	1	0	21.76	21.58
				max	21.90	21.72
			Partial	0	21.91	21.73
				max	21.94	21.75
	20MHz	Low range	1	0	21.62	21.43
				max	21.68	21.50
			Partial	0	21.57	21.39
				max	21.59	21.41
		Mid range	1	0	21.68	21.50
				max	21.80	21.62
			Partial	0	21.61	21.43
				max	21.70	21.52
		High range	1	0	21.85	21.67
				max	21.70	21.52
			Partial	0	21.65	21.47
				max	21.74	21.56

LTE-BAND 40

Condition	Channel Bandwidth	Channel	RB allocation		Average Power (dBm) QPSK	Average Power (dBm) 16-QAM
			RB Size	RB Offset		
Normal	5MHz	Low range	1	0	21.87	21.69
				max	21.81	21.63
			Partial	0	21.88	21.70
				max	21.87	21.69
		Mid range	1	0	21.80	21.62
				max	21.73	21.55
			Partial	0	21.81	21.63
				max	21.74	21.56
		High range	1	0	21.61	21.43
				max	21.52	21.34
			Partial	0	21.61	21.43
				max	21.55	21.36
	20MHz	Low range	1	0	21.82	21.63
				max	21.80	21.62
			Partial	0	21.69	21.51
				max	21.67	21.49
		Mid range	1	0	21.79	21.61
				max	21.79	21.61
			Partial	0	21.62	21.44
				max	21.58	21.40
		High range	1	0	21.55	21.37
				max	21.54	21.36
			Partial	0	21.47	21.29
				max	21.44	21.26

9. SAR Test Results Summary

9.1. Head SAR 10g Value

Band	Mode	Position	CH.	Freq. (MHz)	Meas. Power (dBm)	Max. Tune-Up Power (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)	Limit (W/Kg)
GSM900	voice	Right Cheek	60	902	32.29	32.50	-1.52	0.11	1.050	0.12	2.00
		Right Tilt	60	902	32.29	32.50	0.12	0.08	1.050	0.08	
		Left Cheek	60	902	32.29	32.50	-4.42	0.14	1.050	0.15	
		Left Tilt	60	902	32.29	32.50	-1.59	0.09	1.050	0.09	
GSM1800	voice	Right Cheek	700	1747.8	29.88	30.00	-2.95	0.07	1.028	0.07	
		Right Tilt	700	1747.8	29.88	30.00	1.62	0.03	1.028	0.03	
		Left Cheek	700	1747.8	29.88	30.00	-4.12	0.09	1.028	0.09	
		Left Tilt	700	1747.8	29.88	30.00	-0.15	0.06	1.028	0.06	
WCDMA Band I	RMC	Right Cheek	9888	1977.6	22.61	23.00	2.64	0.06	1.094	0.07	
		Right Tilt	9888	1977.6	22.61	23.00	0.15	0.04	1.094	0.04	
		Left Cheek	9888	1977.6	22.61	23.00	4.82	0.09	1.094	0.10	
		Left Tilt	9888	1977.6	22.61	23.00	-1.52	0.03	1.094	0.03	
WCDMA Band VIII	RMC	Right Cheek	2788	897.6	22.43	22.50	-1.52	0.10	1.016	0.10	
		Right Tilt	2788	897.6	22.43	22.50	0.15	0.08	1.016	0.08	
		Left Cheek	2788	897.6	22.43	22.50	-4.01	0.12	1.016	0.12	
		Left Tilt	2788	897.6	22.43	22.50	-0.16	0.05	1.016	0.05	
802.11b	DATA	Right Cheek	7	2442	15.28	15.50	-1.90	0.05	1.052	0.05	
		Right Tilt	7	2442	15.28	15.50	0.68	0.03	1.052	0.03	
		Left Cheek	7	2442	15.28	15.50	2.90	0.07	1.052	0.07	
		Left Tilt	7	2442	15.28	15.50	-1.53	0.03	1.052	0.03	
802.11a	DATA	Right Cheek	36	5180	11.97	12.00	1.52	0.07	1.007	0.07	
		Right Tilt	36	5180	11.97	12.00	1.30	0.03	1.007	0.03	
		Left Cheek	36	5180	11.97	12.00	-1.62	0.08	1.007	0.08	
		Left Tilt	36	5180	11.97	12.00	-1.57	0.04	1.007	0.04	

802.11ac	DATA	Right Cheek	64	5320	12.66	13.00	1.08	0.07	1.081	0.08	2.00
		Right Tilt	64	5320	12.66	13.00	1.63	0.05	1.081	0.05	
		Left Cheek	64	5320	12.66	13.00	-0.10	0.08	1.081	0.09	
		Left Tilt	64	5320	12.66	13.00	-2.84	0.03	1.081	0.03	
802.11a	DATA	Right Cheek	140	5700	10.62	11.00	-1.31	0.11	1.091	0.12	
		Right Tilt	140	5700	10.62	11.00	1.54	0.07	1.091	0.08	
		Left Cheek	140	5700	10.62	11.00	0.79	0.13	1.091	0.14	
		Left Tilt	140	5700	10.62	11.00	0.90	0.08	1.091	0.09	
802.11a	DATA	Right Cheek	149	5745	13.91	14.00	-1.62	0.13	1.021	0.13	
		Right Tilt	149	5745	13.91	14.00	0.12	0.09	1.021	0.09	
		Left Cheek	149	5745	13.91	14.00	1.62	0.15	1.021	0.15	
		Left Tilt	149	5745	13.91	14.00	-2.91	0.06	1.021	0.06	

Band	Mode	Test Position	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)
LTE Band 1	QPSK (20MHz)	Right Cheek	18100	1930	1	0	22.15	22.50	1.52	0.26	1.084	0.28
		Right Tilt	18100	1930	1	0	22.15	22.50	0.30	0.17	1.084	0.18
		Left Cheek	18100	1930	1	0	22.15	22.50	-0.90	0.29	1.084	0.31
		Left Tilt	18100	1930	1	0	22.15	22.50	-0.91	0.20	1.084	0.22
LTE Band 3	QPSK (20MHz)	Right Cheek	19300	1720	1	0	22.21	22.50	-1.60	0.21	1.069	0.22
		Right Tilt	19300	1720	1	0	22.21	22.50	0.15	0.16	1.069	0.17
		Left Cheek	19300	1720	1	0	22.21	22.50	-1.82	0.24	1.069	0.26
		Left Tilt	19300	1720	1	0	22.21	22.50	-2.54	0.14	1.069	0.15
LTE Band 7	QPSK (20MHz)	Right Cheek	21100	2535	1	0	21.60	22.00	2.69	0.26	1.096	0.29
		Right Tilt	21100	2535	1	0	21.60	22.00	1.25	0.16	1.096	0.18
		Left Cheek	21100	2535	1	0	21.60	22.00	-0.62	0.30	1.096	0.33
		Left Tilt	21100	2535	1	0	21.60	22.00	0.18	0.12	1.096	0.13
LTE Band 8	QPSK (10MHz)	Right Cheek	21625	897.5	1	0	23.45	23.50	-1.52	0.10	1.012	0.10
		Right Tilt	21625	897.5	1	0	23.45	23.50	0.89	0.07	1.012	0.07
		Left Cheek	21625	897.5	1	0	23.45	23.50	-0.25	0.14	1.012	0.14
		Left Tilt	21625	897.5	1	0	23.45	23.50	0.17	0.09	1.012	0.09
LTE Band 20	QPSK (20MHz)	Right Cheek	24250	842	1	0	23.34	23.50	0.94	0.13	1.038	0.13
		Right Tilt	24250	842	1	0	23.34	23.50	1.51	0.09	1.038	0.09
		Left Cheek	24250	842	1	0	23.34	23.50	-1.62	0.16	1.038	0.17
		Left Tilt	24250	842	1	0	23.34	23.50	-1.62	0.07	1.038	0.07

LTE Band 28	QPSK (20MHz)	Right Cheek	27460	728	1	0	23.27	23.50	0.70	0.11	1.054	0.12
		Right Tilt	27460	728	1	0	23.27	23.50	1.62	0.08	1.054	0.08
		Left Cheek	27460	728	1	0	23.27	23.50	-1.62	0.13	1.054	0.14
		Left Tilt	27460	728	1	0	23.27	23.50	-1.35	0.07	1.054	0.07
LTE Band 38	QPSK (20MHz)	Right Cheek	38150	2610	1	0	21.85	22.00	-1.62	0.06	1.035	0.06
		Right Tilt	38150	2610	1	0	21.85	22.00	0.10	0.04	1.035	0.04
		Left Cheek	38150	2610	1	0	21.85	22.00	-0.91	0.08	1.035	0.08
		Left Tilt	38150	2610	1	0	21.85	22.00	1.78	0.03	1.035	0.03
LTE Band 40	QPSK (20MHz)	Right Cheek	38750	2310	1	0	21.82	22.00	-1.60	0.15	1.042	0.16
		Right Tilt	38750	2310	1	0	21.82	22.00	0.18	0.11	1.042	0.11
		Left Cheek	38750	2310	1	0	21.82	22.00	-2.61	0.17	1.042	0.18
		Left Tilt	38750	2310	1	0	21.82	22.00	1.10	0.12	1.042	0.13

9.2. Body-Worn 10g SAR Value

Band	Mode	Test Position with 5mm	CH.	Freq. (MHz)	Meas. Power (dBm)	Max. Tune-Up Power (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)	Limit (W/Kg)
GSM900	voice	Back	60	902	32.29	32.50	1.41	0.20	1.050	0.21	2.00
		Front	60	902	32.29	32.50	-1.15	0.14	1.050	0.15	
	GPRS 4 slots	Back	60	902	28.78	29.00	3.90	0.24	1.052	0.25	
		Front	60	902	28.78	29.00	2.91	0.12	1.052	0.13	
		Left	60	902	28.78	29.00	0.10	0.02	1.052	0.02	
		Right	60	902	28.78	29.00	-1.27	0.02	1.052	0.02	
		Top	60	902	28.78	29.00	/	<0.01	/	<0.01	
		Bottom	60	902	28.78	29.00	1.13	0.04	1.052	0.04	
GSM1800	voice	Back	700	1747.8	29.88	30.00	-1.89	0.44	1.028	0.45	
		Front	700	1747.8	29.88	30.00	-0.91	0.32	1.028	0.33	
	GPRS 4 slots	Back	700	1747.8	26.67	27.00	-2.64	0.38	1.079	0.41	
		Front	700	1747.8	26.67	27.00	-0.62	0.24	1.079	0.26	
		Left	700	1747.8	26.67	27.00	0.11	0.06	1.079	0.06	
		Right	700	1747.8	26.67	27.00	-1.95	0.05	1.079	0.05	
		Top	700	1747.8	26.67	27.00	-0.84	0.02	1.079	0.02	
		Bottom	700	1747.8	26.67	27.00	1.62	0.08	1.079	0.09	
WCDMA Band I	RMC	Back	9888	1977.6	22.61	23.00	-1.75	0.63	1.094	0.69	
		Front	9888	1977.6	22.61	23.00	-2.61	0.46	1.094	0.50	
		Left	9888	1977.6	22.61	23.00	-1.78	0.10	1.094	0.11	
		Right	9888	1977.6	22.61	23.00	-1.25	0.09	1.094	0.10	
		Top	9888	1977.6	22.61	23.00	1.05	0.02	1.094	0.02	
		Bottom	9888	1977.6	22.61	23.00	-2.99	0.10	1.094	0.11	

WCDMA Band VIII	RMC	Back	2788	897.6	22.43	22.50	4.91	0.24	1.016	0.24
		Front	2788	897.6	22.43	22.50	1.74	0.11	1.016	0.11
		Left	2788	897.6	22.43	22.50	0.56	0.05	1.016	0.05
		Right	2788	897.6	22.43	22.50	1.90	0.04	1.016	0.04
		Top	2788	897.6	22.43	22.50	3.75	0.02	1.016	0.02
		Bottom	2788	897.6	22.43	22.50	0.10	0.04	1.016	0.04
802.11b	DATA	Back	7	2442	15.28	15.50	4.46	0.09	1.052	0.09
		Front	7	2442	15.28	15.50	3.74	0.05	1.052	0.05
		Left	7	2442	15.28	15.50	0.15	0.02	1.052	0.02
		Right	7	2442	15.28	15.50	/	<0.01	/	<0.01
		Top	7	2442	15.28	15.50	0.89	0.03	1.052	0.03
		Bottom	7	2442	15.28	15.50	/	<0.01	/	<0.01
802.11a	DATA	Back	36	5180	11.97	12.00	-4.63	0.10	1.007	0.10
		Front	36	5180	11.97	12.00	1.51	0.07	1.007	0.07
		Left	36	5180	11.97	12.00	0.62	0.02	1.007	0.02
		Right	36	5180	11.97	12.00	1.20	0.02	1.007	0.02
		Top	36	5180	11.97	12.00	1.63	0.03	1.007	0.03
		Bottom	36	5180	11.97	12.00	/	<0.01	/	<0.01
802.11ac	DATA	Back	64	5320	12.66	13.00	1.15	0.10	1.081	0.11
		Front	64	5320	12.66	13.00	-1.30	0.06	1.081	0.06
		Left	64	5320	12.66	13.00	0.15	0.02	1.081	0.02
		Right	64	5320	12.66	13.00	1.52	0.02	1.081	0.02
		Top	64	5320	12.66	13.00	-4.62	0.02	1.081	0.02
		Bottom	64	5320	12.66	13.00	/	<0.01	/	<0.01

2.00

802.11a	DATA	Back	140	5700	10.62	11.00	1.50	0.20	1.091	0.22	2.00
		Front	140	5700	10.62	11.00	-3.88	0.12	1.091	0.13	
		Left	140	5700	10.62	11.00	1.62	0.05	1.091	0.05	
		Right	140	5700	10.62	11.00	-2.47	0.03	1.091	0.03	
		Top	140	5700	10.62	11.00	0.15	0.06	1.091	0.07	
		Bottom	140	5700	10.62	11.00	-1.30	0.02	1.091	0.02	
802.11a	DATA	Back	149	5745	13.91	14.00	-3.58	0.18	1.021	0.18	
		Front	149	5745	13.91	14.00	-1.22	0.12	1.021	0.12	
		Left	149	5745	13.91	14.00	0.69	0.05	1.021	0.05	
		Right	149	5745	13.91	14.00	1.52	0.02	1.021	0.02	
		Top	149	5745	13.91	14.00	0.75	0.03	1.021	0.03	
		Bottom	149	5745	13.91	14.00	/	<0.01	/	<0.01	

Band	Mode	Test Position with 5mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)
LTE Band 1	QPSK (20MHz)	Back	18100	1930	1	0	22.15	22.50	1.53	0.83	1.084	0.90
		Front	18100	1930	1	0	22.15	22.50	4.15	0.59	1.084	0.64
		Left	18100	1930	1	0	22.15	22.50	1.30	0.15	1.084	0.16
		Right	18100	1930	1	0	22.15	22.50	-1.58	0.12	1.084	0.13
		Top	18100	1930	1	0	22.15	22.50	0.62	0.06	1.084	0.07
		Bottom	18100	1930	1	0	22.15	22.50	-1.77	0.15	1.084	0.16
LTE Band 3	QPSK (20MHz)	Back	19300	1720	1	0	22.21	22.50	-1.92	0.61	1.069	0.65
		Front	19300	1720	1	0	22.21	22.50	0.61	0.46	1.069	0.49
		Left	19300	1720	1	0	22.21	22.50	1.25	0.10	1.069	0.11
		Right	19300	1720	1	0	22.21	22.50	-1.57	0.07	1.069	0.07
		Top	19300	1720	1	0	22.21	22.50	0.97	0.03	1.069	0.03
		Bottom	19300	1720	1	0	22.21	22.50	0.10	0.08	1.069	0.09

LTE Band 7	QPSK (20MHz)	Back	20850	2510	1	99	21.58	22.00	0.16	1.03	1.102	1.13
			21100	2535	1	0	21.60	22.00	-1.05	1.10	1.096	1.21
			21350	2560	18	82	21.14	22.00	-2.92	0.94	1.219	1.15
		Front	21100	2535	1	0	21.60	22.00	0.08	0.78	1.096	0.86
		Left	21100	2535	1	0	21.60	22.00	1.62	0.23	1.096	0.25
		Right	21100	2535	1	0	21.60	22.00	-1.20	0.21	1.096	0.23
		Top	21100	2535	1	0	21.60	22.00	0.15	0.12	1.096	0.13
		Bottom	21100	2535	1	0	21.60	22.00	0.87	0.20	1.096	0.22
LTE Band 8	QPSK (10MHz)	Back	21625	897.5	1	0	23.45	23.50	2.30	0.22	1.012	0.22
		Front	21625	897.5	1	0	23.45	23.50	-2.61	0.13	1.012	0.13
		Left	21625	897.5	1	0	23.45	23.50	0.75	0.03	1.012	0.03
		Right	21625	897.5	1	0	23.45	23.50	-1.62	0.02	1.012	0.02
		Top	21625	897.5	1	0	23.45	23.50	/	<0.01	/	<0.01
		Bottom	21625	897.5	1	0	23.45	23.50	0.62	0.03	1.012	0.03
LTE Band 20	QPSK (20MHz)	Back	24250	842	1	0	23.34	23.50	1.52	0.56	1.038	0.58
		Front	24250	842	1	0	23.34	23.50	-1.63	0.42	1.038	0.44
		Left	24250	842	1	0	23.34	23.50	0.77	0.11	1.038	0.11
		Right	24250	842	1	0	23.34	23.50	1.32	0.10	1.038	0.10
		Top	24250	842	1	0	23.34	23.50	0.79	0.03	1.038	0.03
		Bottom	24250	842	1	0	23.34	23.50	0.21	0.16	1.038	0.17
LTE Band 28	QPSK (20MHz)	Back	27460	728	1	0	23.27	23.50	1.52	0.31	1.054	0.33
		Front	27460	728	1	0	23.27	23.50	-1.50	0.18	1.054	0.19
		Left	27460	728	1	0	23.27	23.50	0.61	0.06	1.054	0.06
		Right	27460	728	1	0	23.27	23.50	0.10	0.04	1.054	0.04
		Top	27460	728	1	0	23.27	23.50	-1.30	0.02	1.054	0.02
		Bottom	27460	728	1	0	23.27	23.50	0.17	0.08	1.054	0.08

LTE Band 38	QPSK (20MHz)	Back	38150	2610	1	0	21.85	22.00	-1.50	0.50	1.035	0.52
		Front	38150	2610	1	0	21.85	22.00	-1.62	0.36	1.035	0.37
		Left	38150	2610	1	0	21.85	22.00	0.30	0.10	1.035	0.10
		Right	38150	2610	1	0	21.85	22.00	0.17	0.07	1.035	0.07
		Top	38150	2610	1	0	21.85	22.00	-1.52	0.03	1.035	0.03
		Bottom	38150	2610	1	0	21.85	22.00	1.30	0.09	1.035	0.09
LTE Band 40	QPSK (20MHz)	Back	38750	2310	1	0	21.82	22.00	1.63	0.32	1.042	0.33
		Front	38750	2310	1	0	21.82	22.00	-2.61	0.16	1.042	0.17
		Left	38750	2310	1	0	21.82	22.00	0.75	0.06	1.042	0.06
		Right	38750	2310	1	0	21.82	22.00	1.62	0.08	1.042	0.08
		Top	38750	2310	1	0	21.82	22.00	0.75	0.02	1.042	0.02
		Bottom	38750	2310	1	0	21.82	22.00	-1.50	0.12	1.042	0.13

Note:

1. Body-worn SAR testing was performed at 0mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Determination of the worst-case configuration and all configurations with less than 3 dB of applicable limits.
3. When $10g \text{ SAR} \leq 1.0 \text{ W/kg}$, testing for low and high channel is optional.

9.3. Wrist Worn 10g SAR

Band	Mode	Test Position with 0mm	CH.	Freq. (MHz)	Meas. Power (dBm)	Max. Tune-Up Power (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)	Limit (W/Kg)
GSM900	voice	Back	60	902	32.29	32.50	2.56	0.27	1.050	0.28	4.00
	GPRS 4 slots	Back	60	902	28.78	29.00	3.66	0.26	1.052	0.27	
GSM1800	voice	Back	700	1747.8	29.88	30.00	-4.08	0.67	1.028	0.69	
	GPRS 4 slots	Back	700	1747.8	26.67	27.00	2.85	0.83	1.079	0.90	
WCDMA Band I	RMC	Back	9888	1977.6	22.61	23.00	-3.75	1.03	1.094	1.13	
WCDMA Band VIII	RMC	Back	2788	897.6	22.43	22.50	2.03	0.33	1.016	0.34	
802.11b	DATA	Back	7	2442	15.28	15.50	4.21	0.12	1.052	0.13	
802.11a	DATA	Back	36	5180	11.97	12.00	0.95	0.12	1.007	0.12	
802.11ac	DATA	Back	64	5320	12.66	13.00	-4.61	0.11	1.081	0.12	
802.11a	DATA	Back	140	5700	10.62	11.00	-2.03	0.15	1.091	0.16	
802.11a	DATA	Back	149	5745	13.91	14.00	-1.69	0.20	1.021	0.20	

Band	Mode	Test Position with 0mm	CH.	Freq. (MHz)	RB allocation	RB offset	Ave. Power (dBm)	Tune-Up Limit (dBm)	Power Drift (%)	Meas. SAR10g (W/kg)	Scaling Factor	Reported SAR10g (W/kg)
LTE Band 1	QPSK (20MHz)	Back	18100	1930	1	0	22.15	22.50	-0.70	1.06	1.084	1.15
LTE Band 3	QPSK (20MHz)	Back	19300	1720	1	0	22.21	22.50	-1.63	1.00	1.069	1.07
LTE Band 7	QPSK (20MHz)	Back	21100	2535	1	0	21.60	22.00	-2.51	1.76	1.096	1.93
LTE Band 8	QPSK (20MHz)	Back	21625	897.5	1	0	23.45	23.50	-1.62	0.71	1.012	0.72
LTE Band 20	QPSK (20MHz)	Back	24250	842	1	0	23.34	23.50	0.73	0.78	1.038	0.81
LTE Band 28	QPSK (20MHz)	Back	27460	728	1	0	23.27	23.50	-1.56	0.67	1.054	0.71
LTE Band 38	QPSK (20MHz)	Back	38150	2610	1	0	21.85	22.00	-0.59	0.86	1.035	0.89
LTE Band 40	QPSK (20MHz)	Back	38750	2310	1	0	21.82	22.00	-3.43	0.72	1.042	0.75

Note:

1. Wrist Worn SAR testing was performed at 0mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Determination of the worst-case configuration and all configurations with less than 3 dB of applicable limits.
3. When $10g\ SAR \leq 2.0\ W/kg$ for wrist worn, testing for low and high channel is optional.

9.4. Simultaneous Transmission Considerations

The device contain transmitters (GSM & WIFI, GPRS & WIFI, RMC & WIFI, HSDPA & WIFI, HSUPA & WIFI, LTE & WIFI, GSM & Bluetooth, LTE & Bluetooth, GPRS & Bluetooth, RMC & Bluetooth, HSDPA & Bluetooth, HSUPA & Bluetooth) can transmit multiple transmission modes at the same time, determining the threshold power level available to the secondary transmitter ($P_{available}$) is to calculate it from the measured peak spatial-average SAR of the primary transmitter (SAR_1) according to the equation:

$$P_{available} = P_{th,m} \cdot (SAR_{lim} - SAR_1) / SAR_{lim}$$

where $P_{th,m}$ is the threshold exclusion power level taken from Annex B of IEC 62479 for the frequency of the secondary transmitter at the separation distance used in the testing.

The maximum SAR_1 of head is **0.33 W/Kg**, so

$$P_{available1} = 20\text{mW} \times (2.0 - 0.33)/2.0 = 16.70\text{mW}$$

The maximum power of 2.4GWIFI is 15.28 dBm = 33.73mw > $P_{available1}$

So the SAR measurement for the secondary transmitter of 2.4Gwifi is necessary

The maximum power of 5GWIFI is 13.91 dBm = 24.60mw > $P_{available1}$

So the SAR measurement for the secondary transmitter of 5Gwifi is necessary

The maximum power of BT is 8.86 dBm = 7.69mw < $P_{available1}$

So the SAR measurement for the secondary transmitter of BT is not necessary

NFC power is less than $p_{available1}$ and can be exempted from evaluation

The maximum SAR_2 of body-worn is **1.21W/Kg**, so

$$P_{available2} = 20\text{mW} \times (2.0 - 1.21)/2.0 = 7.90\text{mW}$$

T The maximum power of 2.4GWIFI is 15.28 dBm = 33.73mw > $P_{available2}$

So the SAR measurement for the secondary transmitter of 2.4Gwifi is necessary

The maximum power of 5GWIFI is 13.91 dBm = 24.60mw > $P_{available2}$

So the SAR measurement for the secondary transmitter of 5Gwifi is necessary

The maximum power of BT is 8.86 dBm = 7.69mw < $P_{available2}$

So the SAR measurement for the secondary transmitter of BT is not necessary

NFC power is less than $p_{available1}$ and can be exempted from evaluation

The maximum SAR_3 of Wrist Worn is **1.93W/Kg**, so

$$P_{available3} = 20\text{mW} \times (4.0 - 1.93)/4.0 = 10.35\text{mW}$$

The maximum power of 2.4GWIFI is 15.28 dBm = 33.73mw > $P_{available3}$

So the SAR measurement for the secondary transmitter of 2.4Gwifi is necessary

The maximum power of 5GWIFI is 13.91 dBm = 24.60mw > $P_{available3}$

So the SAR measurement for the secondary transmitter of 5Gwifi is necessary

The maximum power of BT is 8.86 dBm = 7.69mw < $P_{available3}$

So the SAR measurement for the secondary transmitter of BT is not necessary

NFC power is less than $p_{available1}$ and can be exempted from evaluation

So highest simultaneous Transmission Procedures as below:

Head Mode	Position WWAN SAR10g (W/kg)		Position WLAN-2.4G SAR10g (W/kg)		Position WLAN -5G SAR10g (W/kg)		Σ SAR ₁ (W/kg)	Limit (W/Kg)
	Right Cheek	Left Cheek	Right Cheek	Left Cheek	Right Cheek	Left Cheek		
GSM 900	0.12	0.15	0.05	0.07	0.13	0.15	0.30	2.00
GSM1800	0.07	0.09	0.05	0.07	0.13	0.15	0.24	
WCDMA Band I	0.07	0.10	0.05	0.07	0.13	0.15	0.25	
WCDMA Band VIII	0.10	0.12	0.05	0.07	0.13	0.15	0.27	
LTE Band 1	0.28	0.31	0.05	0.07	0.13	0.15	0.46	
LTE Band 3	0.22	0.26	0.05	0.07	0.13	0.15	0.41	
LTE Band 7	0.29	0.33	0.05	0.07	0.13	0.15	0.48	
LTE Band 8	0.10	0.14	0.05	0.07	0.13	0.15	0.29	
LTE Band 20	0.13	0.17	0.05	0.07	0.13	0.15	0.32	
LTE Band 28	0.12	0.14	0.05	0.07	0.13	0.15	0.29	
LTE Band 38	0.06	0.08	0.05	0.07	0.13	0.15	0.23	
LTE Band 40	0.16	0.18	0.05	0.07	0.13	0.15	0.33	

Note: Σ SAR₁ is equal to the maximum value of the sum of Right Cheek or Left Cheek

Body Mode	Position	WWAN SAR10g (W/kg)	WLAN -2.4G SAR10g (W/kg)	WLAN -5G SAR10g (W/kg)	Σ SAR ₂ (W/kg)	Limit (W/Kg)
GSM 900 (GPRS)	Back	0.25	0.09	0.22	0.47	2.00
GSM1800(Voice)	Back	0.45	0.09	0.22	0.67	
WCDMA Band I	Back	0.69	0.09	0.22	0.91	
WCDMA Band VIII	Back	0.24	0.09	0.22	0.46	
LTE Band 1	Back	0.90	0.09	0.22	1.12	
LTE Band 3	Back	0.65	0.09	0.22	0.87	
LTE Band 7	Back	1.21	0.09	0.22	1.43	
LTE Band 8	Back	0.22	0.09	0.22	0.44	
LTE Band 20	Back	0.58	0.09	0.22	0.80	
LTE Band 28	Back	0.33	0.09	0.22	0.55	
LTE Band 38	Back	0.52	0.09	0.22	0.74	
LTE Band 40	Back	0.33	0.09	0.22	0.55	

Wrist Worn	Position	WWAN SAR10g (W/kg)	WLAN -2.4G SAR10g (W/kg)	WLAN -5G SAR10g (W/kg)	Σ SAR ₂ (W/kg)	Limit (W/Kg)
GSM 900 (Voice)	Back	0.28	0.13	0.20	0.48	4.00
GSM1800(GPRS)	Back	0.90	0.13	0.20	1.10	
WCDMA Band I	Back	1.13	0.13	0.20	1.33	
WCDMA Band VIII	Back	0.34	0.13	0.20	0.54	
LTE Band 1	Back	1.15	0.13	0.20	1.35	
LTE Band 3	Back	1.07	0.13	0.20	1.27	
LTE Band 7	Back	1.93	0.13	0.20	2.13	
LTE Band 8	Back	0.72	0.13	0.20	0.92	
LTE Band 20	Back	0.81	0.13	0.20	1.01	
LTE Band 28	Back	0.71	0.13	0.20	0.91	
LTE Band 38	Back	0.89	0.13	0.20	1.09	
LTE Band 40	Back	0.75	0.13	0.20	0.95	

9.5. Measurement Uncertainty (450MHz-6GHz)

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEC/IEEE 62209-1528: 2020. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Symbol	Input quantity Xi (source of uncertainty)	Prob. Dist.	Unc. a(xi)	Div. qi	u(xi) = a(xi)/qi	Ci	u(y) = Ci *u(xi)	vi
Measurement system errors								
CF	Probe calibration	N ($k = 2$)	5.8	2	2.90	1	2.90	∞
CFdrift	Probe calibration drift	R	0.14	$\sqrt{3}$	0.08	1	0.08	∞
LIN	Probe linearity and detection limit	R	1.98	$\sqrt{3}$	1.14	1	1.14	∞
BBS	Broadband signal	R	0.18	$\sqrt{3}$	0.10	1	0.10	∞
ISO	Probe isotropy	R	4.85	$\sqrt{3}$	2.80	1	2.80	∞
DAE	Other probe and data acquisition errors	N	2.7	1	2.70	1	2.70	∞
AMB	RF ambient and noise	N	1.73	1	1.73	1	1.73	∞
Δ_{xyz}	Probe positioning errors	N	0.81	1	0.81	$2/\delta$	0.81	∞
DAT	Data processing errors	N	2.3	1	2.30	1	2.30	∞
Phantom and device (DUT or validation antenna) errors								
LIQ(σ)	Measurement of phantom conductivity(σ)	N	4.4	1	4.4	$c\epsilon, c\sigma$	4.40	∞
LIQ(T_c)	Temperature effects (medium)	R	2.5	$\sqrt{3}$	1.44	$c\epsilon, c\sigma$	1.44	∞
EPS	Shell permittivity	R	3.4	$\sqrt{3}$	1.96	See 8.4.2.3	0.49	∞
DIS	Distance between the radiating element of the DUT and the phantom medium	N	0.8	1	0.8	2	1.60	∞
Dxyz	Repeatability of positioning the DUT or source against the phantom	N	4	1	4	1	4	5
H	Device holder effects	N	3	1	3	1	3.00	
MOD	Effect of operating mode on probe sensitivity	R	3	$\sqrt{3}$	1.73	1	1.73	∞
TAS	Time-average SAR	R	1.73	$\sqrt{3}$	1.00	1	1.00	∞
RFdrift	Variation in SAR due to drift in output of DUT	N	2.89	1	2.89	1	2.89	
VAL	Validation antenna uncertainty (validation measurement only)	N	4.16	1	4.16	1	4.16	
Pin	Uncertainty in accepted power (validation measurement only)	N	2.89	1	2.89	1	2.89	
Corrections to the SAR result (if applied)								
$C(\epsilon', \sigma)$	Phantom deviation from target (ϵ', σ)	N	2.31	1	2.31	1	2.31	
C(R)	SAR scaling	R	1.15	$\sqrt{3}$	0.66	1	0.66	
u(Δ SAR)	Combined uncertainty						11.26	
U	Expanded uncertainty and effective degrees of freedom					U =	22.52	

UNCERTAINTY FOR PERFORMANCE CHECK

Uncertainty Component	Description	Uncertainty Value(%)	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. 1g(%)	Std. Unc. 10g(%)	v
Measurement system									
Probe calibration	7.2.1	5.8	N	1	1	1	5.8	5.8	∞
Axial isotropy	7.2.1.1	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical isotropy	7.2.1.1	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effects	7.2.1.4	1.00	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.1.2	4.70	R	$\sqrt{3}$	1	1	2.71	2.71	∞
System detection limits	7.2.1.2	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation Response	7.2.1.3	3	N	1	1	1	0.00	0.00	∞
Readout Electronics	7.2.1.5	0.5	N	1	1	1	0.50	0.50	∞
Response Time	7.2.1.6	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	7.2.1.7	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflection	7.2.3.7	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioned mechanical Tolerance	7.2.2.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.2.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation interpolation and integration algorithms for Max.SAR evaluation	7.2.4	2.3	R	1	1	1	1.33	1.33	∞
Dipole									
Deviation of experimental source from numerical source		4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	7.2.3.6	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance		2	R	$\sqrt{3}$	1	1			∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
uncertainty in SAR correction for deviation (in permittivity and conductivity)	7.2.6	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid conductivity -measurement uncertainty	7.2.3.3	4	N	1	0.23	0.26	0.92	1.04	∞
Liquid permittivity (temperature uncertainty)	7.2.3.5	2.5	N	1	0.78	0.71	1.95	1.78	∞
Liquid permittivity measurement uncertainty	7.2.3.4	5	N	1	0.23	0.26	1.15	1.30	∞
Combined standard uncertainty			RSS				10.15	10.05	
Expanded uncertainty (95%CONFIDENCEINTE RVAL			k				20.29	20.10	

9.6. Test Equipment List

Test Equipment	Manufacturer	Model	Serial Number	Calibration	
				Calibration Date	Calibration Due
PC	Lenovo	H3050	N/A	N/A	N/A
Signal Generator	Agilent	N5182A	MY47070282	Jun. 27, 2024	Jun. 26, 2024
Multimeter	Keithley	Multimeter 2000	4078275	Jun. 27, 2024	Jun. 26, 2024
Network Analyzer	Agilent	8753E	US38432457	Jun. 27, 2024	Jun. 26, 2024
Wideband Radio Communication Tester	R & S	CMW500	114220	Jun. 27, 2024	Jun. 26, 2024
Power Meter	Agilent	E4418B	GB43312526	Jun. 27, 2024	Jun. 26, 2024
Power Meter	Agilent	E4416A	MY45101555	Jun. 27, 2024	Jun. 26, 2024
Power Meter	Agilent	N1912A	MY50001018	Jun. 27, 2024	Jun. 26, 2024
Power Sensor	Agilent	E9301A	MY41497725	Jun. 27, 2024	Jun. 26, 2024
Power Sensor	Agilent	E9327A	MY44421198	Jun. 27, 2024	Jun. 26, 2024
Power Sensor	Agilent	E9323A	MY53070005	Jun. 27, 2024	Jun. 26, 2024
Power Amplifier	PE	PE15A4019	112342	N/A	N/A
Directional Coupler	Agilent	722D	MY52180104	N/A	N/A
Attenuator	Chensheng	FF779	134251	N/A	N/A
E-Field PROBE	MVG	SSE2	SN 25/22 EPGO375	Jun. 29, 2024	Jun. 28, 2025
DIPOLE 750	MVG	SID 750	SN 16/15 DIP 0G750-368	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 900	MVG	SID 900	SN 16/15 DIP 0G900-370	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 1800	MVG	SID 1800	SN 16/15 DIP 1G800-371	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 2000	MVG	SID 2000	SN 16/15 DIP 2G000-373	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 2450	MVG	SID2450	SN 16/15 DIP 2G450-374	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 2600	MVG	SID2600	SN 16/15 DIP 2G600-375	Jun. 05, 2024	Jun. 04, 2027
DIPOLE 5G	MVG	SID 5G	SN 13/14 WGA32	May 15, 2024	May 14, 2025
Communication Antenna	MVG	ANTA59	SN 39/14 ANTA59	N/A	N/A
Mobile Phone Position Device	MVG	MSH101	SN 19/15 MSH101	N/A	N/A
SAM PHANTOM	MVG	SAM120	SN 19/15 SAM120	N/A	N/A
PHANTOM TABLE	MVG	TABP101	SN 19/15 TABP101	N/A	N/A
Robot TABLE	MVG	TABP61	SN 19/15 TABP61	N/A	N/A
6 AXIS ROBOT	KUKA	KR6-R900	501822	N/A	N/A

Note:

1.N/A means this equipment no need to calibrate

2.Each Time means this device need to calibrate every use time

10. System Check Results

Date of measurement: 03/10/2025 Test mode: 750MHz (Head)


Product Description: Validation

Dipole Model: SID750


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.44
Relative permittivity (real part)	41.708125
Relative permittivity (imaginary part)	21.352612
Conductivity (S/m)	0.902154
Variation (%)	1.300000

SURFACE SAR

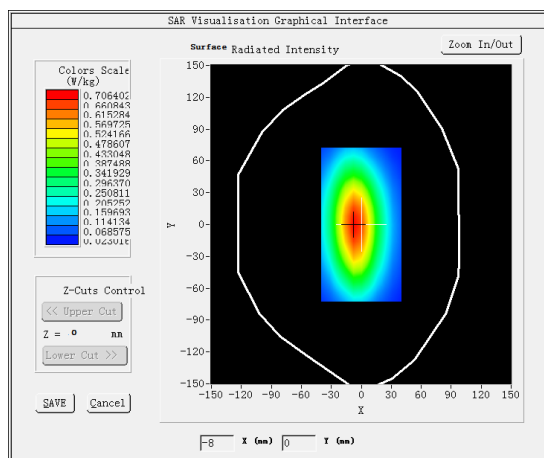


VOLUME SAR

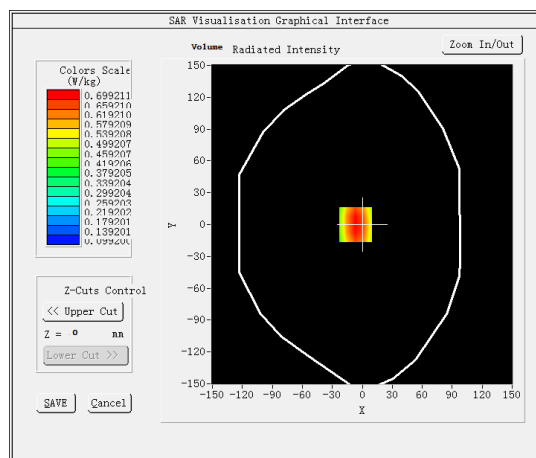


Maximum location: X=-8.00, Y=-15.00

SAR Peak: 1.04W/kg


SAR 10g (W/Kg)	0.565211
SAR 1g (W/Kg)	0.821514

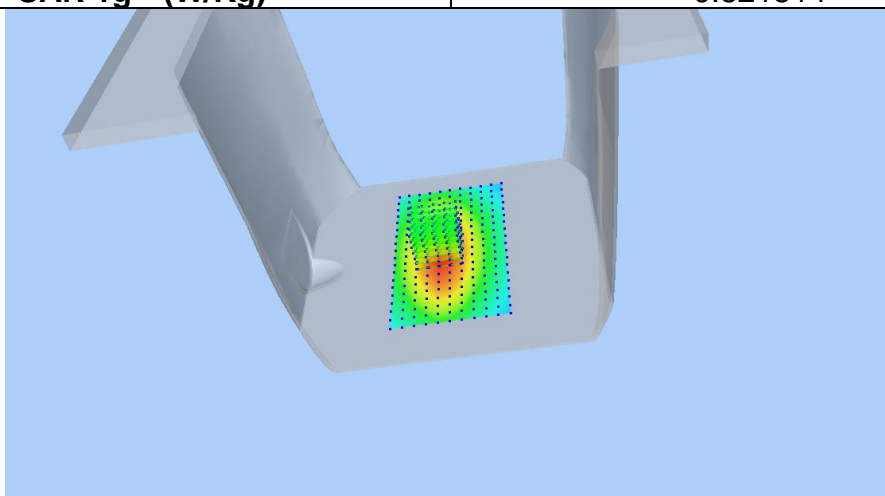

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.9026	0.7210	0.5512	0.3707	0.2775

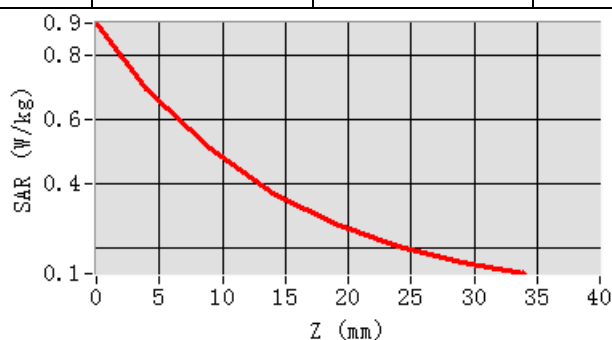

Hot spot position

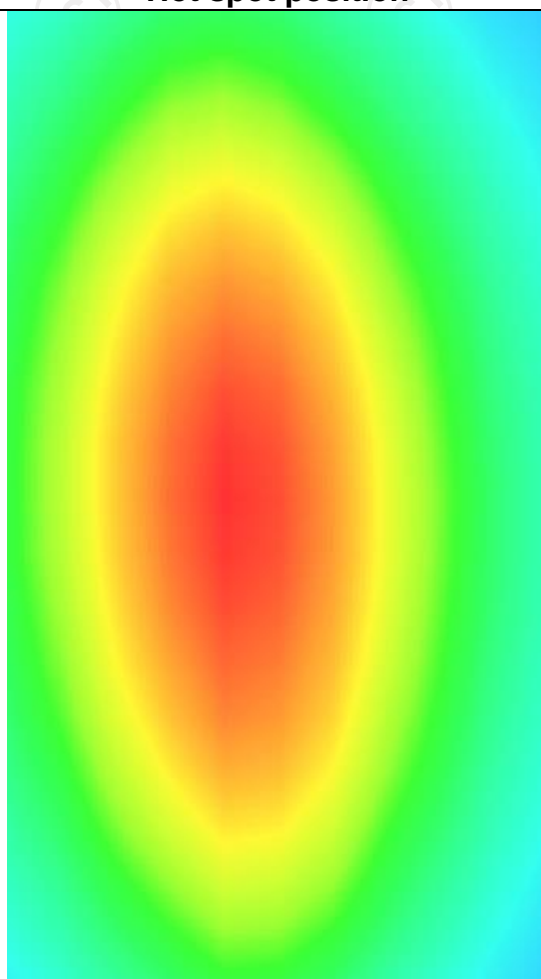

Date of measurement: 03/10/2025 Test mode: 900MHz (Head)


Product Description: Validation

Dipole Model: SID900


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.55
Relative permittivity (real part)	41.702185
Relative permittivity (imaginary part)	18.362571
Conductivity (S/m)	0.947591
Variation (%)	-2.620000

SURFACE SAR

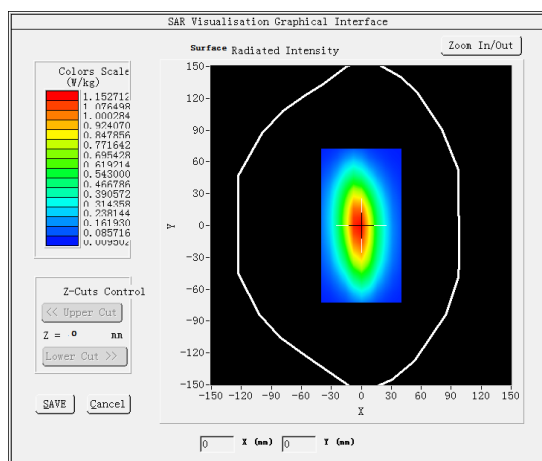


VOLUME SAR

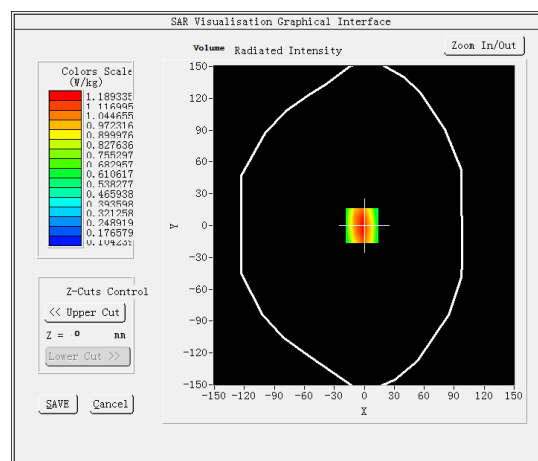


Maximum location: X=0.00, Y=1.00

SAR Peak: 1.91W/kg


SAR 10g (W/Kg)	0.667412
SAR 1g (W/Kg)	1.124028

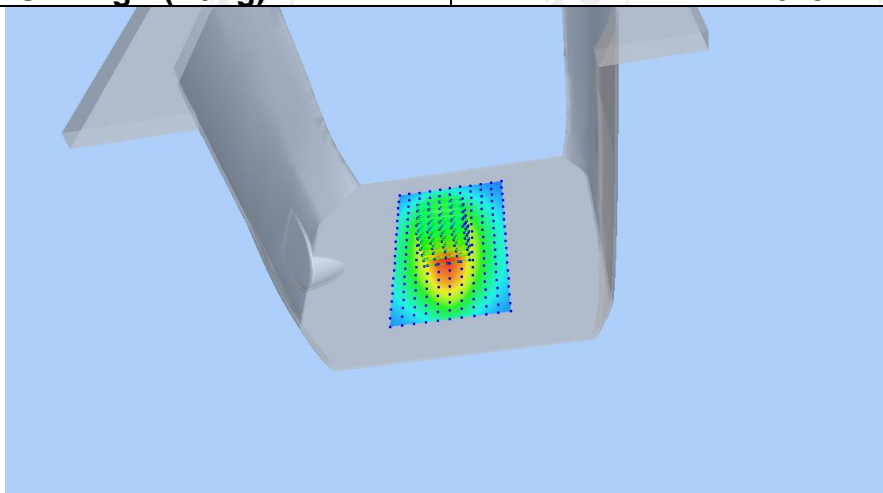

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.9126	1.2597	0.7287	0.4193	0.2450

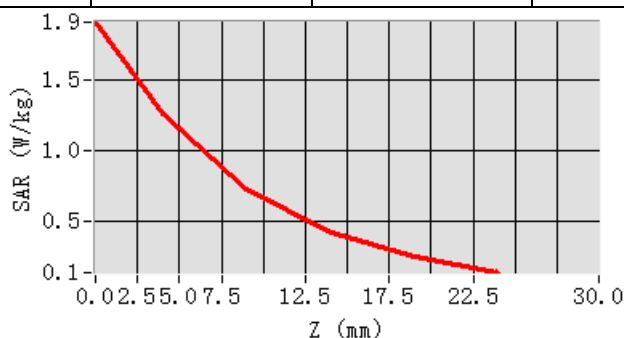

Hot spot position

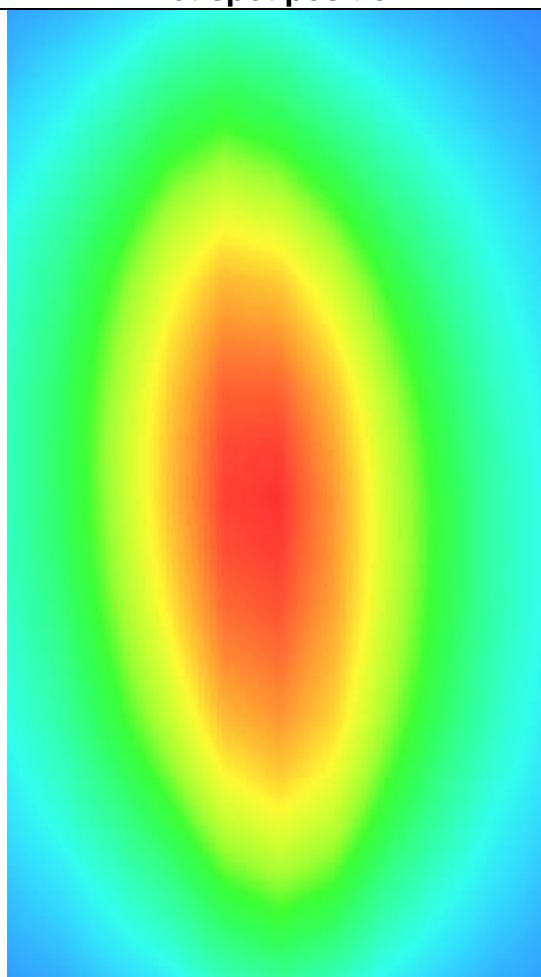

Date of measurement: 03/12/2025 Test mode: 1800MHz (Head)


Product Description: Validation

Dipole Model: SID1800


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.99
Relative permittivity (real part)	39.741251
Relative permittivity (imaginary part)	13.751846
Conductivity (S/m)	1.375125
Variation (%)	-1.620000

SURFACE SAR

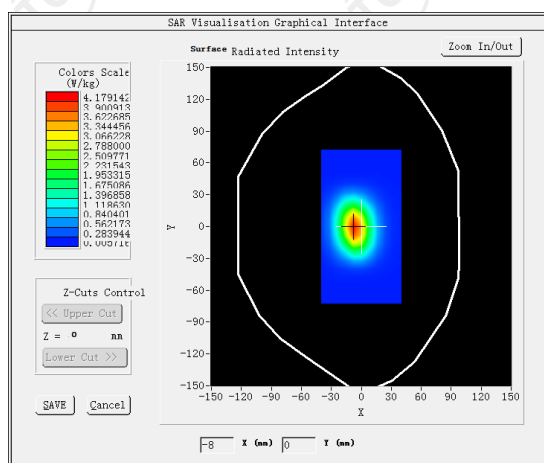

VOLUME SAR

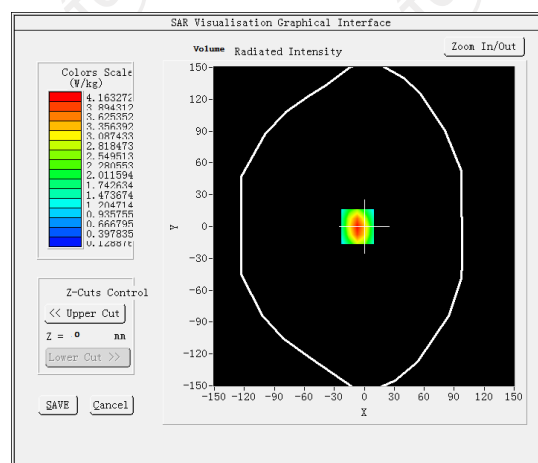

Maximum location: X=-3.00, Y=2.00


SAR Peak: 6.76W/kg

SAR 10g (W/Kg)


2.081542

SAR 1g (W/Kg)


3.638421

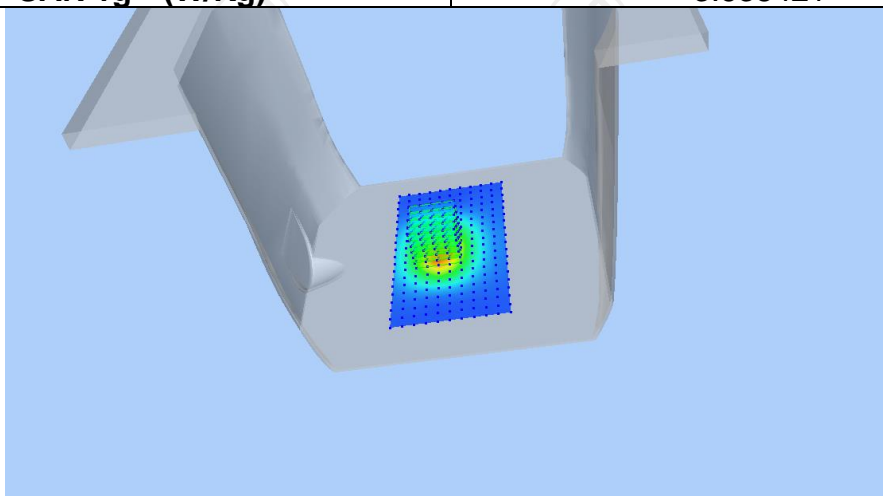

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.7671	4.4785	2.6591	1.6154	1.0226

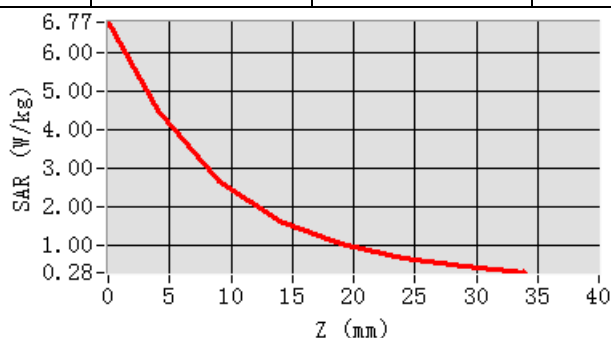

Hot spot position

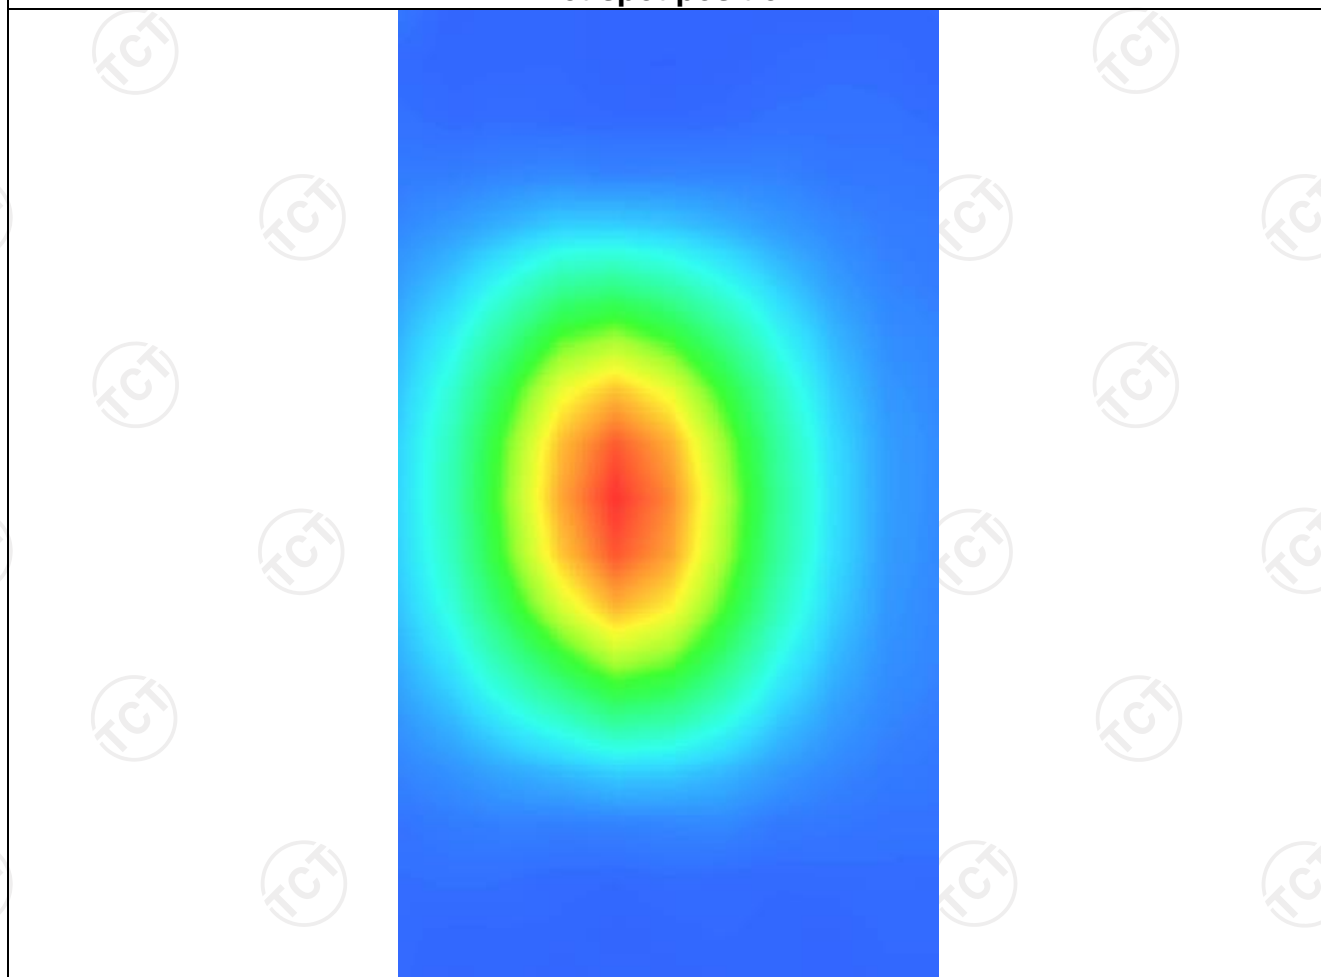

Date of measurement: 02/28/2025 Test mode: 2000MHz (Head)


Product Description: Validation

Dipole Model: SID2000


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	3.33
Relative permittivity (real part)	39.581259
Relative permittivity (imaginary part)	12.515274
Conductivity (S/m)	1.421576
Variation (%)	-1.620000

SURFACE SAR

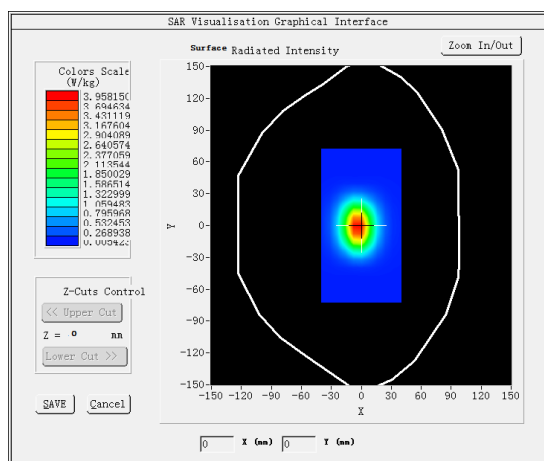


VOLUME SAR

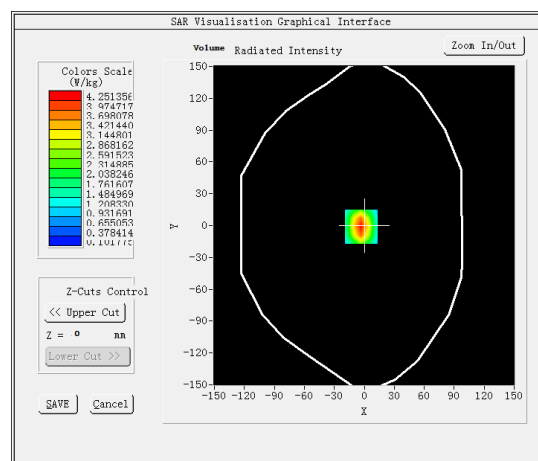


Maximum location: X=-1.00, Y=-4.00

SAR Peak: 6.53W/kg


SAR 10g (W/Kg)	2.241254
SAR 1g (W/Kg)	4.366257

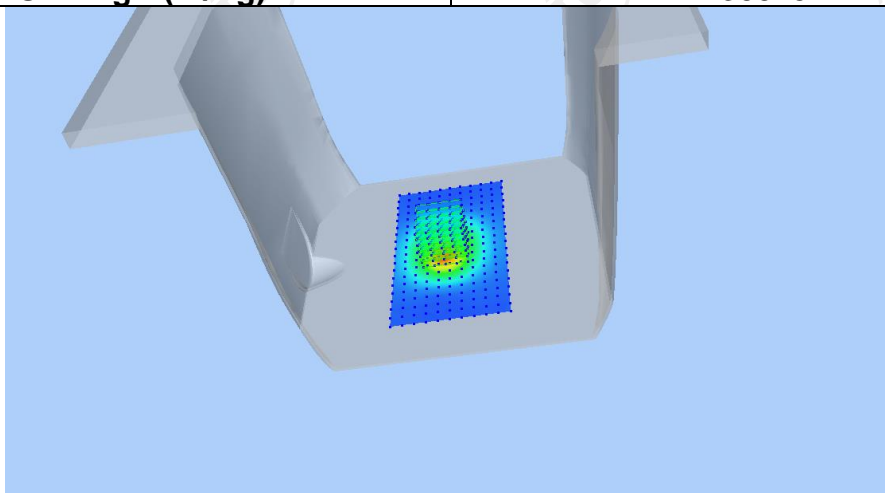

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.5915	4.2531	2.4154	1.4201	0.9105

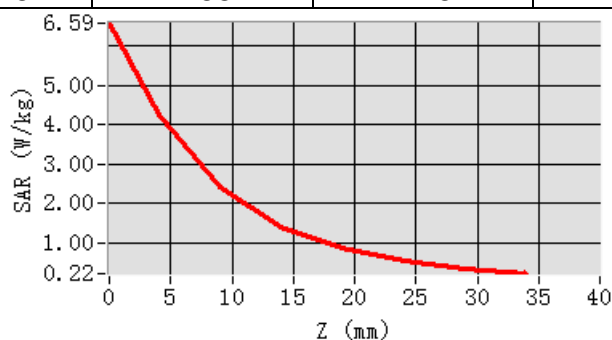

Hot spot position

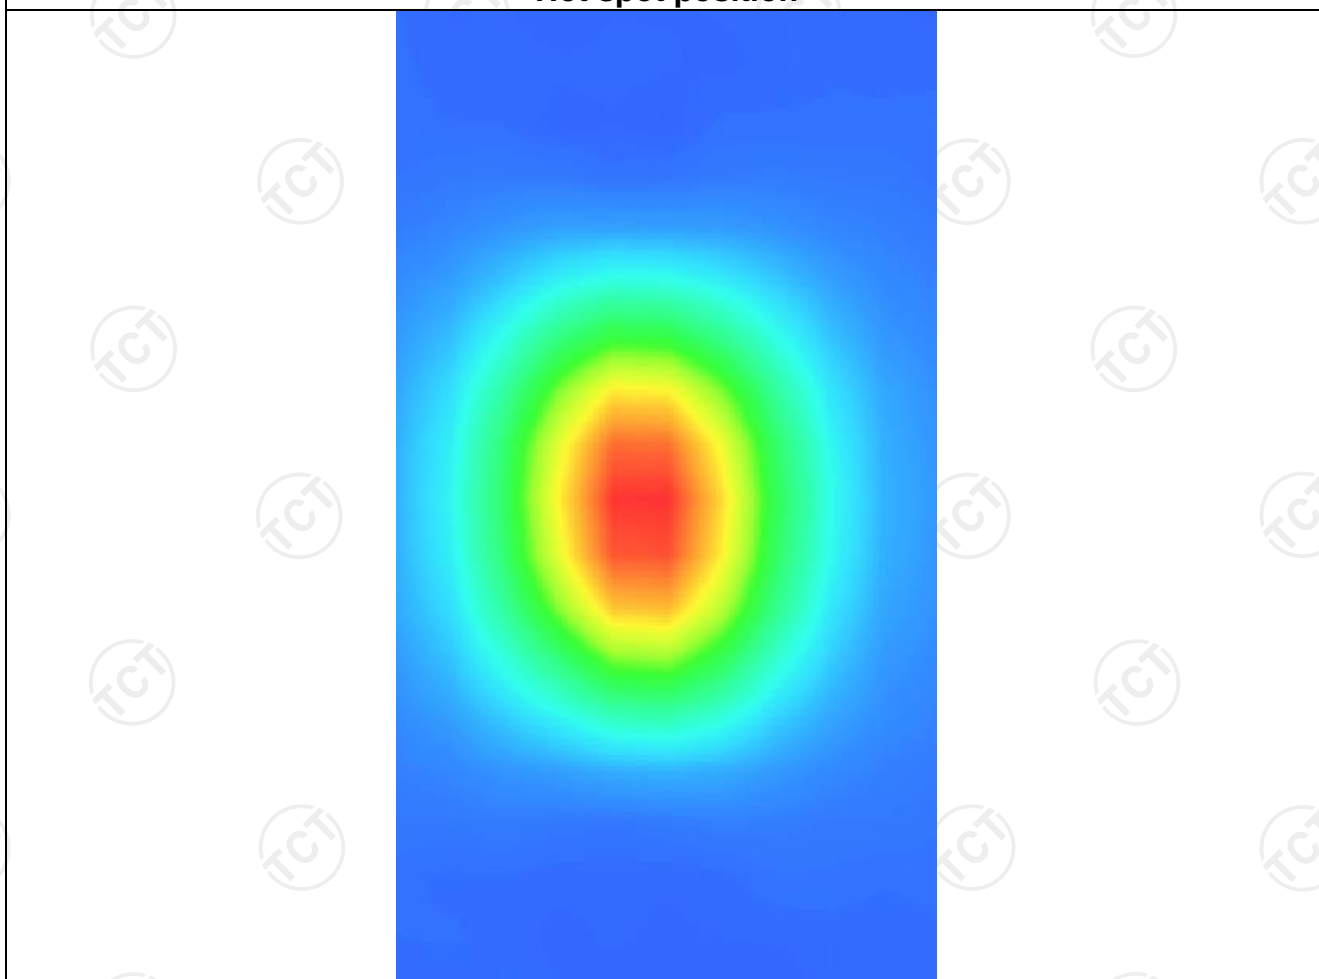

Date of measurement: 02/25/2025 Test mode: 2450MHz (Head)


Product Description: Validation

Dipole Model: SID2450


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	3.70
Relative permittivity (real part)	38.607154
Relative permittivity (imaginary part)	13.192612
Conductivity (S/m)	1.824102
Variation (%)	-0.200000

SURFACE SAR

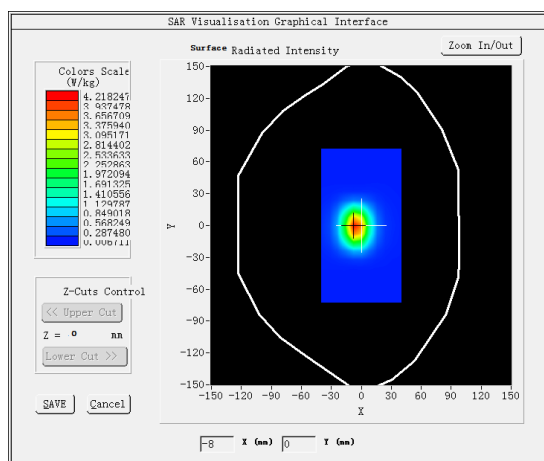


VOLUME SAR

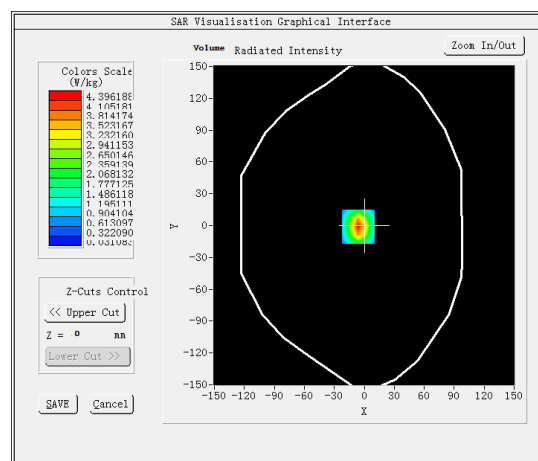


Maximum location: X=-6.00, Y=-1.00

SAR Peak: 7.49W/kg


SAR 10g (W/Kg)	2.537152
SAR 1g (W/Kg)	5.116201

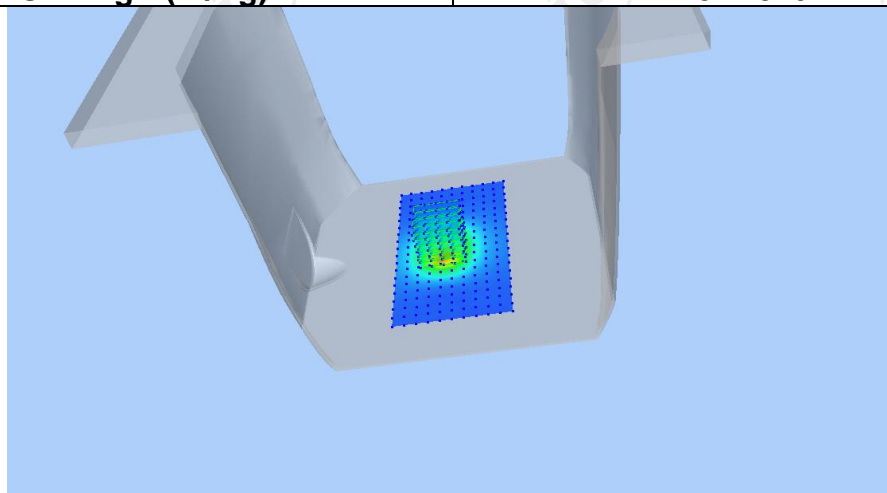

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	7.5812	4.3962	2.1022	1.0631	0.5483

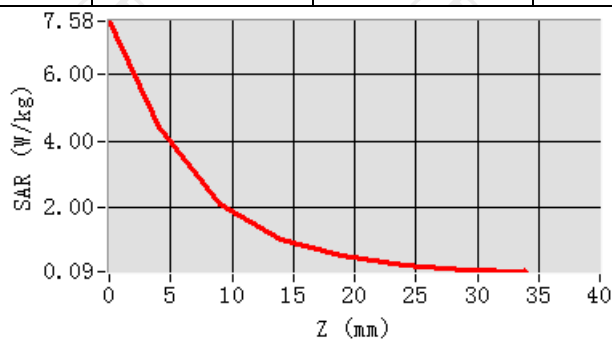

Hot spot position

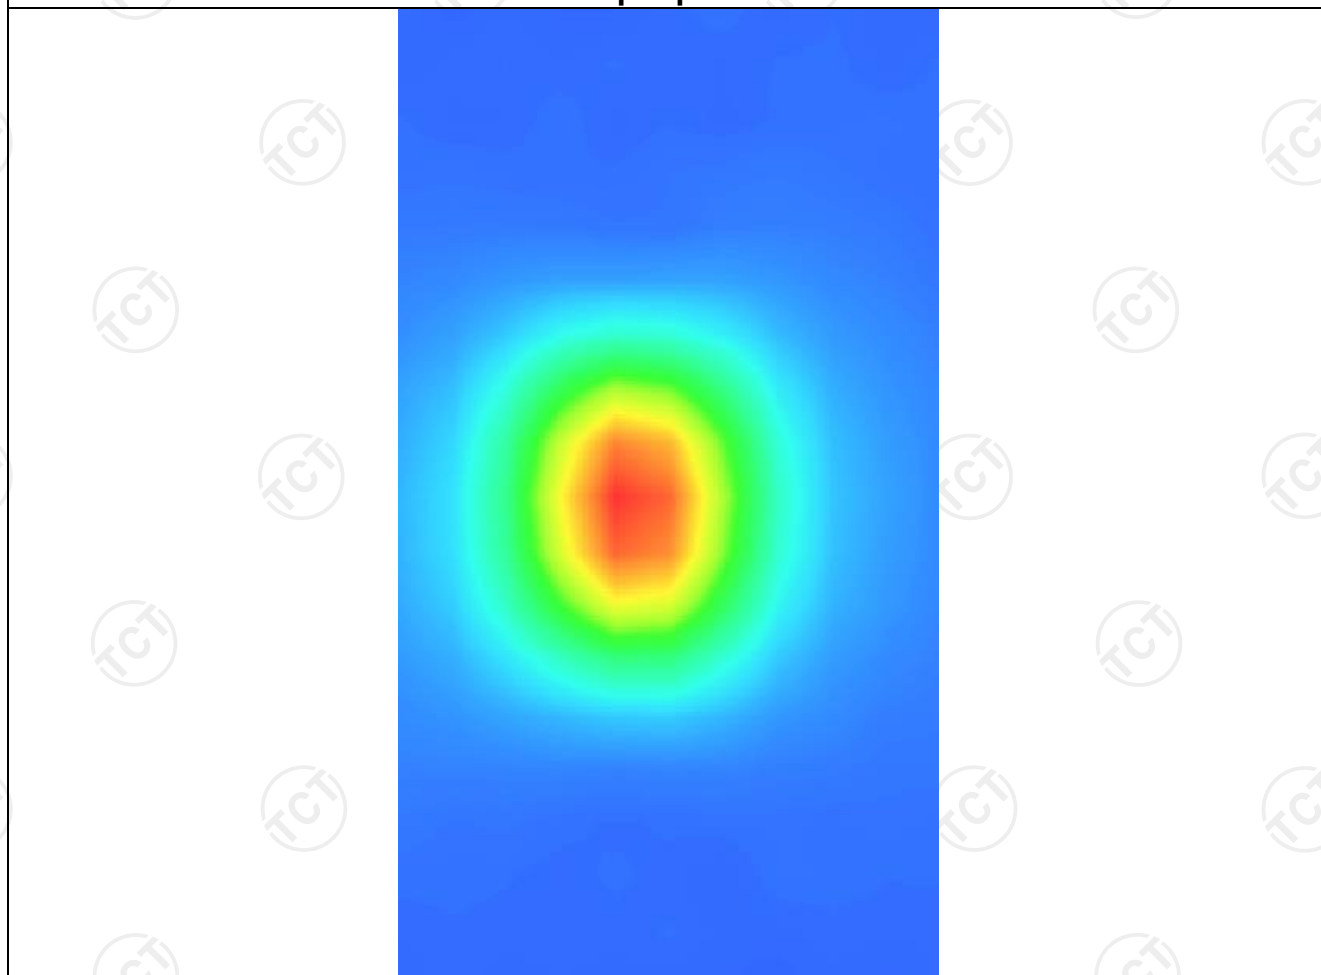

Date of measurement: 02/25/2025 Test mode: 2600MHz (Head)


Product Description: Validation

Dipole Model: SID2600


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	3.43
Relative permittivity (real part)	39.4181254
Relative permittivity (imaginary part)	13.571547
Conductivity (S/m)	1.926154
Variation (%)	3.010000

SURFACE SAR

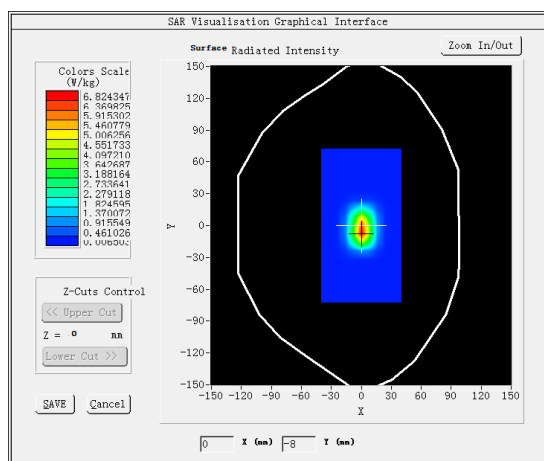


VOLUME SAR

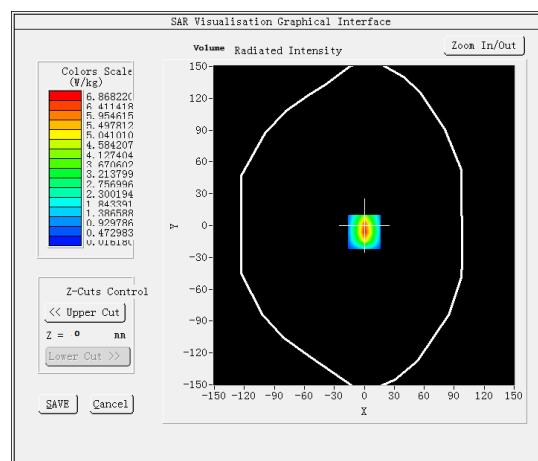


Maximum location: X=0.00, Y=-6.00

SAR Peak: 12.42W/kg


SAR 10g (W/Kg)	2.371254
SAR 1g (W/Kg)	5.651254

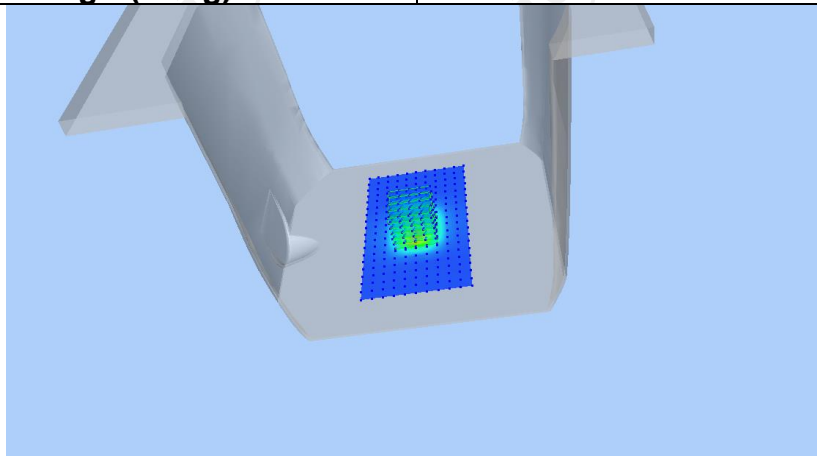

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	12.6156	6.8682	2.9287	1.3511	0.6567

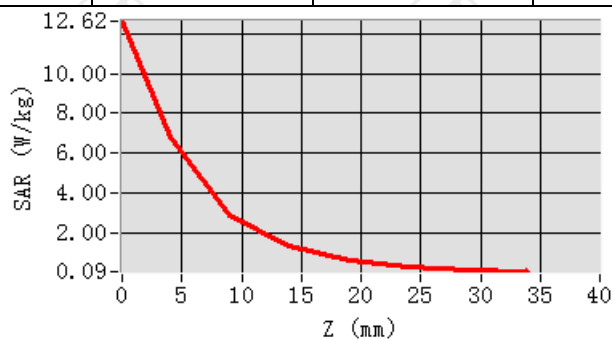

Hot spot position

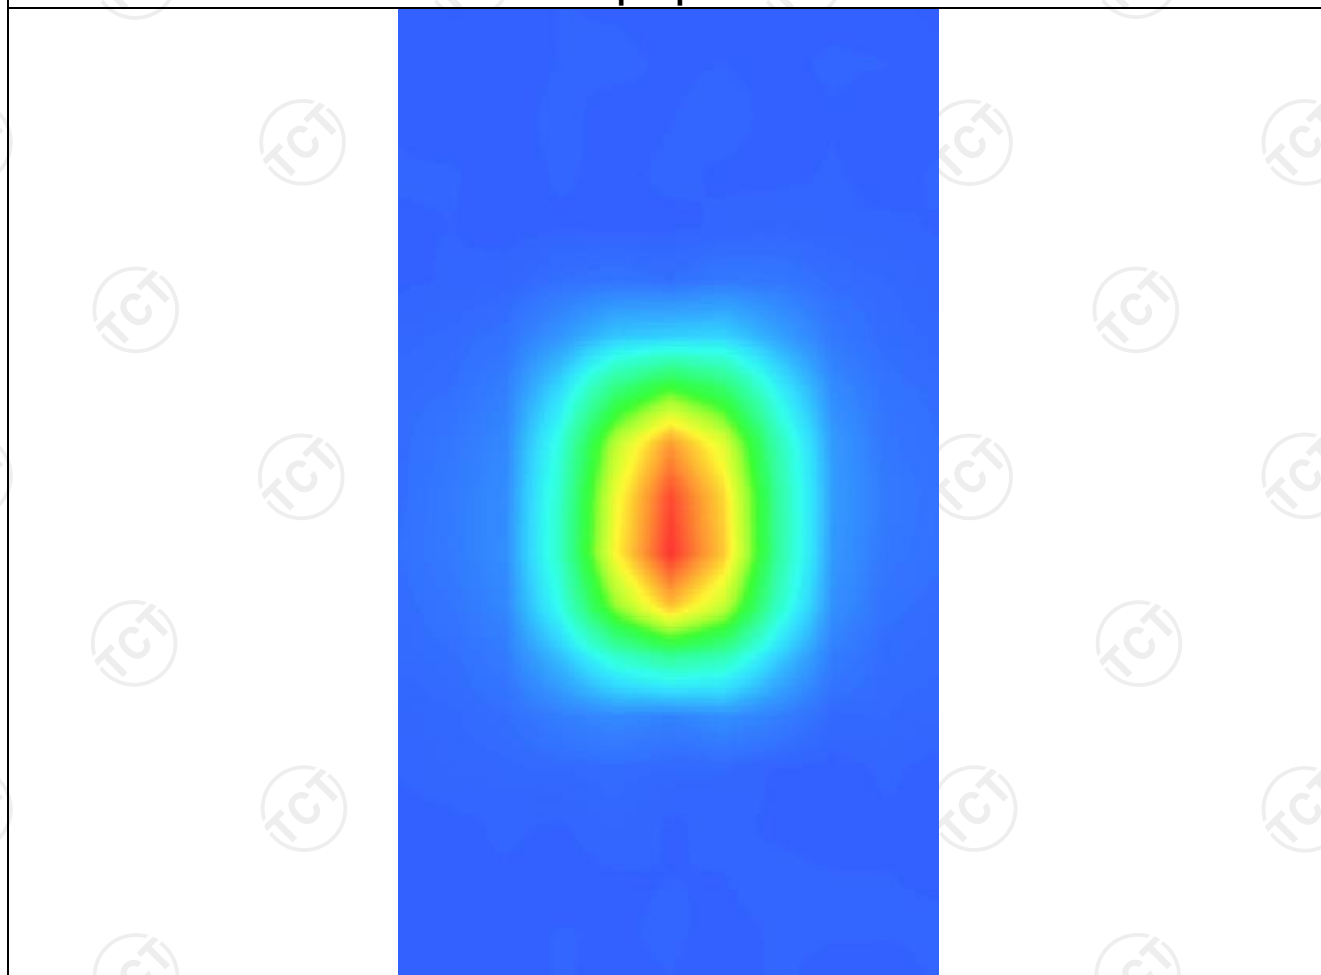

Date of measurement: 03/03/2025 Test mode: 5200MHz (Head)


Product Description: Validation

Dipole Model: SID5000


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.48
Relative permittivity (real part)	36.107154
Relative permittivity (imaginary part)	16.102154
Conductivity (S/m)	4.891547
Variation (%)	1.160000

SURFACE SAR

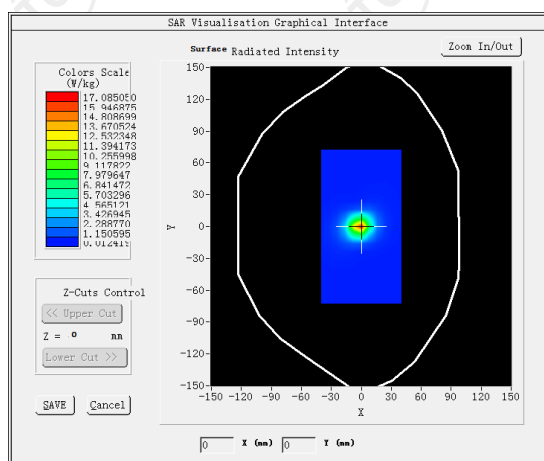

VOLUME SAR

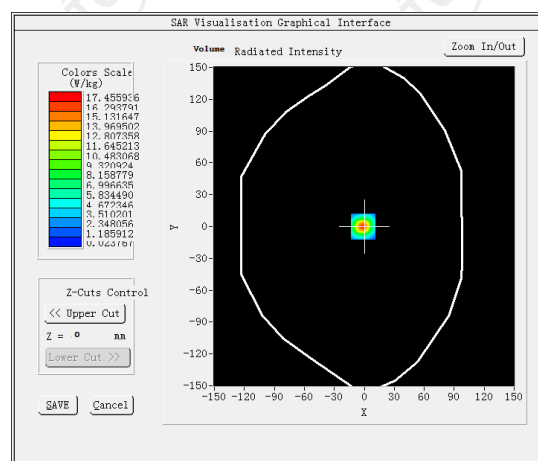

Maximum location: X=-1.00, Y=0.00


SAR Peak: 40.76W/kg

SAR 10g (W/Kg)


5.581251

SAR 1g (W/Kg)


15.502012

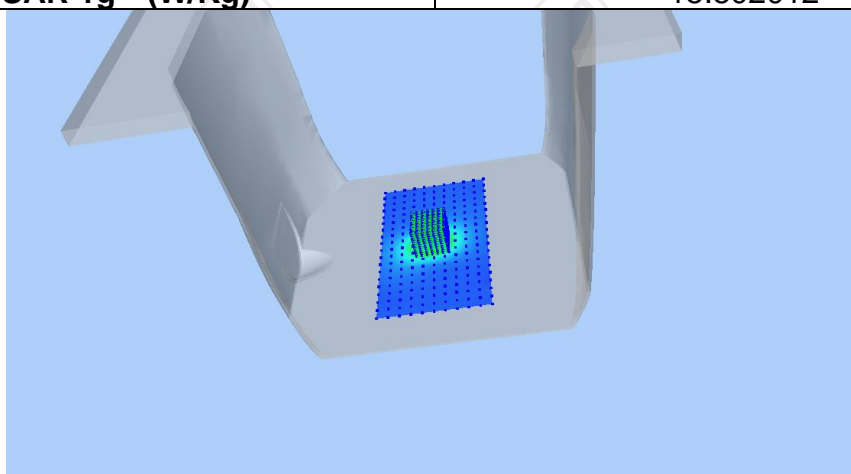

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	39.0577	15.6815	5.6912	1.2028	0.3021

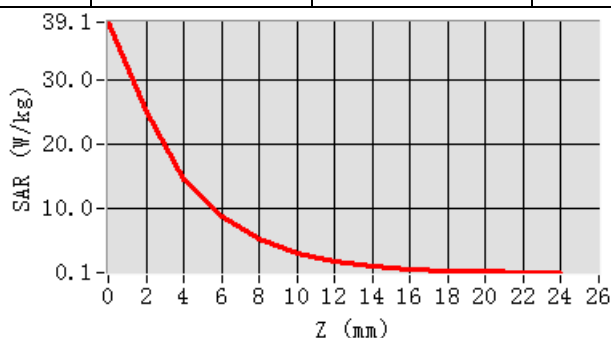

Hot spot position

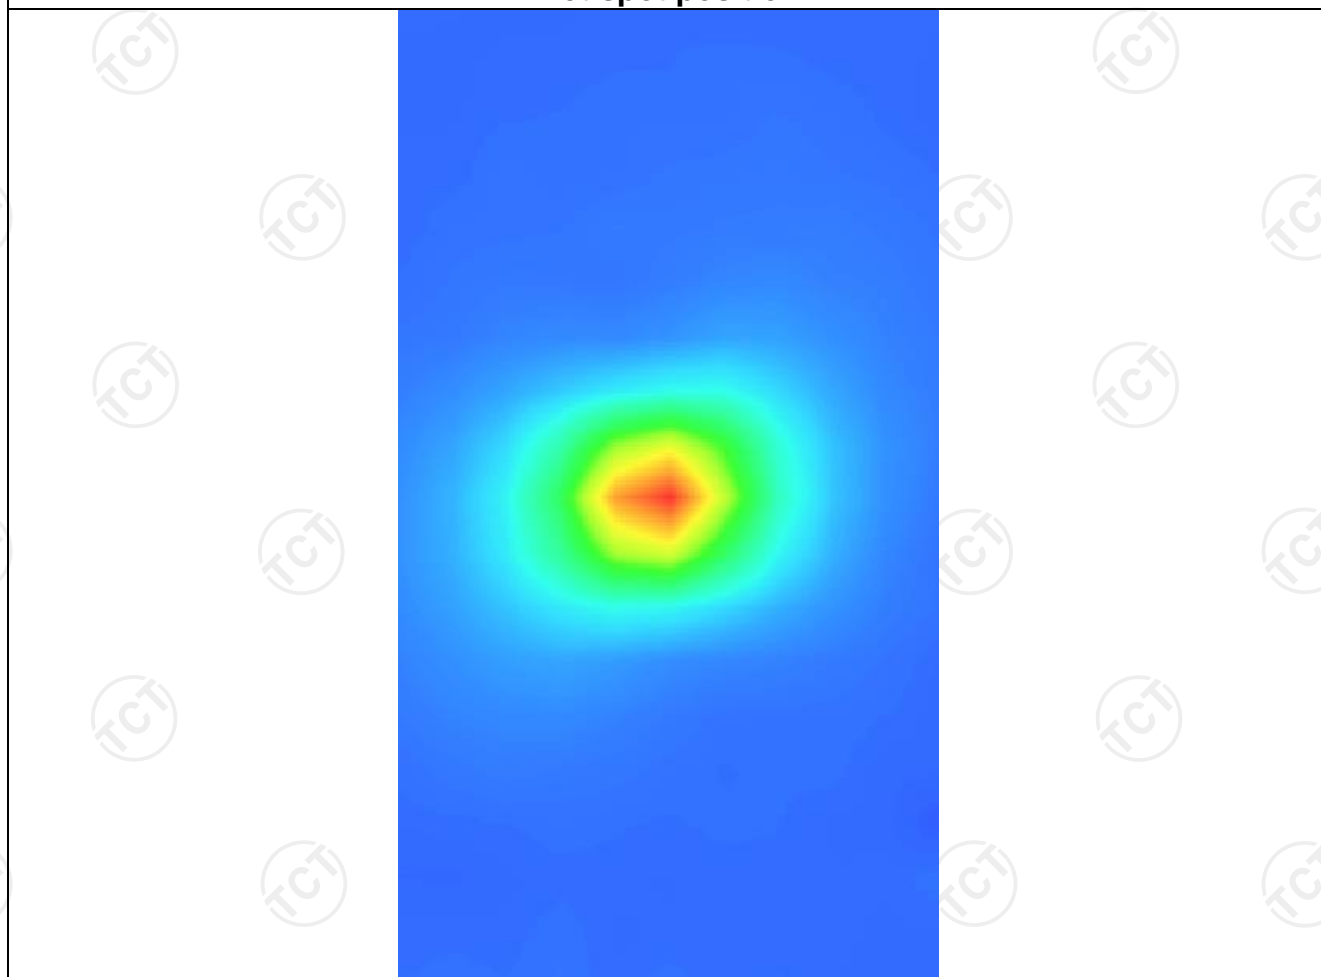

Date of measurement: 03/03/2025 Test mode: 5400MHz (Head)


Product Description: Validation

Dipole Model: SID5000


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.48
Relative permittivity (real part)	35.761254
Relative permittivity (imaginary part)	16.112542
Conductivity (S/m)	4.961254
Variation (%)	-1.300000

SURFACE SAR

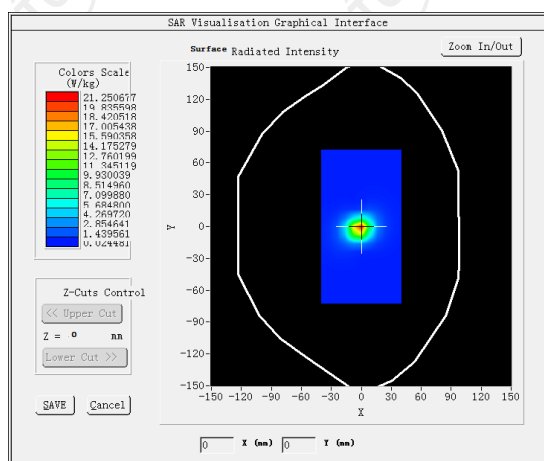

VOLUME SAR

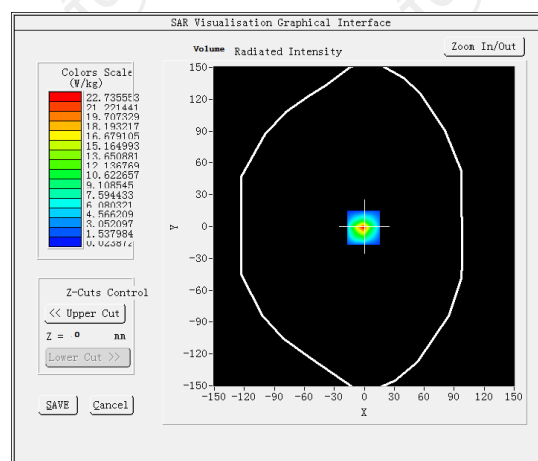

Maximum location: X=-1.00, Y=-1.00


SAR Peak: 40.57W/kg

SAR 10g (W/Kg)


5.362154

SAR 1g (W/Kg)


15.761254

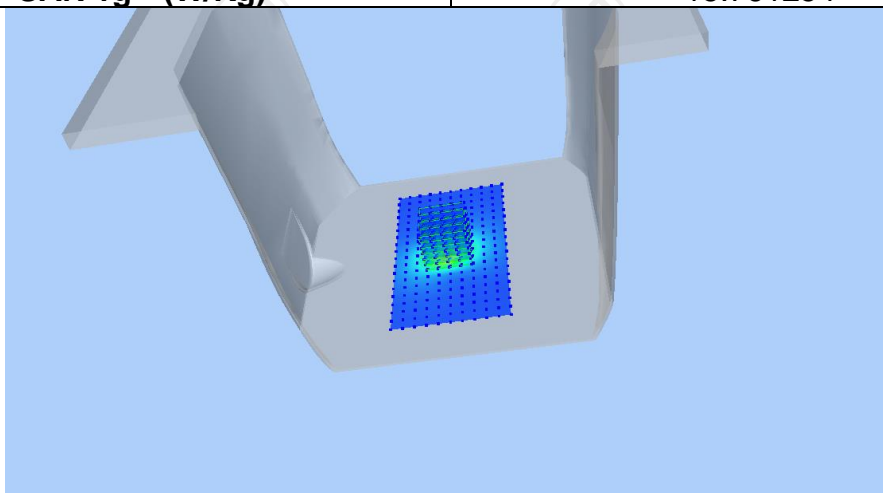

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	38.7128	15.8125	5.4512	1.0062	0.3074

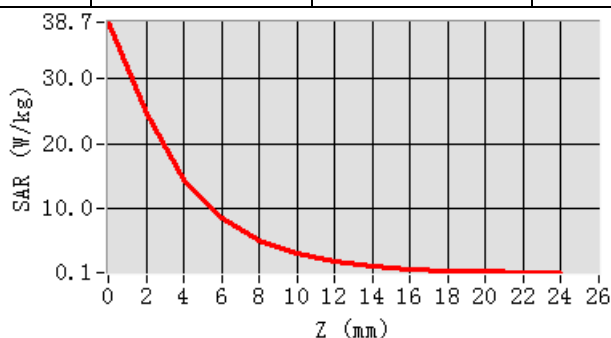

Hot spot position

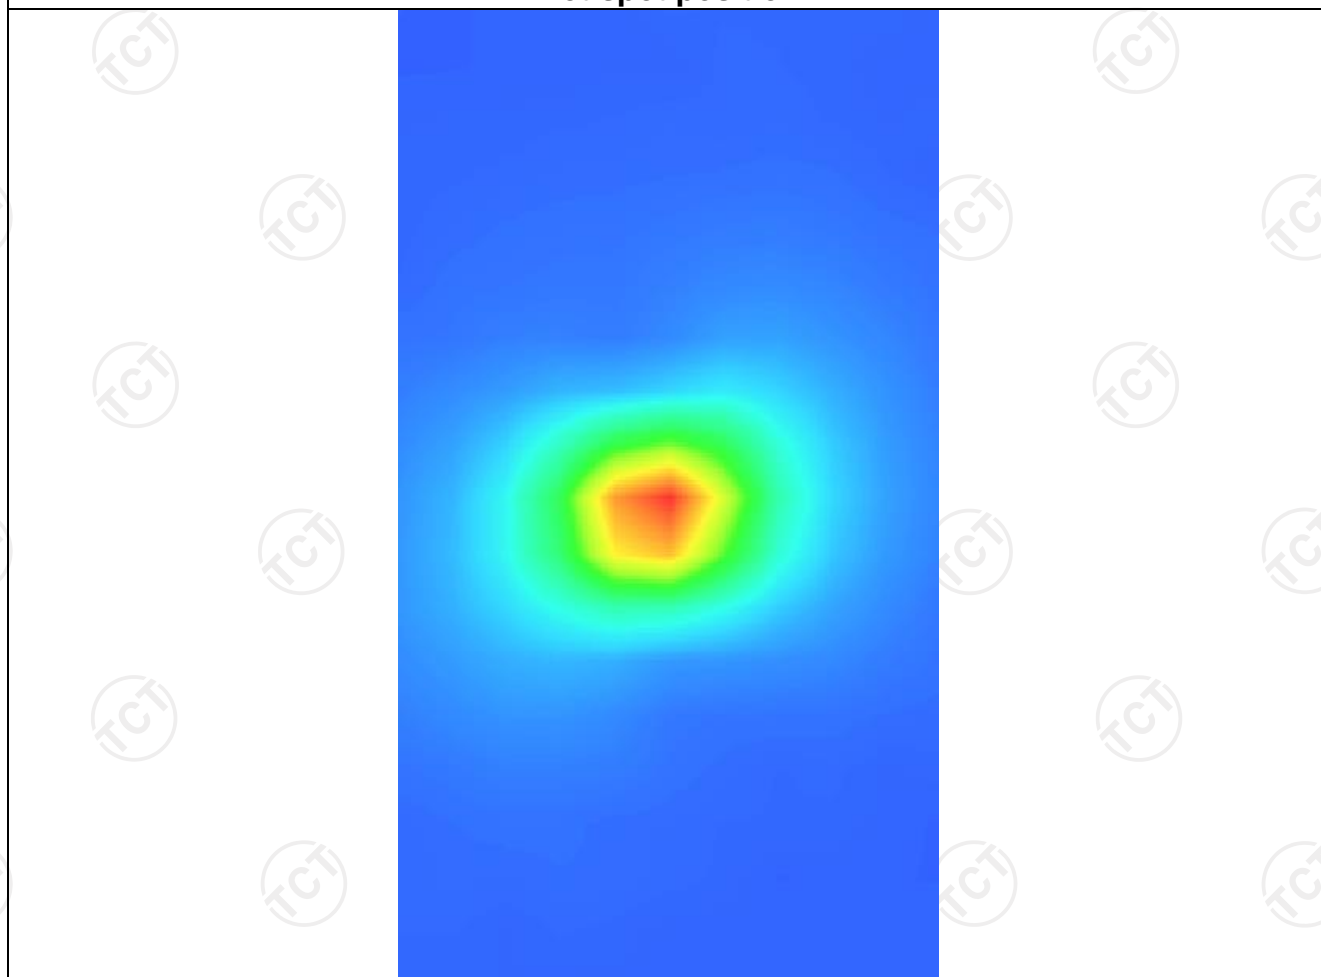

Date of measurement: 03/03/2025 Test mode: 5600MHz (Head)


Product Description: Validation

Dipole Model: SID5000


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.77
Relative permittivity (real part)	35.807156
Relative permittivity (imaginary part)	16.251257
Conductivity (S/m)	5.003512
Variation (%)	1.210000

SURFACE SAR

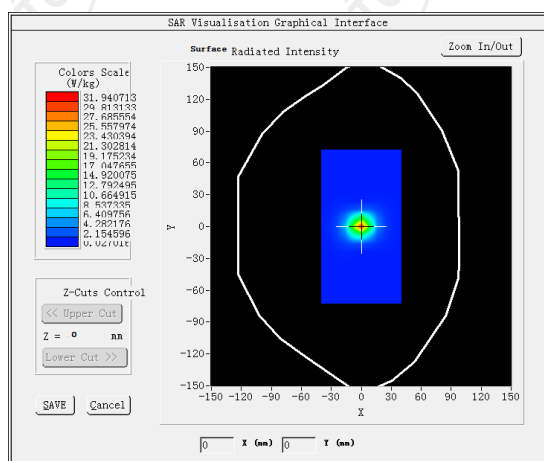

VOLUME SAR

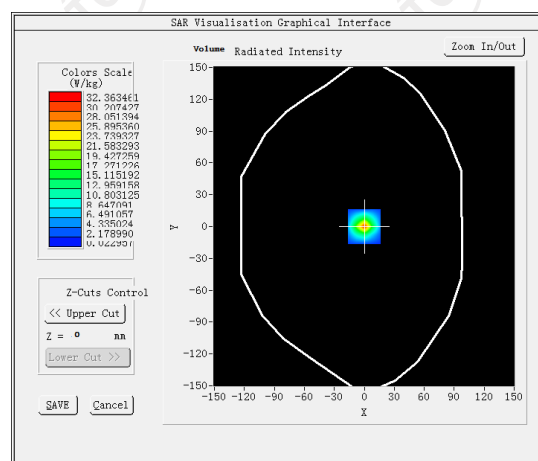

Maximum location: X=-1.00, Y=0.00


SAR Peak: 44.00W/kg

SAR 10g (W/Kg)


5.581254

SAR 1g (W/Kg)


16.748122

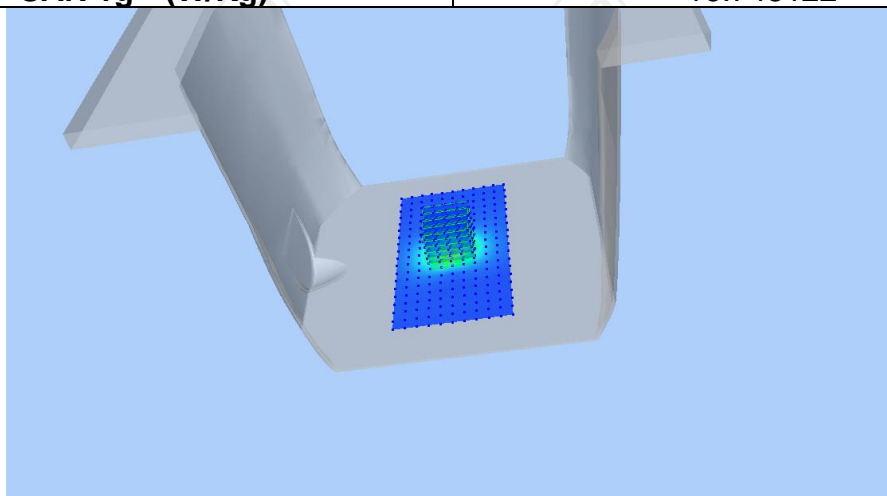

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	43.9047	16.8120	5.6312	0.9012	0.1725

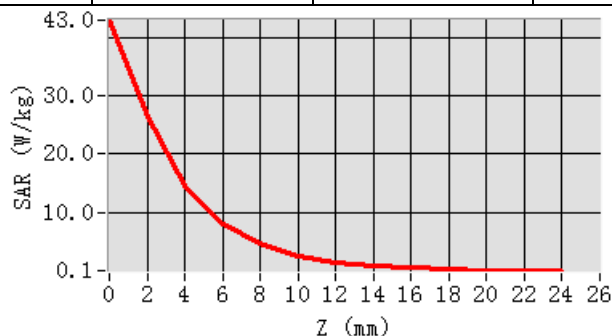

Hot spot position

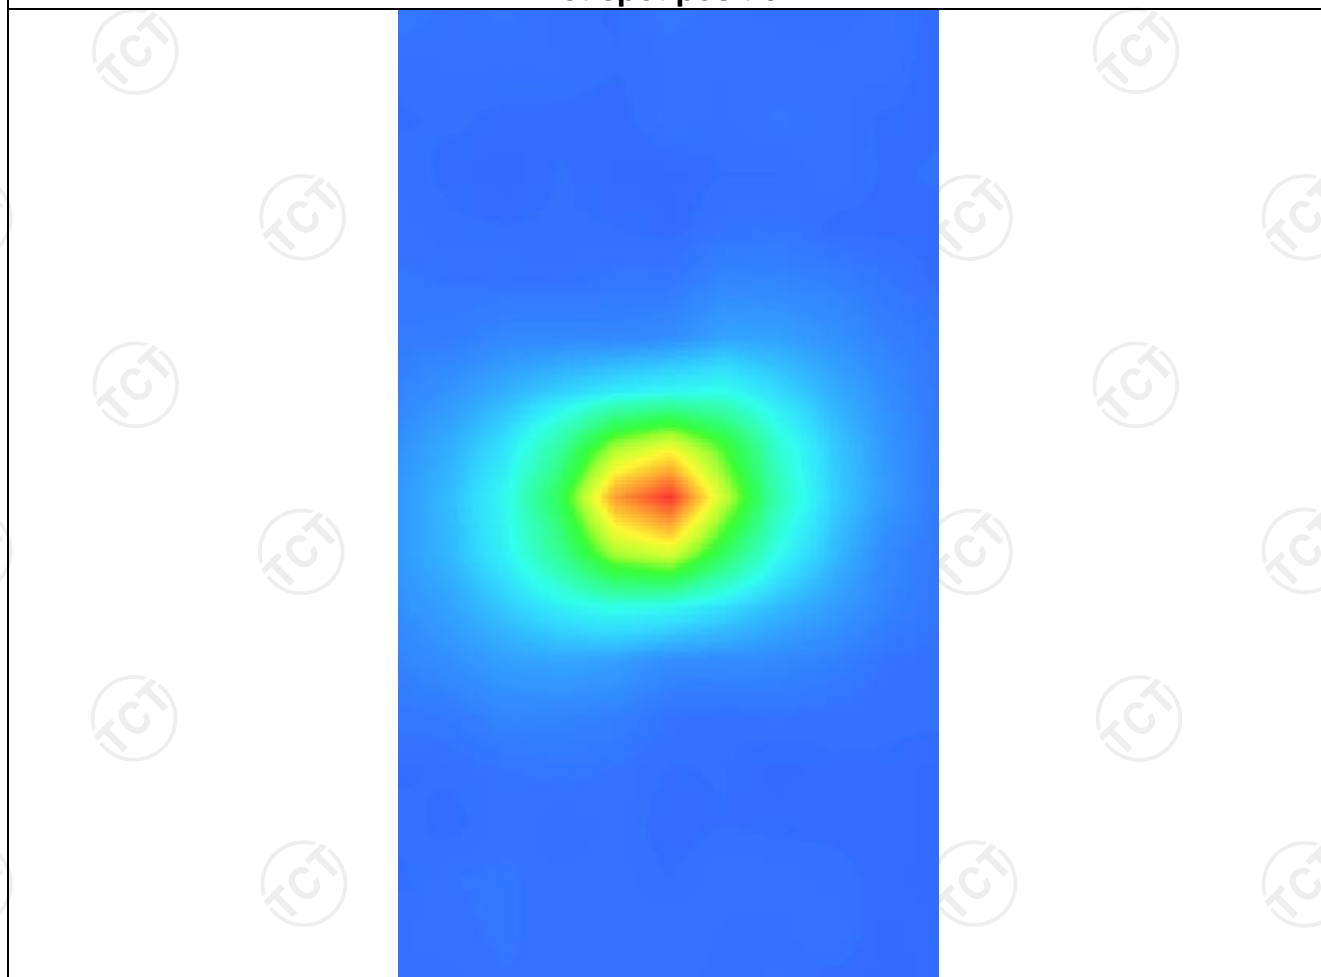

Date of measurement: 03/03/2025 Test mode: 5800MHz (Head)


Product Description: Validation

Dipole Model: SID5000


E-Field Probe: SSE2 (SN 25/22 EPGO375)

Phantom	Validation plane
Input Power	100mW
Crest Factor	1.0
Probe Conversion factor	2.63
Relative permittivity (real part)	34.512012
Relative permittivity (imaginary part)	16.061254
Conductivity (S/m)	5.120215
Variation (%)	-1.110000

SURFACE SAR

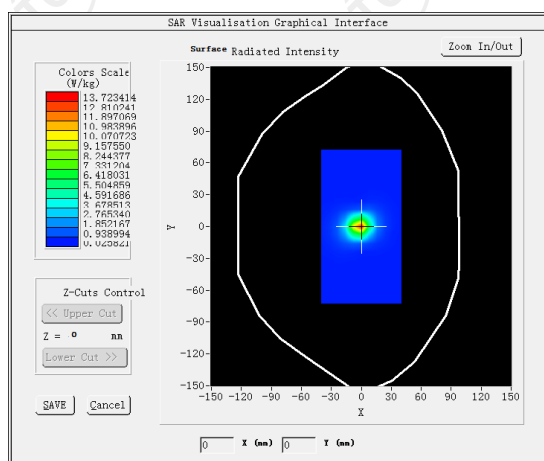

VOLUME SAR

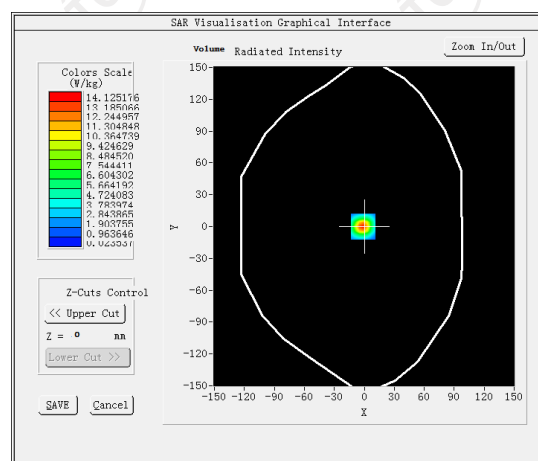

Maximum location: X=-1.00, Y=0.00


SAR Peak: 45.24W/kg

SAR 10g (W/Kg)


5.820151

SAR 1g (W/Kg)


17.571524

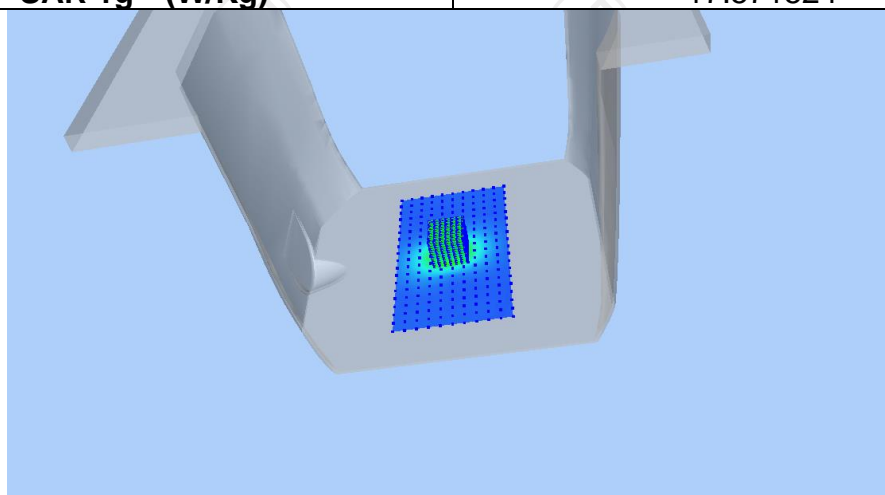

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	43.0012	17.6120	5.7412	0.8542	0.2101

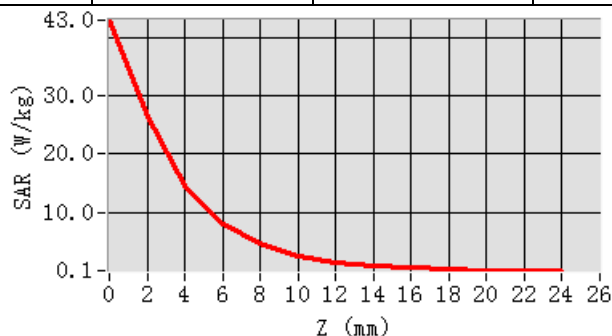

Hot spot position

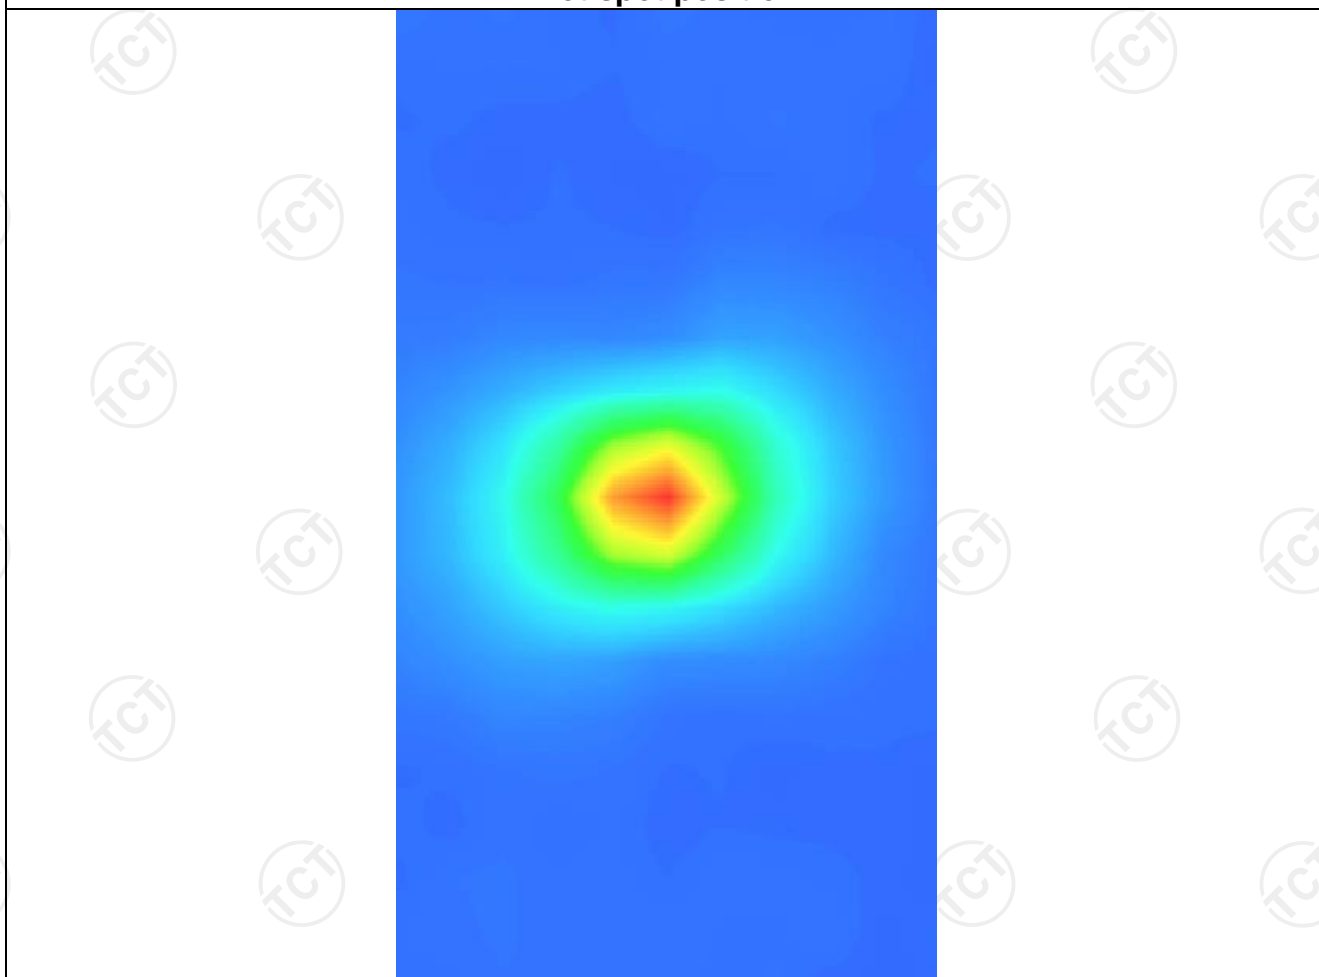

11. SAR Test Data

GSM900


MEASUREMENT 1

Middle Band SAR (Channel 60):


Date: 03/10/2025

Frequency (MHz)	902.000000
Relative permittivity (real part)	41.620154
Relative permittivity (imaginary part)	18.430214
Conductivity (S/m)	0.981205
Variation (%)	-4.420000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM900

SURFACE SAR

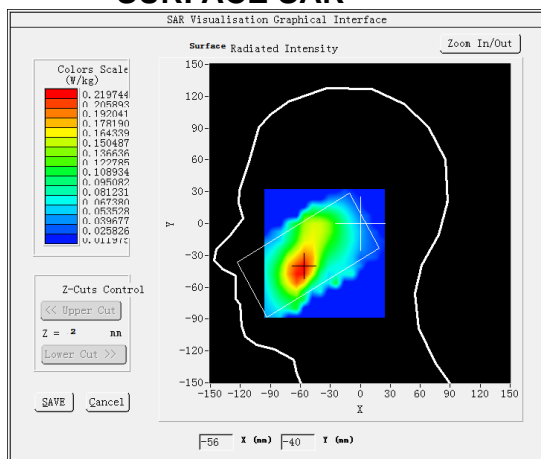


VOLUME SAR

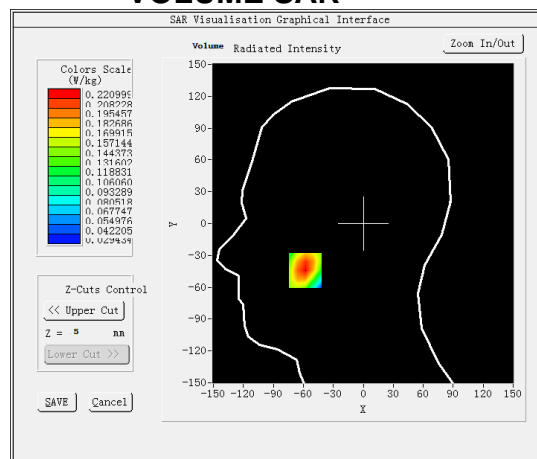


Maximum location: X=-58.00, Y=-44.00

SAR Peak: 0.30 W/kg


SAR 10g (W/Kg)	0.143173
SAR 1g (W/Kg)	0.211943

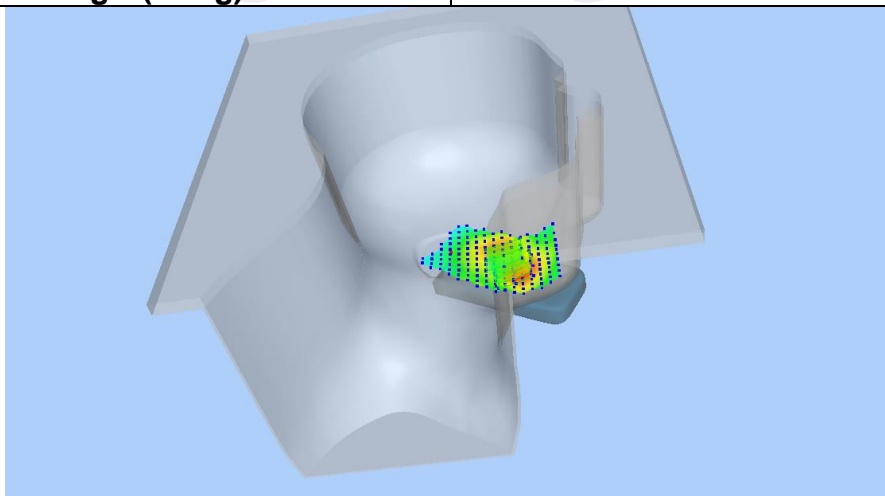

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2948	0.2210	0.1529	0.1058	0.0734

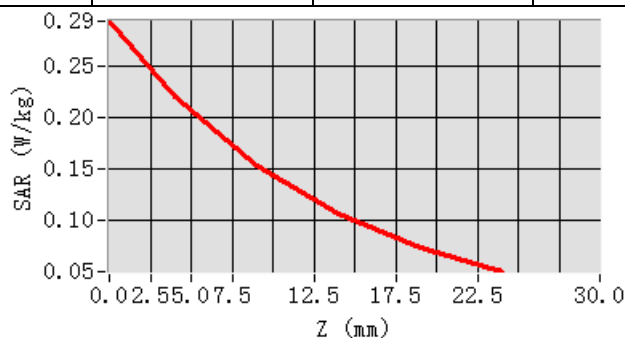

Hot spot position

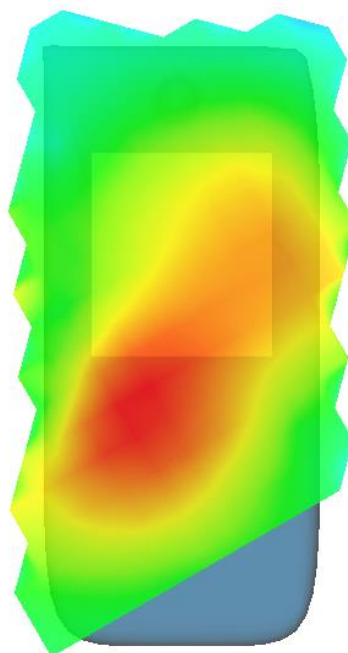


MEASUREMENT 2

Middle Band SAR (Channel 60):


Date: 03/10/2025

Frequency (MHz)	902.000000
Relative permittivity (real part)	41.620154
Relative permittivity (imaginary part)	18.430214
Conductivity (S/m)	0.981205
Variation (%)	1.410000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM900(voice)

SURFACE SAR

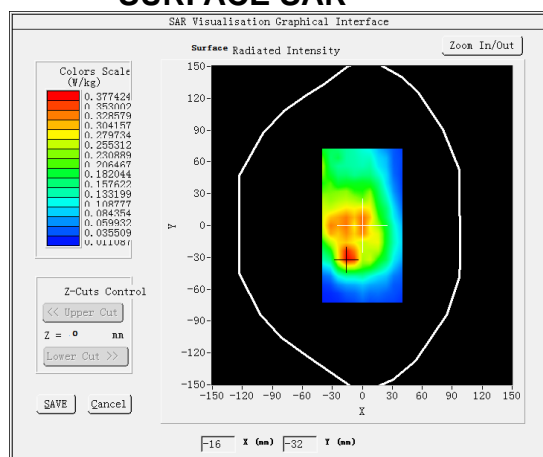


VOLUME SAR

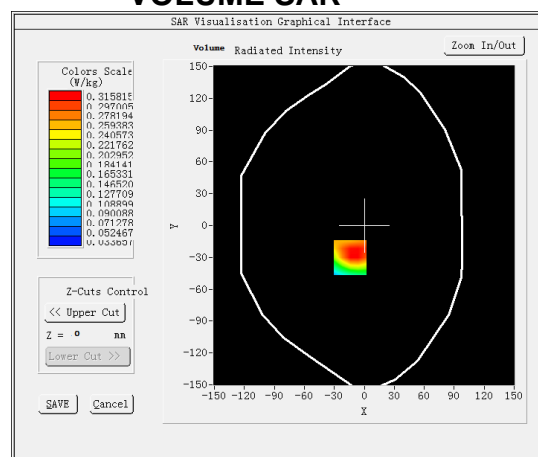


Maximum location: X=-14.00, Y=-30.00

SAR Peak: 0.43 W/kg


SAR 10g (W/Kg)	0.202537
SAR 1g (W/Kg)	0.310084

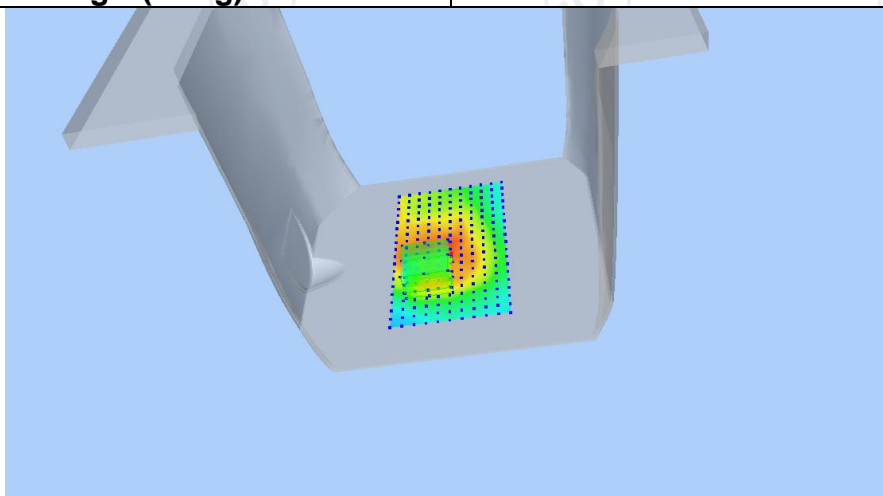

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4142	0.3158	0.2196	0.1480	0.0955

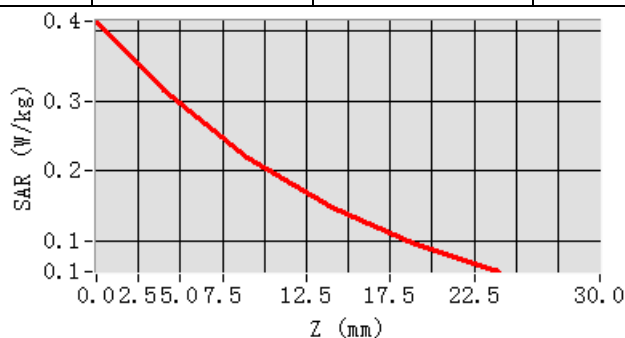

Hot spot position

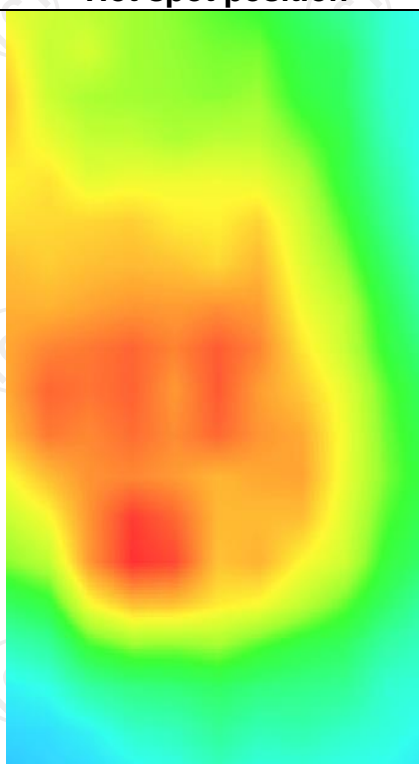


MEASUREMENT 3

Middle Band SAR (Channel 60):


Date: 03/10/2025

Frequency (MHz)	902.000000
Relative permittivity (real part)	41.620154
Relative permittivity (imaginary part)	18.430214
Conductivity (S/m)	0.981205
Variation (%)	3.900000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM900(GPRS 4slot)

SURFACE SAR

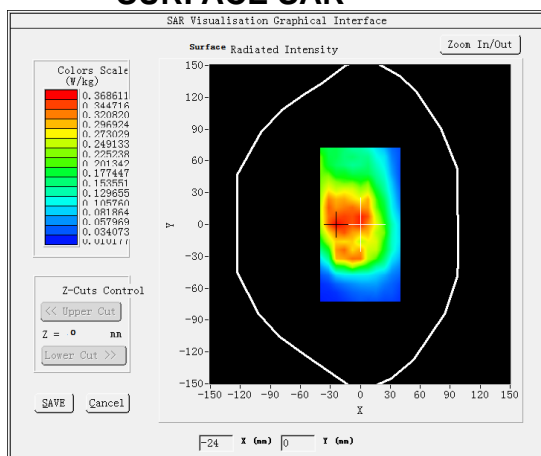


VOLUME SAR

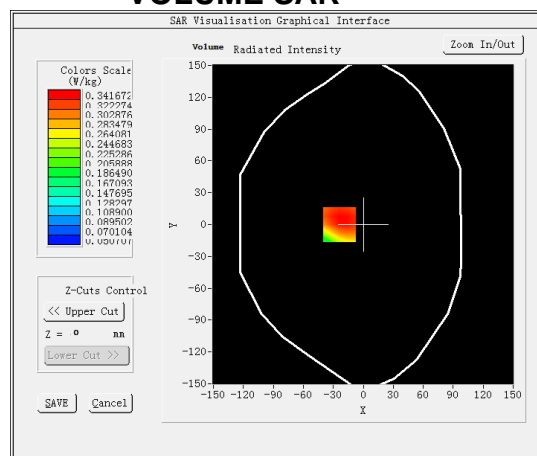


Maximum location: X=-24.00, Y=0.00

SAR Peak: 0.56 W/kg


SAR 10g (W/Kg)	0.240944
SAR 1g (W/Kg)	0.365098

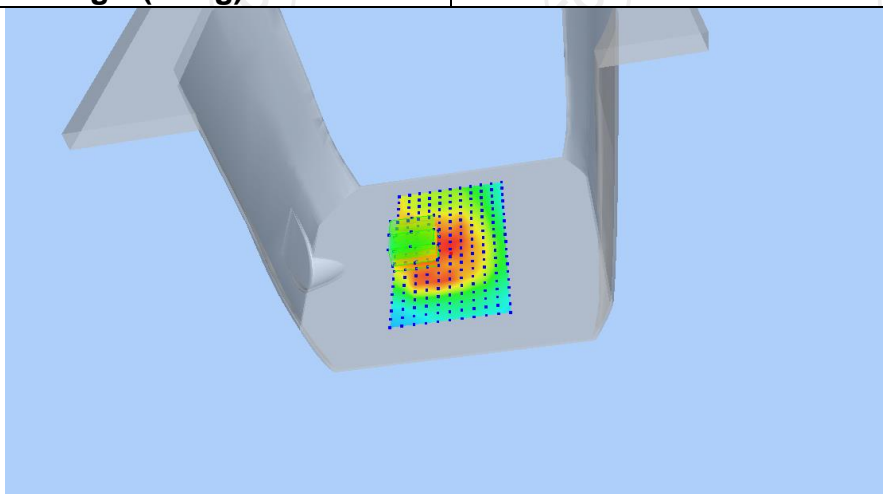

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1922	0.3417	0.1592	0.1786	0.0869

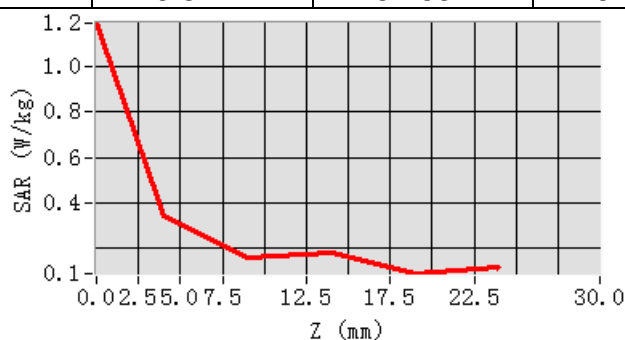

Hot spot position

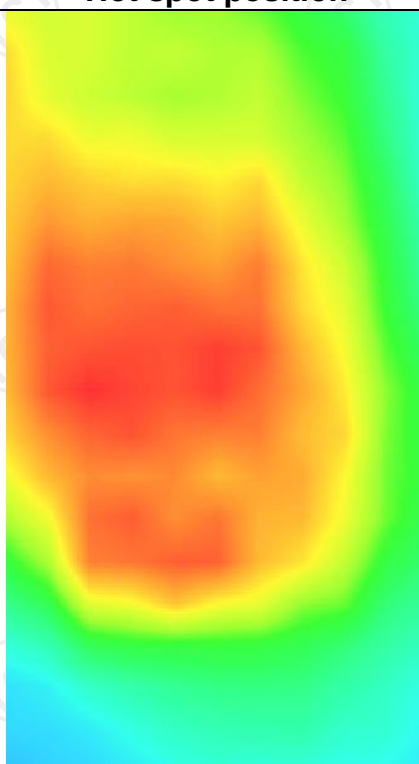

GSM1800


MEASUREMENT 1

Middle Band SAR (Channel 700):


Date: 03/12/2025

Frequency (MHz)	1747.800049
Relative permittivity (real part)	38.761284
Relative permittivity (imaginary part)	13.777154
Conductivity (S/m)	1.371548
Variation (%)	-4.210000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	GSM1800

SURFACE SAR

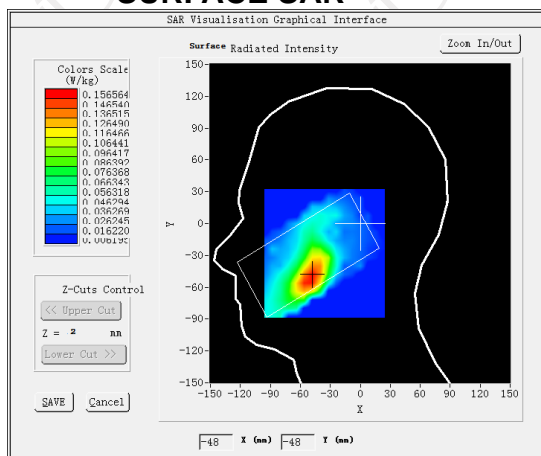


VOLUME SAR

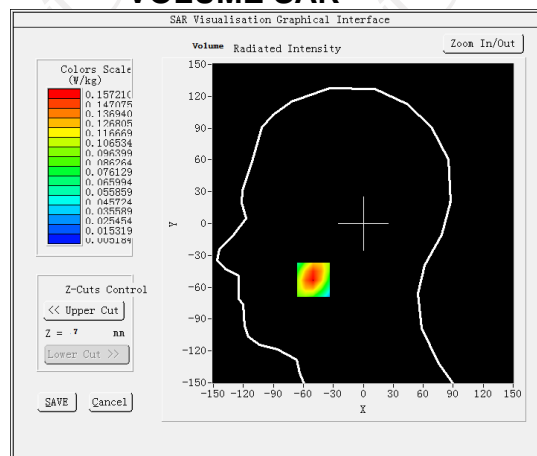


Maximum location: X=-50.00, Y=-53.00

SAR Peak: 0.23 W/kg


SAR 10g (W/Kg)	0.090406
SAR 1g (W/Kg)	0.149330

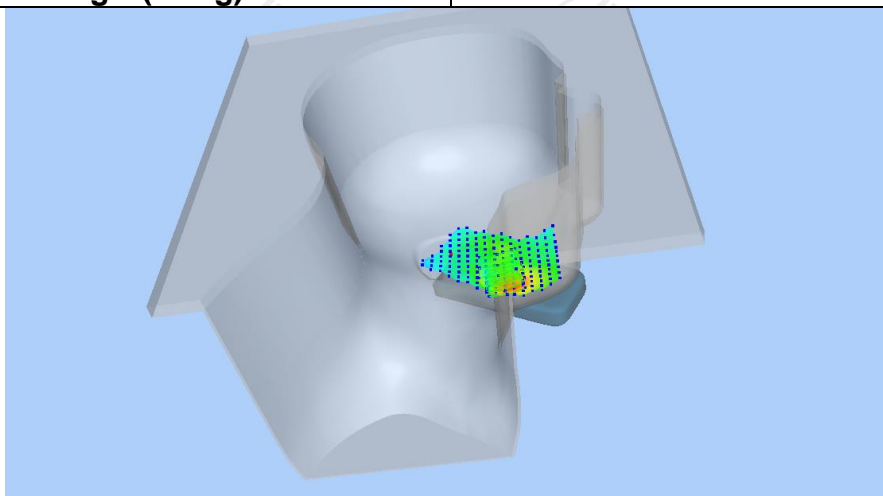

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2304	0.1572	0.0980	0.0641	0.0457

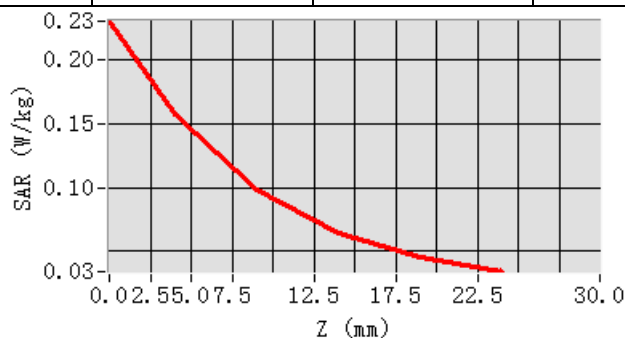

Hot spot position

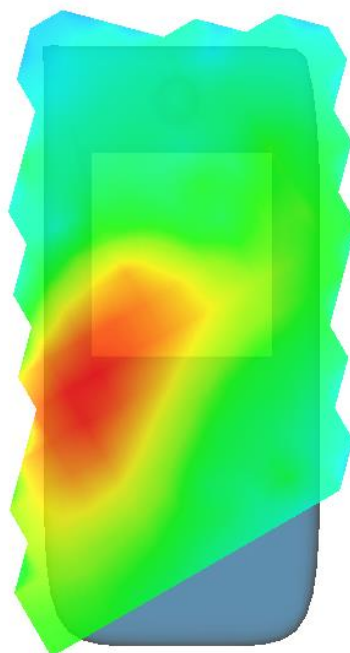


MEASUREMENT 2

Middle Band SAR (Channel 700):


Date: 03/12/2025

Frequency (MHz)	1747.800049
Relative permittivity (real part)	38.761284
Relative permittivity (imaginary part)	13.777154
Conductivity (S/m)	1.371548
Variation (%)	-1.890000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM1800(voice)

SURFACE SAR

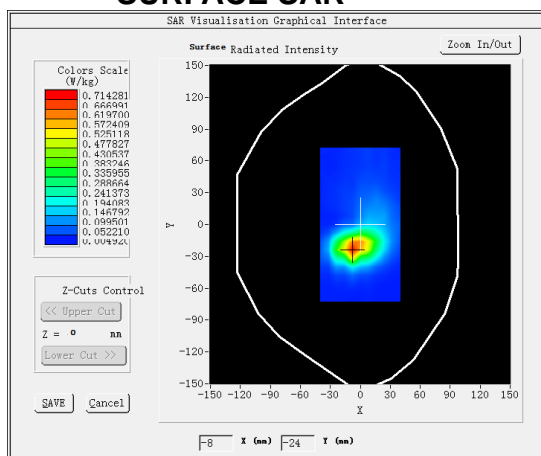


VOLUME SAR

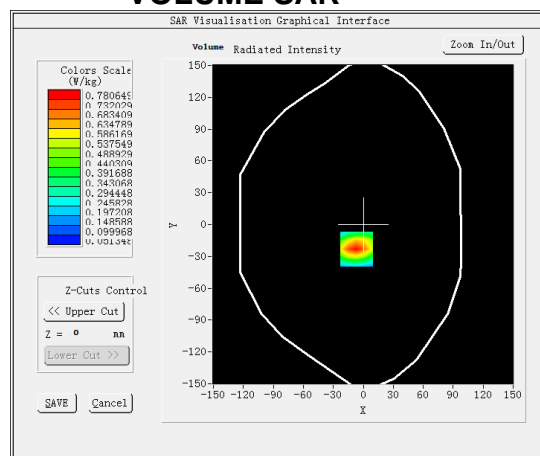


Maximum location: X=-7.00, Y=-23.00

SAR Peak: 1.08 W/kg


SAR 10g (W/Kg)	0.444170
SAR 1g (W/Kg)	0.732669

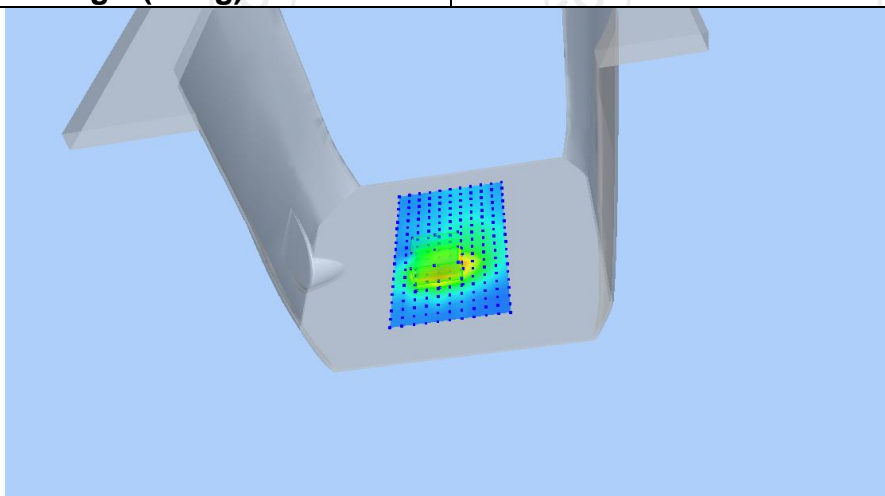

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.0263	0.7806	0.5457	0.3752	0.2525

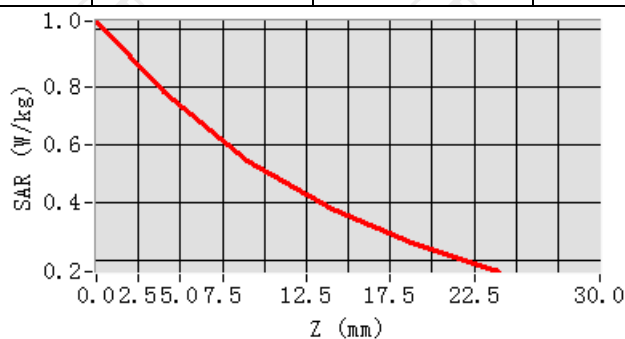

Hot spot position

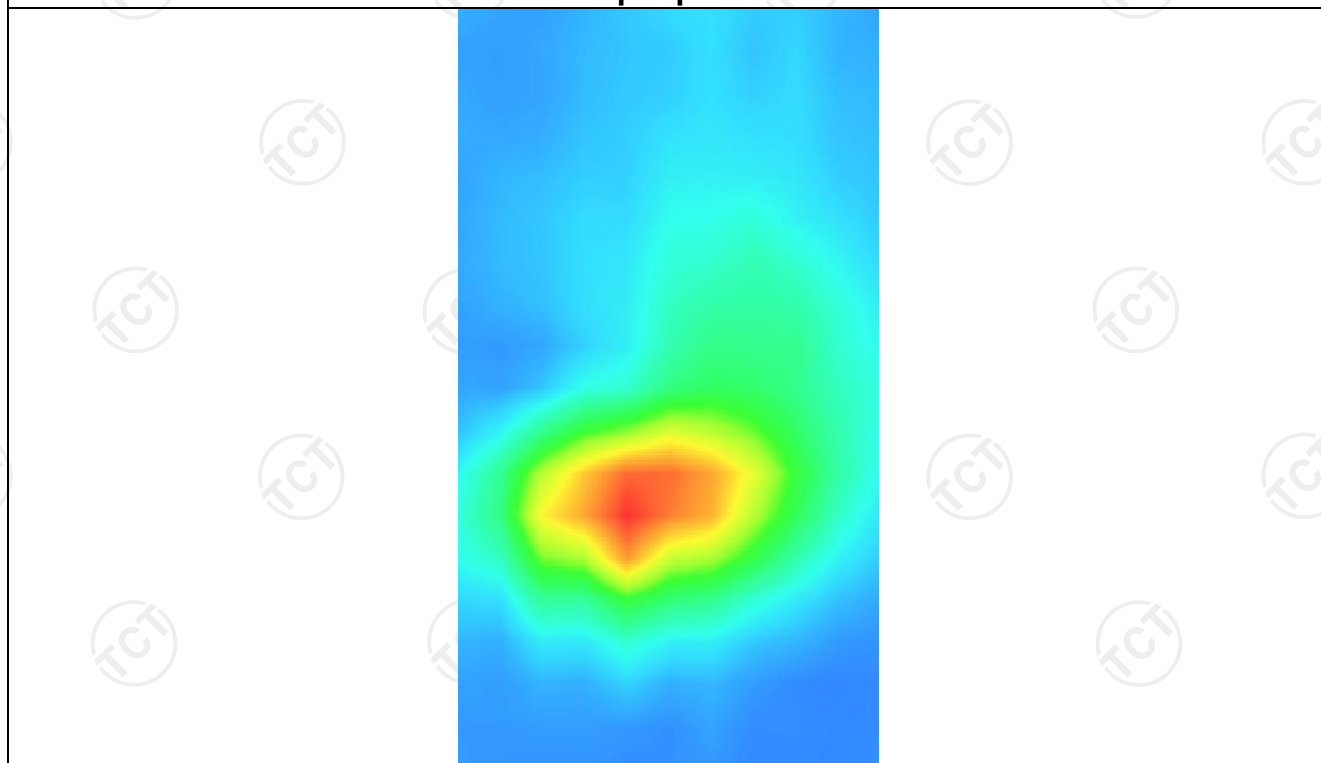


MEASUREMENT 3

Middle Band SAR (Channel 700):


Date: 03/12/2025

Frequency (MHz)	1747.800049
Relative permittivity (real part)	38.761284
Relative permittivity (imaginary part)	13.777154
Conductivity (S/m)	1.371548
Variation (%)	-2.640000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM1800(GPRS 4slot)

SURFACE SAR

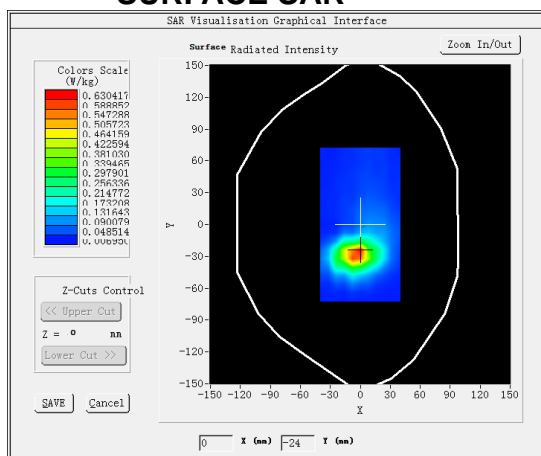


VOLUME SAR

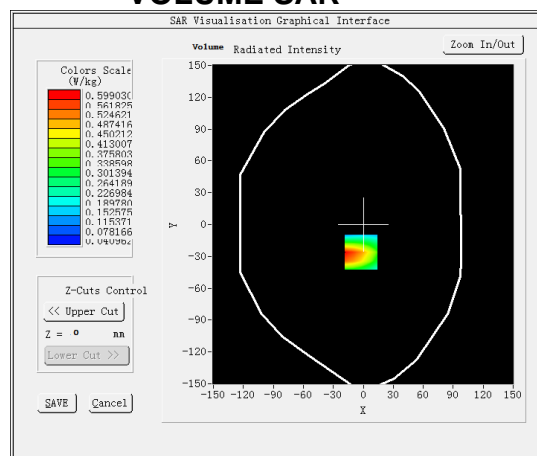


Maximum location: X=-2.00, Y=-26.00

SAR Peak: 0.99 W/kg


SAR 10g (W/Kg)	0.375954
SAR 1g (W/Kg)	0.578841

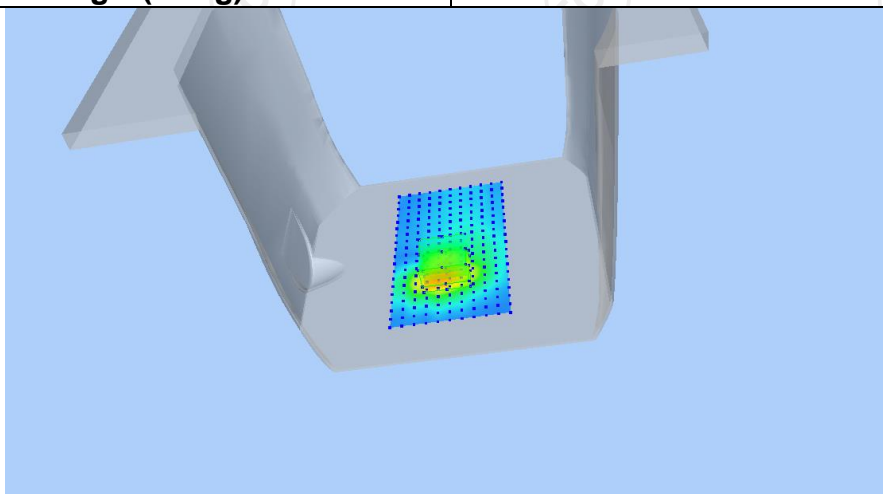

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.1293	0.5990	0.2985	0.1901	0.1396

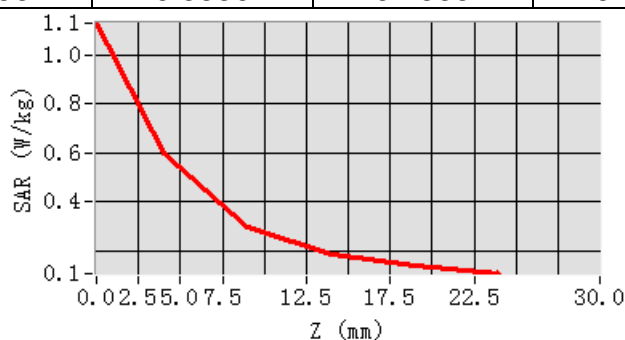

Hot spot position

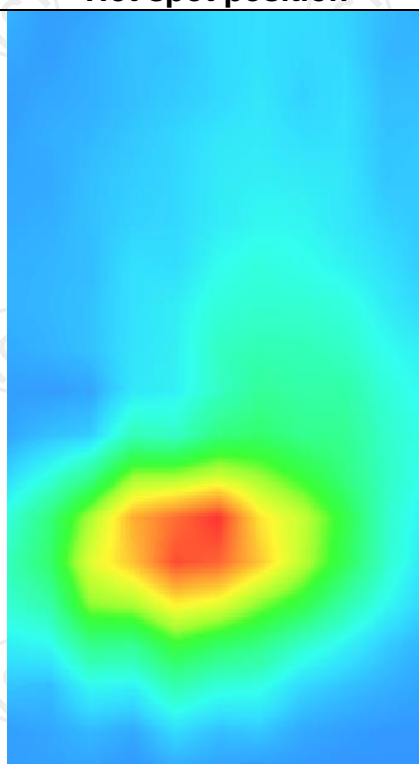

WCDMA Band I


MEASUREMENT 1

High Band SAR (Channel 9888):


Date: 02/28/2025

Frequency (MHz)	1977.600000
Relative permittivity (real part)	39.210241
Relative permittivity (imaginary part)	12.491257
Conductivity (S/m)	1.3751027
Variation (%)	4.820000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band1 UMTS

SURFACE SAR

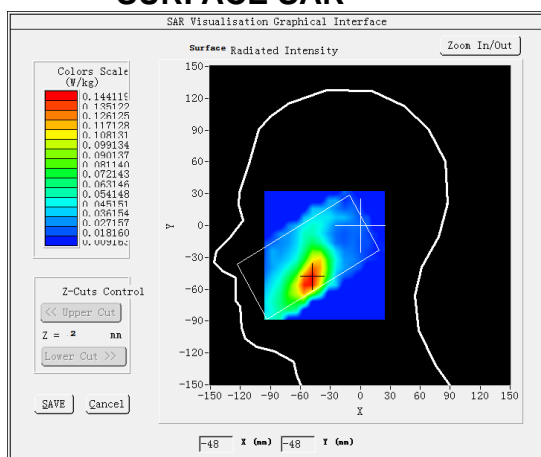


VOLUME SAR

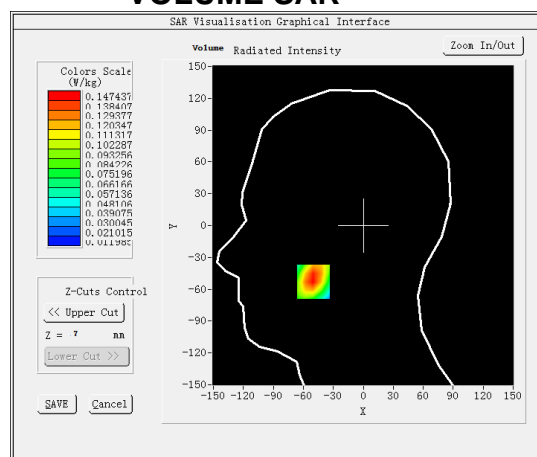


Maximum location: X=-50.00, Y=-53.00

SAR Peak: 0.22 W/kg


SAR 10g (W/Kg)	0.085492
SAR 1g (W/Kg)	0.140635

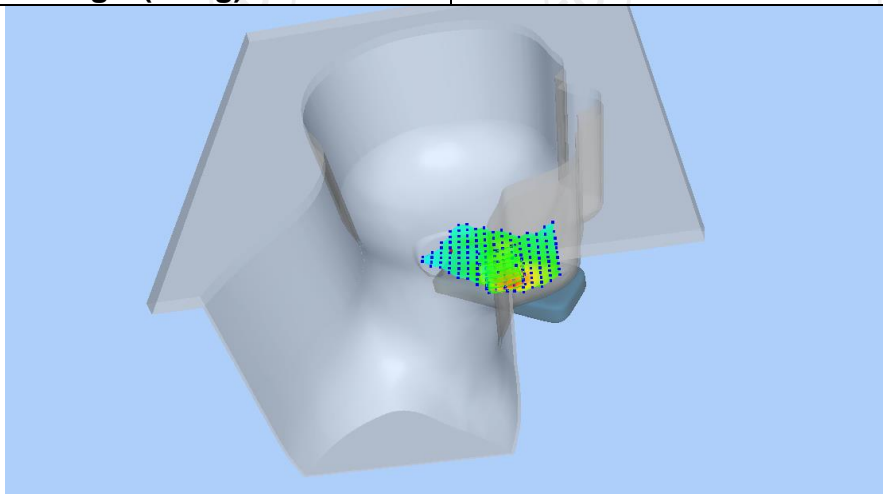

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2203	0.1474	0.0904	0.0598	0.0448

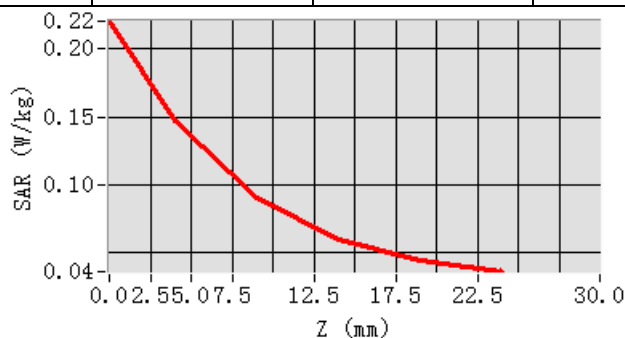

Hot spot position

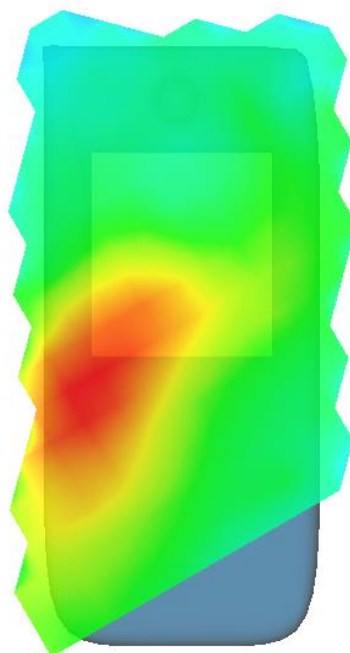


MEASUREMENT 2

High Band SAR (Channel 9888):


Date: 02/28/2025

Frequency (MHz)	1977.600000
Relative permittivity (real part)	39.210241
Relative permittivity (imaginary part)	12.491257
Conductivity (S/m)	1.3751027
Variation (%)	-1.750000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	BAND1_WCDMA2100

SURFACE SAR

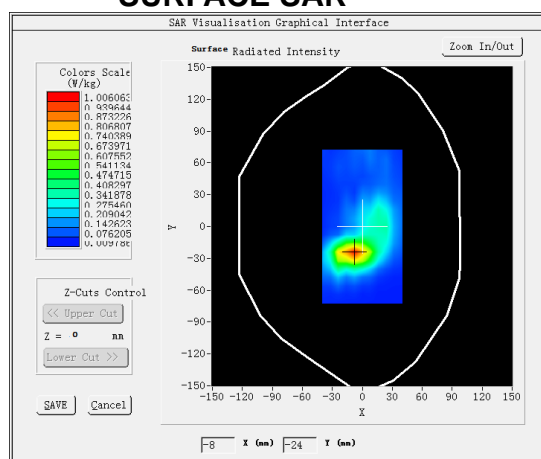


VOLUME SAR

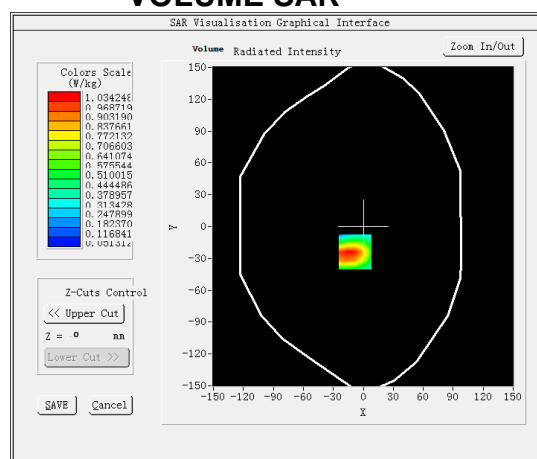


Maximum location: X=-8.00, Y=-24.00

SAR Peak: 1.83 W/kg


SAR 10g (W/Kg)	0.630097
SAR 1g (W/Kg)	1.044557

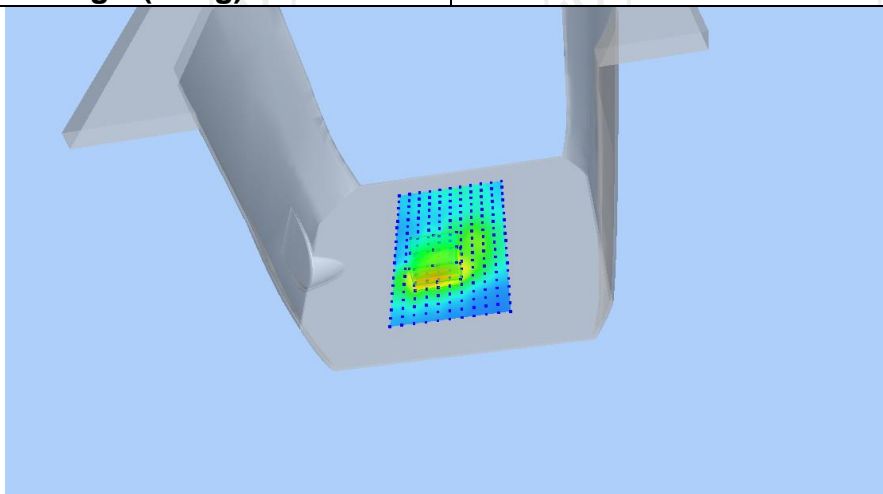

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7770	1.0342	0.7416	0.4338	0.3433

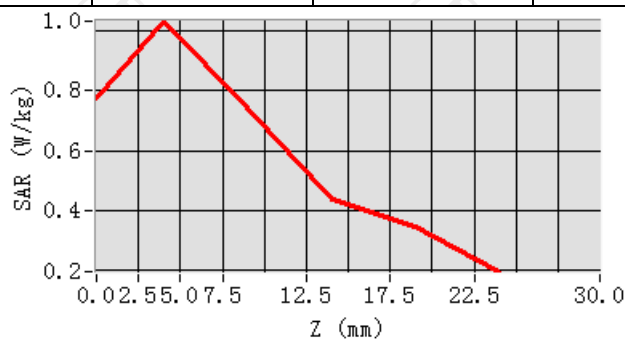

Hot spot position

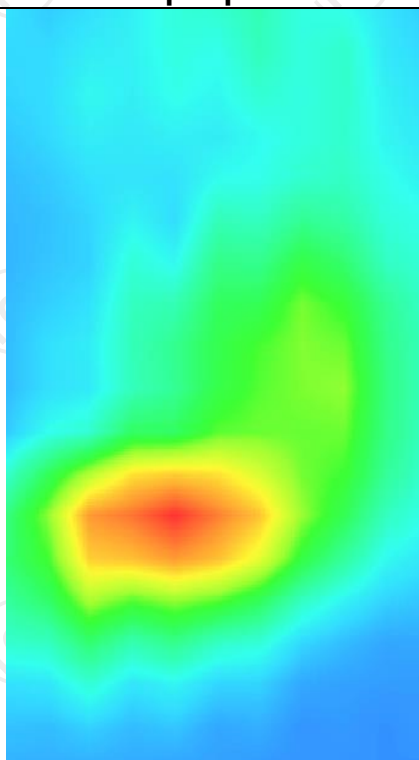

WCDMA Band VIII


MEASUREMENT 1

Middle Band SAR (Channel 27188):


Date: 03/10/2025

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.401571
Relative permittivity (imaginary part)	18.521574
Conductivity (S/m)	0.991257
Variation (%)	-4.010000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	BAND8 WCDMA900

SURFACE SAR

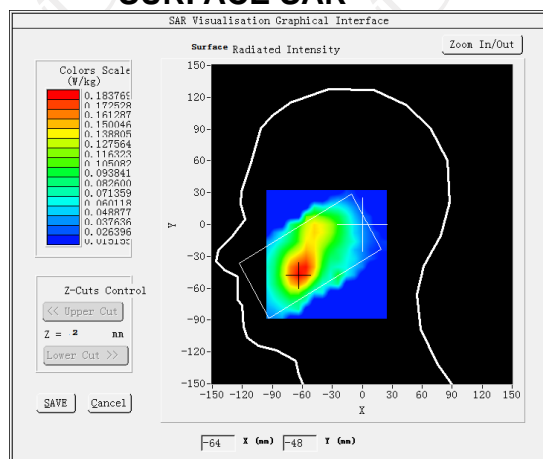


VOLUME SAR

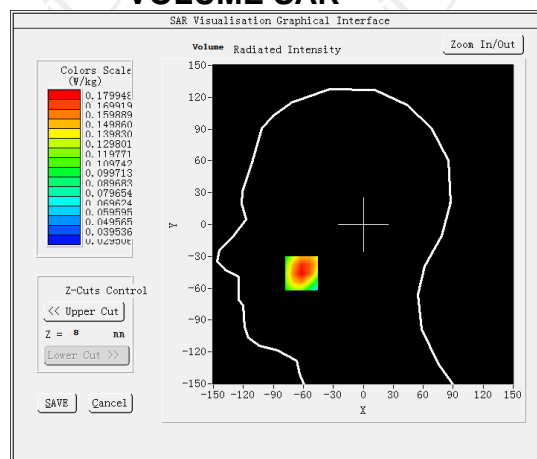


Maximum location: X=-62.00, Y=-46.00

SAR Peak: 0.25 W/kg


SAR 10g (W/Kg)	0.117727
SAR 1g (W/Kg)	0.173567

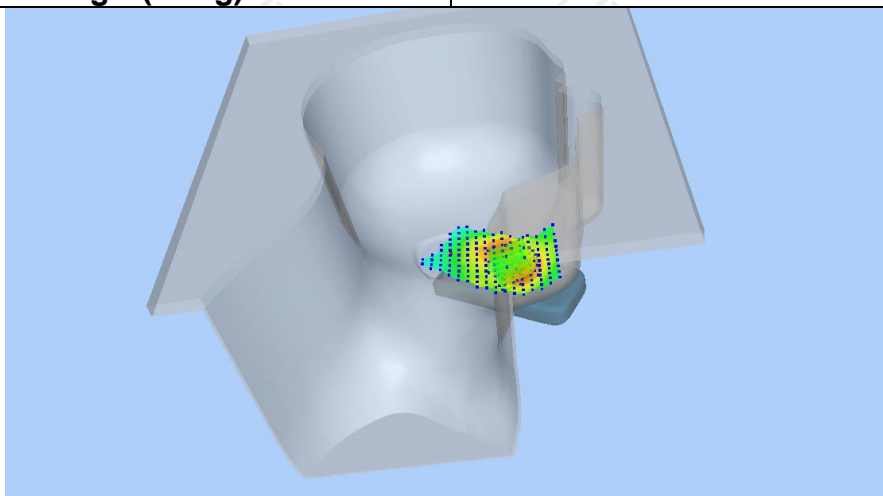

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2428	0.1799	0.1236	0.0862	0.0615

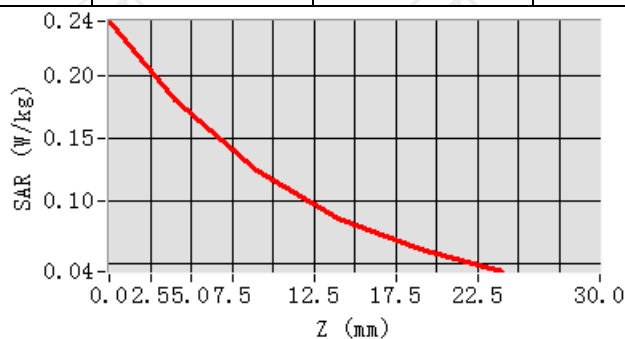

Hot spot position

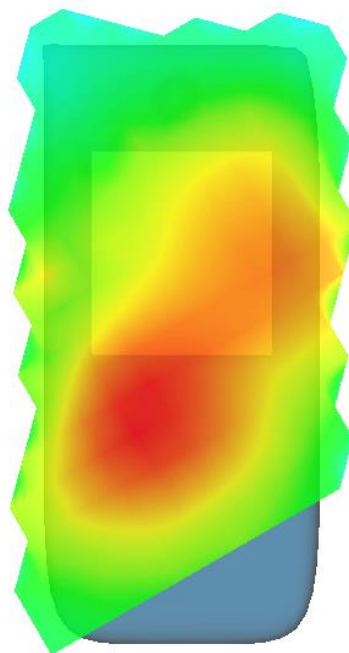


MEASUREMENT 2

Middle Band SAR (Channel 27188):


Date: 03/10/2025

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.401571
Relative permittivity (imaginary part)	18.521574
Conductivity (S/m)	0.991257
Variation (%)	4.910000
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm,Complete</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back</u>
Band	<u>BAND8 WCDMA900</u>

SURFACE SAR

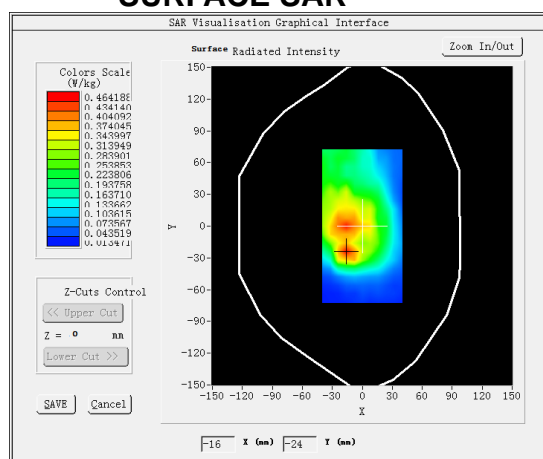


VOLUME SAR

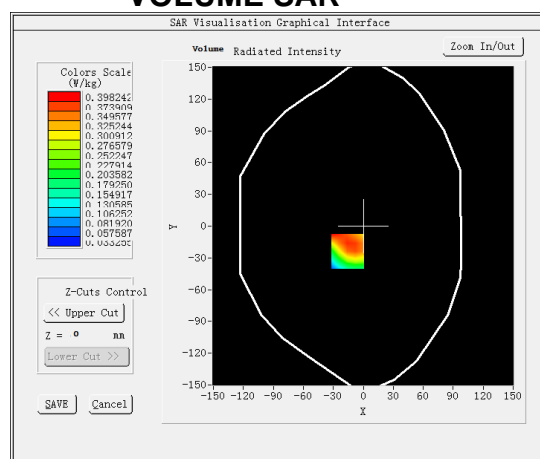


Maximum location: X=-16.00, Y=-24.00

SAR Peak: 0.54 W/kg


SAR 10g (W/Kg)	0.243073
SAR 1g (W/Kg)	0.364374

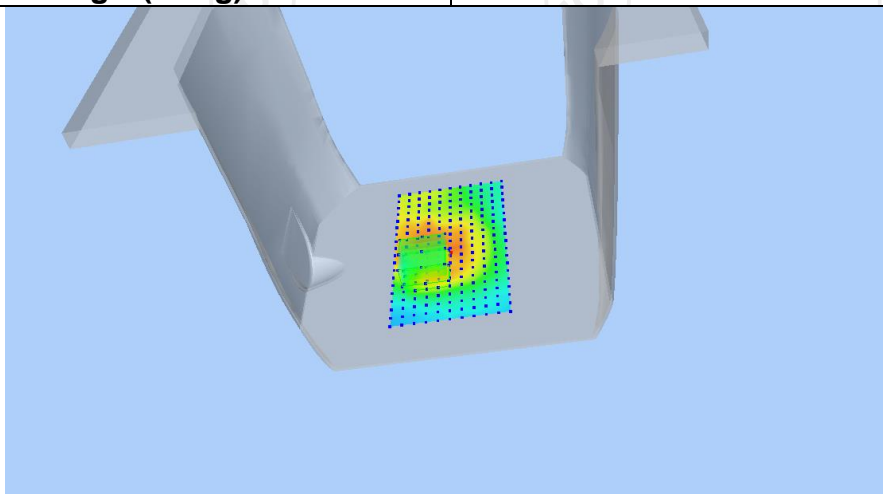

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.5324	0.3982	0.1555	0.1940	0.0867

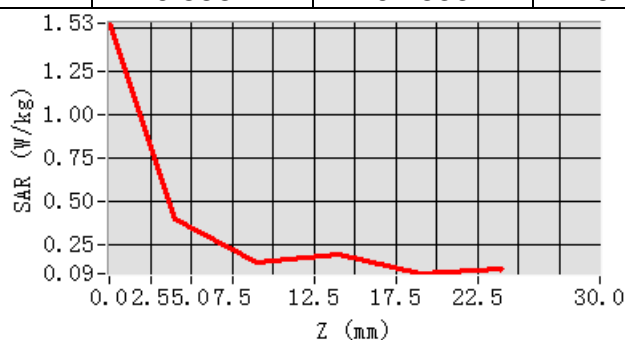

Hot spot position

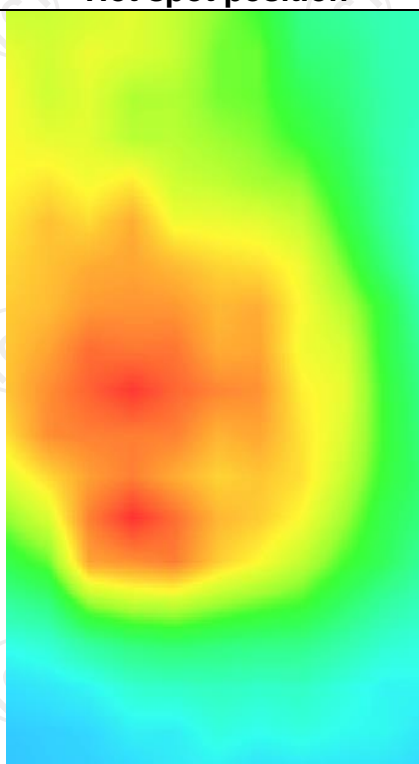

LTE Band I


MEASUREMENT 1

Low Band SAR (Channel 18100):


Date: 02/28/2025

Frequency (MHz)	1930.000000
Relative permittivity (real part)	39.241574
Relative permittivity (imaginary part)	12.441251
Conductivity (S/m)	1.421051
Variation (%)	-0.900000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 1

SURFACE SAR

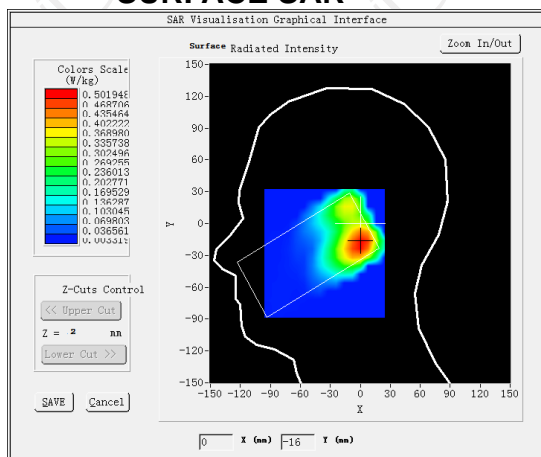


VOLUME SAR

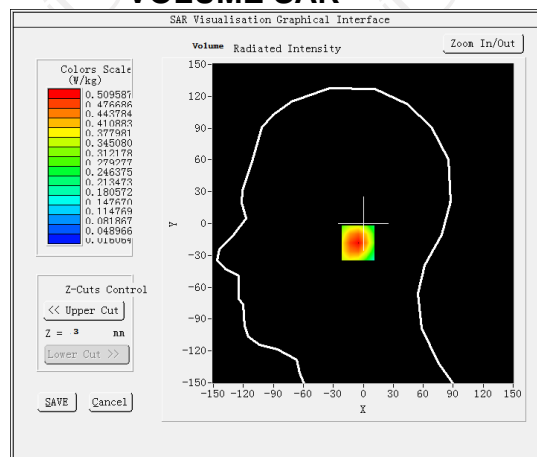


Maximum location: X=1.00, Y=-18.00

SAR Peak: 0.74 W/kg


SAR 10g (W/Kg)	0.291205
SAR 1g (W/Kg)	0.420125

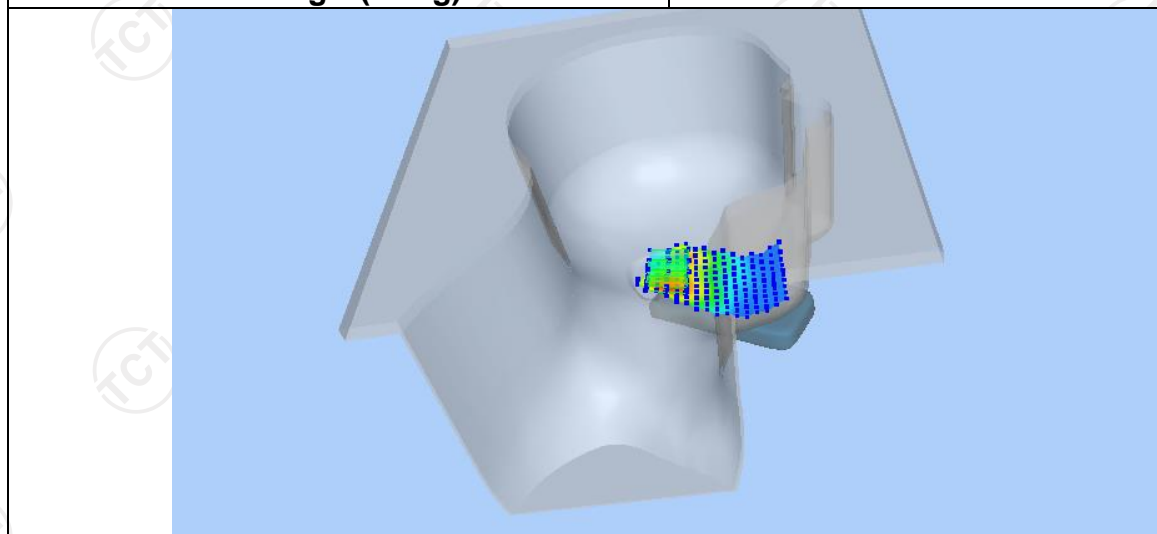

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7418	0.5096	0.3091	0.1820	0.1035

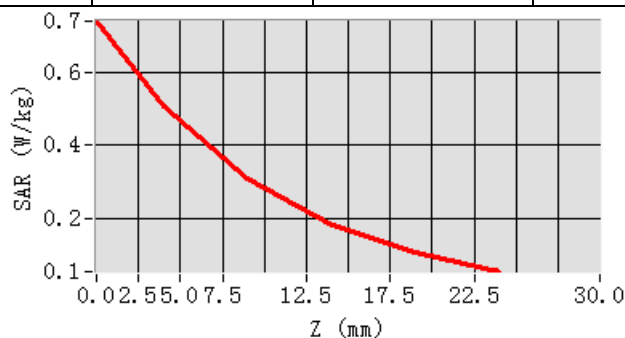

Hot spot position

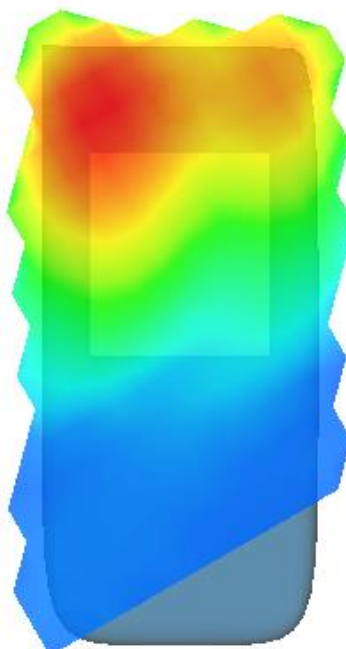


MEASUREMENT 2

Low Band SAR (Channel 18100):


Date: 02/28/2025

Frequency (MHz)	1930.000000
Relative permittivity (real part)	39.241574
Relative permittivity (imaginary part)	12.441251
Conductivity (S/m)	1.421051
Variation (%)	1.530000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 1

SURFACE SAR

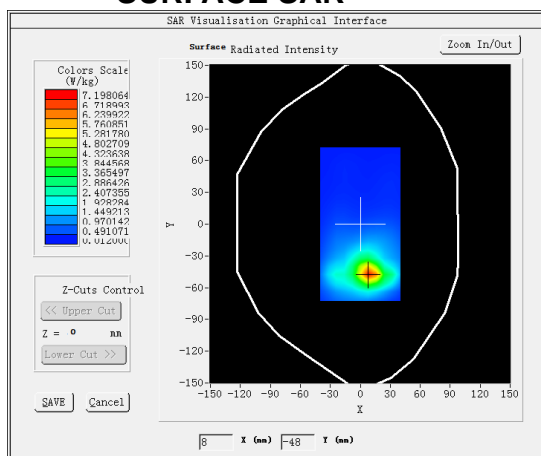


VOLUME SAR

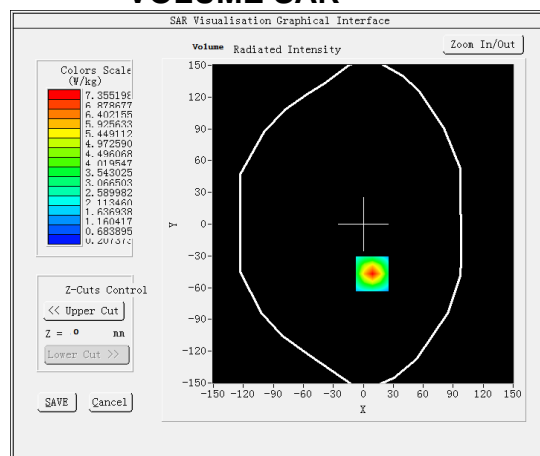


Maximum location: X=9.00, Y=-45.00

SAR Peak: 2.06 W/kg


SAR 10g (W/Kg)	0.832157
SAR 1g (W/Kg)	1.265305

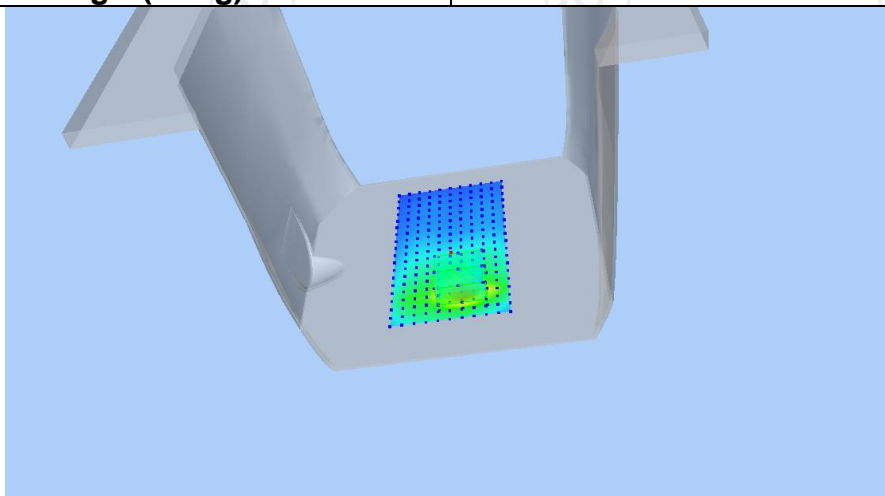

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.0570	1.3900	0.8471	0.5322	0.3561

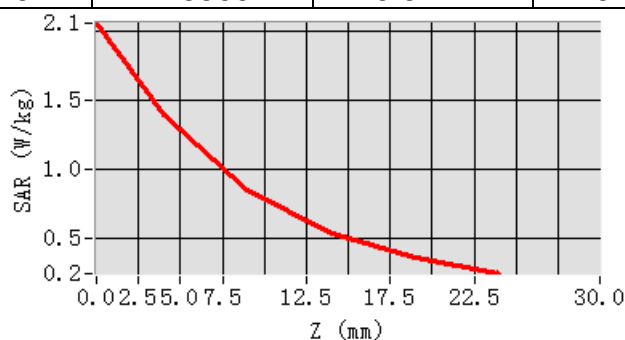

Hot spot position

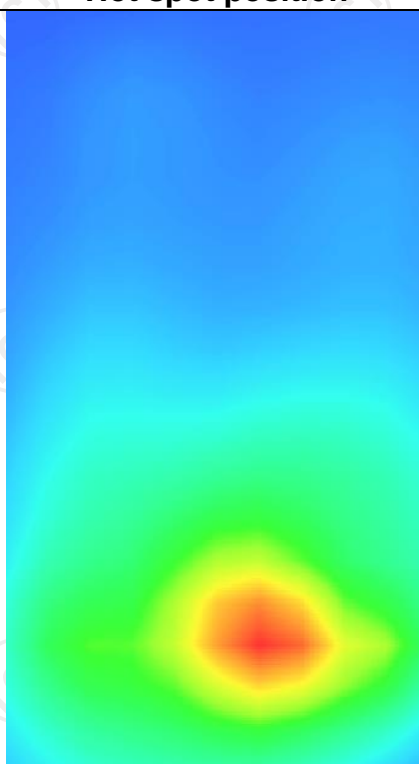


LTE Band III MEASUREMENT 1

Low Band SAR (Channel 19300):


Date: 03/12/2025

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.230217
Relative permittivity (imaginary part)	13.801574
Conductivity (S/m)	1.430258
Variation (%)	-1.820000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 3

SURFACE SAR

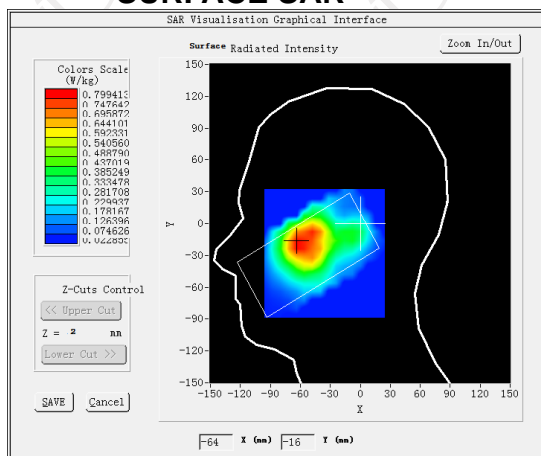


VOLUME SAR

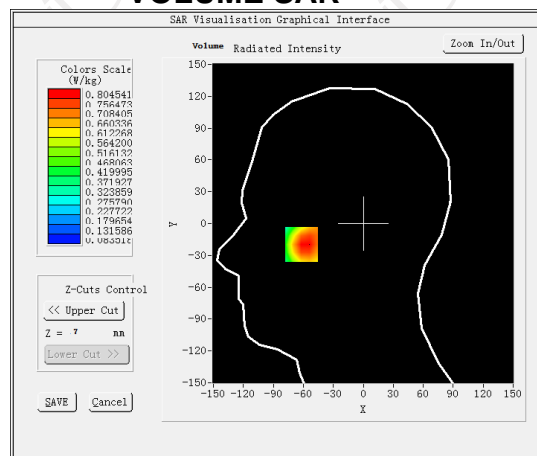


Maximum location: X=-62.00, Y=-19.00

SAR Peak: 0.62W/kg


SAR 10g (W/Kg)	0.242075
SAR 1g (W/Kg)	0.391524

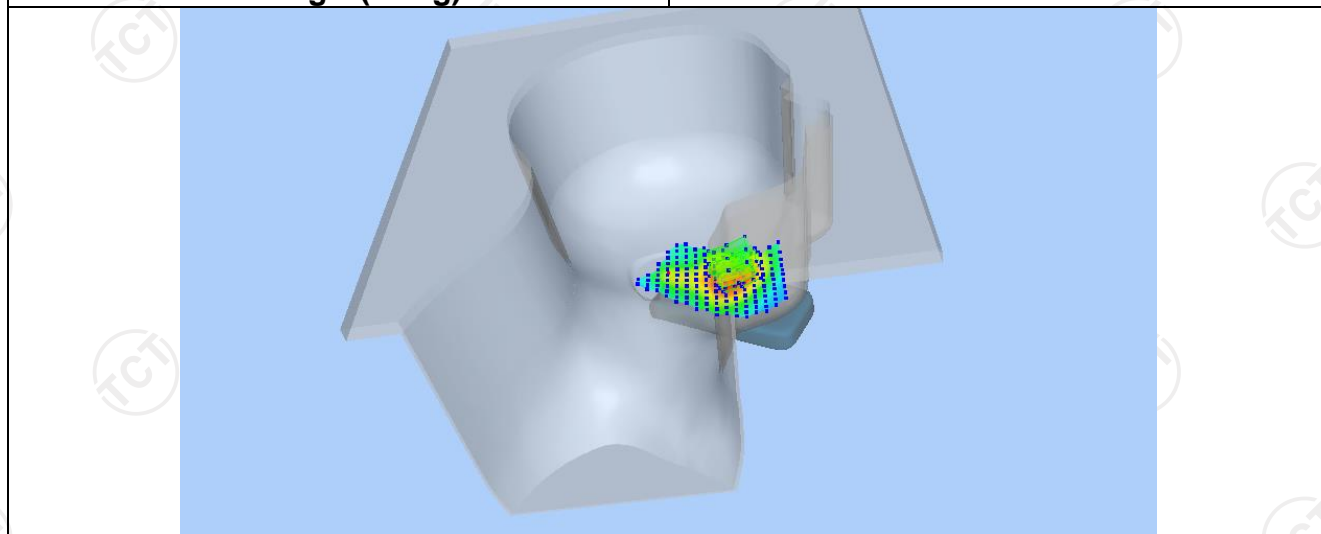

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6178	0.4363	0.2817	0.1860	0.1279

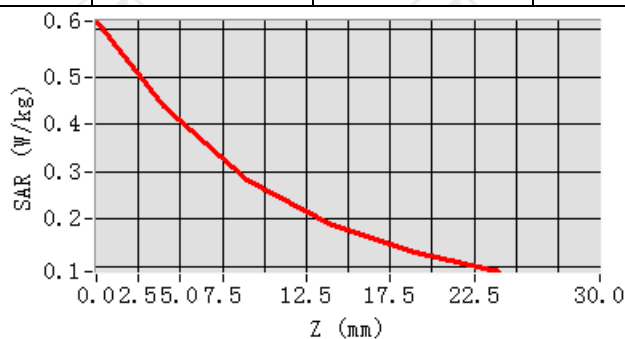

Hot spot position

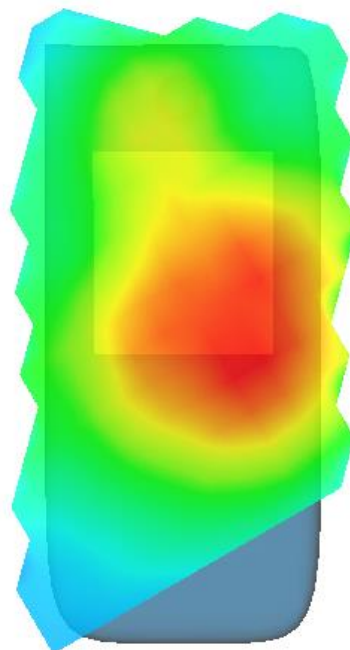


MEASUREMENT 2

Low Band SAR (Channel 19300):


Date: 03/12/2025

Frequency (MHz)	1720.000000
Relative permittivity (real part)	40.230217
Relative permittivity (imaginary part)	13.801574
Conductivity (S/m)	1.430258
Variation (%)	-1.920000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 3

SURFACE SAR

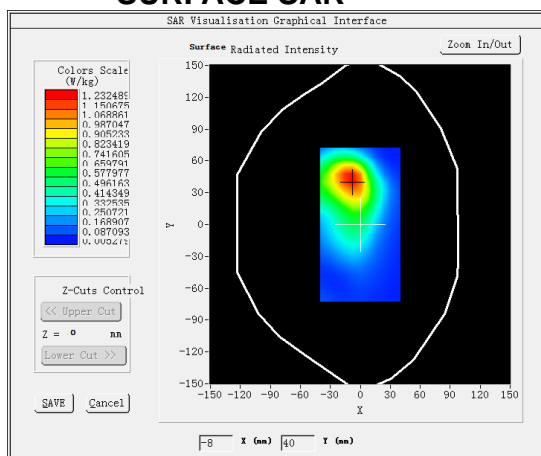


VOLUME SAR

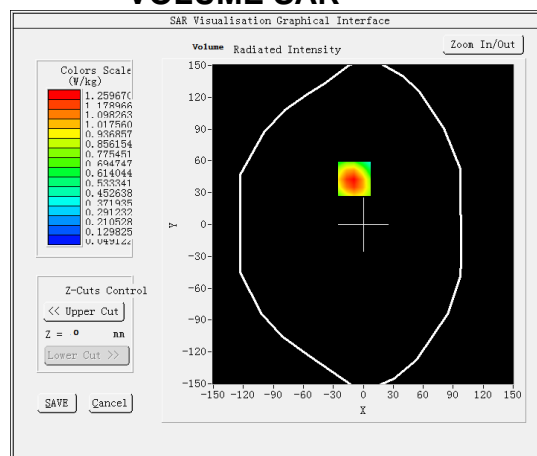


Maximum location: X=-9.00, Y=43.00

SAR Peak: 1.57 W/kg


SAR 10g (W/Kg)	0.612587
SAR 1g (W/Kg)	1.032158

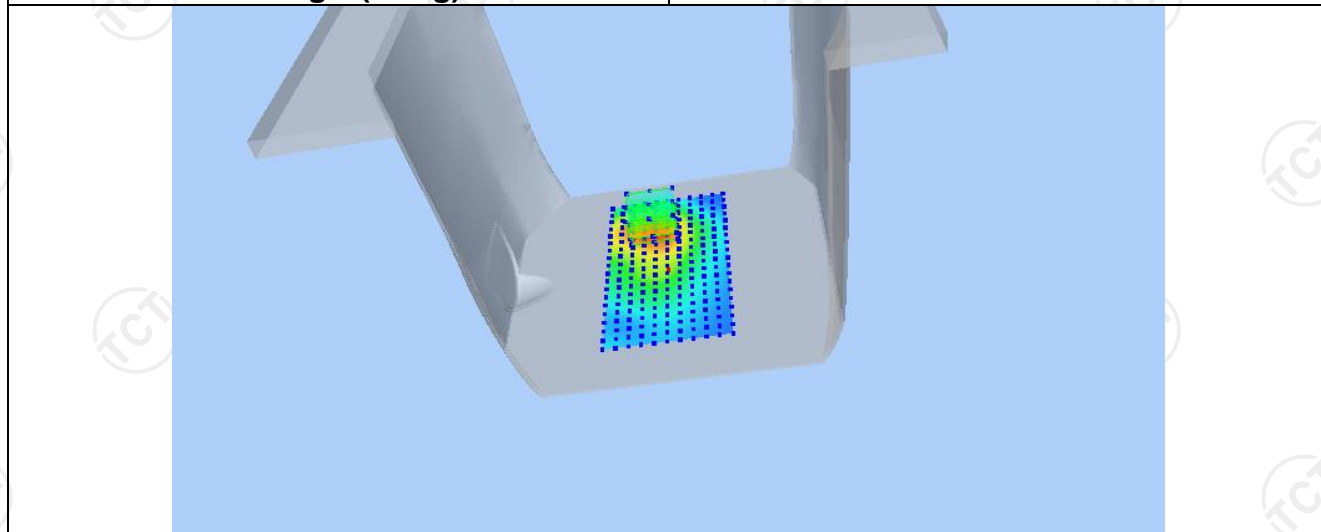

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.5660	1.0800	0.6553	0.3820	0.2109

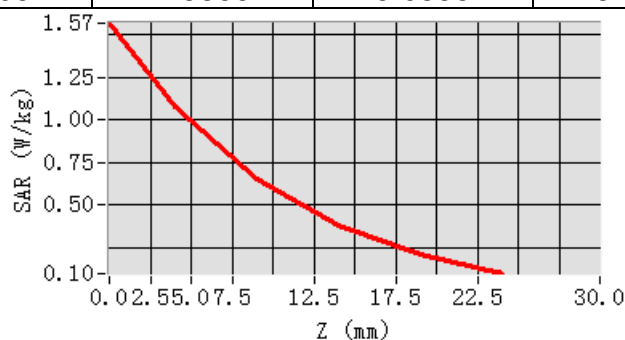

Hot spot position

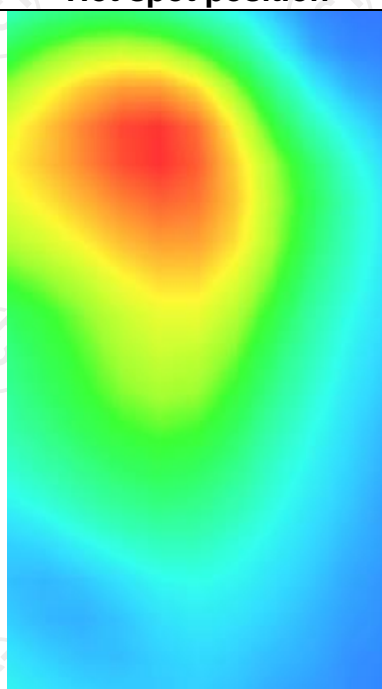

LTE Band 7


MEASUREMENT 1

Middle Band SAR (Channel 21100):


Date: 02/25/2025

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.615742
Relative permittivity (imaginary part)	13.351254
Conductivity (S/m)	1.927154
Variation (%)	-0.620000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 7

SURFACE SAR

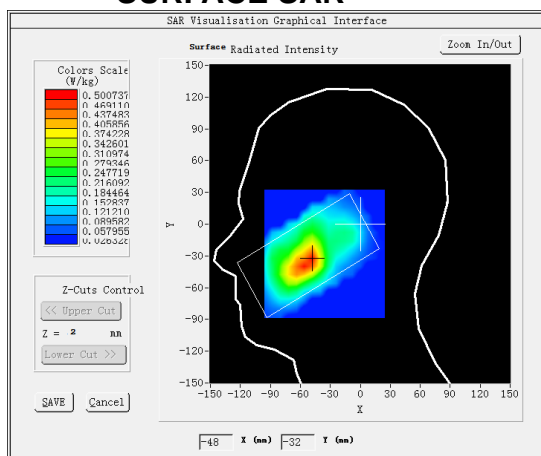


VOLUME SAR

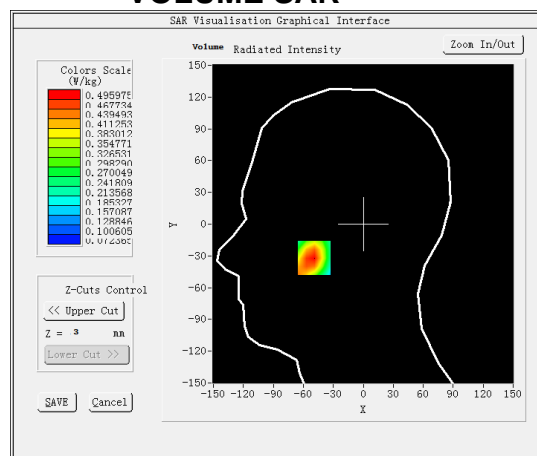


Maximum location: X=-49.00, Y=-32.00

SAR Peak:0.70 W/kg


SAR 10g (W/Kg)	0.303254
SAR 1g (W/Kg)	0.474369

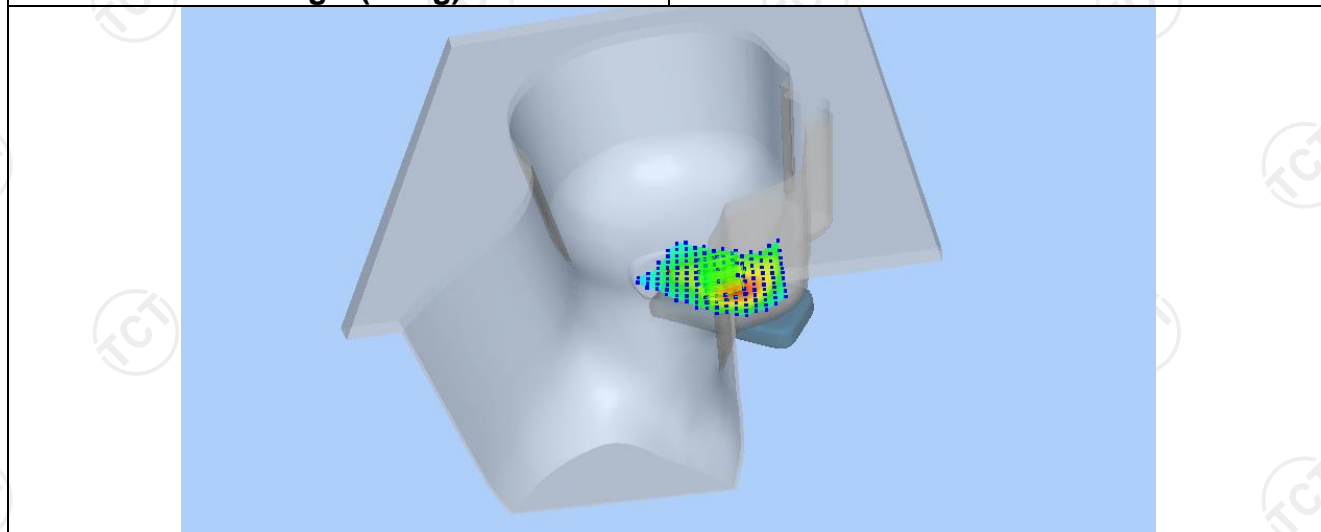

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6952	0.4960	0.3278	0.2257	0.1657

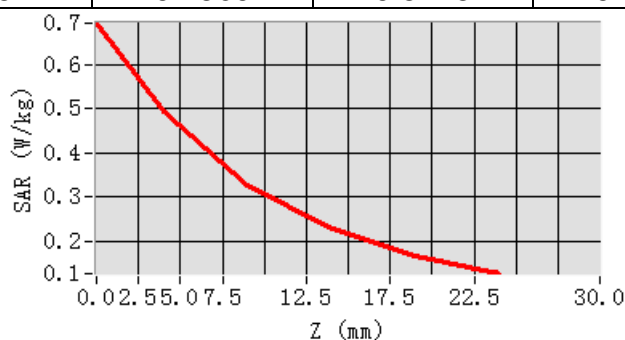

Hot spot position

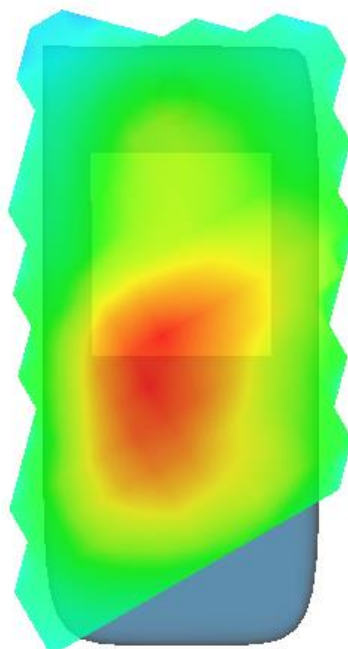


MEASUREMENT 2

Middle Band SAR (Channel 21100):


Date: 02/25/2025

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.615742
Relative permittivity (imaginary part)	13.351254
Conductivity (S/m)	1.927154
Variation (%)	-1.050000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 7

SURFACE SAR

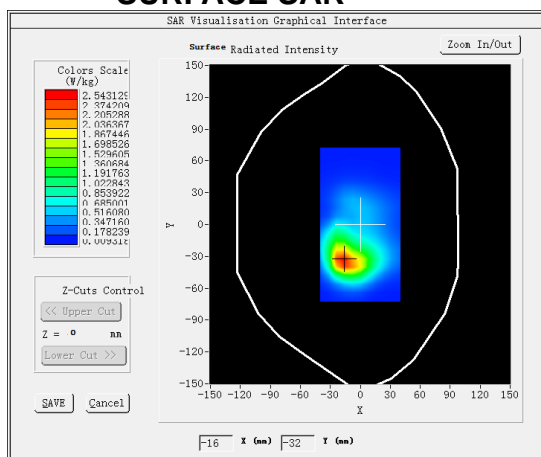


VOLUME SAR

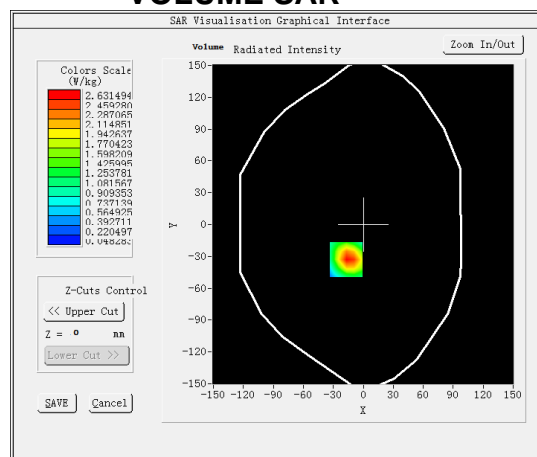


Maximum location: X=-15.00, Y=-31.00

SAR Peak: 4.78 W/kg


SAR 10g (W/Kg)	1.102547
SAR 1g (W/Kg)	2.602154

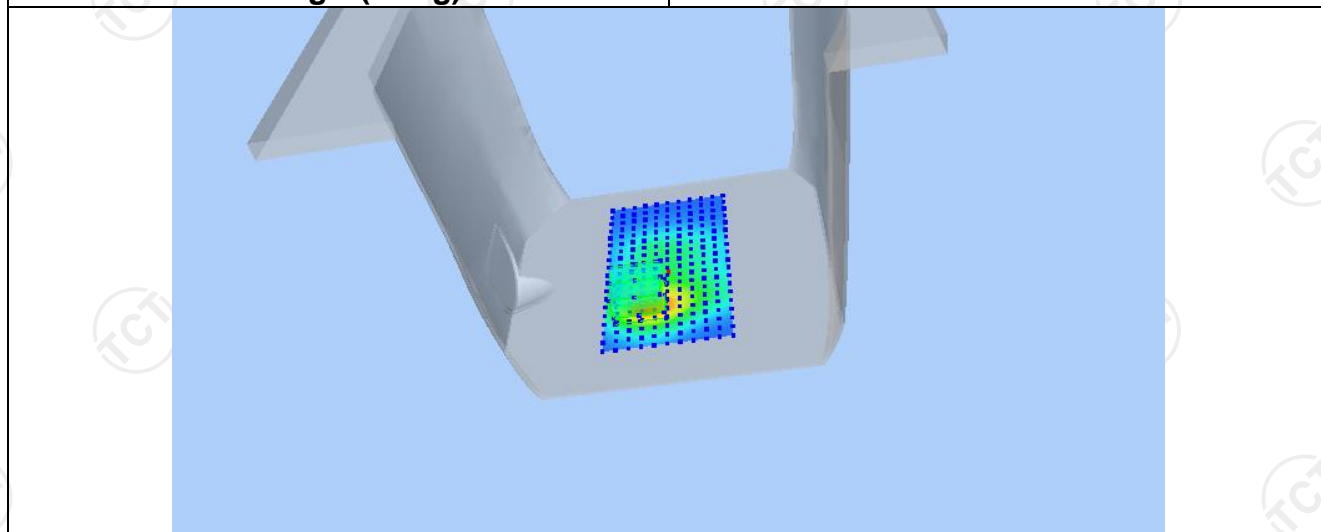

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	4.7132	2.6315	1.1948	0.5471	0.2881

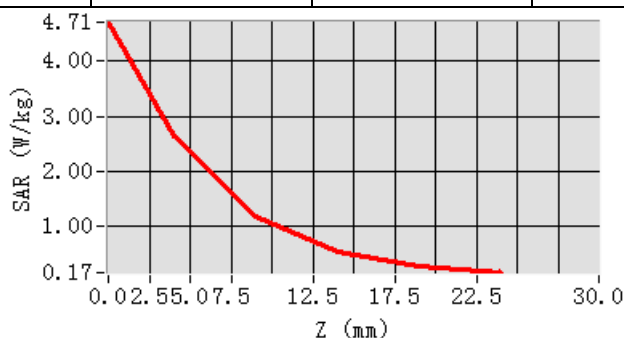

Hot spot position

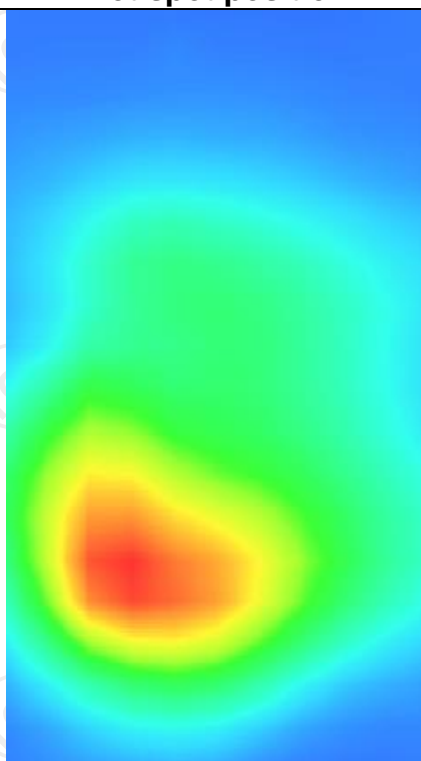

LTE Band 8


MEASUREMENT 1

Middle Band SAR (Channel 21625):


Date: 03/10/2025

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.410257
Relative permittivity (imaginary part)	18.432154
Conductivity (S/m)	0.964152
Variation (%)	-0.250000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 8

SURFACE SAR

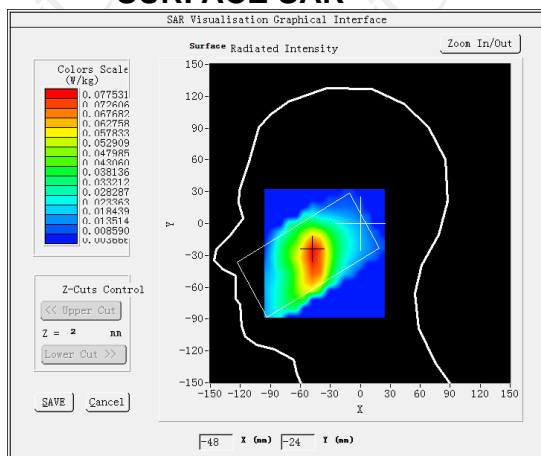


VOLUME SAR

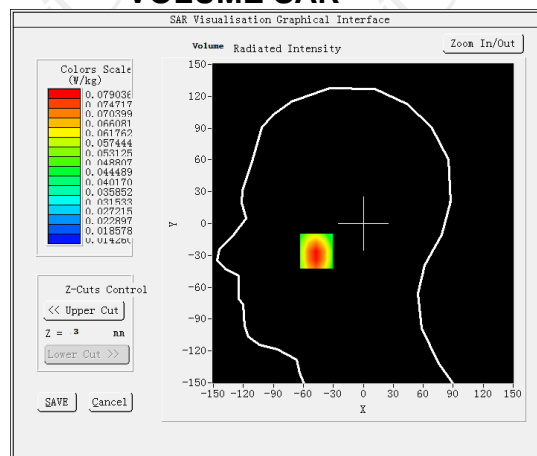


Maximum location: X=-34.00, Y=-10.00

SAR Peak: 0.23 W/kg


SAR 10g (W/Kg)	0.141251
SAR 1g (W/Kg)	0.181021

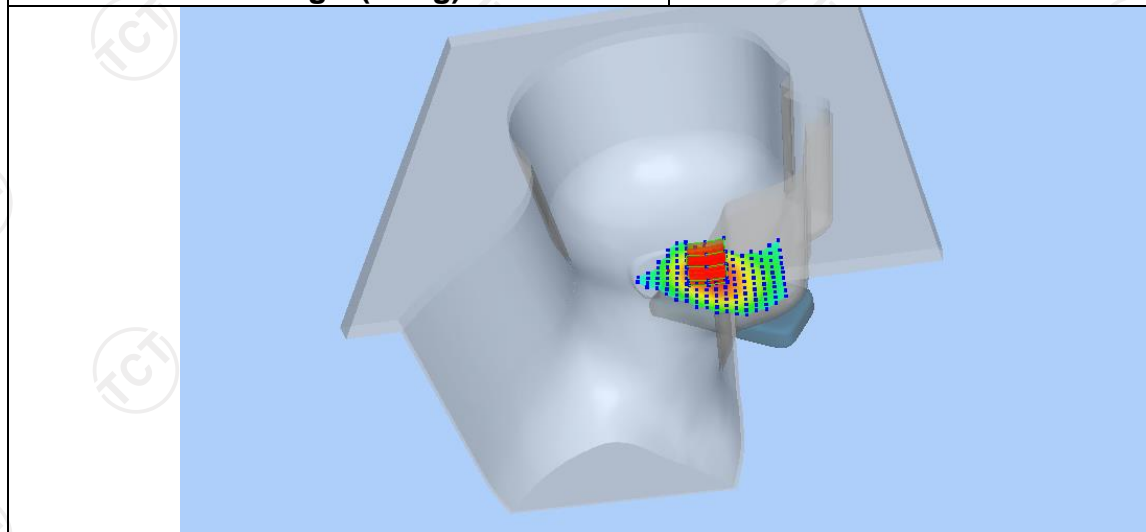

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2324	0.2000	0.1643	0.1336	0.1071

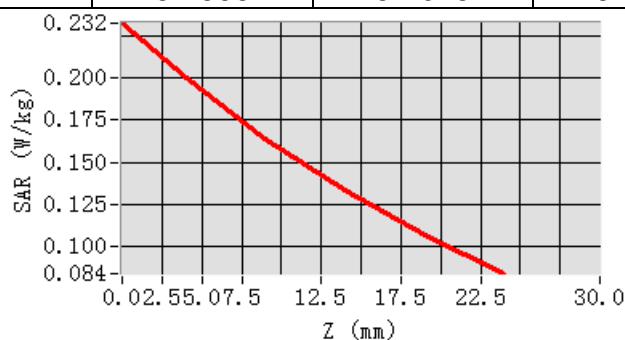

Hot spot position

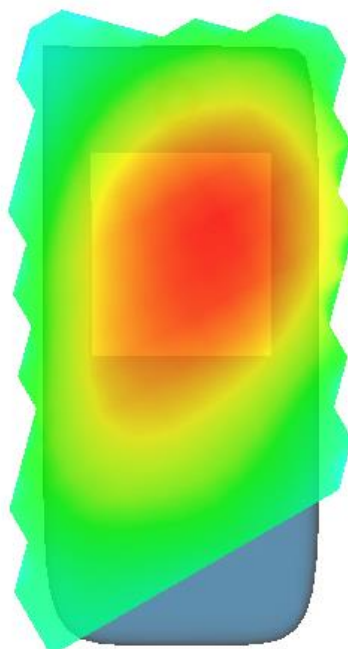


MEASUREMENT 2

Middle Band SAR (Channel 21625):


Date: 03/10/2025

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.410257
Relative permittivity (imaginary part)	18.432154
Conductivity (S/m)	0.964152
Variation (%)	2.300000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 8

SURFACE SAR

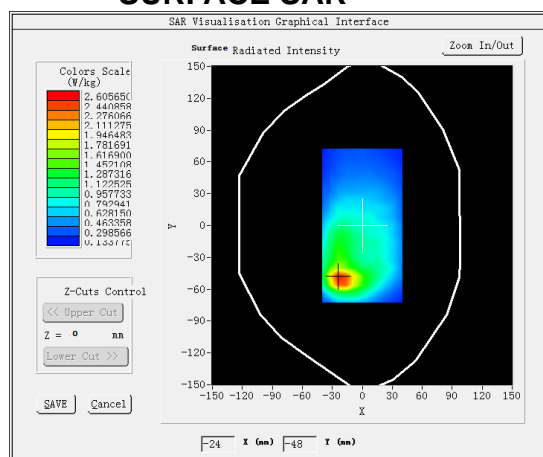


VOLUME SAR

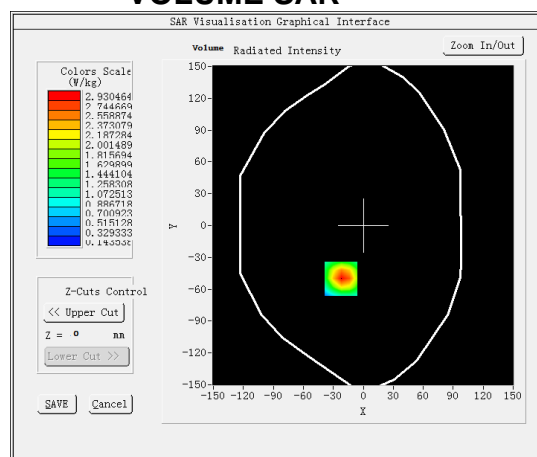


Maximum location: X=-22.00, Y=-50.00

SAR Peak: 0.72 W/kg


SAR 10g (W/Kg)	0.224815
SAR 1g (W/Kg)	0.412584

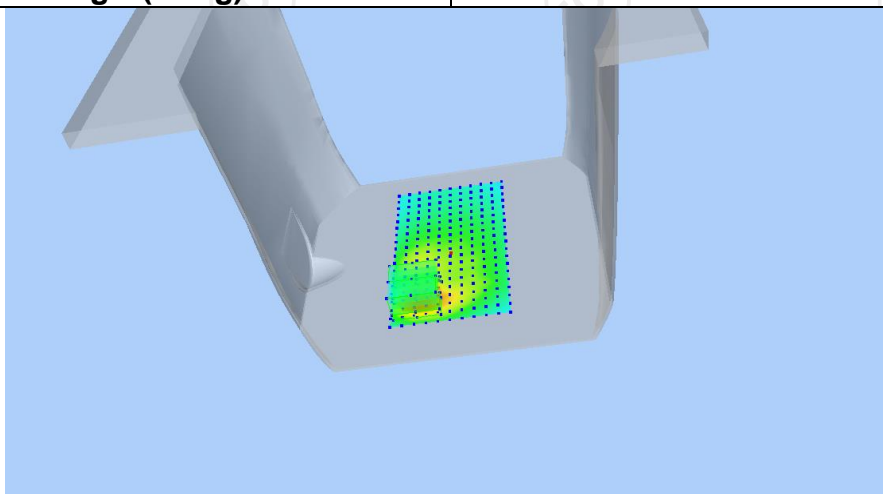

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7121	0.4454	0.2430	0.1370	0.0850

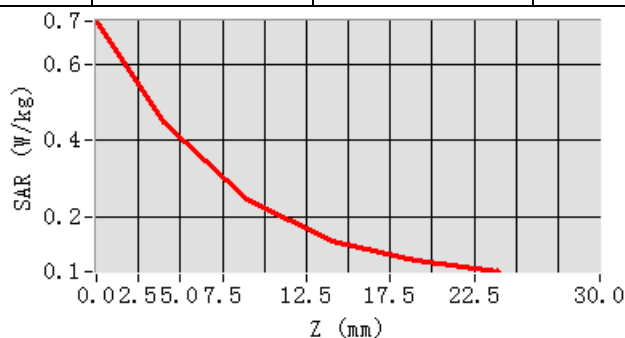

Hot spot position

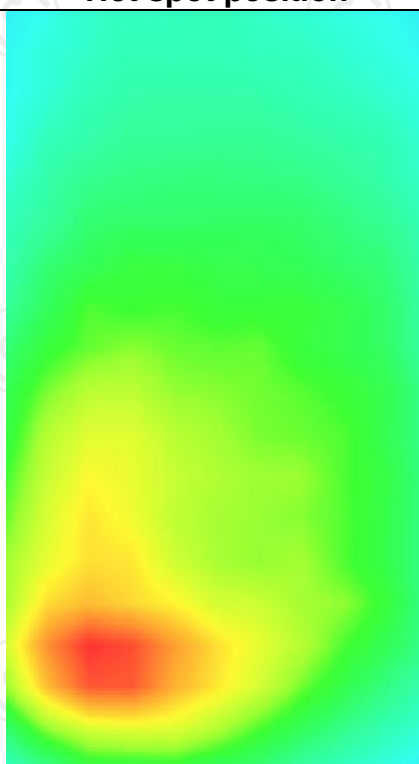

LTE Band 20


MEASUREMENT 1

Low Band SAR (Channel 24250):


Date: 03/10/2025

Frequency (MHz)	842.000000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.021540
Conductivity (S/m)	0.951247
Variation (%)	-1.620000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 20

SURFACE SAR

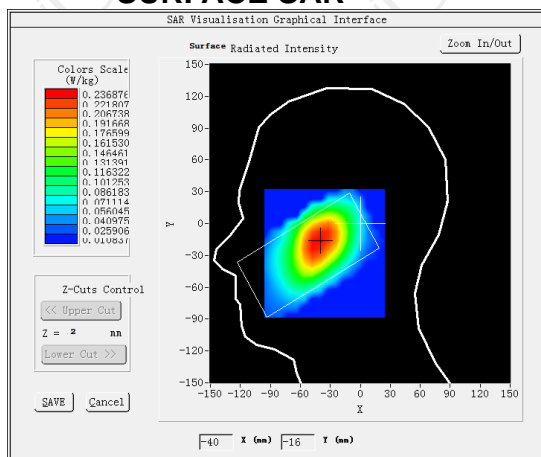


VOLUME SAR

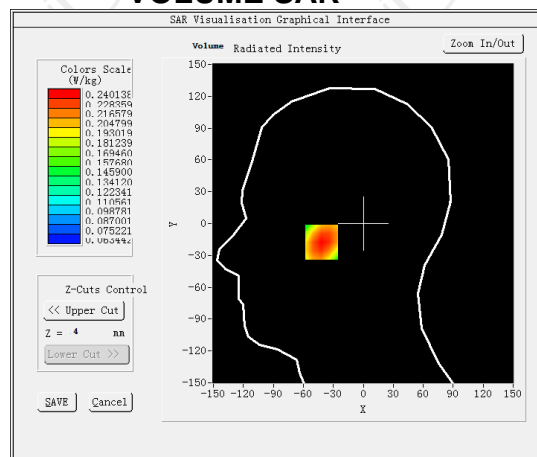


Maximum location: X=-42.00, Y=-17.00

SAR Peak: 0.28 W/kg


SAR 10g (W/Kg)	0.161254
SAR 1g (W/Kg)	0.210215

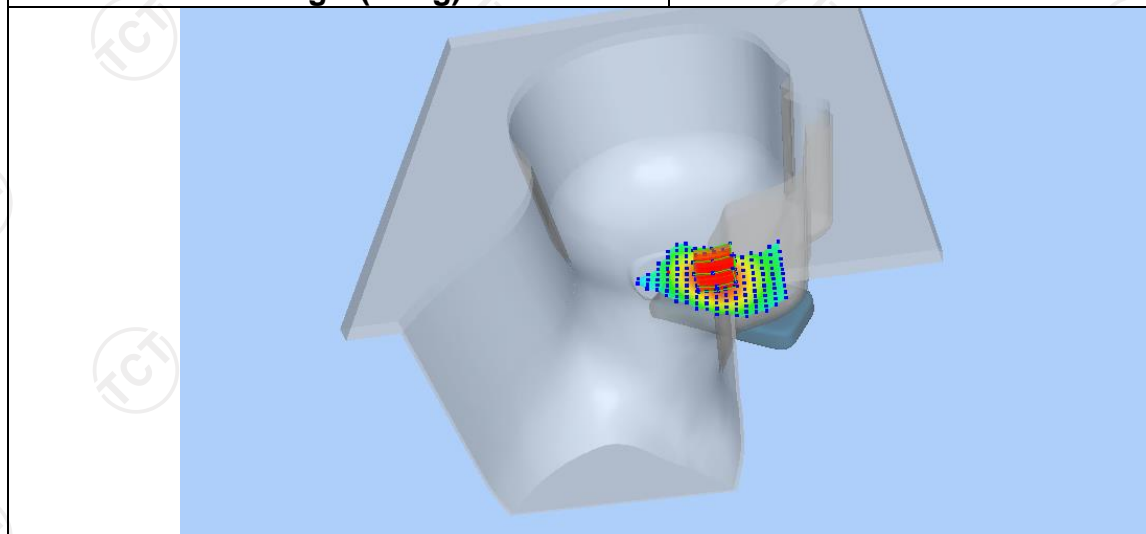

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2812	0.2401	0.1975	0.1635	0.1361

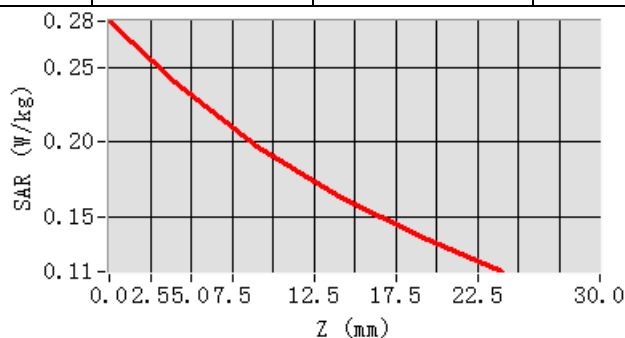

Hot spot position

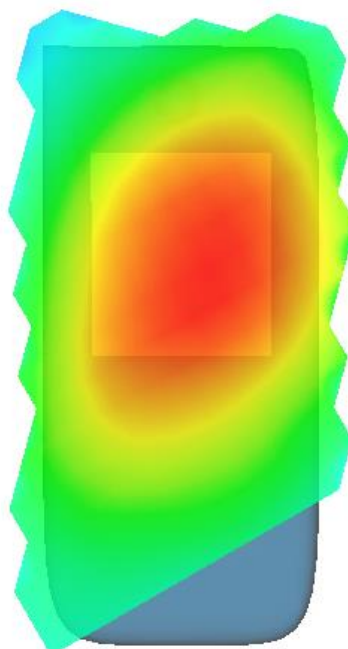


MEASUREMENT 2

Low Band SAR (Channel 24250):


Date: 03/10/2025

Frequency (MHz)	842.000000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.021540
Conductivity (S/m)	0.951247
Variation (%)	1.520000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 20

SURFACE SAR

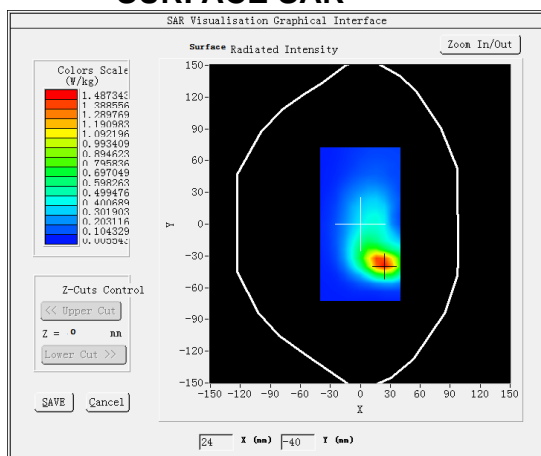


VOLUME SAR

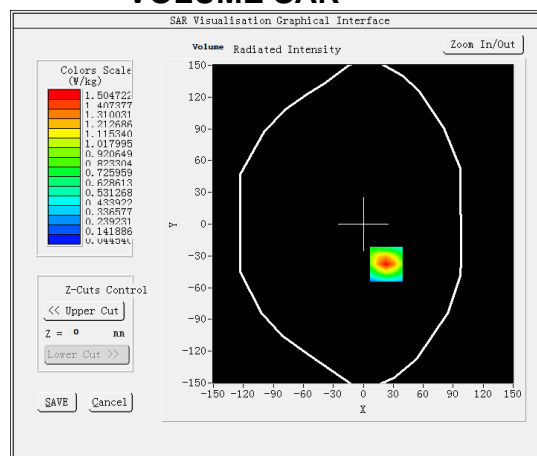


Maximum location: X=23.00, Y=-38.00

SAR Peak: 1.81 W/kg


SAR 10g (W/Kg)	0.562157
SAR 1g (W/Kg)	1.021547

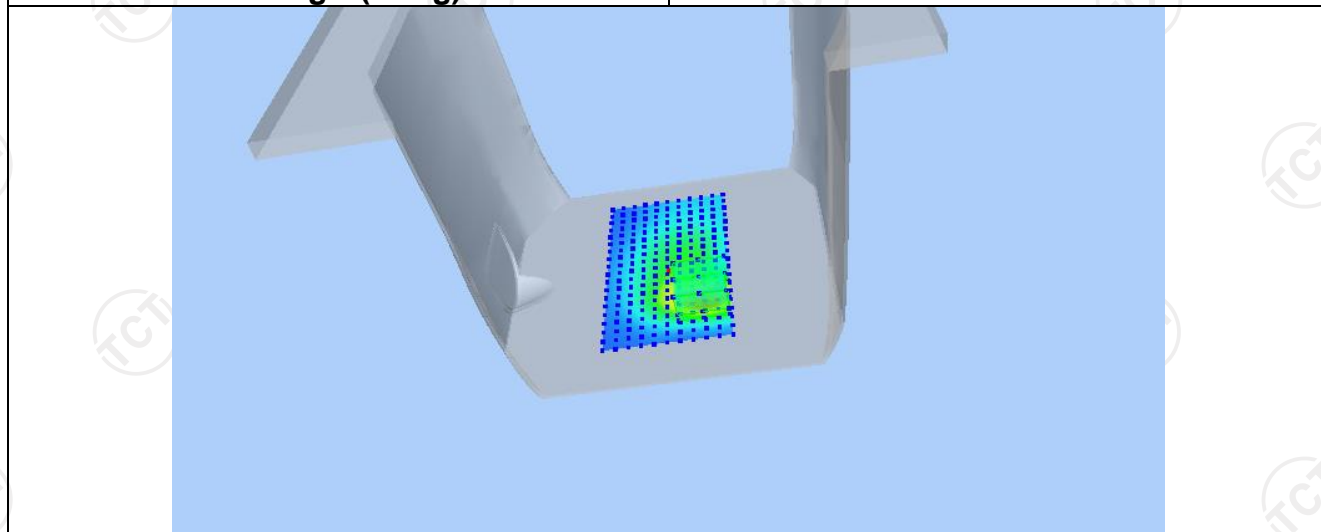

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8005	1.1264	0.6181	0.3554	0.2295

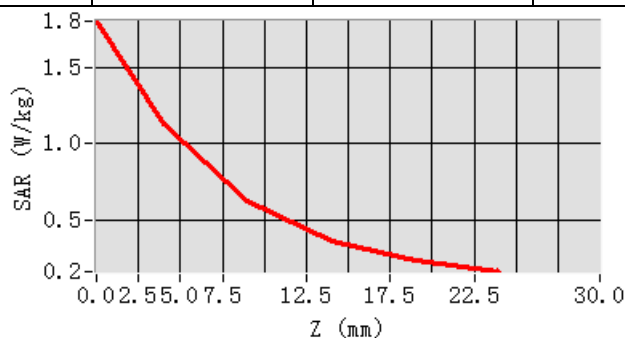

Hot spot position

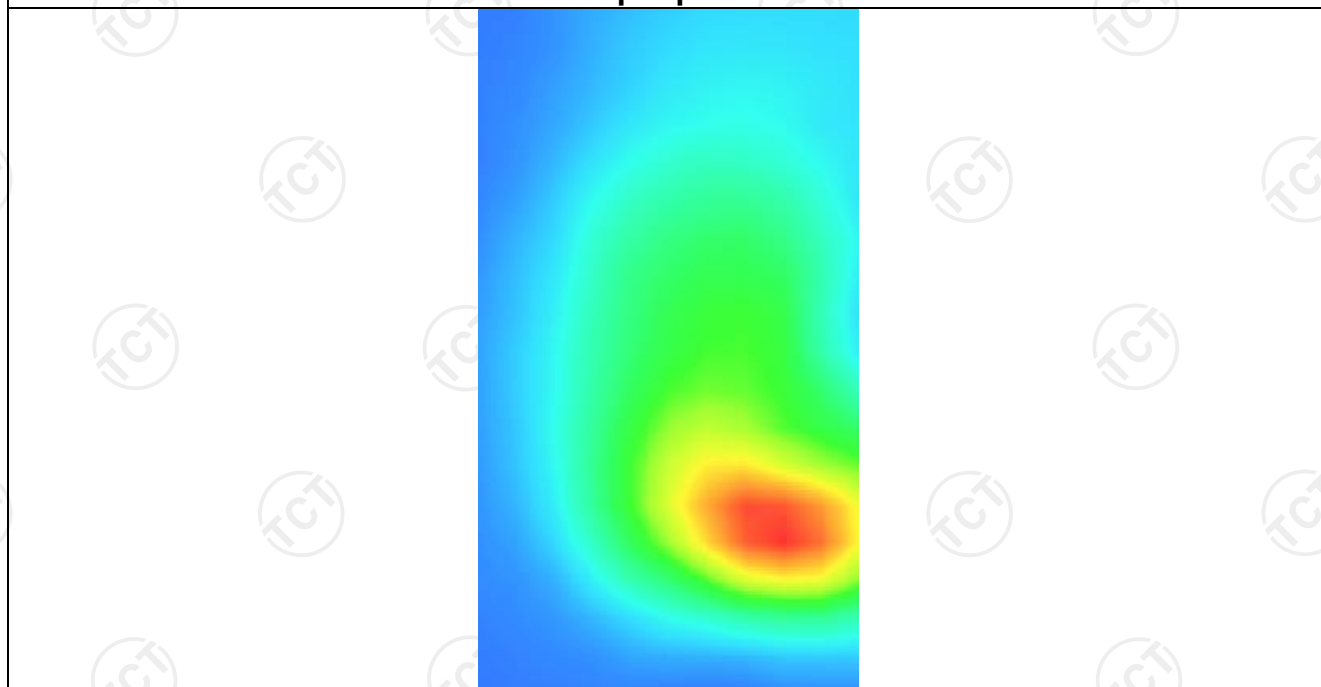

LTE Band 28


MEASUREMENT 1

Low Band SAR (Channel 24250):


Date: 03/10/2025

Frequency (MHz)	842.000000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.021540
Conductivity (S/m)	0.951247
Variation (%)	-1.620000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 20

SURFACE SAR

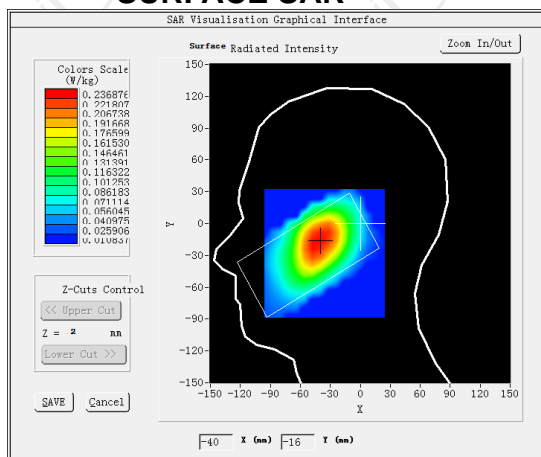


VOLUME SAR

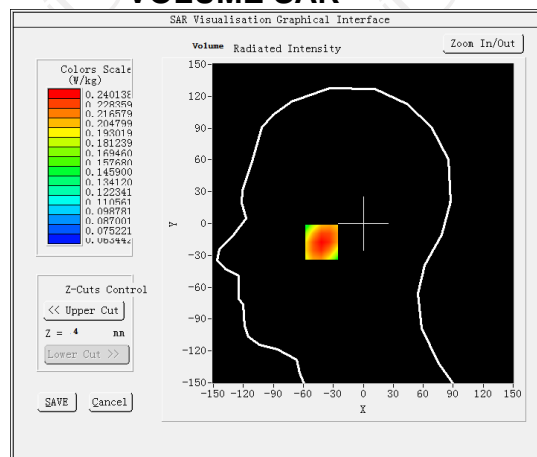


Maximum location: X=-42.00, Y=-17.00

SAR Peak: 0.28 W/kg


SAR 10g (W/Kg)	0.161254
SAR 1g (W/Kg)	0.210215

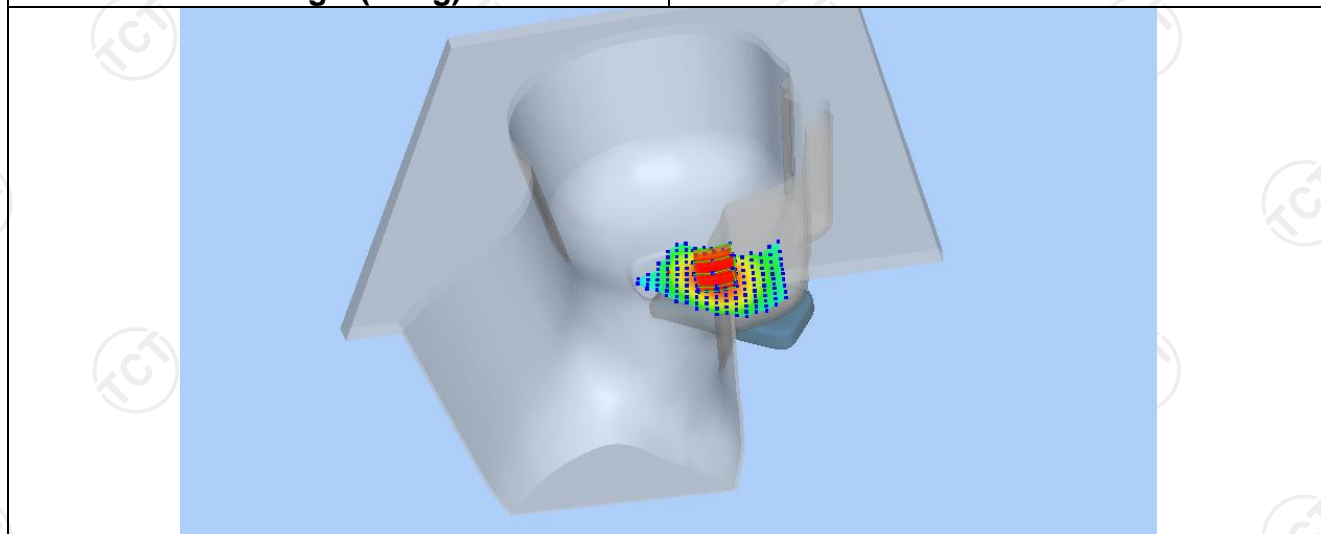

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2812	0.2401	0.1975	0.1635	0.1361

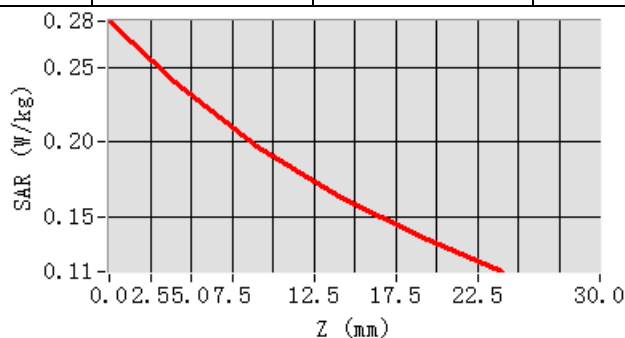

Hot spot position

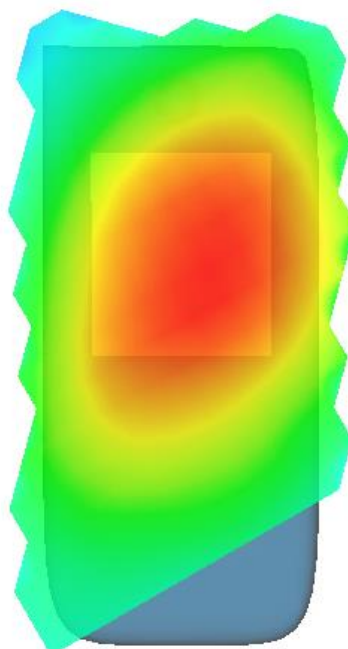


MEASUREMENT 2

Low Band SAR (Channel 24250):


Date: 03/10/2025

Frequency (MHz)	842.000000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.021540
Conductivity (S/m)	0.951247
Variation (%)	1.520000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 20

SURFACE SAR

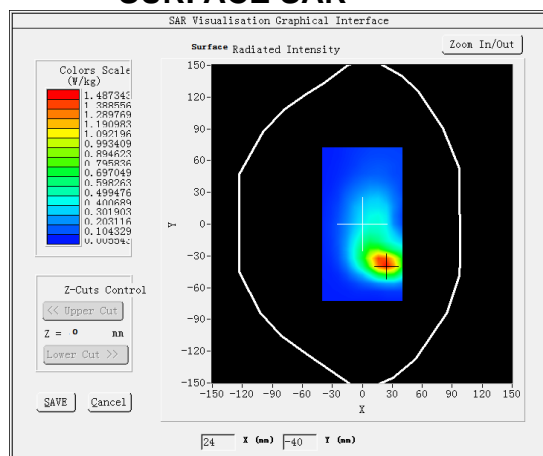


VOLUME SAR

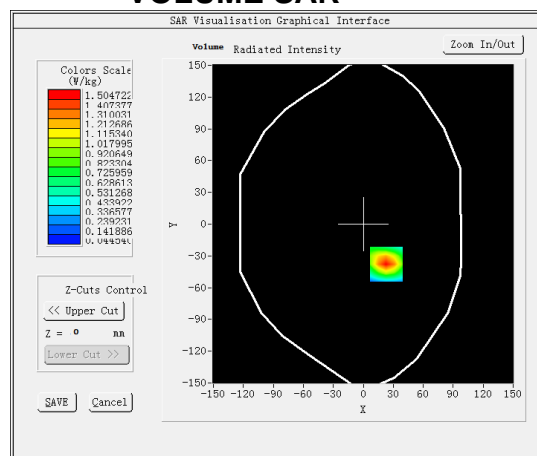


Maximum location: X=23.00, Y=-38.00

SAR Peak: 1.81 W/kg


SAR 10g (W/Kg)	0.562157
SAR 1g (W/Kg)	1.021547

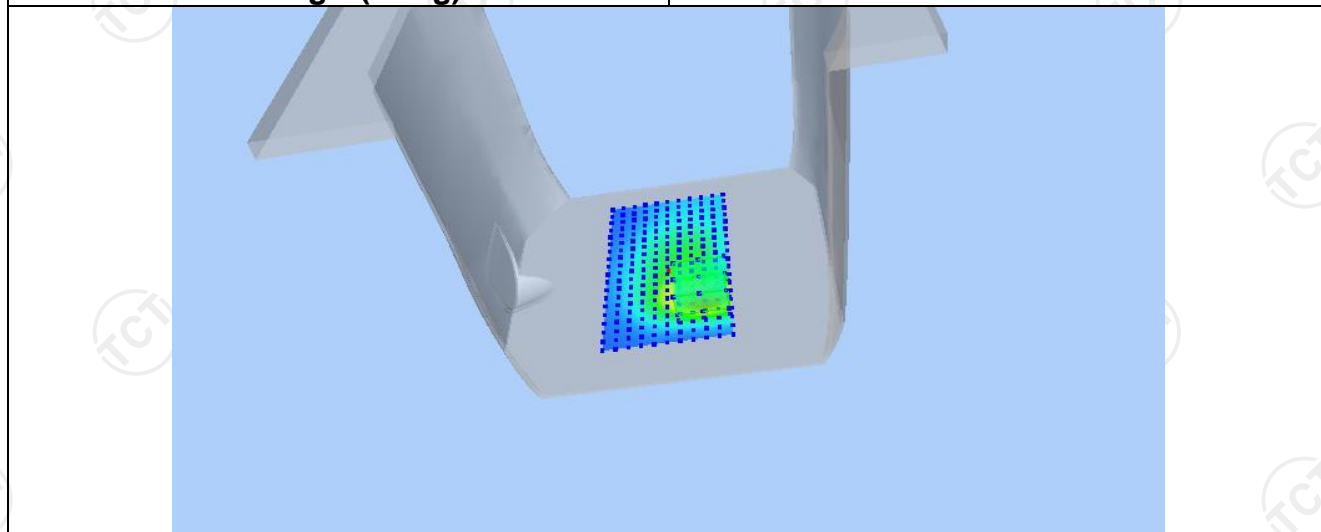

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8005	1.1264	0.6181	0.3554	0.2295

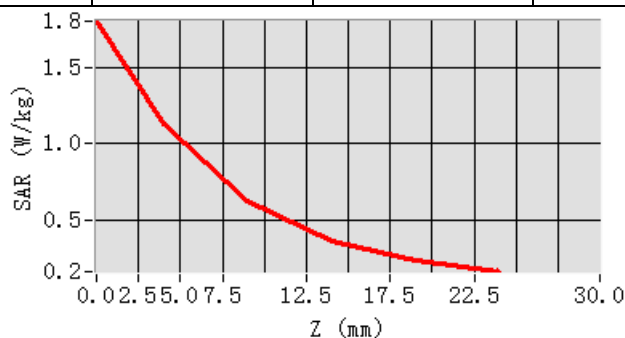

Hot spot position

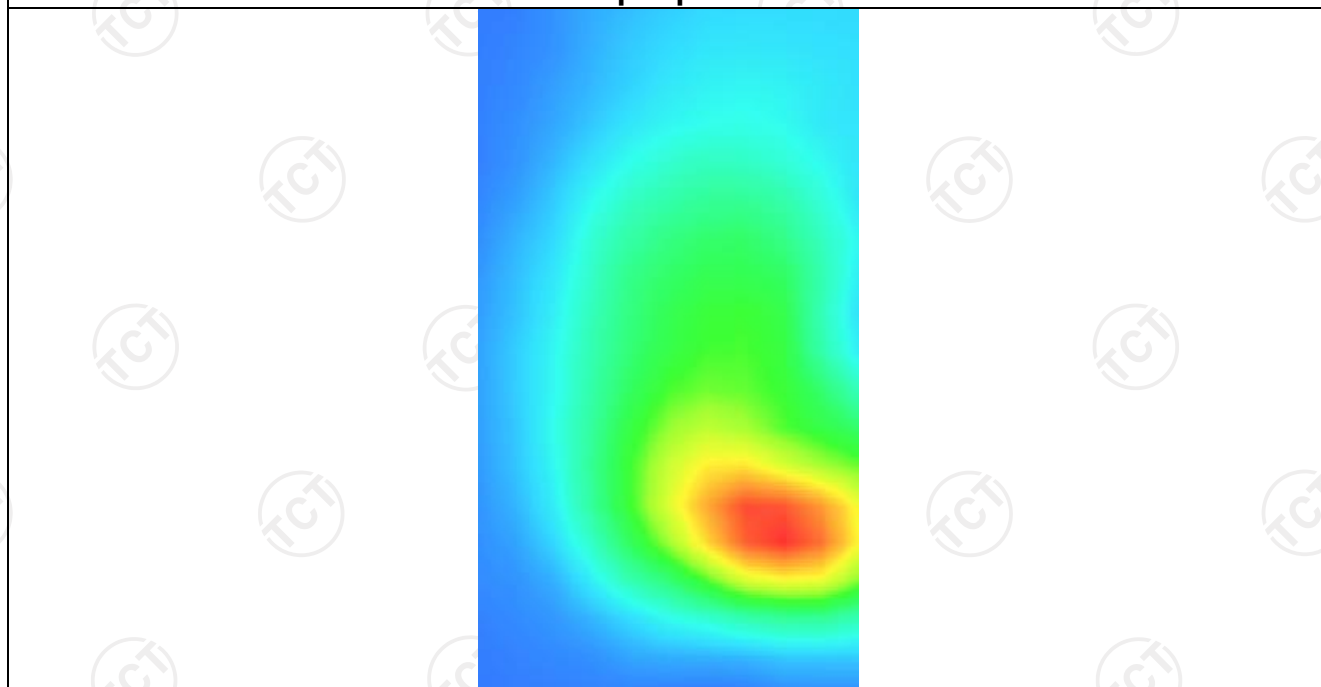


LTE Band 38

MEASUREMENT 1


High Band SAR (Channel 38150) Date: 02/25/2025

Frequency (MHz)	2610.000000
Relative permittivity (real part)	39.061254
Relative permittivity (imaginary part)	13.578125
Conductivity (S/m)	1.932017
Variation (%)	-0.910000
Area Scan	dx=8mm dy=12mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 38

SURFACE SAR

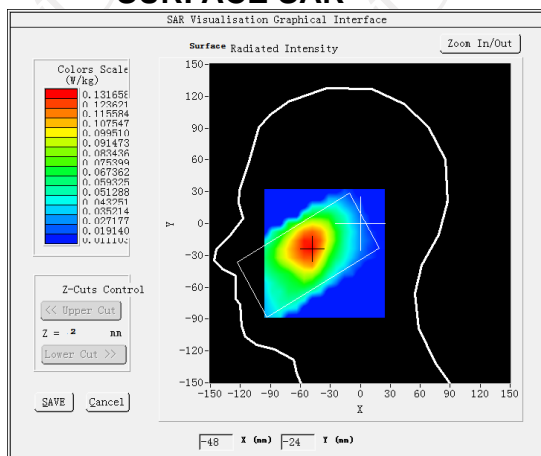


VOLUME SAR

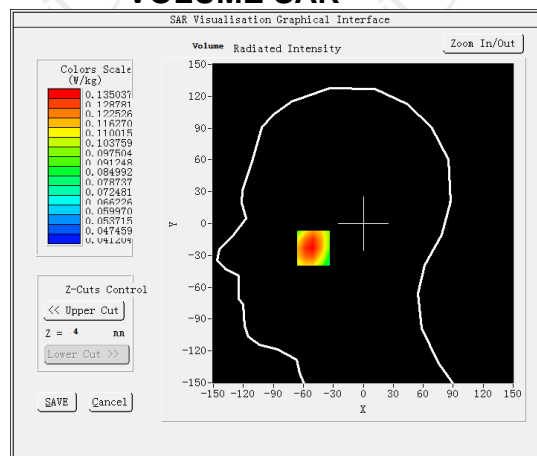


Maximum location: X=-48.00, Y=-21.00

SAR Peak: 0.17 W/kg


SAR 10g (W/Kg)	0.081254
SAR 1g (W/Kg)	0.132017

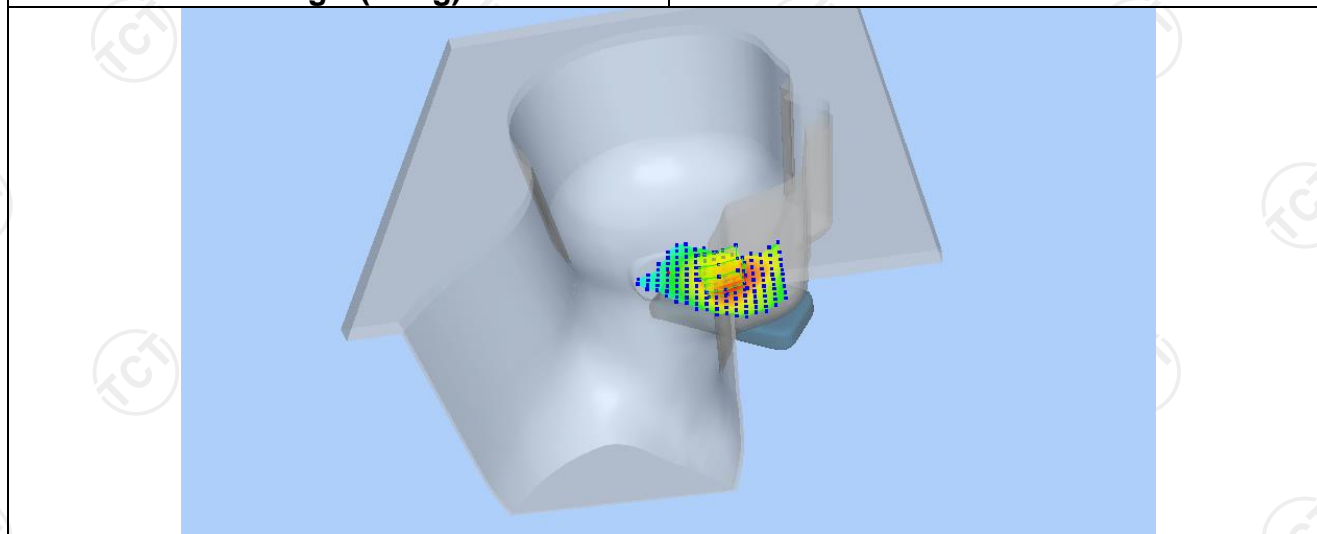

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1672	0.1350	0.1063	0.0883	0.0777

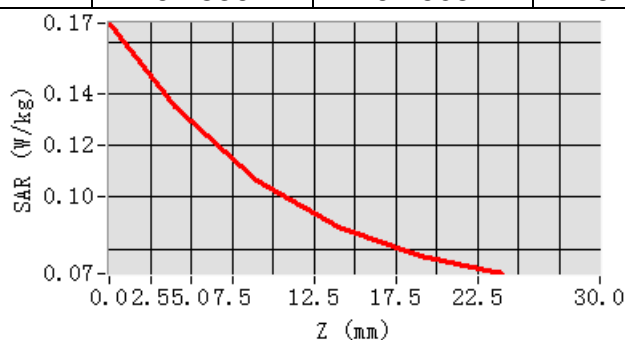

Hot spot position

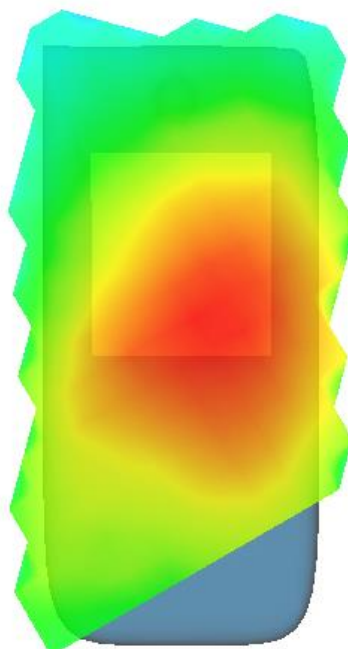


MEASUREMENT 2

High Band SAR (Channel 38150)


Date: 02/25/2025

Frequency (MHz)	2610.000000
Relative permittivity (real part)	39.061254
Relative permittivity (imaginary part)	13.578125
Conductivity (S/m)	1.932017
Variation (%)	-1.500000
Area Scan	<u>dx=8mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm,Complete</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body back</u>
Band	<u>LTE band 38</u>

SURFACE SAR

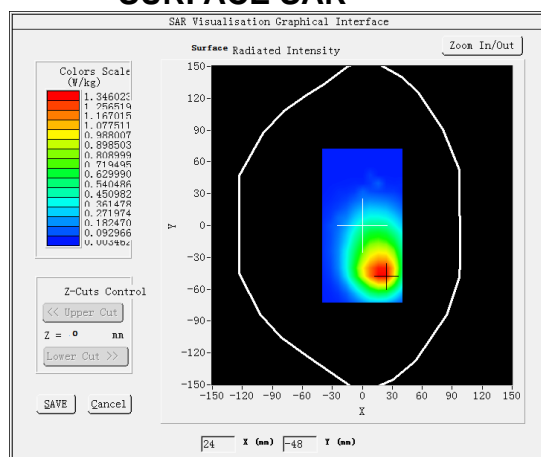


VOLUME SAR

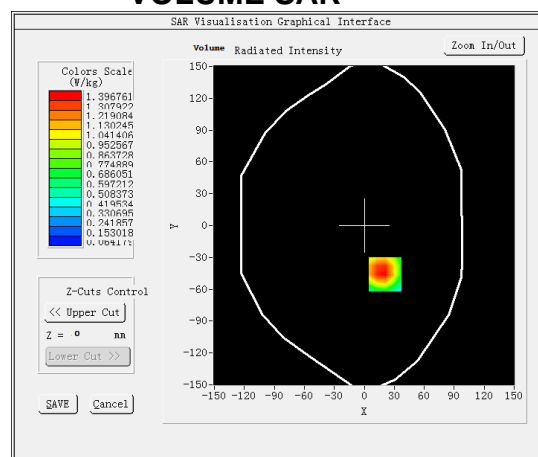


Maximum location: X=-1.00, Y=46.00

SAR Peak:1.02 W/kg


SAR 10g (W/Kg)	0.502154
SAR 1g (W/Kg)	1.010251

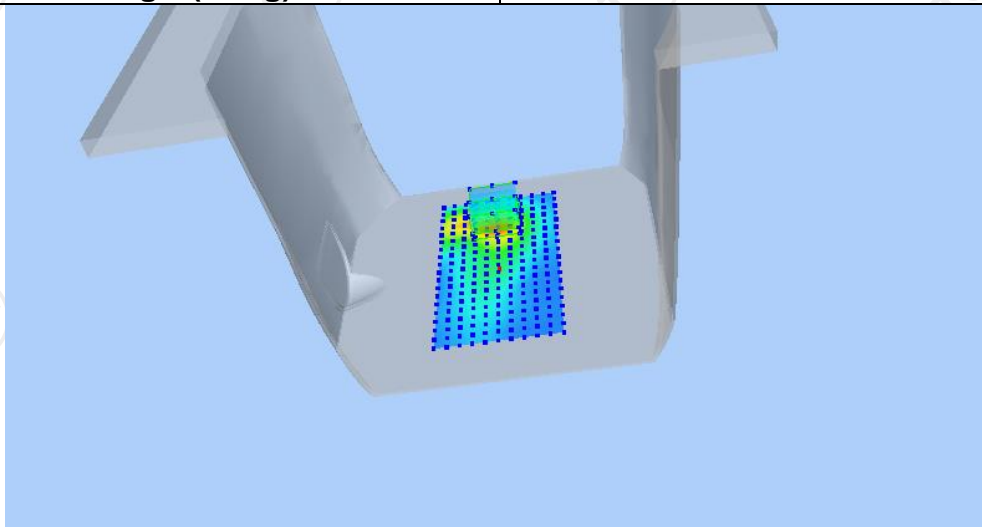

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.9993	1.1710	0.5577	0.2473	0.1032

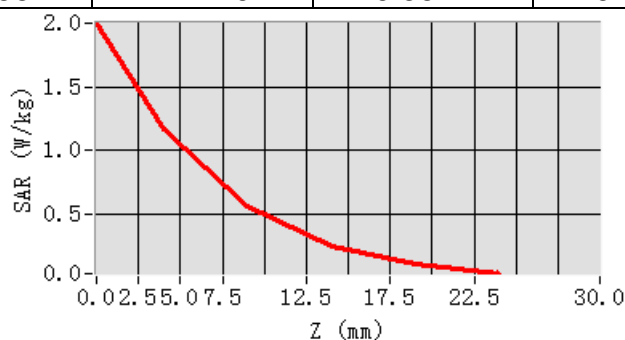

Hot spot position

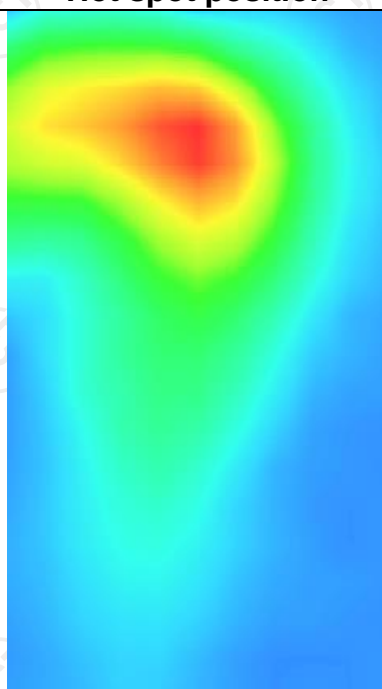

LTE Band 40


MEASUREMENT 1

Low Band SAR (Channel 38750)


Date: 02/25/2025

Frequency (MHz)	2310.000000
Relative permittivity (real part)	39.281523
Relative permittivity (imaginary part)	13.602154
Conductivity (S/m)	1.731254
Variation (%)	-2.610000
Area Scan	<u>dx=8mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm,Complete</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 40</u>

SURFACE SAR

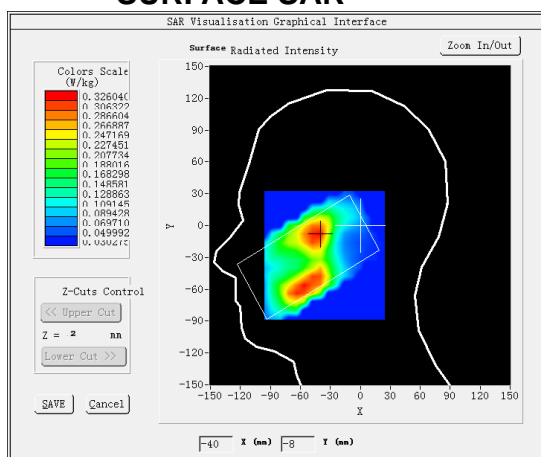


VOLUME SAR

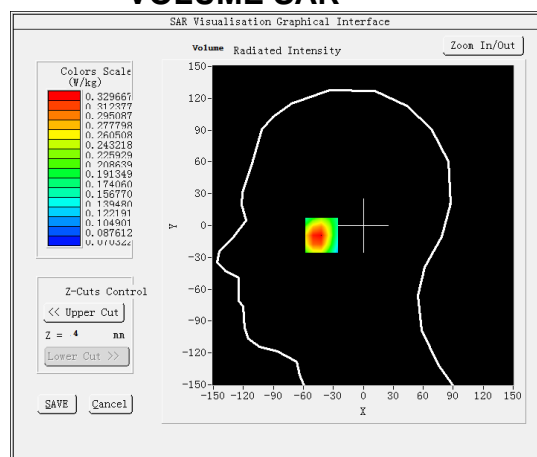


Maximum location: X=-40.00, Y=-11.00

SAR Peak: 0.44 W/kg


SAR 10g (W/Kg)	0.174251
SAR 1g (W/Kg)	0.302154

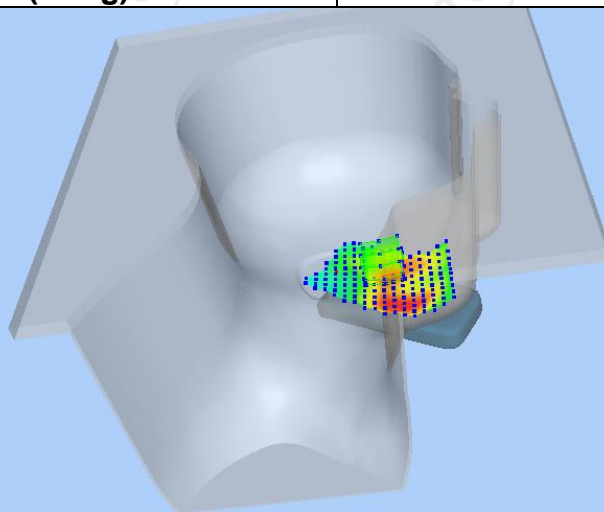

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4243	0.3297	0.2420	0.1815	0.1400

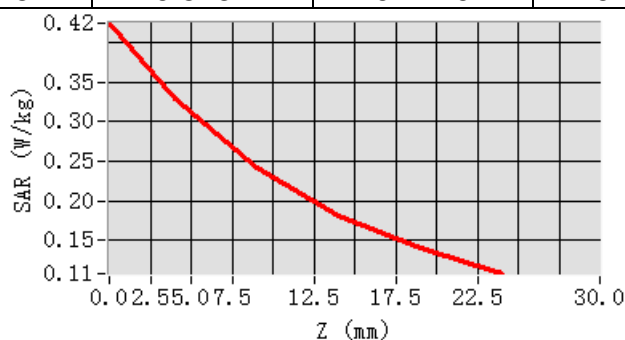

Hot spot position

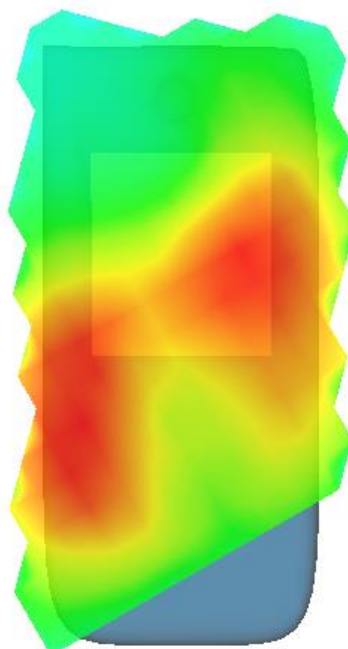


MEASUREMENT 2

Low Band SAR (Channel 38750)


Date: 02/25/2025

Frequency (MHz)	2310.000000
Relative permittivity (real part)	39.281523
Relative permittivity (imaginary part)	13.602154
Conductivity (S/m)	1.731254
Variation (%)	1.630000
Area Scan	<u>dx=8mm dy=12mm, h= 5.00 mm</u>
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	<u>Validation plane</u>
Device Position	<u>Body back</u>
Band	<u>LTE band 40</u>

SURFACE SAR

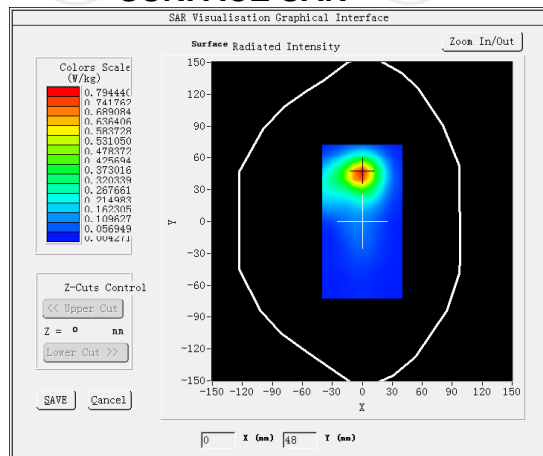


VOLUME SAR

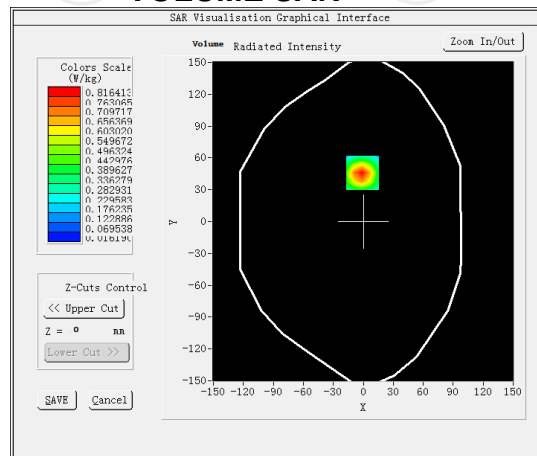


Maximum location: X=-1.00, Y=46.00

SAR Peak:1.44 W/kg


SAR 10g (W/Kg)	0.321521
SAR 1g (W/Kg)	0.752154

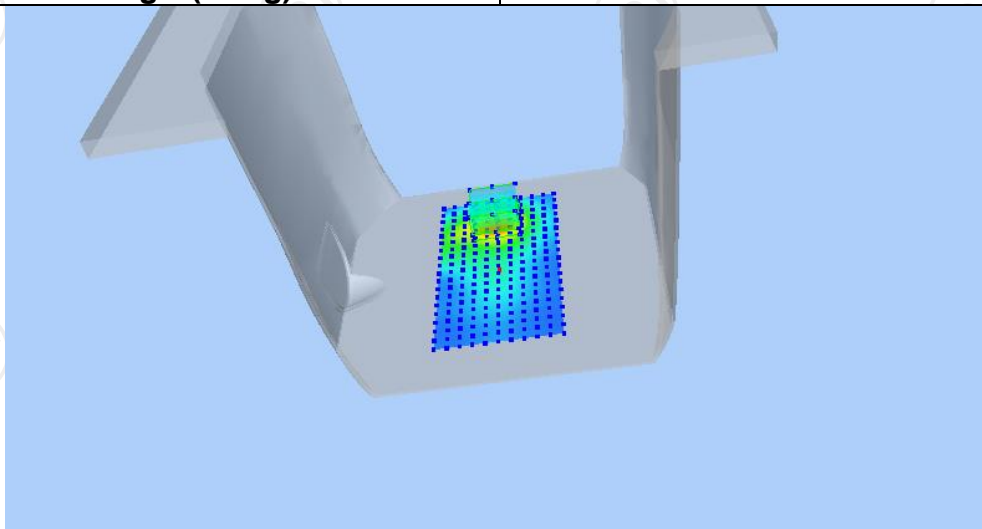

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4331	0.8164	0.3783	0.1706	0.0813

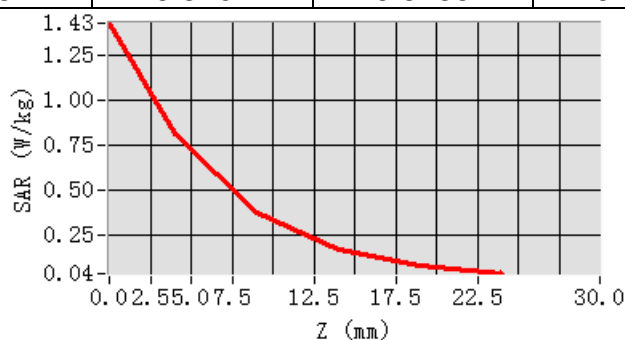

Hot spot position

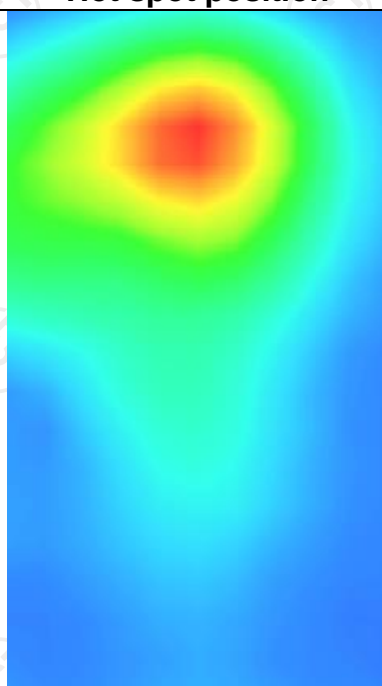


2.4G WLAN MEASUREMENT 1

Middle Band SAR (Channel 7):


Date: 02/25/2025

Frequency (MHz)	2442.000000
Relative permittivity (real part)	38.912541
Relative permittivity (imaginary part)	13.221547
Conductivity (S/m)	1.831574
Variation (%)	2.900000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11b ISM

SURFACE SAR

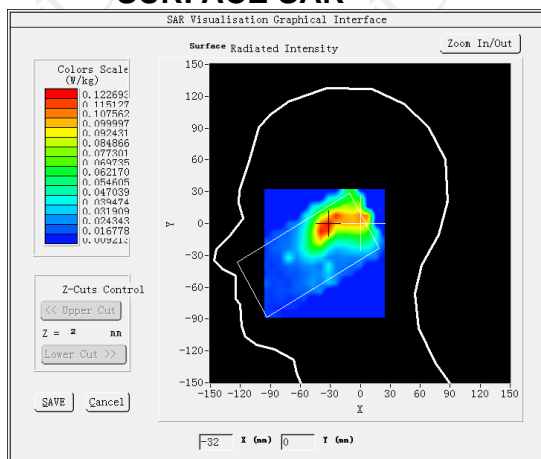


VOLUME SAR

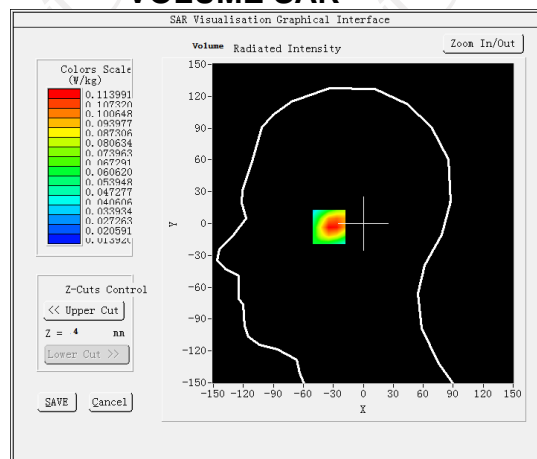


Maximum location: X=-34.00, Y=-2.00

SAR Peak: 0.16 W/kg


SAR 10g (W/Kg)	0.066656
SAR 1g (W/Kg)	0.109290

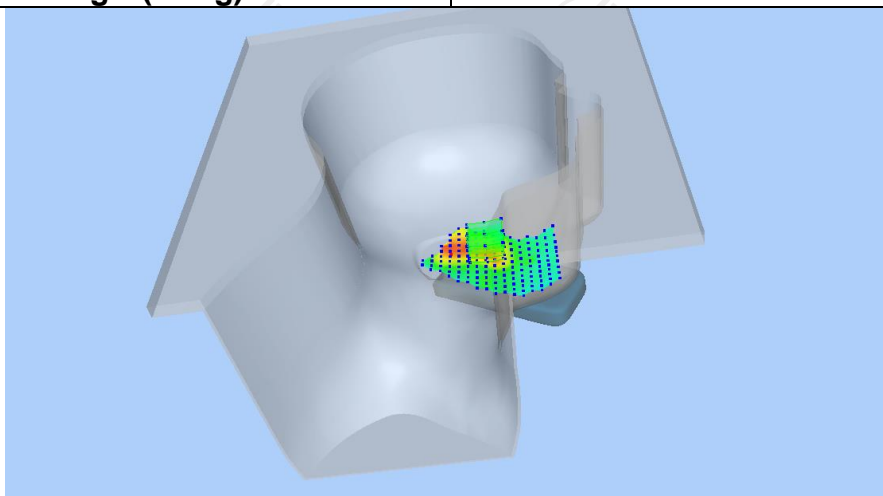

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1588	0.1140	0.0749	0.0498	0.0339

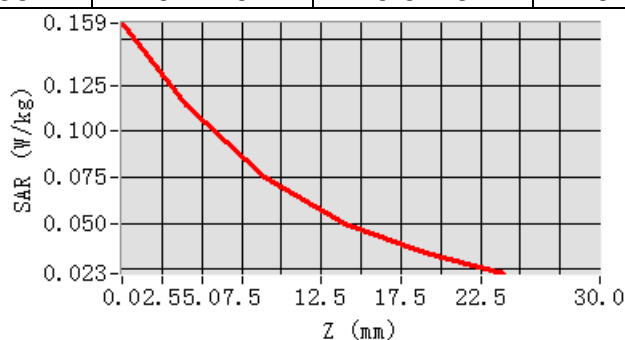

Hot spot position

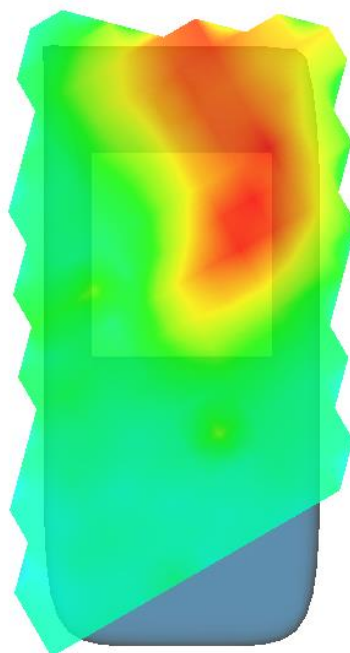


MEASUREMENT 2

Middle Band SAR (Channel 7):


Date: 02/25/2025

Frequency (MHz)	2442.000000
Relative permittivity (real part)	38.912541
Relative permittivity (imaginary part)	13.221547
Conductivity (S/m)	1.831574
Variation (%)	4.46000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11b ISM

SURFACE SAR

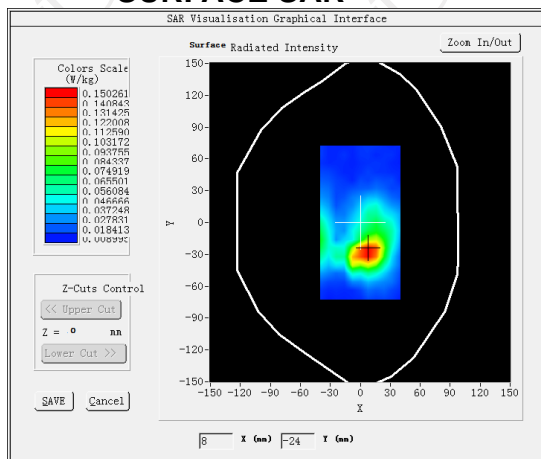


VOLUME SAR

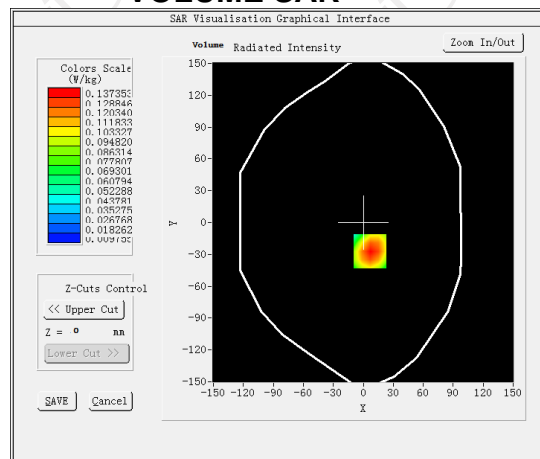


Maximum location: X=7.00, Y=-27.00

SAR Peak:0.15W/kg


SAR 10g (W/Kg)	0.093338
SAR 1g (W/Kg)	0.131571

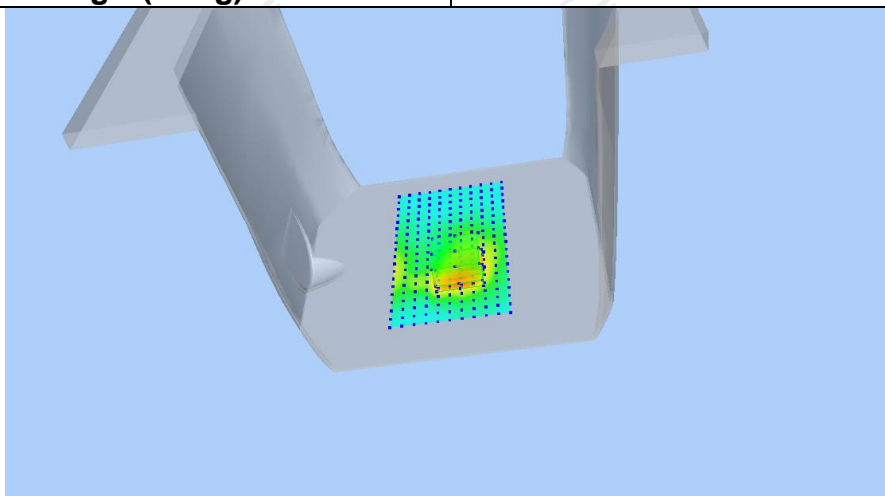

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.1513	0.1374	0.1141	0.0867	0.0585

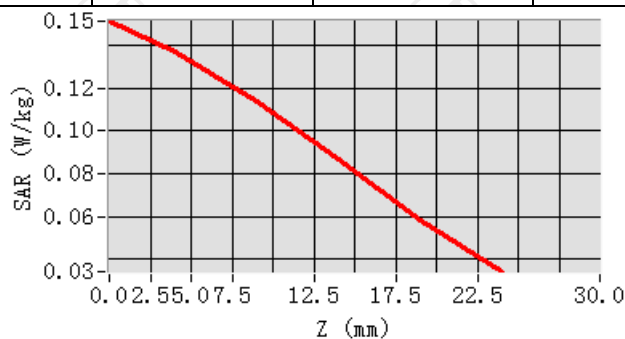

Hot spot position

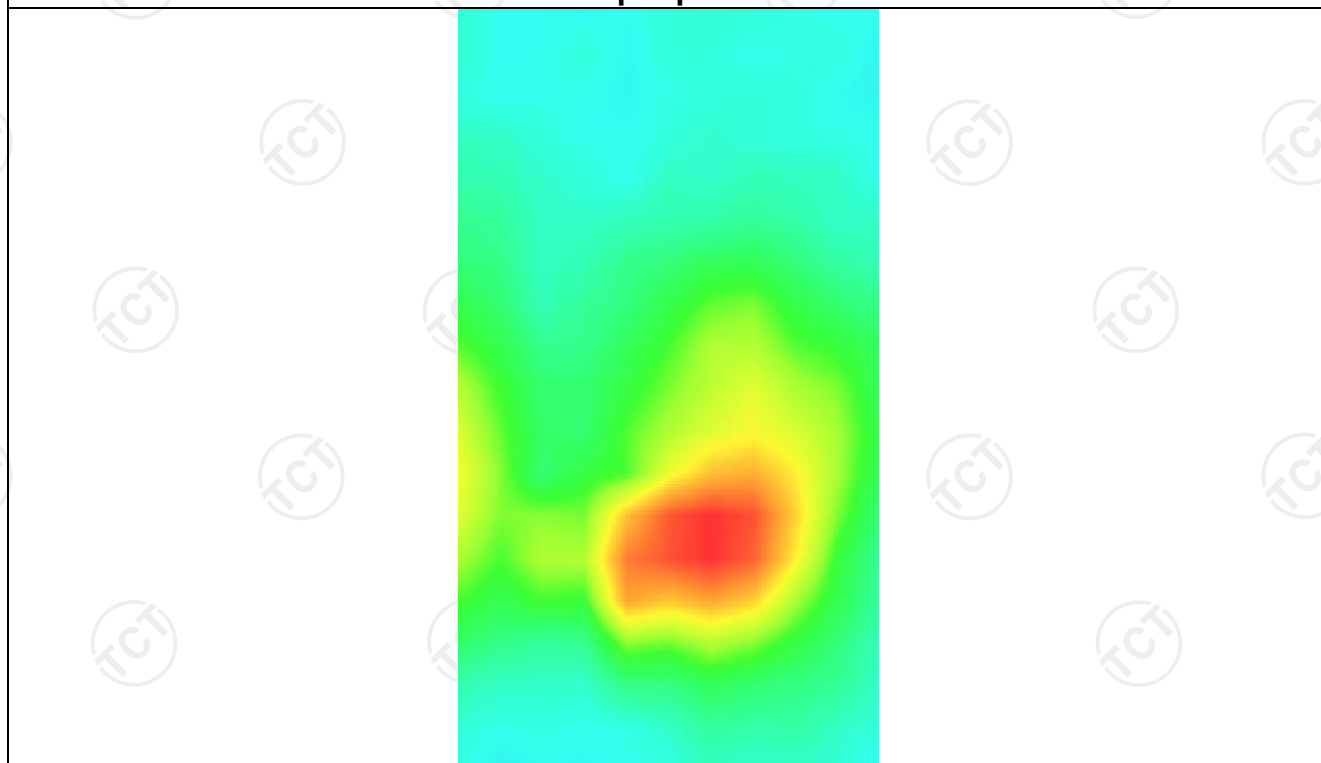


5.2G WLAN MEASUREMENT 1

SAR(Channel 36):


Date: 03/03/2025

Frequency (MHz)	5180.000000
Relative permittivity (real part)	35.912547
Relative permittivity (imaginary part)	16.142015
Conductivity (S/m)	4.712574
Variation (%)	-1.620000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11a ISM

SURFACE SAR

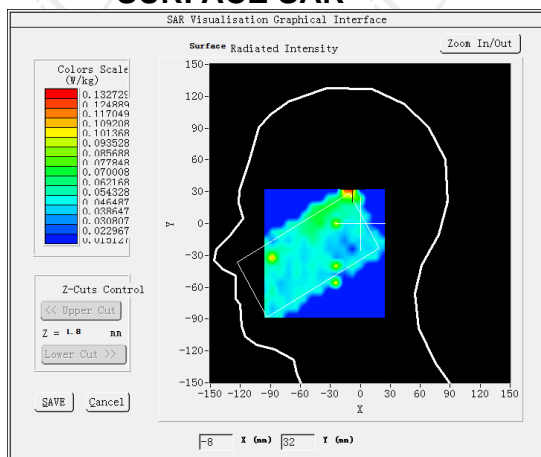


VOLUME SAR

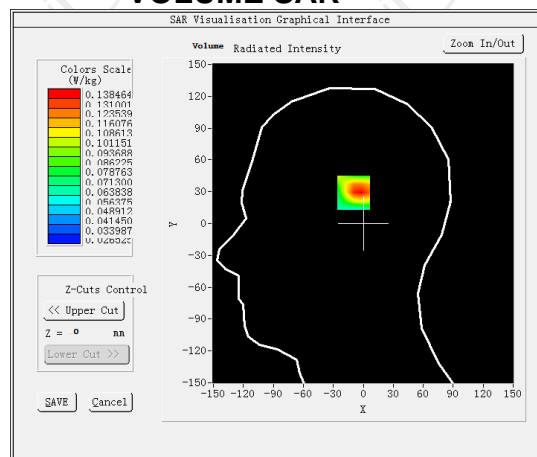


Maximum location: X=-8.00, Y=32.00
SAR Peak: 0.27 W/kg


SAR 10g (W/Kg)	0.076315
SAR 1g (W/Kg)	0.135226

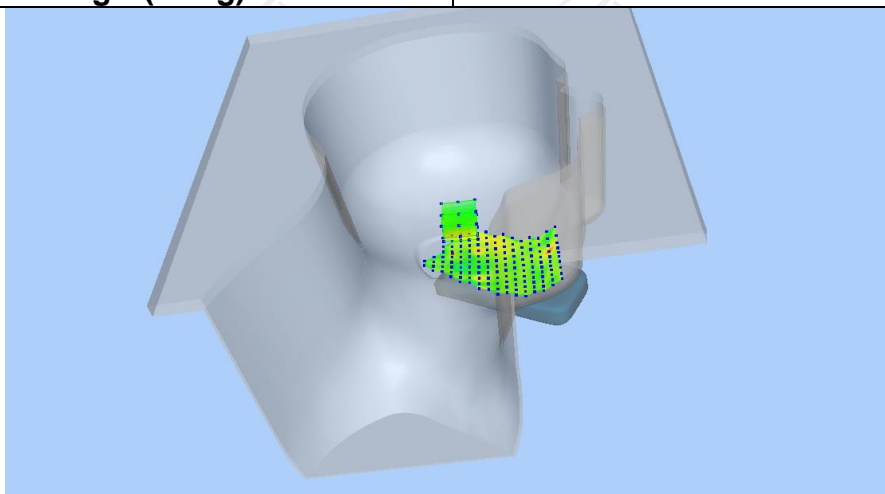

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2066	0.0865	0.0432	0.0359	0.0311

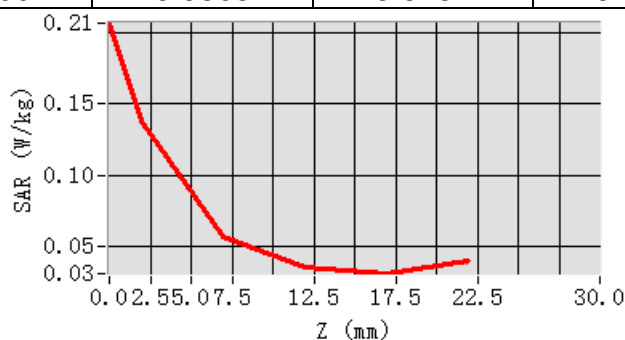

Hot spot position

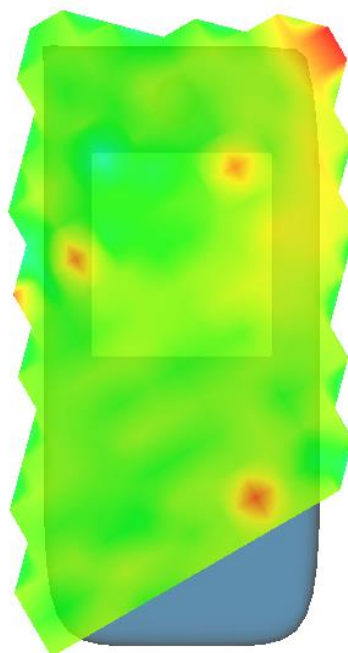


MEASUREMENT 2

SAR(Channel 36):


Date: 03/03/2025

Frequency (MHz)	5180.000000
Relative permittivity (real part)	35.912547
Relative permittivity (imaginary part)	16.142015
Conductivity (S/m)	4.712574
Variation (%)	-4.630000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM

SURFACE SAR

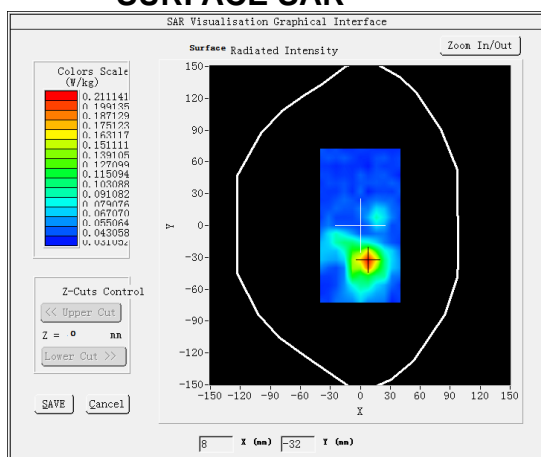


VOLUME SAR

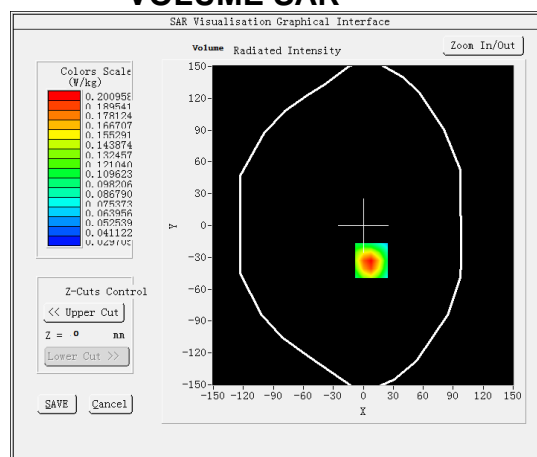


Maximum location: X=8.00, Y=-33.00

SAR Peak: 0.25W/kg


SAR 10g (W/Kg)	0.097060
SAR 1g (W/Kg)	0.158021

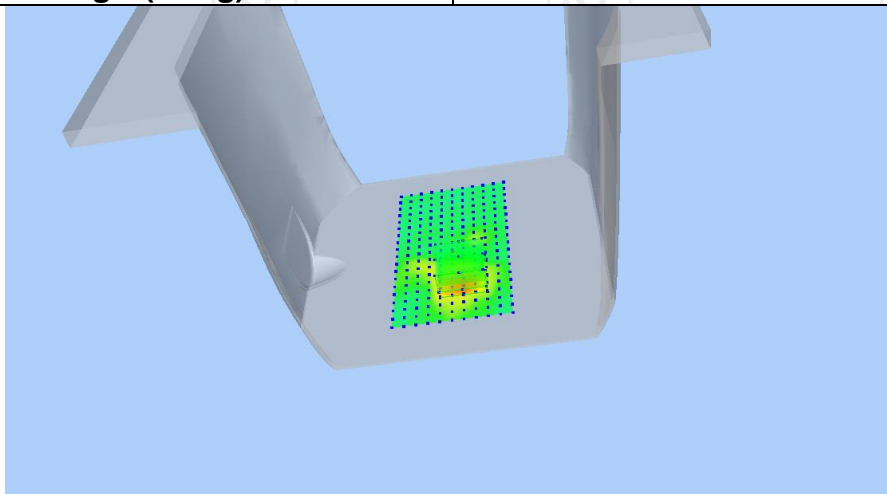

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2442	0.1594	0.1056	0.0671	0.0626

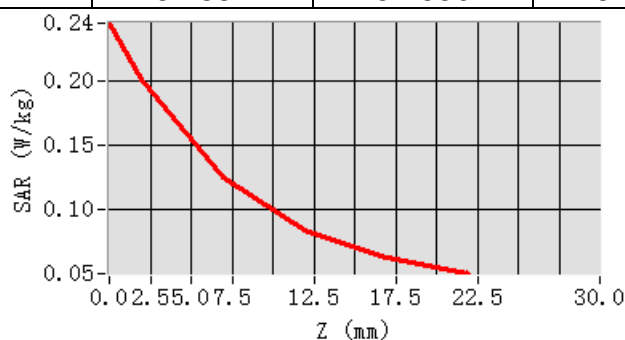

Hot spot position

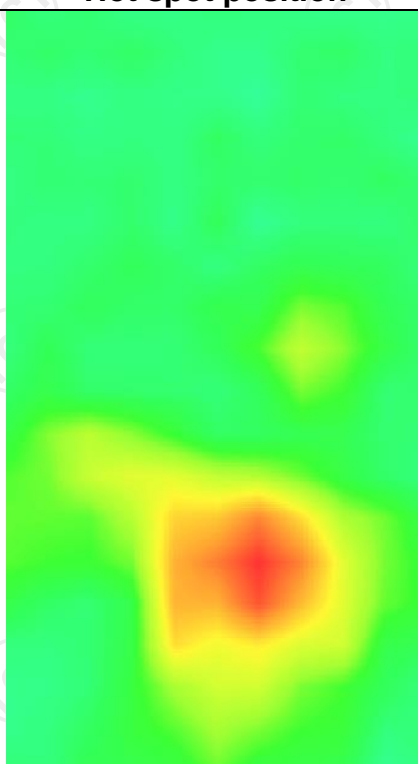


5.3G WLAN MEASUREMENT 1

SAR (Channel 64):


Date: 03/03/2025

Frequency (MHz)	5320.000000
Relative permittivity (real part)	36.120147
Relative permittivity (imaginary part)	16.210214
Conductivity (S/m)	4.902154
Variation (%)	-0.100000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11ac ISM

SURFACE SAR

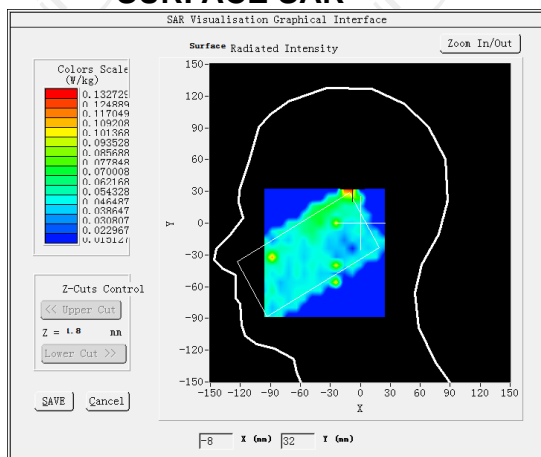


VOLUME SAR

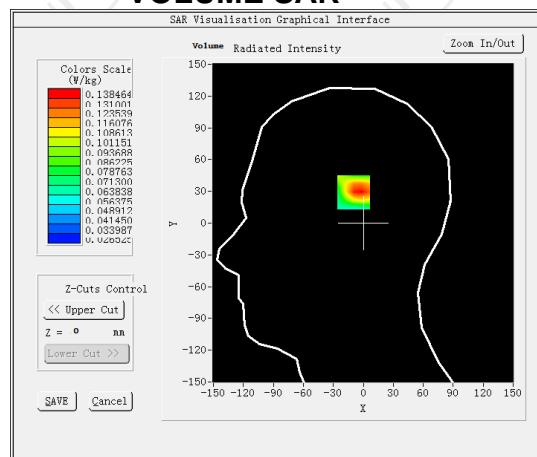


Maximum location: X=-8.00, Y=-32.00

SAR Peak: 0.24 W/kg


SAR 10g (W/Kg)	0.081242
SAR 1g (W/Kg)	0.117415

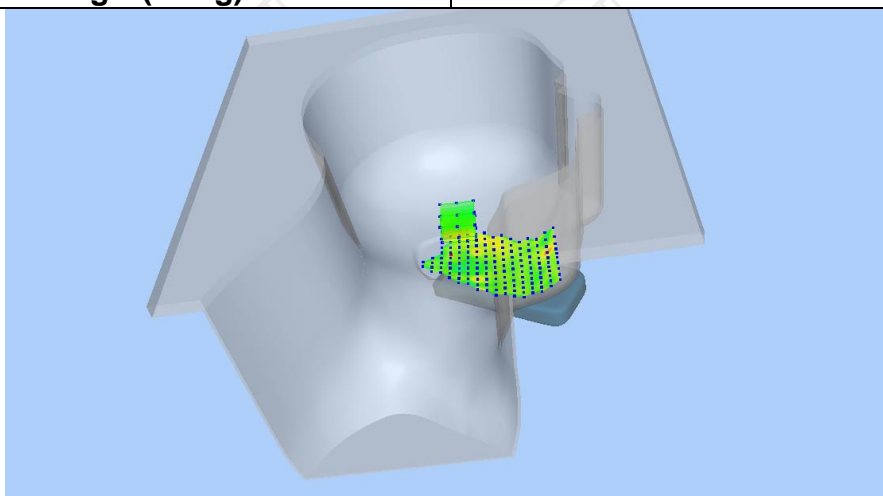

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2102	0.0945	0.0482	0.0336	0.0328

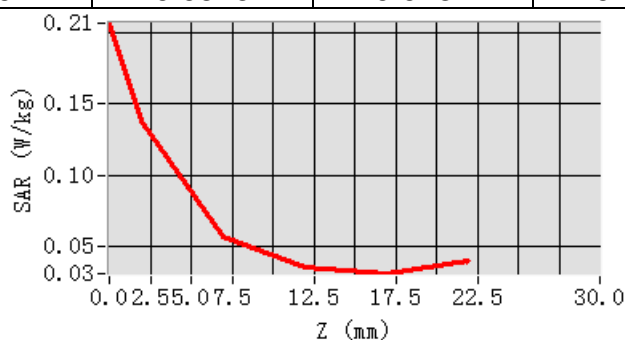

Hot spot position

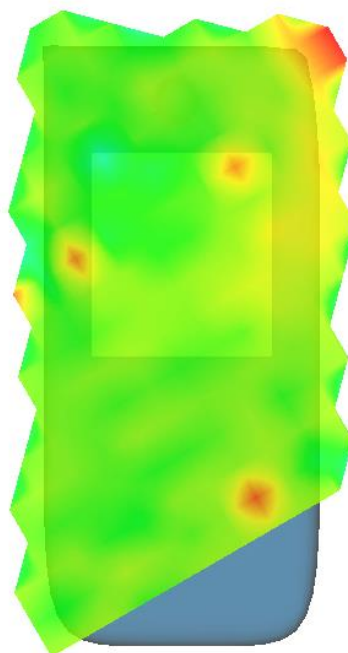


MEASUREMENT 2

SAR (Channel 64):


Date: 03/03/2025

Frequency (MHz)	5320.000000
Relative permittivity (real part)	36.120147
Relative permittivity (imaginary part)	16.210214
Conductivity (S/m)	4.902154
Variation (%)	1.150000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7, dx=4mm dy=4mm dz=2mm, Complete
Phantom	Validation plane
Device Position	Body Back
Band	IEEE 802.11ac ISM

SURFACE SAR

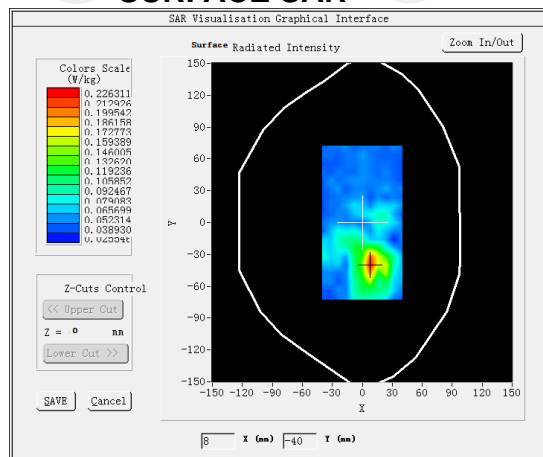


VOLUME SAR

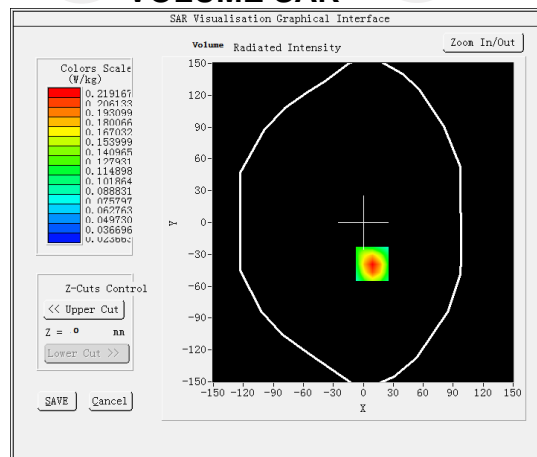


Maximum location: X=9.00, Y=-39.00

SAR Peak: 0.27 W/kg


SAR 10g (W/Kg)	0.098484
SAR 1g (W/Kg)	0.169847

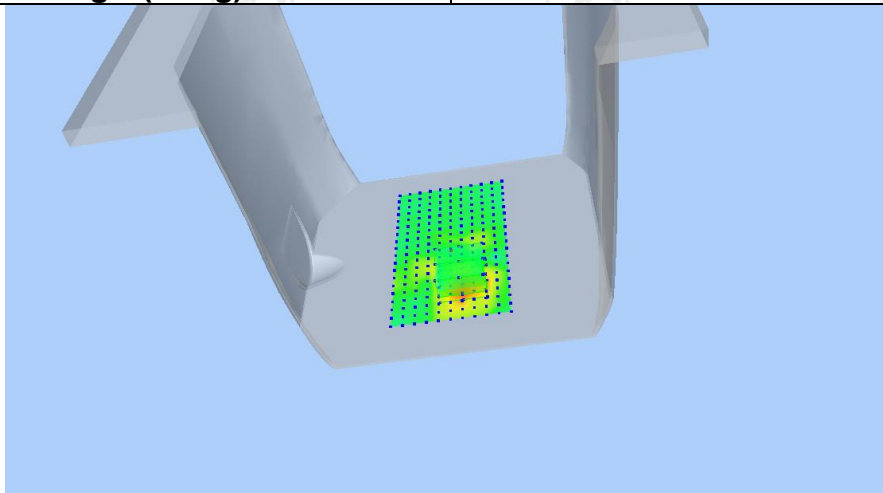

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2646	0.1625	0.1051	0.0612	0.0425

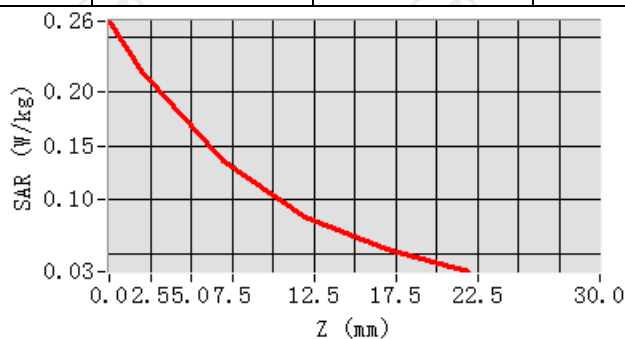

Hot spot position

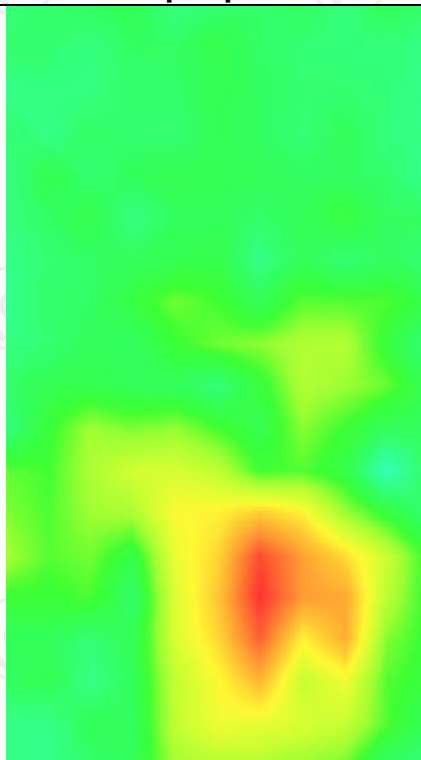

5.6G WLAN


MEASUREMENT 1

SAR (Channel 140):


Date: 03/03/2025

Frequency (MHz)	5700.000000
Relative permittivity (real part)	34.812541
Relative permittivity (imaginary part)	16.391254
Conductivity (S/m)	5.040571
Variation (%)	0.790000
Area Scan	<u>dx=8mm dy=8mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm z=2mm,Complete</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>IEEE 802.11a ISM</u>

SURFACE SAR

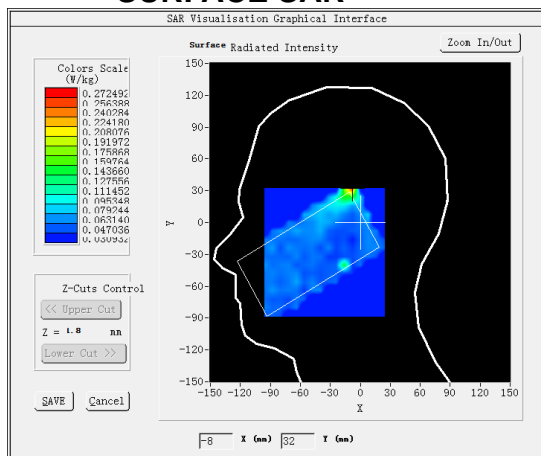


VOLUME SAR

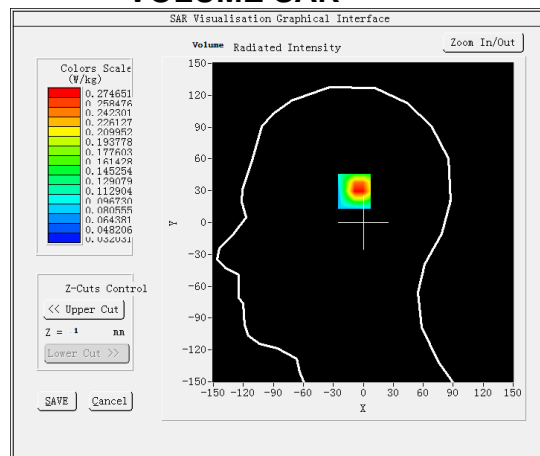


Maximum location: X=-7.00, Y=32.00

SAR Peak: 0.63 W/kg


SAR 10g (W/Kg)	0.132730
SAR 1g (W/Kg)	0.278218

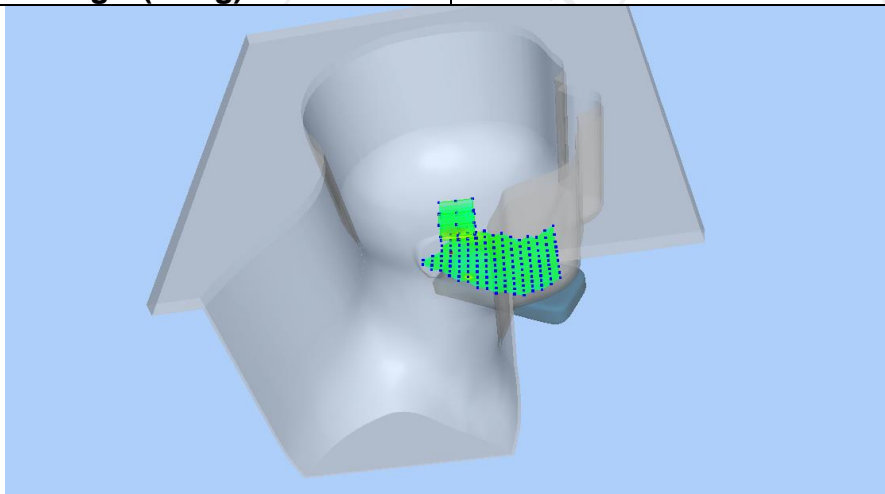

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.4071	0.1821	0.0615	0.0042	0.0388

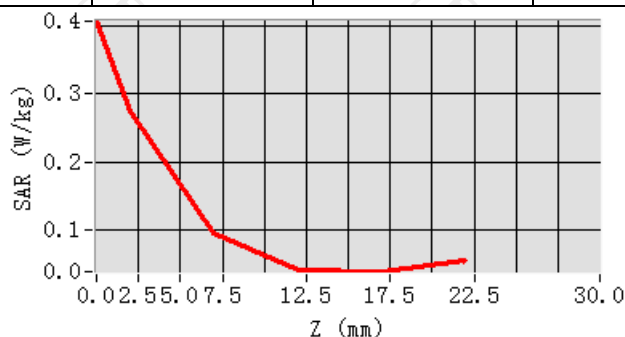

Hot spot position

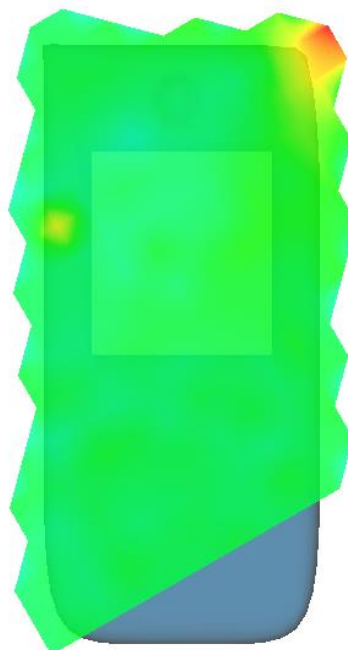


MEASUREMENT 2

SAR (Channel 140):


Date: 03/03/2025

Frequency (MHz)	5700.000000
Relative permittivity (real part)	34.812541
Relative permittivity (imaginary part)	16.391254
Conductivity (S/m)	5.040571
Variation (%)	1.500000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM

SURFACE SAR

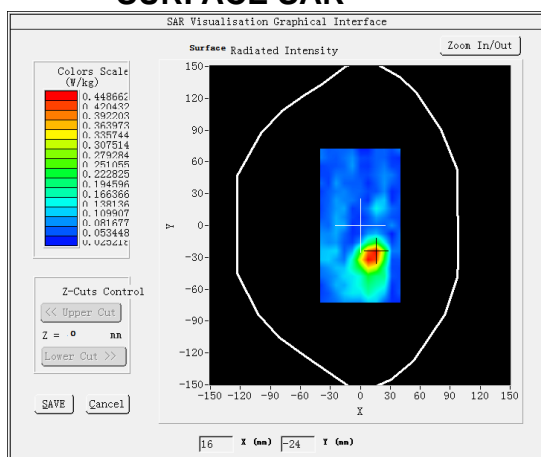


VOLUME SAR

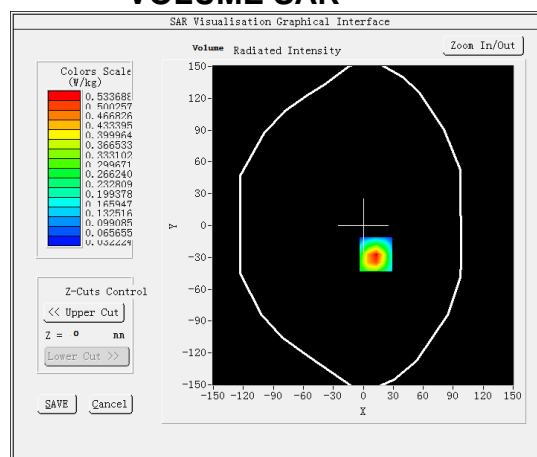


Maximum location: X=13.00, Y=-27.00

SAR Peak: 0.73 W/kg


SAR 10g (W/Kg)	0.197150
SAR 1g (W/Kg)	0.387557

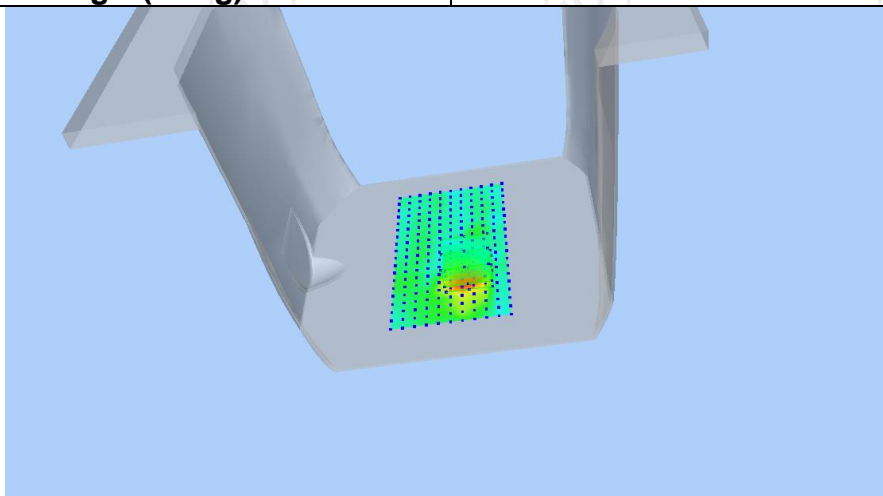

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6982	0.3862	0.1981	0.0850	0.0719

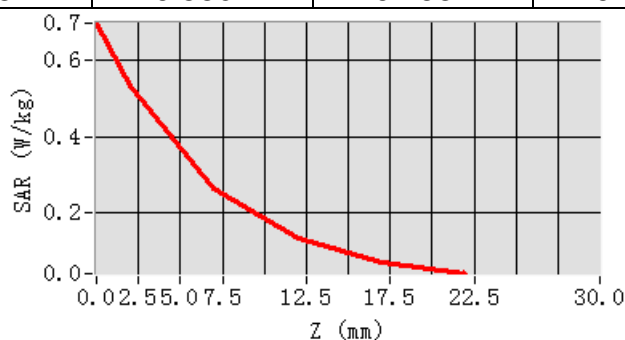

Hot spot position

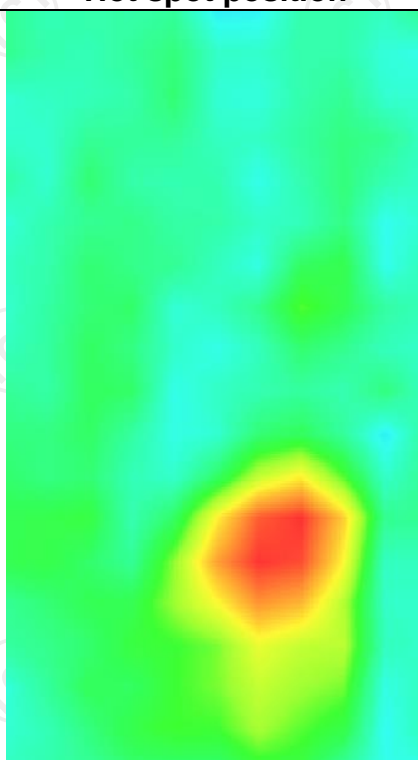


5.8G WLAN MEASUREMENT 1

SAR (Channel 149):


Date: 03/03/2025

Frequency (MHz)	5745.000000
Relative permittivity (real part)	34.691254
Relative permittivity (imaginary part)	16.421024
Conductivity (S/m)	5.230157
Variation (%)	1.620000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11a ISM

SURFACE SAR

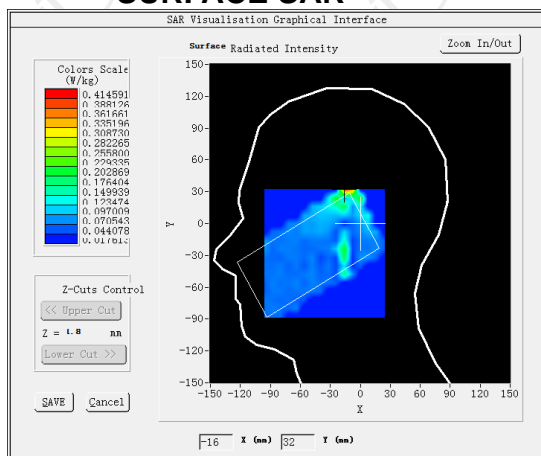


VOLUME SAR

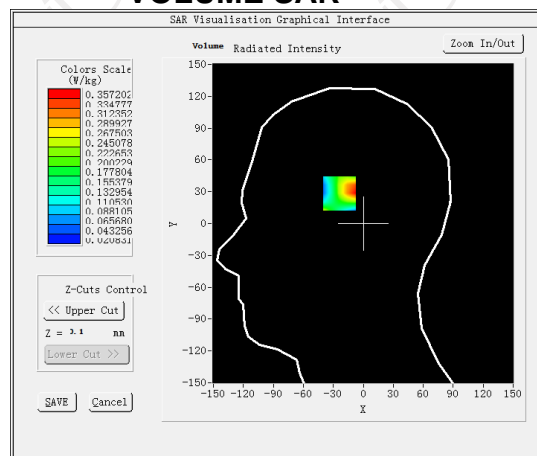


Maximum location: X=-24.00, Y=32.00

SAR Peak: 0.84 W/kg


SAR 10g (W/Kg)	0.149872
SAR 1g (W/Kg)	0.343412

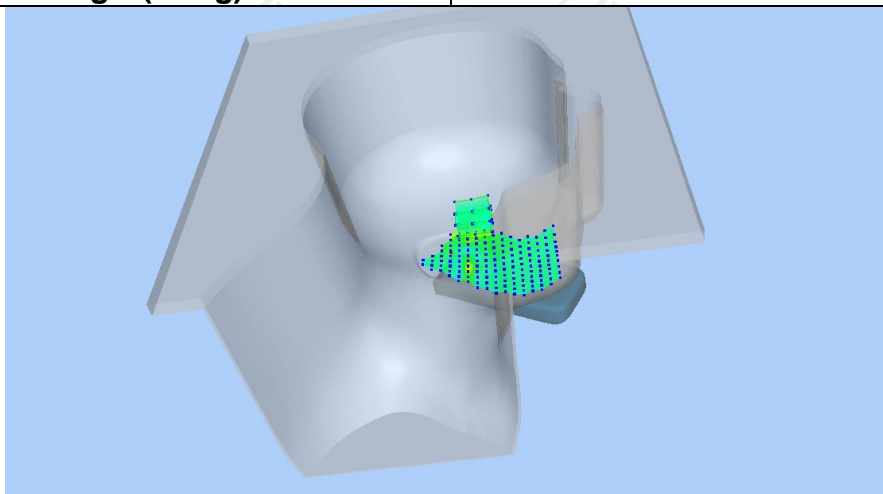

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7086	0.2015	0.0426	0.0351	0.0386

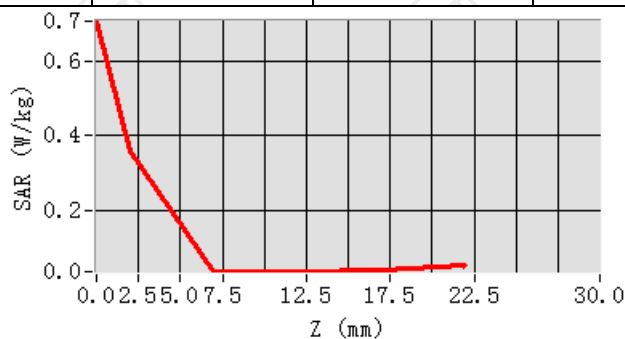

Hot spot position

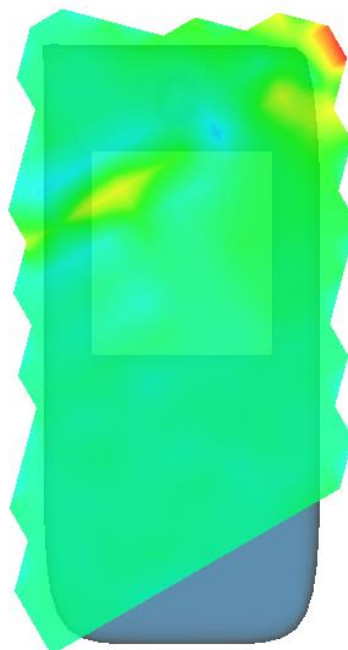


MEASUREMENT 2

SAR (Channel 149):


Date: 03/03/2025

Frequency (MHz)	5745.000000
Relative permittivity (real part)	34.691254
Relative permittivity (imaginary part)	16.421024
Conductivity (S/m)	5.230157
Variation (%)	-3.580000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM

SURFACE SAR

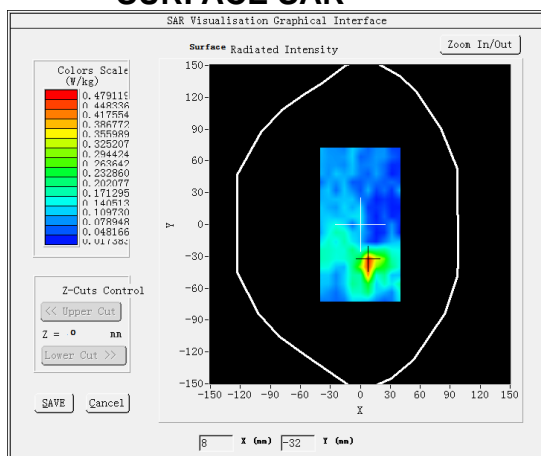


VOLUME SAR

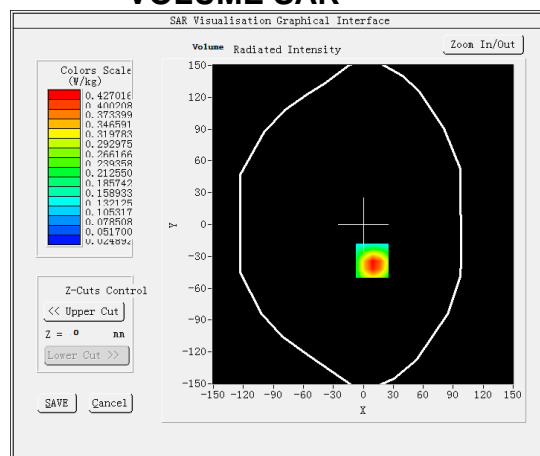


Maximum location: X=9.00, Y=-34.00

SAR Peak: 0.68 W/kg


SAR 10g (W/Kg)	0.177186
SAR 1g (W/Kg)	0.316703

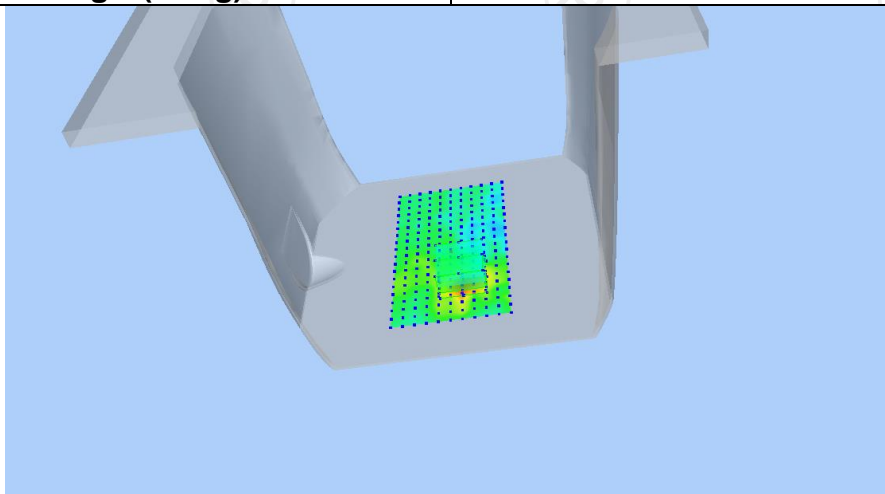

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6080	0.2867	0.1215	0.0770	0.0573

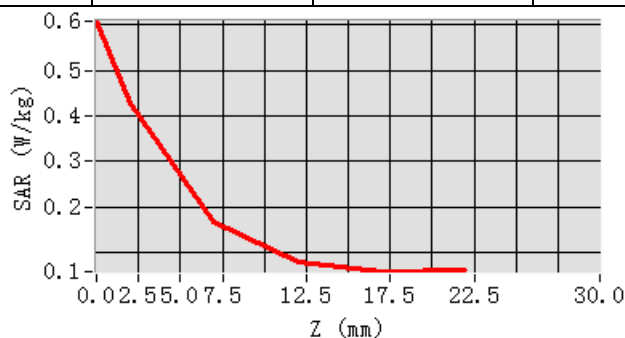

Hot spot position

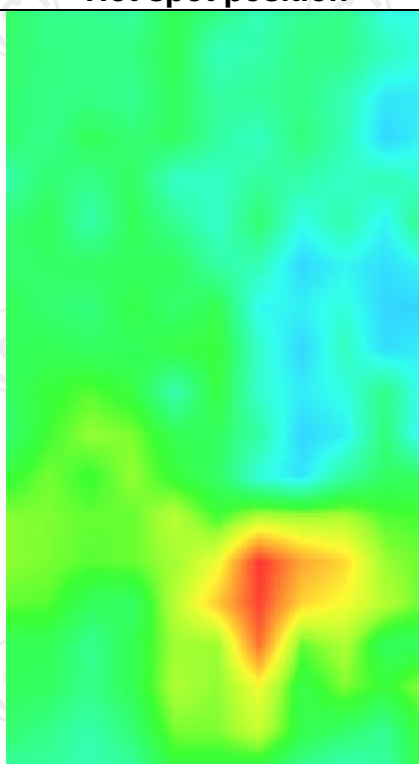

Body wearing equipment
GSM900


MEASUREMENT 1

Middle Band SAR (Channel 60):


Date: 03/10/2025

Frequency (MHz)	902.000000
Relative permittivity (real part)	41.620154
Relative permittivity (imaginary part)	18.430214
Conductivity (S/m)	0.981205
Variation (%)	2.560000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM900(voice)

SURFACE SAR

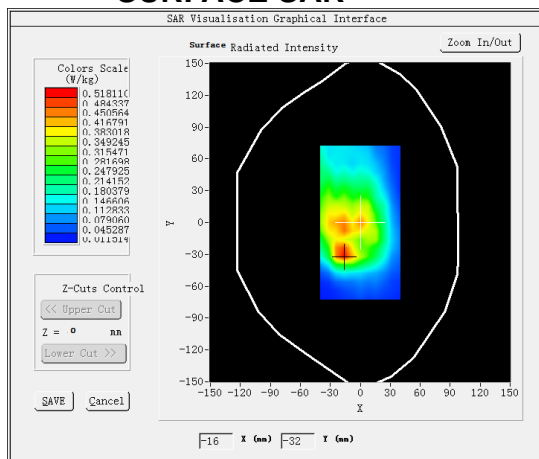


VOLUME SAR

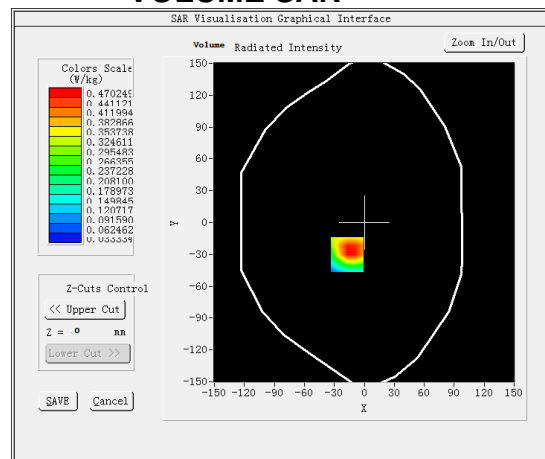


Maximum location: X=-17.00, Y=-30.00

SAR Peak: 0.76 W/kg


SAR 10g (W/Kg)	0.271387
SAR 1g (W/Kg)	0.466963

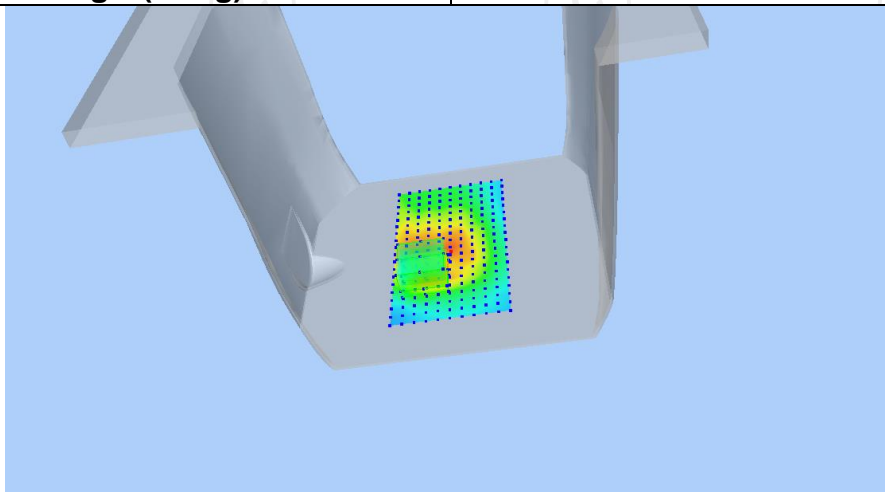

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.7402	0.4702	0.2615	0.1490	0.0915

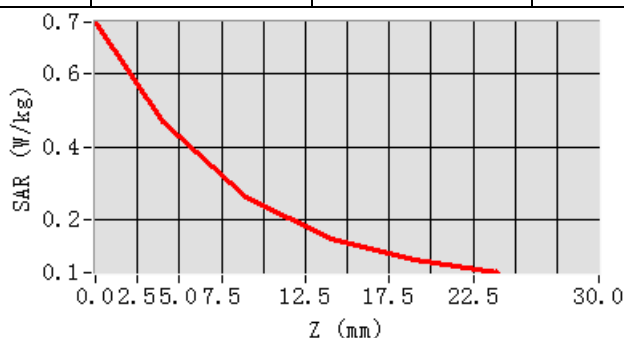

Hot spot position

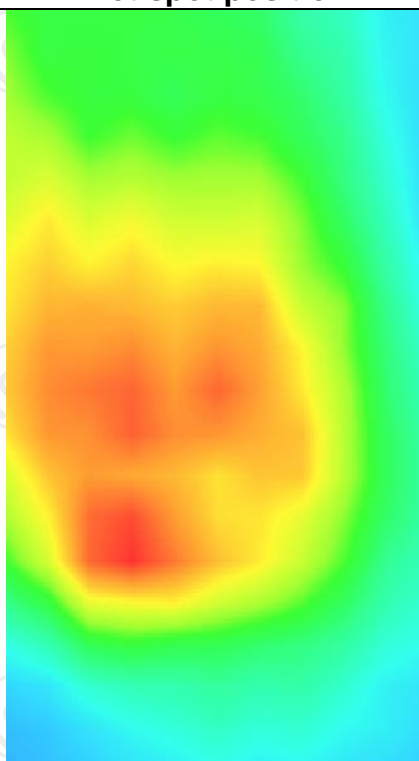


MEASUREMENT 2

Middle Band SAR (Channel 60):


Date: 03/10/2025

Frequency (MHz)	902.000000
Relative permittivity (real part)	41.620154
Relative permittivity (imaginary part)	18.430214
Conductivity (S/m)	0.981205
Variation (%)	3.660000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM900(GPRS 4slot)

SURFACE SAR

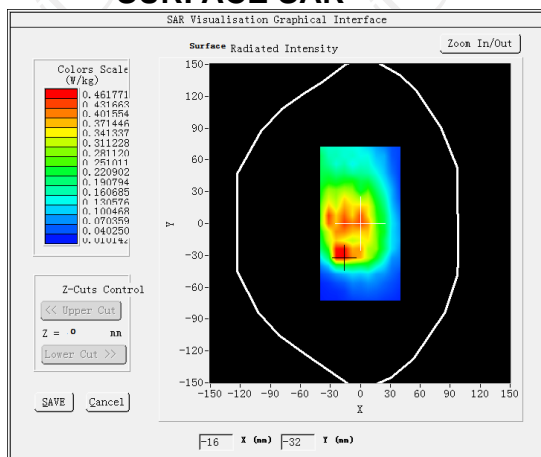


VOLUME SAR

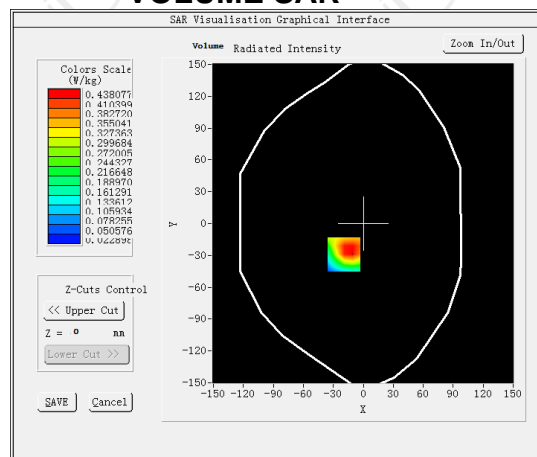


Maximum location: X=-19.00, Y=-29.00

SAR Peak: 0.69 W/kg


SAR 10g (W/Kg)	0.259962
SAR 1g (W/Kg)	0.436780

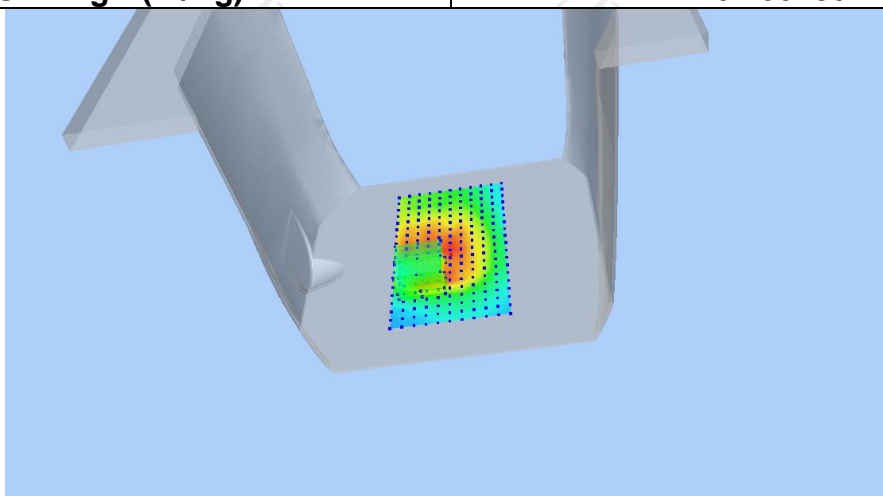

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.3786	0.4381	0.1752	0.1654	0.0710

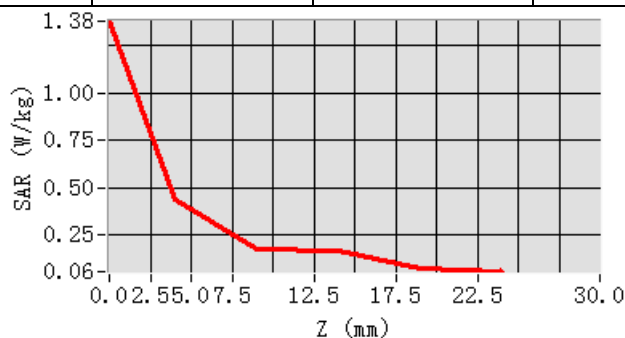

Hot spot position

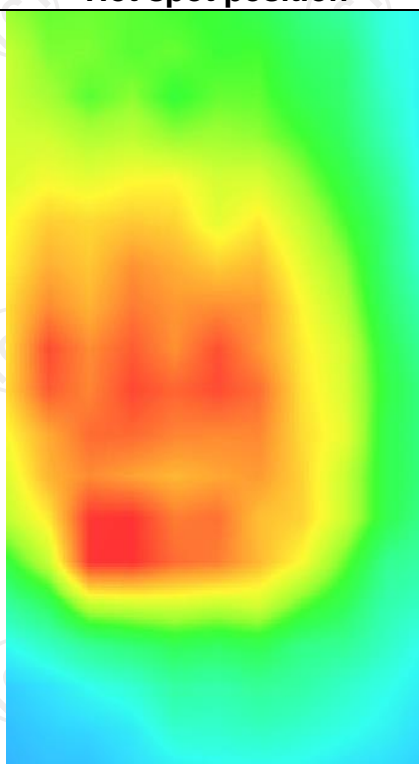

GSM1800


MEASUREMENT 1

Middle Band SAR (Channel 700):


Date: 03/12/2025

Frequency (MHz)	1747.800049
Relative permittivity (real part)	38.761284
Relative permittivity (imaginary part)	13.777154
Conductivity (S/m)	1.371548
Variation (%)	-4.080000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM1800(voice)

SURFACE SAR

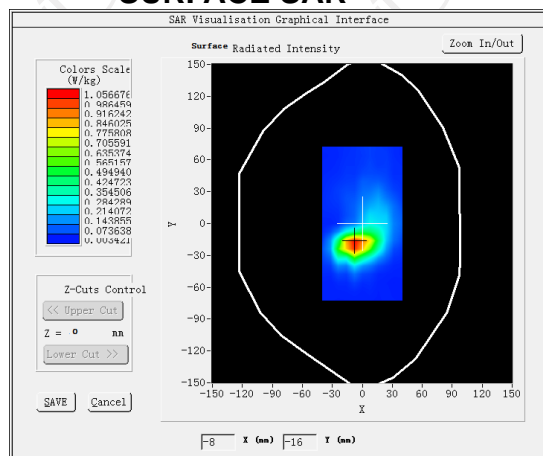


VOLUME SAR

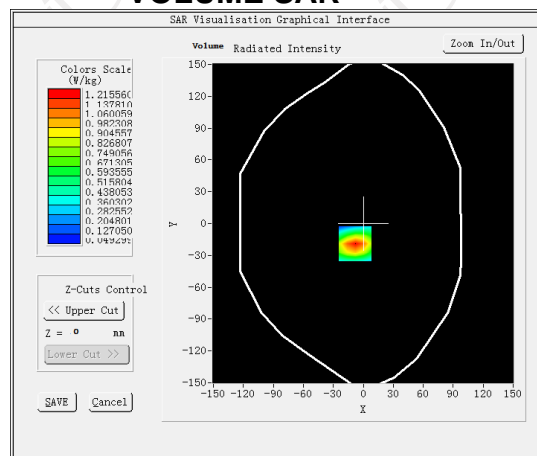


Maximum location: X=-8.00, Y=-19.00

SAR Peak: 1.67W/kg


SAR 10g (W/Kg)	0.678337
SAR 1g (W/Kg)	1.142350

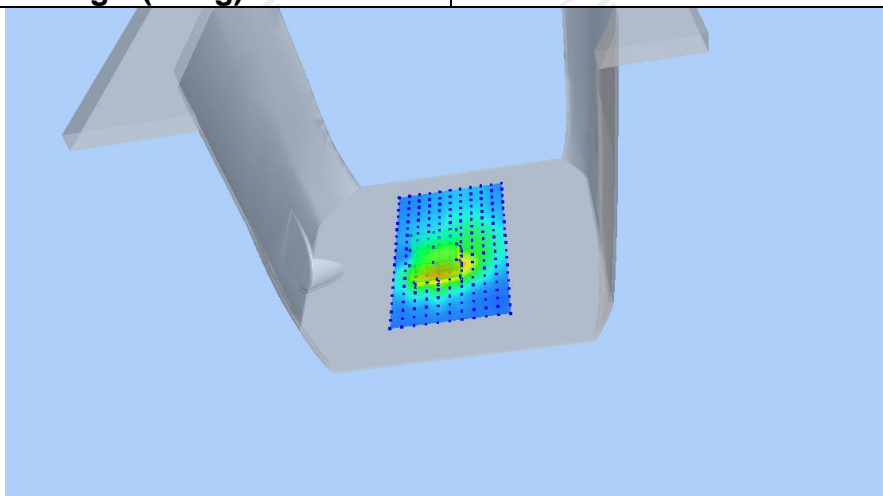

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.4925	1.2156	0.8941	0.6087	0.3692

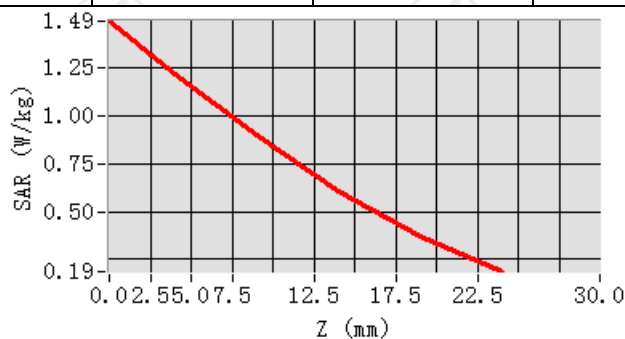

Hot spot position

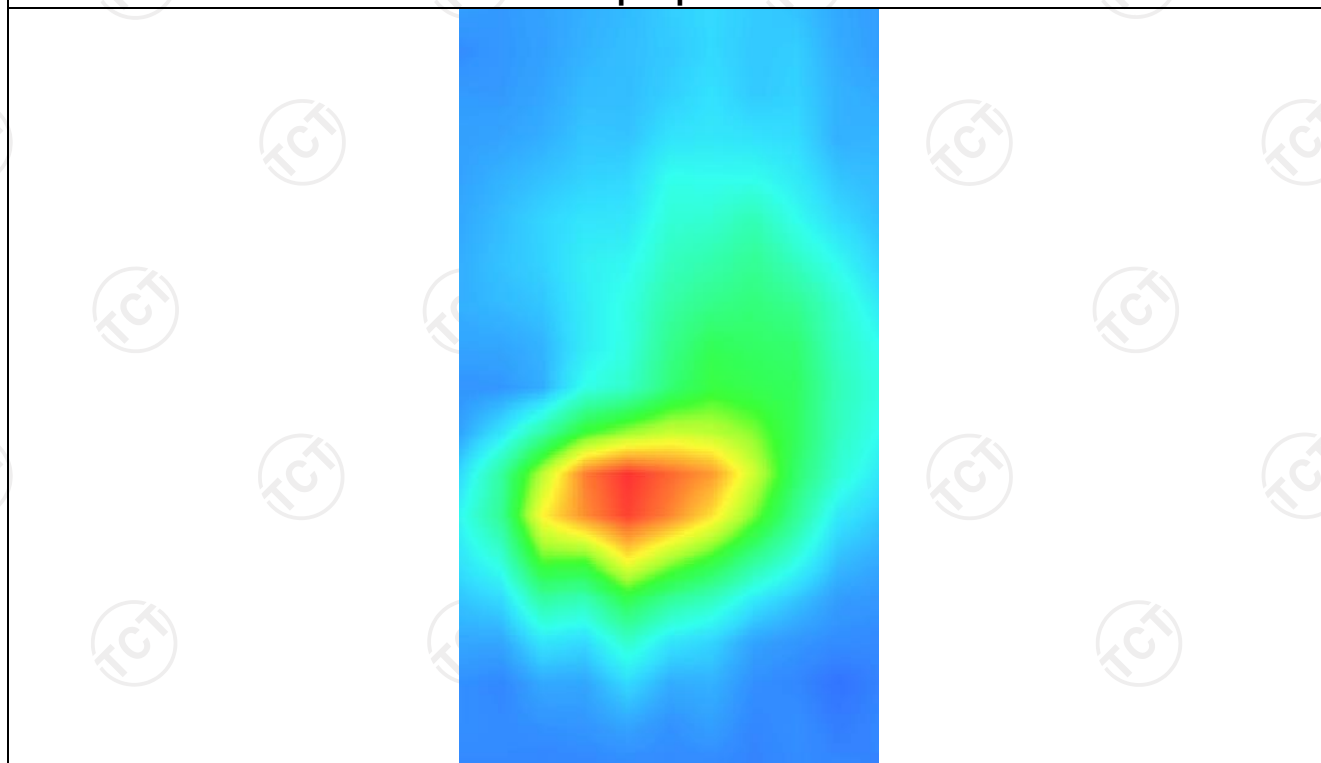


MEASUREMENT 2

Middle Band SAR (Channel 700):


Date: 03/12/2025

Frequency (MHz)	1747.800049
Relative permittivity (real part)	38.761284
Relative permittivity (imaginary part)	13.777154
Conductivity (S/m)	1.371548
Variation (%)	2.850000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	GSM1800(GPRS 4slot)

SURFACE SAR

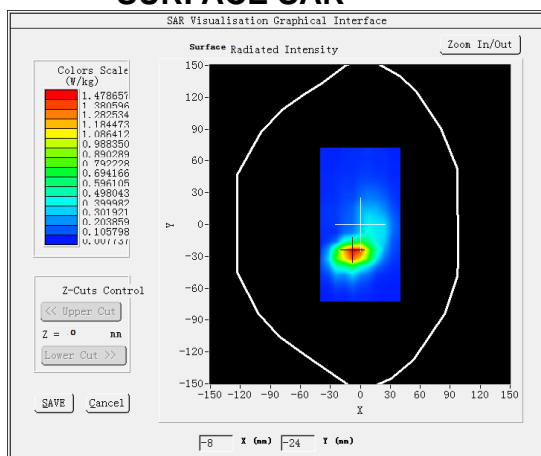


VOLUME SAR

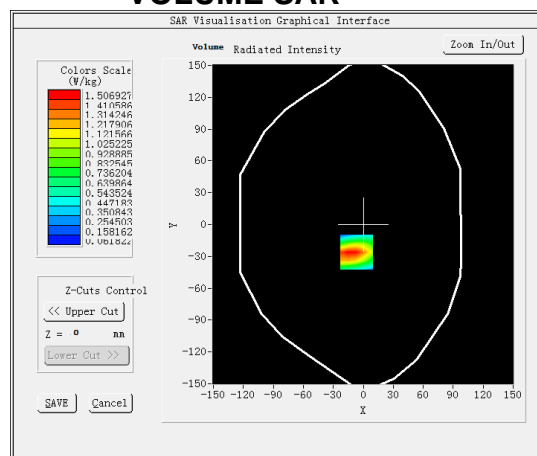


M Maximum location: X=-7.00, Y=-26.00

SAR Peak: 2.90 W/kg


SAR 10g (W/Kg)	0.829599
SAR 1g (W/Kg)	1.509136

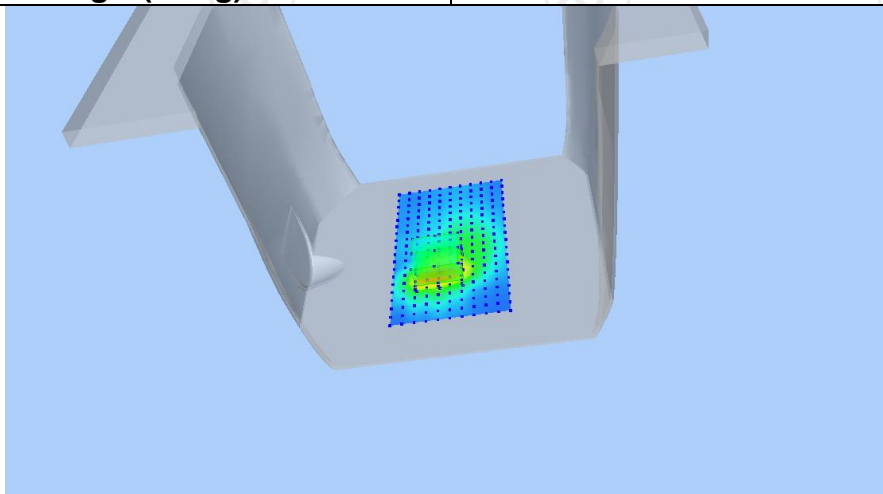

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6027	1.5069	0.9437	0.5017	0.3600

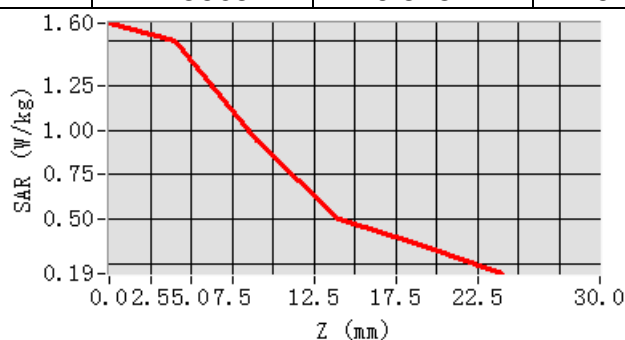

Hot spot position

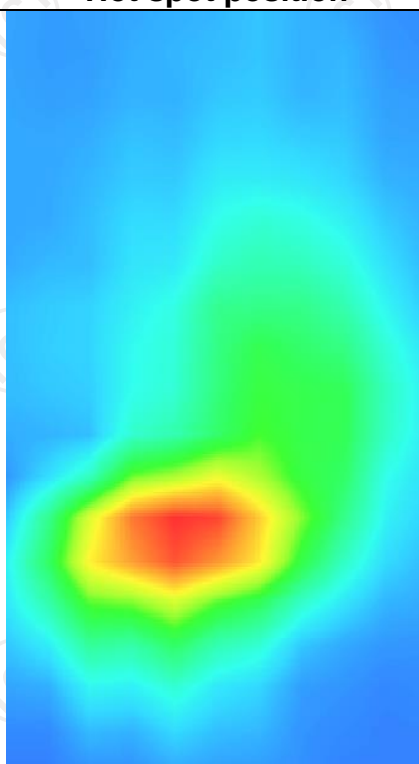


WCDMA Band I MEASUREMENT 1

High Band SAR (Channel 9888):


Date: 02/28/2025

Frequency (MHz)	1977.600000
Relative permittivity (real part)	39.210241
Relative permittivity (imaginary part)	12.491257
Conductivity (S/m)	1.3751027
Variation (%)	-3.750000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	BAND1_WCDMA2100

SURFACE SAR

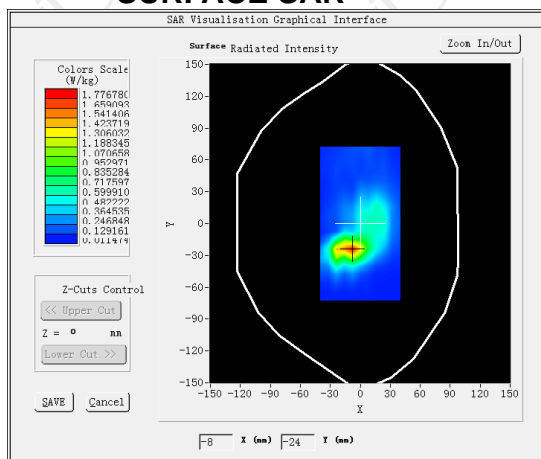


VOLUME SAR

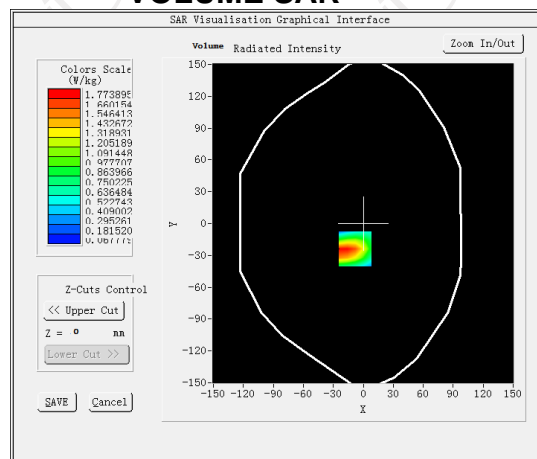


Maximum location: X=-8.00, Y=-24.00

SAR Peak: 3.50 W/kg


SAR 10g (W/Kg)	1.029141
SAR 1g (W/Kg)	1.791279

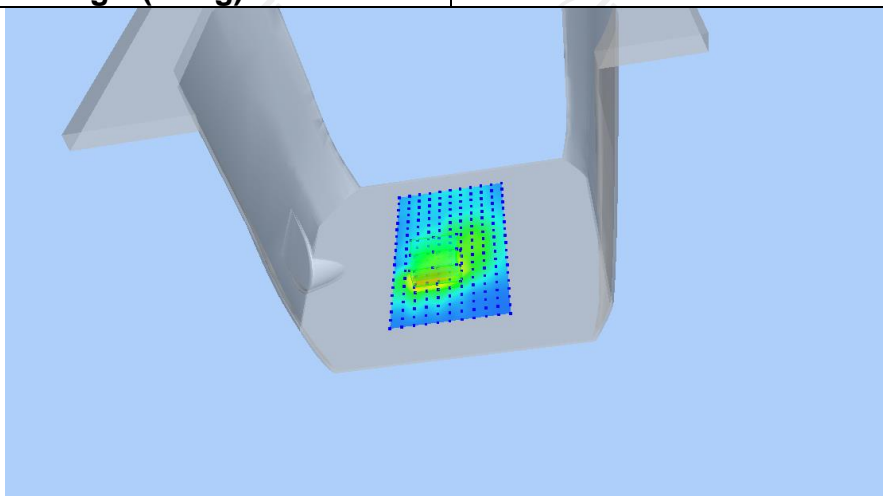

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.7270	1.7739	0.7955	0.3425	0.3340

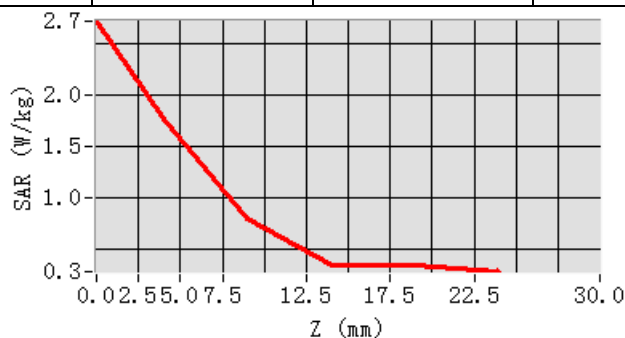

Hot spot position

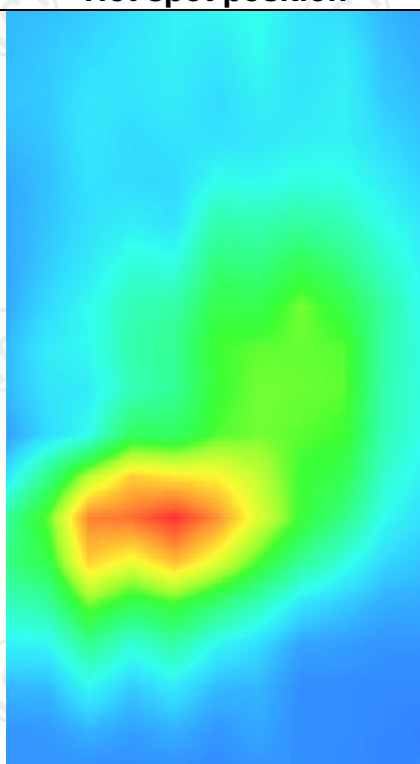

WCDMA Band VIII


MEASUREMENT 1

Middle Band SAR (Channel 27188):


Date: 03/10/2025

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.401571
Relative permittivity (imaginary part)	18.521574
Conductivity (S/m)	0.991257
Variation (%)	2.030000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	BAND8 WCDMA900

SURFACE SAR

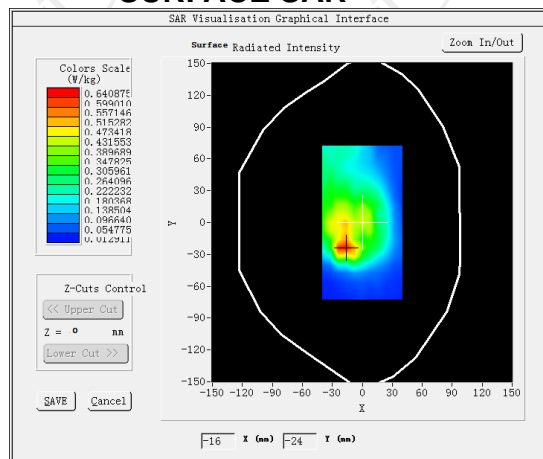


VOLUME SAR

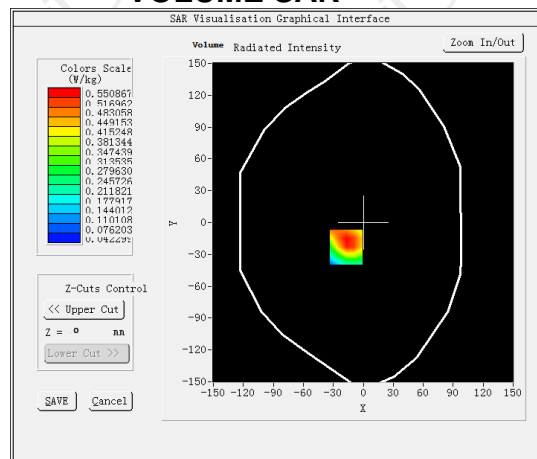


Maximum location: X=-17.00, Y=-23.00

SAR Peak: 0.83 W/kg


SAR 10g (W/Kg)	0.330620
SAR 1g (W/Kg)	0.541557

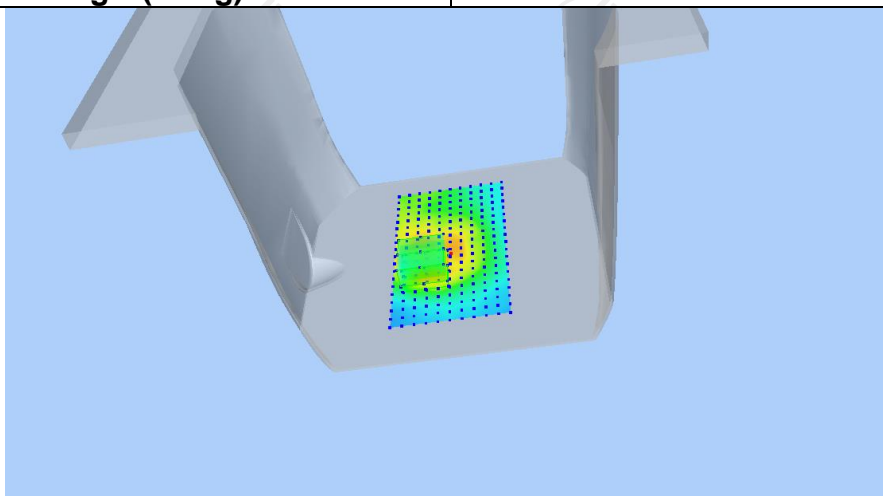

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6158	0.5509	0.2665	0.2466	0.1128

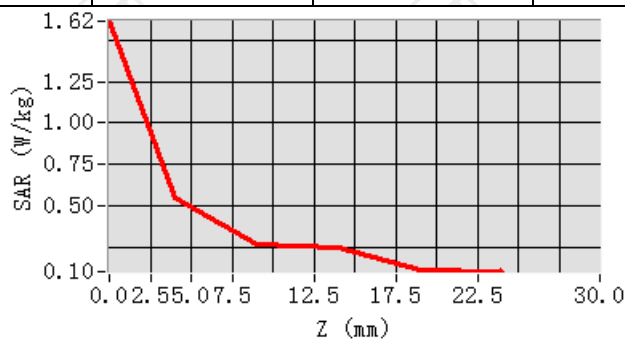

Hot spot position

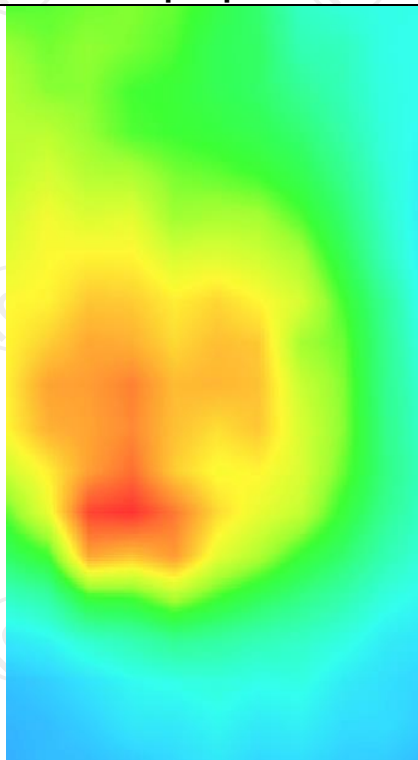

LTE Band I


MEASUREMENT 1

Middle Band SAR (Channel 27188):


Date: 03/10/2025

Frequency (MHz)	897.600000
Relative permittivity (real part)	41.401571
Relative permittivity (imaginary part)	18.521574
Conductivity (S/m)	0.991257
Variation (%)	2.030000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	BAND8 WCDMA900

SURFACE SAR

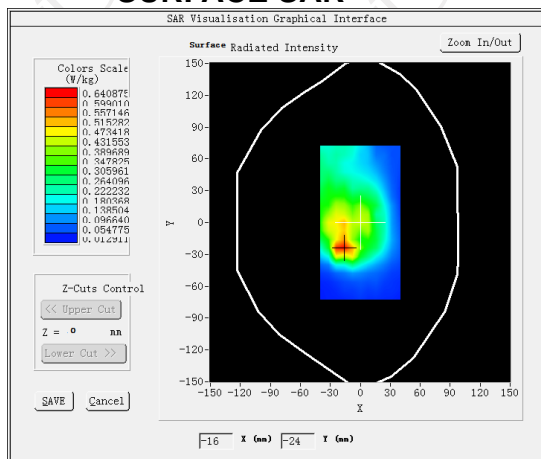


VOLUME SAR

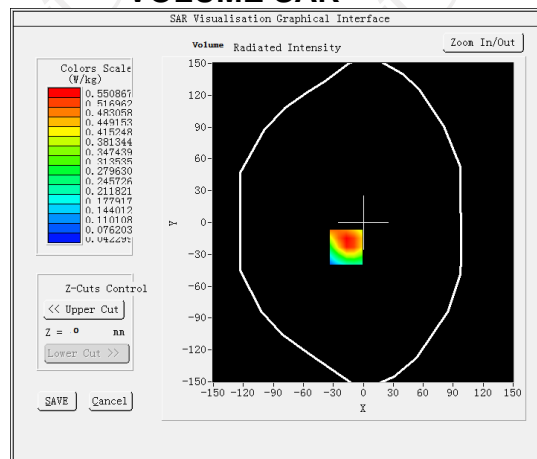


Maximum location: X=-17.00, Y=-23.00

SAR Peak: 0.83 W/kg


SAR 10g (W/Kg)	0.330620
SAR 1g (W/Kg)	0.541557

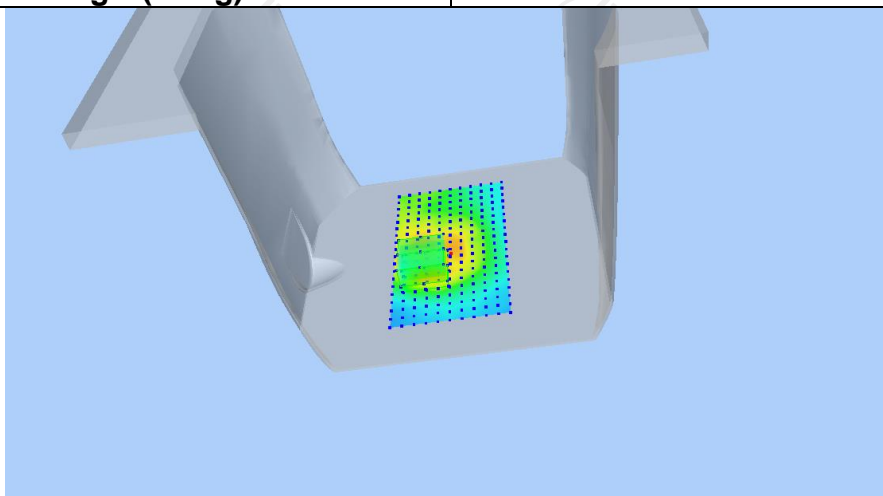

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.6158	0.5509	0.2665	0.2466	0.1128

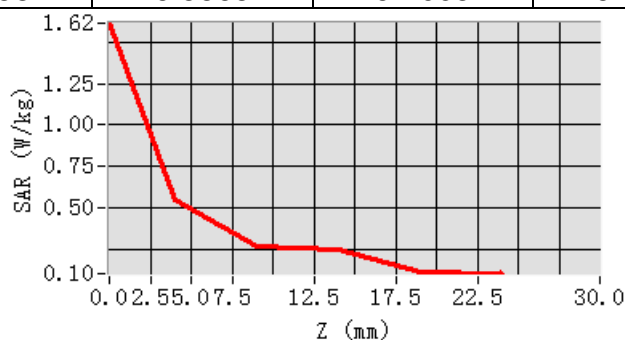

Hot spot position

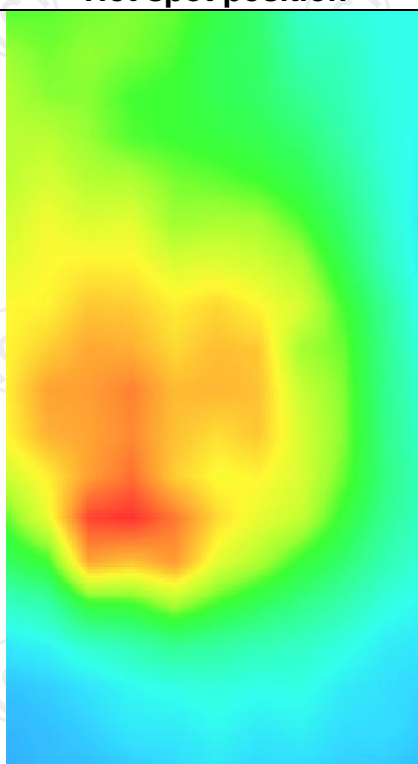

LTE Band III


MEASUREMENT 1

Low Band SAR (Channel 19300):


Date: 03/12/2025

Frequency (MHz)	1720.00000
Relative permittivity (real part)	40.230217
Relative permittivity (imaginary part)	13.801574
Conductivity (S/m)	1.430258
Variation (%)	-1.630000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 3

SURFACE SAR

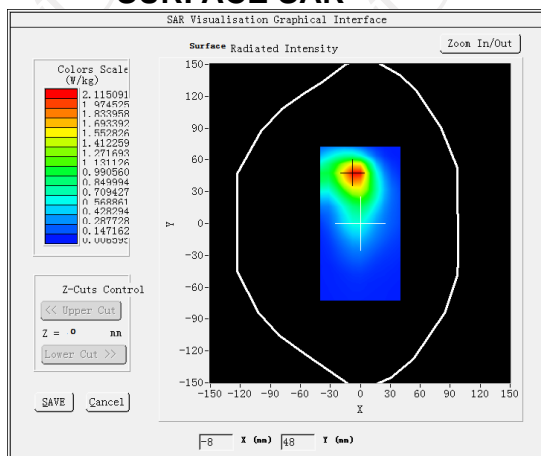


VOLUME SAR

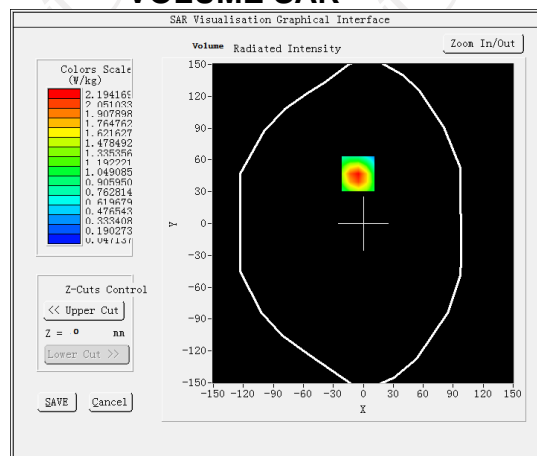


Maximum location: X=-5.00, Y=47.00

SAR Peak: 3.85 W/kg


SAR 10g (W/Kg)	1.004784
SAR 1g (W/Kg)	2.061258

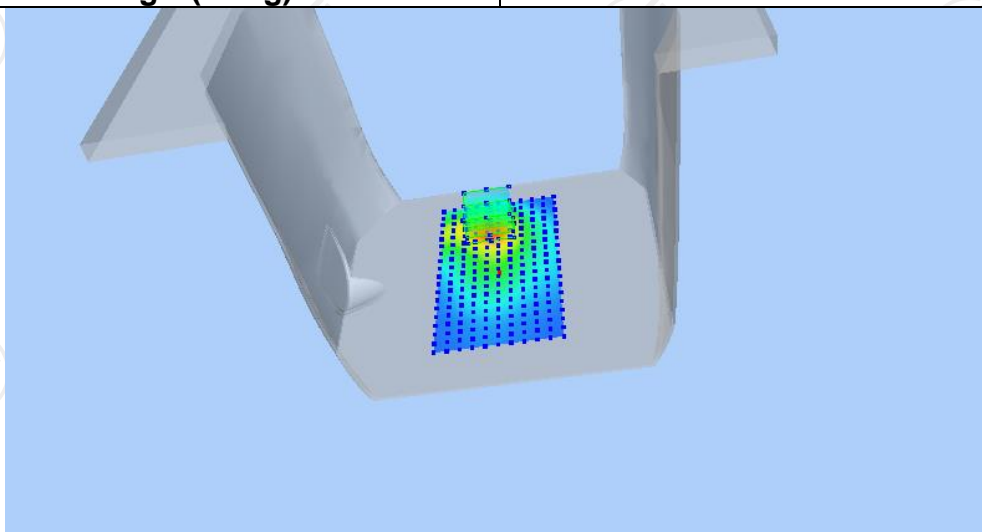

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	3.8065	2.1942	1.0494	0.5083	0.2769

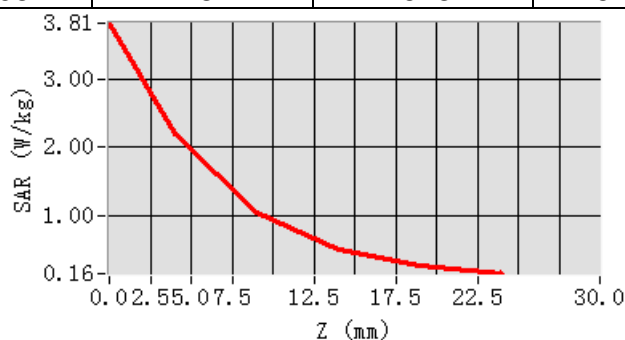

Hot spot position

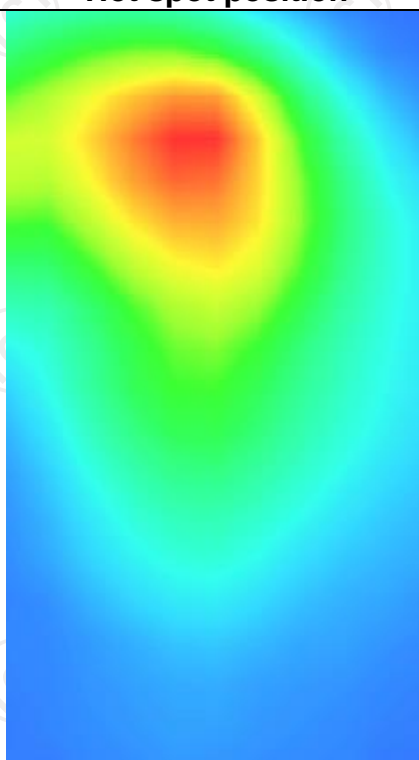

LTE Band 7


MEASUREMENT 1

Middle Band SAR (Channel 21100):


Date: 02/25/2025

Frequency (MHz)	2535.000000
Relative permittivity (real part)	38.615742
Relative permittivity (imaginary part)	13.351254
Conductivity (S/m)	1.927154
Variation (%)	-2.510000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 7

SURFACE SAR

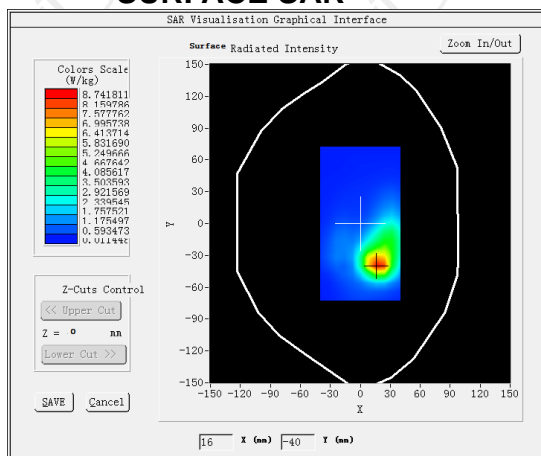


VOLUME SAR

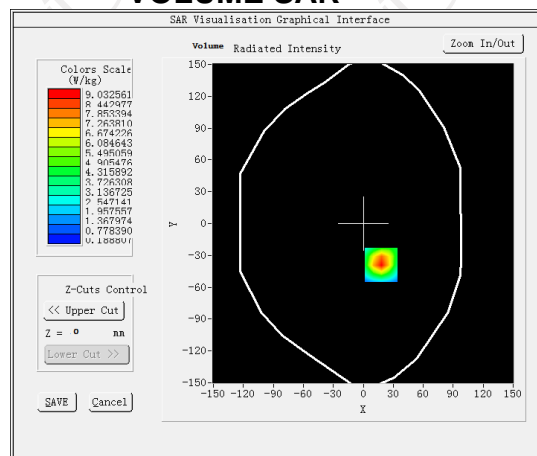


Maximum location: X=-9.00, Y=-25.00

SAR Peak: 6.24W/kg


SAR 10g (W/Kg)	1.761258
SAR 1g (W/Kg)	3.265726

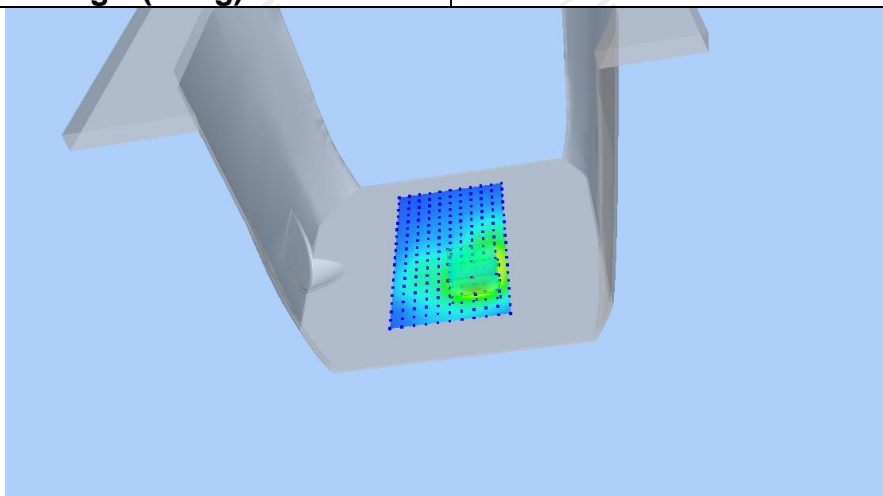

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	6.2498	3.6926	1.8431	0.9440	0.5448

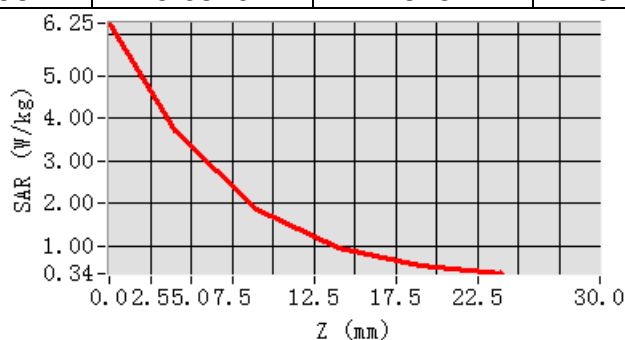

Hot spot position

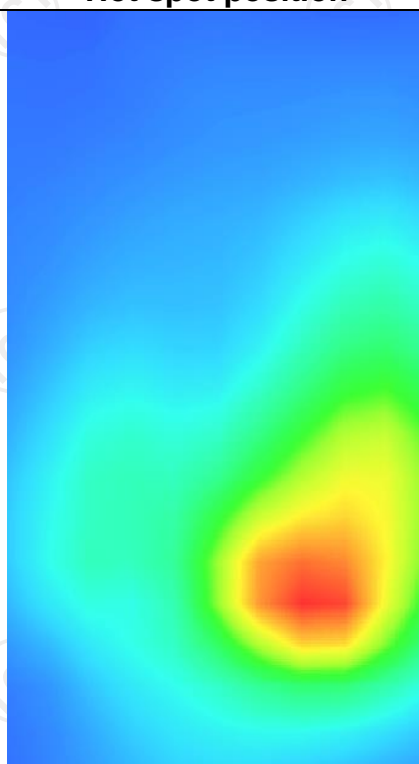

LTE Band 8


MEASUREMENT 1

High Band SAR (Channel 21750):


Date: 04/02/2024

Frequency (MHz)	897.500000
Relative permittivity (real part)	41.410257
Relative permittivity (imaginary part)	18.432154
Conductivity (S/m)	0.964152
Variation (%)	-1.620000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 8

SURFACE SAR

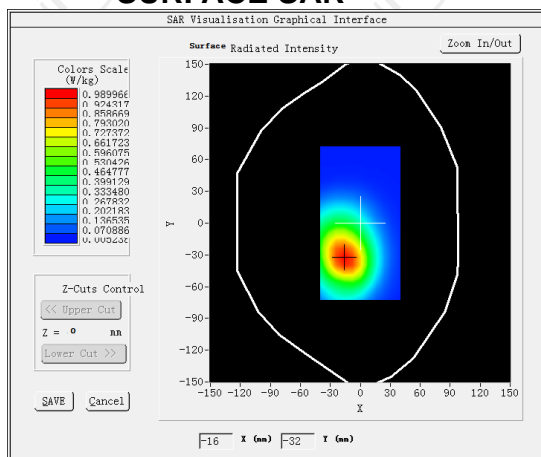


VOLUME SAR

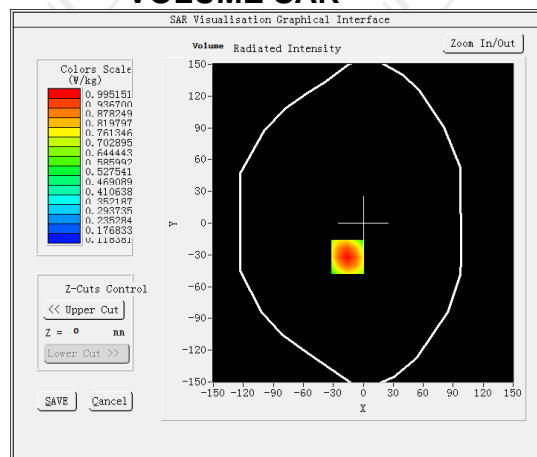


Maximum location: X=-16.00, Y=-29.00

SAR Peak: 1.28W/kg


SAR 10g (W/Kg)	0.710257
SAR 1g (W/Kg)	0.921574

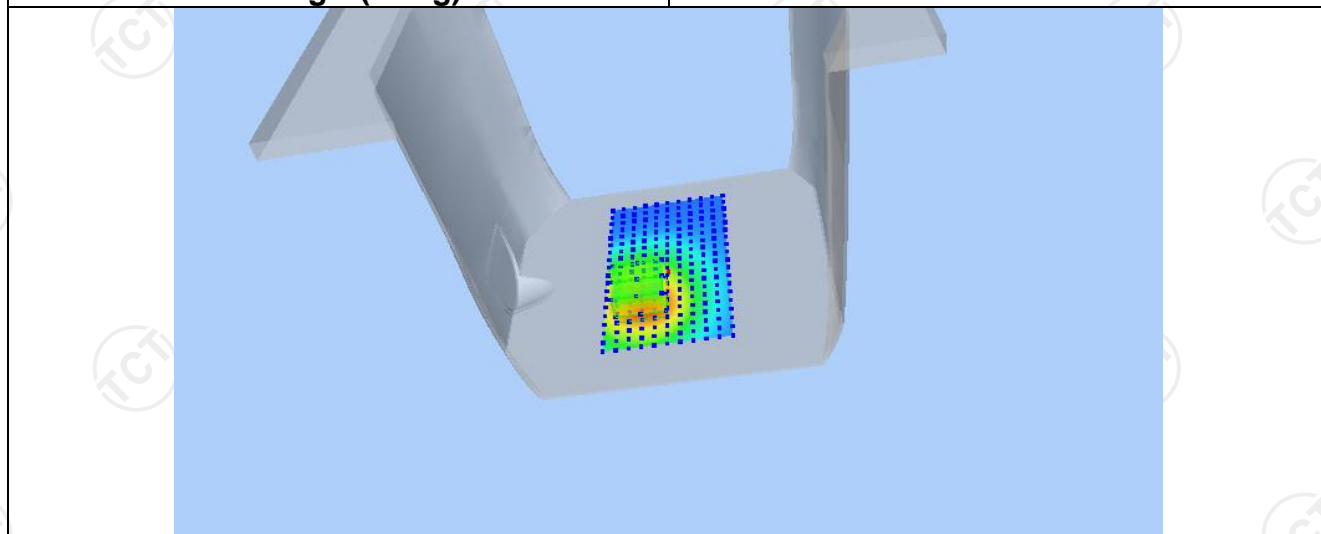

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.2795	0.9952	0.7204	0.5185	0.3705

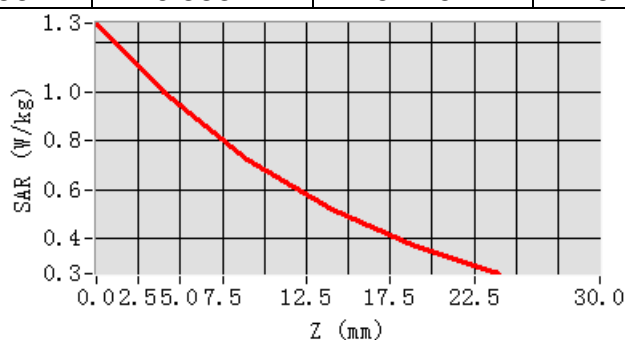

Hot spot position

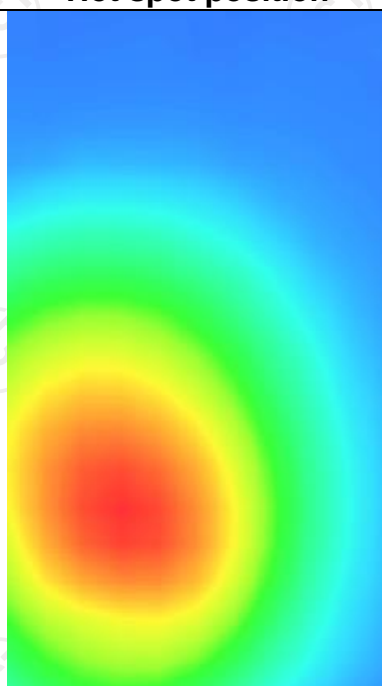

LTE Band 20


MEASUREMENT 1

Low Band SAR (Channel 24250):


Date: 03/10/2025

Frequency (MHz)	842.000000
Relative permittivity (real part)	41.500000
Relative permittivity (imaginary part)	19.021540
Conductivity (S/m)	0.951247
Variation (%)	0.730000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 20

SURFACE SAR

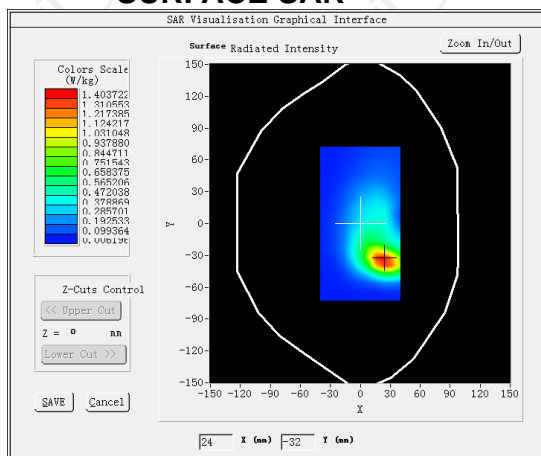


VOLUME SAR

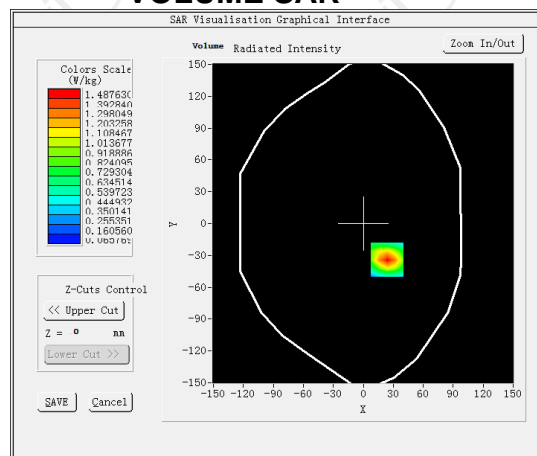


Maximum location: X=24.00, Y=-34.00

SAR Peak: 2.38 W/kg


SAR 10g (W/Kg)	0.781574
SAR 1g (W/Kg)	1.326845

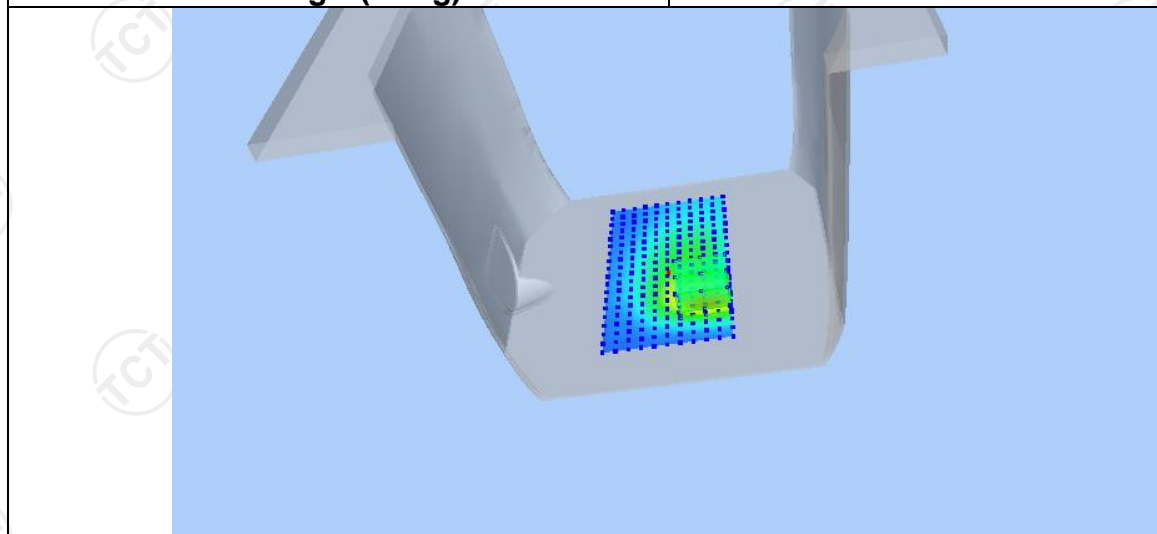

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.3761	1.4876	0.8105	0.4533	0.2762

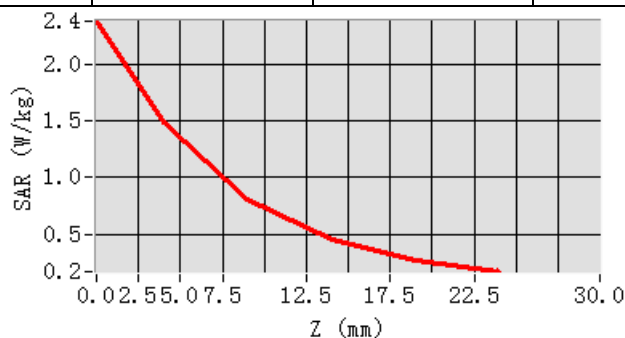

Hot spot position

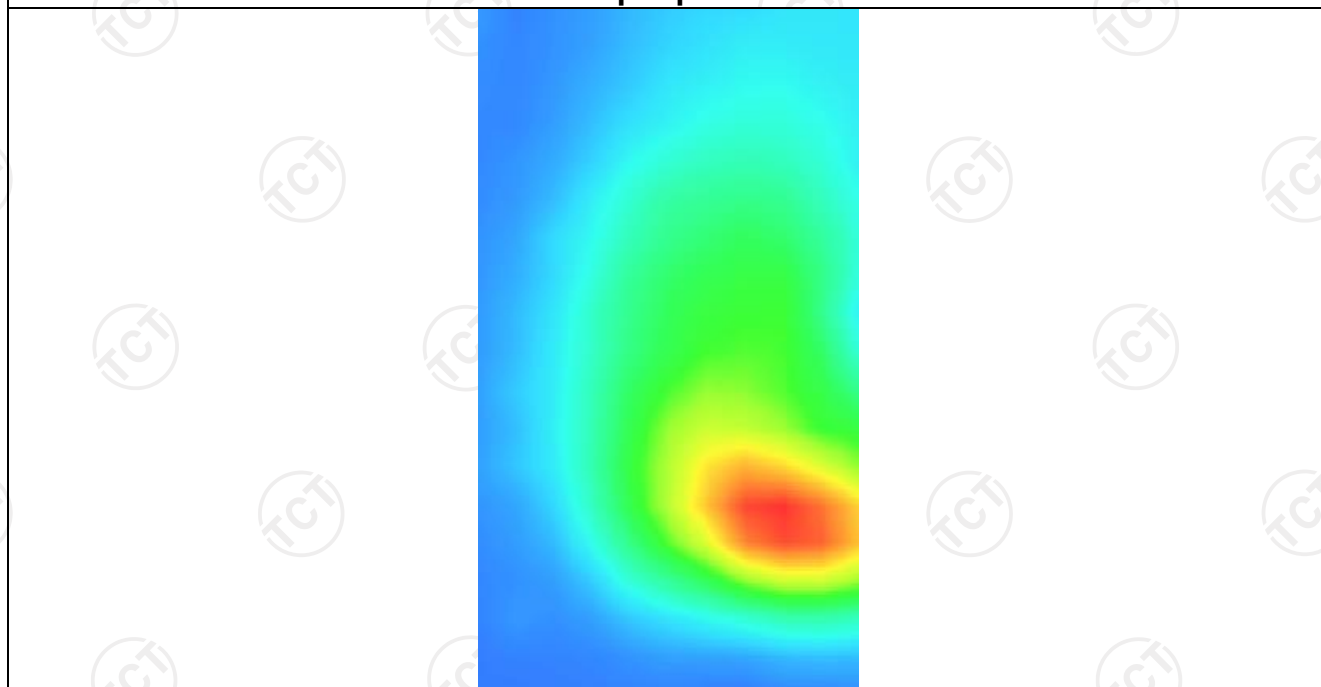

LTE Band 28


MEASUREMENT 1

Middle Band SAR (Channel 27460):


Date: 03/10/2025

Frequency (MHz)	728.000000
Relative permittivity (real part)	42.054125
Relative permittivity (imaginary part)	21.300150
Conductivity (S/m)	0.871542
Variation (%)	-1.560000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 28

SURFACE SAR

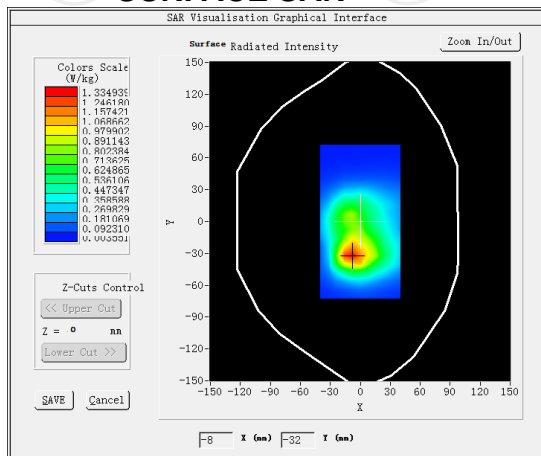


VOLUME SAR

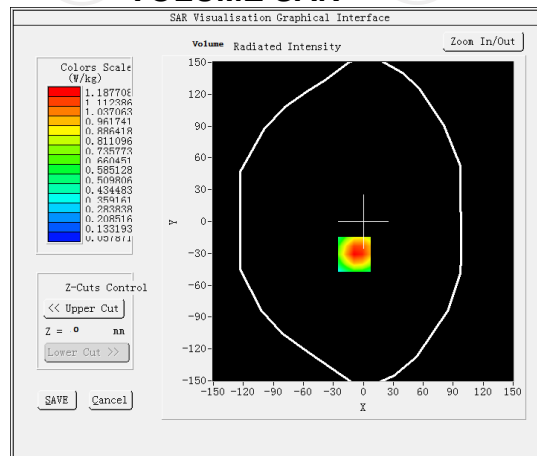


Maximum location: X=-9.00, Y=-31.00

SAR Peak: 1.80 W/kg


SAR 10g (W/Kg)	0.671584
SAR 1g (W/Kg)	1.120241

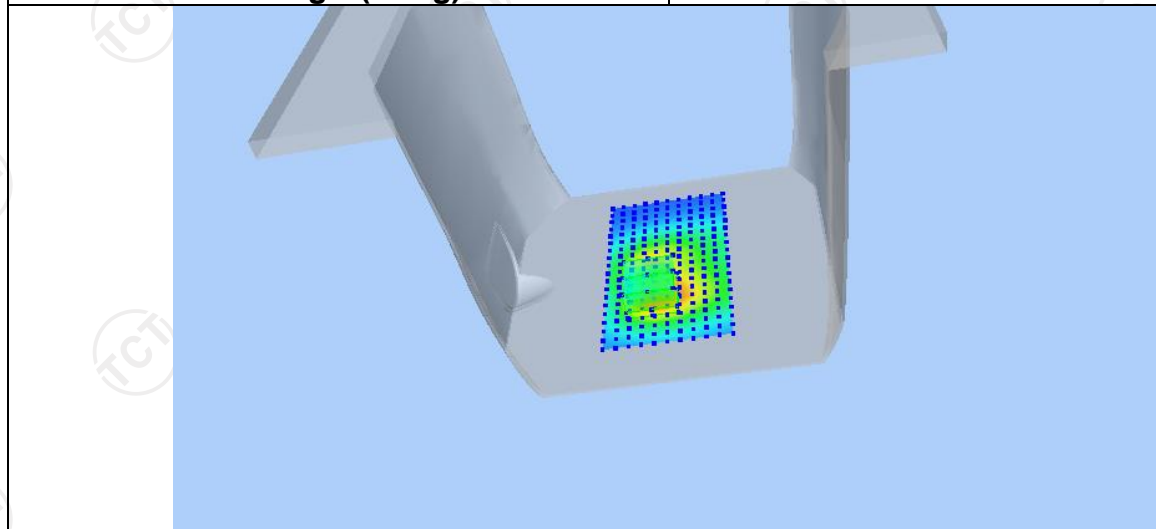

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.8091	1.1877	0.6867	0.3986	0.2387

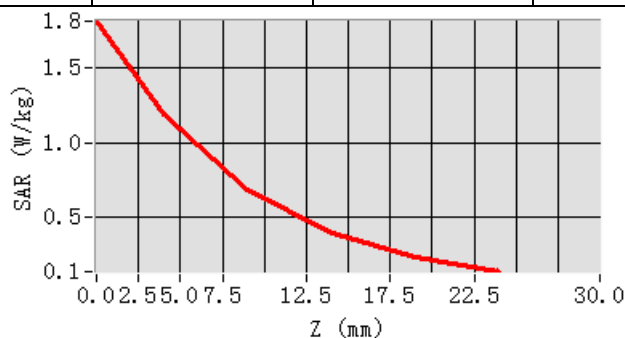

Hot spot position

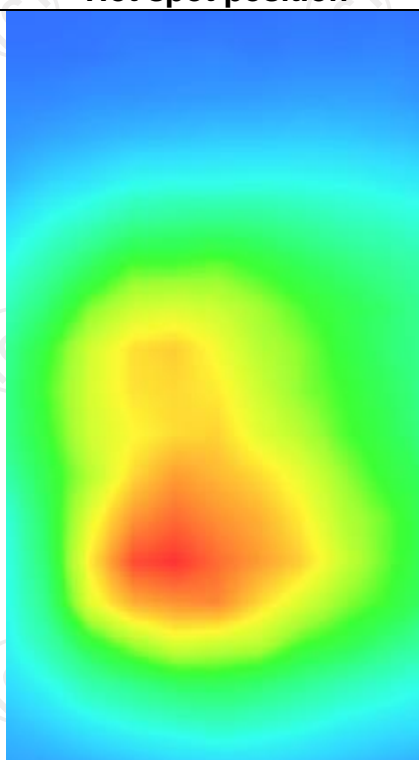

LTE Band 38


MEASUREMENT 1

High Band SAR (Channel 38150)


Date: 02/25/2025

Frequency (MHz)	2610.000000
Relative permittivity (real part)	39.061254
Relative permittivity (imaginary part)	13.578125
Conductivity (S/m)	1.932017
Variation (%)	-0.590000
Area Scan	dx=8mm dy=12mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	LTE band 38

SURFACE SAR

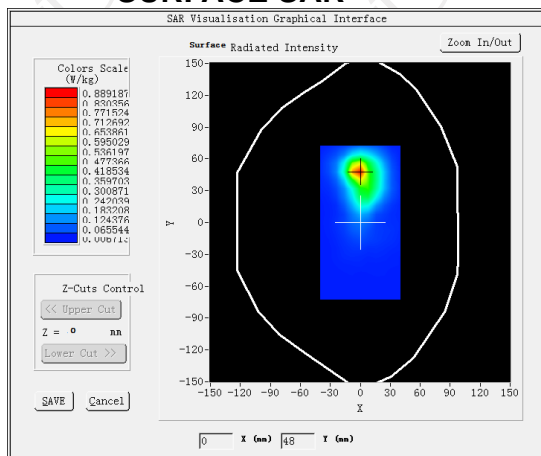


VOLUME SAR

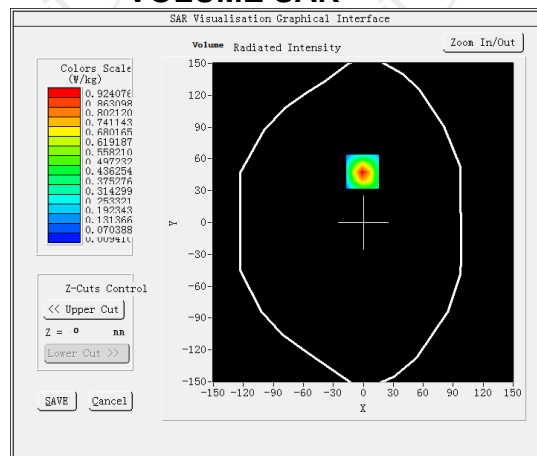


Maximum location: X=-1.00, Y=48.00

SAR Peak:2.07 W/kg


SAR 10g (W/Kg)	0.861254
SAR 1g (W/Kg)	1.420215

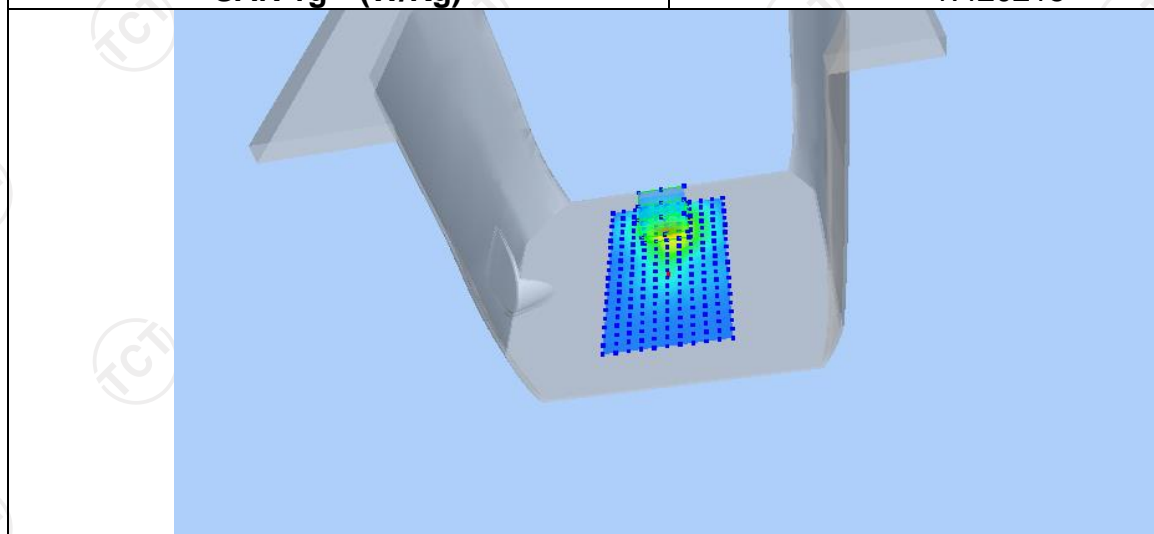

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	2.7872	1.5212	0.9481	0.7320	0.5083

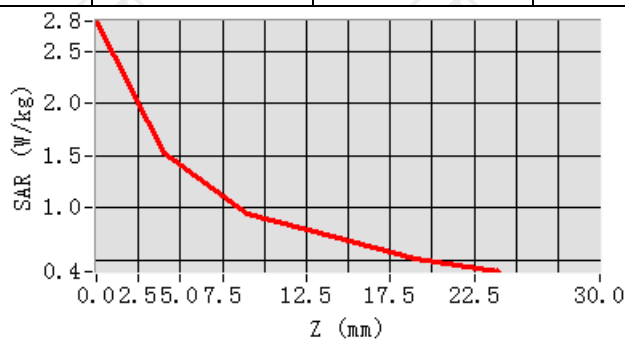

Hot spot position

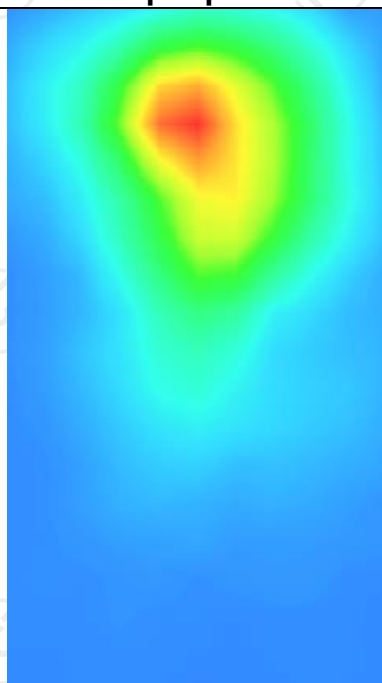


LTE Band 40


MEASUREMENT 1

Low Band SAR (Channel 38750)		Date: 02/25/2025
Frequency (MHz)	2310.000000	
Relative permittivity (real part)	39.281523	
Relative permittivity (imaginary part)	13.602154	
Conductivity (S/m)	1.731254	
Variation (%)	-3.430000	
Area Scan	dx=8mm dy=12mm, h= 5.00 mm	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete	
Phantom	Validation plane	
Device Position	Body back	
Band	LTE band 40	

SURFACE SAR

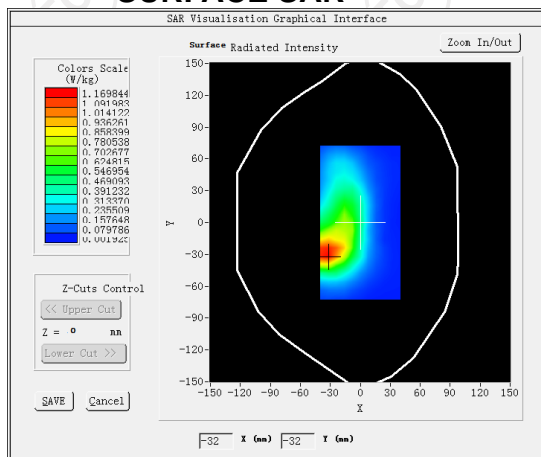


VOLUME SAR

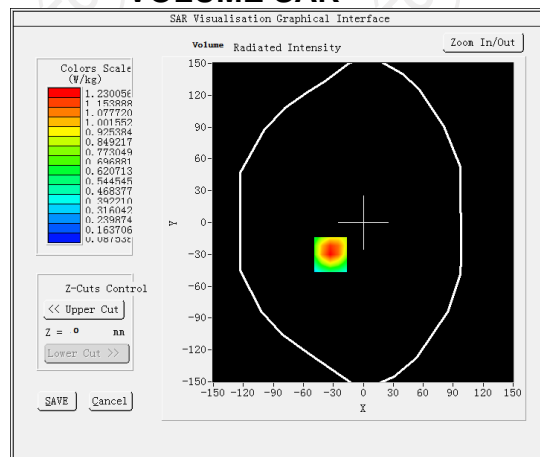


Maximum location: X=-32.00, Y=-32.00
SAR Peak: 1.85 W/kg


SAR 10g (W/Kg)	0.721542
SAR 1g (W/Kg)	1.152160

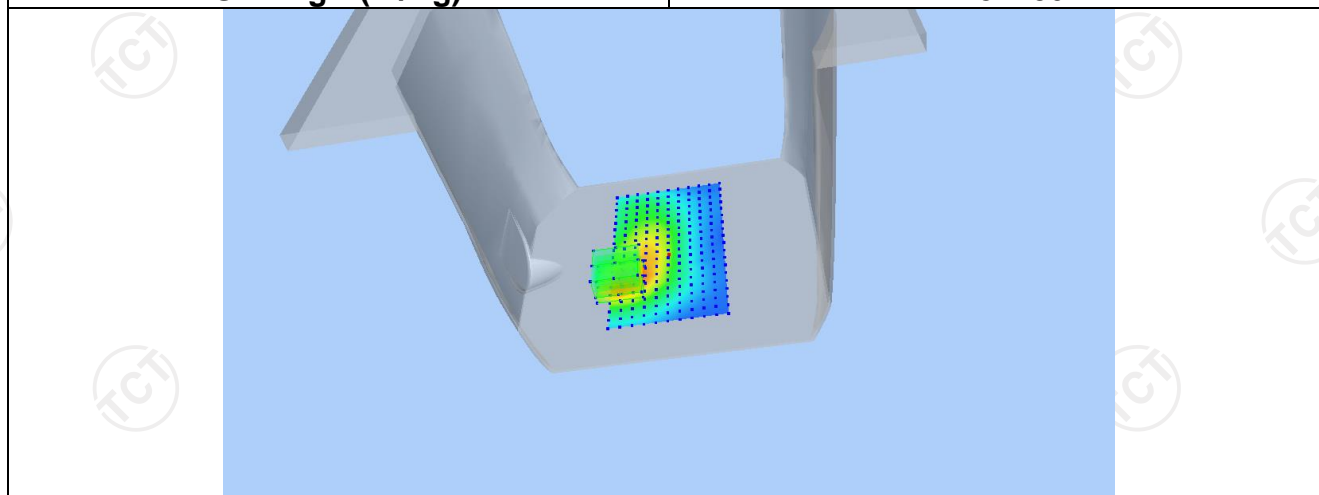

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.7981	1.2301	0.7608	0.4825	0.3223

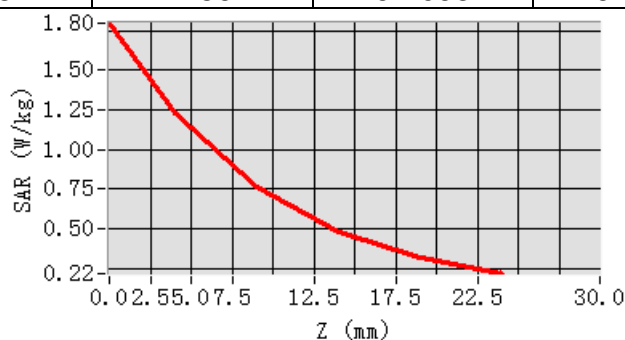

Hot spot position

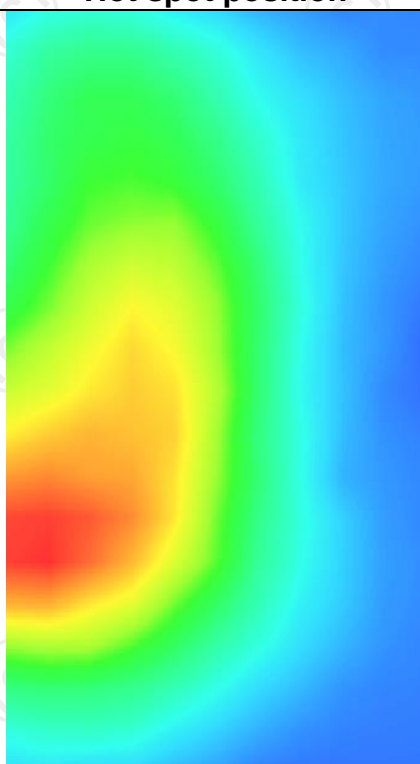


2.4G WLAN MEASUREMENT 2

Middle Band SAR (Channel 7):


Date: 02/25/2025

Frequency (MHz)	2442.000000
Relative permittivity (real part)	38.912541
Relative permittivity (imaginary part)	13.221547
Conductivity (S/m)	1.831574
Variation (%)	4.210000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	IEEE 802.11b ISM

SURFACE SAR

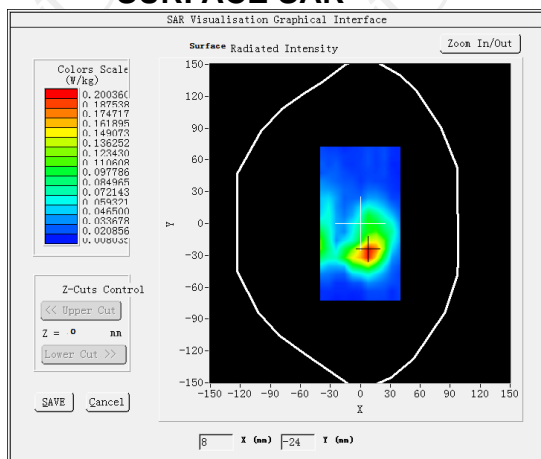


VOLUME SAR

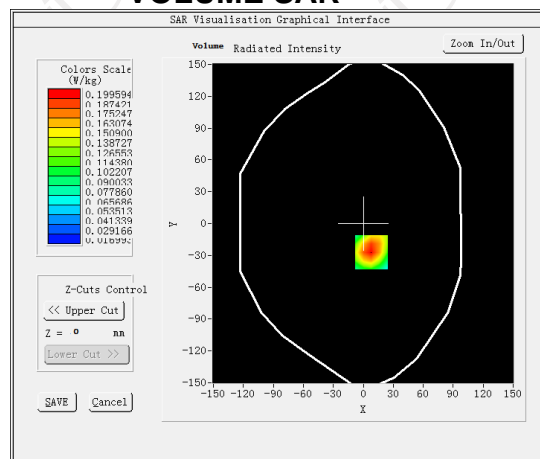


Maximum location: X=8.00, Y=-27.00

SAR Peak: 0.27 W/kg


SAR 10g (W/Kg)	0.121609
SAR 1g (W/Kg)	0.190318

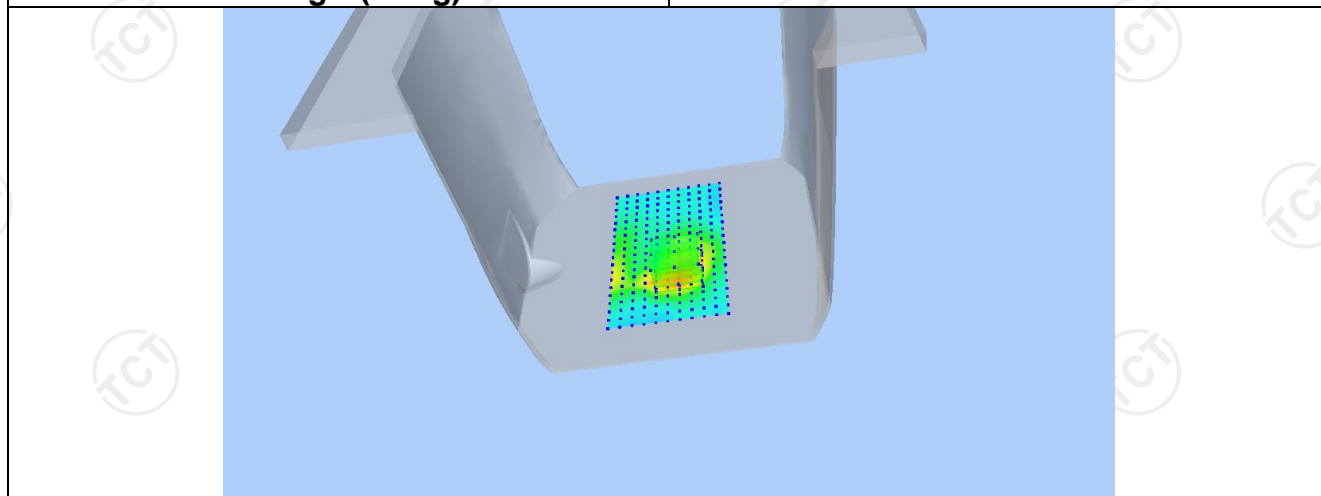

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.2574	0.1996	0.1426	0.0995	0.0674

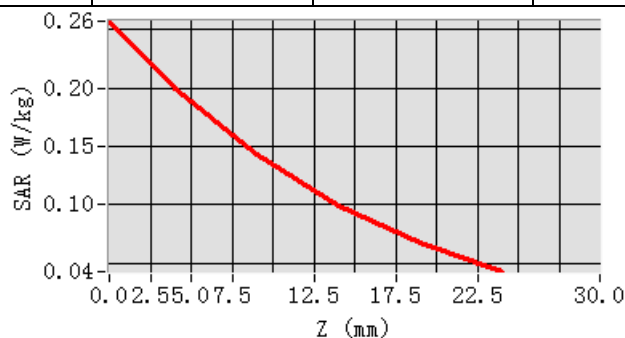

Hot spot position

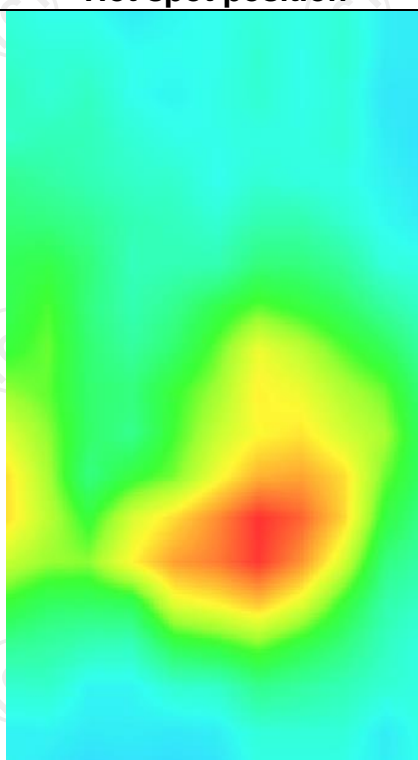


5.2G WLAN MEASUREMENT 1

SAR(Channel 36):


Date: 03/03/2025

Frequency (MHz)	5180.000000
Relative permittivity (real part)	35.912547
Relative permittivity (imaginary part)	16.142015
Conductivity (S/m)	4.712574
Variation (%)	0.950000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM

SURFACE SAR

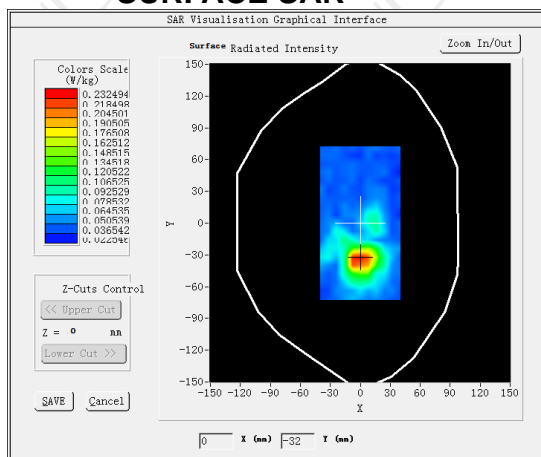


VOLUME SAR

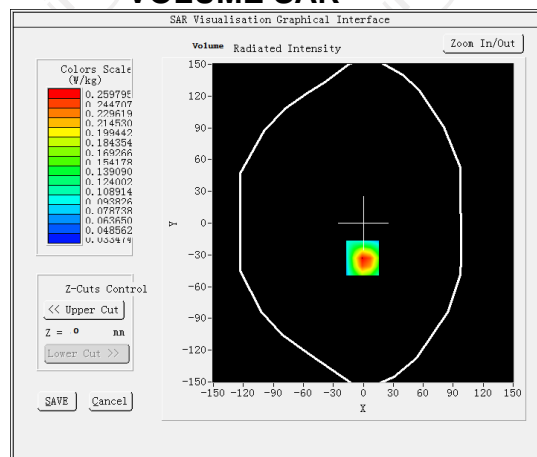


Maximum location: X=-1.00, Y=-33.00

SAR Peak: 0.35 W/kg


SAR 10g (W/Kg)	0.124899
SAR 1g (W/Kg)	0.191071

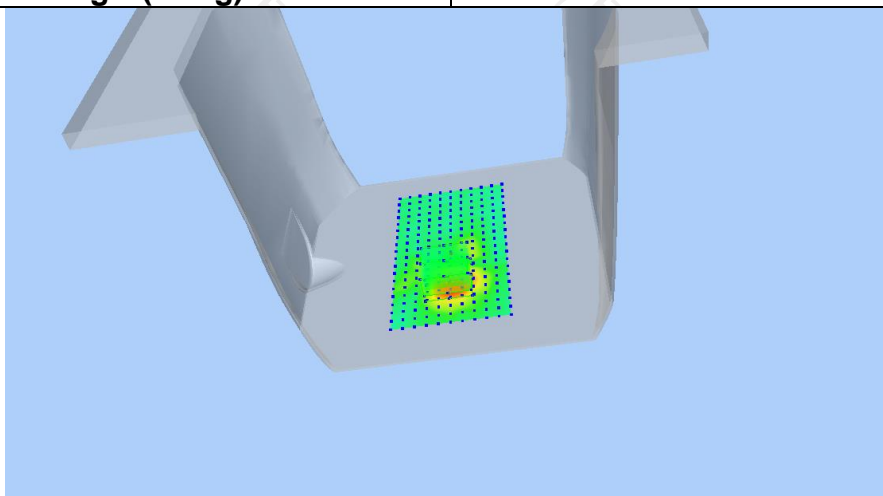

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3399	0.1815	0.1012	0.0742	0.0520

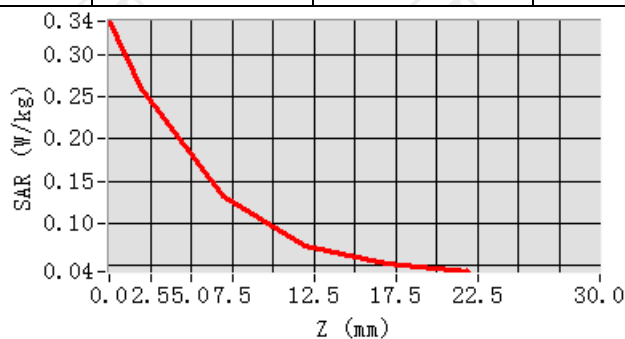

Hot spot position

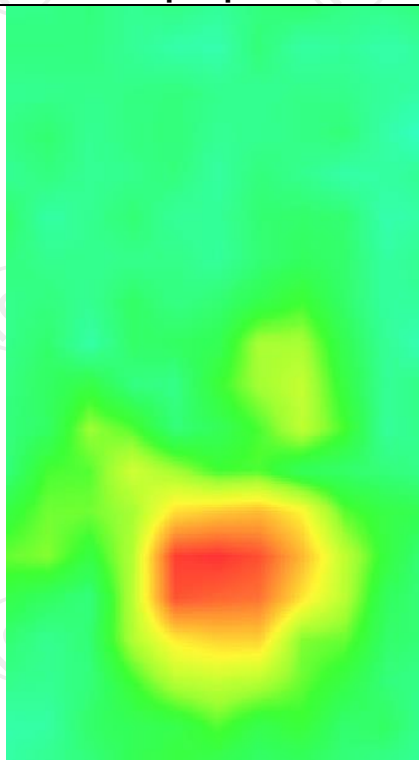

5.3G WLAN


MEASUREMENT 1

SAR (Channel 64):


Date: 03/03/2025

Frequency (MHz)	5320.000000
Relative permittivity (real part)	36.120147
Relative permittivity (imaginary part)	16.210214
Conductivity (S/m)	4.902154
Variation (%)	-4.610000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=4mm dy=4mm dz=2mm,Complete
Phantom	Validation plane
Device Position	Body Back
Band	IEEE 802.11ac ISM

SURFACE SAR

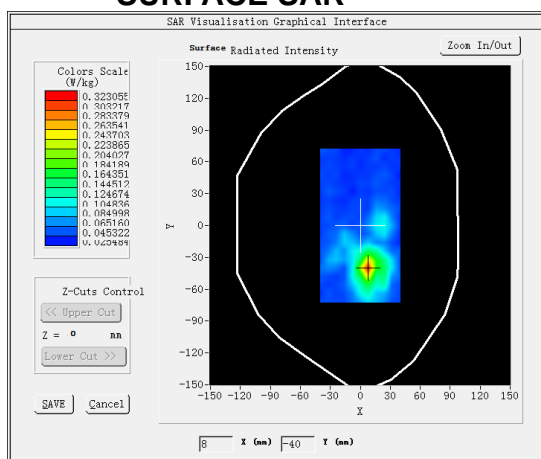


VOLUME SAR

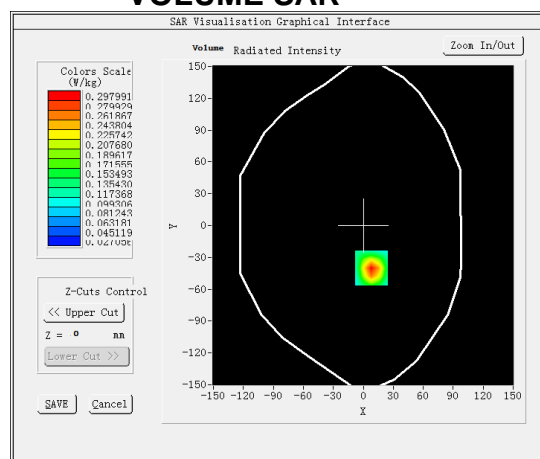


Maximum location: X=8.00, Y=-40.00

SAR Peak: 0.40 W/kg


SAR 10g (W/Kg)	0.113558
SAR 1g (W/Kg)	0.213475

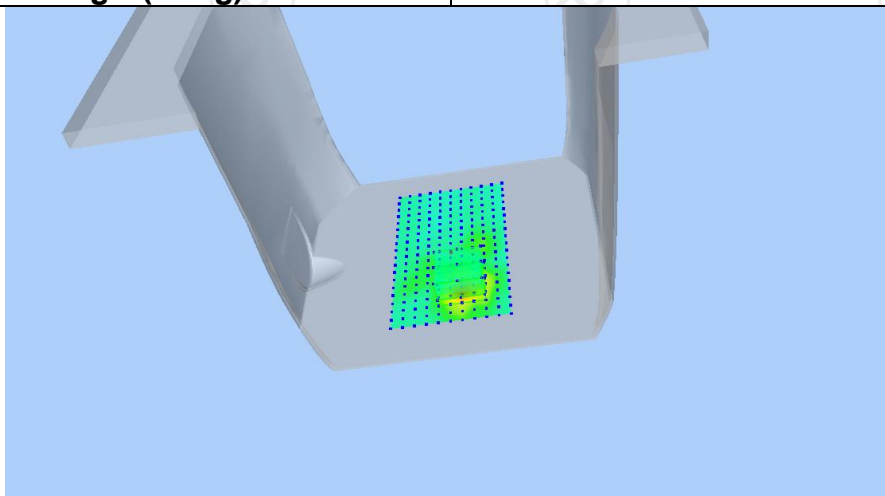

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.3882	0.2121	0.1125	0.0512	0.0312

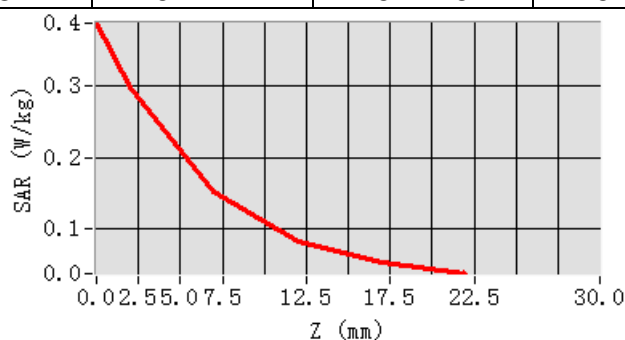

Hot spot position

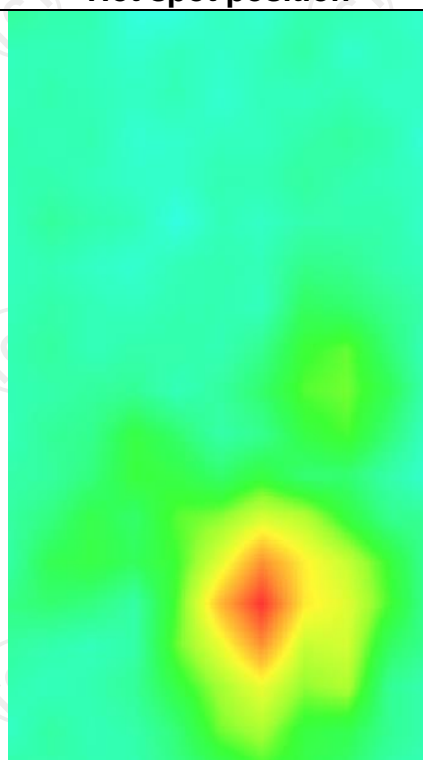

5.6G WLAN


MEASUREMENT 1

SAR (Channel 140):


Date: 03/03/2025

Frequency (MHz)	5700.000000
Relative permittivity (real part)	34.812541
Relative permittivity (imaginary part)	16.391254
Conductivity (S/m)	5.040571
Variation (%)	-2.030000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM

SURFACE SAR

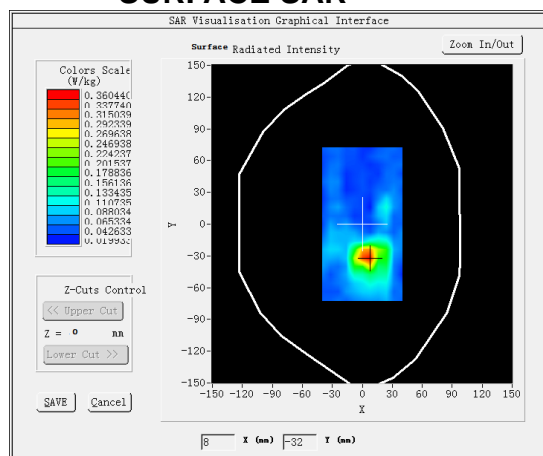


VOLUME SAR

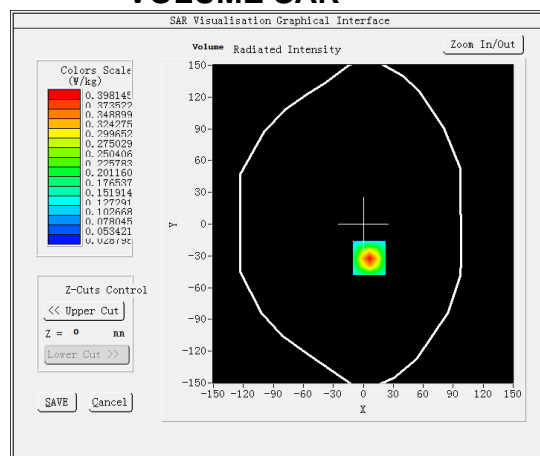


Maximum location: X=6.00, Y=-32.00

SAR Peak: 0.54W/kg


SAR 10g (W/Kg)	0.148210
SAR 1g (W/Kg)	0.278293

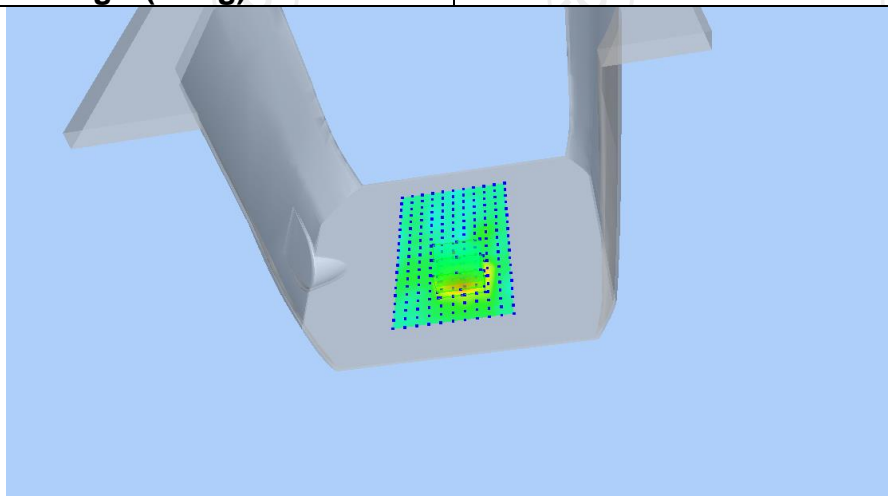

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.5365	0.2715	0.1615	0.1062	0.0648

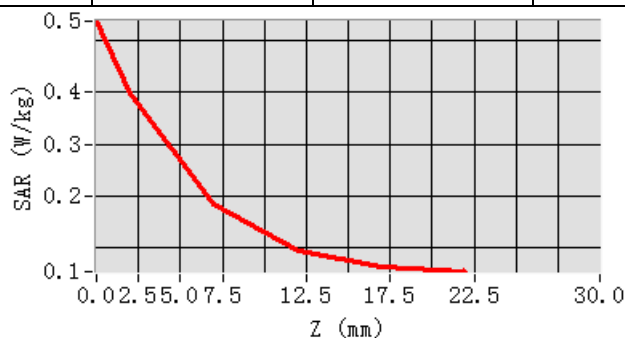

Hot spot position

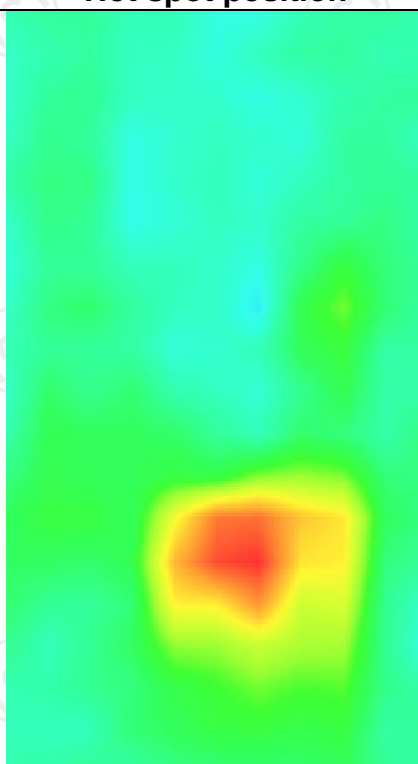

5.8G WLAN


MEASUREMENT 1

SAR (Channel 149):


Date: 03/03/2025

Frequency (MHz)	5745.000000
Relative permittivity (real part)	34.691254
Relative permittivity (imaginary part)	16.421024
Conductivity (S/m)	5.230157
Variation (%)	-1.690000
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	7x7x12,dx=4mm dy=4mm z=2mm,Complete
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM

SURFACE SAR

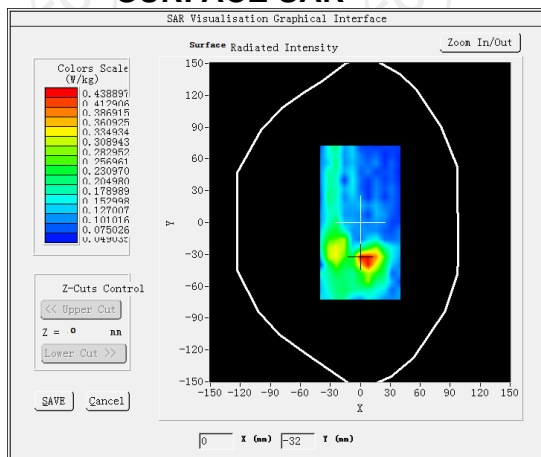


VOLUME SAR

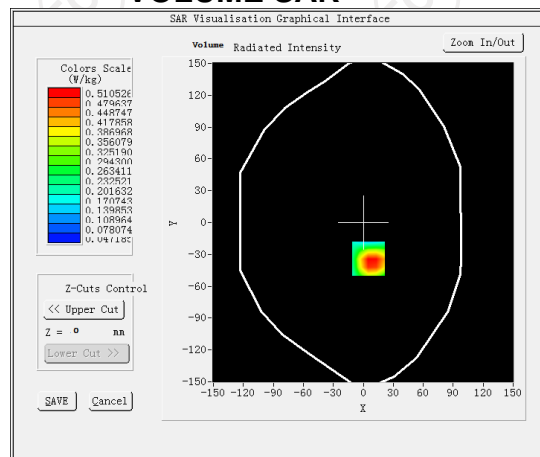


Maximum location: X=5.00, Y=-34.00

SAR Peak: 0.75 W/kg


SAR 10g (W/Kg)	0.200889
SAR 1g (W/Kg)	0.375361

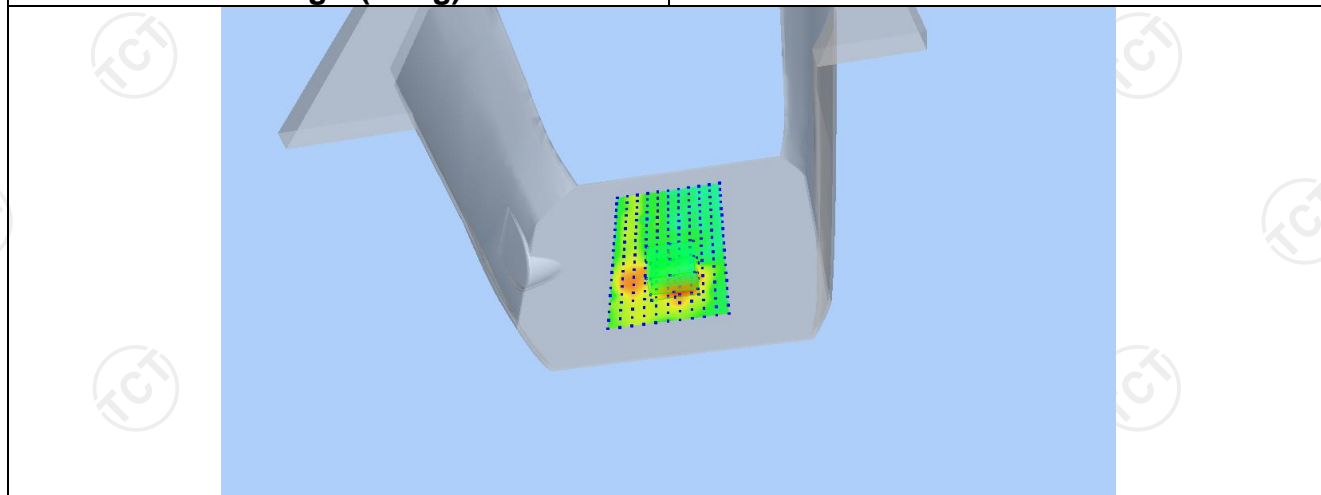



Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.6808	0.3525	0.1758	0.1056	0.0913

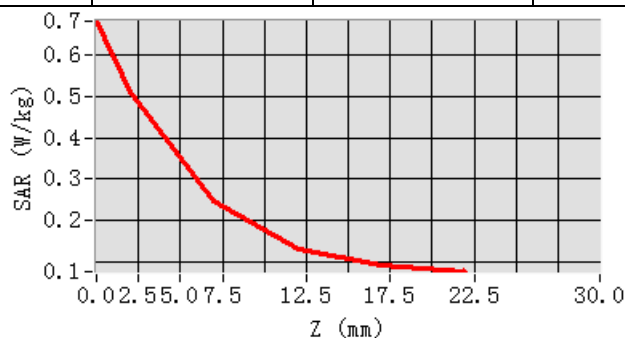

Hot spot position

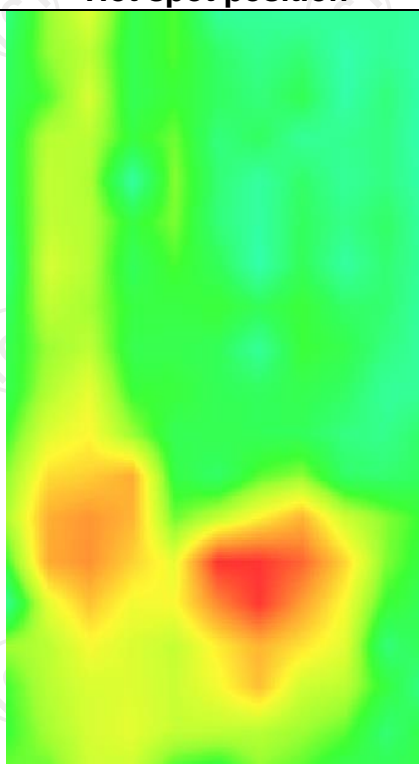

Appendix A: EUT Photos

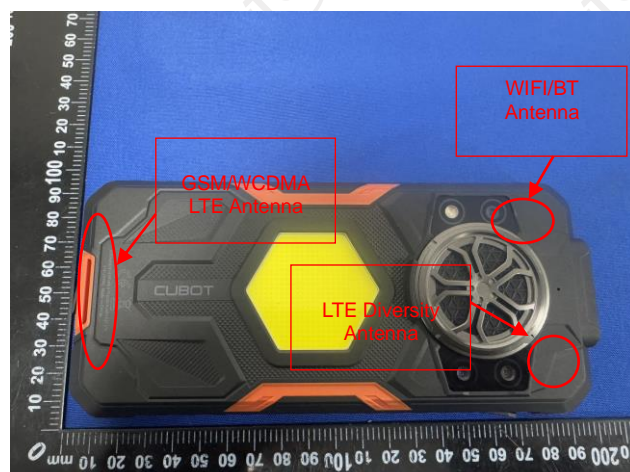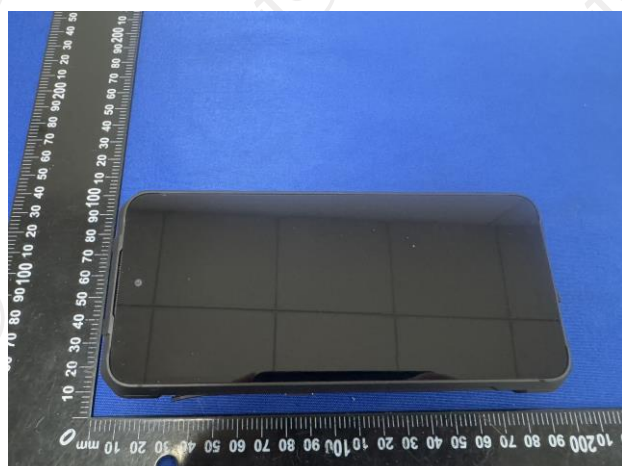


Note:

1. Diversity antenna is used to improve the acceptance of the main antenna. It does not have a transmitter function.

Liquid Setup Photos




The Body Liquid of 900MHz (15.9 cm)

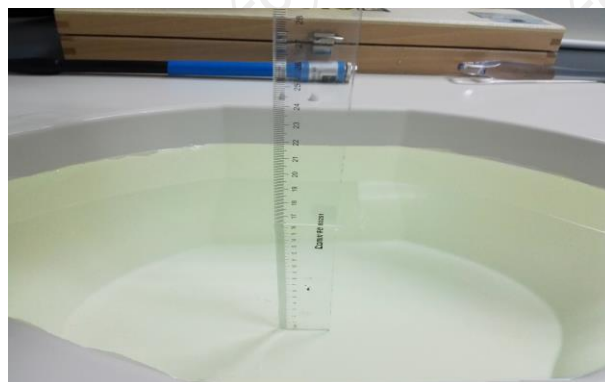

The Body Liquid of 1800MHz (16.3cm)




The Body Liquid of 2000MHz (16.5cm)

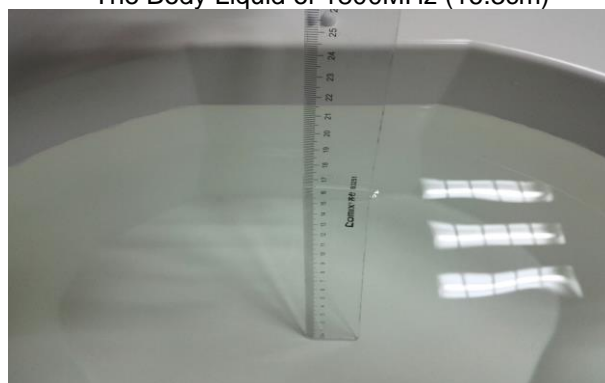


The Body Liquid 2450MHz (16.4cm)




The Body Liquid of 2600MHz (16.6cm)

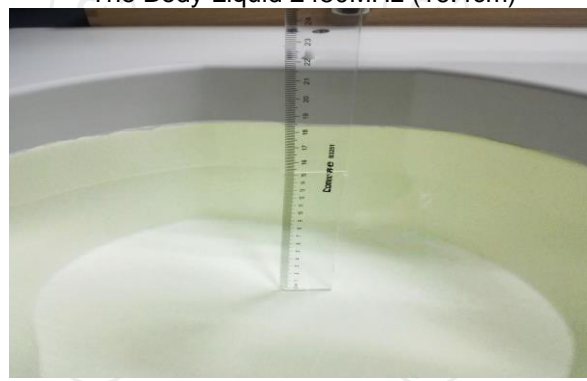


The Body Liquid of 5000-6000MHz (15.2 cm)

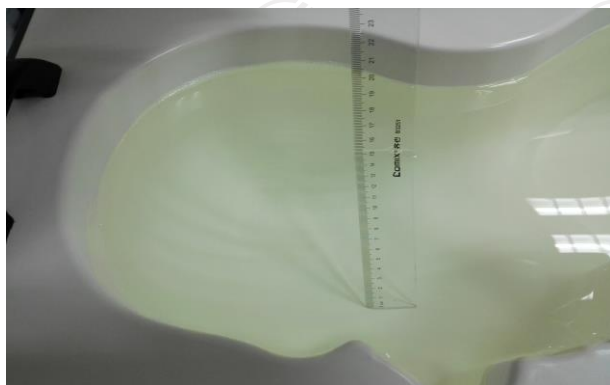


The Head Liquid of 900MHz (15.2cm)

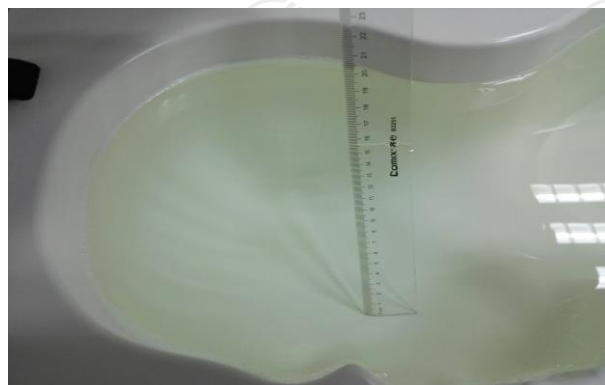


The Head Liquid of 1800MHz (15.6cm)

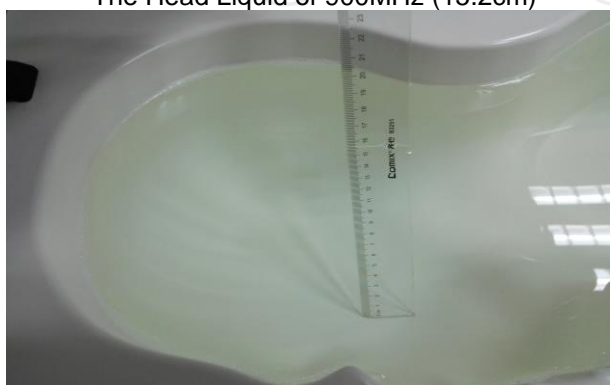


The Head Liquid of 2000MHz (15.5cm)

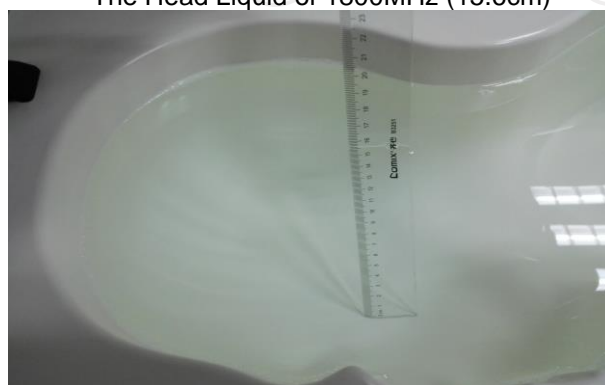

The Head Liquid of 2450MHz (15.7cm)

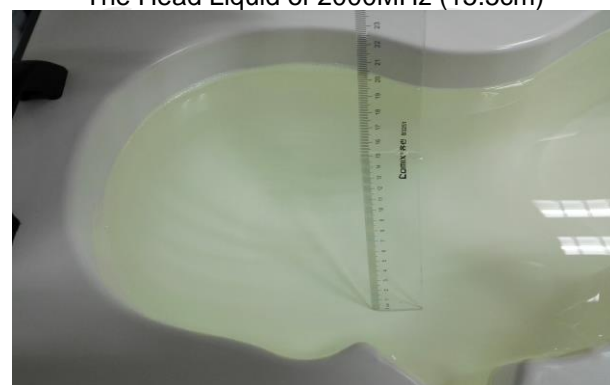

The Head Liquid of 5000-6000MHz (15.3cm)

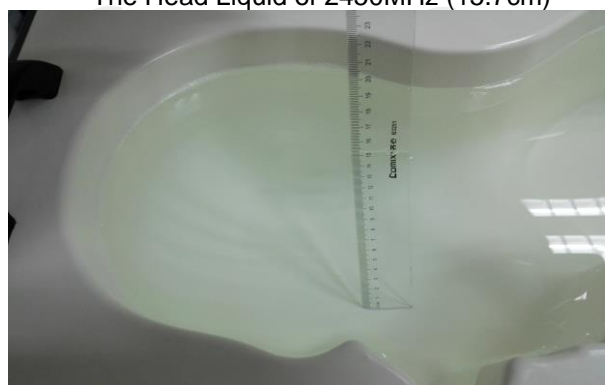


The Head Liquid of 2600MHz (15.1cm)


Appendix B: Test Setup Photos




Right Cheek

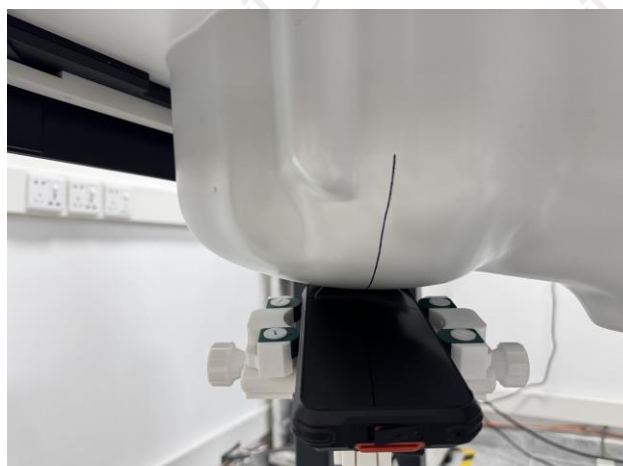


Right Tilted

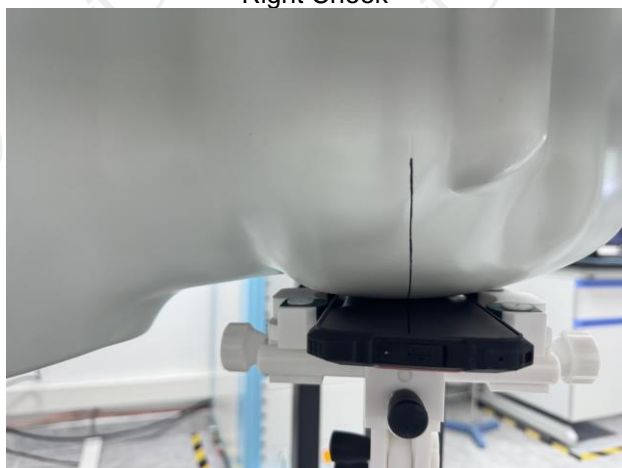


Left Cheek

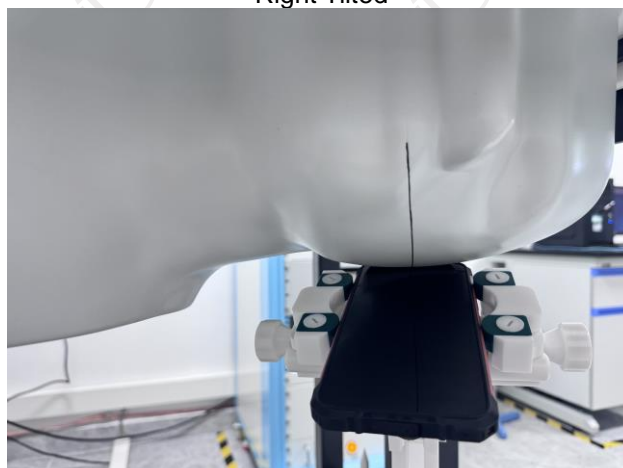

Left Tilted

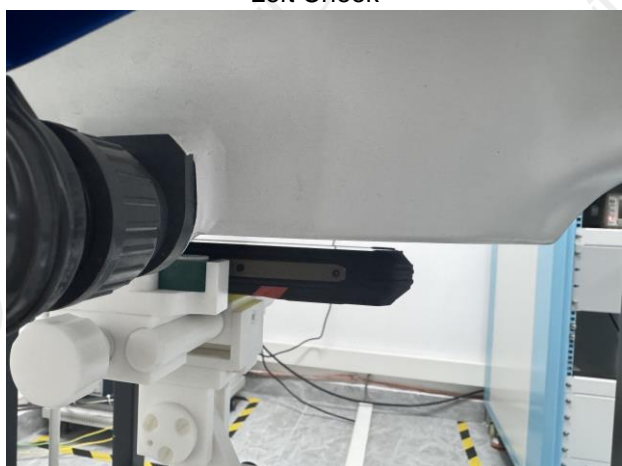

Body worn – Front(5 mm)

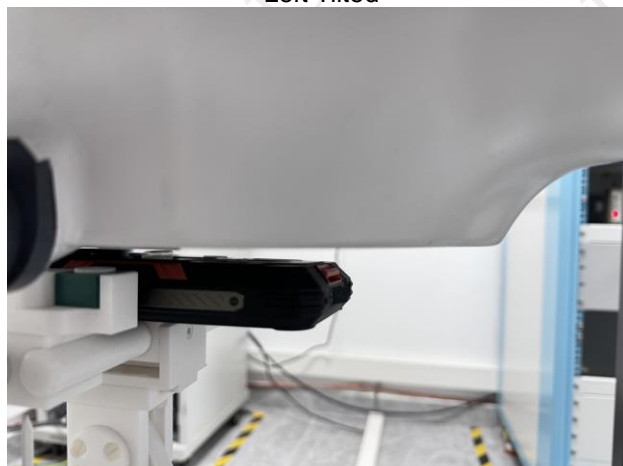

Body worn – Back(5 mm)



Body worn – Left(5 mm)




Body worn – Right(5 mm)



Body worn – Top(5 mm)



Body worn – Bottom(5 mm)

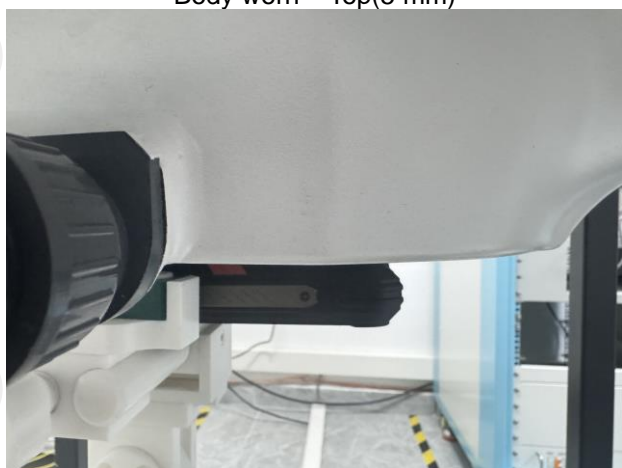

Wrist Worn –Back (0 mm)

Appendix C: Probe Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref : ACR.180.7.22.BES.B

SHENZHEN TCT TESTING TECHNOLOGY CO.,LTD
2101 & 2201, ZHENCHANG FACTORY RENSHAN INDUSTRIAL
ZONE, FUHAI SUBDISTRICT, BAO'AN DISTRICT SHENZHEN,
GUANGDONG, CHINA

MVG COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 25/22 EPG0375

Calibrated at MVG

Z.I. de la pointe du diable

Technopôle Brest Iroise – 295 avenue Alexis de Rochon
29280 PLOUZANE - FRANCE

Calibration date: 06/29/2024



Accreditations #2-6789
Scope available on www.cofrac.fr

The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

	Name	Function	Date	Signature
Prepared by :	Jérôme Le Gall	Measurement Responsible	6/30/2024	
Checked & approved by:	Jérôme Luc	Technical Manager	6/30/2024	
Authorized by:	Yann Toutain	Laboratory Director	6/30/2024	

	Customer Name
Distribution :	Shenzhen TCT Testing Technology Co.,Ltd

Issue	Name	Date	Modifications
A	Jérôme Le Gall	6/30/2024	Initial release



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

TABLE OF CONTENTS

1	Device Under Test	4
2	Product Description	4
2.1	General Information	4
3	Measurement Method	4
3.1	Linearity	4
3.2	Sensitivity	4
3.3	Lower Detection Limit	5
3.4	Isotropy	5
3.1	Boundary Effect	5
4	Measurement Uncertainty	6
5	Calibration Measurement Results	6
5.1	Sensitivity in air	6
5.2	Linearity	7
5.3	Sensitivity in liquid	8
5.4	Isotropy	9
6	List of Equipment	10



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

1 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Manufacturer	MVG
Model	SSE2
Serial Number	SN 25/22 EPG0375
Product Condition (new / used)	New
Frequency Range of Probe	0.15 GHz-6GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.197 MΩ Dipole 2: R2=0.230 MΩ Dipole 3: R3=0.208 MΩ

2 PRODUCT DESCRIPTION**2.1 GENERAL INFORMATION**

MVG's COMOSAR E field Probes are built in accordance to the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards.

**Figure 1 – MVG COMOSAR Dosimetric E field Probe**

Probe Length	330 mm
Length of Individual Dipoles	2 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	2.5 mm
Distance between dipoles / probe extremity	1 mm

3 MEASUREMENT METHOD

The IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

Page: 4/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 to 360 degrees in 15-degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°–180°) in 15° increments. At each step the probe is rotated about its axis (0°–360°).

3.1 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

The boundary effect uncertainty can be estimated according to the following uncertainty approximation formula based on linear and exponential extrapolations between the surface and $d_{be} + d_{step}$ along lines that are approximately normal to the surface:

$$SAR_{uncertainty} [\%] = \Delta SAR_{be} \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{(e^{-d_{be}/\delta})}{\delta/2} \quad \text{for } (d_{be} + d_{step}) < 10 \text{ mm}$$

where

$SAR_{uncertainty}$	is the uncertainty in percent of the probe boundary effect
d_{be}	is the distance between the surface and the closest <i>zoom-scan</i> measurement point, in millimetre
Δ_{step}	is the separation distance between the first and second measurement points that are closest to the phantom surface, in millimetre, assuming the boundary effect at the second location is negligible
δ	is the minimum penetration depth in millimetres of the head tissue-equivalent liquids defined in this standard, i.e., $\delta \approx 14$ mm at 3 GHz;
ΔSAR_{be}	in percent of SAR is the deviation between the measured SAR value, at the distance d_{be} from the boundary, and the analytical SAR value.

The measured worst case boundary effect SAR uncertainty[%] for scanning distances larger than 4mm is 1.0% Limit ,2%).



4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEC/IEEE 62209-1528 and FCC KDB865664 D01 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide					
ERROR SOURCES	Uncertainty value (%)	Probability Distribution	Divisor	ci	Standard Uncertainty (%)
Expanded uncertainty 95 % confidence level $k = 2$					14 %

5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liquid Temperature	20 +/- 1 °C
Lab Temperature	20 +/- 1 °C
Lab Humidity	30-70 %

5.1 SENSITIVITY IN AIR

Normx dipole 1 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normy dipole 2 ($\mu\text{V}/(\text{V}/\text{m})^2$)	Normz dipole 3 ($\mu\text{V}/(\text{V}/\text{m})^2$)
0.64	0.53	0.44

DCP dipole 1 (mV)	DCP dipole 2 (mV)	DCP dipole 3 (mV)
106	108	109

Calibration curves $e_i=f(V)$ ($i=1,2,3$) allow to obtain E-field value using the formula:


$$E = \sqrt{E_1^2 + E_2^2 + E_3^2}$$



COMOSAR E-FIELD PROBE CALIBRATION REPORT


Ref: ACR.180.7.22.BES.B

Calibration curves

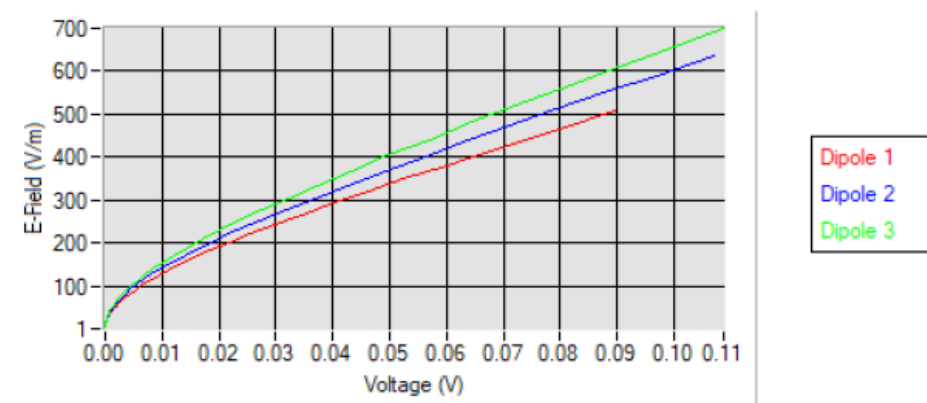

5.2 LINEARITY

Linearity

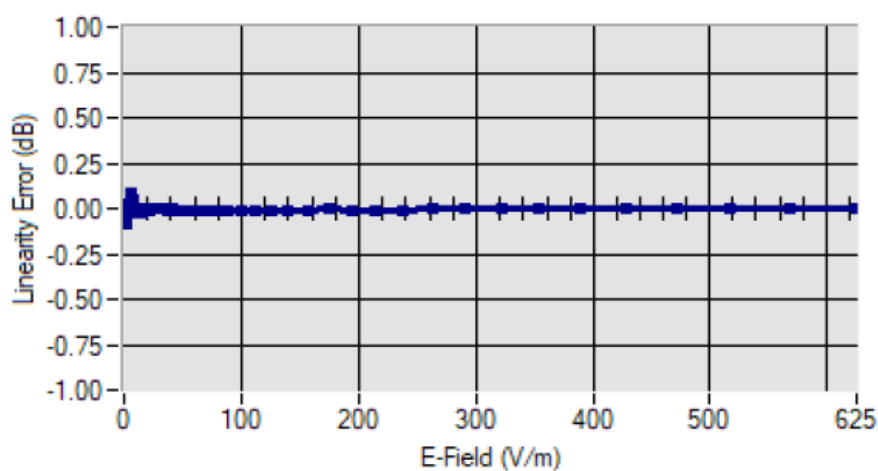

Linearity: +/- 1.94% (+/- 0.09dB)

Page: 7/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

5.3 SENSITIVITY IN LIQUID

Liquid	Frequency (MHz +/- 100MHz)	ConvF
HL750	750	2.44
BL750	750	2.47
HL900	900	2.55
BL900	900	2.64
HL1800	1800	2.99
BL1800	1800	3.05
HL2000	2000	3.33
BL2000	2000	3.47
HL2450	2450	3.70
BL2450	2450	3.83
HL2600	2600	3.43
BL2600	2600	3.53
HL3500	3500	3.22
BL3500	3500	3.09
HL3700	3700	3.45
BL3700	3700	3.15
HL4600	4600	3.30
BL4600	4600	3.70
HL5200	5200	2.48
BL5200	5200	2.39
HL5600	5600	2.91
BL5600	5600	2.77
HL5800	5800	2.63
BL5800	5800	2.56

LOWER DETECTION LIMIT: 7mW/kg

Page: 8/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 191 of 273




COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

5.4 ISOTROPY

HL1800 MHz

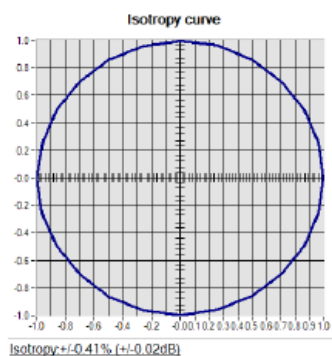



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
CALIPROBE Test Bench	Version 2	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rohde & Schwarz ZVM	100203	08/2024	08/2027
Network Analyzer	Agilent 8753ES	MY40003210	10/2023	10/2026
Network Analyzer – Calibration kit	HP 85033D	3423A08186	06/2021	06/2027
Multimeter	Keithley 2000	1160271	02/2023	02/2026
Signal Generator	Rohde & Schwarz SMB	106589	03/2022	03/2025
Amplifier	MVG	MODU-023-C-0002	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	NI-USB 5680	170100013	06/2024	06/2027
Power Meter	Rohde & Schwarz NRVD	832839-056	11/2023	11/2026
Directional Coupler	Krytar 158020	131467	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	MVG	SN 32/16 WG4_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_0G900_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG6_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG8_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800B_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_1G800H_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG10_1	Validated. No cal required.	Validated. No cal required.
Liquid transition	MVG	SN 32/16 WGLIQ_3G500_1	Validated. No cal required.	Validated. No cal required.
Waveguide	MVG	SN 32/16 WG12_1	Validated. No cal required.	Validated. No cal required.

Page: 10/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.180.7.22.BES.B

Liquid transition	MVG	SN 32/16 WGLIQ_5G000_1	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Testo 184 H1	44225320	06/2024	06/2027

Page: 11/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR Probe vK

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 194 of 273

Appendix D: Dipole Calibration Report

SID750



SAR Reference Dipole Calibration Report

Ref : ACR.156.3.15.SATU.A

SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

**2101&2201, ZHENCHANG FACTORY, RENSHAN
INDUSTRIAL ZONE, FUHAI SUBDISTRICT, BAOAN
DISTRICT, SHENZHEN, GUANGDONG, CHINA**

COMOSAR REFERENCE DIPOLE

FREQUENCY: 750 MHZ

SERIAL NO.: SN 16/15 DIP 0G750-368

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	
Checked by :	Jérôme LUC	Product Manager	06/05/2024	
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	

	Customer Name
Distribution :	SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

Issue	Date	Modifications
A	06/05/2024	Initial release

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 196 of 273



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 750 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID750
Serial Number	SN 16/15 DIP 0G750-368
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

Page 198 of 273



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SAT.U.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

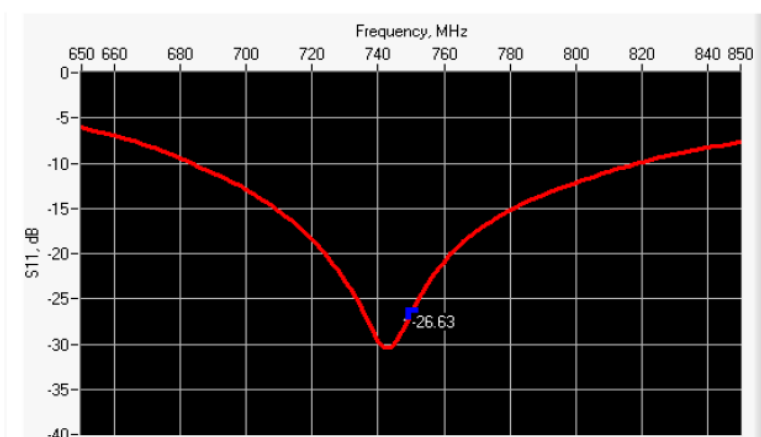

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-26.63	-20	54.1 Ω + 1.4 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

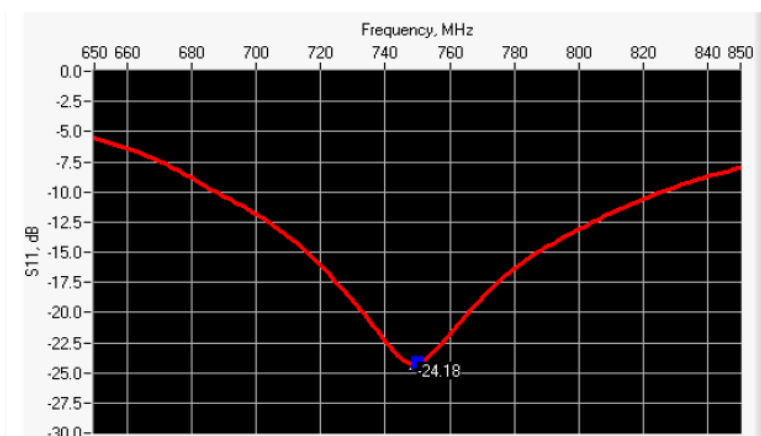

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
750	-24.18	-20	52.4 Ω + 5.8 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.	PASS	100.0 ±1 %.	PASS	6.35 ±1 %.	PASS
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %	PASS	0.89 ±5 %	PASS
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_{ps}' : 41.8 σ : 0.90
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49	8.31 (0.73)	5.55	5.71 (0.54)
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

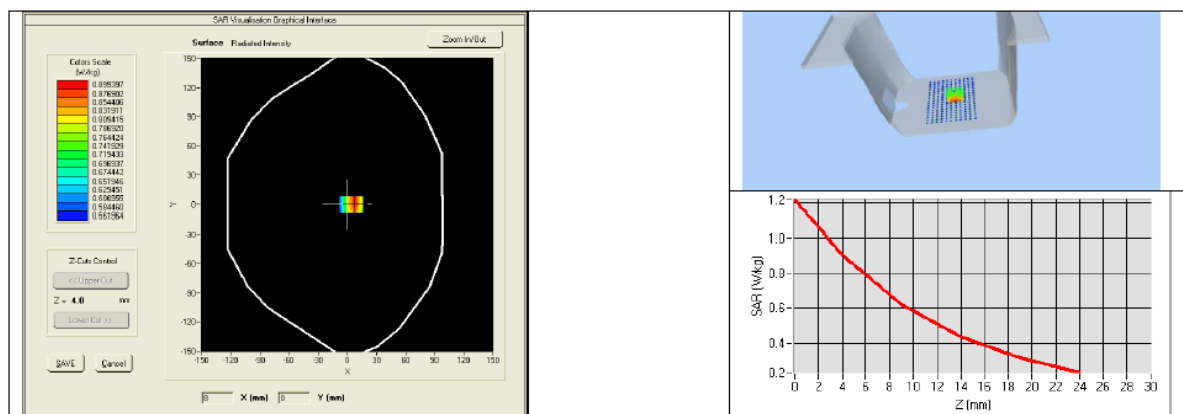

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 \pm 5 %		0.80 \pm 5 %	
300	58.2 \pm 5 %		0.92 \pm 5 %	
450	56.7 \pm 5 %		0.94 \pm 5 %	
750	55.5 \pm 5 %	PASS	0.96 \pm 5 %	PASS
835	55.2 \pm 5 %		0.97 \pm 5 %	
900	55.0 \pm 5 %		1.05 \pm 5 %	
915	55.0 \pm 5 %		1.06 \pm 5 %	
1450	54.0 \pm 5 %		1.30 \pm 5 %	
1610	53.8 \pm 5 %		1.40 \pm 5 %	
1800	53.3 \pm 5 %		1.52 \pm 5 %	
1900	53.3 \pm 5 %		1.52 \pm 5 %	
2000	53.3 \pm 5 %		1.52 \pm 5 %	
2100	53.2 \pm 5 %		1.62 \pm 5 %	
2450	52.7 \pm 5 %		1.95 \pm 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.3.15.SATUA

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: ϵ_{ps} : 56.3 σ : 0.98
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	750 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
750	8.46 (0.77)	5.81 (0.45)

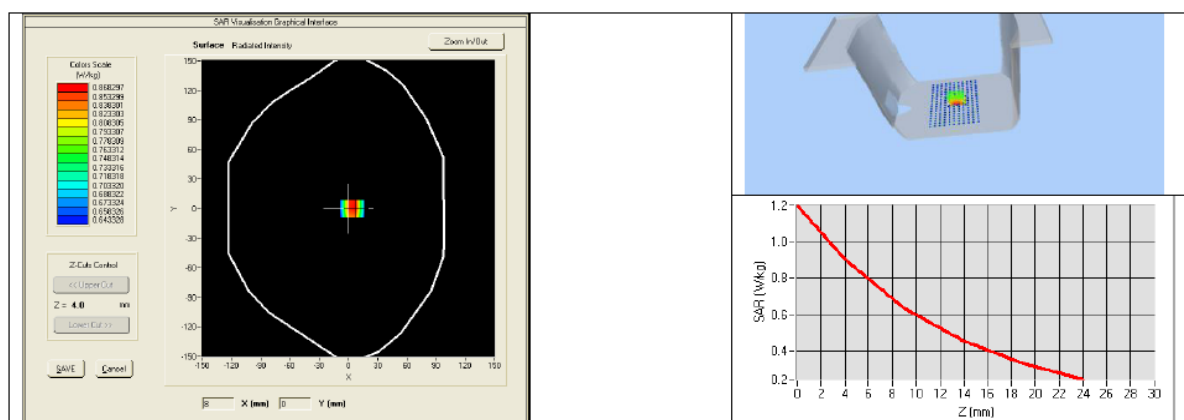

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.3.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Calipers	Carrera	CALIPER-01	02/2024	02/2027
Reference Probe	MVG	EPG122 SN 18/11	02/2025	02/2026
Multimeter	Keithley 2000	1188656	02/2025	02/2026
Signal Generator	Agilent E4438C	MY49070581	02/2024	02/2027
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	02/2024	02/2027
Power Sensor	HP ECP-E26A	US37181460	02/2024	02/2027
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	02/2024	02/2027

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

Page 205 of 273



SAR Reference Dipole Calibration Report

Ref : ACR.156.5.15.SATU.A

SHENZHEN TONGCE TESTING LAB

2101&2201, ZHENCHANG FACTORY, RENSHAN INDUSTRIAL ZONE,
FUHAI SUBDISTRICT, BAOAN DISTRICT, SHENZHEN,
GUANGDONG, 518103, PEOPLES REPUBLIC OF CHINA

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 900 MHZ

SERIAL NO.: SN 16/15 DIP 0G900-370

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2021

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.5.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2021	
Checked by :	Jérôme LUC	Product Manager	06/05/2021	
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2021	

	Customer Name
Distribution :	SHENZHEN TONGCE TESTING LAB

Issue	Date	Modifications
A	06/05/2021	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.172.5.15.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.172.5.15.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 900 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID900
Serial Number	SN 16/15 DIP 0G900-370
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION**3.1 GENERAL INFORMATION**

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.5.15.SATU.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

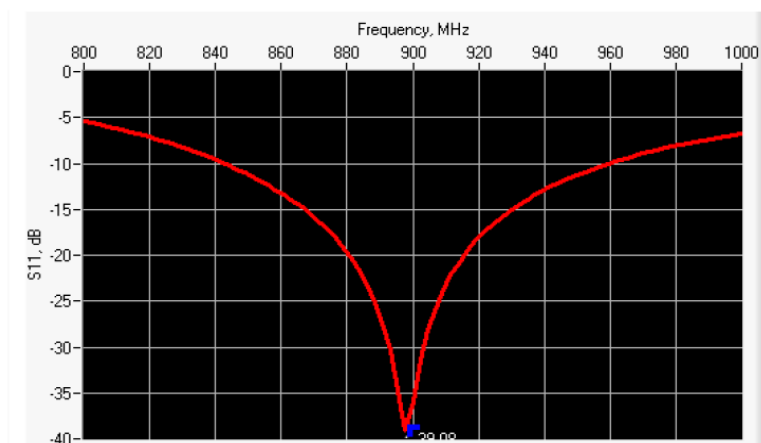

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
900	-39.08	-20	51.7 Ω + 0.6 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

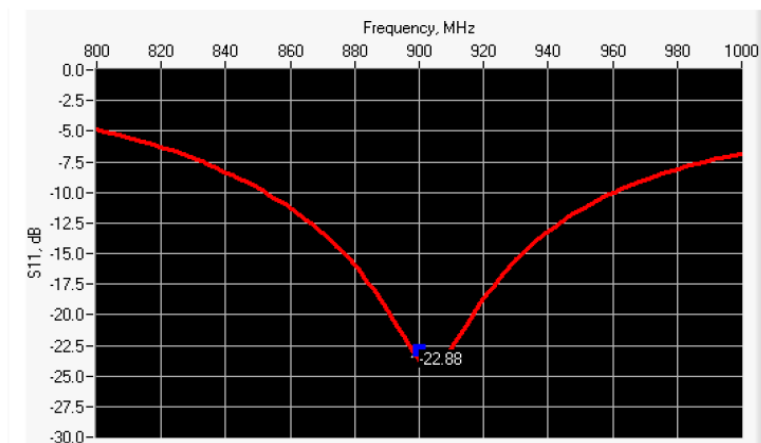

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
900	-22.88	-20	53.2 Ω + 6.2 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.5.15.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.	PASS	83.3 ±1 %.	PASS	3.6 ±1 %.	PASS
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %	PASS	0.97 ±5 %	PASS
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.5.15.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_p : 42.1 σ : 0.98
Distance between dipole center and liquid	15.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	900 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9	10.63 (1.14)	6.99	6.81 (0.64)
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.5.15.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

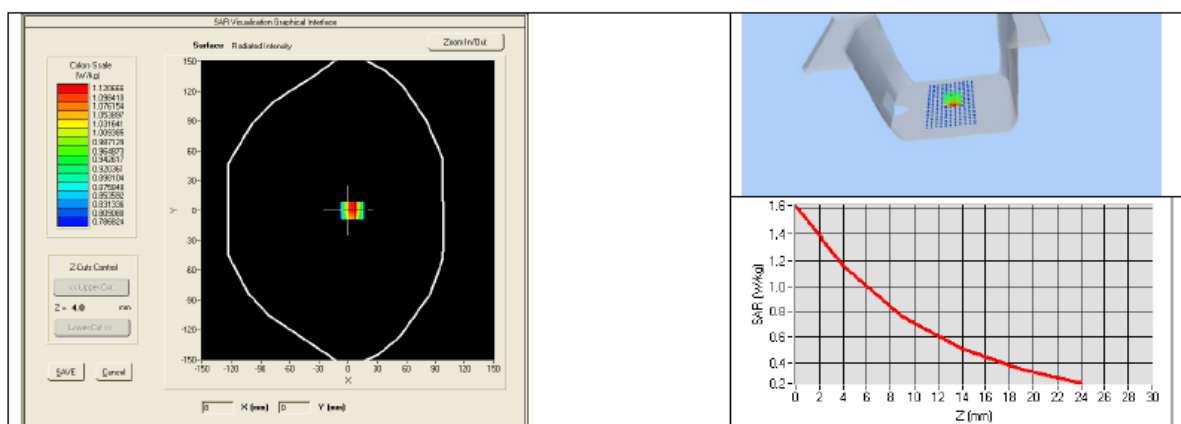

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 \pm 5 %		0.80 \pm 5 %	
300	58.2 \pm 5 %		0.92 \pm 5 %	
450	56.7 \pm 5 %		0.94 \pm 5 %	
750	55.5 \pm 5 %		0.96 \pm 5 %	
835	55.2 \pm 5 %		0.97 \pm 5 %	
900	55.0 \pm 5 %	PASS	1.05 \pm 5 %	PASS
915	55.0 \pm 5 %		1.06 \pm 5 %	
1450	54.0 \pm 5 %		1.30 \pm 5 %	
1610	53.8 \pm 5 %		1.40 \pm 5 %	
1800	53.3 \pm 5 %		1.52 \pm 5 %	
1900	53.3 \pm 5 %		1.52 \pm 5 %	
2000	53.3 \pm 5 %		1.52 \pm 5 %	
2100	53.2 \pm 5 %		1.62 \pm 5 %	
2450	52.7 \pm 5 %		1.95 \pm 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.5.15.SATU.A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: ϵ_{ps} : 56.4 σ : 1.08
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8mm/dz=5mm
Frequency	900 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
900	10.84(1.16)	6.86 (0.73)

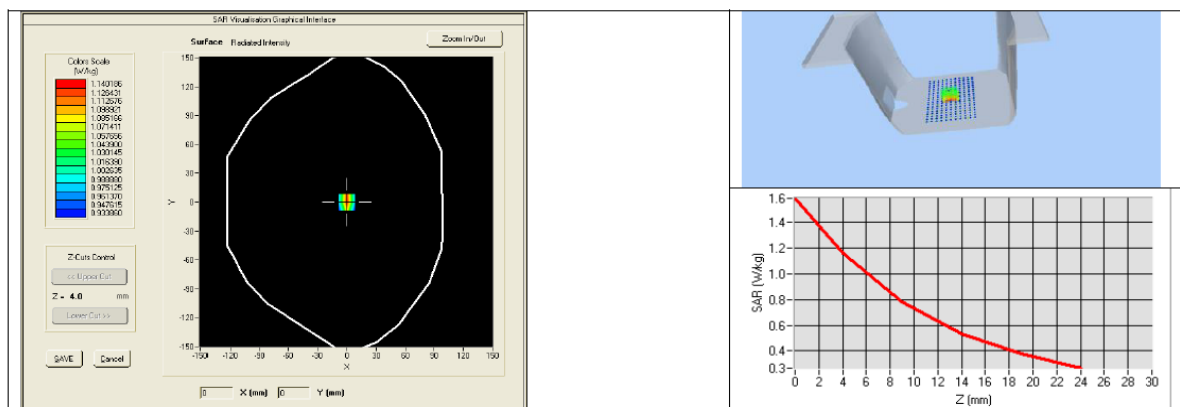

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.5.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Calipers	Carrera	CALIPER-01	02/2024	02/2027
Reference Probe	MVG	EPG122 SN 18/11	02/2025	02/2026
Multimeter	Keithley 2000	1188656	02/2024	02/2027
Signal Generator	Agilent E4438C	MY49070581	02/2024	02/2027
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	02/2024	02/2027
Power Sensor	HP ECP-E26A	US37181460	02/2024	02/2027
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	02/2024	02/2027

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR Reference Dipole Calibration Report

Ref : ACR.156.6.15.SATU.A

SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

2101&2201, ZHENCHANG FACTORY, RENSHAN INDUSTRIAL
ZONE, FUHAI SUBDISTRICT, BAOAN DISTRICT, SHENZHEN,
GUANGDONG, CHINA

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 1800 MHZ

SERIAL NO.: SN 16/15 DIP 1G800-371

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	<i>JS</i>
Checked by :	Jérôme LUC	Product Manager	06/05/2024	<i>JS</i>
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	<i>Kim Rutkowski</i>

	Customer Name
Distribution :	SSHENZHEN TCT TESTING TECHNOLOGY CO., LTD

Issue	Date	Modifications
A	06/05/2024	Initial release

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 218 of 273



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 1800 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID1800
Serial Number	SN 16/15 DIP 1G800-371
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

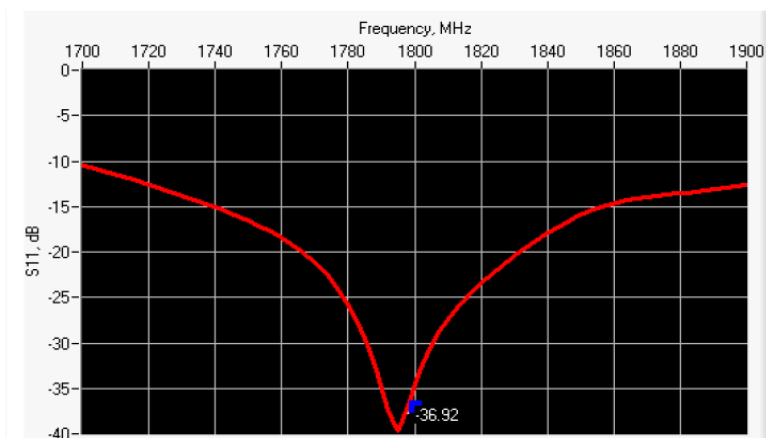

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1800	-36.92	-20	48.3 Ω - 0.5 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

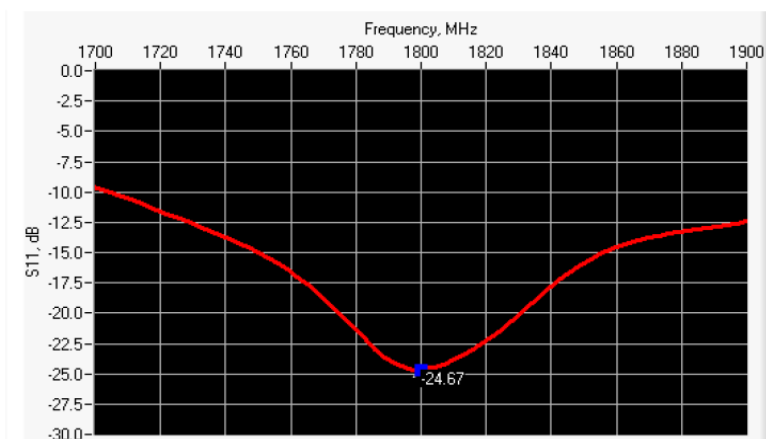

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
1800	-24.67	-20	47.6 Ω - 5.1 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.	PASS	41.7 ±1 %.	PASS	3.6 ±1 %.	PASS
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ε _r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

1800	40.0 ±5 %	PASS	1.40 ±5 %	PASS
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: $\epsilon_s' : 41.8$ $\sigma : 1.38$
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	1800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4	37.67(3.60)	20.1	20.23 (2.15)

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

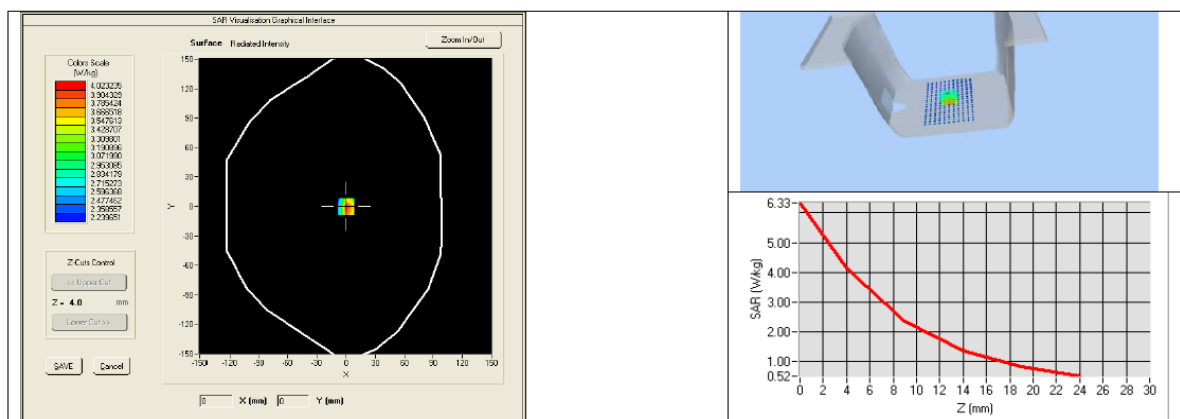

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 \pm 5 %		0.80 \pm 5 %	
300	58.2 \pm 5 %		0.92 \pm 5 %	
450	56.7 \pm 5 %		0.94 \pm 5 %	
750	55.5 \pm 5 %		0.96 \pm 5 %	
835	55.2 \pm 5 %		0.97 \pm 5 %	
900	55.0 \pm 5 %		1.05 \pm 5 %	
915	55.0 \pm 5 %		1.06 \pm 5 %	
1450	54.0 \pm 5 %		1.30 \pm 5 %	
1610	53.8 \pm 5 %		1.40 \pm 5 %	
1800	53.3 \pm 5 %	PASS	1.52 \pm 5 %	PASS
1900	53.3 \pm 5 %		1.52 \pm 5 %	
2000	53.3 \pm 5 %		1.52 \pm 5 %	
2100	53.2 \pm 5 %		1.62 \pm 5 %	
2450	52.7 \pm 5 %		1.95 \pm 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.6.15.SATU.A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: $\epsilon_{ps}' : 53.0$ $\sigma : 1.52$
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=8mm/dy=8mm/dz=5mm$
Frequency	1800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
1800	37.69 (3.65)	20.57 (2.00)

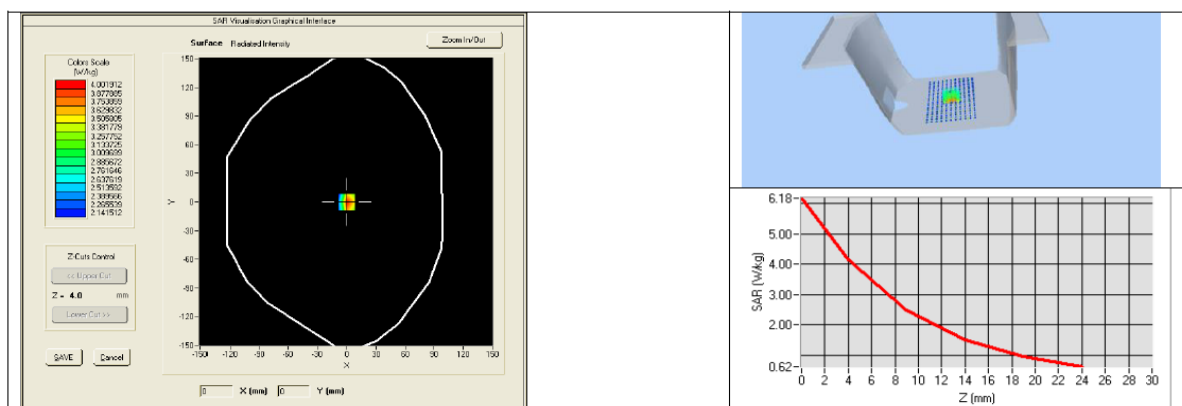

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.6.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Calipers	Carrera	CALIPER-01	02/2024	02/2027
Reference Probe	MVG	EPG122 SN 18/11	02/2025	02/2026
Multimeter	Keithley 2000	1188656	02/2024	02/2027
Signal Generator	Agilent E4438C	MY49070581	02/2024	02/2027
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	02/2024	02/2027
Power Sensor	HP ECP-E26A	US37181460	02/2024	02/2027
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	02/2024	02/2027

Page: 11/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 227 of 273



SAR Reference Dipole Calibration Report

Ref : ACR.156.8.15.SATU.A

SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

2101&2201, ZHENCHANG FACTORY, RENSHAN INDUSTRIAL
FUHAI SUBDISTRICT, BAOAN DISTRICT, SHENZHEN,
GUANGDONG, CHINA

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 2000 MHZ

SERIAL NO.: SN 16/15 DIP 2G000-373

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	
Checked by :	Jérôme LUC	Product Manager	06/05/2024	
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	

	Customer Name
Distribution :	SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

Issue	Date	Modifications
A	06/05/2024	Initial release

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 229 of 273



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to
be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2000 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2000
Serial Number	SN 16/15 DIP 2G000-373
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION**3.1 GENERAL INFORMATION**

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000 MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

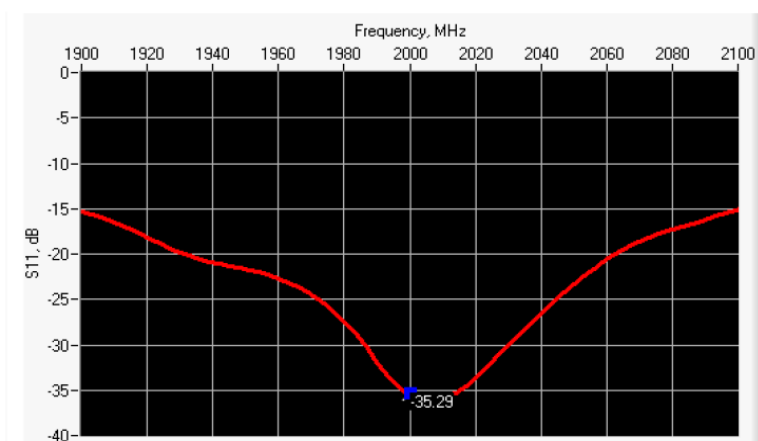

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2000	-35.29	-20	48.4 Ω - 0.6 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

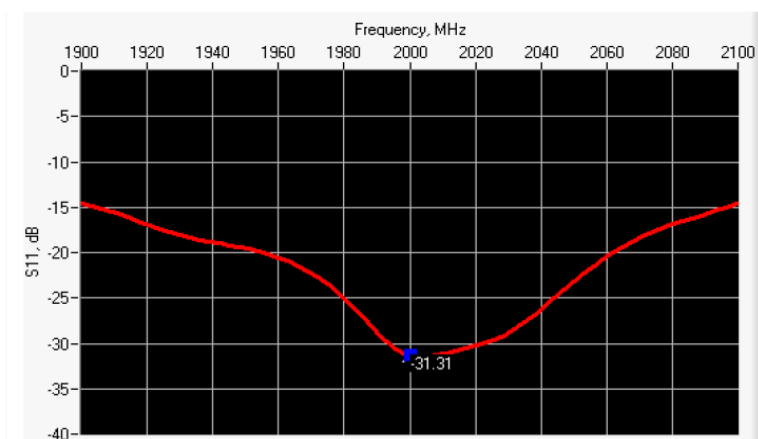

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2000	-31.31	-20	51.3 Ω + 2.2 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR156.8.15.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.	PASS	37.5 ±1 %.	PASS	3.6 ±1 %.	PASS
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %	PASS	1.40 ±5 %	PASS
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps' : 40.1 sigma: 1.43
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	2000 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1	42.16 (4.34)	21.1	21.18 (2.07)
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

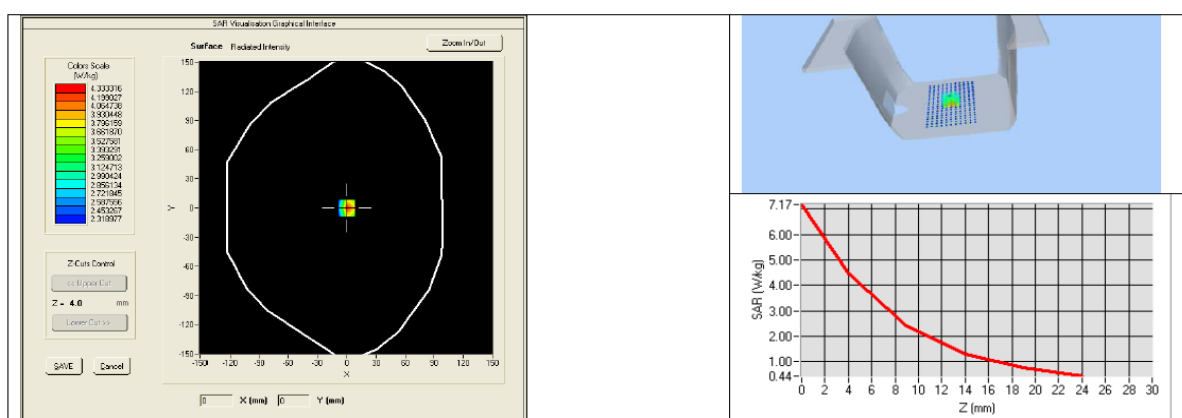

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 ± 5 %		0.80 ± 5 %	
300	58.2 ± 5 %		0.92 ± 5 %	
450	56.7 ± 5 %		0.94 ± 5 %	
750	55.5 ± 5 %		0.96 ± 5 %	
835	55.2 ± 5 %		0.97 ± 5 %	
900	55.0 ± 5 %		1.05 ± 5 %	
915	55.0 ± 5 %		1.06 ± 5 %	
1450	54.0 ± 5 %		1.30 ± 5 %	
1610	53.8 ± 5 %		1.40 ± 5 %	
1800	53.3 ± 5 %		1.52 ± 5 %	
1900	53.3 ± 5 %		1.52 ± 5 %	
2000	53.3 ± 5 %	PASS	1.52 ± 5 %	PASS
2100	53.2 ± 5 %		1.62 ± 5 %	
2450	52.7 ± 5 %		1.95 ± 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.8.15.SATU.A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: ϵ_{ps}' : 53.6 σ : 1.54
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	2000 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
2000	41.51 (4.13)	21.32 (2.19)

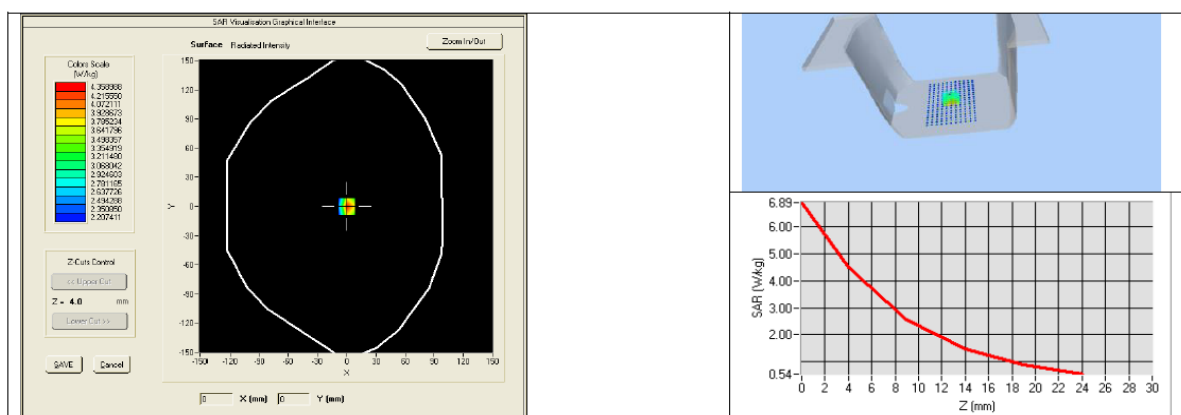

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.8.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Calipers	Carrera	CALIPER-01	02/2024	02/2027
Reference Probe	MVG	EPG122 SN 18/11	02/2025	02/2026
Multimeter	Keithley 2000	1188656	02/2024	02/2027
Signal Generator	Agilent E4438C	MY49070581	02/2024	02/2027
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	02/2024	02/2027
Power Sensor	HP ECP-E26A	US37181460	02/2024	02/2027
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	02/2024	02/2027



SAR Reference Dipole Calibration Report

Ref: ACR.156.9.15.SATU.A

SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

2101&2201, ZHENCHANG FACTORY, RENSHAN INDUSTRIAL
FUHAI SUBDISTRICT, BAOAN DISTRICT, SHENZHEN,
GUANGDONG, CHINA

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 2450 MHZ

SERIAL NO.: SN 16/15 DIP 2G450-374

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	
Checked by :	Jérôme LUC	Product Manager	06/05/2024	
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	

	Customer Name
Distribution :	SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

Issue	Date	Modifications
A	06/05/2024	Initial release



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty.....	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results.....	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11

Page: 3/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2450 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2450
Serial Number	SN 16/15 DIP 2G450-374
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole

Page: 4/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

Page 242 of 273



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %

Page: 5/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.9.15.SATU.A

10 g

20.1 %


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

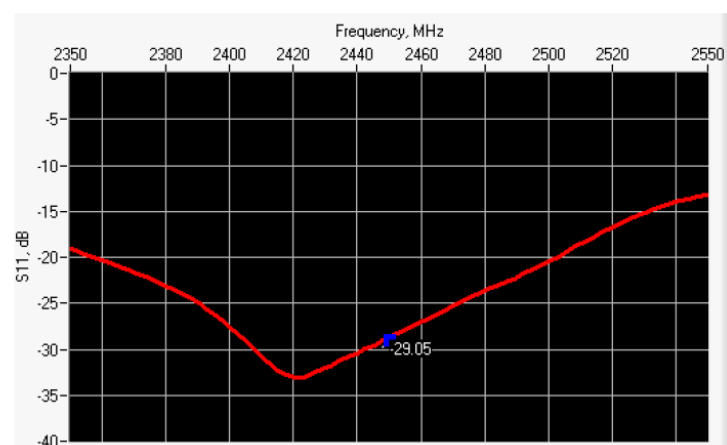

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-29.05	-20	46.7 Ω - 0.2 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

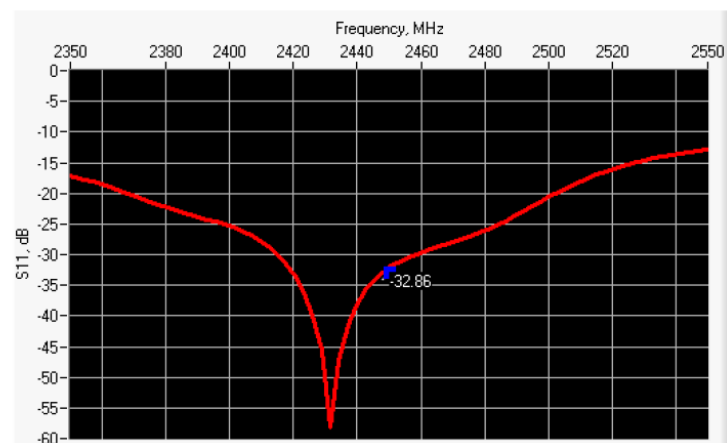

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2450	-32.86	-20	48.6 Ω - 1.9 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.	PASS	30.4 ±1 %.	PASS	3.6 ±1 %.	PASS
2600	48.5 ±1 %.		28.8 ±1 %.		3.6 ±1 %.	
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r)		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %	PASS	1.80 ±5 %	PASS
2600	39.0 ±5 %		1.96 ±5 %	
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_{ps}' : 38.3 σ : 1.80
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=5mm/dy=5mm/dz=5mm$
Frequency	2450 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4	53.26 (5.38)	24	24.15 (2.49)
2600	55.3		24.6	
3000	63.8		25.7	
3500	67.1		25	

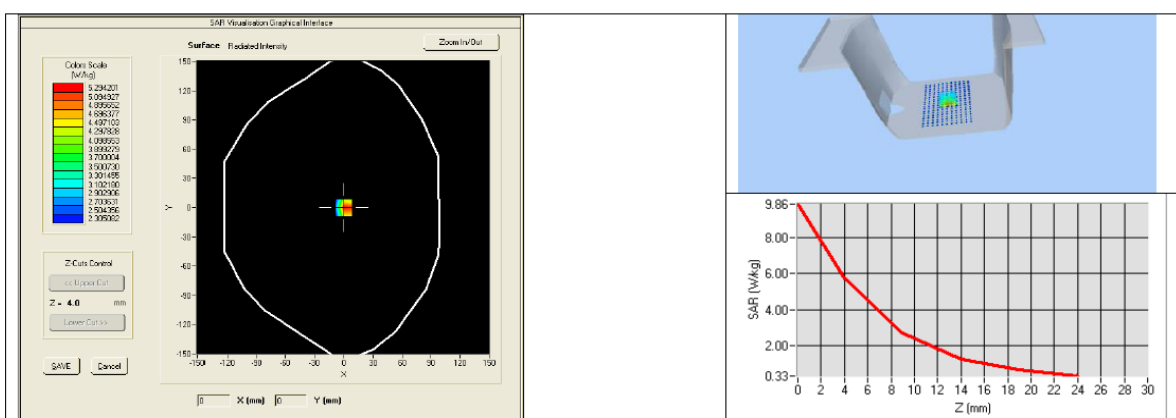

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 \pm 5 %		0.80 \pm 5 %	
300	58.2 \pm 5 %		0.92 \pm 5 %	
450	56.7 \pm 5 %		0.94 \pm 5 %	
750	55.5 \pm 5 %		0.96 \pm 5 %	
835	55.2 \pm 5 %		0.97 \pm 5 %	
900	55.0 \pm 5 %		1.05 \pm 5 %	
915	55.0 \pm 5 %		1.06 \pm 5 %	
1450	54.0 \pm 5 %		1.30 \pm 5 %	
1610	53.8 \pm 5 %		1.40 \pm 5 %	
1800	53.3 \pm 5 %		1.52 \pm 5 %	
1900	53.3 \pm 5 %		1.52 \pm 5 %	
2000	53.3 \pm 5 %		1.52 \pm 5 %	
2100	53.2 \pm 5 %		1.62 \pm 5 %	
2450	52.7 \pm 5 %	PASS	1.95 \pm 5 %	PASS

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.9.15.SATU.A

2600	52.5 ±5 %		2.16 ±5 %	
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps' : 52.7 sigma : 1.94
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	2450 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
2450	50.63 (5.01)	23.40 (2.37)

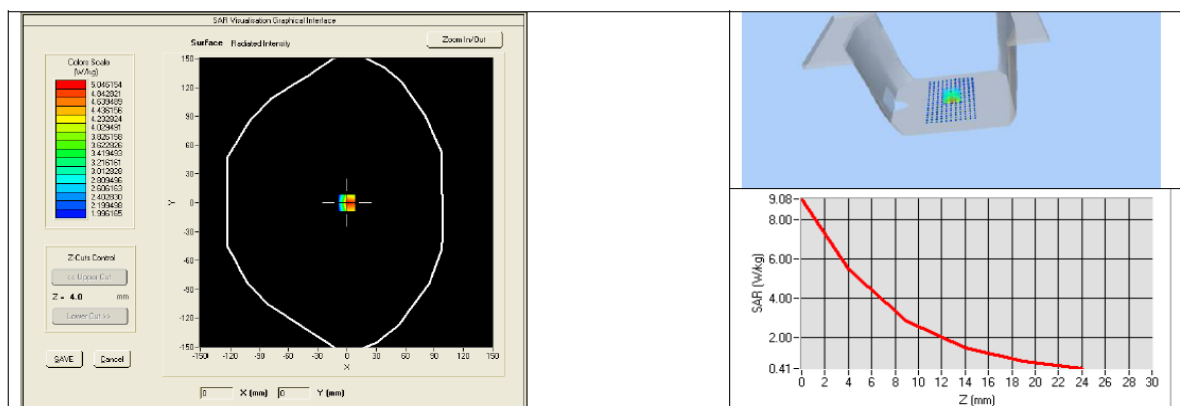

Page: 10/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.9.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Calipers	Carrera	CALIPER-01	02/2024	02/2027
Reference Probe	MVG	EPG122 SN 18/11	02/2025	02/2026
Multimeter	Keithley 2000	1188656	02/2024	02/2027
Signal Generator	Agilent E4438C	MY49070581	02/2024	02/2027
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	02/2024	02/2027
Power Sensor	HP ECP-E26A	US37181460	02/2024	02/2027
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	02/2024	02/2027

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR Reference Dipole Calibration Report

Ref : ACR.156.10.15.SATU.A

SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

**2101&2201, ZHENCHANG FACTORY, RENSHAN INDUSTRIAL
ZONE, FUHAI SUBDISTRICT, BAOAN DISTRICT,
SHENZHEN, GUANGDONG, CHINA**

MVG COMOSAR REFERENCE DIPOLE

FREQUENCY: 2600 MHZ

SERIAL NO.: SN 16/15 DIP 2G600-375

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration CERT #2246-02

Calibration Date: 06/05/2024

Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	06/05/2024	<i>JS</i>
Checked by :	Jérôme LUC	Product Manager	06/05/2024	<i>JS</i>
Approved by :	Kim RUTKOWSKI	Quality Manager	06/05/2024	<i>Kim Rutkowski</i>

	Customer Name
Distribution :	SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

Issue	Date	Modifications
A	06/05/2024	Initial release

Page: 2/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	5
4.1	Return Loss Requirements	5
4.2	Mechanical Requirements	5
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	6
6.1	Return Loss and Impedance In Head Liquid	6
6.2	Return Loss and Impedance In Body Liquid	6
6.3	Mechanical Dimensions	6
7	Validation measurement	7
7.1	Head Liquid Measurement	7
7.2	SAR Measurement Result With Head Liquid	8
7.3	Body Liquid Measurement	9
7.4	SAR Measurement Result With Body Liquid	10
8	List of Equipment	11



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 2600 MHz REFERENCE DIPOLE
Manufacturer	MVG
Model	SID2600
Serial Number	SN 16/15 DIP 2G600-375
Product Condition (new / used)	Used

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, FCC KDBs and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 – MVG COMOSAR Validation Dipole



4 MEASUREMENT METHOD

The IEEE 1528, FCC KDBs and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAR system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, FCC KDBs, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %




SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

10 g	20.1 %
------	--------


6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS AND IMPEDANCE IN HEAD LIQUID

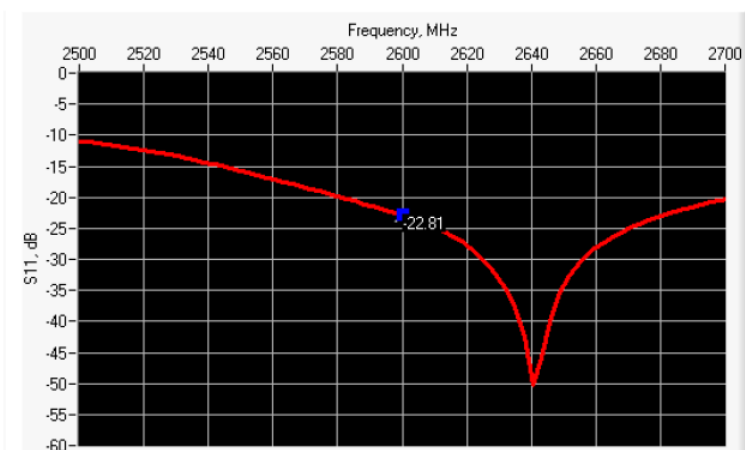

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2600	-22.81	-20	55.3 Ω - 5.1 j Ω

6.2 RETURN LOSS AND IMPEDANCE IN BODY LIQUID

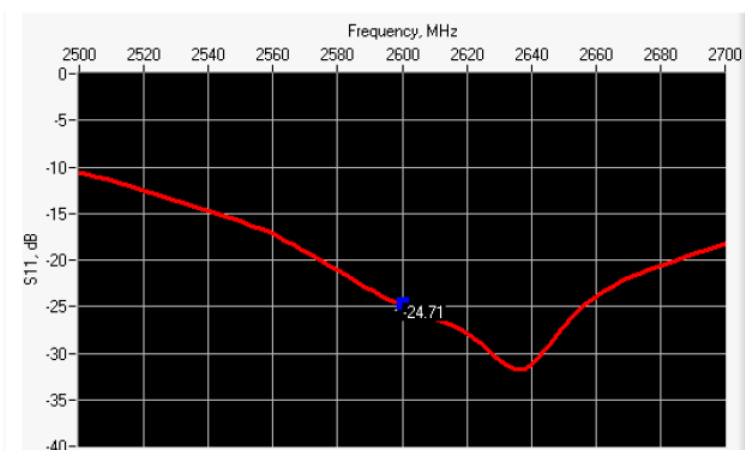

Frequency (MHz)	Return Loss (dB)	Requirement (dB)	Impedance
2600	-24.71	-20	51.5 Ω - 5.5 j Ω

6.3 MECHANICAL DIMENSIONS

Frequency MHz	L mm		h mm		d mm	
	required	measured	required	measured	required	measured
300	420.0 \pm 1 %		250.0 \pm 1 %		6.35 \pm 1 %	

Page: 6/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.

Page 255 of 273



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

450	290.0 ±1 %.		166.7 ±1 %.		6.35 ±1 %.	
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1 %.	
835	161.0 ±1 %.		89.8 ±1 %.		3.6 ±1 %.	
900	149.0 ±1 %.		83.3 ±1 %.		3.6 ±1 %.	
1450	89.1 ±1 %.		51.7 ±1 %.		3.6 ±1 %.	
1500	80.5 ±1 %.		50.0 ±1 %.		3.6 ±1 %.	
1640	79.0 ±1 %.		45.7 ±1 %.		3.6 ±1 %.	
1750	75.2 ±1 %.		42.9 ±1 %.		3.6 ±1 %.	
1800	72.0 ±1 %.		41.7 ±1 %.		3.6 ±1 %.	
1900	68.0 ±1 %.		39.5 ±1 %.		3.6 ±1 %.	
1950	66.3 ±1 %.		38.5 ±1 %.		3.6 ±1 %.	
2000	64.5 ±1 %.		37.5 ±1 %.		3.6 ±1 %.	
2100	61.0 ±1 %.		35.7 ±1 %.		3.6 ±1 %.	
2300	55.5 ±1 %.		32.6 ±1 %.		3.6 ±1 %.	
2450	51.5 ±1 %.		30.4 ±1 %.		3.6 ±1 %.	
2600	48.5 ±1 %.	PASS	28.8 ±1 %.	PASS	3.6 ±1 %.	PASS
3000	41.5 ±1 %.		25.0 ±1 %.		3.6 ±1 %.	
3500	37.0 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	
3700	34.7 ±1 %.		26.4 ±1 %.		3.6 ±1 %.	

7 VALIDATION MEASUREMENT

The IEEE Std. 1528, FCC KDBs and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
300	45.3 ±5 %		0.87 ±5 %	
450	43.5 ±5 %		0.87 ±5 %	
750	41.9 ±5 %		0.89 ±5 %	
835	41.5 ±5 %		0.90 ±5 %	
900	41.5 ±5 %		0.97 ±5 %	
1450	40.5 ±5 %		1.20 ±5 %	
1500	40.4 ±5 %		1.23 ±5 %	
1640	40.2 ±5 %		1.31 ±5 %	
1750	40.1 ±5 %		1.37 ±5 %	

Page: 7/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5 %		1.49 ±5 %	
2300	39.5 ±5 %		1.67 ±5 %	
2450	39.2 ±5 %		1.80 ±5 %	
2600	39.0 ±5 %	PASS	1.96 ±5 %	PASS
3000	38.5 ±5 %		2.40 ±5 %	
3500	37.9 ±5 %		2.91 ±5 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: ϵ_{ps} : 38.2 σ : 1.93
Distance between dipole center and liquid	10.0 mm
Area scan resolution	$dx=8mm/dy=8mm$
Zoon Scan Resolution	$dx=5mm/dy=5mm/dz=5mm$
Frequency	2600 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)		10 g SAR (W/kg/W)	
	required	measured	required	measured
300	2.85		1.94	
450	4.58		3.06	
750	8.49		5.55	
835	9.56		6.22	
900	10.9		6.99	
1450	29		16	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	

Page: 8/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*


Page 257 of 273



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3	54.31 (5.36)	24.6	24.14 (2.42)
3000	63.8		25.7	
3500	67.1		25	

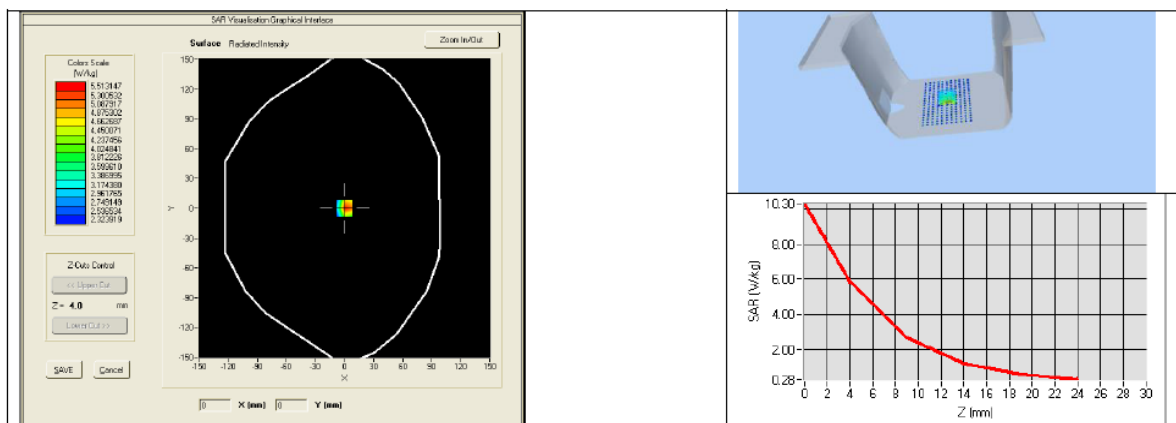

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
150	61.9 \pm 5 %		0.80 \pm 5 %	
300	58.2 \pm 5 %		0.92 \pm 5 %	
450	56.7 \pm 5 %		0.94 \pm 5 %	
750	55.5 \pm 5 %		0.96 \pm 5 %	
835	55.2 \pm 5 %		0.97 \pm 5 %	
900	55.0 \pm 5 %		1.05 \pm 5 %	
915	55.0 \pm 5 %		1.06 \pm 5 %	
1450	54.0 \pm 5 %		1.30 \pm 5 %	
1610	53.8 \pm 5 %		1.40 \pm 5 %	
1800	53.3 \pm 5 %		1.52 \pm 5 %	
1900	53.3 \pm 5 %		1.52 \pm 5 %	
2000	53.3 \pm 5 %		1.52 \pm 5 %	
2100	53.2 \pm 5 %		1.62 \pm 5 %	
2450	52.7 \pm 5 %		1.95 \pm 5 %	

Page: 9/11

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE DIPOLE CALIBRATION REPORT


Ref: ACR.156.10.15.SATU.A

2600	52.5 ±5 %	PASS	2.16 ±5 %	PASS
3000	52.0 ±5 %		2.73 ±5 %	
3500	51.3 ±5 %		3.31 ±5 %	
5200	49.0 ±10 %		5.30 ±10 %	
5300	48.9 ±10 %		5.42 ±10 %	
5400	48.7 ±10 %		5.53 ±10 %	
5500	48.6 ±10 %		5.65 ±10 %	
5600	48.5 ±10 %		5.77 ±10 %	
5800	48.2 ±10 %		6.00 ±10 %	

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values: eps' : 51.6 sigma : 2.21
Distance between dipole center and liquid	10.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=5mm/dy=5mm/dz=5mm
Frequency	2600 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency MHz	1 g SAR (W/kg/W)	10 g SAR (W/kg/W)
	measured	measured
2600	53.26 (5.12)	23.89 (2.30)

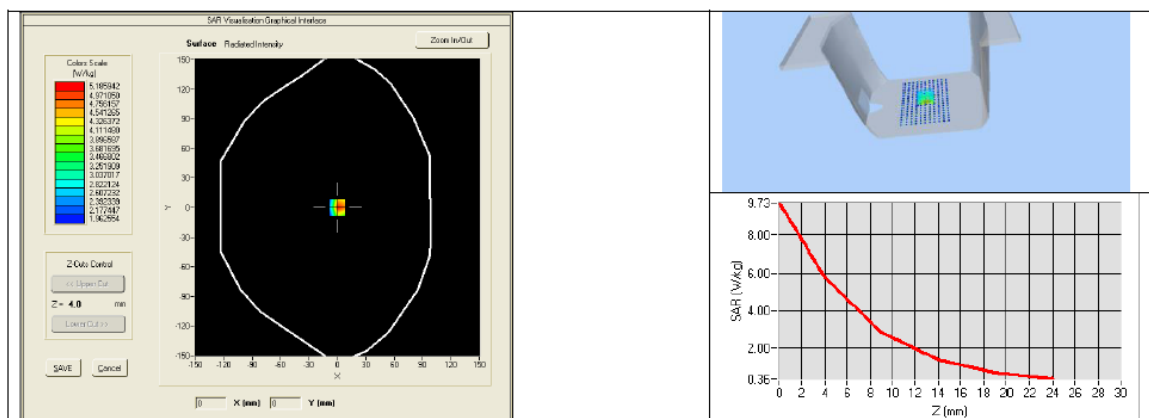



SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.156.10.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
SAM Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2024	02/2027
Calipers	Carrera	CALIPER-01	02/2024	02/2027
Reference Probe	MVG	EPG122 SN 18/11	02/2025	02/2026
Multimeter	Keithley 2000	1188656	02/2024	02/2027
Signal Generator	Agilent E4438C	MY49070581	02/2024	02/2027
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	02/2024	02/2027
Power Sensor	HP ECP-E26A	US37181460	02/2024	02/2027
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	11-661-9	09/2024	09/2025

Page: 11/11

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



SAR Reference Waveguide Calibration Report

Ref : ACR.256.12.15.SATU.A

SHENZHEN TCT TESTING TECHNOLOGY CO., LTD
2101&2201, ZHENCHANG FACTORY, RENSHAN INDUSTRIAL
ZONE, FUHAI SUBDISTRICT, BAOAN DISTRICT,
SHENZHEN, GUANGDONG, CHINA
MVG COMOSAR REFERENCE WAVEGUIDE
FREQUENCY: 5000-6000 MHZ
SERIAL NO.: SN 13/14 WGA32

Calibrated at MVG US
2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 05/15/2024

Summary:

This document presents the method and results from an accredited SAR reference waveguide calibration performed in MVG USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACR.256.12.15.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	5/15/2024	
Checked by :	Jérôme LUC	Product Manager	5/15/2024	
Approved by :	Kim RUTKOWSKI	Quality Manager	5/15/2024	

	Customer Name
Distribution :	SHENZHEN TCT TESTING TECHNOLOGY CO., LTD

Issue	Date	Modifications
A	5/15/2024	Initial release



TABLE OF CONTENTS

1	Introduction.....	4
2	Device Under Test	4
3	Product Description	4
3.1	General Information	4
4	Measurement Method	4
4.1	Return Loss Requirements	4
4.2	Mechanical Requirements	4
5	Measurement Uncertainty	5
5.1	Return Loss	5
5.2	Dimension Measurement	5
5.3	Validation Measurement	5
6	Calibration Measurement Results	5
6.1	Return Loss	5
6.2	Mechanical Dimensions	6
7	Validation measurement	6
7.1	Head Liquid Measurement	7
7.2	Measurement Result	7
7.3	Body Measurement Result	10
8	List of Equipment	13

Page: 3/13

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528 and CEI/IEC 62209 standards for reference waveguides used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 5000-6000 MHz REFERENCE WAVEGUIDE
Manufacturer	MVG
Model	SWG5500
Serial Number	SN 13/14 WGA32
Product Condition (new / used)	New

A yearly calibration interval is recommended.

3 PRODUCT DESCRIPTION

3.1 GENERAL INFORMATION

MVG's COMOSAR Validation Waveguides are built in accordance to the IEEE 1528 and CEI/IEC 62209 standards.

4 MEASUREMENT METHOD

The IEEE 1528 and CEI/IEC 62209 standards provide requirements for reference waveguides used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

4.1 RETURN LOSS REQUIREMENTS

The waveguide used for SAR system validation measurements and checks must have a return loss of -8 dB or better. The return loss measurement shall be performed with matching layer placed in the open end of the waveguide, with the waveguide and matching layer in direct contact with the phantom shell as outlined in the fore mentioned standards.

4.2 MECHANICAL REQUIREMENTS

The IEEE 1528 and CEI/IEC 62209 standards specify the mechanical dimensions of the validation waveguide, the specified dimensions are as shown in Section 6.2. Figure 1 shows how the dimensions relate to the physical construction of the waveguide.

Page: 4/13

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*



5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Frequency band	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

5.2 DIMENSION MEASUREMENT

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm


5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	20.3 %
10 g	20.1 %

6 CALIBRATION MEASUREMENT RESULTS

6.1 RETURN LOSS IN HEAD LIQUID

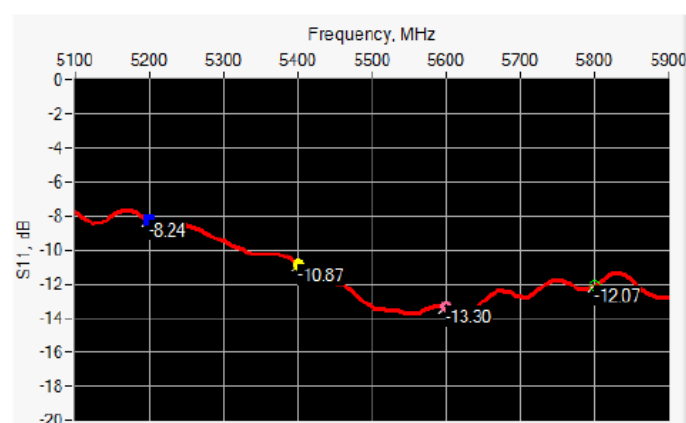


Frequency (MHz)	Return Loss (dB)	Requirement (dB)
5000-6000	< -8.24	-8

Page: 5/13

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



6.2 RETURN LOSS IN BODY LIQUID

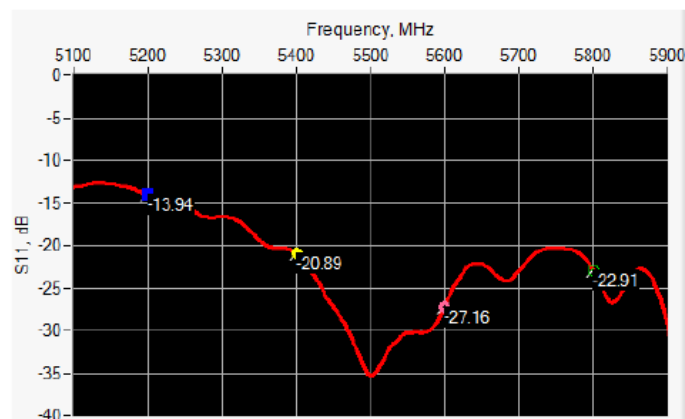

Frequency (MHz)	Return Loss (dB)	Requirement (dB)
5000-6000	< -13.94	-8

6.3 MECHANICAL DIMENSIONS

Frequency (MHz)	L (mm)		W (mm)		L _f (mm)		W _f (mm)		T (mm)	
	Requirement	Measured	Requirement	Measured	Requirement	Measured	Requirement	Measured	Requirement	Measured
5200	40.39 ± 0.13	PASS	20.19 ± 0.13	PASS	81.03 ± 0.13	PASS	61.98 ± 0.13	PASS	5.3*	PASS
5800	40.39 ± 0.13	PASS	20.19 ± 0.13	PASS	81.03 ± 0.13	PASS	61.98 ± 0.13	PASS	4.3*	PASS

* The tolerance for the matching layer is included in the return loss measurement.

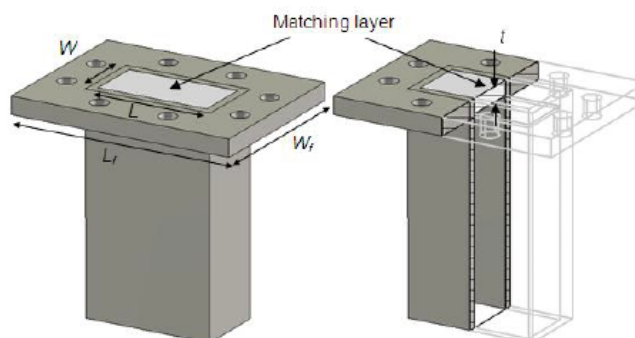


Figure 1: Validation Waveguide Dimensions

7 VALIDATION MEASUREMENT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference waveguide meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed with the matching layer placed in the open end of the waveguide, with the waveguide and matching layer in direct contact with the phantom shell.

Page: 6/13

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



7.1 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
5000	36.2 \pm 10 %		4.45 \pm 10 %	
5100	36.1 \pm 10 %		4.56 \pm 10 %	
5200	36.0 \pm 10 %	PASS	4.66 \pm 10 %	PASS
5300	35.9 \pm 10 %		4.76 \pm 10 %	
5400	35.8 \pm 10 %	PASS	4.86 \pm 10 %	PASS
5500	35.6 \pm 10 %		4.97 \pm 10 %	
5600	35.5 \pm 10 %	PASS	5.07 \pm 10 %	PASS
5700	35.4 \pm 10 %		5.17 \pm 10 %	
5800	35.3 \pm 10 %	PASS	5.27 \pm 10 %	PASS
5900	35.2 \pm 10 %		5.38 \pm 10 %	
6000	35.1 \pm 10 %		5.48 \pm 10 %	

7.2 SAR MEASUREMENT RESULT WITH HEAD LIQUID

At those frequencies, the target SAR value can not be generic. Hereunder is the target SAR value defined by MVG, within the uncertainty for the system validation. All SAR values are normalized to 1 W net power. In bracket, the measured SAR is given with the used input power.

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values 5200 MHz: ϵ_r' :36.62 sigma : 4.93 Head Liquid Values 5400 MHz: ϵ_r' :35.95 sigma : 5.18 Head Liquid Values 5600 MHz: ϵ_r' :36.08 sigma : 5.60 Head Liquid Values 5800 MHz: ϵ_r' :34.73 sigma : 5.74
Distance between dipole waveguide and liquid	0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=4mm/dy=4m/dz=2mm
Frequency	5200 MHz 5400 MHz 5600 MHz 5800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Page: 7/13

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




SAR REFERENCE WAVEGUIDE CALIBRATION REPORT


Ref: ACR.262.12.17.SATU.A

Frequency (MHz)	1 g SAR (W/kg)		10 g SAR (W/kg)	
	required	measured	required	measured
5200	159.00	163.88 (16.39)	56.90	57.29 (5.73)
5400	166.40	172.23 (17.22)	58.43	59.16 (5.92)
5600	173.80	181.28 (18.13)	59.97	61.57 (6.16)
5800	181.20	188.95 (18.90)	61.50	63.45 (6.35)

SAR MEASUREMENT PLOTS @ 5200 MHz

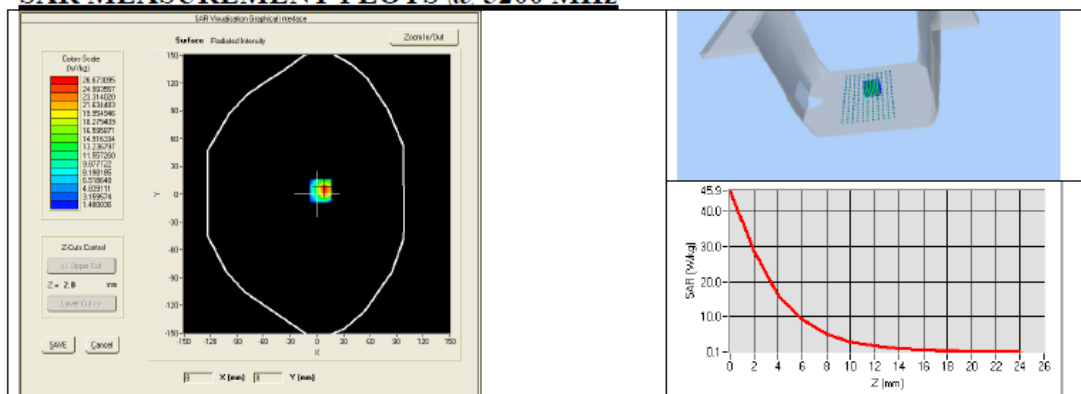

SAR MEASUREMENT PLOTS @ 5400 MHz

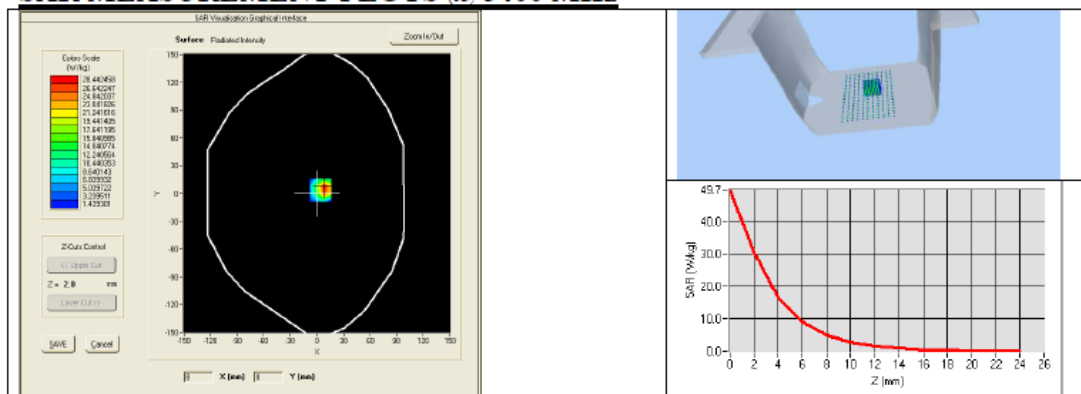





SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACR.262.12.17.SATU.A

SAR MEASUREMENT PLOTS @ 5600 MHz

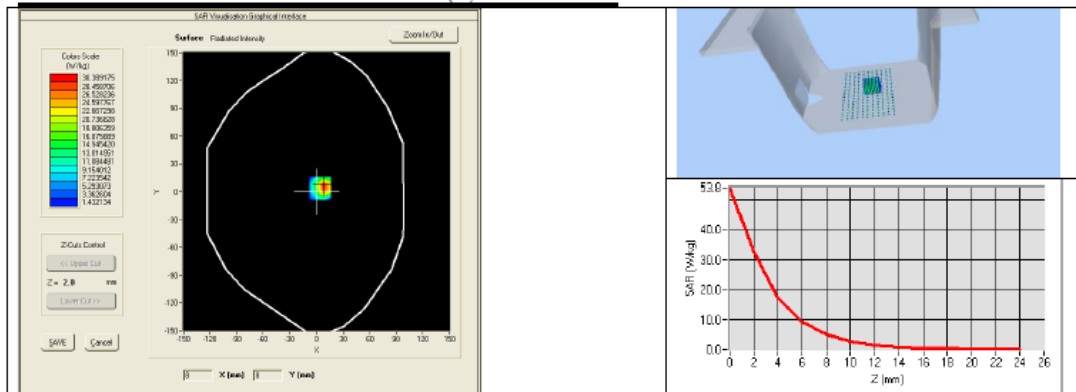

SAR MEASUREMENT PLOTS @ 5800 MHz

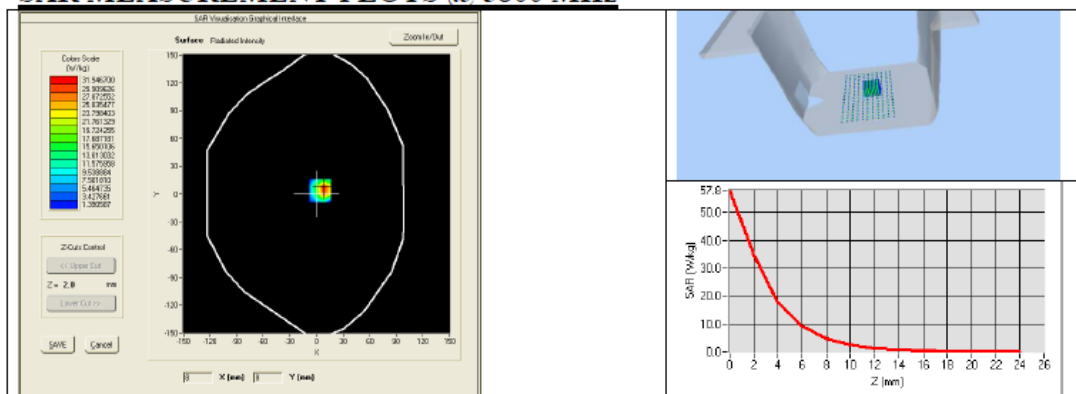

Page: 9/13

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACR.262.12.17.SATU.A

7.3 BODY LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (ϵ_r')		Conductivity (σ) S/m	
	required	measured	required	measured
5200	49.0 \pm 10 %	PASS	5.30 \pm 10 %	PASS
5300	48.9 \pm 10 %		5.42 \pm 10 %	
5400	48.7 \pm 10 %	PASS	5.53 \pm 10 %	PASS
5500	48.6 \pm 10 %		5.65 \pm 10 %	
5600	48.5 \pm 10 %	PASS	5.77 \pm 10 %	PASS
5800	48.2 \pm 10 %	PASS	6.00 \pm 10 %	PASS

7.4 SAR MEASUREMENT RESULT WITH BODY LIQUID

Software	OPENSAR V4
Phantom	SN 20/09 SAM71
Probe	SN 18/11 EPG122
Liquid	Body Liquid Values 5200 MHz: ϵ_r' :50.69 sigma : 4.98 Body Liquid Values 5400 MHz: ϵ_r' :48.45 sigma : 5.82 Body Liquid Values 5600 MHz: ϵ_r' :50.57 sigma : 6.37 Body Liquid Values 5800 MHz: ϵ_r' :48.19 sigma : 6.45
Distance between dipole waveguide and liquid	0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=4mm/dy=4m/dz=2mm
Frequency	5200 MHz 5400 MHz 5600 MHz 5800 MHz
Input power	20 dBm
Liquid Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %

Frequency (MHz)	1 g SAR (W/kg)	10 g SAR (W/kg)
	measured	measured
5200	158.49 (15.85)	55.40 (5.54)
5400	167.20 (16.72)	57.39 (5.74)
5600	175.65 (17.57)	59.48 (5.95)
5800	183.06 (18.31)	61.62 (6.16)

Page: 10/13


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.




SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACR.262.12.17.SATU.A


BODY SAR MEASUREMENT PLOTS @ 5200 MHz

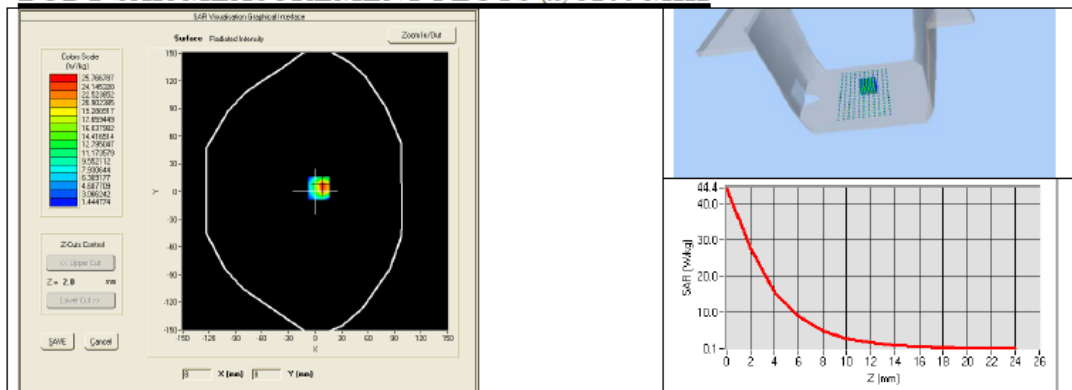

BODY SAR MEASUREMENT PLOTS @ 5400 MHz

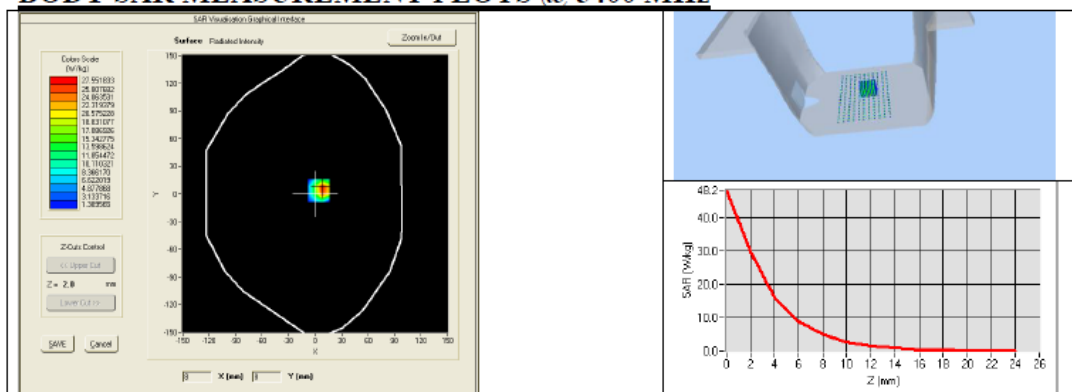

BODY SAR MEASUREMENT PLOTS @ 5600 MHz

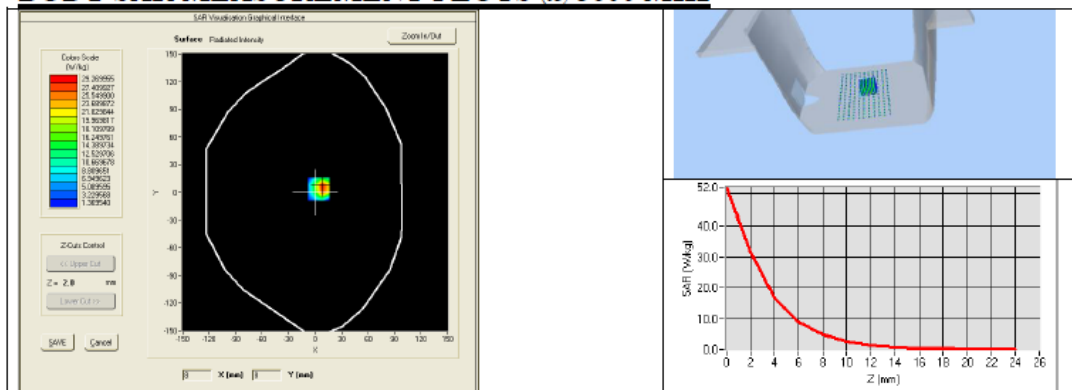

Page: 11/13


This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACR.262.12.17.SATU.A

BODY SAR MEASUREMENT PLOTS @ 5800 MHz

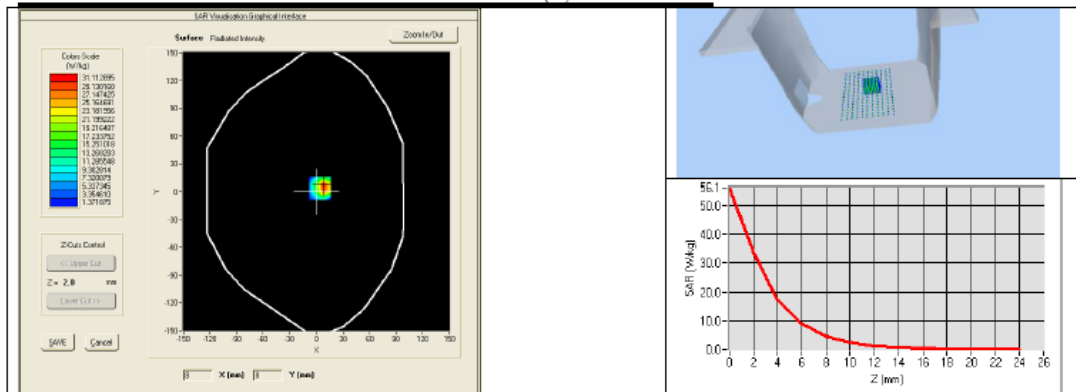

Page: 12/13

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.



SAR REFERENCE WAVEGUIDE CALIBRATION REPORT

Ref: ACR.256.12.15.SATU.A

8 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date
Flat Phantom	MVG	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2025	02/2026
Calipers	Carrera	CALIPER-01	01/2025	01/2026
Reference Probe	MVG	EPG122 SN 18/11	10/2025	10/2026
Multimeter	Keithley 2000	1188656	01/2025	01/2026
Signal Generator	Agilent E4438C	MY49070581	01/2025	01/2026
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	01/2026	01/2026
Power Sensor	HP ECP-E26A	US37181460	01/2025	01/2026
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Temperature and Humidity Sensor	Control Company	150798832	10/2024	10/2025

Page: 13/13

*This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.*

*******END OF REPORT*******