

SAR Test Report

Report No.: AGC00552190601EH01

PRODUCT DESIGNATION : Smart Phone

BRAND NAME : CUBOT

MODEL NAME : R19

APPLICANT : Shenzhen Huafurui Technology Co., Ltd.

DATE OF ISSUE : July 11,2019

STANDARD(S) : EN 50360:2017; EN62209-1:2016;
EN62209-2:2010; EN50566:2017; EN 62479:2010

REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 11,2019	Valid	Initial Release



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Test Report

Applicant Name	Shenzhen Huafului Technology Co., Ltd.
Applicant Address	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Manufacturer Name	Shenzhen Huafului Technology Co., Ltd.
Manufacturer Address	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Factory Name	Shenzhen Huafului Technology Co., Ltd.
Factory Address	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Product Designation	Smart Phone
Brand Name	CUBOT
Model Name	R19
Different Description	N/A
EUT Voltage	DC3.8V by battery
Applicable Standard	EN 50360:2017; EN62209-1:2016; EN62209-2:2010; EN50566:2017; EN 62479:2010
Test Date	June 26,2019 to July 02,2019
Performed Location	Attestation of Global Compliance(Shenzhen) Co., Ltd. 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China
Report Template	AGCRT-EC-4G/SAR (2018-01-01)

Note: The results of testing in this report apply to the product/system which was tested only.

Tested By Eric Zhou

Eric Zhou(Zhou Yongkang) July 02,2019

Checked By Jack Gui

Jack Gui (Gui Jiafeng) July 11,2019

Authorized By Forrest Lei

Forrest Lei(Lei Yonggang)
Authorized Officer July 11,2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION	6
2.1. EUT DESCRIPTION	6
3. SAR MEASUREMENT SYSTEM	8
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS	8
3.2. COMOSAR E-FIELD PROBE	9
3.3. ROBOT	9
3.4. VIDEO POSITIONING SYSTEM	10
3.5. DEVICE HOLDER	10
3.6. SAM TWIN PHANTOM	11
3.7. ELLI39 PHANTOM	11
4. SAR MEASUREMENT PROCEDURE	12
4.1. SPECIFIC ABSORPTION RATE (SAR)	12
4.2. SAR MEASUREMENT PROCEDURE	13
5. TISSUE SIMULATING LIQUID	16
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID	16
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	16
5.3. TISSUE CALIBRATION RESULT	17
6. SAR SYSTEM CHECK PROCEDURE	18
6.1. SAR SYSTEM CHECK PROCEDURES	18
6.2. SAR SYSTEM CHECK	19
7. EUT TEST POSITION	21
7.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET	21
7.2. CHEEK POSITION	22
7.3. TILT POSITION	22
7.4. BODY WORN POSITION	23
8. SAR EXPOSURE LIMITS	24
9. TEST EQUIPMENT LIST	25
10. MEASUREMENT UNCERTAINTY	26
11. CONDUCTED POWER MEASUREMENT	32
12. TEST RESULTS	53
12.1. SAR TEST RESULTS SUMMARY	53
APPENDIX A. SAR SYSTEM CHECK DATA	71
APPENDIX B. SAR MEASUREMENT DATA	95
APPENDIX C. TEST SETUP PHOTOGRAPHS	141
APPENDIX D. CALIBRATION DATA	148



1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Frequency Band	Highest Reported 10g-SAR(W/Kg)		SAR Test Limit (W/Kg)
	Head	Body-worn (with 5mm separation)	
GSM 900	0.477	0.503	2.0
DCS 1800	0.139	1.163	
WCDMA Band I	0.235	0.967	
WCDMA Band VIII	0.393	0.244	
LTE Band 1	0.218	1.217	
LTE Band 3	0.225	1.468	
LTE Band 7	0.471	0.737	
LTE Band 8	0.421	0.385	
LTE Band 20	0.246	0.308	
WIFI 2.4G	0.187	0.237	
Simultaneous Reported SAR	1.705		
SAR Test Result	PASS		

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (2.0W/Kg).



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

2. GENERAL INFORMATION

2.1. EUT Description

General Information	
Product Designation	Smart Phone
Test Model	R19
Hardware Version	E557_MAIN_PCB_V1.2
Software Version	CUBOT_R19_V01_20190613
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GSM and GPRS&EGPRS	
Support Band	<input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (EU Frequency) <input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS 1900 (none EU Frequency)
GPRS & EGPRS Type	Class B
GPRS & EGPRS Class	Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)
TX Frequency Range	GSM900:880-915MHz ; DCS1800:1710-1785MHz
RX Frequency Range	GSM900:925-960MHz ; DCS1800:1805-1880MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS
Antenna Gain	GSM900:0.35dBi, DCS1800:0.50dBi;
Max. Avg. Output Power	GSM900:33.64dBm; DCS1800:31.32dBm
Bluetooth	
Operation Frequency	2402~2480MHz
Antenna Gain	1.0dBi
Bluetooth Version	V5.0
Type of modulation	BR/EDR: GFSK, II/4-DQPSK, 8-DPSK; BLE: GFSK
EIRP	BR/EDR: 6.94dBm; BLE: -3.49dBm
WIFI	
WIFI Specification	<input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20) <input checked="" type="checkbox"/> 802.11n(40)
Operation Frequency	2412~2472MHz
EIRP	11b:15.57dBm, 11g:9.29dBm, 11n(20):9.36dBm, 11n(40):9.25dBm
Antenna Gain	1.0dBi



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

EUT Description (Continue)

WCDMA	
Support Band	<input checked="" type="checkbox"/> UMTS FDD Band I <input checked="" type="checkbox"/> UMTS FDD Band VIII <input type="checkbox"/> UMTS FDD Band II <input type="checkbox"/> UMTS FDD Band V
HS Type	HSPA(HSUPA/HSDPA)
TX Frequency Range	FDD Band I : 1920-1980MHz; FDD Band VIII : 880-915MHz;
RX Frequency Range	FDD Band I : 2110-2170MHz; FDD Band VIII : 925-960MHz ;
Release Version	Rel-6
Type of modulation	HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
Antenna Gain	Band I:0.65dBi, Band VIII:0.35dBi;
Max. Avg. Output Power	Band I:23.94dBm; Band VIII:23.57dBm
LTE	
Support Band	<input checked="" type="checkbox"/> Band 1 <input checked="" type="checkbox"/> Band 3 <input checked="" type="checkbox"/> Band 7 <input checked="" type="checkbox"/> Band 8 <input checked="" type="checkbox"/> Band 20 <input type="checkbox"/> Band 40
TX Frequency Range	Band 1:1920-1980 MHz; Band 3: 1710-1785 MHz; Band 7:2500-2570MHz Band 8:880-915 MHz; Band 20:832-862 MHz;
RX Frequency Range	Band 1:2110-2170 MHz; Band 3: 1805-1880 MHz; Band 7:2620-2690MHz Band 8: 925-960 MHz; Band 20: 791-821 MHz;
Release Version	Rel-8
Type of modulation	QPSK,16QAM
Antenna Gain	Band 1: 0.65dBi, Band 3: 0.50dBi, Band 7: 0.87dBi, Band 8: 0.35dBi, Band 20: 0.30dBi
Diversity Antenna Gain	Band 1: 0.62dBi, Band 3: 0.45dBi, Band 7: 0.83dBi, Band 8: 0.32dBi, Band 20: 0.28dBi
Max. Avg. Output Power	Band 1: 24.45dBm, Band 3: 23.79dBm , Band 7:23.24dBm Band 8:23.85dBm; Band 20:24.06dBm;
Li-ion Battery	
Brand Name	CUBOT
Model Name	C6
Manufacturer Name	Zhongshan Tianmao Battery Co., Ltd.
Manufacturer Address	NO.208, Qian Jin One Road, The Third Industrial Zone, Tanzhou Town, Zhongshan City, China
Capacitance	2800mAh
Rated Voltage	DC3.8V
Charging Voltage	DC4.35V

Note: 1.The sample used for testing is end product;

2.Diversity antenna just for receive;



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

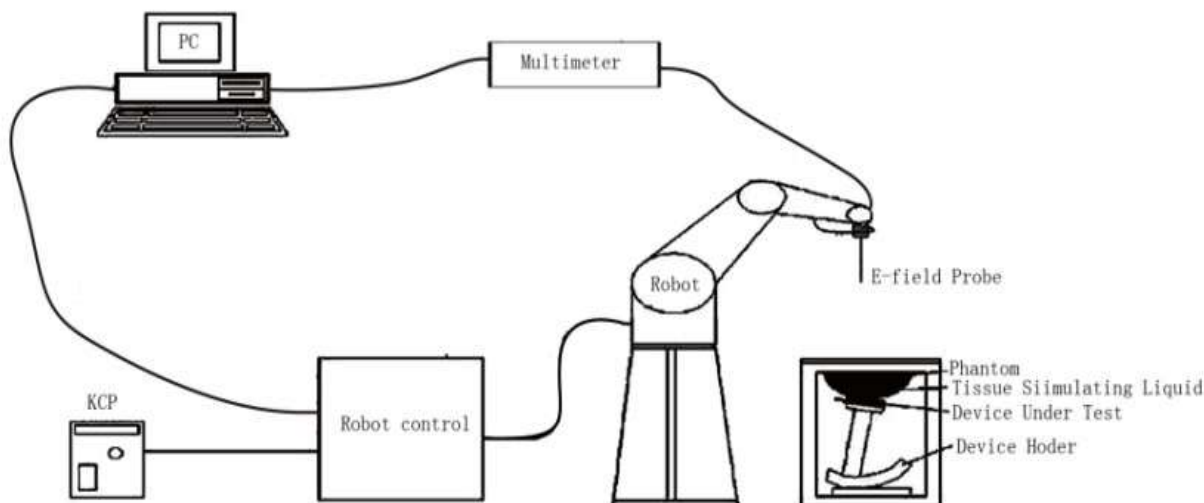


The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g.EN62209 etc.)Under ISO17025.The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	SSE5	
Manufacture	MVG	
Identification No.	SN 22/12 EP159	
Frequency	0.45GHz-3GHz Linearity:±0.11dB(0.45GHz-3GHz)	
Dynamic Range	0.01W/Kg-100W/Kg Linearity:±0.11dB	
Dimensions	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precisin of better 30%.	

3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.


The XL robot series have many features that are important for our application:

- ☐ High precision (repeatability 0.02 mm)
- ☐ High reliability (industrial design)
- ☐ Jerk-free straight movements
- ☐ Low ELF interference (the closed metallic construction shields against motor control fields)
- ☐ 6-axis controller




3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

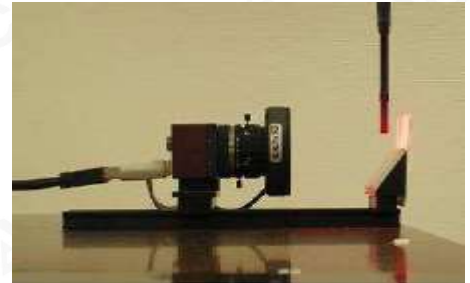

3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

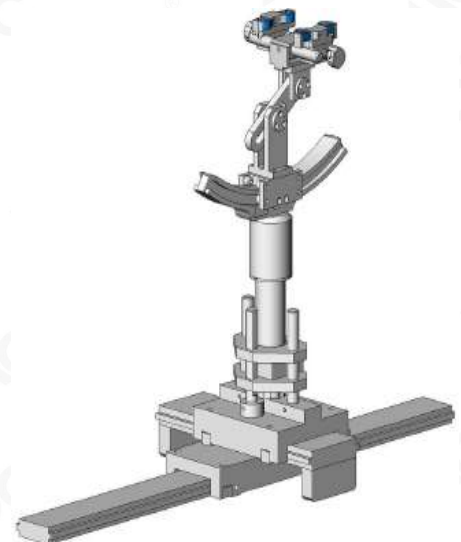

3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- ☐ Left head
- ☐ Right head
- ☐ Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

3.7. ELLI39 Phantom

The Flat phantom is a fiberglass shell phantom with 2mm \pm 0.2 mm shell thickness. It has only one measurement area for Flat phantom



4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/Kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
c _h	is the heat capacity of the tissue in joules per kilogram and Kelvin;

$\left. \frac{dT}{dt} \right|_{t=0}$ is the initial time derivative of temperature in the tissue in kelvins per second



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

4.2. SAR Measurement Procedure

- a) Measure the local SAR at a test point within 10 mm of the inner surface of the phantom where the measured local SAR exceeds the lower detection limit of the measurement system. Preferably, the test point will be above the expected peak SAR location within said distance from the phantom surface. As explained at Step f) below, a comparative measurement will be made by the system at the same point after completion of the SAR measurement.
- b) The area over which the SAR measurement is performed shall cover at least an area larger than the projection of the handset and antenna. For some handsets, the area projected onto the phantom can be large such that the probe may not reach all points. In this case, rotated phantoms may be used and the area may be assessed by multiple overlapping area scans. Measure the two-dimensional SAR distribution within the phantom (area scan procedure). The boundary of the measurement area shall be with respect to the SAM phantom requirements. The measurement resolution and spatial resolution for interpolation shall be chosen to allow identification of the local peak locations to within one-half of the linear dimension of the corresponding side of the zoom-scan volume. The maximum grid spacing shall be 20 mm for frequencies equal to or below 3 GHz and $(60/f \text{ [GHz]})$ mm for frequencies above 3 GHz. The resolution SAR uncertainty of the measurement can be estimated using the functions in 7.2.10. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be ≤ 5 mm for frequencies equal to or below 3 GHz and $\delta \ln(2)/2$ mm for frequencies above 3 GHz, where δ is the plane wave penetration depth and $\ln(x)$ is the natural logarithm [80]. The maximum variation of the sensor-phantom surface distance shall be ± 1 mm for frequencies equal to or below 3 GHz and $\pm 0,5$ mm for frequencies above 3 GHz. At all measurement points, the angle of the probe with respect to the line normal to the surface shall be less than 30° for frequencies equal to or below 3 GHz and 20° for frequencies above 3 GHz (see Figure 6). Table 1 provides the measurement parameters required for the area scan.
- c) From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g. 1 W/kg for 1,6 W/kg, 1 g limit; or 1,26 W/kg for 2 W/kg, 10 g limit).
- d) Measure the three-dimensional SAR distribution at the local maxima locations identified in Step c) (zoom scan procedure). The horizontal grid step shall be $(24/f \text{ [GHz]})$ mm or less but not more than 8 mm. The minimum zoom scan size is 30 mm by 30 mm by 30 mm for frequencies equal to or below 3 GHz. For higher frequencies, the minimum zoom scan size can be reduced to 22 mm by 22 mm by 22 mm. A smaller volume zoom scan with tighter spacing between the measurement points is allowed due to steeper decay of the E-field, which may reduce the measurement time. For frequencies above 3 GHz, the grid step in the vertical direction shall not exceed $(8 - f \text{ [GHz]})$ mm, and for frequencies equal to or below 3 GHz if uniform spacing is used the grid step shall not exceed 5 mm. If variable spacing is used in the vertical direction (non-uniform grids or graded grids), the maximum spacing between the two closest measured points to the phantom shell shall not exceed $(12/f \text{ [GHz]})$ mm for frequencies above 3 GHz, and shall not exceed 4 mm for frequencies at or below 3 GHz. Furthermore the spacing between farther adjacent points shall increase by an incremental factor not exceeding 1,5. When graded grids are used, extrapolation routines shall be tested according to 7.2.10.3.2 with the same spacing as used in measurements. The maximum distance between the geometrical centre of the probe detectors and the inner surface of the phantom shall be 5 mm for frequencies equal to or below 3 GHz and $\delta \ln(2)/2$ mm for frequencies above 3 GHz, where δ is the plane wave penetration depth and $\ln(x)$ is the natural logarithm. Separate grids shall be centred on each of the local SAR maxima found in Step c). At all measurement points, the angle of the probe with respect to the line normal to the surface shall be less than 30° for frequencies equal to or below 3 GHz and 20° for frequencies above 3 GHz.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

e) Use the post-processing, i.e. the interpolation and extrapolation procedures defined in 6.5, to determine peak spatial-average SAR values.

f) Measure the local SAR at exactly the same test point location as in Step a). The SAR drift of the DUT may be estimated by the difference between the two measured single-point SAR values in Steps a) and f). The SAR drift shall be kept within $\pm 5\%$; otherwise, see 7.2.8 for more information on addressing SAR measurement drift.

Table 1 – Area scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum distance between the measured points (geometric centre of the sensors) and the inner phantom surface (z_{M1} in Figure 6 in mm)	5 ± 1	$\delta \ln(2)/2 \pm 0,5^a$
Maximum spacing between adjacent measured points (see 7.2.10.3.1, in mm) ^b	20 or half of the corresponding zoom scan length, whichever is smaller	$60/f$ or half of the corresponding zoom scan length, whichever is smaller
Maximum angle between the probe axis and the phantom surface normal (α in Figure 6) ^c	30°	20°
Tolerance in the probe angle	1°	1°
^a δ is the penetration depth for a plane-wave incident normally on a planar half-space. ^b See 7.2.10 on how Δx and Δy may be selected for individual area scan requirements. ^c The probe angle with respect to the phantom surface normal is restricted due to the degradation in the measurement accuracy in fields with steep spatial gradients. The measurement accuracy decreases with increasing probe angle and increasing frequency. This is the reason for the tighter probe angle restriction at frequencies above 3 GHz.		

Table 2 – Zoom scan parameters

Parameter	DUT transmit frequency being tested	
	$f \leq 3$ GHz	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
Maximum distance between the closest measured points and the phantom surface (z_{M1} in Figure 6 and Table 1, in mm)	5	$\delta \ln(2)/2^a$
Maximum angle between the probe axis and the phantom surface normal (α in Figure 6)	30°	20°
Maximum spacing between measured points in the x- and y-directions (7.2.10.3.2, in mm)	8	$24/f^b$
For uniform grids: Maximum spacing between measured points in the direction normal to the phantom shell (Δz_1 in Figure 6, in mm)	5	$8 - f$



Parameter	DUT transmit frequency being tested	
	$f \leq 3 \text{ GHz}$	$3 \text{ GHz} < f \leq 6 \text{ GHz}$
<i>For graded grids:</i> Maximum spacing between the two closest measured points in the direction normal to the phantom shell (Δz_1 in Figure 6, in mm)	4	$12/f$
<i>For graded grids:</i> Maximum incremental increase in the spacing between measured points in the direction normal to the phantom shell ($R_z = \Delta z_2 / \Delta z_1$ in Figure 6)	1,5	1,5
Minimum edge length of the zoom scan volume in the x- and y-directions (L_z in 7.2.10.3.2, in mm)	30	22
Minimum edge length of the zoom scan volume in the direction normal to the phantom shell (L_h in 7.2.10.3.2, in mm)	30	22
Tolerance in the probe angle	1°	1°
^a δ is the penetration depth for a plane-wave incident normally on a planar half-space. ^b This is the maximum spacing allowed, which may not work for all circumstances.		



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in 5.2

5.1. The composition of the tissue simulating liquid

Frequency (MHz) \ Ingredient (% Weight)	Water	NaCl	Polysorbate 20	DGBE	1,2-Propanediol	Triton X-100
835	50.36	1.25	48.39	0.0	0.0	0.0
900	34.40	0.79	0.0	0.0	64.81	0.0
1800	55.36	0.35	0.0	13.84	0.0	30.45
2000	50	0.0	0.0	50	0.0	0.0
2450	71.88	0.16	0.0	7.99	0.0	19.97
2600	55.242	0.306	0.0	44.452	0.0	0.0

5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the EN62209-1 have been incorporated in the following table. The body tissue dielectric parameters recommended by the EN62209-2 have been incorporated in the following table.

Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	45.3	0.87
450	43.5	0.87	43.5	0.87
835	41.5	0.90	41.5	0.90
900	41.5	0.97	41.5	0.97
1450	40.5	1.20	40.5	1.20
1800 – 2000	40.0	1.40	40.0	1.40
2300	39.5	1.67	39.5	1.67
2450	39.2	1.80	39.2	1.80
2600	39.00	1.96	39.00	1.96
3000	38.5	2.40	38.5	2.40

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Frequency (MHz)	Target Value		Measurement Value		Tissue Temp [°C]	Test Date
	ϵ_r	δ [s/m]	ϵ_r	δ [s/m]		
835	41.5 39.425-43.575	0.90 0.855-0.945	40.64	0.92	20.9	June 28,2019
900	41.50 39.425-43.575	0.97 0.9225-1.0185	41.26	0.94	21.8	July 01,2019
1800	40.00 38.00-42.00	1.40 1.33-1.47	39.26	1.41	21.1	June 29,2019
2000	40.00 38.00-42.00	1.40 1.33-1.47	39.26	1.37	21.6	June 27,2019
2450	39.2 37.24-41.16	1.80 1.71-1.89	38.69	1.81	20.9	June 26,2019
2600	39.0 37.05-40.95	1.96 1.86-2.06	39.26	1.89	21.2	July 02,2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118


6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.


Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

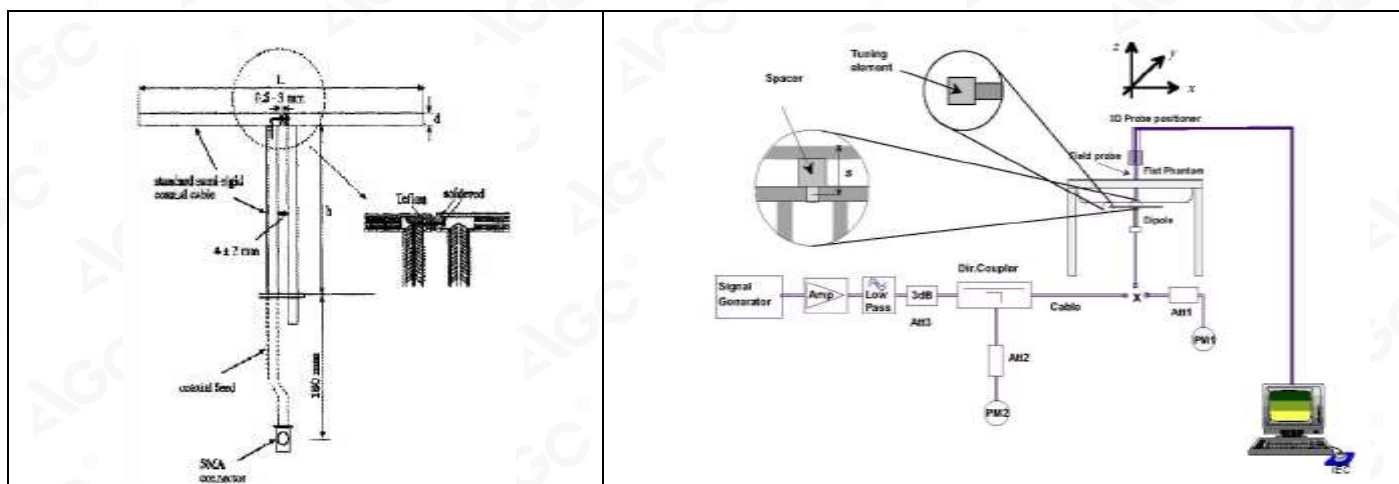

6.2. SAR System Check

6.2.1. Dipoles

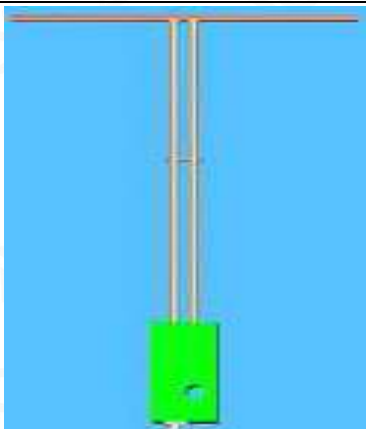	<p>The dipoles used are based on the EN62209-1 standard, the table below provides details for the mechanical and electrical specifications for the dipoles.</p>
---	---

Frequency	L (mm)	h (mm)	d (mm)
835MHz	161.0	89.8	3.6
900 MHz	149.0	83.3	3.6
1800MHz	72	41.7	3.6
2000MHz	64.5	37.5	3.6
2450MHz	51.5	30.4	3.6
2600MHz	48.5	28.8	3.6

6.2.2. System Check Result

System Performance Check at 835MHz & 900 MHz & 1800MHz & 2000MHz & 2450MHz & 2600MHz								
Validation Kit SN29/15 DIP 0G835-383&SN 15/16DIP 0G900-400 & SN 29/15DIP 1G800-387 & SN 29/15DIP 2G000-390& SN 29/15DIP 2G450-393 & SN22/16 DIP 2G600-407								
Frequency [MHz]	Target Value(W/Kg)		Reference Result ($\pm 10\%$)		Normalized to 1W(W/Kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
835	10.04	6.43	9.036-11.044	5.787 -7.073	9.48	6.15	20.9	June 28,2019
900	10.99	6.88	9.891-12.089	6.192-7.568	11.25	7.20	21.8	July 01,2019
1800	37.43	19.88	33.687-41.173	17.892-21.868	37.28	20.36	21.1	June 29,2019
2000	43.15	21.41	38.835-47.465	19.269-23.551	42.82	21.82	21.6	June 27,2019
2450	54.53	24.30	49.077-59.983	21.87-26.730	51.76	23.99	20.9	June 26,2019
2600	53.26	23.87	47.934-58.586	21.483-26.257	51.09	23.66	21.2	July 02,2019
835	10.04	6.43	9.036-11.044	5.787 -7.073	10.92	6.90	20.9	June 28,2019
900	10.99	6.88	9.891-12.089	6.192-7.568	11.77	6.87	21.8	July 01,2019
1800	37.43	19.88	33.687-41.173	17.892-21.868	38.89	20.30	21.1	June 29,2019
2000	43.15	21.41	38.835-47.465	19.269-23.551	44.05	21.89	21.6	June 27,2019
2450	54.53	24.30	49.077-59.983	21.87-26.730	57.51	22.13	20.9	June 26,2019
2600	53.26	23.87	47.934-58.586	21.483-26.257	55.17	22.08	21.2	July 02,2019

Note:

(1) We use a CW signal of 18dBm for system check, and then all SAR values are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China



Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

7. EUT TEST POSITION

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Body back and Body front.**

7.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centreline passes through two points on the front side of the DUT: the midpoint of the width w_t of the handset at the level of the acoustic output (Point A in Figure 1), and the midpoint of the width w_b at the bottom of the handset (Point B).
- (2) The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output.
- (3) The two lines intersect at Point A. Note that for many handsets, Point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the DUT, especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

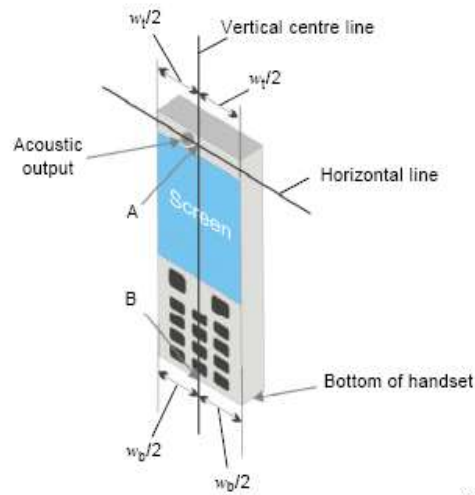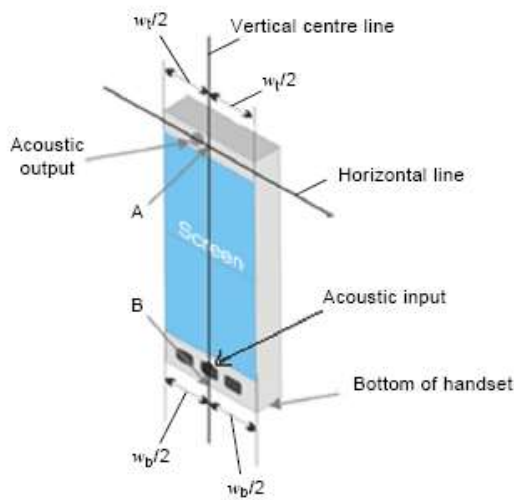

IEC

7.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost





7.3. Tilt Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.



7.4. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **5mm**.

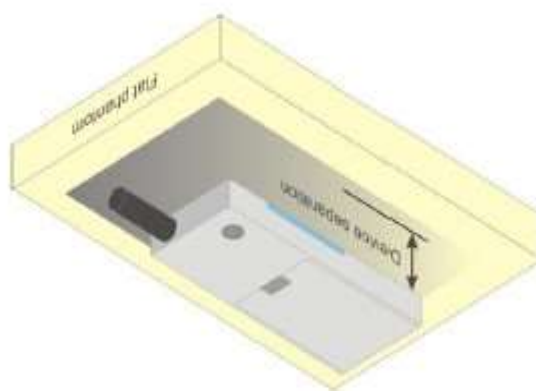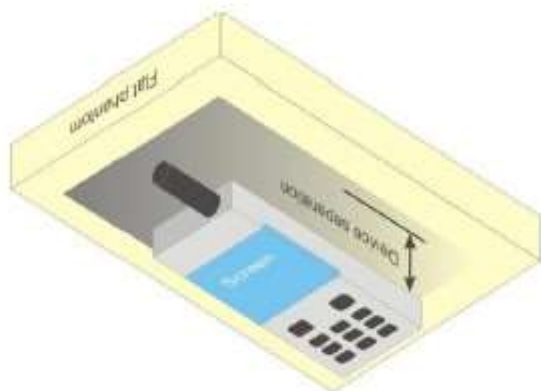

8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (10 g cube tissue for brain or body)	2.00
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.00

Note:

These limits are derived from EN50360 "Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields" and EN50566 "Product standard to demonstrate compliance of radio frequency fields from handheld and body-mounted wireless communication devices used by the general public"



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

9. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	MVG	SN 22/12 EP159	Aug. 08,2018	Aug. 07,2019
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Phantom	SATIMO	ELLI39	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	Agilent-8960	GB46310822	Feb. 27,2019	Feb. 26,2020
Comm Tester	R&S- CMW500	S/N121209	Jul. 12,2018	Jul. 11,2019
Multimeter	Keithley 2000	4114939	Sep 20,2018	Sep 19,2019
Dipole	SATIMO SID835	SN29/15 DIP 0G835-383	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID900	SN15/16 DIP 0G900-400	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID1800	SN29/15 DIP 1G800-387	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID2000	SN 29/15DIP 2G000-390	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID2450	SN29/15 DIP 2G450-393	Jul. 05,2016	Jul. 04,2019
Dipole	SATIMO SID2600	SN22/16 DIP 2G600-407	Jul. 05,2016	Jul. 04,2019
Signal Generator	Agilent-E4438C	US41461365	Nov. 01,2018	Oct. 31,2019
Vector Analyzer	Agilent / E4440A	US41421290	Feb. 27,2019	Feb. 26,2020
Network Analyzer	Rhode & Schwarz ZVL6	SN 101443	Nov. 01,2018	Oct. 31,2019
Attenuator	Warison /WATT-6SR1211	S/N:WRJ34AYM2F 1	June 11,2019	June 10, 2020
Attenuator	Mini-circuits / VAT-10+	31405	June 11,2019	June 10, 2020
Amplifier	EM30180	SN060552	Feb. 27,2019	Feb. 26,2020
Directional Couple	Werlatone/ C5571-10	SN99463	Jun. 12,2019	Jun. 11,2020
Directional Couple	Werlatone/ C6026-10	SN99482	Jun. 12,2019	Jun. 11,2020
Power Sensor	NRP-Z21	1137.6000.02	Sep. 20,2018	Sep. 19,2019
Power Sensor	NRP-Z23	US38261498	Feb. 19,2019	Feb. 18,2020
Power Viewer	R&S	V2.3.1.0	N/A	N/A

Note: Per EN62209-1/2 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

10. MEASUREMENT UNCERTAINTY

SATIMO Uncertainty- SN 22/12 EP159- SAM phantom Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	Annex B	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	7.2.2.2	0.579	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.24	0.24	∞
Hemispherical Isotropy	7.2.2.2	0.813	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.33	0.33	∞
Boundary effect	7.2.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.2.3	1.26	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	7.2.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	7.2.2.7	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	7.2.10	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related									
Test sample positioning	7.2.5.3	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	7.2.5.2	3	N	1	1	1	3	3	∞
SAR drift measurement	7.2.8	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	7.2.11	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				9.807	9.608	
Expanded Uncertainty (95% Confidence interval)			K=2				19.614	19.216	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SATIMO Uncertainty- SN 22/12 EP159 - SAM phantom System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	Annex B	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	7.2.2.2	0.579	R	$\sqrt{3}$	1	1	0.33	0.33	∞
Hemispherical Isotropy	7.2.2.2	0.813	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	7.2.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.2.3	1.26	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	7.2.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	7.2.2.7	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	7.2.10	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source									
Deviation of experimental dipole from numerical dipole	7.2.12	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	7.2.8	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	7.2.13	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				9.731	9.528	
Expanded Uncertainty (95% Confidence interval)			K=2				19.462	19.057	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SATIMO Uncertainty- SN 22/12 EP159 - SAM phantom System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	Table 13 note a	0.5	N	1	1	1	0.50	0.50	∞
Axial Isotropy	7.2.2.2	0.579	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	7.2.2.2	0.813	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	7.2.2.5	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	7.2.2.3	1.26	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	7.2.2.6	0.021	N	1	0	0	0.00	0.00	∞
Response Time	7.2.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	7.2.10	2.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System check source									
Deviation between experimental dipoles	7.2.12	2.0	N	1	1	1	2.00	2.00	∞
Input power and SAR drift measurement	7.2.8	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	7.2.13	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				5.564	5.205	
Expanded Uncertainty (95% Confidence interval)			K=2				11.128	10.410	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SATIMO Uncertainty- SN 22/12 EP159 - ELLI 39 Phantom Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	Annex B	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	7.2.2.2	0.579	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.24	0.24	∞
Hemispherical Isotropy	7.2.2.2	0.813	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.33	0.33	∞
Boundary effect	7.2.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.2.3	1.26	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	7.2.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	7.2.2.7	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	7.2.10	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related									
Test sample positioning	7.2.5.3	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	7.2.5.2	3	N	1	1	1	3	3	∞
SAR drift measurement	7.2.8	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	7.2.11	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				9.96	9.76	
Expanded Uncertainty (95% Confidence interval)			K=2				19.92	19.53	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SATIMO Uncertainty- SN 22/12 EP159- ELLI 39 Phantom System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	Annex B	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	7.2.2.2	0.579	R	$\sqrt{3}$	1	1	0.33	0.33	∞
Hemispherical Isotropy	7.2.2.2	0.813	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	7.2.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	7.2.2.3	1.26	R	$\sqrt{3}$	1	1	0.73	0.73	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	7.2.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	7.2.2.7	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	7.2.10	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source									
Deviation of experimental dipole from numerical dipole	7.2.12	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	7.2.8	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	7.2.13	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				9.89	9.69	
Expanded Uncertainty (95% Confidence interval)			K=2				19.78	19.38	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SATIMO Uncertainty- SN 22/12 EP159- ELLI 39 Phantom System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	Table 13 note a	0.5	N	1	1	1	0.50	0.50	∞
Axial Isotropy	7.2.2.2	0.579	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	7.2.2.2	0.813	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	7.2.2.5	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	7.2.2.3	1.26	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	7.2.2.3	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	7.2.2.4	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	7.2.2.6	0.021	N	1	0	0	0.00	0.00	∞
Response Time	7.2.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	7.2.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	7.2.9	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	7.2.9	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	7.2.3.1	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	7.2.3.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	7.2.10	2.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System check source									
Deviation between experimental dipoles	7.2.12	2.0	N	1	1	1	2.00	2.00	∞
Input power and SAR drift measurement	7.2.8	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	7.2.13	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom uncertainty (shape and thickness uncertainty)	7.2.4	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	7.2.7.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	7.2.6.3 7.2.6.5	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	7.2.6.6 7.2.6.5	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	7.2.6.4 7.2.6.5	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				5.83	5.49	
Expanded Uncertainty (95% Confidence interval)			K=2				11.66	10.97	



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

11. CONDUCTED POWER MEASUREMENT

Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
GSM 900	880.2	33.35	-9	24.35
	897.4	33.49	-9	24.49
	914.8	33.64	-9	24.64
GPRS 900 (1 Slot)	880.2	33.12	-9	24.12
	897.4	33.05	-9	24.05
	914.8	33.09	-9	24.09
GPRS 900 (2 Slot)	880.2	30.26	-6	24.26
	897.4	30.31	-6	24.31
	914.8	30.35	-6	24.35
GPRS 900 (3 Slot)	880.2	29.61	-4.26	25.35
	897.4	29.57	-4.26	25.31
	914.8	29.58	-4.26	25.32
GPRS 900 (4 Slot)	880.2	29.17	-3	26.17
	897.4	29.33	-3	26.33
	914.8	29.54	-3	26.54
EGPRS 900 (1 Slot)	880.2	24.89	-9	15.89
	897.4	24.74	-9	15.74
	914.8	24.71	-9	15.71
EGPRS 900 (2 Slot)	880.2	21.51	-6	15.51
	897.4	21.46	-6	15.46
	914.8	21.42	-6	15.42
EGPRS 900 (3 Slot)	880.2	19.36	-4.26	15.10
	897.4	19.41	-4.26	15.15
	914.8	19.48	-4.26	15.22
EGPRS 900 (4 Slot)	880.2	18.93	-3	15.93
	897.4	19.34	-3	16.34
	914.8	19.34	-3	16.34



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
GSM 900	880.2	33.24	-9	24.24
	897.4	33.36	-9	24.36
	914.8	33.51	-9	24.51
GPRS 900 (1 Slot)	880.2	32.98	-9	23.98
	897.4	32.92	-9	23.92
	914.8	32.97	-9	23.97
GPRS 900 (2 Slot)	880.2	30.13	-6	24.13
	897.4	30.18	-6	24.18
	914.8	30.25	-6	24.25
GPRS 900 (3 Slot)	880.2	29.46	-4.26	25.20
	897.4	29.43	-4.26	25.17
	914.8	29.49	-4.26	25.23
GPRS 900 (4 Slot)	880.2	29.04	-3	26.04
	897.4	29.25	-3	26.25
	914.8	29.42	-3	26.42



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
DCS1800	1710.2	31.32	-9	22.32
	1747.4	31.32	-9	22.32
	1784.8	31.25	-9	22.25
GPRS1800 (1 Slot)	1710.2	29.09	-9	20.09
	1747.4	29.14	-9	20.14
	1784.8	29.12	-9	20.12
GPRS1800 (2 Slot)	1710.2	26.36	-6	20.36
	1747.4	26.43	-6	20.43
	1784.8	26.47	-6	20.47
GPRS1800 (3 Slot)	1710.2	23.35	-4.26	19.09
	1747.4	23.54	-4.26	19.28
	1784.8	23.62	-4.26	19.36
GPRS1800 (4 Slot)	1710.2	23.73	-3	20.73
	1747.4	23.92	-3	20.92
	1784.8	24.00	-3	21.00
EGPRS1800 (1 Slot)	1710.2	29.33	-9	20.33
	1747.4	29.31	-9	20.31
	1784.8	29.28	-9	20.28
EGPRS1800 (2 Slot)	1710.2	26.62	-6	20.62
	1747.4	26.57	-6	20.57
	1784.8	26.59	-6	20.59
EGPRS1800 (3 Slot)	1710.2	23.21	-4.26	18.95
	1747.4	23.25	-4.26	18.99
	1784.8	23.34	-4.26	19.08
EGPRS1800 (4 Slot)	1710.2	23.55	-3	20.55
	1747.4	23.78	-3	20.78
	1784.8	23.48	-3	20.48



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Mode	Frequency(MHz)	Avg. Output Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <2>				
DCS1800	1710.2	31.17	-9	22.17
	1747.4	31.19	-9	22.19
	1784.8	31.12	-9	22.12
GPRS1800 (1 Slot)	1710.2	28.96	-9	19.96
	1747.4	29.01	-9	20.01
	1784.8	28.98	-9	19.98
GPRS1800 (2 Slot)	1710.2	26.24	-6	20.24
	1747.4	26.35	-6	20.35
	1784.8	26.36	-6	20.36
GPRS1800 (3 Slot)	1710.2	23.23	-4.26	18.97
	1747.4	23.42	-4.26	19.16
	1784.8	23.47	-4.26	19.21
GPRS1800 (4 Slot)	1710.2	23.65	-3	20.65
	1747.4	23.76	-3	20.76
	1784.8	23.84	-3	20.84

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) – 6 dB

Frame Power = Max burst power (3 Up Slot) – 4.26 dB

Frame Power = Max burst power (4 Up Slot) – 3 dB



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

UMTS BAND I

Mode	Frequency(MHz)	Avg. Output Power (dBm)
WCDMA 2100 RMC(12.2bps)	1922.4	23.75
	1950	23.94
	1977.6	23.94
HSDPA Subtest 1	1922.4	22.82
	1950	22.98
	1977.6	22.99
HSDPA Subtest 2	1922.4	22.03
	1950	22.15
	1977.6	22.26
HSDPA Subtest 3	1922.4	21.95
	1950	22.05
	1977.6	22.12
HSDPA Subtest 4	1922.4	21.95
	1950	22.10
	1977.6	22.09
HSUPA Subtest 1	1922.4	21.69
	1950	21.89
	1977.6	21.84
HSUPA Subtest 2	1922.4	21.83
	1950	21.90
	1977.6	22.10
HSUPA Subtest 3	1922.4	22.75
	1950	22.95
	1977.6	22.92
HSUPA Subtest 4	1922.4	21.21
	1950	21.36
	1977.6	21.39
HSUPA Subtest 5	1922.4	20.65
	1950	21.05
	1977.6	20.82



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

UMTS BAND VIII

Mode	Frequency (MHz)	Avg. Output Power (dBm)
WCDMA 900 RMC(12.2bps)	882.4	23.29
	897.6	23.31
	912.6	23.57
HSDPA Subtest 1	882.4	22.34
	897.6	22.30
	912.6	22.58
HSDPA Subtest 2	882.4	21.54
	897.6	21.48
	912.6	21.90
HSDPA Subtest 3	882.4	21.72
	897.6	21.60
	912.6	21.80
HSDPA Subtest 4	882.4	21.62
	897.6	21.53
	912.6	21.77
HSUPA Subtest 1	882.4	20.19
	897.6	20.06
	912.6	20.42
HSUPA Subtest 2	882.4	20.23
	897.6	20.16
	912.6	20.48
HSUPA Subtest 3	882.4	21.19
	897.6	21.14
	912.6	21.47
HSUPA Subtest 4	882.4	19.64
	897.6	19.61
	912.6	19.88
HSUPA Subtest 5	882.4	21.40
	897.6	21.47
	912.6	21.44



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1Aa: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: CM=1 for $\beta_d/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

LTE BAND

Avg. Output Power of LTE Band 1(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18025	18300	18575
5MHz	QPSK	1	0	0	24.28	24.36	24.32
			12	0	24.25	24.31	24.26
			24	0	24.18	24.37	24.33
		12	0	1	24.30	24.44	24.12
			6	1	24.27	24.39	24.07
			13	1	24.27	24.45	23.88
		25	0	1	24.20	24.37	23.82
	16QAM	1	0	1	24.10	24.24	24.28
			12	1	24.08	24.17	24.16
			24	1	24.12	24.29	24.23
		12	0	2	24.26	24.35	24.08
			6	2	24.13	24.26	24.04
			13	2	24.18	24.21	23.79
		25	0	2	24.15	24.28	23.72
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18050	18300	18550
10MHz	QPSK	1	0	0	24.17	24.21	24.29
			24	0	24.12	24.16	24.15
			49	0	24.13	24.25	24.23
		25	0	1	24.25	24.32	24.04
			12	1	24.15	24.28	24.01
			25	1	24.14	24.37	23.70
		50	0	1	24.17	24.35	23.64
	16QAM	1	0	1	24.03	24.12	24.30
			24	1	24.05	24.20	24.21
			49	1	24.06	24.19	24.08
		25	0	2	24.14	24.38	24.04
			12	2	24.12	24.24	24.03
			25	2	24.18	24.35	23.84
		50	0	2	24.16	24.21	23.79



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 1(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18075	18300	18525
15MHz	QPSK	1	0	0	23.84	23.56	23.38
			37	0	23.77	23.43	23.27
			74	0	23.85	23.55	23.45
		37	0	1	23.74	23.32	23.14
			19	1	23.82	23.54	23.22
			38	1	23.65	23.45	23.36
		75	0	1	23.86	23.56	23.45
	16QAM	1	0	1	23.75	23.48	23.39
			37	1	23.62	23.55	23.23
			74	1	23.56	23.34	23.46
		37	0	2	23.65	23.55	23.35
			19	2	23.43	23.47	23.44
			38	2	23.86	23.35	23.31
		75	0	2	23.79	23.54	23.42
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18100	18300	18500
20MHz	QPSK	1	0	0	24.04	23.70	23.60
			49	0	24.02	23.66	23.54
			99	0	24.03	23.70	23.50
		50	0	1	23.97	23.81	23.79
			25	1	23.91	23.78	23.67
			50	1	24.00	23.80	23.70
		100	0	1	23.95	23.79	23.65
	16QAM	1	0	1	23.95	23.64	23.55
			49	1	23.97	23.58	23.46
			99	1	23.86	23.67	23.34
		50	0	2	23.75	23.55	23.49
			25	2	23.84	23.44	23.55
			50	2	23.92	23.51	23.66
		100	0	2	23.86	23.62	23.48



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 3 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19207	19575	19943
1.4MHz	QPSK	1	0	0	23.71	23.62	23.56
			2	0	23.63	23.52	23.50
			5	0	23.70	23.59	23.52
		3	0	0	23.78	23.67	23.60
			1	0	23.74	23.64	23.56
			3	0	23.79	23.69	23.60
		6	0	1	23.71	23.62	23.54
	16QAM	1	0	1	23.64	23.56	23.45
			2	1	23.57	23.49	23.47
			5	1	23.65	23.45	23.32
		3	0	1	23.64	23.54	23.50
			1	1	23.62	23.58	23.42
			3	1	23.56	23.42	23.53
		6	0	2	23.68	23.56	23.47
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19215	19575	19935
3MHz	QPSK	1	0	0	22.36	22.30	22.24
			7	0	22.44	22.44	22.40
			14	0	22.55	22.45	22.25
		8	0	1	22.48	22.29	22.33
			4	1	22.54	22.32	22.27
			8	1	22.43	22.38	22.40
		15	0	1	22.45	22.37	22.39
	16QAM	1	0	1	23.51	23.47	23.33
			7	1	23.40	23.34	23.46
			14	1	23.32	23.35	23.35
		8	0	2	23.41	23.41	23.49
			4	2	23.43	23.42	23.36
			8	2	23.54	23.36	23.24
		15	0	2	23.45	23.48	23.35



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 3(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19225	19575	19925
5MHz	QPSK	1	0	0	23.72	23.62	23.54
			12	0	23.66	23.60	23.49
			24	0	23.65	23.65	23.58
		12	0	1	23.77	23.65	23.52
			6	1	23.70	23.56	23.47
			13	1	23.74	23.68	23.59
		25	0	1	23.65	23.52	23.54
	16QAM	1	0	1	23.57	23.54	23.48
			12	1	23.56	23.52	23.35
			24	1	23.60	23.59	23.46
		12	0	2	23.64	23.51	23.47
			6	2	23.68	23.48	23.36
			13	2	23.65	23.53	23.42
		25	0	2	23.59	23.46	23.45
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19250	19575	19900
10MHz	QPSK	1	0	0	23.45	23.46	23.40
			24	0	23.34	23.35	23.32
			49	0	23.46	23.44	23.36
		25	0	1	23.55	23.38	23.25
			12	1	23.42	23.47	23.38
			25	1	23.31	23.45	23.25
		50	0	1	23.40	23.31	23.46
	16QAM	1	0	1	23.36	23.22	23.31
			24	1	23.29	23.33	23.20
			49	1	23.38	23.26	23.42
		25	0	2	23.25	23.35	23.25
			12	2	23.34	23.44	23.34
			25	2	23.46	23.25	23.46
		50	0	2	23.44	23.37	23.43



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 3 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19275	19575	19875
15MHz	QPSK	1	0	0	23.34	23.42	23.46
			37	0	23.39	23.17	23.04
			74	0	23.35	23.33	23.24
		37	0	1	23.26	23.14	23.18
			19	1	23.28	23.19	23.35
			38	1	23.33	23.23	23.29
		75	0	1	23.27	23.20	23.16
	16QAM	1	0	1	23.45	23.35	23.17
			37	1	23.29	23.23	23.12
			74	1	23.47	23.34	23.16
		37	0	2	23.46	23.27	23.34
			19	2	23.38	23.16	23.29
			38	2	23.42	23.32	23.25
		75	0	2	23.40	23.34	23.16
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19300	19575	19850
20MHz	QPSK	1	0	0	23.69	23.39	23.24
			49	0	23.34	23.26	23.16
			99	0	23.51	23.39	23.27
		50	0	1	23.52	23.46	23.47
			25	1	23.44	23.37	23.32
			50	1	23.53	23.49	23.39
		100	0	1	23.45	23.41	23.26
	16QAM	1	0	1	23.17	23.26	23.18
			49	1	23.22	23.14	23.07
			99	1	23.34	23.27	23.16
		50	0	2	23.36	23.35	23.39
			25	2	23.29	23.28	23.26
			50	2	23.25	23.34	23.34
		100	0	2	23.31	23.36	23.21



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 7 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20775	21100	21425
5MHz	QPSK	1	0	0	23.19	22.13	22.35
			12	0	23.16	22.09	22.31
			24	0	22.93	22.01	22.54
		12	0	1	23.24	22.13	22.47
			6	1	23.21	22.05	22.36
			13	1	23.06	21.98	22.58
		25	0	1	23.04	21.87	22.47
	16QAM	1	0	1	23.10	22.04	22.26
			12	1	23.07	22.01	22.21
			24	1	22.86	21.99	22.14
		12	0	2	23.15	22.08	22.35
			6	2	23.14	22.02	22.29
			13	2	22.93	21.85	22.47
		25	0	2	22.97	21.76	22.35
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20800	21100	21400
10MHz	QPSK	1	0	0	22.99	22.10	22.28
			24	0	22.96	22.06	22.25
			49	0	22.81	21.84	22.42
		25	0	1	23.03	22.02	22.36
			12	1	23.07	21.87	22.25
			25	1	22.65	21.93	22.51
		50	0	1	22.74	21.82	22.43
	16QAM	1	0	1	22.87	22.03	22.31
			24	1	22.84	22.01	22.29
			49	1	22.79	22.00	22.48
		25	0	2	22.96	22.09	22.37
			12	2	22.91	22.04	22.32
			25	2	22.60	21.78	22.46
		50	0	2	22.72	21.85	22.31



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 7 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20825	21100	21375
15MHz	QPSK	1	0	0	22.91	22.14	21.71
			37	0	22.86	22.05	21.64
			74	0	22.32	21.43	22.18
		37	0	1	22.86	22.12	21.85
			19	1	22.79	22.09	21.79
			38	1	22.45	21.56	22.24
		75	0	1	22.38	21.48	22.21
	16QAM	1	0	1	22.75	22.17	21.76
			37	1	22.64	22.12	21.69
			74	1	22.15	21.53	22.15
		37	0	2	22.82	22.21	21.87
			19	2	22.73	22.14	21.76
			38	2	22.36	21.65	22.12
		75	0	2	22.39	21.53	22.10
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20850	21100	21350
20MHz	QPSK	1	0	0	22.99	22.29	21.81
			49	0	22.94	22.27	21.74
			99	0	22.39	21.66	22.21
		50	0	1	22.94	22.29	21.93
			25	1	22.88	22.25	21.84
			50	1	22.51	21.73	22.35
		100	0	1	22.47	21.69	22.27
	16QAM	1	0	1	22.87	22.16	21.53
			49	1	22.85	22.18	21.62
			99	1	22.32	21.52	22.14
		50	0	2	22.81	22.17	21.89
			25	2	22.79	22.19	21.78
			50	2	22.34	21.64	22.25
		100	0	2	22.35	21.58	22.19



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 8 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					21457	21625	21793
1.4MHz	QPSK	1	0	0	23.56	23.53	23.80
			2	0	23.41	23.51	23.75
			5	0	23.54	23.53	23.74
		3	0	0	23.54	23.60	23.80
			1	0	23.49	23.54	23.77
			3	0	23.60	23.58	23.85
		6	0	1	23.56	23.53	23.81
	16QAM	1	0	1	23.47	23.48	23.76
			2	1	23.32	23.35	23.64
			5	1	23.48	23.46	23.69
		3	0	1	23.45	23.52	23.78
			1	1	23.39	23.49	23.65
			3	1	23.56	23.41	23.80
		6	0	2	23.52	23.45	23.79
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					21465	21625	21785
3MHz	QPSK	1	0	0	23.34	23.29	23.58
			7	0	23.25	23.15	23.44
			14	0	23.16	23.21	23.57
		8	0	1	23.29	23.14	23.33
			4	1	23.38	23.29	23.52
			8	1	23.25	23.35	23.44
		15	0	1	23.43	23.26	23.65
	16QAM	1	0	1	23.36	23.13	23.58
			7	1	23.22	23.20	23.66
			14	1	23.11	23.31	23.49
		8	0	2	23.20	23.46	23.55
			4	2	23.32	23.25	23.64
			8	2	23.45	23.14	23.72
		15	0	2	23.32	23.27	23.51



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 8(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					21475	21625	21775
5MHz	QPSK	1	0	0	23.60	23.63	23.82
			12	0	23.54	23.60	23.79
			24	0	23.57	23.61	23.74
		12	0	1	23.55	23.54	23.84
			6	1	23.51	23.52	23.81
			13	1	23.65	23.66	23.77
		25	0	1	23.63	23.60	23.74
	16QAM	1	0	1	23.51	23.54	23.71
			12	1	23.48	23.56	23.68
			24	1	23.46	23.58	23.65
		12	0	2	23.42	23.49	23.79
			6	2	23.39	23.52	23.75
			13	2	23.51	23.57	23.64
		25	0	2	23.57	23.43	23.63
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					21500	21625	21750
10MHz	QPSK	1	0	0	23.57	23.58	23.82
			24	0	23.51	23.52	23.75
			49	0	23.62	23.63	23.80
		25	0	1	23.54	23.63	23.84
			12	1	23.47	23.60	23.72
			25	1	23.61	23.73	23.77
		50	0	1	23.59	23.64	23.75
	16QAM	1	0	1	23.45	23.51	23.64
			24	1	23.46	23.48	23.69
			49	1	23.57	23.53	23.72
		25	0	2	23.43	23.57	23.75
			12	2	23.41	23.46	23.68
			25	2	23.59	23.58	23.64
		50	0	2	23.40	23.45	23.63



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 20(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					24175	24300	24425
5MHz	QPSK	1	0	0	24.06	23.86	24.00
			12	0	24.01	23.75	23.98
			24	0	23.76	23.77	24.06
		12	0	1	23.63	24.03	23.78
			6	1	23.52	23.91	23.77
			13	1	23.74	23.95	23.81
		25	0	1	23.68	23.89	23.75
	16QAM	1	0	1	23.97	23.71	23.90
			12	1	23.93	23.64	23.88
			24	1	23.65	23.69	23.92
		12	0	2	23.58	23.96	23.74
			6	2	23.42	23.87	23.69
			13	2	23.67	23.83	23.72
		25	0	2	23.61	23.84	23.65
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					24200	24300	24400
10MHz	QPSK	0	0	0	23.77	23.65	23.89
			24	0	23.84	23.62	23.75
			49	0	23.55	23.58	23.88
		25	0	1	23.42	23.84	23.66
			12	1	23.56	23.75	23.64
			25	1	23.45	23.86	23.72
		50	0	1	23.54	23.83	23.67
	16QAM	0	0	1	23.86	23.73	23.74
			24	1	23.85	23.65	23.83
			49	1	23.54	23.53	23.81
		25	0	2	23.57	23.59	23.47
			12	2	23.65	23.50	23.43
			25	2	23.73	23.43	23.69
		50	0	2	23.64	23.62	23.55



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Avg. Output Power of LTE Band 20(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					24225	24300	24375
15MHz	QPSK	1	0	0	23.41	23.31	23.43
			37	0	23.36	23.28	23.35
			74	0	23.39	23.37	23.20
		37	0	1	23.48	23.65	23.74
			19	1	23.45	23.59	23.66
			38	1	23.42	23.58	23.72
		75	0	1	23.37	23.54	23.69
	16QAM	1	0	1	23.37	23.31	23.43
			37	1	23.32	23.30	23.36
			74	1	23.34	23.39	23.22
		37	0	2	23.49	23.65	23.75
			19	2	23.46	23.60	23.68
			38	2	23.42	23.54	23.71
		75	0	2	23.38	23.52	23.64
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					24250	24300	24350
20MHz	QPSK	1	0	0	23.47	23.39	23.46
			49	0	23.43	23.34	23.41
			99	0	23.45	23.43	23.25
		50	0	1	23.55	23.72	23.79
			25	1	23.50	23.69	23.75
			50	1	23.52	23.65	23.79
		100	0	1	23.47	23.61	23.72
	16QAM	1	0	1	23.35	23.32	23.36
			49	1	23.39	23.25	23.32
			99	1	23.36	23.36	23.15
		50	0	2	23.51	23.64	23.64
			25	2	23.48	23.59	23.68
			50	2	23.49	23.57	23.75
		100	0	2	23.45	23.52	23.70



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

Modulation	Maximum Power Reduction (MPR) for Power[RB]						MPR(dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	>5	>4	>8	>12	>16	>18	≤1
16QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤1
16QAM	>5	>4	>8	>12	>16	>18	≤2

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118

Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

Network Signaling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
NS_03	6.6.2.2.3.1	2,4,10, 23, 25,35,36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.3.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4.3-4	
NS_05	6.6.3.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.4.2-1	N/A
NS_07	6.6.2.2.3.3 6.6.3.3.3.2	13	10	Table 6.2.4.3-2	Table 6.2.4.3-2
NS_08	6.6.3.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_11	6.6.2.2.1 6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-9 Table 6.2.4.3-10	Table 6.2.4.3-9, Table 6.2.4.3-10
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4.3-11, Table 6.2.4.3-12, Table 6.2.4.3-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.4.2-1	N/A
	6.6.3.3.11	28	5	≥ 2	≤ 1
NS_18			10, 15, 20	≥ 1	≤ 4
NS_19			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_20			5, 10, 15, 20	Table 6.2.4.3-14	Table 6.2.4.3-14
...					
NS_20	-	-	-	-	-



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

WIFI

Mode	Data Rate (Mbps)	Channel	Frequency(MHz)	EIRP (dBm)
802.11b	1	1	2412	14.71
		2	2417	14.65
		7	2442	15.57
		12	2467	14.12
		13	2472	14.39
802.11g	6	1	2412	8.50
		7	2442	9.29
		13	2472	8.16
802.11n(20)	6.5	1	2412	8.44
		7	2442	9.36
		13	2472	8.85
802.11n(40)	13.5	3	2422	9.00
		7	2442	9.25
		11	2462	8.60

Note: For wifi RF test, there is no required about band edge; we test the power for channel 2&12 which is lower than channel 1&13; SAR need to test at low &high channel 1&13.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

12. TEST RESULTS

12.1. SAR Test Results Summary

12.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to EN62209-1, and Body SAR was performed with the device 5mm from the phantom according to EN62209-2.

12.1.2. Operation Mode

1 For GSM900, the power control is set to Maximum Power Class. For GPRS 900(GMSK, CS1), the power control level is set to Maximum Power Class. For E-GPRS 900(GMSK: MCS1, 8PSK:MCS5), the power control is set to Maximum Power Class. For DCS 1800, the power control is set to Maximum Power Class. For GPRS 1800(GMSK, CS1), the power control level is set to Maximum Power Class. For E-GPRS 1800 (GMSK: MCS1, 8PSK:MCS5), the power control level is set to Maximum Power Class.

This is a multi-slot class 12 device capable of 4 uplink timeslots. During the head SAR test, the device was transmitting with maximum 1 uplink timeslot; during the body SAR test, it was transmitting with maximum 4 uplink timeslots. Additionally, this device doesn't support dual transfer mode (DTM)

Testing with the headset was performed at the position and channels that resulted in the highest body SAR. This testing was performed with GPRS transmitting with 2/3/4 uplink timeslots. In the Body SAR test result table, body-worn means display of device down, body-front means display of device up.

2 For WCDMA, head and body SAR is tested under RMC 12.2k mode with power control set all up bits SAR for AMR is not required since its power is less than RMC. For HSDPA/HSUPA, SAR is test with its maximum power mode.

3 The following test measurement is LTE procedure:

a) Largest channel bandwidth standalone SAR test requirements

(a1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.

When the measured SAR is ≤ 1.0 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

When the measured SAR of a required test channel is > 1.80 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(a2) QPSK with 50% RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation at the worst position for 1 RB allocation in a1)

When the measured SAR is ≤ 1.0 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 50% RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.

When the measured SAR of a required test channel is > 1.80 W/kg, SAR is required for all three RB offset configurations for that required test channel.

(a3) QPSK with 100% RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation at the worst position for 1 RB&50%RB allocation in a1&a2)

When the measured SAR is ≤ 1.0 W/kg, testing of the remaining channels is not required for 100% RB



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

allocation; otherwise, SAR is required for the remaining channels and only for the highest output power for that channel.

When the measured SAR of a required test channel is $> 1.80 \text{ W/kg}$, SAR is required for low, mid, high channel.

(a4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2} \text{ dB}$ higher than the highest maximum output power in QPSK or when the measured SAR for the QPSK configuration is $> 1.8 \text{ W/kg}$.

b) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.1) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2} \text{ dB}$ higher than the highest maximum output power of the largest channel bandwidth configuration or the measured SAR of a configuration for the largest channel bandwidth is $> 1.8 \text{ W/kg}$.

4. For WIFI SAR testing, the EUT has installed WIFI engineering testing software which can provide continuous transmitting RF signal.

5. Sensors have no any influence on power level or SAR result.

6. The portion of the EUT which area scan did not scan has been off the phantom.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

12.1.3. Antenna Location: (back view)

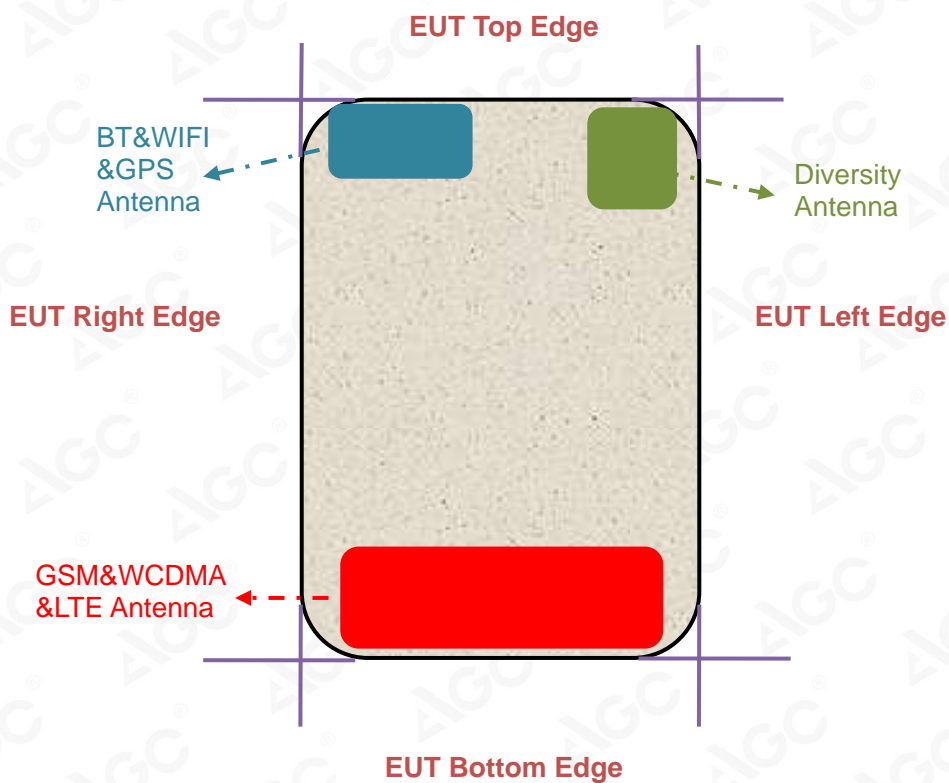

12.1.4. SAR Test Results Summary

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 47.2				
Product: Smart Phone									
Test Mode: GSM900 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/Kg)
SIM 1 Card									
Left Cheek	voice	37	897.4	1.14	0.410	33.70	33.49	0.430	2.0
Left Tilt	voice	37	897.4	-0.12	0.262	33.70	33.49	0.275	2.0
Right Cheek	voice	975	880.2	1.16	0.368	33.70	33.35	0.399	2.0
Right Cheek	voice	37	897.4	-1.15	0.448	33.70	33.49	0.470	2.0
Right Cheek	voice	124	914.8	1.18	0.470	33.70	33.64	0.477	2.0
Right Tilt	voice	37	897.4	-1.19	0.288	33.70	33.49	0.302	2.0
Body back	GPRS-4 slots	975	880.2	1.14	0.368	29.60	29.17	0.406	2.0
Body back	GPRS-4 slots	37	897.4	-1.13	0.466	29.60	29.33	0.496	2.0
Body back	GPRS-4 slots	124	914.8	1.10	0.496	29.60	29.54	0.503	2.0
Body Front	GPRS-4 slots	37	897.4	-1.15	0.425	29.60	29.33	0.452	2.0
Body back + Ear.	voice	124	914.8	1.17	0.386	33.70	33.64	0.391	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Since GPRS with 4 TX provides the highest output power, only this mode was considered for SAR assessment in body worn configuration
- Measurements for SIM Card 2 are not conducted since SIM Card 1 show the highest output power
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 51.6				
Product: Smart Phone									
Test Mode: DCS1800 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/Kg)
SIM 1 Card									
Left Cheek	voice	698	1747.4	-1.02	0.084	31.40	31.32	0.086	2.0
Left Tilt	voice	698	1747.4	-1.06	0.049	31.40	31.32	0.050	2.0
Right Cheek	voice	512	1710.2	1.05	0.098	31.40	31.32	0.100	2.0
Right Cheek	voice	698	1747.4	-1.04	0.136	31.40	31.32	0.139	2.0
Right Cheek	voice	885	1784.8	1.08	0.116	31.40	31.25	0.120	2.0
Right Tilt	voice	698	1747.4	-1.02	0.039	31.40	31.32	0.040	2.0
Body back	GPRS-4 slots	512	1710.2	1.03	1.093	24.00	23.73	1.163	2.0
Body back	GPRS-4 slots	698	1747.4	-1.07	1.085	24.00	23.92	1.105	2.0
Body back	GPRS-4 slots	885	1784.8	1.04	1.058	24.00	24.00	1.058	2.0
Body Front	GPRS-4 slots	698	1747.4	-1.01	0.971	24.00	23.92	0.989	2.0
Body back + Ear.	voice	512	1710.2	1.09	0.938	31.40	31.32	0.955	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Since GPRS with 4 TX provides the highest output power, only this mode was considered for SAR assessment in body worn configuration
- Measurements for SIM Card 2 are not conducted since SIM Card 1 show the highest output power
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 52.4				
Product: Smart Phone									
Test Mode: WCDMA Band I with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit W/kg
SIM 1 Card									
Left Cheek	RMC12.2kbps	9612	1922.4	1.35	0.222	24.00	23.75	0.235	2.0
Left Cheek	RMC12.2kbps	9750	1950	-1.32	0.212	24.00	23.94	0.215	2.0
Left Cheek	RMC12.2kbps	9888	1977.6	-1.29	0.211	24.00	23.94	0.214	2.0
Left Tilt	RMC12.2kbps	9750	1950	-1.27	0.145	24.00	23.94	0.147	2.0
Right Cheek	RMC12.2kbps	9750	1950	1.26	0.190	24.00	23.94	0.193	2.0
Right Tilt	RMC12.2kbps	9750	1950	1.34	0.102	24.00	23.94	0.103	2.0
Body back	RMC12.2kbps	9750	1950	-1.35	0.816	24.00	23.94	0.827	2.0
Body front	RMC12.2kbps	9612	1922.4	1.30	0.913	24.00	23.75	0.967	2.0
Body front	RMC12.2kbps	9750	1950	-1.21	0.843	24.00	23.94	0.855	2.0
Body front	RMC12.2kbps	9888	1977.6	-1.25	0.930	24.00	23.94	0.943	2.0
Body back	HSDPA Subtest 1	9750	1950	1.23	0.672	23.00	22.98	0.675	2.0
Body back	HSUPA Subtest 1	9750	1950	-1.24	0.672	21.90	21.89	0.674	2.0
Body front + Ear.	RMC12.2kbps	9888	1977.6	-1.26	0.833	24.00	23.94	0.845	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 47.2				
Product: Smart Phone									
Test Mode: WCDMA Band VIII with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit W/kg
SIM 1 Card									
Left Cheek	RMC12.2kbps	2788	897.6	-1.20	0.332	23.60	23.31	0.355	2.0
Left Tilt	RMC12.2kbps	2788	897.6	1.25	0.249	23.60	23.31	0.266	2.0
Right Cheek	RMC12.2kbps	2712	882.4	-1.26	0.366	23.60	23.29	0.393	2.0
Right Cheek	RMC12.2kbps	2788	897.6	1.20	0.364	23.60	23.31	0.389	2.0
Right Cheek	RMC12.2kbps	2863	912.6	-1.24	0.344	23.60	23.57	0.346	2.0
Right Tilt	RMC12.2kbps	2788	897.6	1.19	0.253	23.60	23.31	0.270	2.0
Body back	RMC12.2kbps	2712	882.4	-1.18	0.204	23.60	23.29	0.219	2.0
Body back	RMC12.2kbps	2788	897.6	1.23	0.228	23.60	23.31	0.244	2.0
Body back	RMC12.2kbps	2863	912.6	-1.20	0.204	23.60	23.57	0.205	2.0
Body front	RMC12.2kbps	2788	897.6	1.22	0.179	23.60	23.31	0.191	2.0
Body back	HSDPA Subtest 1	2788	897.6	-1.26	0.180	22.60	22.30	0.193	2.0
Body back	HSUPA Subtest 1	2788	897.6	-1.27	0.179	20.50	20.06	0.198	2.0
Body back + Ear.	RMC12.2kbps	2788	897.6	1.21	0.207	23.60	23.31	0.221	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 52.4						
Product: Smart Phone												
Test Mode: LTE Band 1												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	18100	1930	1.17	0.175	24.50	24.04	0.195	2.0
		Left Cheek	1	0	18300	1950	-1.14	0.181	24.50	23.70	0.218	2.0
		Left Cheek	1	0	18500	1970	1.19	0.160	24.50	23.60	0.197	2.0
		Left Tilt	1	0	18300	1950	-1.16	0.110	24.50	23.70	0.132	2.0
		Right Cheek	1	0	18300	1950	-1.13	0.172	24.50	23.70	0.207	2.0
		Right Tilt	1	0	18300	1950	1.20	0.072	24.50	23.70	0.087	2.0
		Body back	1	0	18300	1950	-1.21	0.678	24.50	23.70	0.815	2.0
		Body front	1	0	18100	1930	1.25	0.859	24.50	24.04	0.955	2.0
		Body front	1	0	18300	1950	1.24	1.012	24.50	23.70	1.217	2.0
		Body front	1	0	18500	1970	-1.16	0.810	24.50	23.60	0.997	2.0
		Body front+Ear.	1	0	18300	1950	-1.23	0.862	24.50	23.70	1.036	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT												
Depth of Liquid (cm):>15					Relative Humidity (%): 51.6							
Product: Smart Phone												
Test Mode: LTE Band 3												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	19575	1747.5	-1.02	0.118	23.80	23.39	0.130	2.0
		Left Tilt	1	0	19575	1747.5	1.06	0.069	23.80	23.39	0.076	2.0
		Right Cheek	1	0	19300	1720	-1.05	0.219	23.80	23.69	0.225	2.0
		Right Cheek	1	0	19575	1747.5	1.04	0.159	23.80	23.39	0.175	2.0
		Right Cheek	1	0	19850	1775	-1.03	0.212	23.80	23.24	0.241	2.0
		Right Tilt	1	0	19575	1747.5	-1.07	0.065	23.80	23.39	0.071	2.0
		Body back	1	0	19300	1720	1.08	1.288	23.80	23.69	1.321	2.0
		Body back	1	0	19575	1747.5	-1.09	1.283	23.80	23.39	1.410	2.0
		Body back	1	0	19850	1775	1.02	1.290	23.80	23.24	1.468	2.0
		Body front	1	0	19575	1747.5	-1.05	1.059	23.80	23.39	1.164	2.0
		Body back+Ear	1	0	19850	1775	1.03	1.258	23.80	23.24	1.431	2.0

Note:

- When the 10-g SAR is ≤ 1.0W/kg, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 44.3						
Product: Smart Phone												
Test Mode: LTE Band 7												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	20850	2510	-1.41	0.187	23.30	22.99	0.201	2.0
		Left Cheek	1	0	21100	2535	1.42	0.373	23.30	22.29	0.471	2.0
		Left Cheek	1	0	21350	2560	-1.40	0.196	23.30	21.81	0.276	2.0
		Left Tilt	1	0	21100	2535	1.46	0.042	23.30	22.29	0.053	2.0
		Right Cheek	1	0	21100	2535	-1.43	0.074	23.30	22.29	0.093	2.0
		Right Tilt	1	0	21100	2535	1.47	0.037	23.30	22.29	0.047	2.0
		Body back	1	0	21100	2535	-1.45	0.383	23.30	22.29	0.483	2.0
		Body front	1	0	20850	2510	1.49	0.490	23.30	22.99	0.526	2.0
		Body front	1	0	21100	2535	-1.44	0.544	23.30	22.29	0.686	2.0
		Body front	1	0	21350	2560	1.45	0.523	23.30	21.81	0.737	2.0
		Body front+Ear.	1	0	21100	2535	-1.48	0.501	23.30	22.29	0.632	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 47.2						
Product: Smart Phone												
Test Mode: LTE Band 8												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	21625	897.5	-1.30	0.356	23.90	23.58	0.383	2.0
		Left Tilt	1	0	21625	897.5	1.36	0.269	23.90	23.58	0.290	2.0
		Right Cheek	1	0	21500	885	-1.28	0.390	23.90	23.57	0.421	2.0
		Right Cheek	1	0	21625	897.5	1.26	0.387	23.90	23.58	0.417	2.0
		Right Cheek	1	0	21750	910	-1.27	0.162	23.90	23.82	0.165	2.0
		Right Tilt	1	0	21625	897.5	1.24	0.133	23.90	23.58	0.143	2.0
		Body back	1	0	21500	885	-1.30	0.353	23.90	23.57	0.381	2.0
		Body back	1	0	21625	897.5	1.29	0.358	23.90	23.58	0.385	2.0
		Body back	1	0	21750	910	-1.25	0.360	23.90	23.82	0.367	2.0
		Body front	1	0	21625	897.5	1.24	0.309	23.90	23.58	0.333	2.0
		Body back+Ear.	1	0	21750	910	-1.27	0.348	23.90	23.82	0.354	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 48.9						
Product: Smart Phone												
Test Mode: LTE Band 20												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	24300	847	1.10	0.181	24.10	23.39	0.213	2.0
		Left Tilt	1	0	24300	847	-1.12	0.132	24.10	23.39	0.155	2.0
		Right Cheek	1	0	24250	842	1.16	0.186	24.10	23.47	0.215	2.0
		Right Cheek	1	0	24300	847	-1.17	0.192	24.10	23.39	0.226	2.0
		Right Cheek	1	0	24350	852	1.14	0.212	24.10	23.46	0.246	2.0
		Right Tilt	1	0	24300	847	-1.18	0.129	24.10	23.39	0.152	2.0
		Body back	1	0	24250	842	1.15	0.214	24.10	23.47	0.247	2.0
		Body back	1	0	24300	847	-1.19	0.225	24.10	23.39	0.265	2.0
		Body back	1	0	24350	852	1.13	0.266	24.10	23.46	0.308	2.0
		Body front	1	0	24300	847	-1.12	0.189	24.10	23.39	0.223	2.0
		Body back+Ear.	1	0	24350	852	-1.15	0.236	24.10	23.46	0.273	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

WIFI Health Evaluation:

Per EN 62209-2:2010 Annex K, Test reduction based on simultaneous multi-band transmission considerations. For secondary transmitter (i.e. lower power transmitters), we use the following formula to evaluate the threshold power for the secondary transmitter that allows it to be excluded from SAR testing:

$$P_{\text{available}} = P_{\text{max},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}}$$

Where

$P_{\text{max},m}$ is the maximum threshold exclusion power level, which is calculated by $SAR_{\text{lim}} \times m$, where m is an averaging mass.

$P_{\text{available}}$ is the threshold value there need to be tested;

SAR_{lim} is the SAR limit;

SAR_1 is the maximum SAR value of first transmitter mode result;

Restrictive power threshold;

$$\begin{aligned} P_{\text{available}} &= P_{\text{th},m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}} = 20\text{mW} \times (2\text{W/Kg} - 1.468\text{ W/Kg}) / 2\text{W/Kg} \\ &= 5.32\text{mW} < 36.06\text{mW} \text{ (15.57dBm) for WIFI} \end{aligned}$$

There is need to test WIFI SAR and need to evaluate simultaneous transmission



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 46.6				
Product: Smart Phone									
Test Mode: 802.11b									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (10g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
Left Cheek	DTS	1	2412	1.06	0.145	15.60	14.71	0.178	2.0
Left Cheek	DTS	7	2442	-1.02	0.186	15.60	15.57	0.187	2.0
Left Cheek	DTS	13	2472	1.03	0.128	15.60	14.39	0.169	2.0
Left Tilt	DTS	7	2442	-1.07	0.161	15.60	15.57	0.162	2.0
Right Cheek	DTS	7	2442	-1.05	0.097	15.60	15.57	0.098	2.0
Right Tilt	DTS	7	2442	1.09	0.087	15.60	15.57	0.088	2.0
Body back	DTS	1	2412	-1.04	0.193	15.60	14.71	0.237	2.0
Body back	DTS	7	2442	1.08	0.172	15.60	15.57	0.173	2.0
Body back	DTS	13	2472	1.01	0.166	15.60	14.39	0.219	2.0
Body front	DTS	7	2442	-1.06	0.121	15.60	15.57	0.122	2.0
Body back + Ear.	DTS	1	2412	-1.03	0.185	15.60	14.71	0.227	2.0

Note:

- When the 10-g SAR is $\leq 1.0\text{W/kg}$, testing for low and high channel is optional.
- The test separation of all above table(body part) is 5mm.
- Plots are only shown for the bold marked worst case SAR results



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

BT Health Evaluation:

Per EN 62209-2:2010 Annex K, Test reduction based on simultaneous multi-band transmission considerations. For secondary transmitter (i.e. lower power transmitters), we use the following Formula to evaluate the threshold power for the secondary transmitter that allows it to be excluded from SAR testing:

$$P_{\text{available}} = P_{\text{max}_m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}}$$

Where

P_{max_m} is the maximum threshold exclusion power level, which is calculated by $SAR_{\text{lim}} \times m$, where m is an averaging mass.

$P_{\text{available}}$ is the threshold value there need to be tested;

SAR_{lim} is the SAR limit;

SAR_1 is the maximum SAR value of first transmitter mode result;

Restrictive power threshold;

$$\begin{aligned} P_{\text{available}} &= P_{\text{th}_m} \times (SAR_{\text{lim}} - SAR_1) / SAR_{\text{lim}} = 20\text{mW} \times (2\text{W/Kg} - 1.468\text{ W/Kg}) / 2\text{W/Kg} \\ &= 5.32\text{mW} > 4.94\text{mW} \text{ (6.94dBm) for BT(BR/EDR)} \\ &= 5.32\text{mW} > 0.45\text{mW} \text{ (-3.49dBm) for BT(BLE)} \end{aligned}$$

According to EN62479:2010, the maximum output power of BT(BR/EDR) is 6.94dBm (4.94mW less than 20mW) refer to ETSI EN 300328 (V2.1.1) Test report (AGC00552190601EE04) for the result of Maximum Transmit Power, which deemed to comply with the basic restrictions without testing.

According to EN62479:2010, the maximum output power of BT(BLE) is -3.49dBm (0.45mW less than 20mW) refer to ETSI EN 300328 (V2.1.1) Test report (AGC00552190601EE11) for the result of Maximum Transmit Power, which deemed to comply with the basic restrictions without testing.



Simultaneous Multi-band Transmission Evaluation:

According to EN62209-1:2016 section 6.4.3, when the handsets with multiple antennas or multiple transmitters (with single or multiple antennas), transmitting simultaneously require special test considerations;

- (1) The EUT has GSM/WCDMA/LTE antenna, BT/WIFI antenna;
- (2) BT and WIFI share one antenna, and cannot transmit simultaneously;
- (3) GSM and GPRS/WCDMA/LTE can't work at the same time;
- (4) EN 62209-1:2016 section 6.4.3.2 ,SAR measurements for non-correlated signals, Alternative 1: Summation of peak spatial-average SAR values – simplest but most conservative method to find upper bound is always applicable:
 - a) For a test combination where simultaneous operation is intended, add the peak spatial-average SAR values for each antenna and frequency band where simultaneous operation is intended
 - b) Check if the maximum summed SAR value is within 3 dB of the applicable SAR limit. If so, ensure that all of the required test frequency channels have been measured in all frequency bands and for all antennas at which simultaneous operation is intended and repeat Step a).

The maximum summed SAR value in Steps a) and b) is the combined SAR



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Simultaneous Multi-band Transmission SAR:

NO	Simultaneous state	Portable Handset	
		Head	Body-worn
1	GSM(voice)+ WIFI 2.4GHz (data)	Yes	Yes
2	GSM(Data)+ WIFI 2.4GHz (data)	Yes	Yes
3	WCDMA(RMC12.2kbps)+ WIFI 2.4GHz (data)	Yes	Yes
4	LTE+WIFI 2.4GHz (data)	Yes	Yes

Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ 10-g SAR (W/Kg)	Limit (W/Kg)
			GSM/WCDMA	WIFI		
GSM 900	Head (voice)	Left Touch	0.430	0.187	0.617	2.0
		Left Tilt	0.275	0.162	0.437	2.0
		Right Touch	0.477	0.098	0.575	2.0
		Right Tilt	0.302	0.088	0.390	2.0
	Body-worn	GPRS-4slots	0.503	0.237	0.740	2.0
		Body Front	0.452	0.122	0.574	2.0
		Earphone	0.391	0.227	0.618	2.0
DCS 1800	Head (voice)	Left Touch	0.086	0.187	0.273	2.0
		Left Tilt	0.050	0.162	0.212	2.0
		Right Touch	0.139	0.098	0.237	2.0
		Right Tilt	0.040	0.088	0.128	2.0
	Body-worn	GPRS-4slots	1.163	0.237	1.400	2.0
		Body Front	0.989	0.122	1.111	2.0
		Earphone	0.955	0.227	1.182	2.0
WCDMA Band I	Head	Left Touch	0.235	0.187	0.422	2.0
		Left Tilt	0.147	0.162	0.309	2.0
		Right Touch	0.193	0.098	0.291	2.0
		Right Tilt	0.103	0.088	0.191	2.0
	Body-worn	Body back	0.827	0.237	1.064	2.0
		Body Front	0.967	0.122	1.089	2.0
		HSDPA	0.675	0.237	0.912	2.0
		HSUPA	0.674	0.237	0.911	2.0
		Earphone	0.845	0.227	1.072	2.0
WCDMA Band VIII	Head	Left Touch	0.355	0.187	0.542	2.0
		Left Tilt	0.266	0.162	0.428	2.0
		Right Touch	0.393	0.098	0.491	2.0
		Right Tilt	0.270	0.088	0.358	2.0
	Body-worn	Body back	0.244	0.237	0.481	2.0
		Body Front	0.191	0.122	0.313	2.0
		HSDPA	0.193	0.237	0.430	2.0
		HSUPA	0.198	0.237	0.435	2.0
		Earphone	0.221	0.227	0.448	2.0



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Frequency	RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario		Σ 10-g SAR (W/Kg)	Limit (W/Kg)
			LTE	WIFI		
LTE Band 1	Head	Left Touch	0.218	0.187	0.405	2.0
		Left Tilt	0.132	0.162	0.294	2.0
		Right Touch	0.207	0.098	0.305	2.0
		Right Tilt	0.087	0.088	0.175	2.0
	Body-worn	Body back	0.815	0.237	1.052	2.0
		Body Front	1.217	0.122	1.339	2.0
		Earphone	1.036	0.227	1.263	2.0
LTE Band 3	Head	Left Touch	0.130	0.187	0.317	2.0
		Left Tilt	0.076	0.162	0.238	2.0
		Right Touch	0.225	0.098	0.323	2.0
		Right Tilt	0.071	0.088	0.159	2.0
	Body-worn	Body back	1.468	0.237	1.705	2.0
		Body Front	1.164	0.122	1.286	2.0
		Earphone	1.431	0.227	1.658	2.0
LTE Band 7	Head	Left Touch	0.471	0.187	0.658	2.0
		Left Tilt	0.053	0.162	0.215	2.0
		Right Touch	0.093	0.098	0.191	2.0
		Right Tilt	0.047	0.088	0.135	2.0
	Body-worn	Body back	0.483	0.237	0.720	2.0
		Body Front	0.737	0.122	0.859	2.0
		Earphone	0.632	0.227	0.859	2.0
LTE Band 8	Head	Left Touch	0.383	0.187	0.570	2.0
		Left Tilt	0.290	0.162	0.452	2.0
		Right Touch	0.421	0.098	0.519	2.0
		Right Tilt	0.143	0.088	0.231	2.0
	Body-worn	Body back	0.385	0.237	0.622	2.0
		Body Front	0.333	0.122	0.455	2.0
		Earphone	0.354	0.227	0.581	2.0
LTE Band 20	Head	Left Touch	0.213	0.187	0.400	2.0
		Left Tilt	0.155	0.162	0.317	2.0
		Right Touch	0.246	0.098	0.344	2.0
		Right Tilt	0.152	0.088	0.240	2.0
	Body-worn	Body back	0.308	0.237	0.545	2.0
		Body Front	0.223	0.122	0.345	2.0
		Earphone	0.273	0.227	0.500	2.0



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: June 28,2019

System Check Head 835MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System: CW; Communication System Band: D835(835.0 MHz); Duty Cycle: 1:1; Conv.F=5.29

Frequency: 835MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.92\text{mho/m}$; $\epsilon_r = 40.64$; $\rho = 1000\text{ kg/m}^3$;

Phantom section: Flat Section; Input Power=18dBm

Ambient temperature ($^{\circ}\text{C}$): 21.2, Liquid temperature ($^{\circ}\text{C}$): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 835 Head/Area Scan: Measurement grid: $dx=10\text{mm}, dy=10\text{mm}$

Configuration/System Check 835 Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

Area Scan	$dx=8\text{mm } dy=8\text{mm}, h= 5.00\text{ mm}$
ZoomScan	$5\times 5\times 7, dx=8\text{mm } dy=8\text{mm } dz=5\text{mm}$
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 835
Channels	Middle
Signal	Crest factor: 1.0

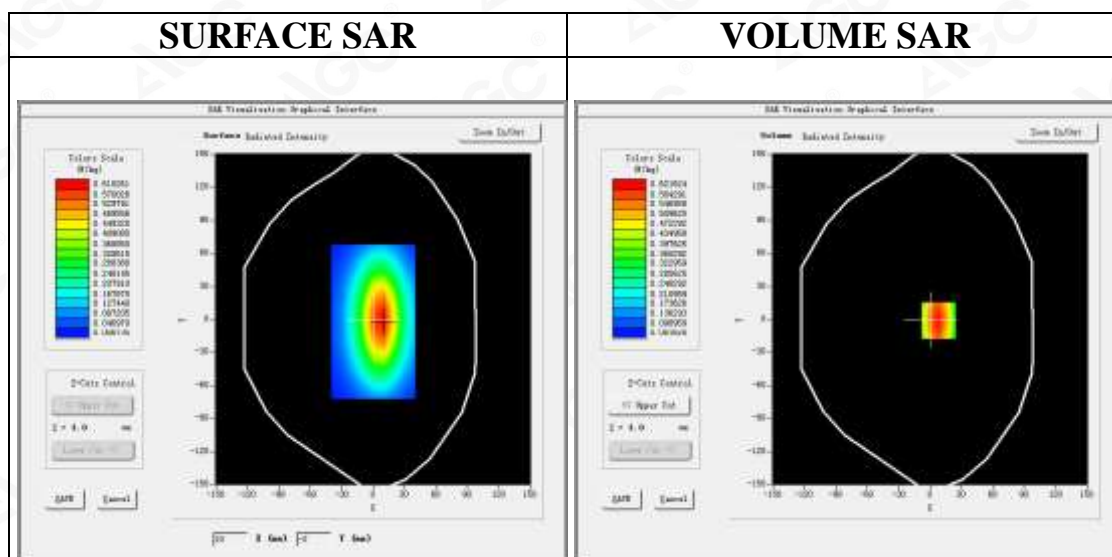

Maximum location: $X=8.00, Y=-1.00$

SAR Peak: 0.86 W/kg

SAR 10g (W/Kg)	0.387831
SAR 1g (W/Kg)	0.598081





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

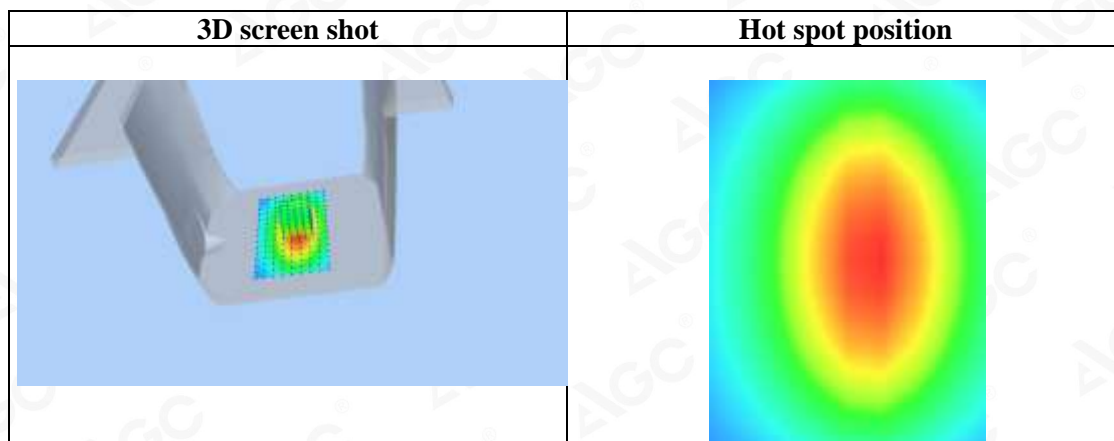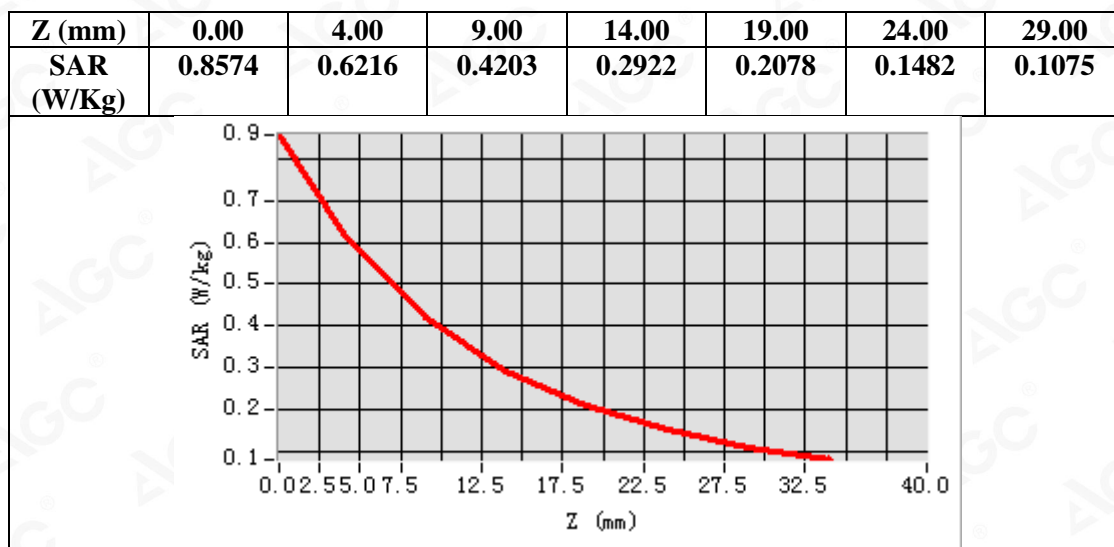

Test Laboratory: AGC Lab
System Check Head 900 MHz
DUT: Dipole 900 MHz Type: SID 900

Date: July 01,2019

Communication System: CW; Communication System Band: D900 (900.0 MHz); Duty Cycle: 1:1; Conv.F=5.26
Frequency: 900 MHz; Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 41.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.8


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 900 Head/Area Scan: Measurement grid: dx=10mm,dy=10mm

Configuration/System Check 900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 900
Channels	Middle
Signal	Crest factor: 1.0

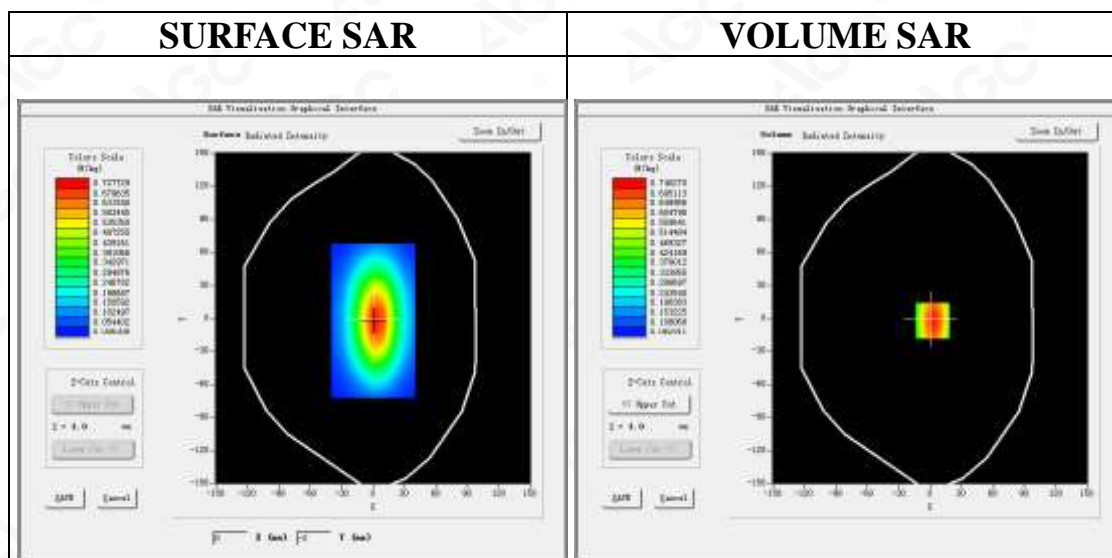

Maximum location: X=2.00, Y=-2.00

SAR Peak: 1.03 W/kg

SAR 10g (W/Kg)	0.454411
SAR 1g (W/Kg)	0.710020





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

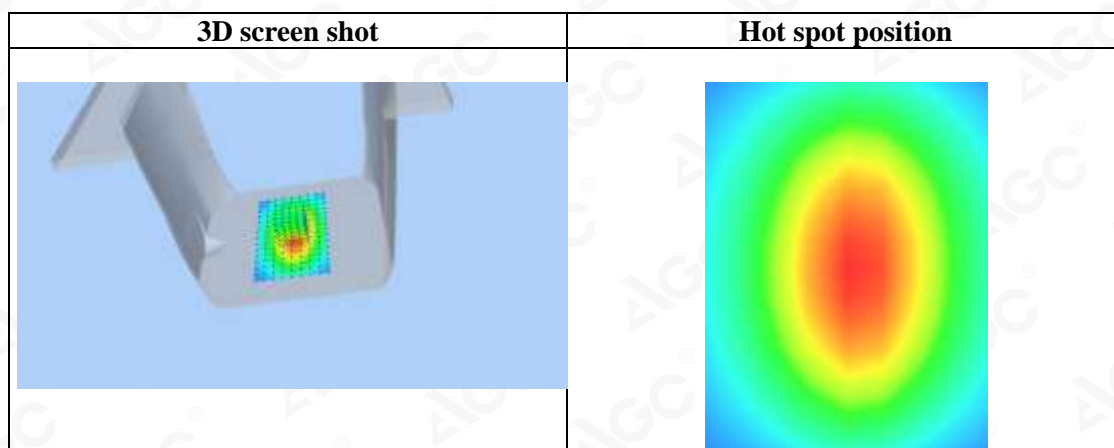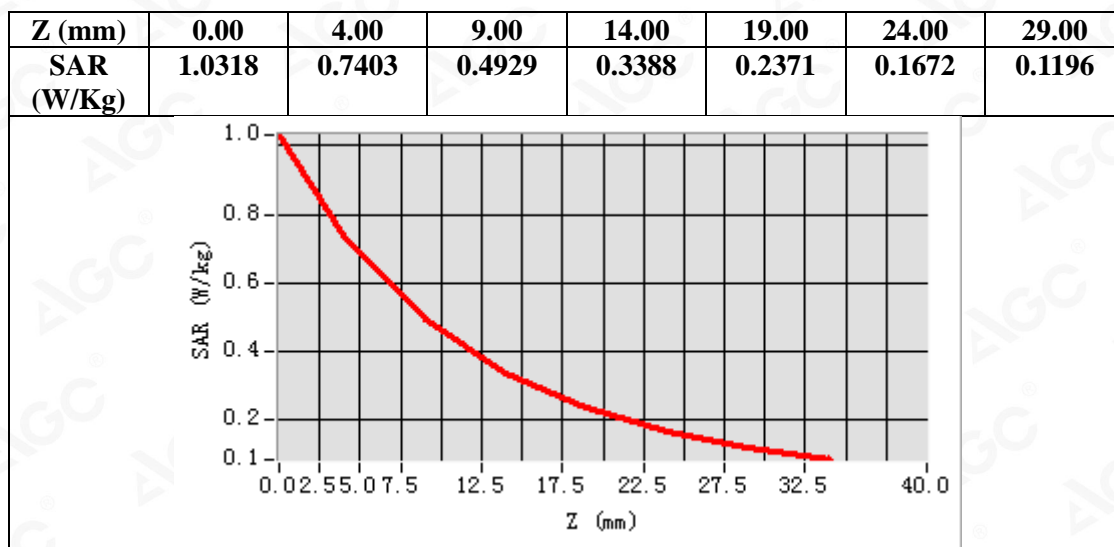

Test Laboratory: AGC Lab
System Check Head 1800MHz
DUT: Dipole 1800 MHz; Type: SID 1800

Date: June 29,2019


Communication System: CW; Communication System Band: D1800 (1800.0 MHz); Duty Cycle: 1:1; Conv.F=4.71
Frequency: 1800 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1800 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 1800 Head/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 1800
Channels	Middle
Signal	Crest factor: 1.0

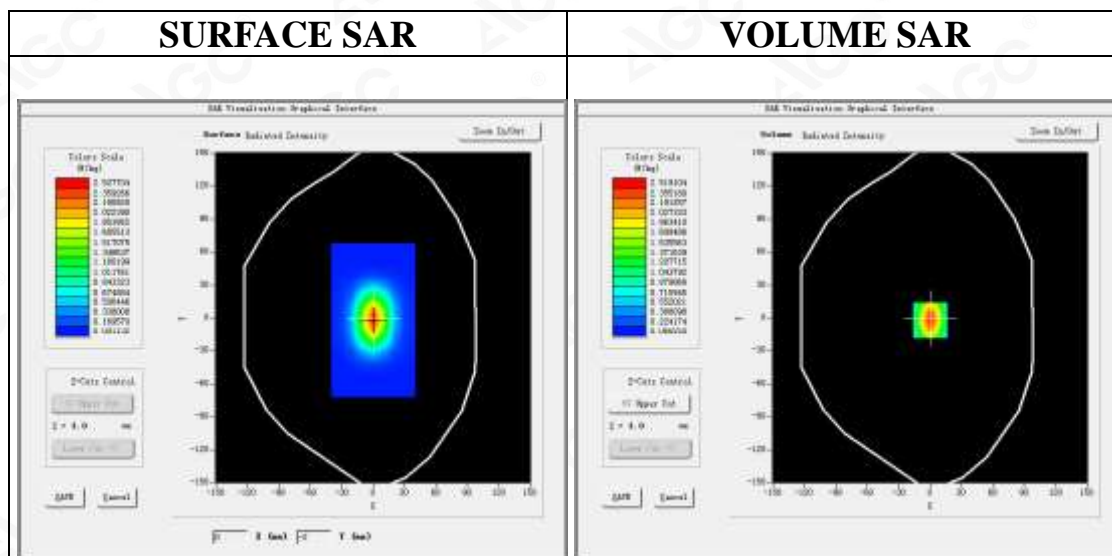

Maximum location: X=0.00, Y=-2.00

SAR Peak: 3.79 W/kg

SAR 10g (W/Kg)	1.284554
SAR 1g (W/Kg)	2.352482

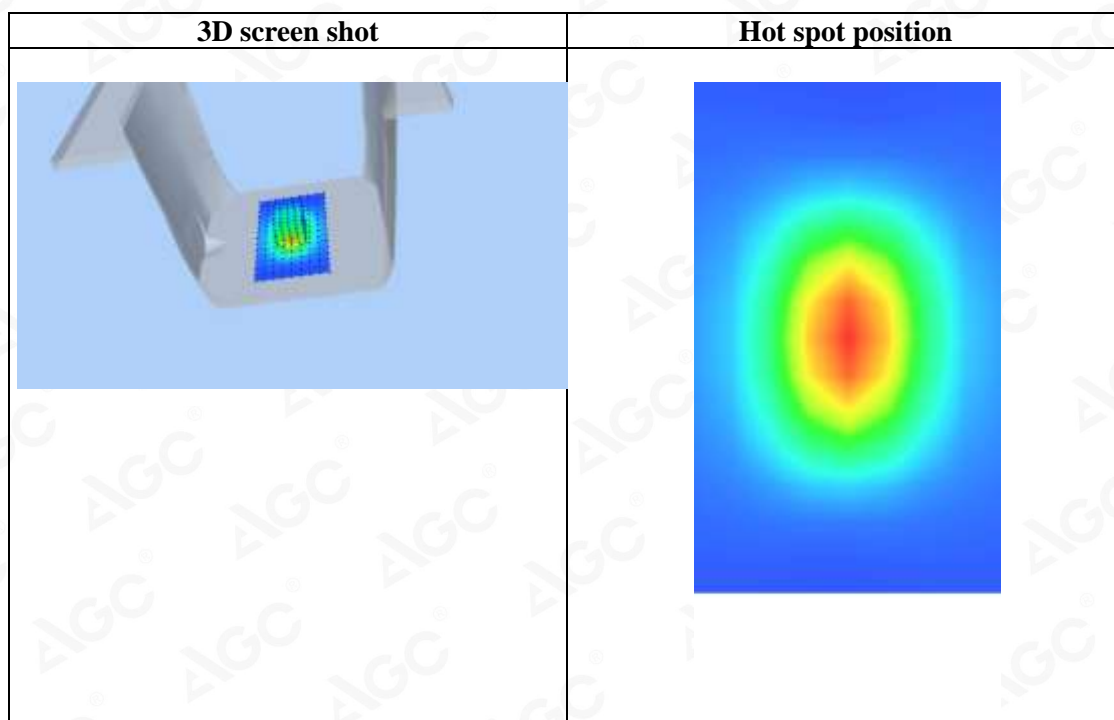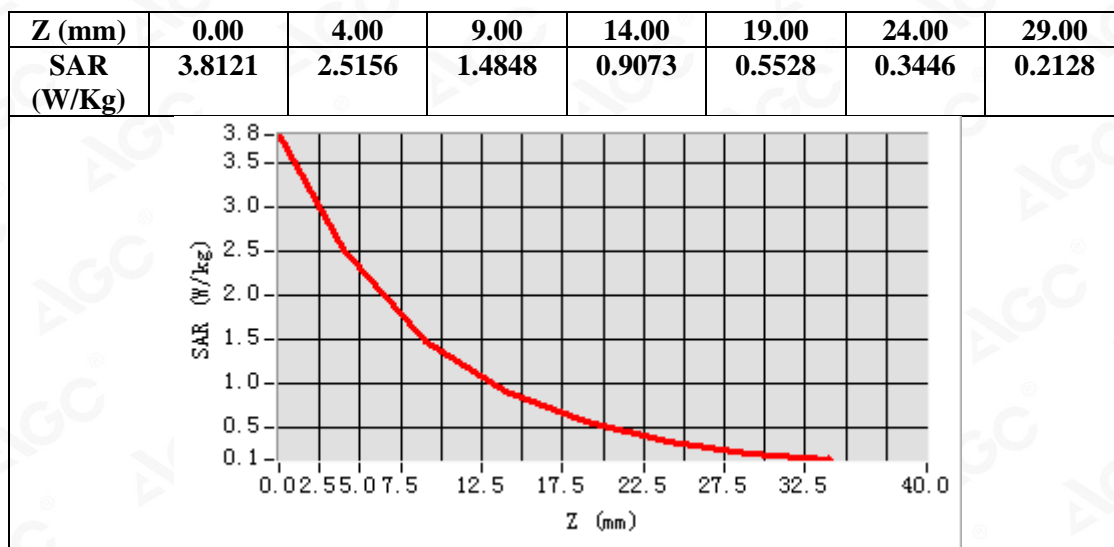

Test Laboratory: AGC Lab
System Check Head 2000MHz
DUT: Dipole 2000 MHz; Type: SID 2000

Date: June 27,2019


Communication System: CW; Communication System Band: D2000 (2000.0 MHz); Duty Cycle: 1:1; Conv.F=5.09
Frequency: 2000MHz; Medium parameters used: $f = 1950$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.9, Liquid temperature (°C): 21.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35



Configuration/System Check 2000 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2000 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 2000
Channels	Middle
Signal	Crest factor: 1.0

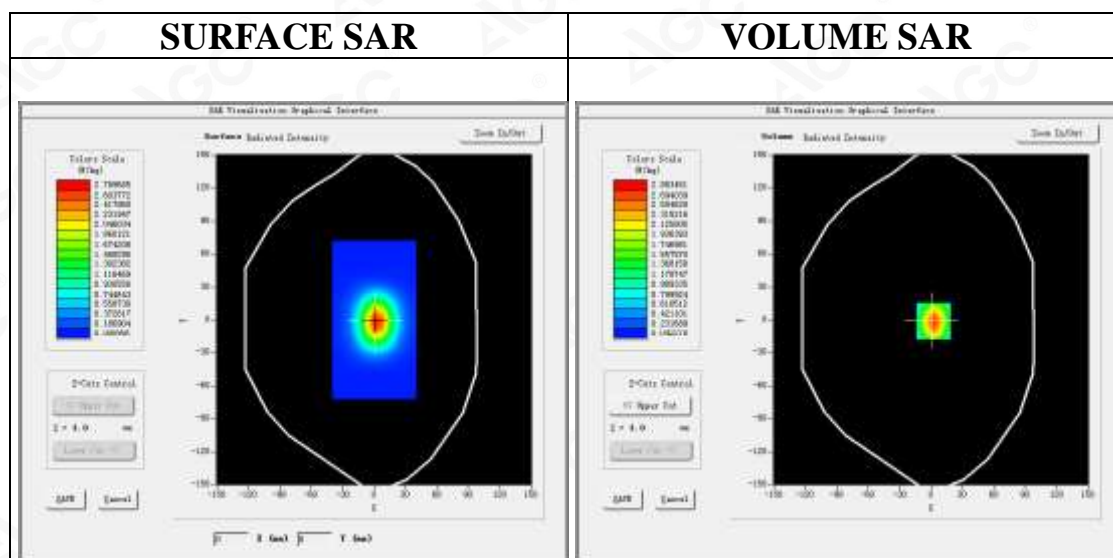

Maximum location: X=2.00, Y=-1.00
SAR Peak: 4.60 W/kg

SAR 10g (W/Kg)	1.376845
SAR 1g (W/Kg)	2.701548

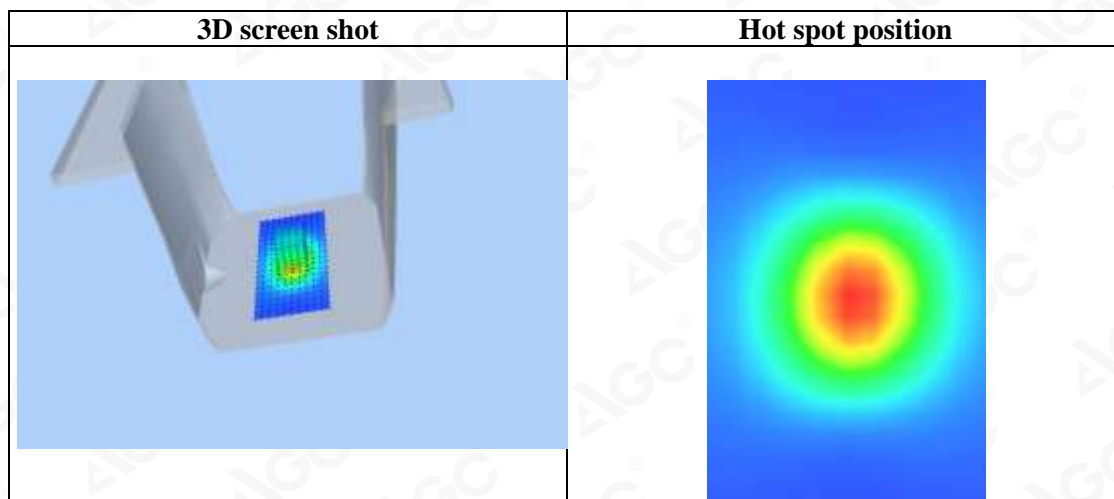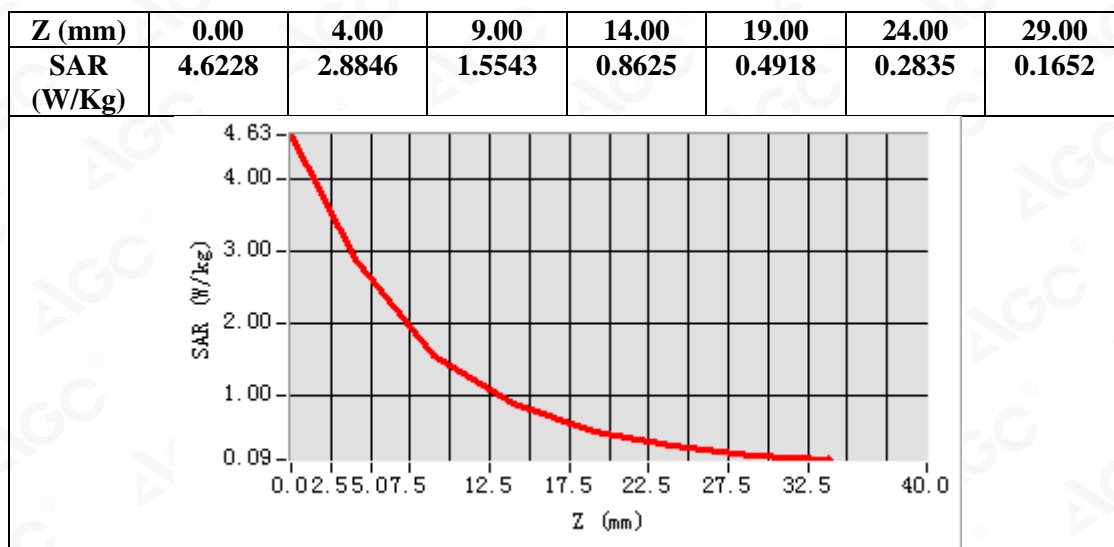

Test Laboratory: AGC Lab
System Check Head 2450 MHz
DUT: Dipole 2450 MHz Type: SID 2450

Date: June 26,2019

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.90
Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.3, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2450 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450 MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 2450
Channels	Middle
Signal	Crest factor: 1.0

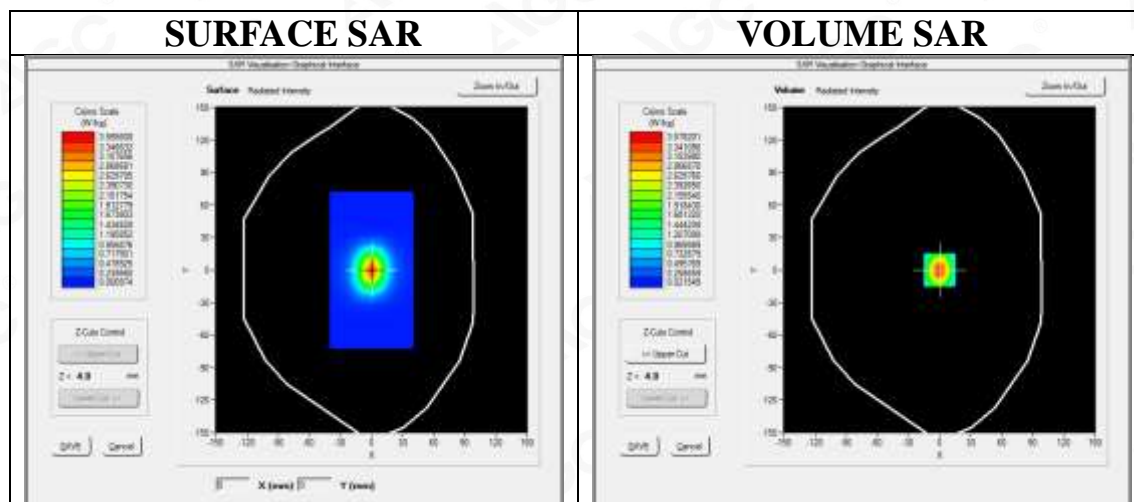

Maximum location: X=0.00, Y=0.00

SAR Peak: 5.99 W/kg

SAR 10g (W/Kg)	1.513541
SAR 1g (W/Kg)	3.265648

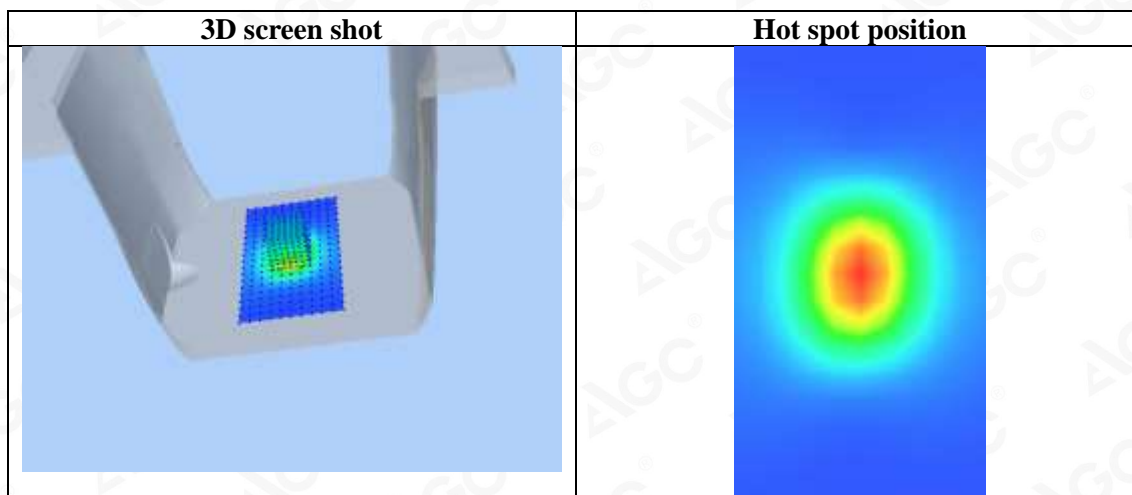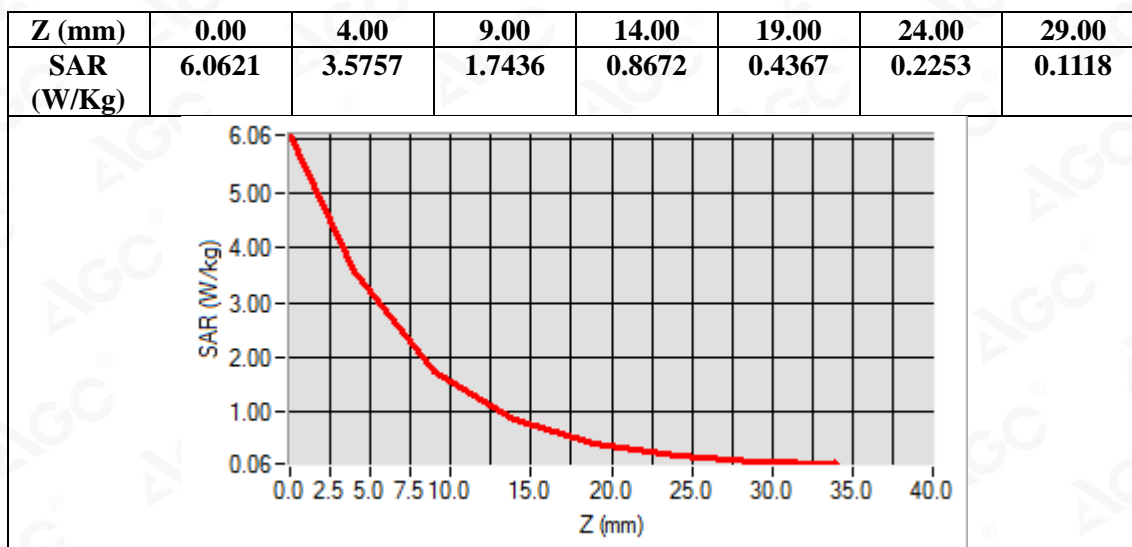

Test Laboratory: AGC Lab
System Check Head 2600MHz
DUT: Dipole 2600 MHz; Type: SID 2600

Date: July 02,2019

Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=4.57
Frequency:2600 MHz; Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.89 \text{ mho/m}$; $\epsilon_r = 39.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 21.6, Liquid temperature ($^{\circ}\text{C}$): 21.2


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	SAM twin phantom
Device Position	Flat
Band	CW 2600
Channels	Middle
Signal	Crest factor: 1.0

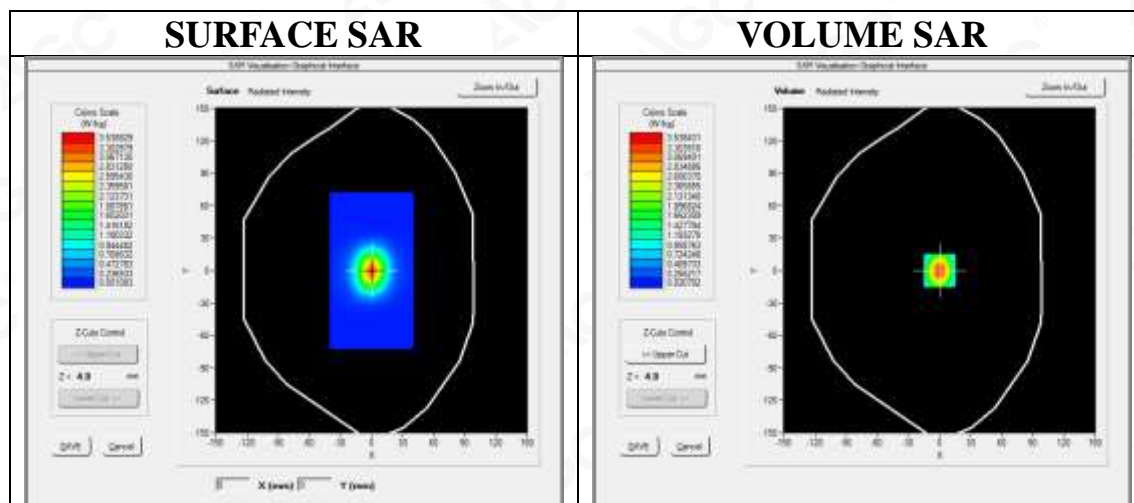

Maximum location: X=0.00, Y=0.00

SAR Peak: 5.94 W/kg

SAR 10g (W/Kg)	1.492794
SAR 1g (W/Kg)	3.223842





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

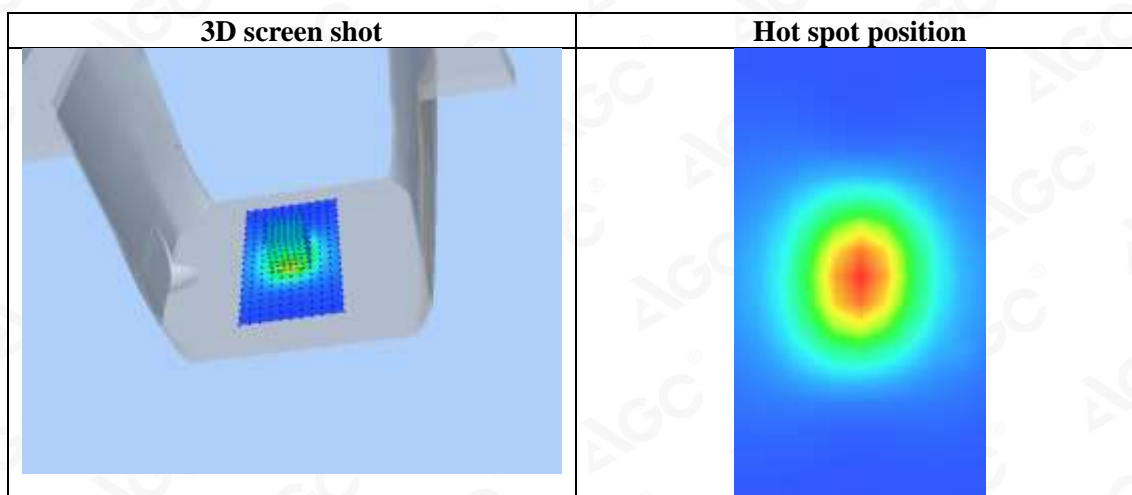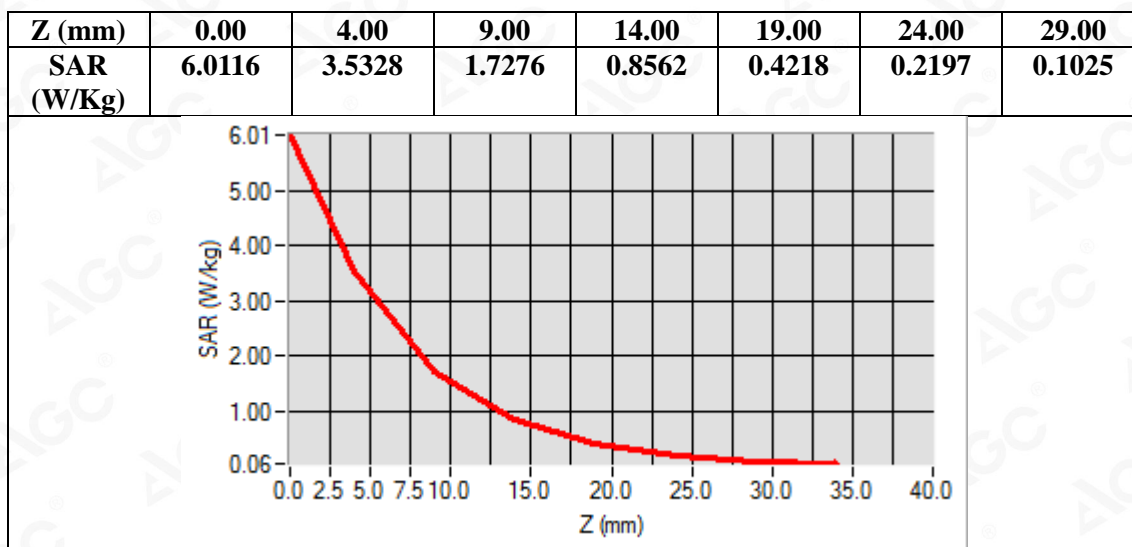

Test Laboratory: AGC Lab
System Check Head 835MHz
DUT: Dipole 835 MHz Type: SID 835

Date: June 28,2019

Communication System: CW; Communication System Band: D835(835.0 MHz); Duty Cycle: 1:1; Conv.F=5.29
Frequency: 835MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.92\text{mho/m}$; $\epsilon_r = 40.64$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 21.2, Liquid temperature ($^{\circ}\text{C}$): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 835 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 835 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 835
Channels	Middle
Signal	Crest factor: 1.0

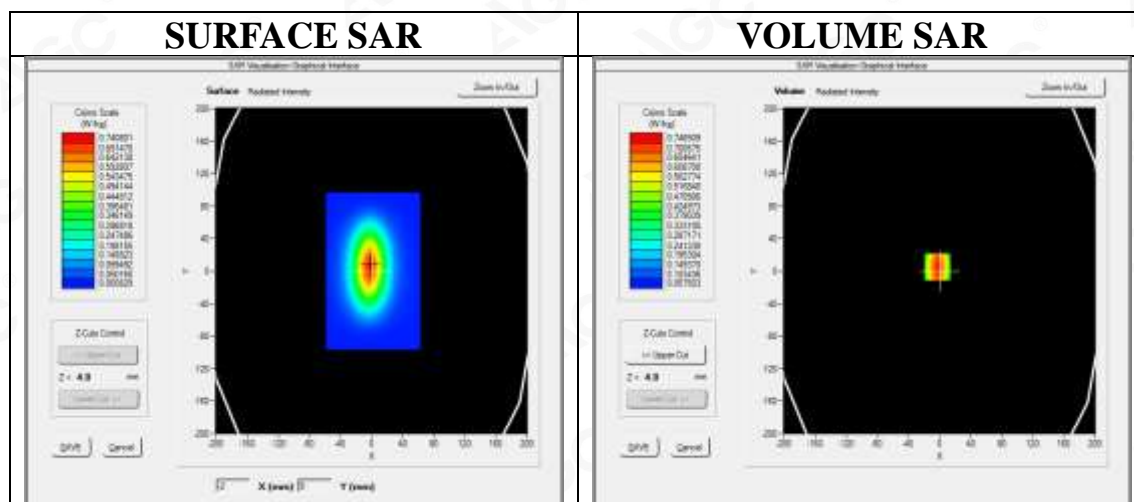

Maximum location: X=-3.00, Y=5.00

SAR Peak: 1.05 W/kg

SAR 10g (W/Kg)	0.435482
SAR 1g (W/Kg)	0.689147





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

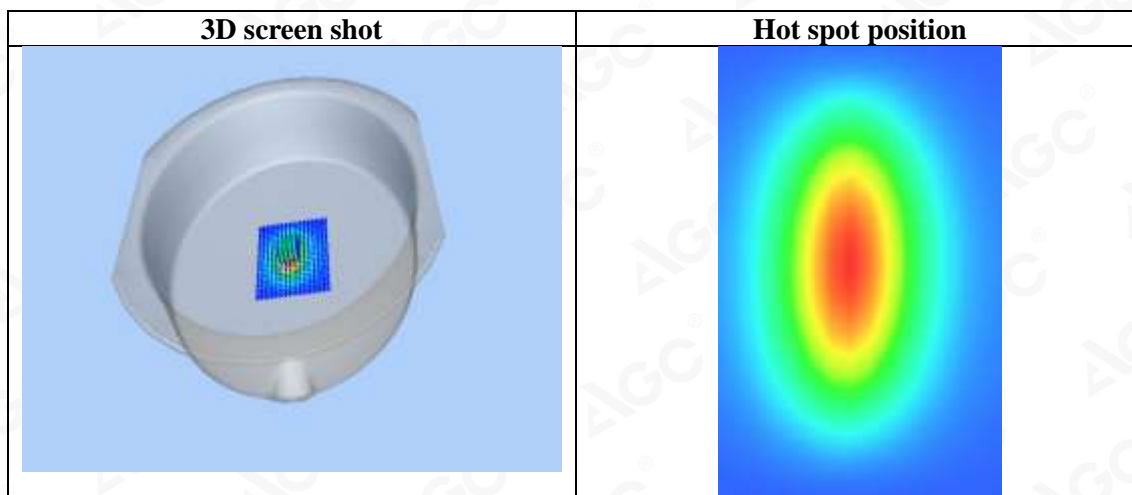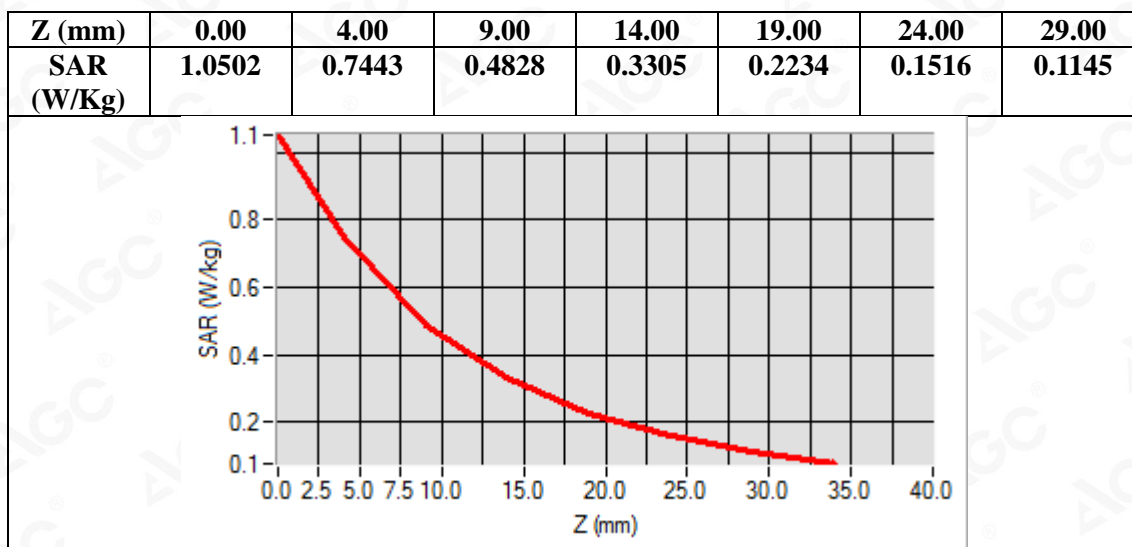

Test Laboratory: AGC Lab
System Check Head 900 MHz
DUT: Dipole 900 MHz Type: SID 900

Date: July 01,2019

Communication System: CW; Communication System Band: D900 (900.0 MHz); Duty Cycle: 1:1; Conv.F=5.26
Frequency: 900 MHz; Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 41.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.8


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 900 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 900 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 900
Channels	Middle
Signal	Crest factor: 1.0

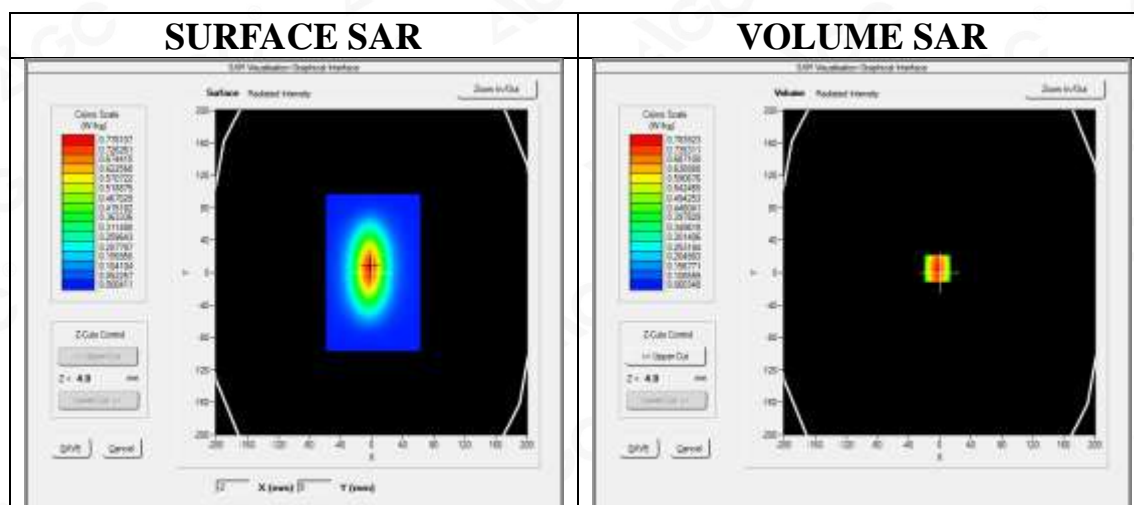

Maximum location: X=-3.00, Y=5.00

SAR Peak: 1.10 W/kg

SAR 10g (W/Kg)	0.433182
SAR 1g (W/Kg)	0.742485





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

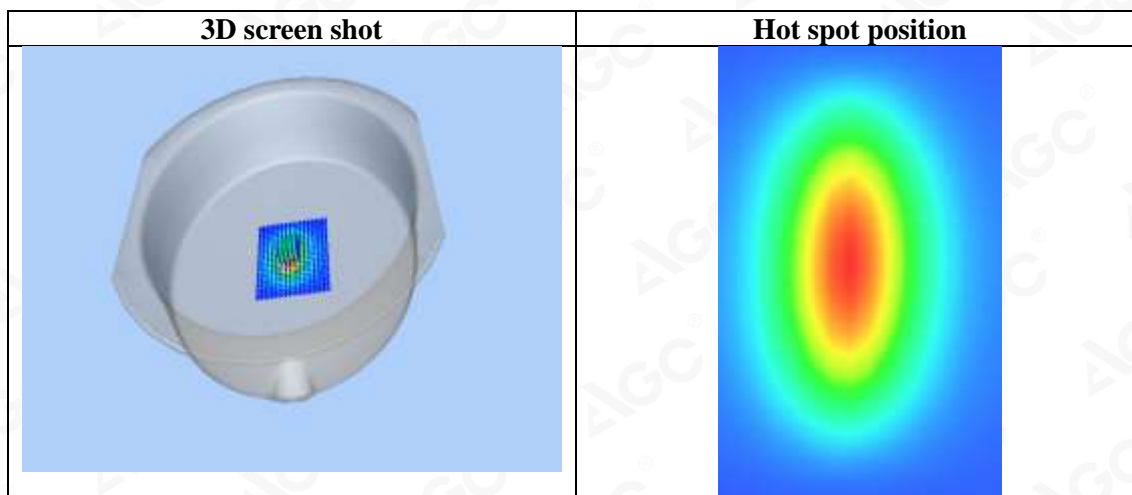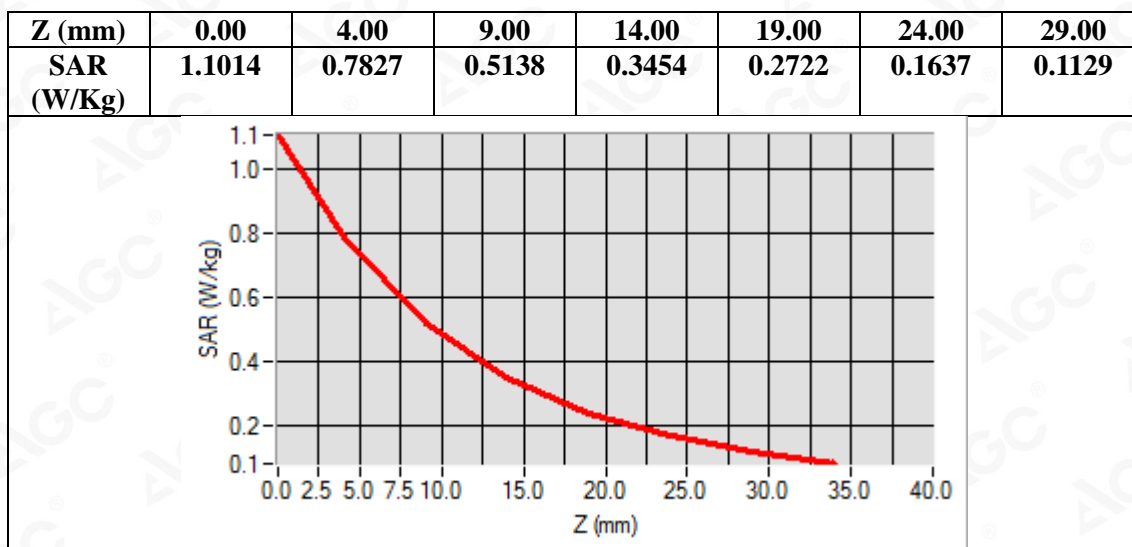

Test Laboratory: AGC Lab
System Check Head 1800MHz
DUT: Dipole 1800 MHz; Type: SID 1800

Date: June 29,2019


Communication System: CW; Communication System Band: D1800 (1800.0 MHz); Duty Cycle: 1:1; Conv.F=4.71
Frequency: 1800 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 1800 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 1800 Head/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 1800
Channels	Middle
Signal	Crest factor: 1.0

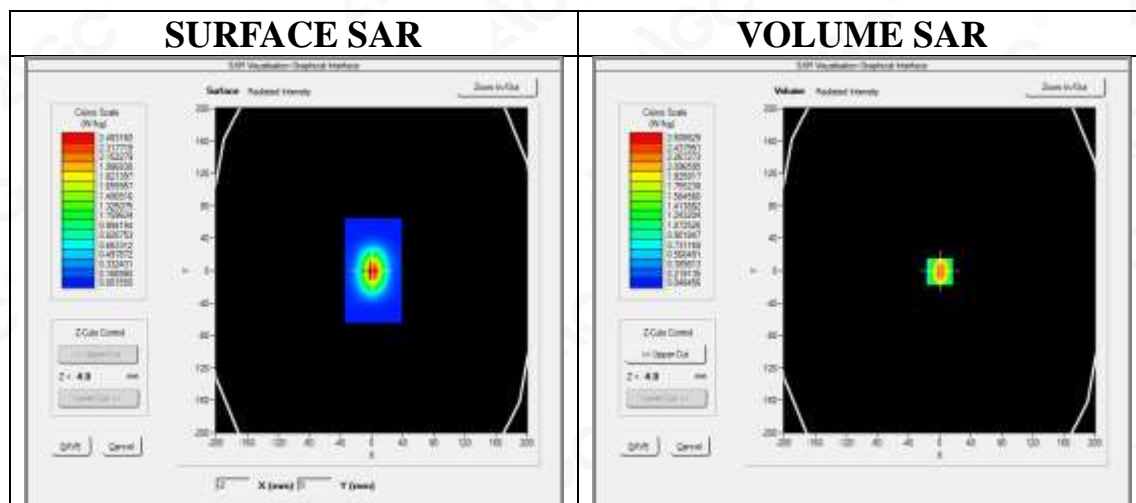

Maximum location: X=0.00, Y=-1.00

SAR Peak: 4.10 W/kg

SAR 10g (W/Kg)	1.280863
SAR 1g (W/Kg)	2.453801

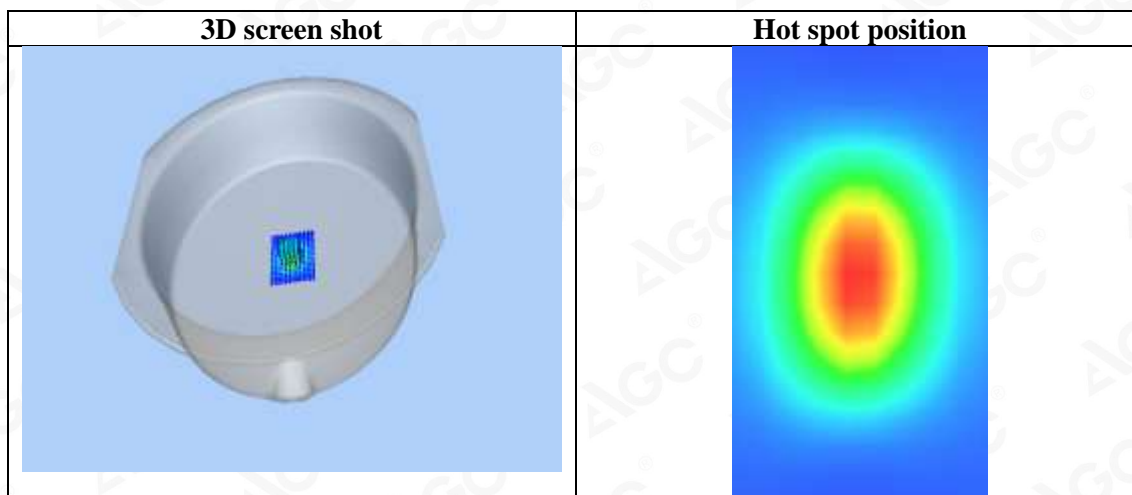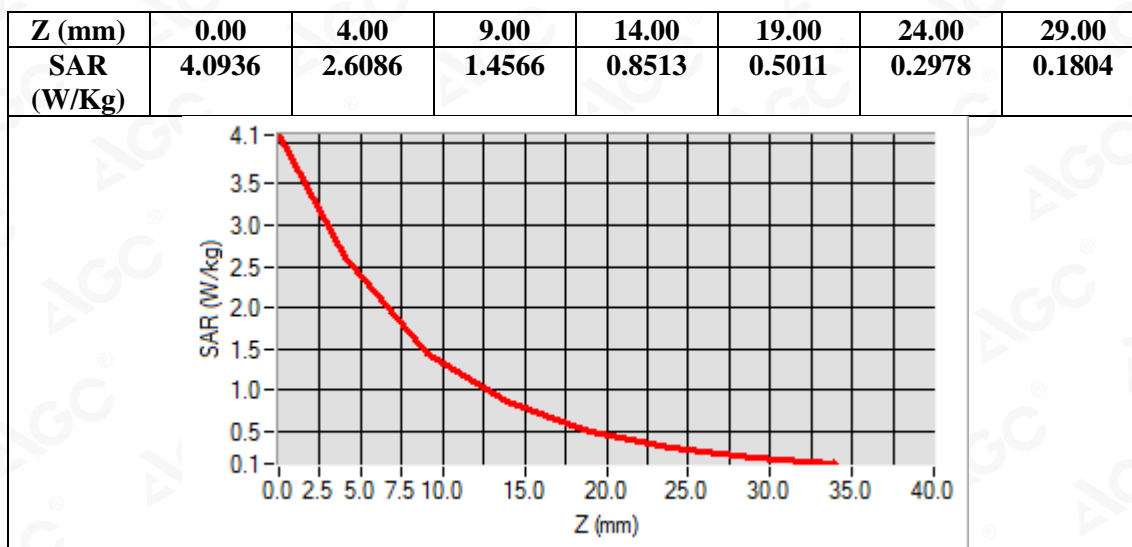

Test Laboratory: AGC Lab
System Check Head 2000MHz
DUT: Dipole 2000 MHz; Type: SID 2000

Date: June 27,2019

Communication System: CW; Communication System Band: D2000 (2000.0 MHz); Duty Cycle: 1:1; Conv.F=5.09
Frequency: 2000MHz; Medium parameters used: $f = 1950 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 21.9, Liquid temperature ($^{\circ}\text{C}$): 21.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2000 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 2000 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 2000
Channels	Middle
Signal	Crest factor: 1.0

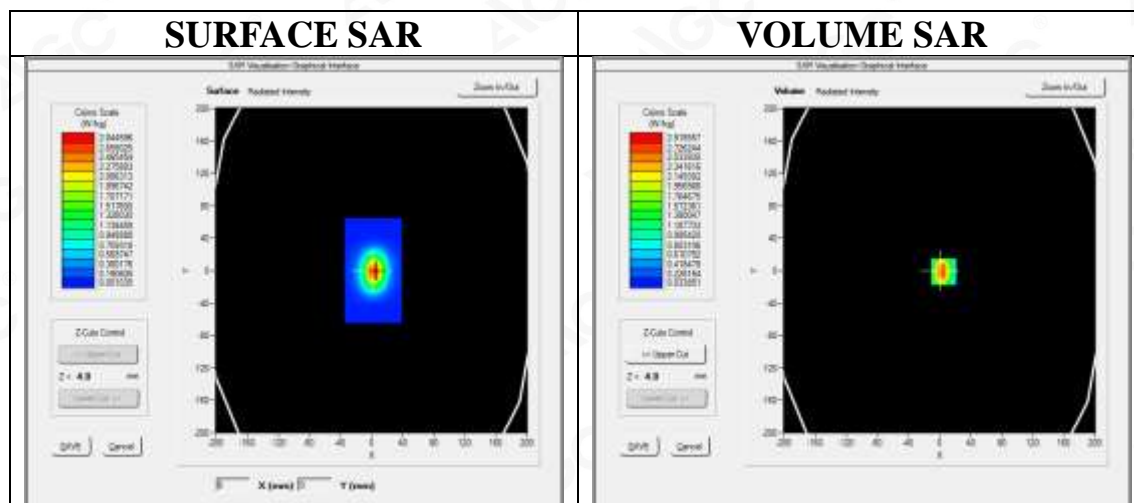

Maximum location: X=5.00, Y=-1.00

SAR Peak: 4.76 W/kg

SAR 10g (W/Kg)	1.381293
SAR 1g (W/Kg)	2.779464

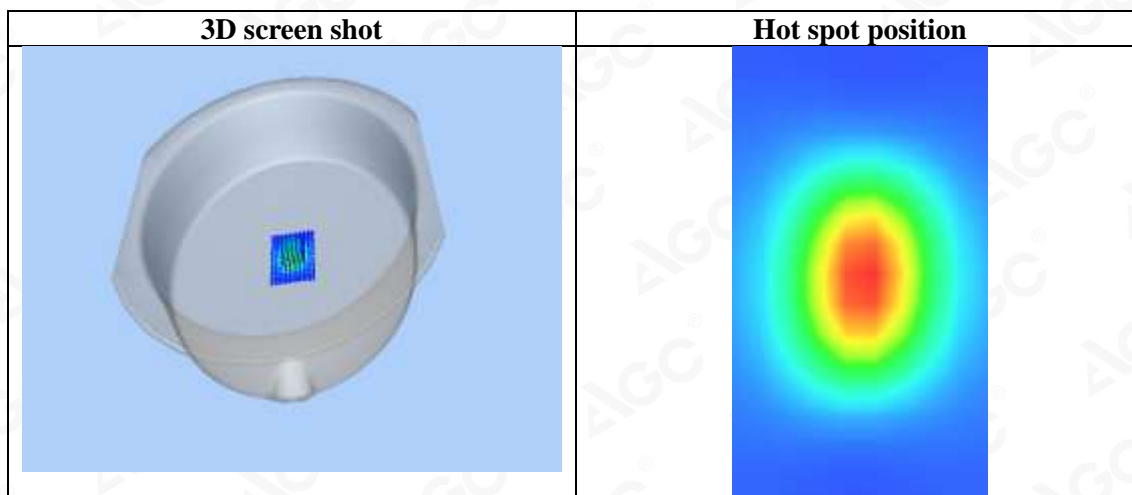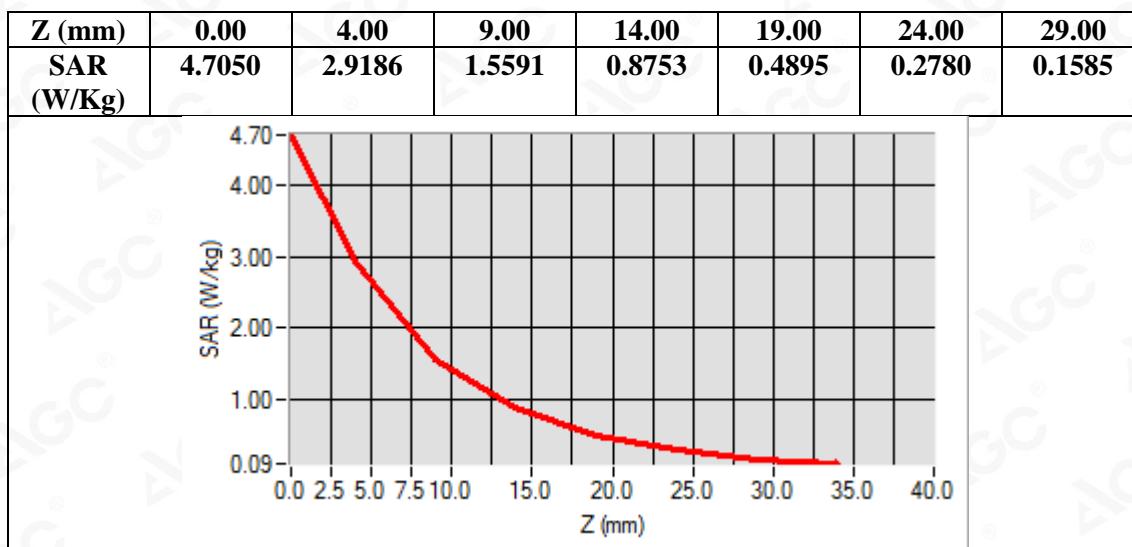

Test Laboratory: AGC Lab
System Check Head 2450 MHz
DUT: Dipole 2450 MHz Type: SID 2450

Date: June 26,2019

Communication System: CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.90
Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.3, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2450 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450 MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 2450
Channels	Middle
Signal	Crest factor: 1.0

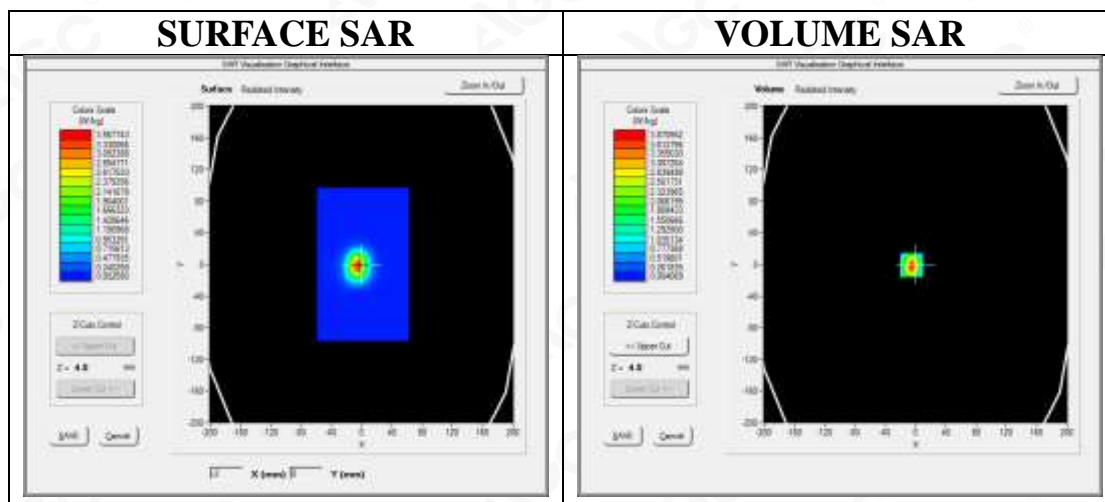

Maximum location: X=-5.00, Y=-1.00

SAR Peak: 7.90 W/kg

SAR 10g (W/Kg)	1.396151
SAR 1g (W/Kg)	3.628462





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

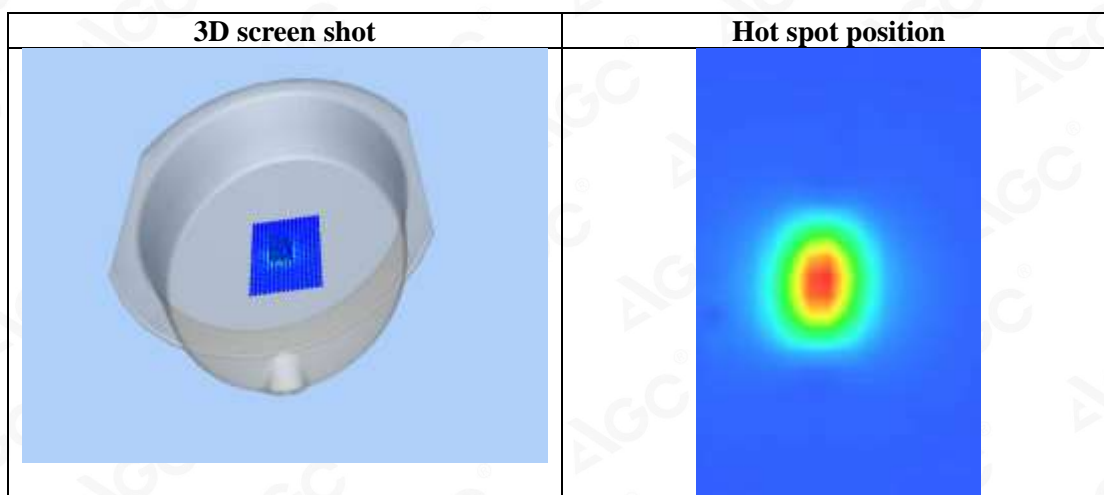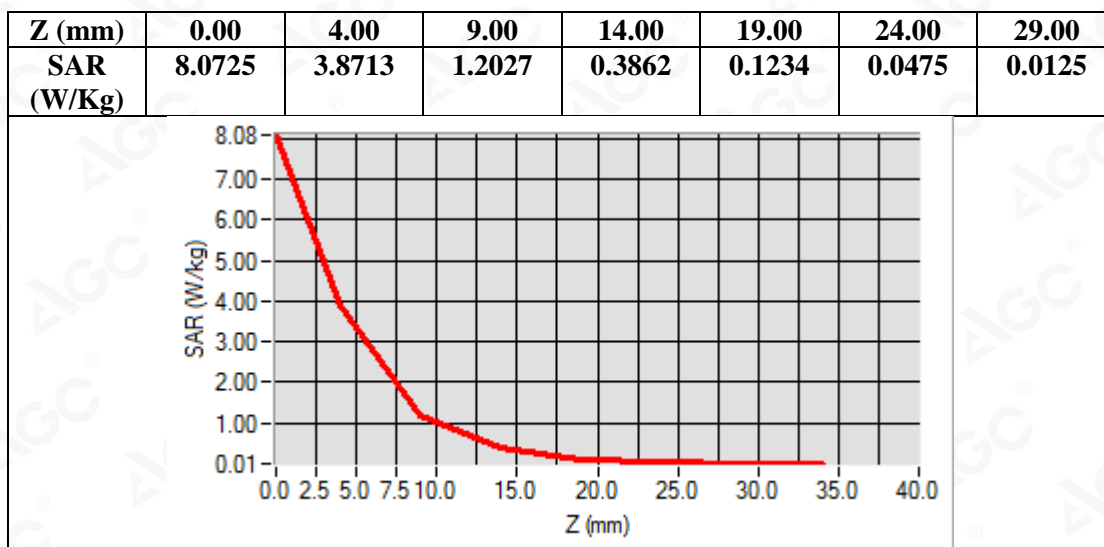

Test Laboratory: AGC Lab
System Check Head 2600MHz
DUT: Dipole 2600 MHz; Type: SID 2600

Date: July 02,2019


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=4.57
Frequency:2600 MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Flat
Band	CW 2600
Channels	Middle
Signal	Crest factor: 1.0

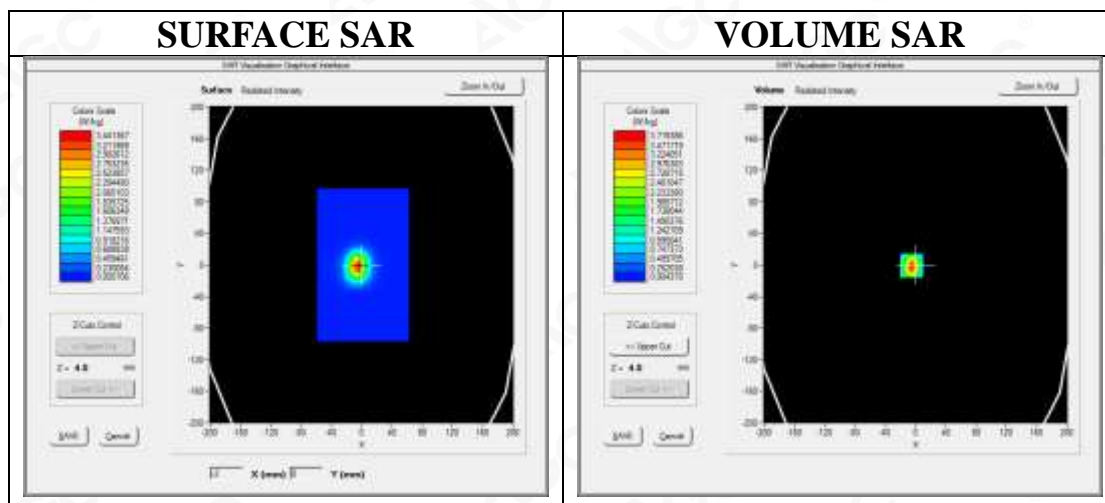

Maximum location: X=-5.00, Y=-1.00

SAR Peak: 7.59 W/kg

SAR 10g (W/Kg)	1.393251
SAR 1g (W/Kg)	3.480804





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

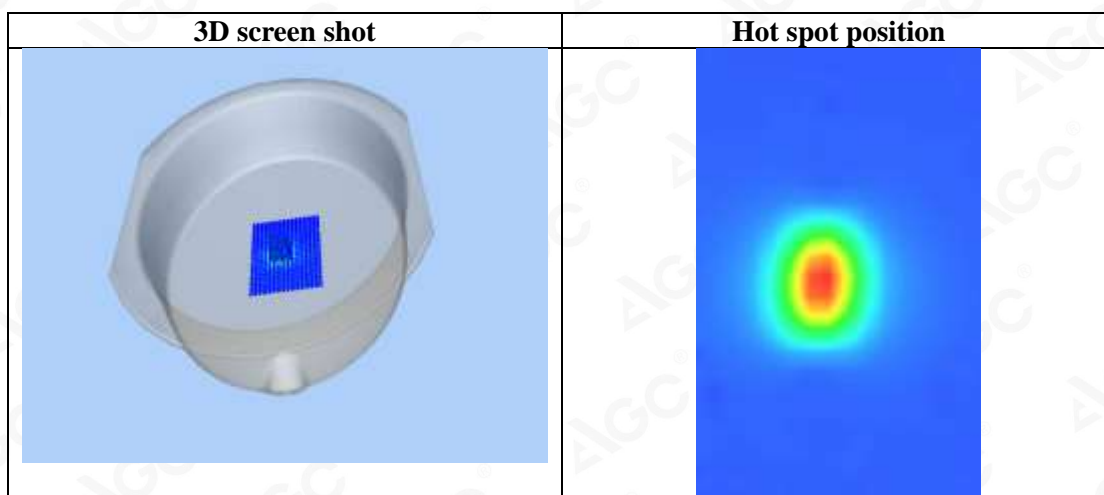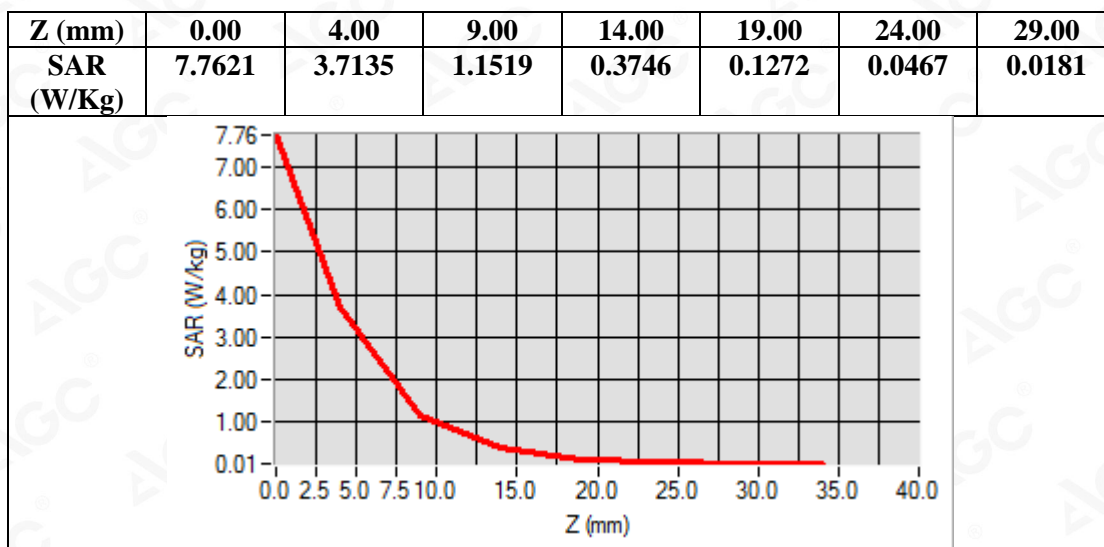

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab
GSM 900 High- Touch-Right <SIM 1>
DUT: Smart Phone; Type: R19

Date: July 01,2019


Communication System: Generic GSM; Communication System Band: GSM 900; Duty Cycle: 1: 8; Conv.F=5.26
Frequency: 914.8 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 41.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GSM 900 High- Touch-Right /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GSM 900 High- Touch-Right /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GSM 900
Channels	High
Signal	TDMA (Crest factor: 8.0)

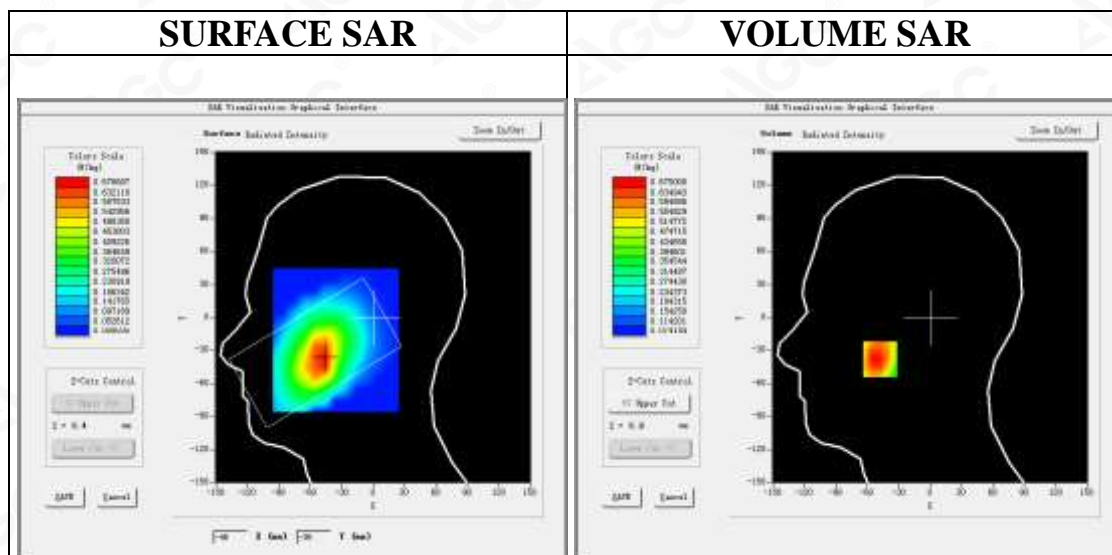

Maximum location: X=-48.00, Y=-38.00

SAR Peak: 0.95 W/kg

SAR 10g (W/Kg)	0.469507
SAR 1g (W/Kg)	0.666164





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

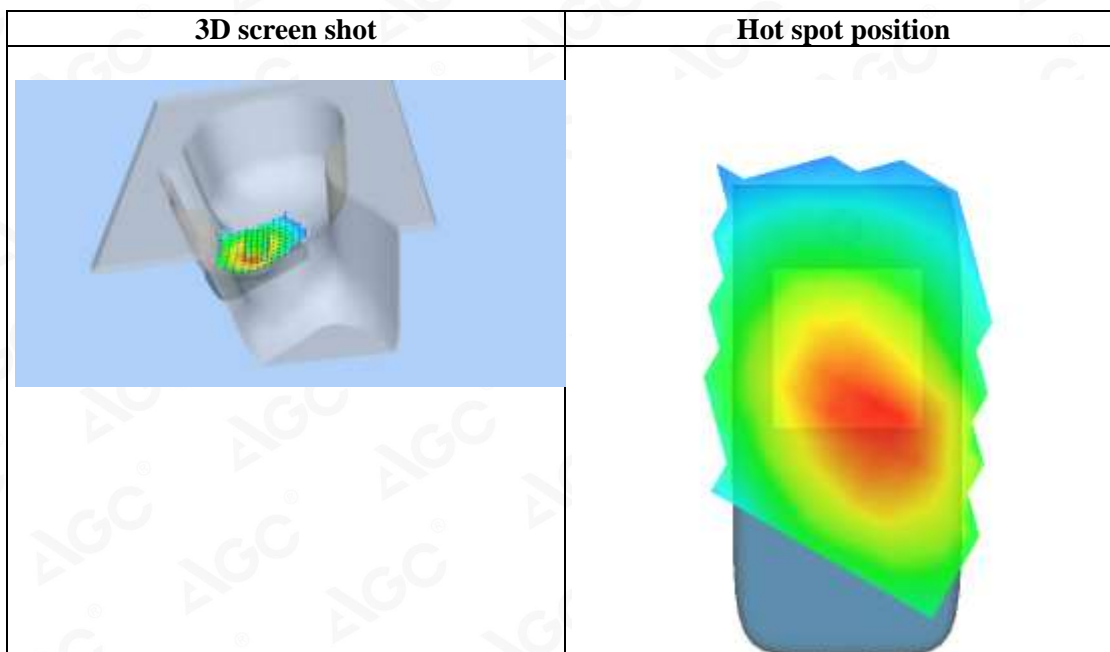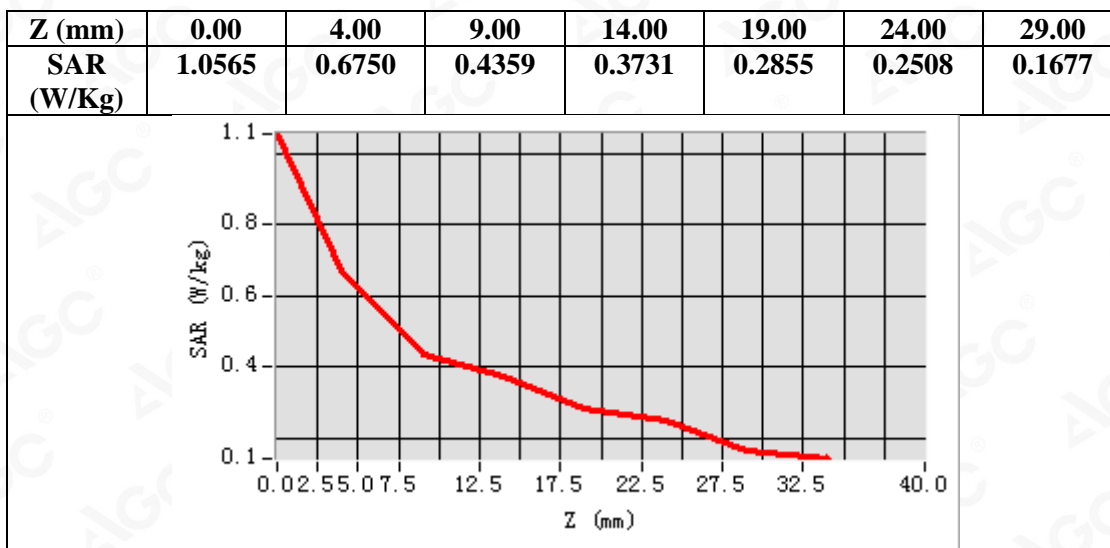

Test Laboratory: AGC Lab
GPRS 900 High-Body- Worn- Back (4up) <SIM 1>
DUT: Smart Phone; Type: R19

Date: July 01,2019

Communication System: GPRS-4 Slot; Communication System Band: GSM 900;Duty Cycle:1:2.1 ; Conv.F=5.26
Frequency: 914.8 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 41.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 900 High- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/GPRS 900 High- Body- Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	GSM 900
Channels	High
Signal	TDMA (Crest factor: 2.0)

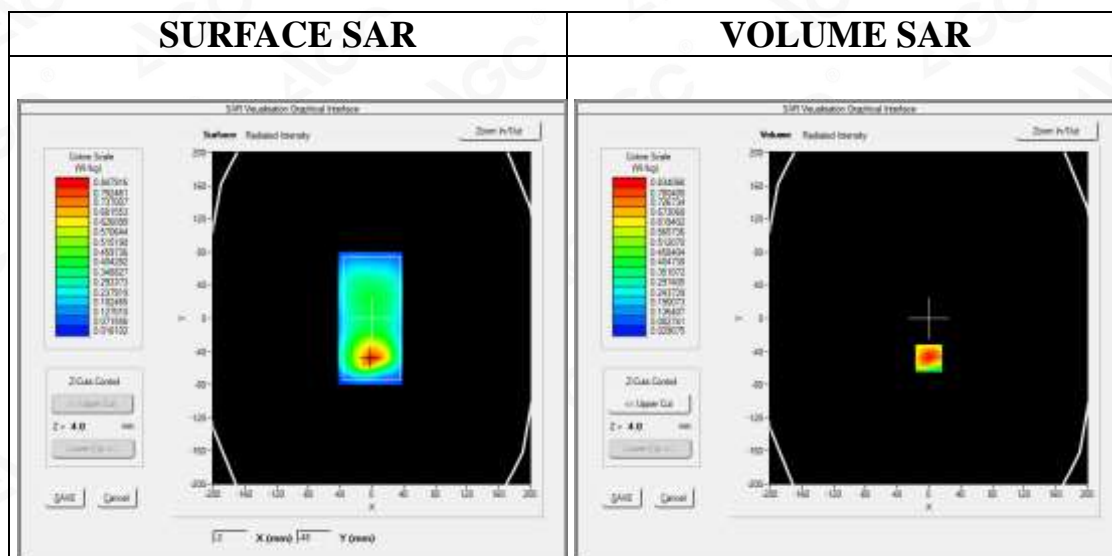

Maximum location: X=0.00, Y=-48.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.496363
SAR 1g (W/Kg)	0.794024

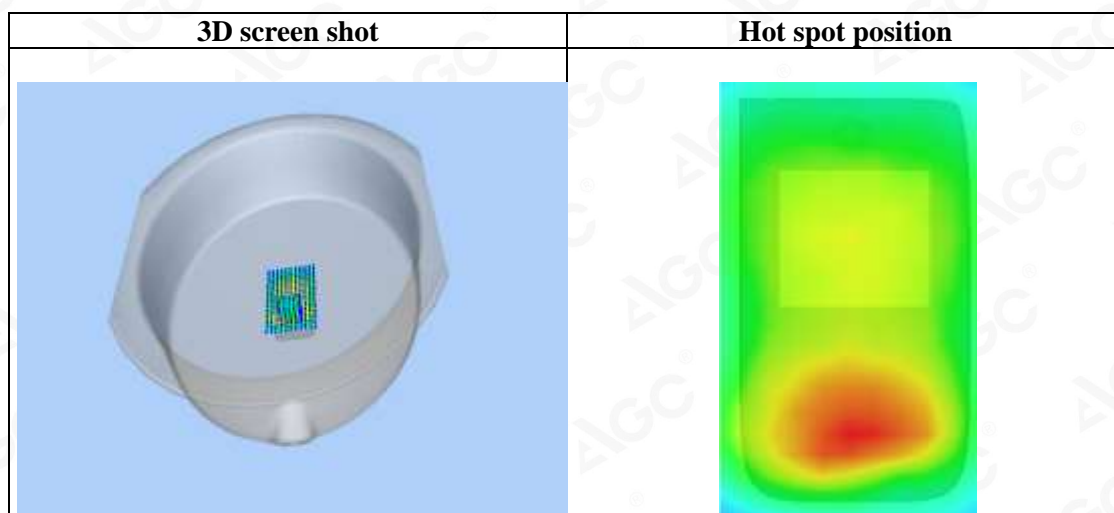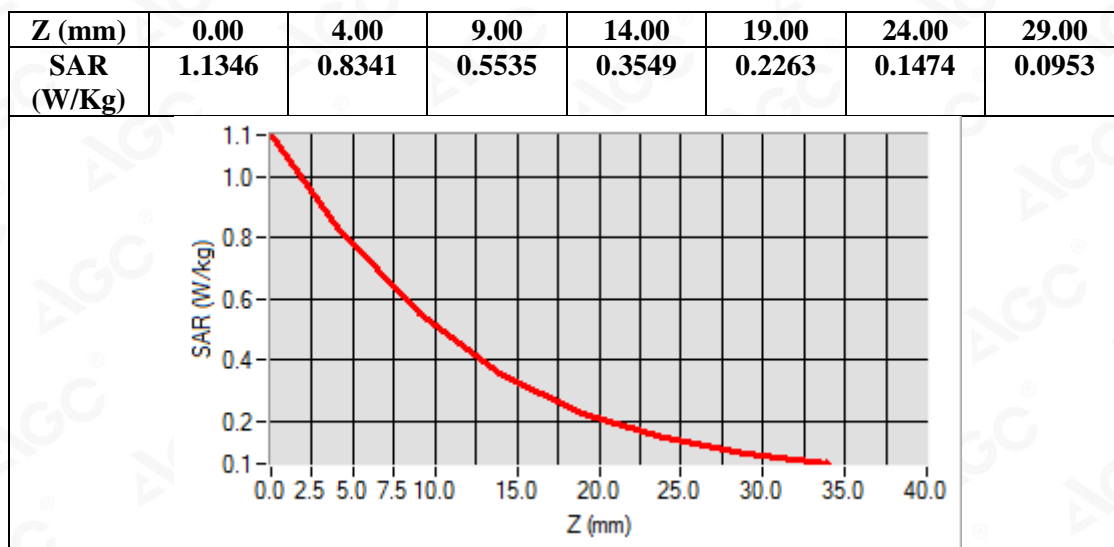

Test Laboratory: AGC Lab
DCS 1800 Mid-Touch -Right <SIM1>
DUT: Smart Phone; Type: R19

Date: June 29,2019


Communication System: Generic GSM; Communication System Band: DCS 1800; Duty Cycle: 1:8; Conv.F=4.71
Frequency: 1747.4 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/DCS1800 Mid- Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/DCS1800 Mid- Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	DCS 1800
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

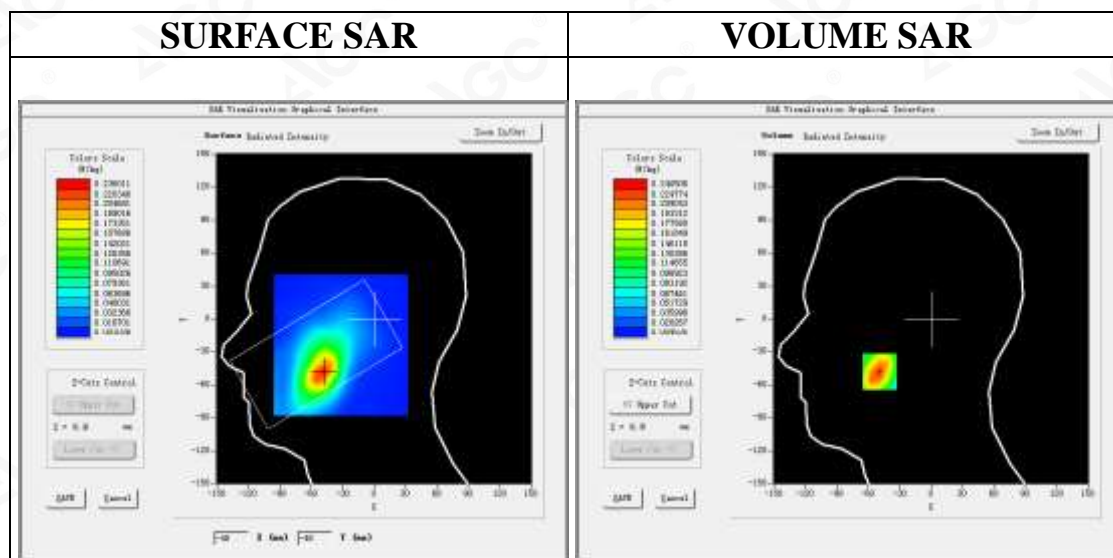

Maximum location: X=-49.00, Y=-48.00

SAR Peak: 0.34 W/kg

SAR 10g (W/Kg)	0.136371
SAR 1g (W/Kg)	0.225209

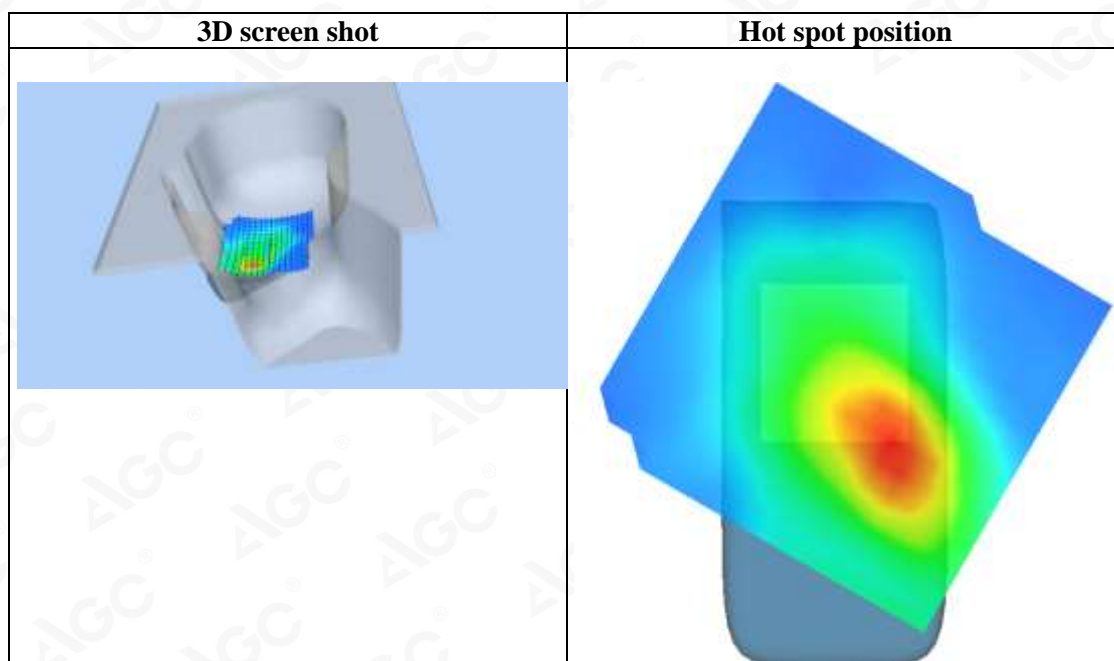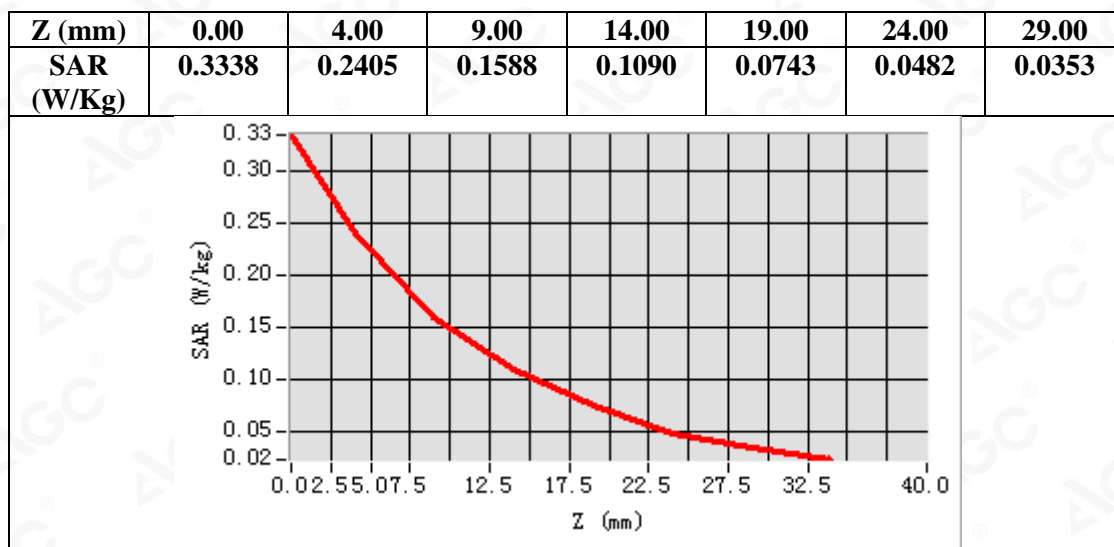

Test Laboratory: AGC Lab
GPRS 1800 Low-Body- Worn- Back (4up) <SIM1>
DUT: Smart Phone; Type: R19

Date: June 29,2019


Communication System: GPRS-4 Slot; Communication System Band: DCS1800; Duty Cycle: 1:2.1; Conv.F=4.71
Frequency: 1710.2 MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.4, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/GPRS 1800 Low- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/GPRS 1800 Low- Body- Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	DCS 1800
Channels	Low
Signal	TDMA (Crest factor: 2.0)

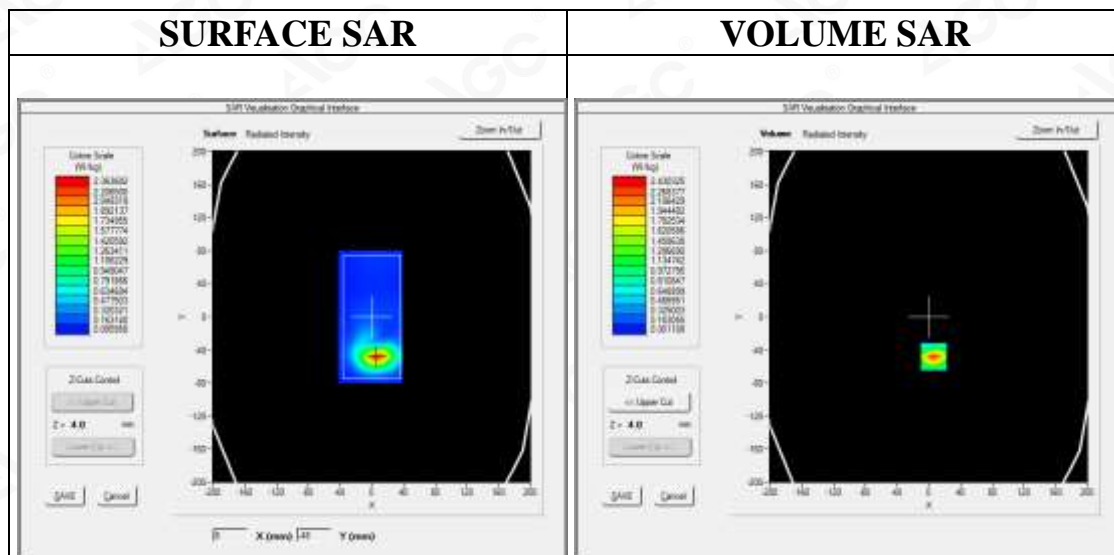

Maximum location: X=6.00, Y=-48.00

SAR Peak: 3.91 W/kg

SAR 10g (W/Kg)	1.093078
SAR 1g (W/Kg)	2.220951





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

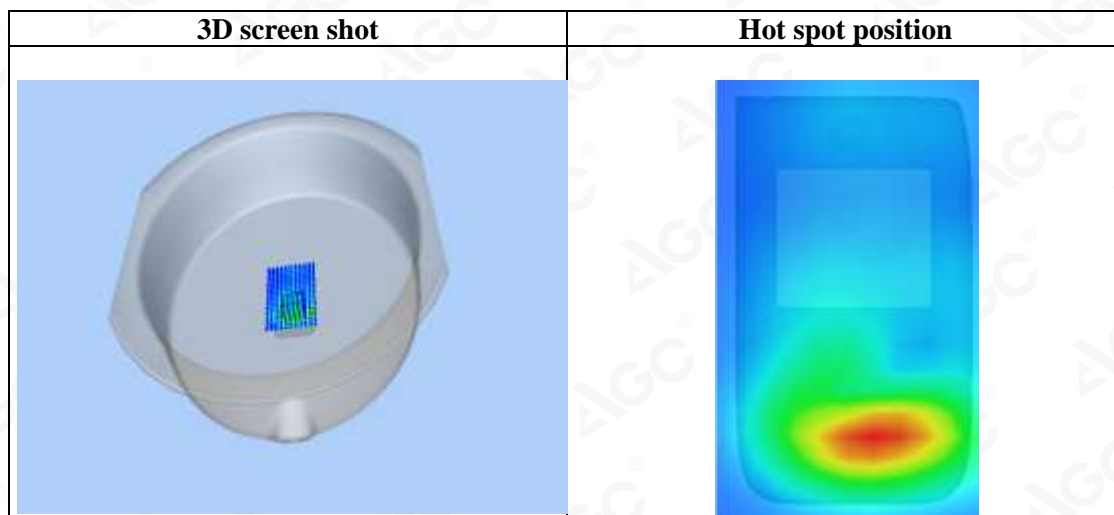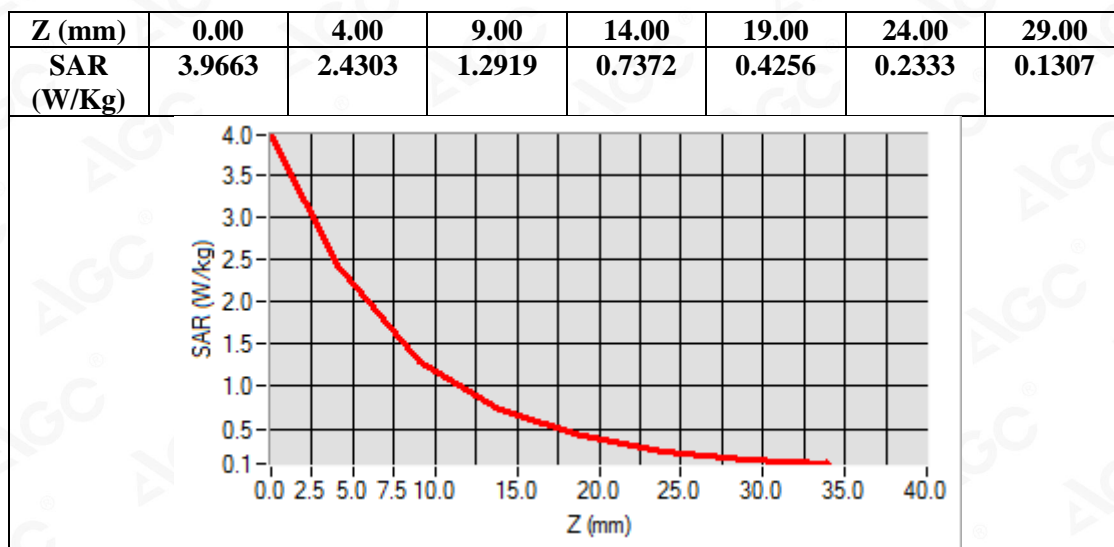

Test Laboratory: AGC Lab
WCDMA Band I Low-Touch-Left (RMC)
DUT: Smart Phone; Type: R19

Date: June 27,2019


Communication System: UMTS; Communication System Band: Band I UTRA/FDD ; Duty Cycle: 1:1; Conv.F=5.09;
Frequency: 1922.4 MHz; Medium parameters used: $f = 1950$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 21.9, Liquid temperature (°C): 21.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA Band I Low-Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA Band I Low-Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA Band I
Channels	Low
Signal	CDMA (Crest factor: 1.0)


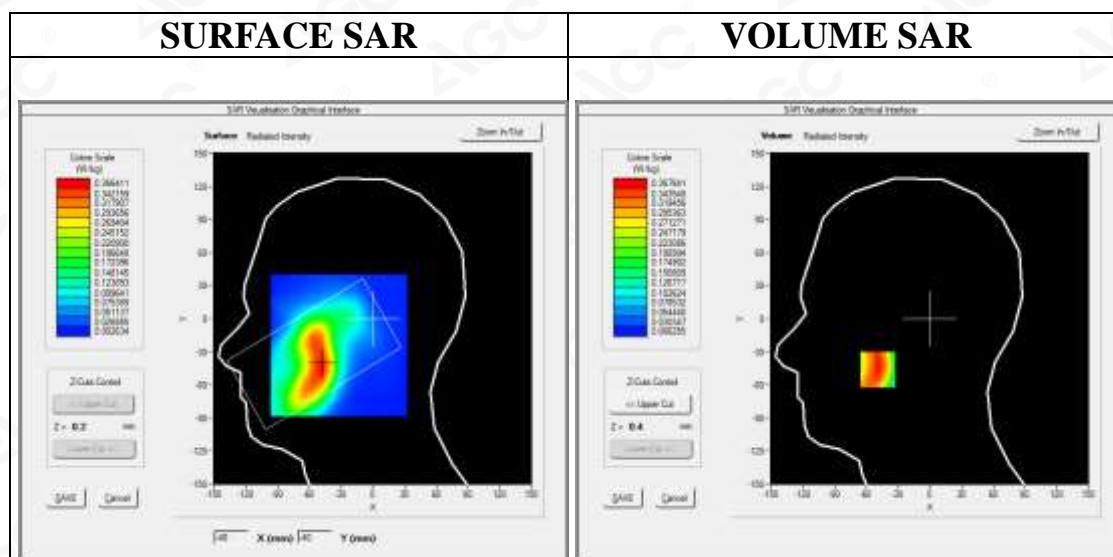


Maximum location: X=-49.00, Y=-46.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.221538
SAR 1g (W/Kg)	0.351173

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.5009	0.3676	0.2476	0.1685	0.1118	0.0739	0.0484

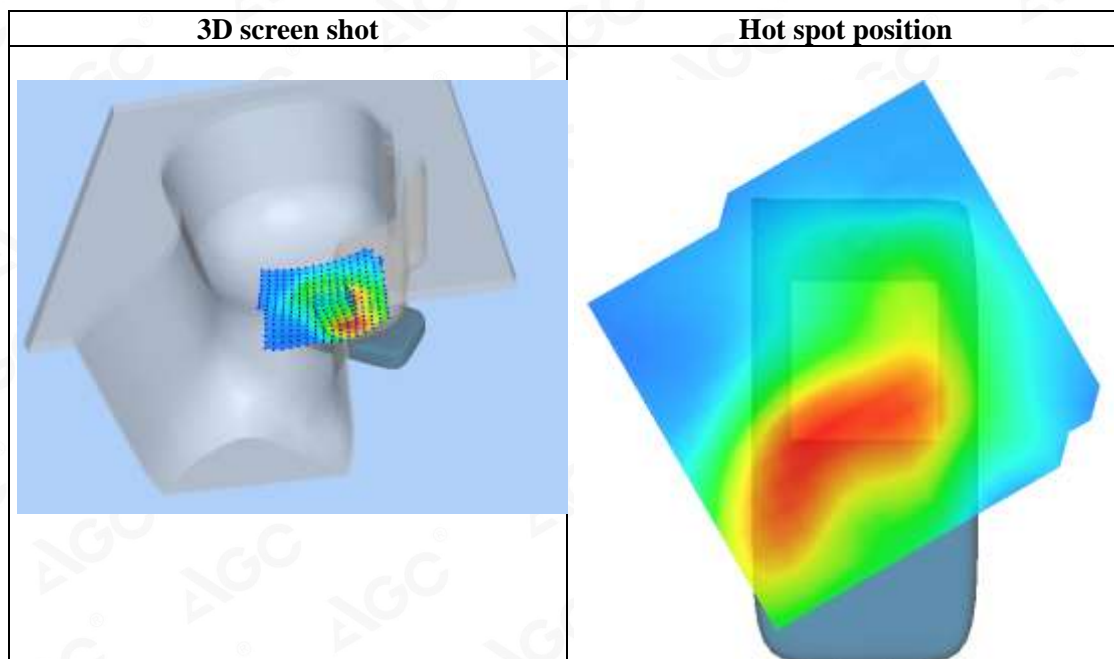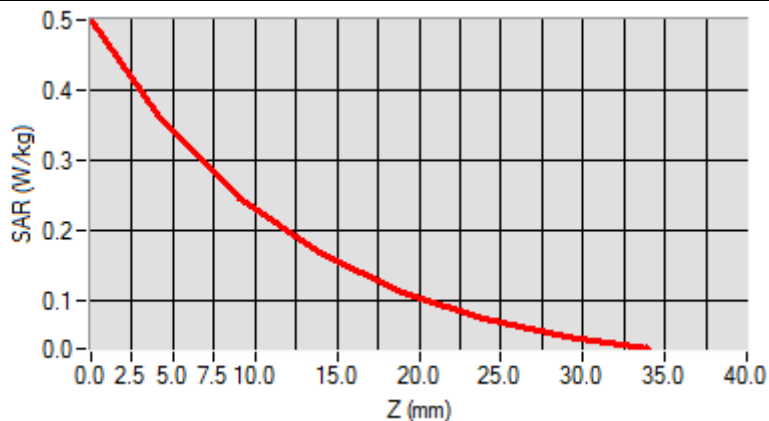

Test Laboratory: AGC Lab
WCDMA Band I Low- Body- Towards Phantom (RMC)
DUT: Smart Phone; Type: R19

Date: June 27,2019

Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=5.09;
Frequency: 1922.4MHz; Medium parameters used: $f = 1950 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.9, Liquid temperature ($^{\circ}\text{C}$): 21.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I Low-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/WCDMA BAND I Low-Body-Front//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	WCDMA Band I
Channels	Low
Signal	CDMA (Crest factor: 1.0)

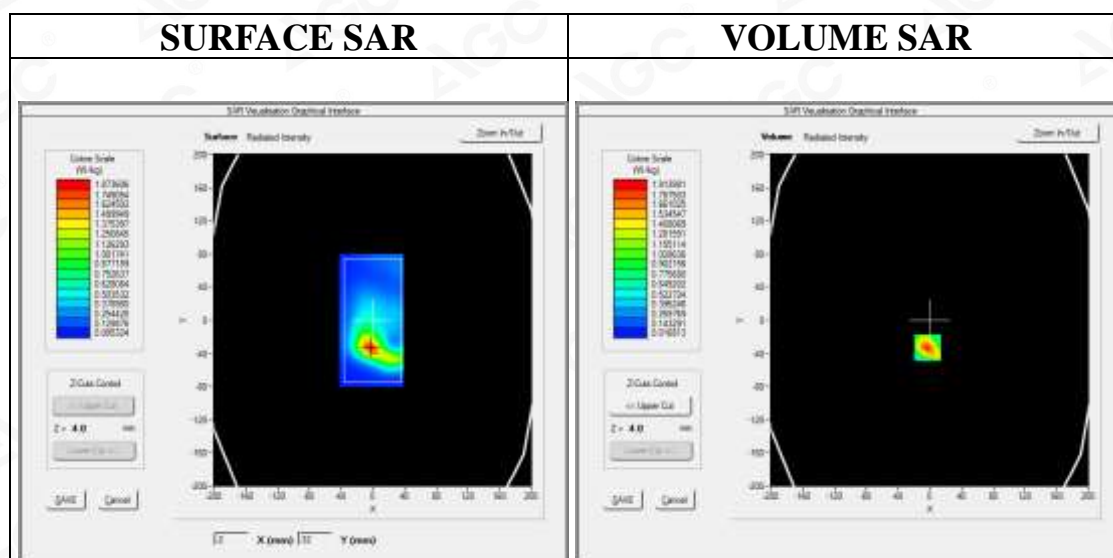

Maximum location: X=-3.00, Y=-33.00

SAR Peak: 3.08 W/kg

SAR 10g (W/Kg)	0.913072
SAR 1g (W/Kg)	1.801885





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

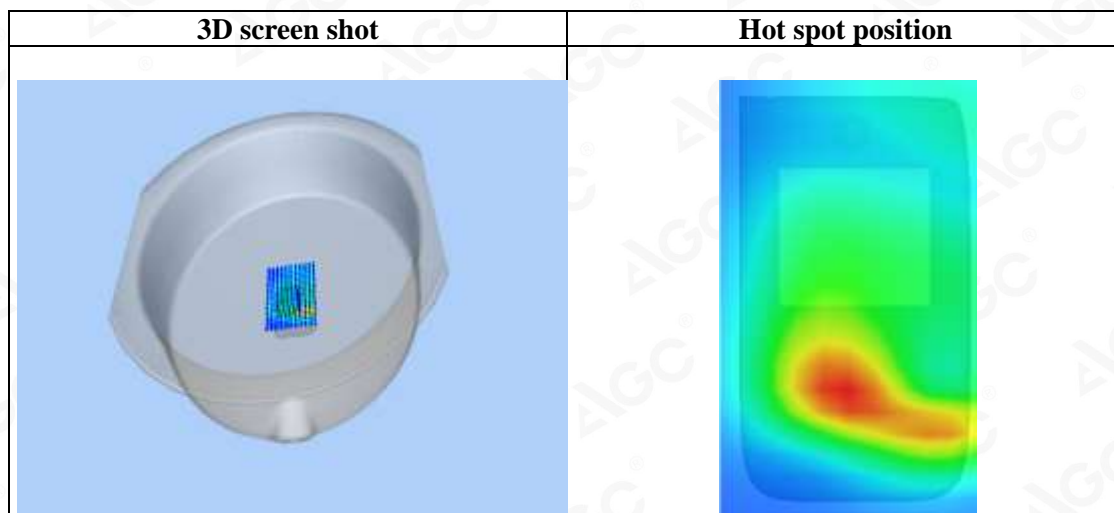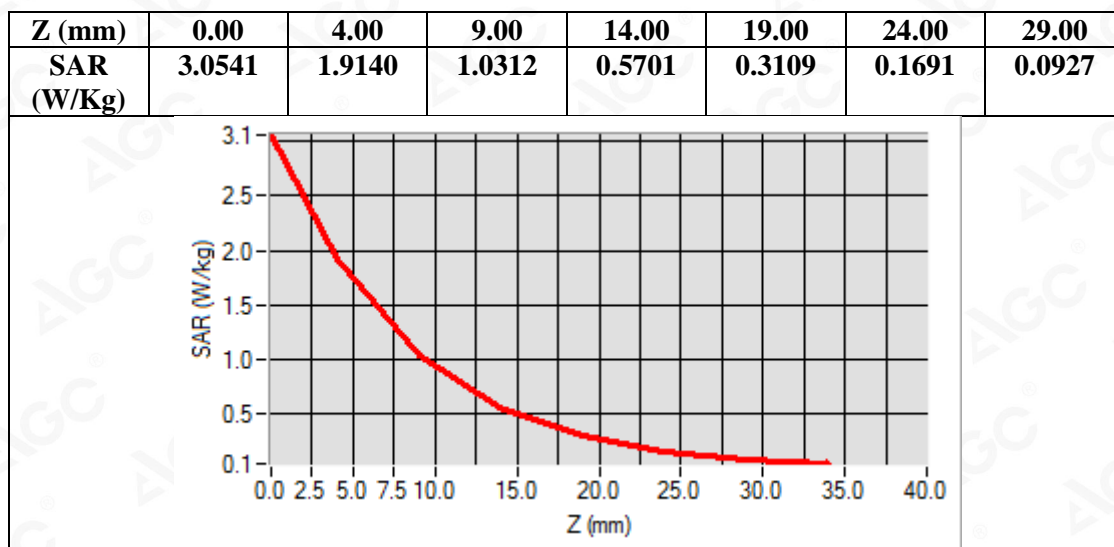

Test Laboratory: AGC Lab
WCDMA Band I High- Body- Towards Phantom (RMC)
DUT: Smart Phone; Type: R19

Date: June 27,2019

Communication System: UMTS; Communication System Band: Band I UTRA/FDD ;Duty Cycle:1:1; Conv.F=5.09;
Frequency: 1977.6MHz; Medium parameters used: $f = 1950$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.9, Liquid temperature (°C): 21.6


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/WCDMA BAND I High-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/WCDMA BAND I High-Body-Front//Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	WCDMA Band I
Channels	High
Signal	CDMA (Crest factor: 1.0)

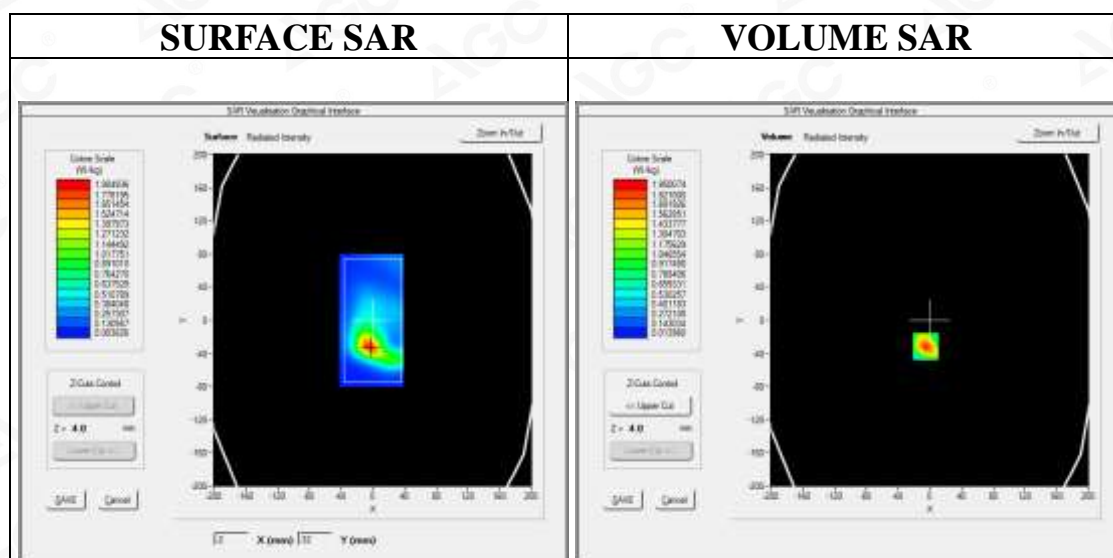

Maximum location: X=-5.00, Y=-32.00

SAR Peak: 3.14 W/kg

SAR 10g (W/Kg)	0.930251
SAR 1g (W/Kg)	1.834654





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

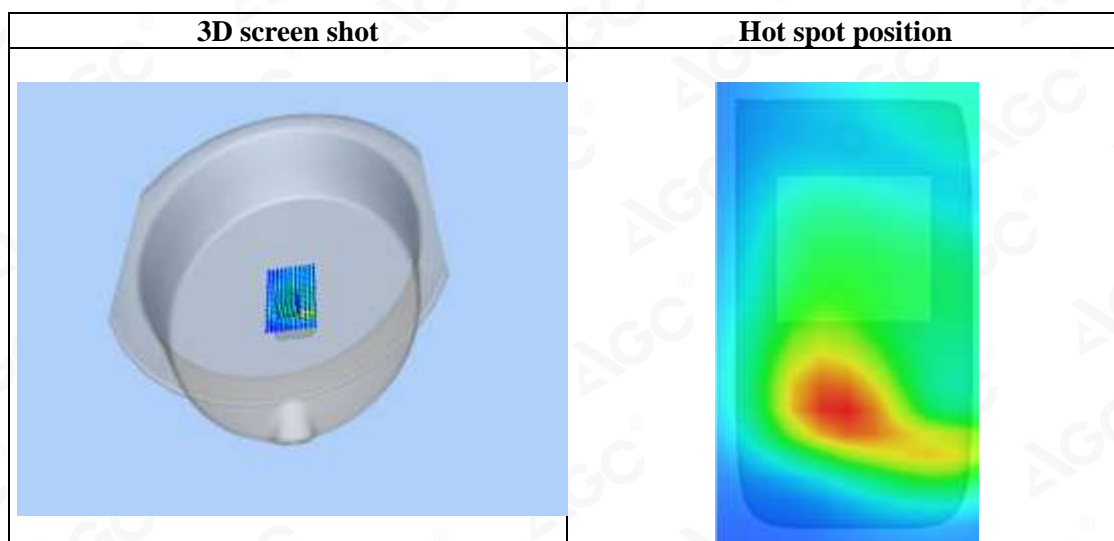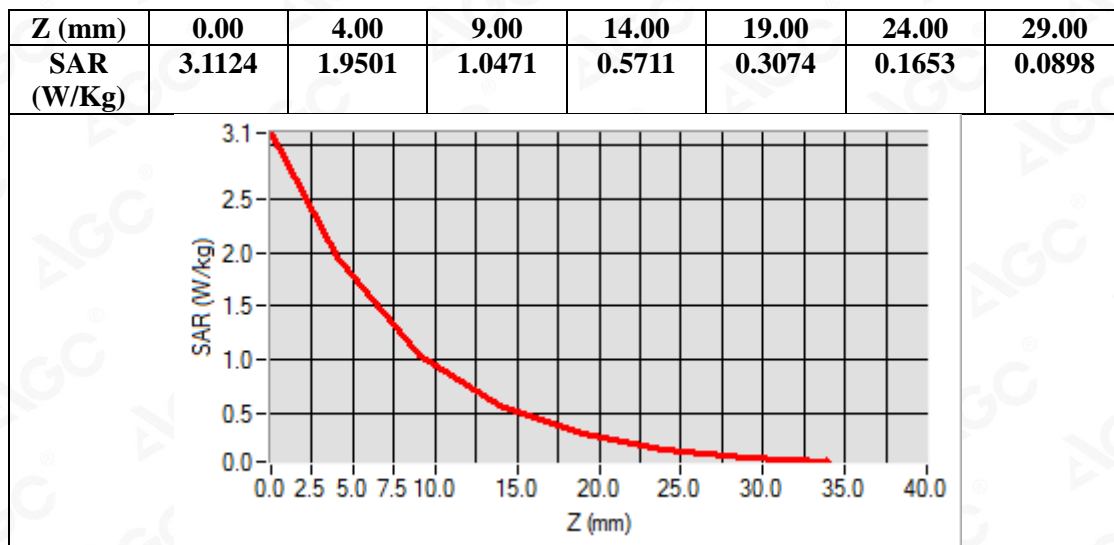

Test Laboratory: AGC Lab
WCDMA Band VIII Low- Touch-Right (RMC)
DUT: Smart Phone; Type: R19

Date: July 01,2019


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.26
Frequency: 882.4MHz;; Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 41.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.8

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Low-Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII Low-Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA BAND VIII
Channels	Low
Signal	CDMA (Crest factor: 1.0)

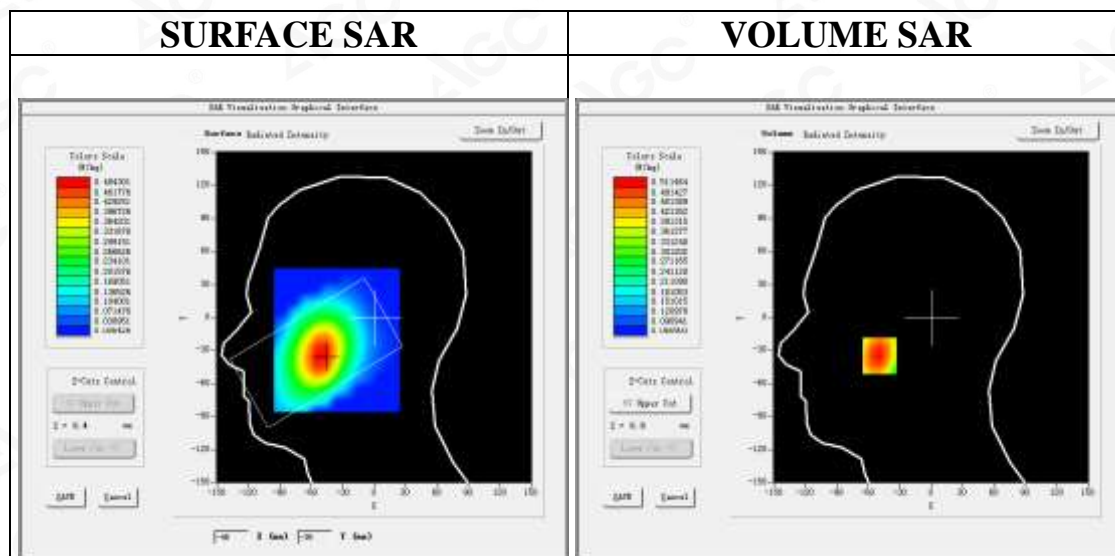

Maximum location: X=-49.00, Y=-35.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.366375
SAR 1g (W/Kg)	0.495774





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

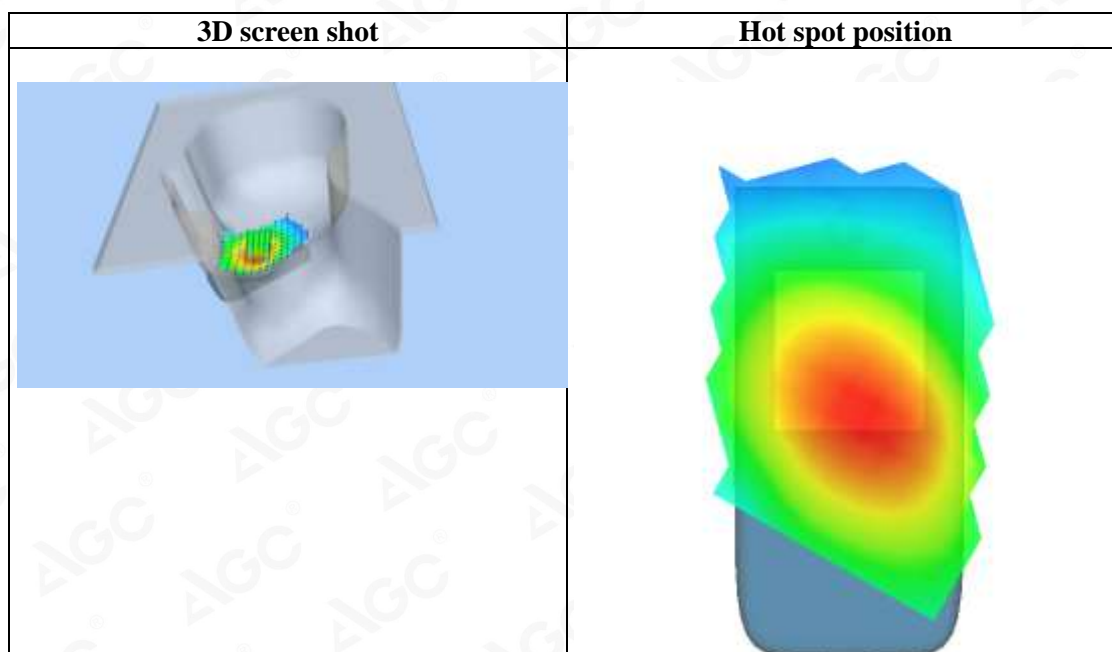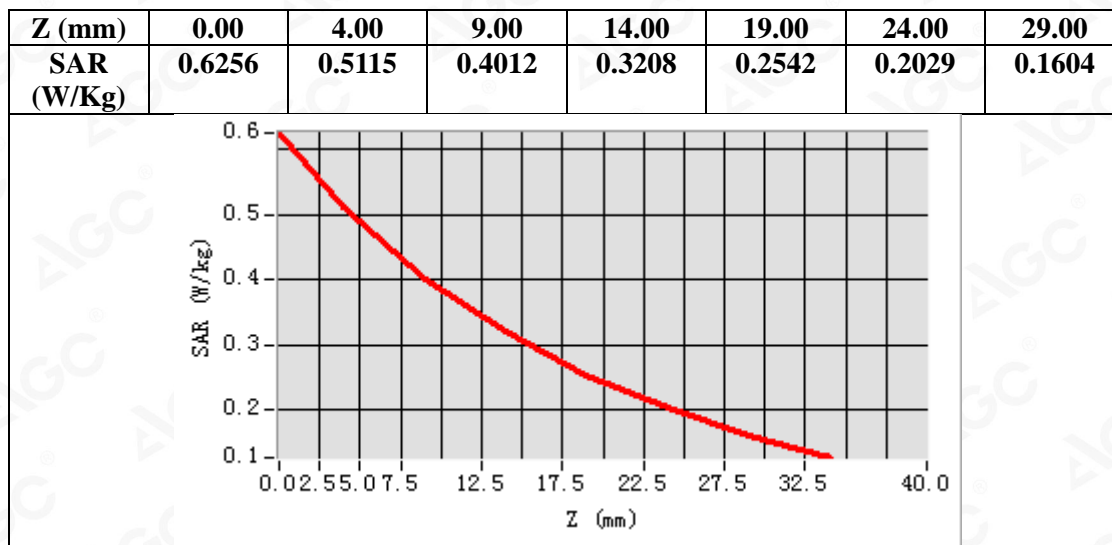

Test Laboratory: AGC Lab
WCDMA Band VIII Mid-Body-Towards Grounds (RMC)
DUT: Smart Phone; Type: R19

Date: July 01,2019


Communication System: UMTS; Communication System Band: BAND VIII UTRA/FDD; Duty Cycle:1:1; Conv.F=5.26
Frequency: 897.6 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 41.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ WCDMA BAND VIII Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ WCDMA BAND VIII Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	WCDMA BAND VIII
Channels	Middle
Signal	CDMA (Crest factor: 1.0)

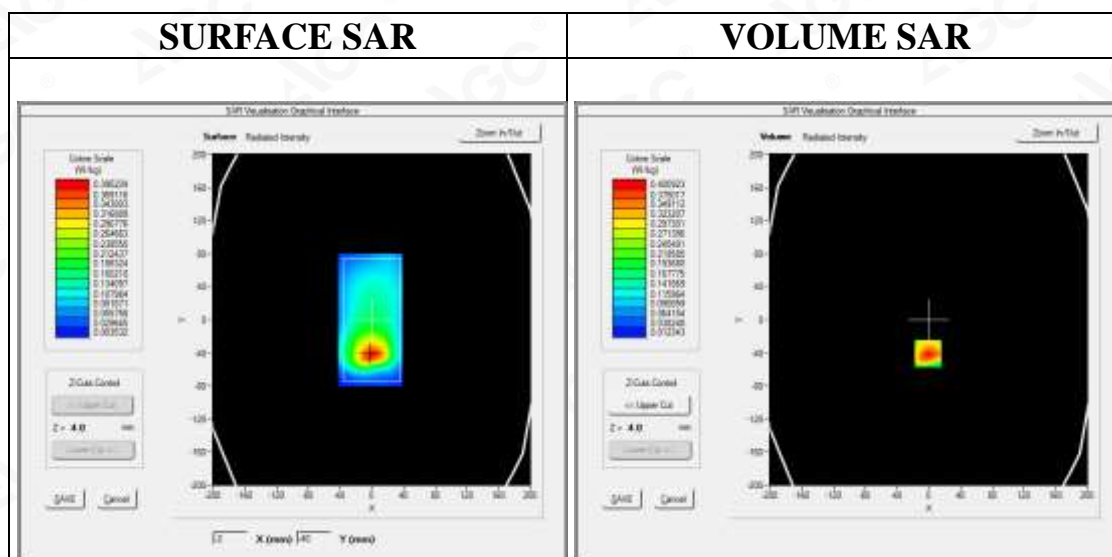

Maximum location: X=-1.00, Y=-41.00

SAR Peak: 0.61 W/kg

SAR 10g (W/Kg)	0.228156
SAR 1g (W/Kg)	0.387722





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

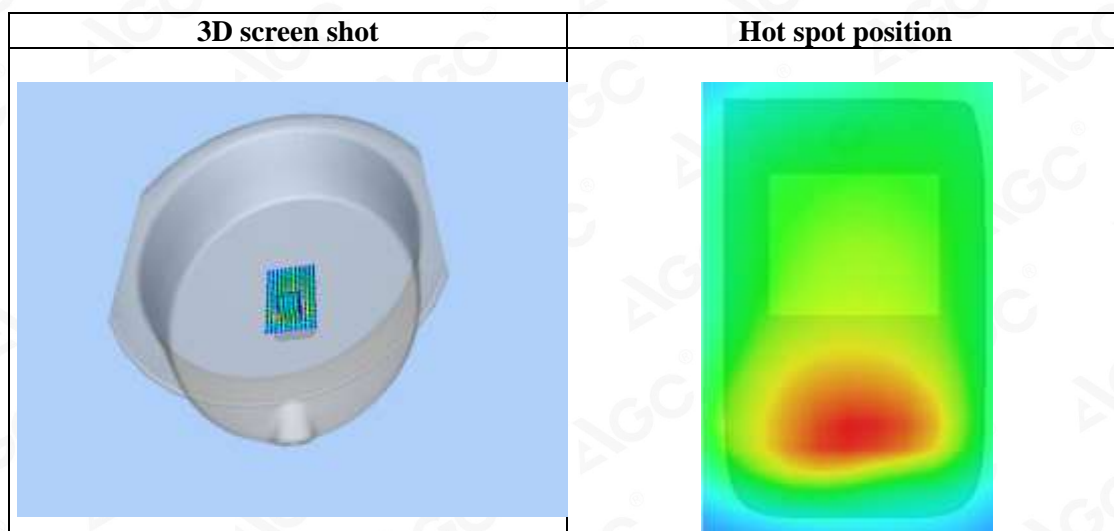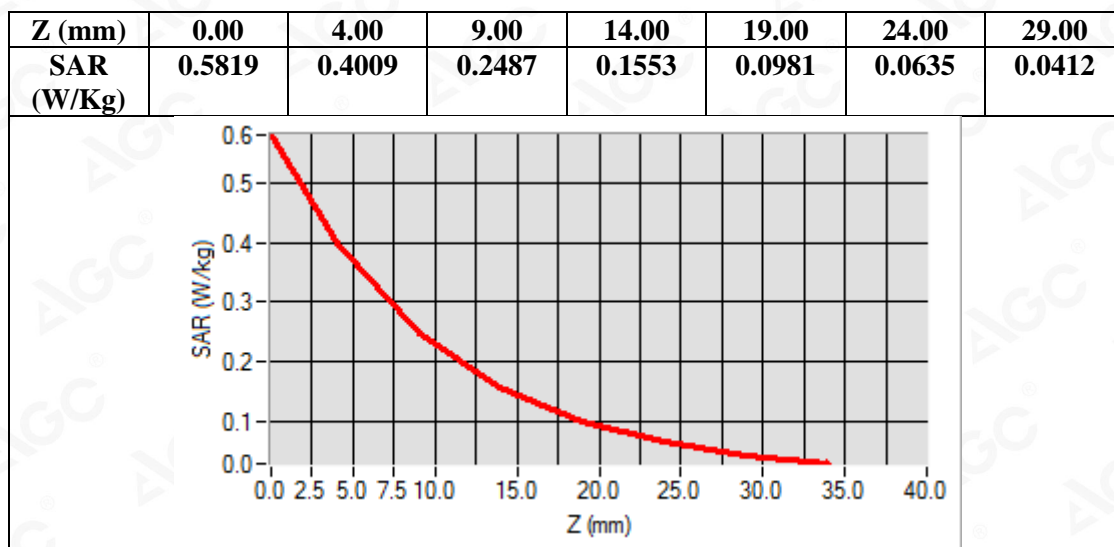

Test Laboratory: AGC Lab
LTE Band 1 Mid-Touch-Left(1RB#0)
DUT: Smart Phone; Type: R19

Date: June 27,2019


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=5.09;
Frequency: 1950MHz; Medium parameters used: $f = 1950 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Left Section
Ambient temperature ($^{\circ}\text{C}$):21.9, Liquid temperature ($^{\circ}\text{C}$):21.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 Mid- Touch-Left /Area Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$
Configuration/LTE BAND 1 Mid- Touch-Left /Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$;

Area Scan	$dx=8\text{mm}$ $dy=8\text{mm}$, $h= 5.00 \text{ mm}$
ZoomScan	$5 \times 5 \times 7$, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	Left head
Device Position	Cheek
Band	LTE Band 1
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

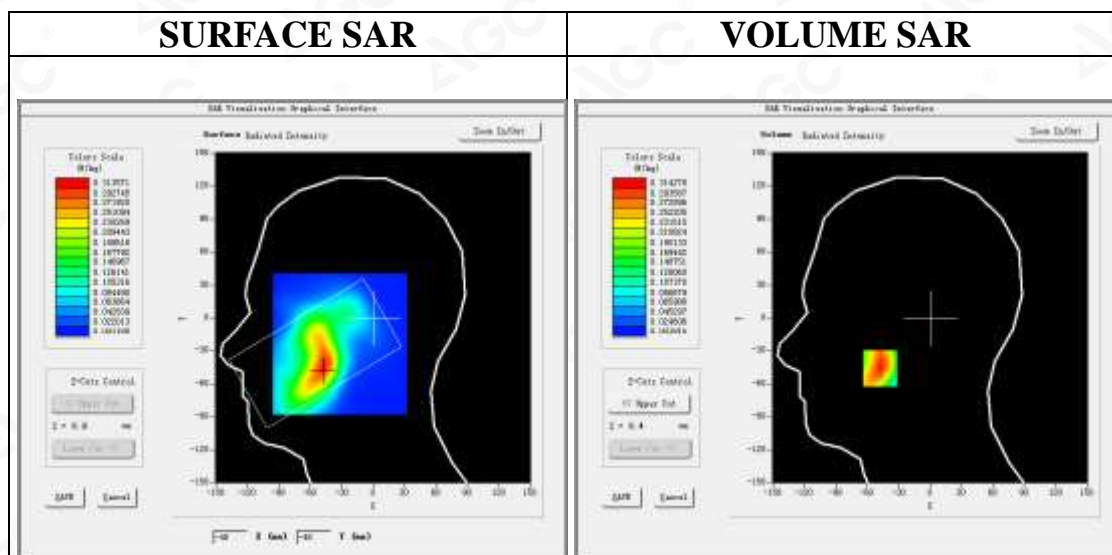

Maximum location: X=-48.00, Y=-46.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.181341
SAR 1g (W/Kg)	0.296154





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

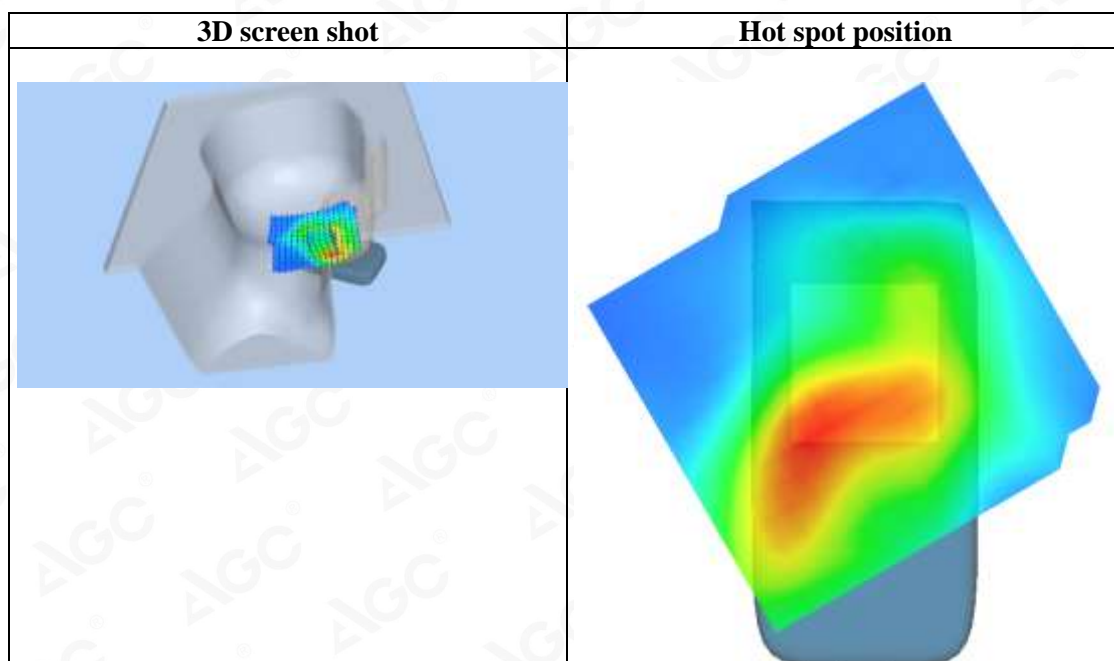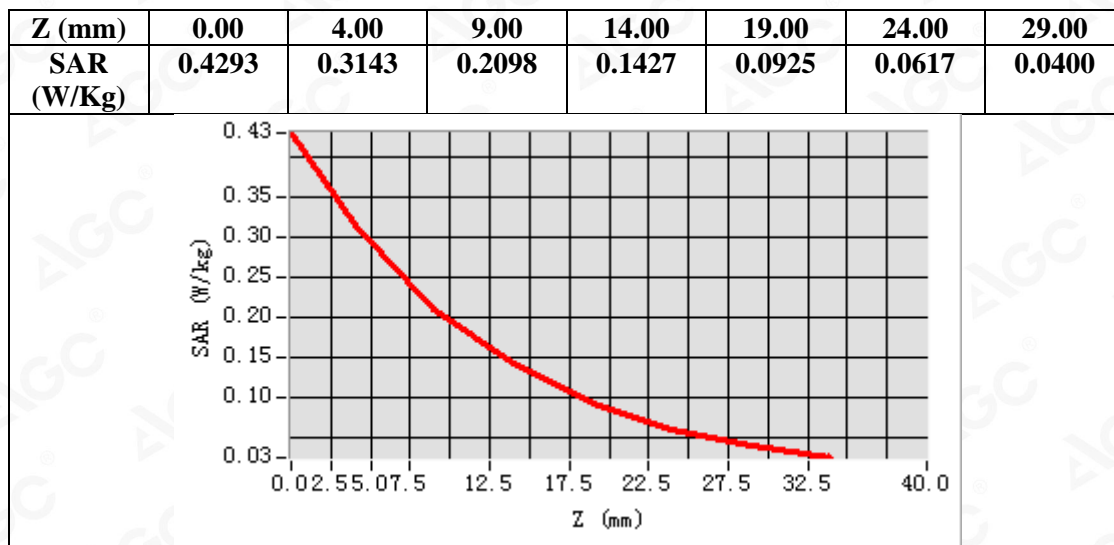

Test Laboratory: AGC Lab
LTE Band 1 Mid-Body-Front(1RB#0)
DUT: Smart Phone; Type: R19

Date: June 27,2019


Communication System: LTE; Communication System Band: LTE Band 1 ;Duty Cycle:1:1; Conv.F=5.09;
Frequency: 1950MHz; Medium parameters used: $f = 1950 \text{ MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 39.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$):21.9, Liquid temperature ($^{\circ}\text{C}$):21.6

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/LTE BAND 1 Mid-Body-Front /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE BAND 1 Mid-Body-Front /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE Band 1
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

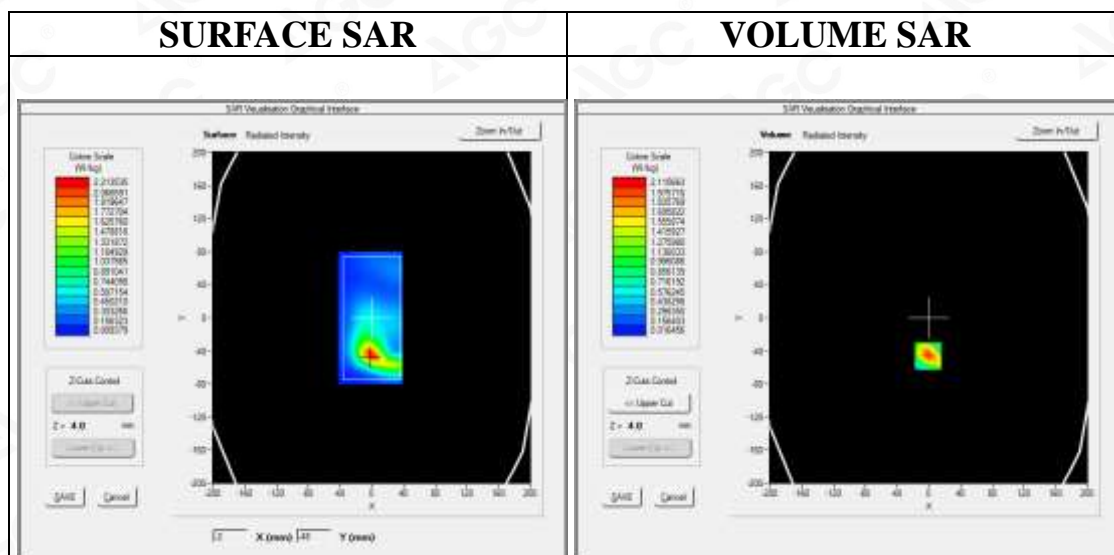

Maximum location: X=-1.00, Y=-46.00

SAR Peak: 3.43 W/kg

SAR 10g (W/Kg)	1.012290
SAR 1g (W/Kg)	1.991202





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

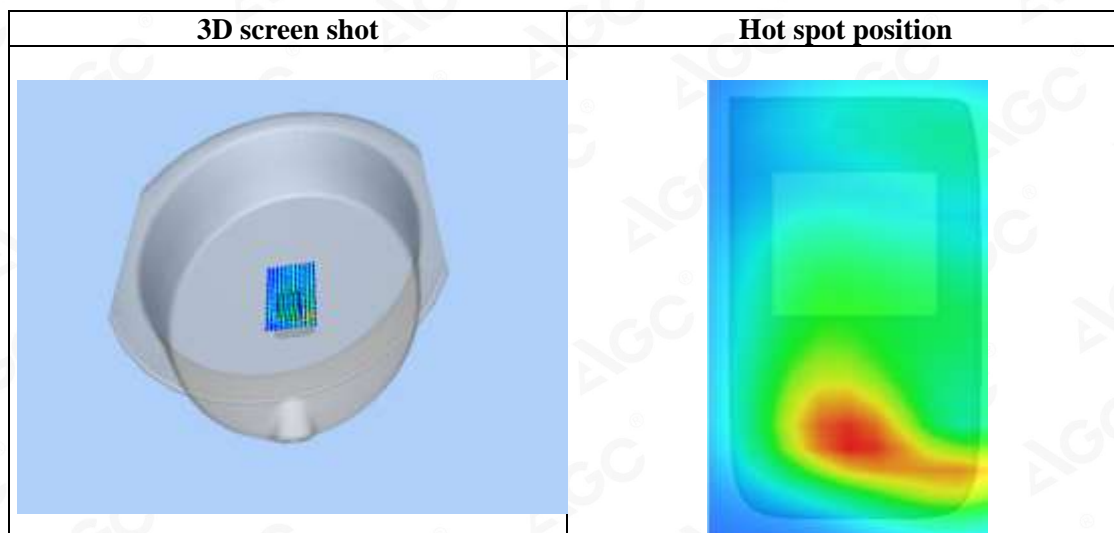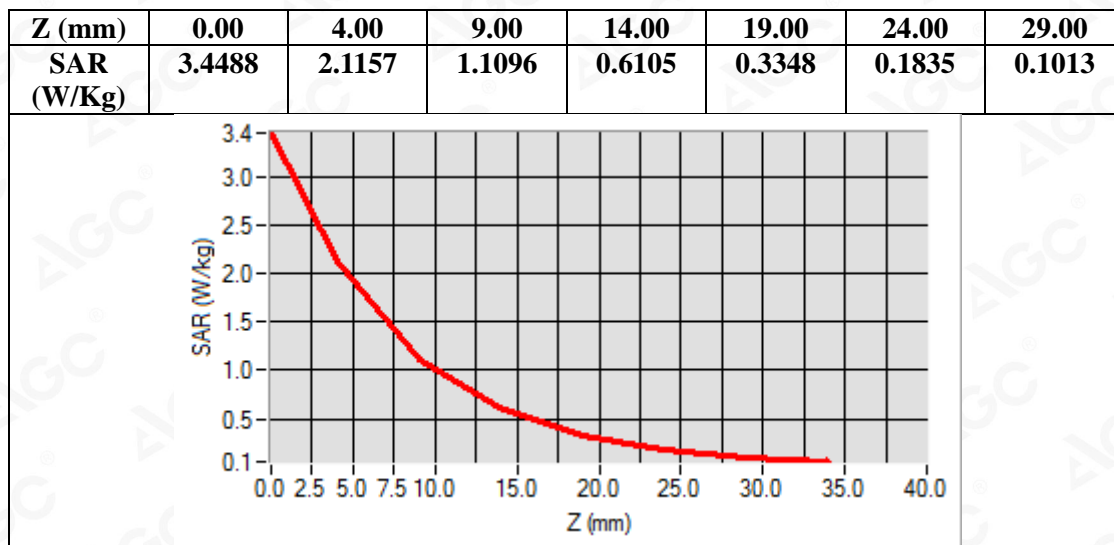

Test Laboratory: AGC Lab
LTE Band 3 Low-Touch-Right (1RB#0)
DUT: Smart Phone; Type: R19

Date: June 29,2019


Communication System: LTE; Communication System Band: LTE Band 3; Duty Cycle: 1:1; Conv.F=4.71
Frequency: 1720MHz; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section
Ambient temperature (°C):21.4, Liquid temperature (°C):21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/LTE Band 3 Low- Touch-Right/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE Band 3 Low- Touch-Right/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 3
Channels	Low
Signal	OFDM (Crest factor: 1.0)

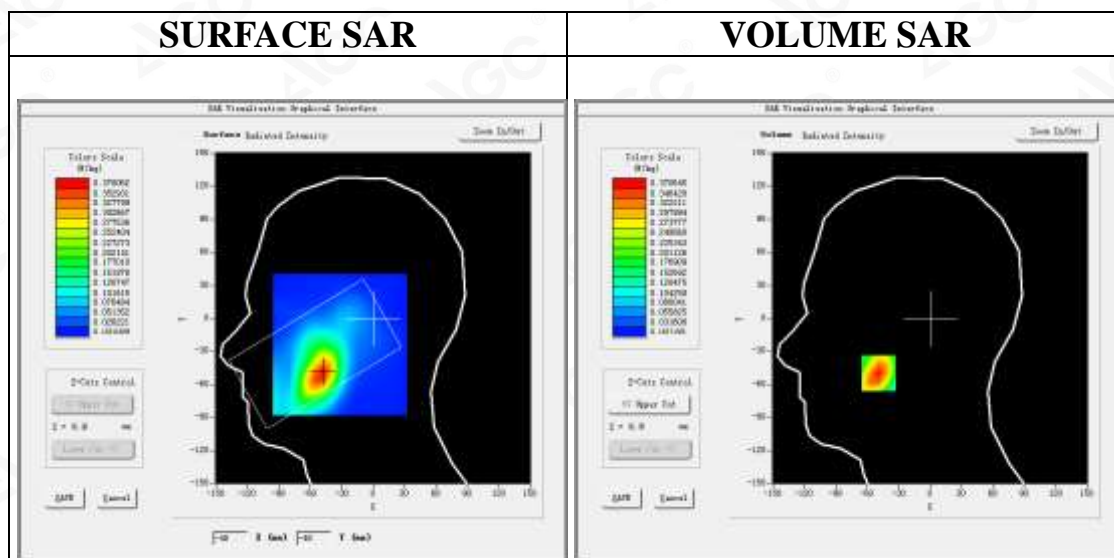

Maximum location: X=-49.00, Y=-50.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.218519
SAR 1g (W/Kg)	0.352935

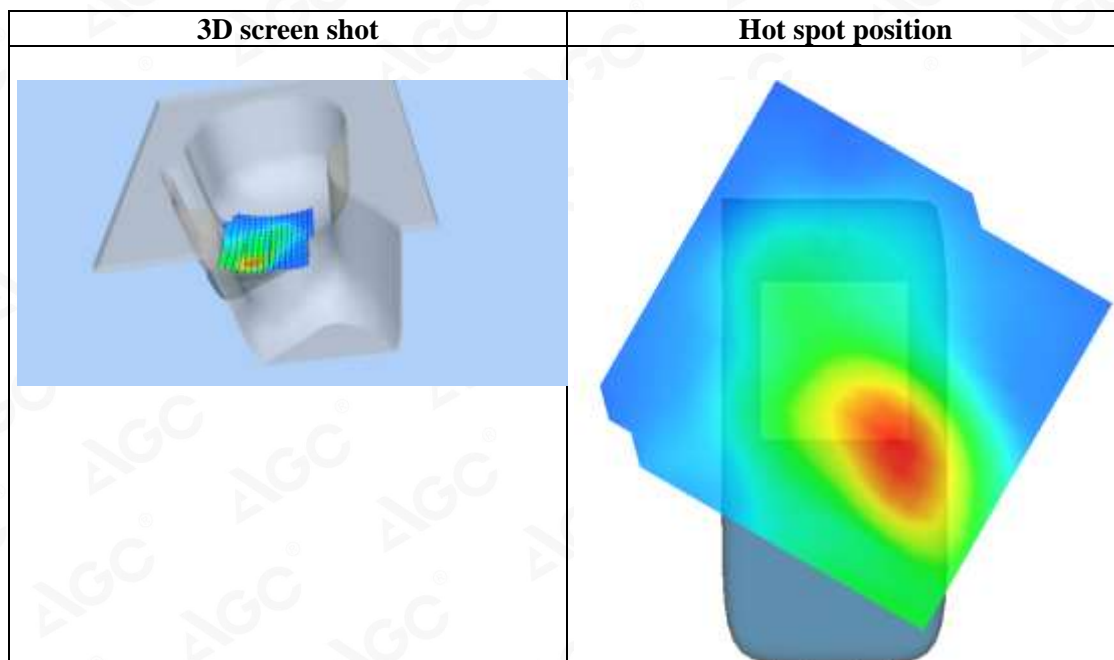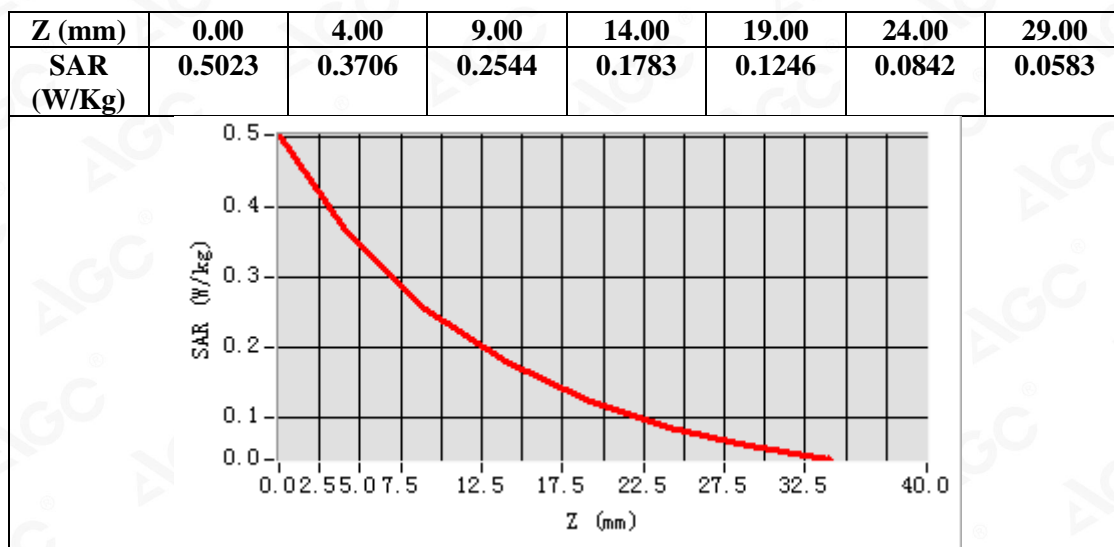

Test Laboratory: AGC Lab
LTE Band 3 High-Body-Back(1RB#0)
DUT: Smart Phone; Type: R19

Date: June 29,2019


Communication System: LTE; Communication System Band: LTE Band 3; Duty Cycle: 1:1; Conv.F=4.71
Frequency: 1775MHz; Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$):21.4, Liquid temperature ($^{\circ}\text{C}$):21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/LTE Band 3 High-Body-back /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/LTE Band 3 High-Body-back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 3
Channels	High
Signal	OFDM (Crest factor: 1.0)

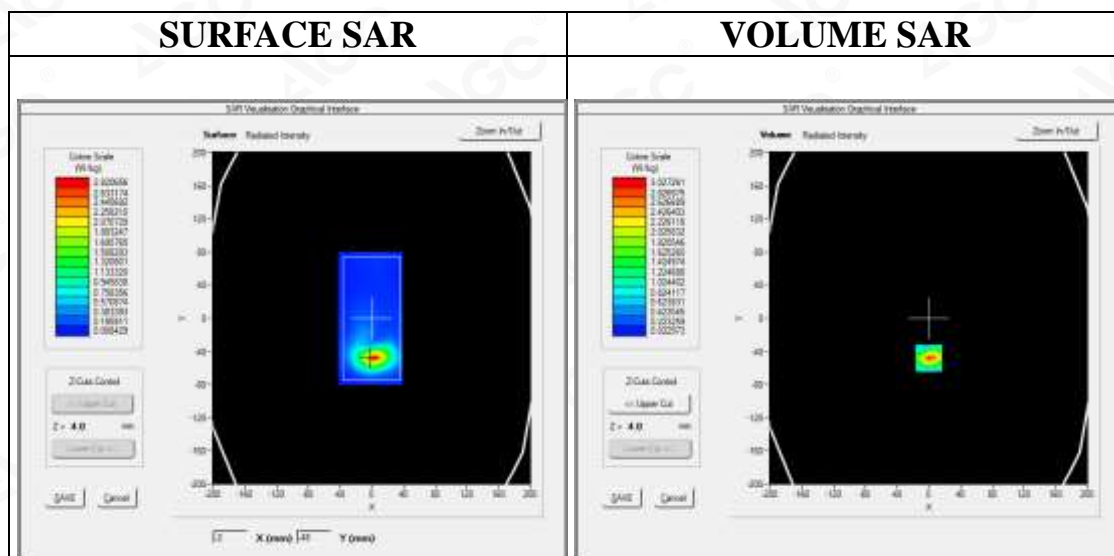

Maximum location: X=0.00, Y=-48.00

SAR Peak: 5.05 W/kg

SAR 10g (W/Kg)	1.290342
SAR 1g (W/Kg)	2.773199





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

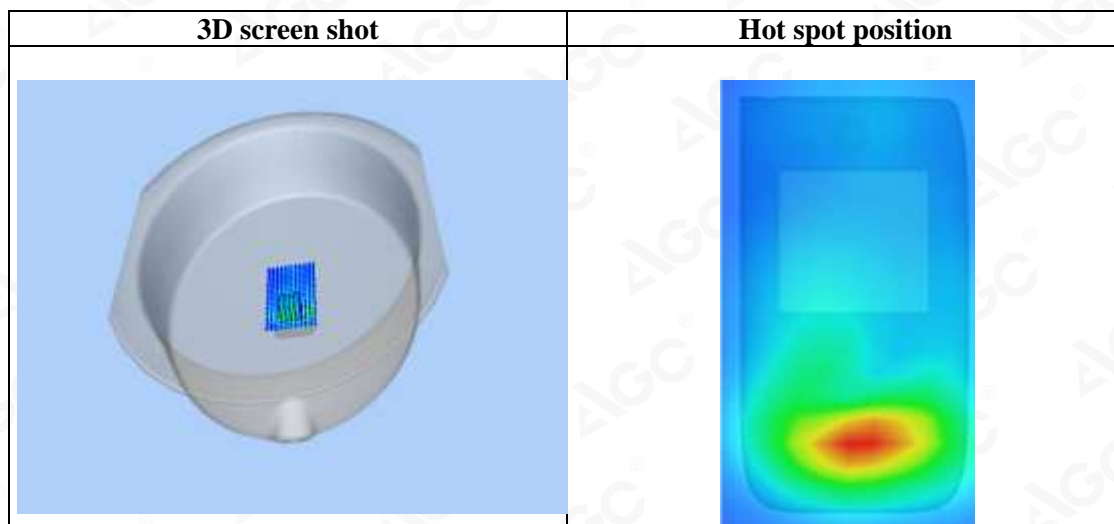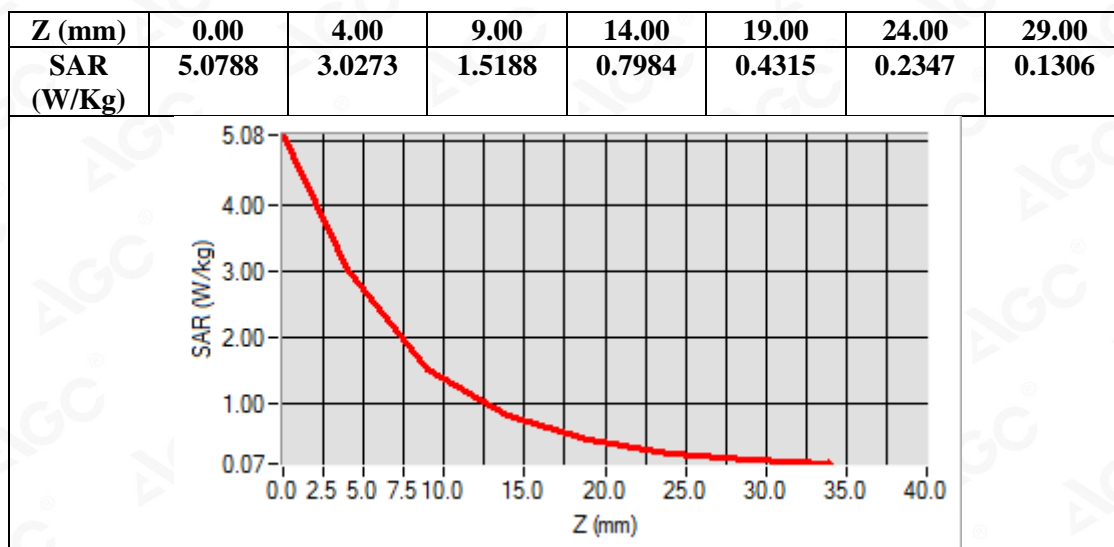

Test Laboratory: AGC Lab
LTE Band 7 Mid-Touch-Left (1RB#0)
DUT: Smart Phone; Type: R19

Date: July 02,2019


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=4.57
Frequency: 2535MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Mid-Touch-Left/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 Mid-Touch-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

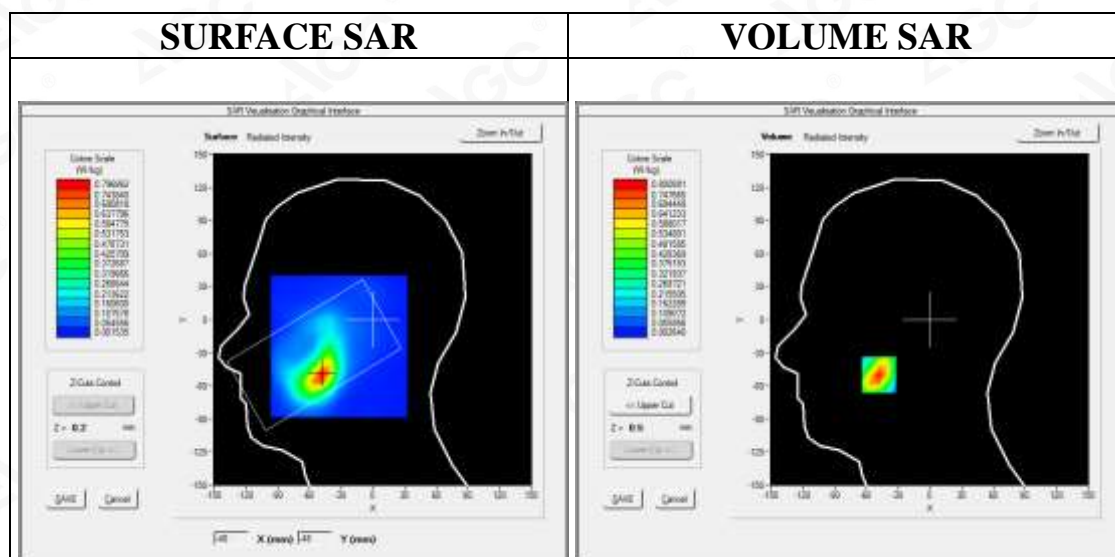

Maximum location: X=-48.00, Y=-50.00

SAR Peak: 1.22 W/kg

SAR 10g (W/Kg)	0.373185
SAR 1g (W/Kg)	0.742277

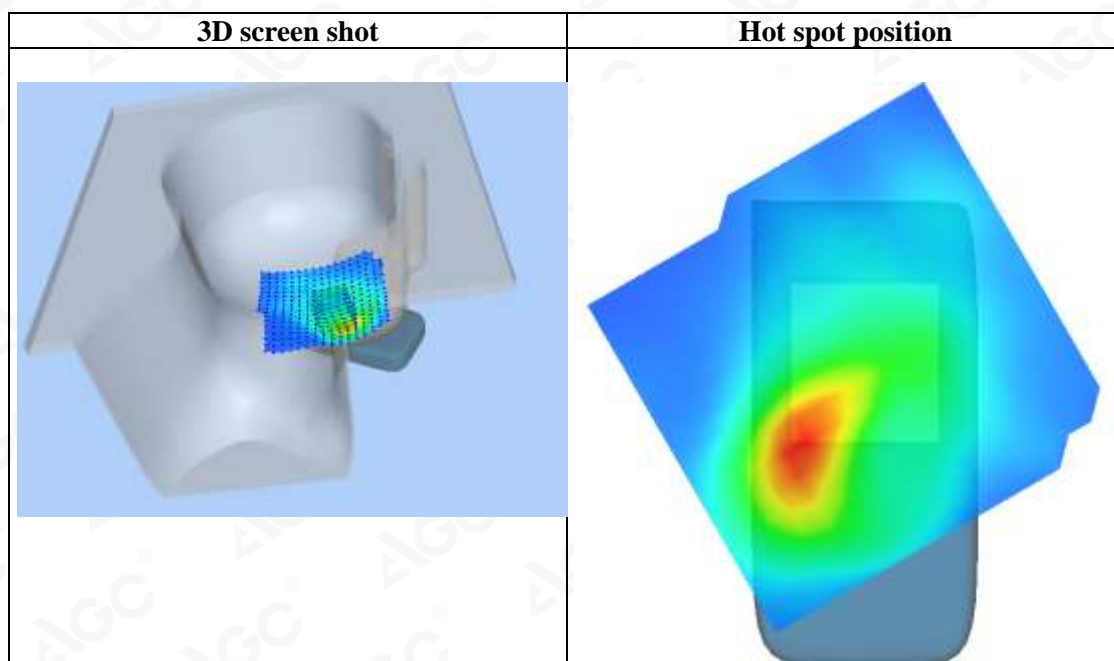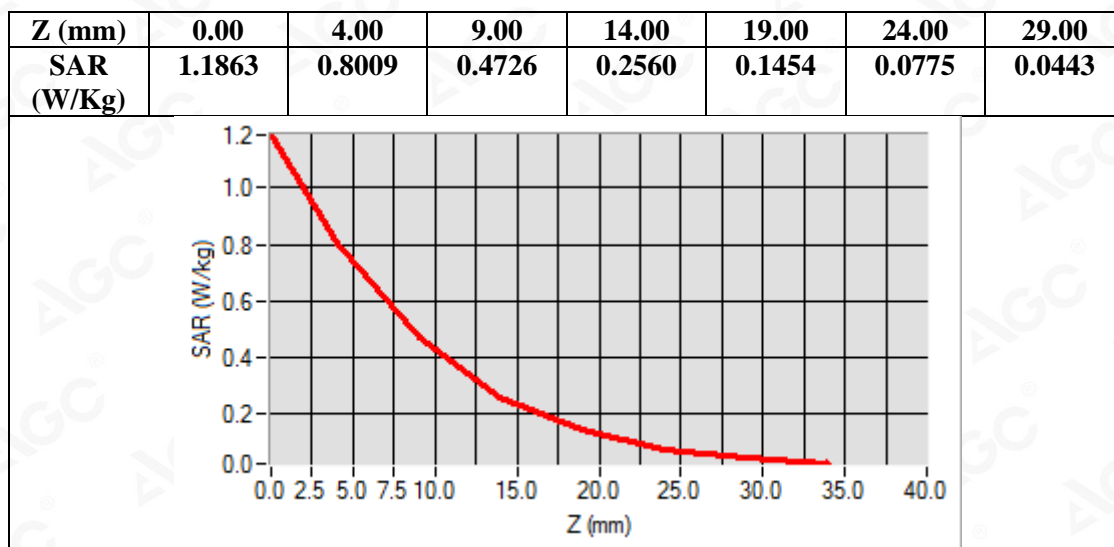

Test Laboratory: AGC Lab
LTE Band 7 Mid-Body-Front (1RB#0)
DUT: Smart Phone; Type: R19

Date: July 02,2019


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=4.57
Frequency: 2535MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 Mid-Body-Front /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 Mid-Body-Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE BAND 7
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

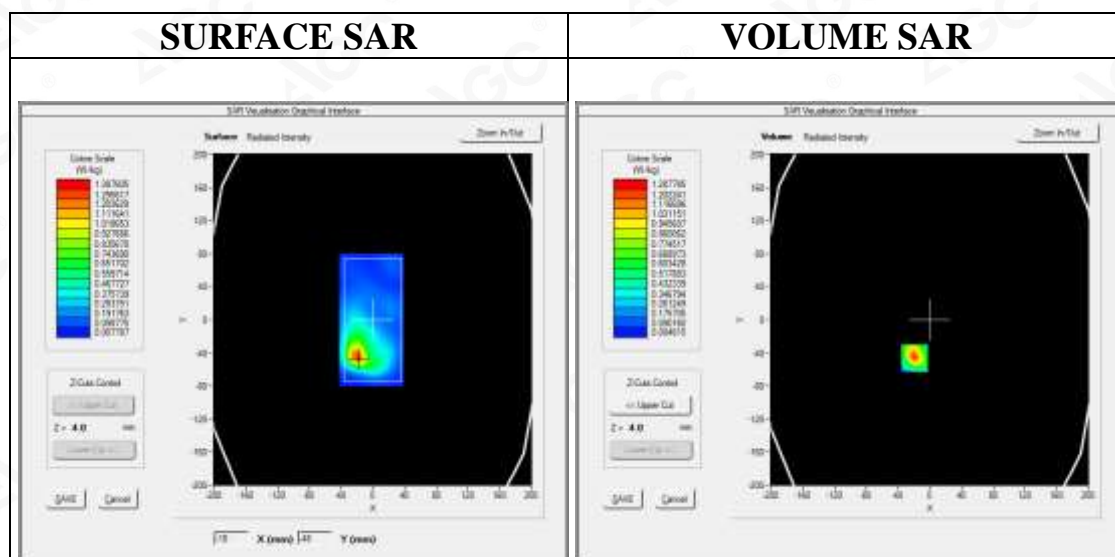

Maximum location: X=-19.00, Y=-46.00

SAR Peak: 2.23 W/kg

SAR 10g (W/Kg)	0.544454
SAR 1g (W/Kg)	1.196045

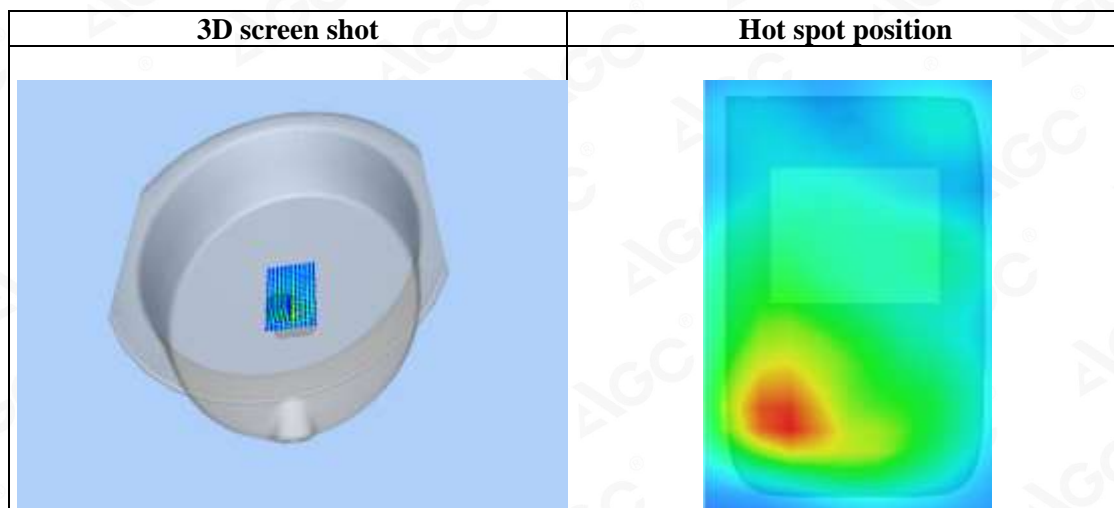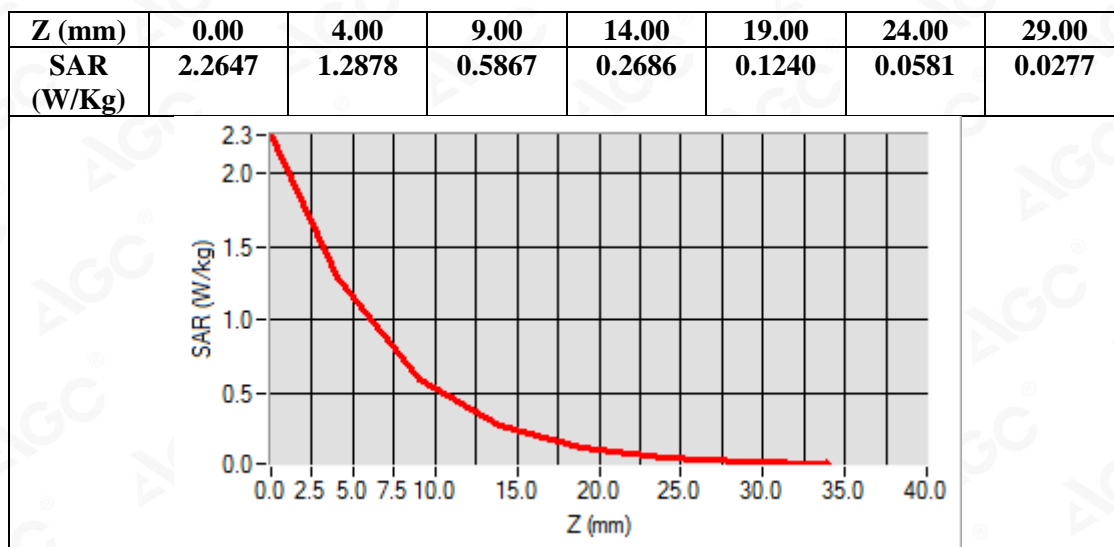

Test Laboratory: AGC Lab
LTE Band 7 High-Body-Front (1RB#0)
DUT: Smart Phone; Type: R19

Date: July 02,2019


Communication System: LTE; Communication System Band: LTE Band 7; Duty Cycle:1:1; Conv.F=4.57
Frequency: 2560 MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 39.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 7 High-Body-Front /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 7 High-Body-Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Front
Band	LTE BAND 7
Channels	High
Signal	OFDM (Crest factor: 1.0)

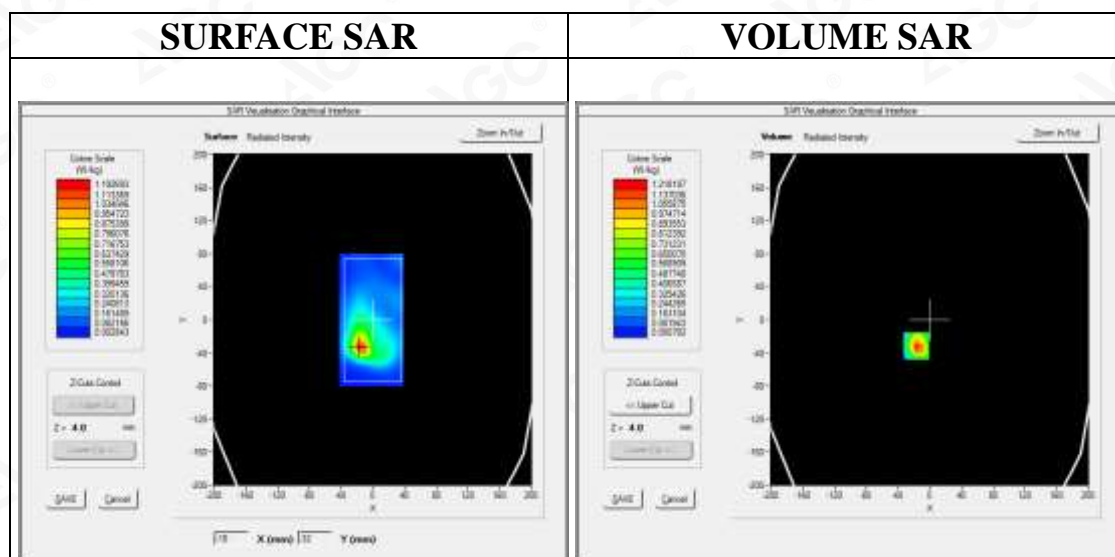

Maximum location: X=-17.00, Y=-32.00

SAR Peak: 2.15 W/kg

SAR 10g (W/Kg)	0.522629
SAR 1g (W/Kg)	1.152435





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

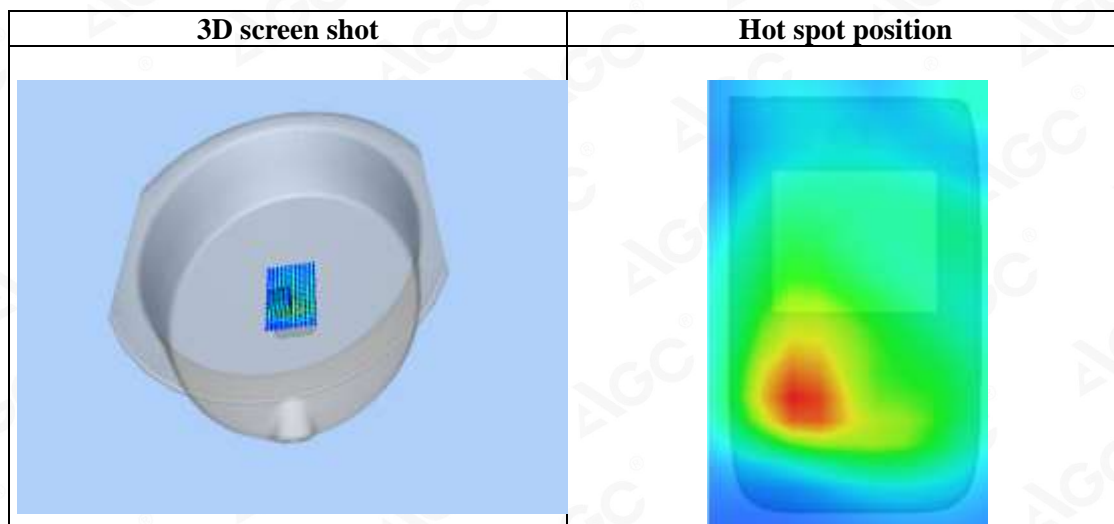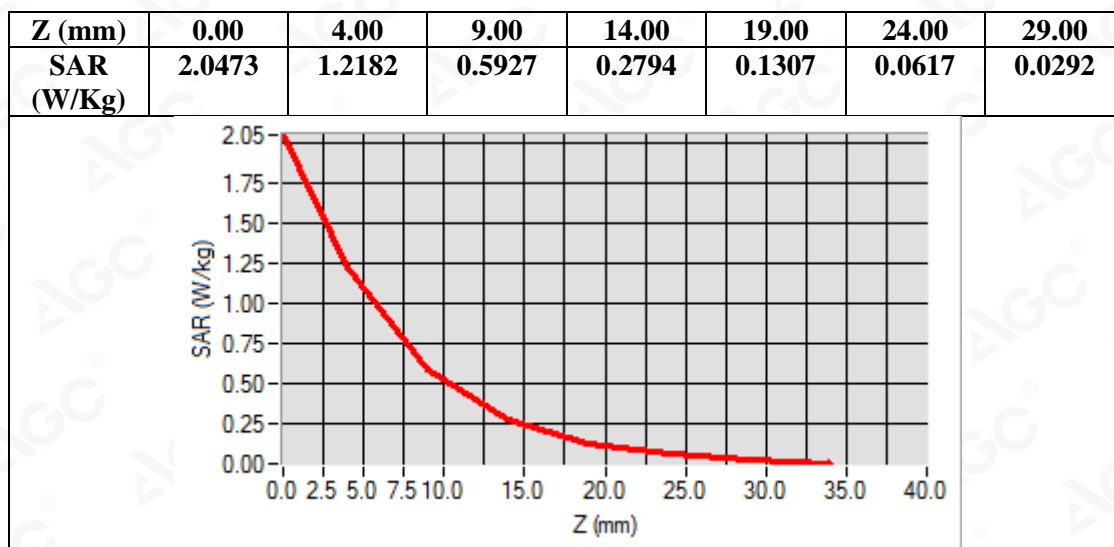

Test Laboratory: AGC Lab
LTE Band 8 Low-Touch-Right (1RB#0)
DUT: Smart Phone; Type: R19

Date: July 01,2019

Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.26
Frequency: 885MHz; Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 41.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.8


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 Low-Touch-Right/Area Scan: Measurement grid: dx=8mm, y=8mm

Configuration/ LTE BAND 8 Low-Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 8
Channels	Low
Signal	OFDM (Crest factor: 1.0)

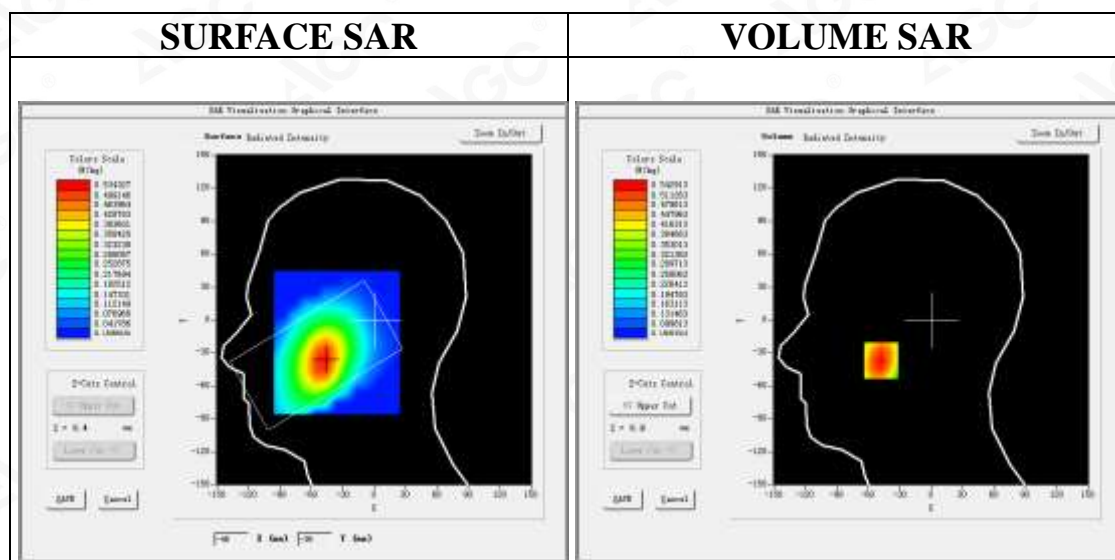

Maximum location: X=-48.00, Y=-37.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.390240
SAR 1g (W/Kg)	0.522068





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

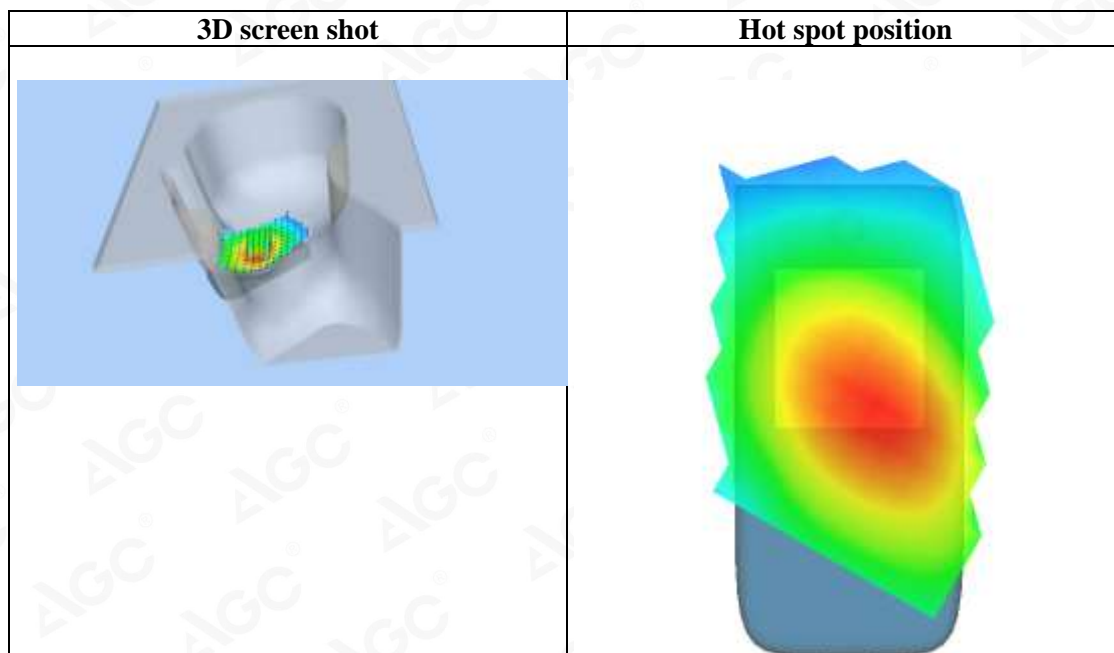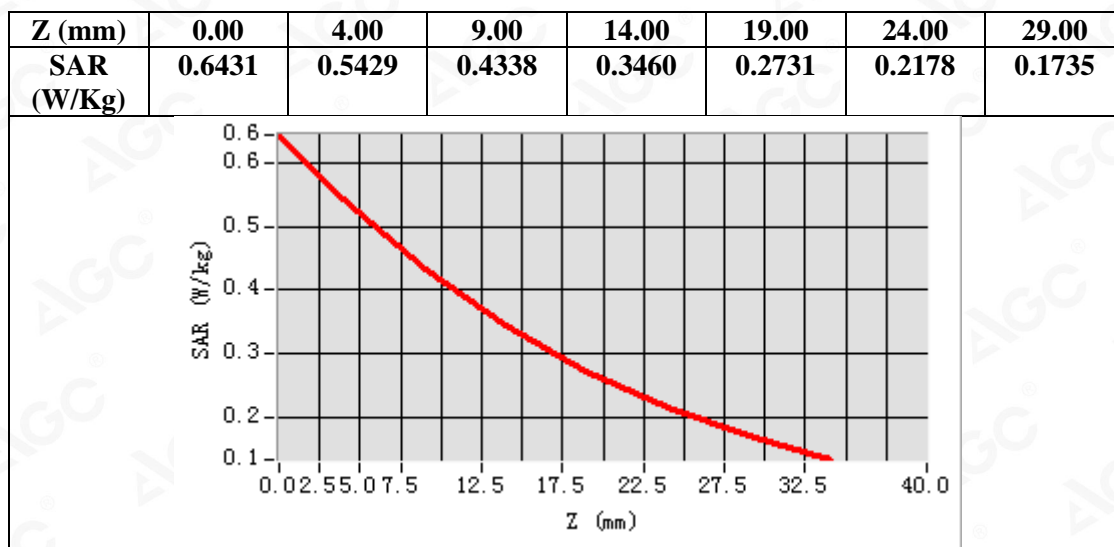

Test Laboratory: AGC Lab
LTE Band 8 Mid-Body-Back (1RB#0)
DUT: Smart Phone; Type: R19

Date: July 01,2019


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.26
Frequency: 897.5MHz; Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.94 \text{ mho/m}$; $\epsilon_r = 41.26$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 22.1, Liquid temperature ($^{\circ}\text{C}$): 21.8

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 Mid-Body-Back/Area Scan: Measurement grid: $dx=8\text{mm}$, $y=8\text{mm}$
Configuration/ LTE BAND 8 Mid-Body-Back /Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Area Scan	$dx=8\text{mm}$ $dy=8\text{mm}$, $h= 5.00 \text{ mm}$
ZoomScan	$5 \times 5 \times 7$, $dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 8
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

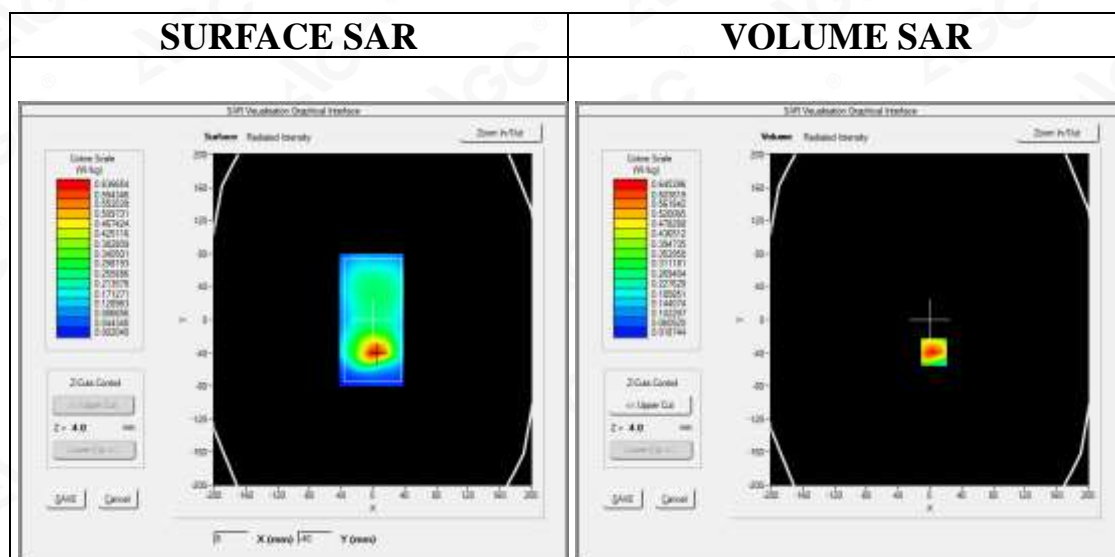

Maximum location: $X=5.00$, $Y=-39.00$

SAR Peak: 0.98 W/kg

SAR 10g (W/Kg)	0.357889
SAR 1g (W/Kg)	0.618251





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

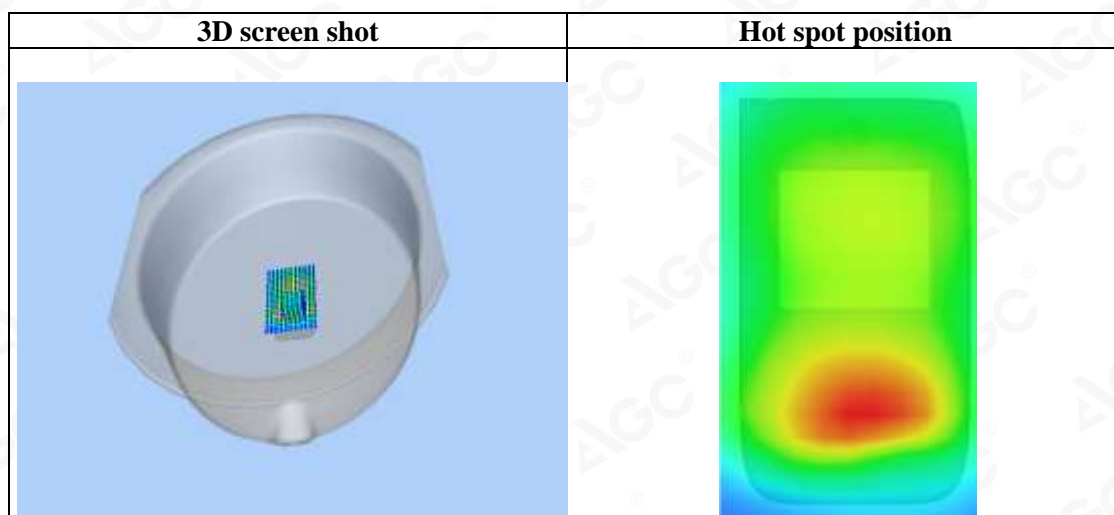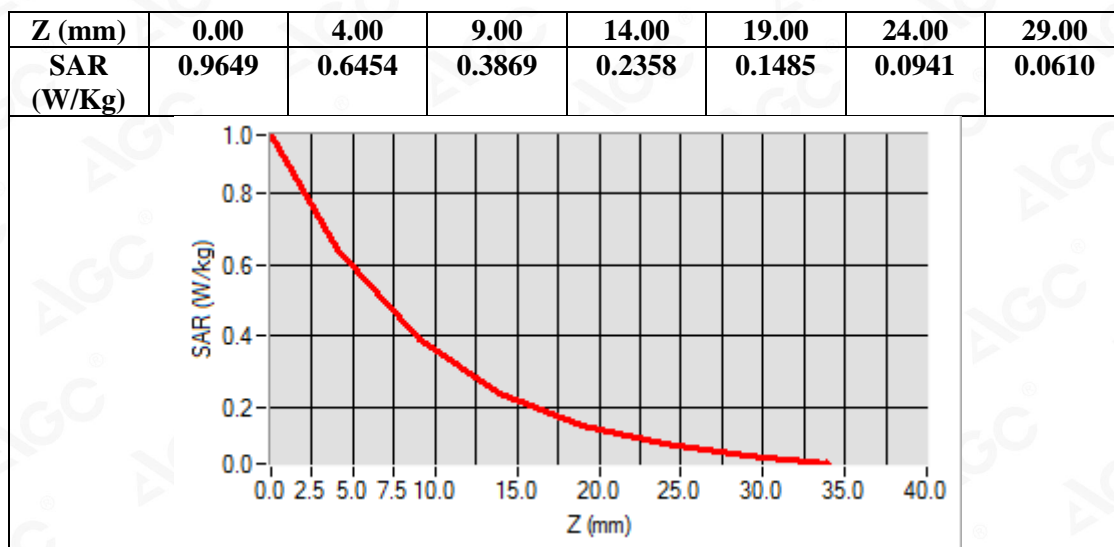

Test Laboratory: AGC Lab
LTE Band 8 High-Body-Back (1RB#0)
DUT: Smart Phone; Type: R19

Date: July 01,2019


Communication System: LTE; Communication System Band: LTE Band 8; Duty Cycle:1:1; Conv.F=5.26
Frequency: 910 MHz; Medium parameters used: $f = 900$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 41.26$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C): 22.1, Liquid temperature (°C): 21.8

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 8 High-Body-Back/Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 8 High-Body-Back /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 8
Channels	High
Signal	OFDM (Crest factor: 1.0)

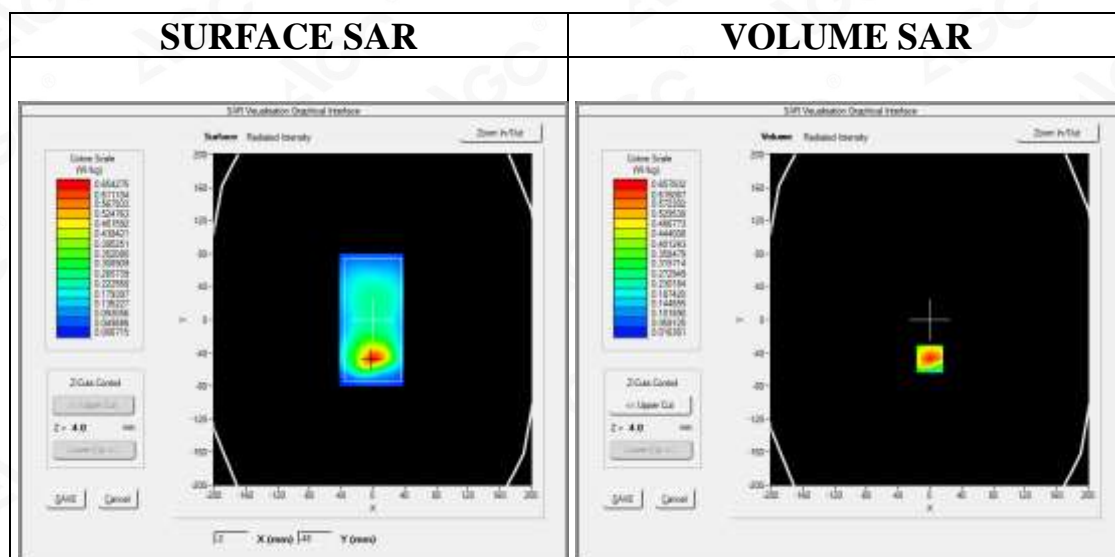

Maximum location: X=0.00, Y=-47.00

SAR Peak: 1.00 W/kg

SAR 10g (W/Kg)	0.360187
SAR 1g (W/Kg)	0.623618

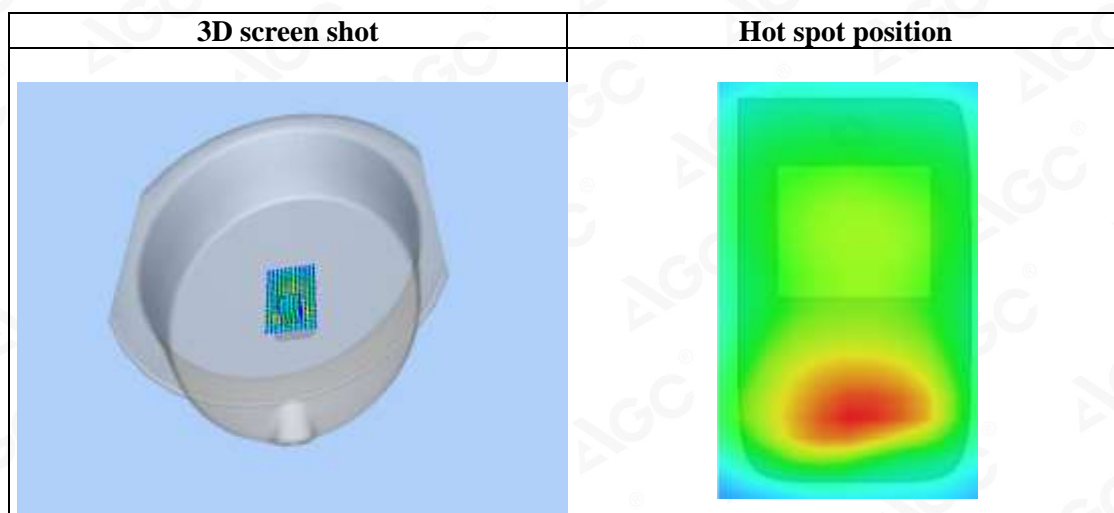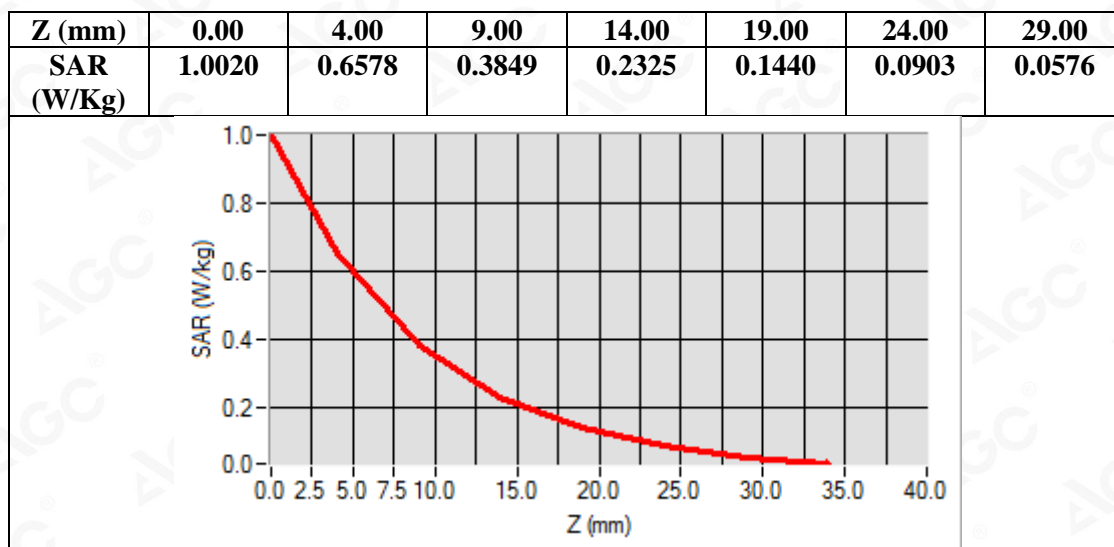

Test Laboratory: AGC Lab
LTE Band 20 High-Touch-Right (1RB#0)
DUT: Smart Phone; Type: R19

Date: June 28,2019


Communication System: LTE; Communication System Band: LTE Band 20; Duty Cycle:1:1; Conv.F=5.29
Frequency: 852 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 40.64$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Right Section
Ambient temperature ($^{\circ}\text{C}$): 21.2, Liquid temperature ($^{\circ}\text{C}$): 20.9

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 20 High-Touch-Right /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 20 High-Touch-Right /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm



Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE BAND 20
Channels	High
Signal	OFDM (Crest factor: 1.0)

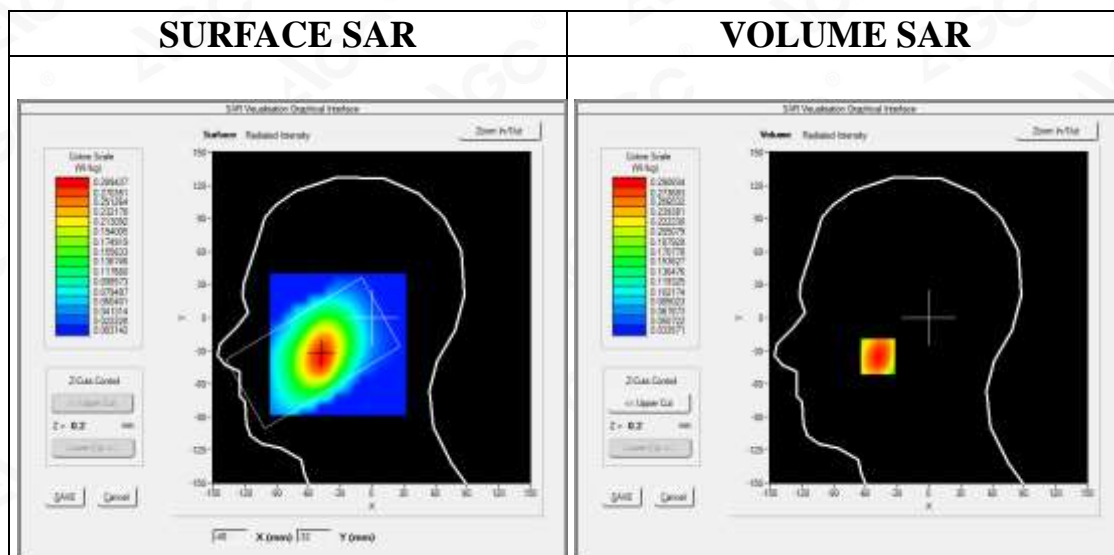

Maximum location: X=-48.00, Y=-35.00

SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.211554
SAR 1g (W/Kg)	0.281588

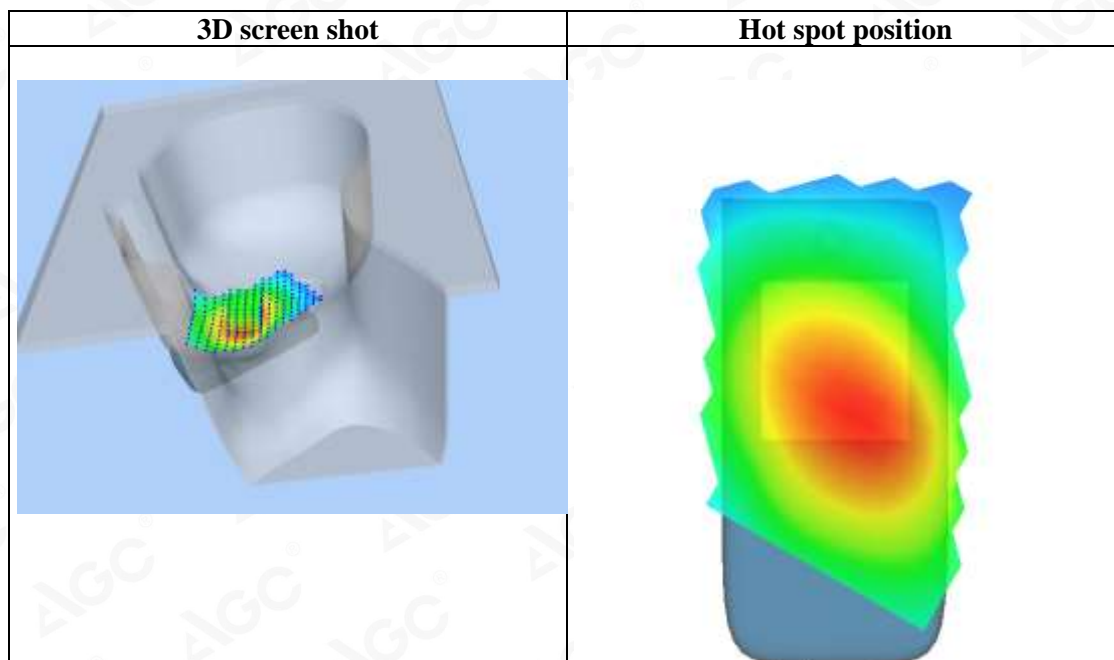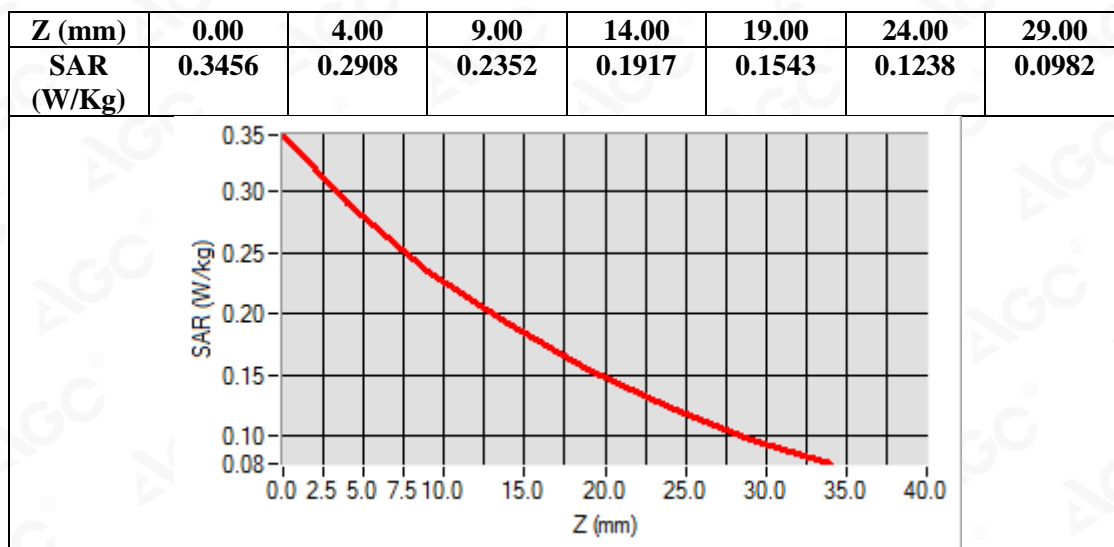

Test Laboratory: AGC Lab
LTE Band 20 High-Body-Back (1RB#0)
DUT: Smart Phone; Type: R19

Date: June 28,2019


Communication System: LTE; Communication System Band: LTE Band 20; Duty Cycle:1:1; Conv.F=5.29
Frequency: 852 MHz; Medium parameters used: $f = 835\text{MHz}$; $\sigma = 0.92 \text{ mho/m}$; $\epsilon_r = 40.64$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section
Ambient temperature ($^{\circ}\text{C}$): 21.2, Liquid temperature ($^{\circ}\text{C}$): 20.9

SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/ LTE BAND 20 High-Body-Back /Area Scan: Measurement grid: $dx=8\text{mm}$, $y=8\text{mm}$
Configuration/ LTE BAND 20 High-Body-Back /Zoom Scan: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Area Scan	$dx=8\text{mm}$ $dy=8\text{mm}$, $h= 5.00 \text{ mm}$
ZoomScan	$5x5x7, dx=8\text{mm}$ $dy=8\text{mm}$ $dz=5\text{mm}$
Phantom	ELLI
Device Position	Body Back
Band	LTE BAND 20
Channels	High
Signal	OFDM (Crest factor: 1.0)

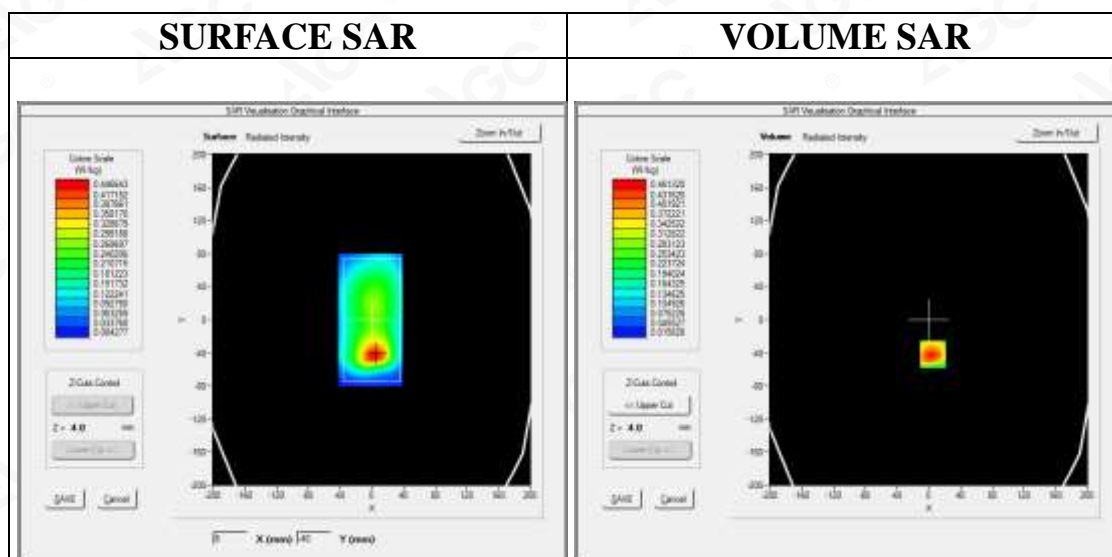

Maximum location: $X=5.00$, $Y=-42.00$

SAR Peak: 0.70 W/kg

SAR 10g (W/Kg)	0.265906
SAR 1g (W/Kg)	0.446103





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

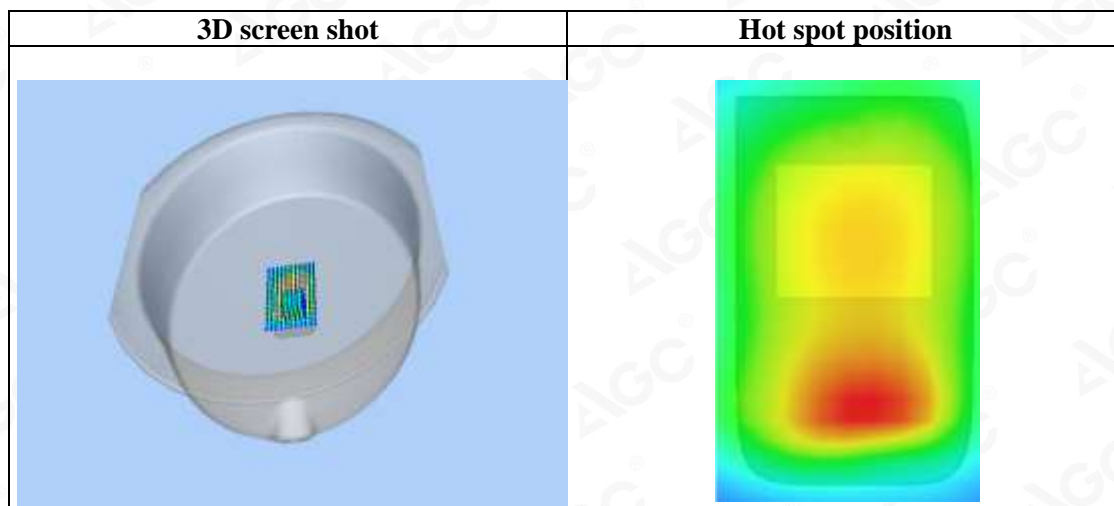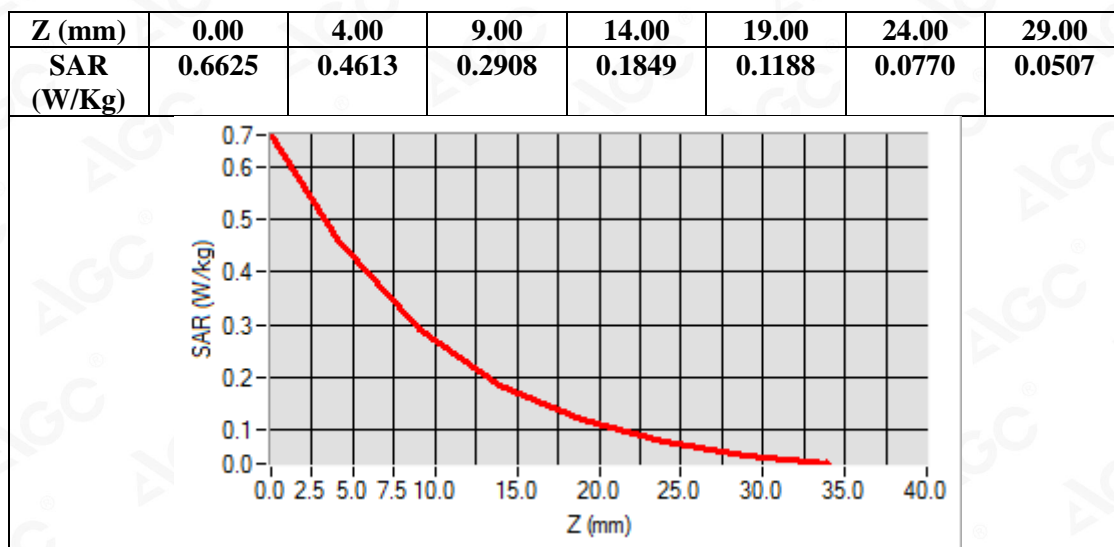

WIFI MODE

Test Laboratory: AGC Lab

802.11b Mid-Touch-Left

DUT: Smart Phone; Type: R19

Date: June 26,2019

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.90;
Frequency: 2442 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section
Ambient temperature (°C):21.3, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Mid- Touch-Left/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Mid- Touch-Left/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

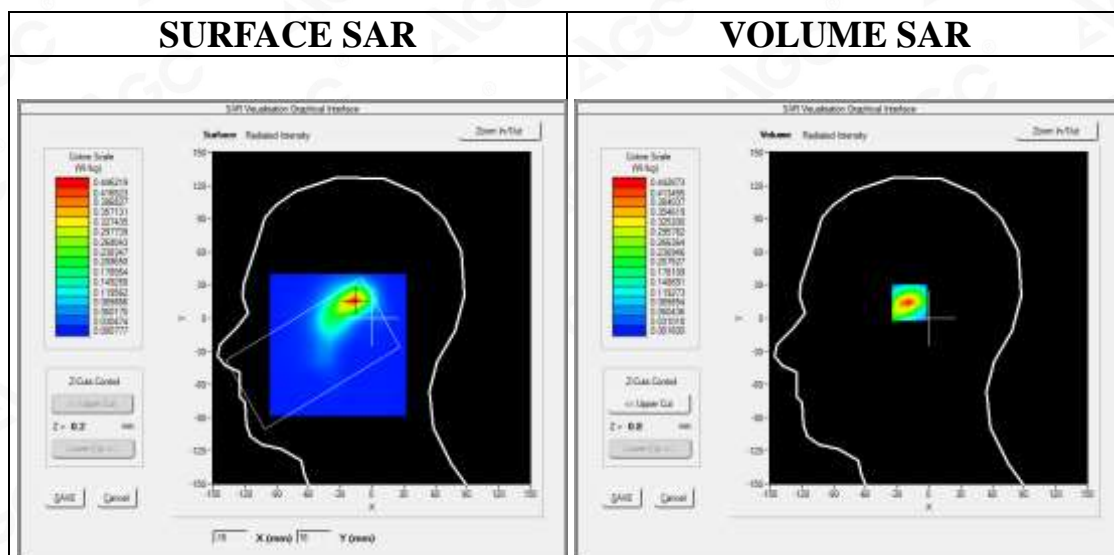

Maximum location: X=-16.00, Y=16.00

SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.186226
SAR 1g (W/Kg)	0.404150





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

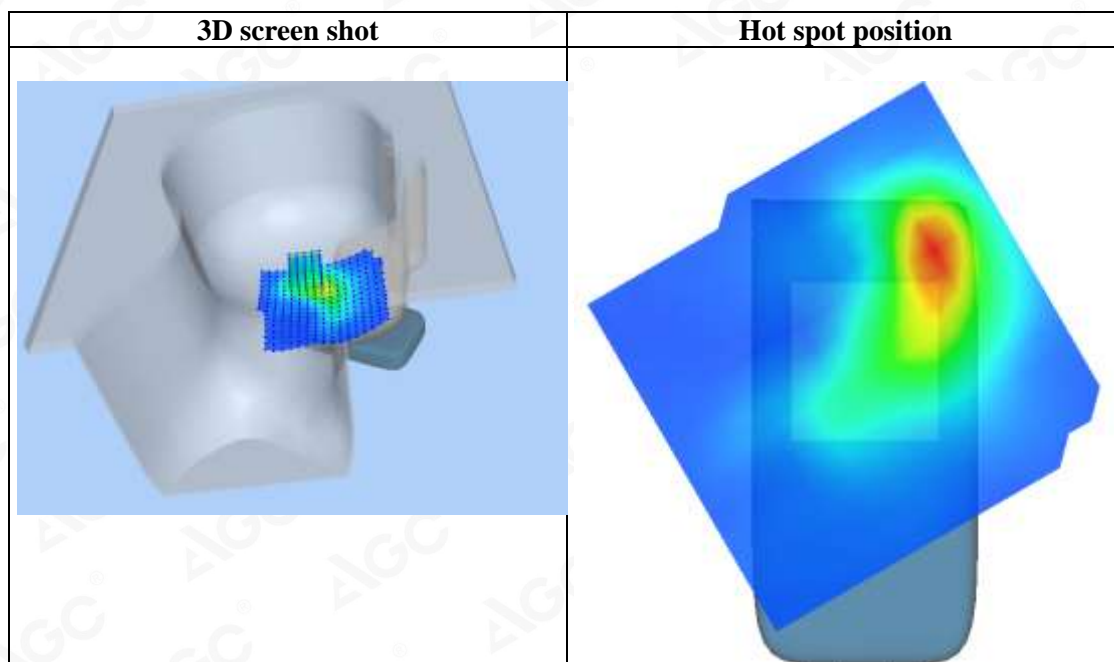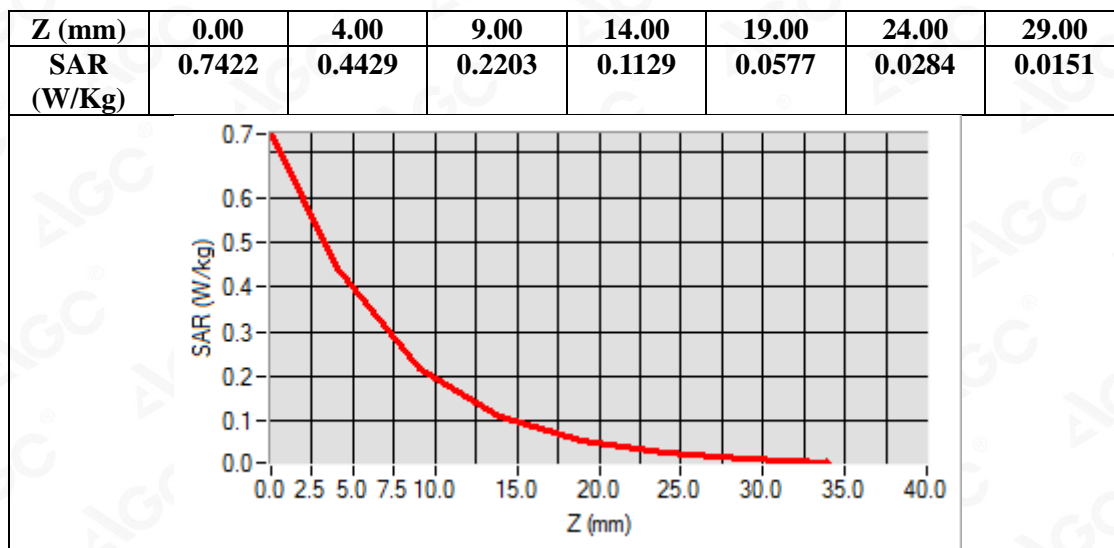

Test Laboratory: AGC Lab
802.11b Low-Body-Worn- Back
DUT: Smart Phone; Type: R19

Date: June 26,2019

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=4.90;
Frequency: 2412 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r = 38.69$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section
Ambient temperature (°C):21.3, Liquid temperature (°C): 20.9


SATIMO Configuration:

- Probe: SSE5; Calibrated: Aug. 08,2018; Serial No.: SN 22/12 EP159
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: ELLI39 Phantom
- Measurement SW: OpenSAR V4_02_35

Configuration/802.11b Low- Body- Back /Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/802.11b Low- Body- Back /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	2450MHz
Channels	Low
Signal	Crest factor: 1.0

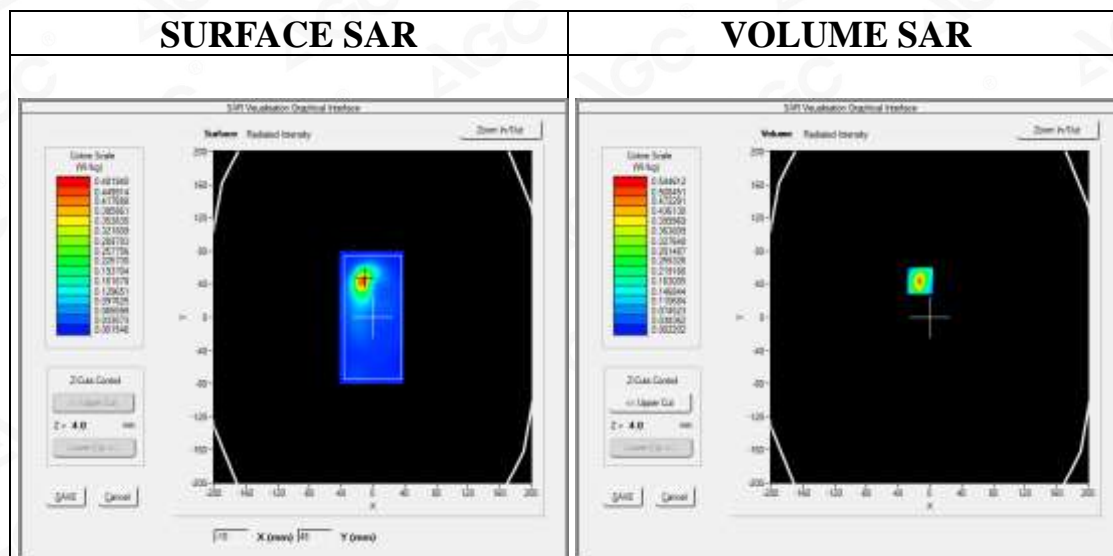

Maximum location: X=-12.00, Y=44.00

SAR Peak: 0.96 W/kg

SAR 10g (W/Kg)	0.193337
SAR 1g (W/Kg)	0.481288



Attestation of Global Compliance(Shenzhen)Co.,Ltd.



Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline:400 089 2118

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.9765	0.5446	0.2395	0.1072	0.0482	0.0229	0.0110

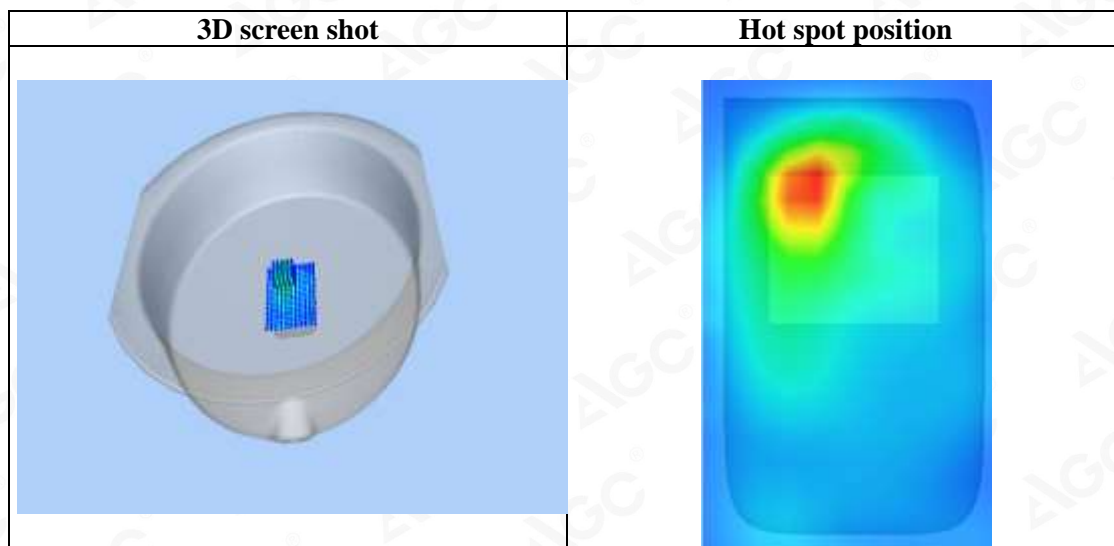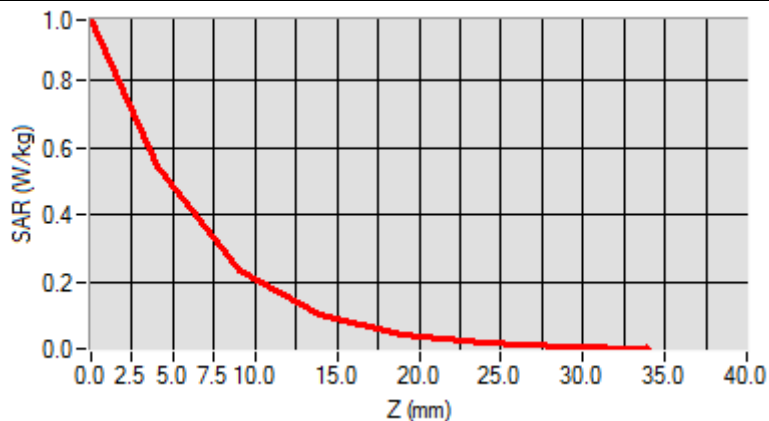


APPENDIX C. TEST SETUP PHOTOGRAPHS
LEFT-CHEEK TOUCH

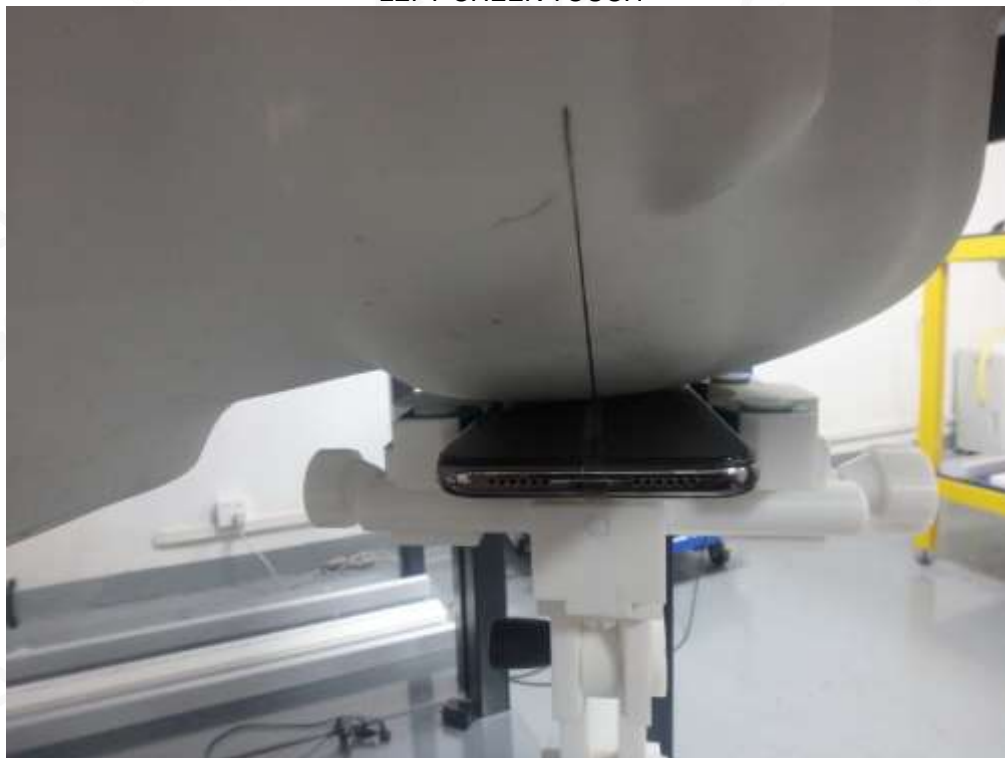


LEFT-TILT 15°



RIGHT-CHEEK TOUCH

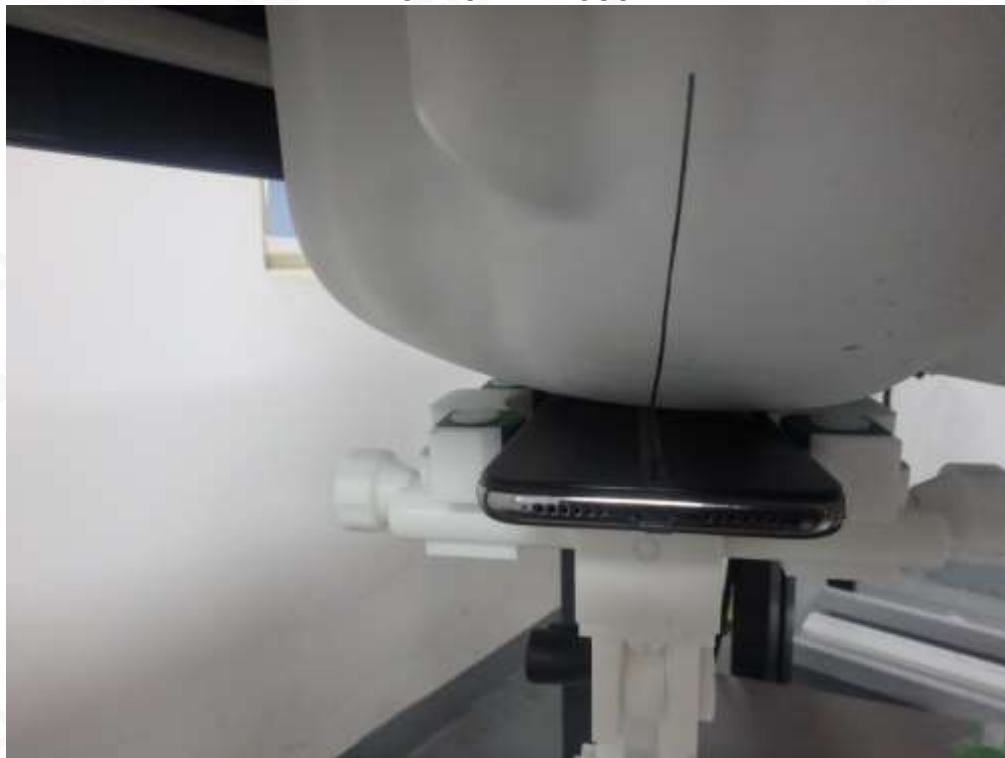


RIGHT-TILT 15°

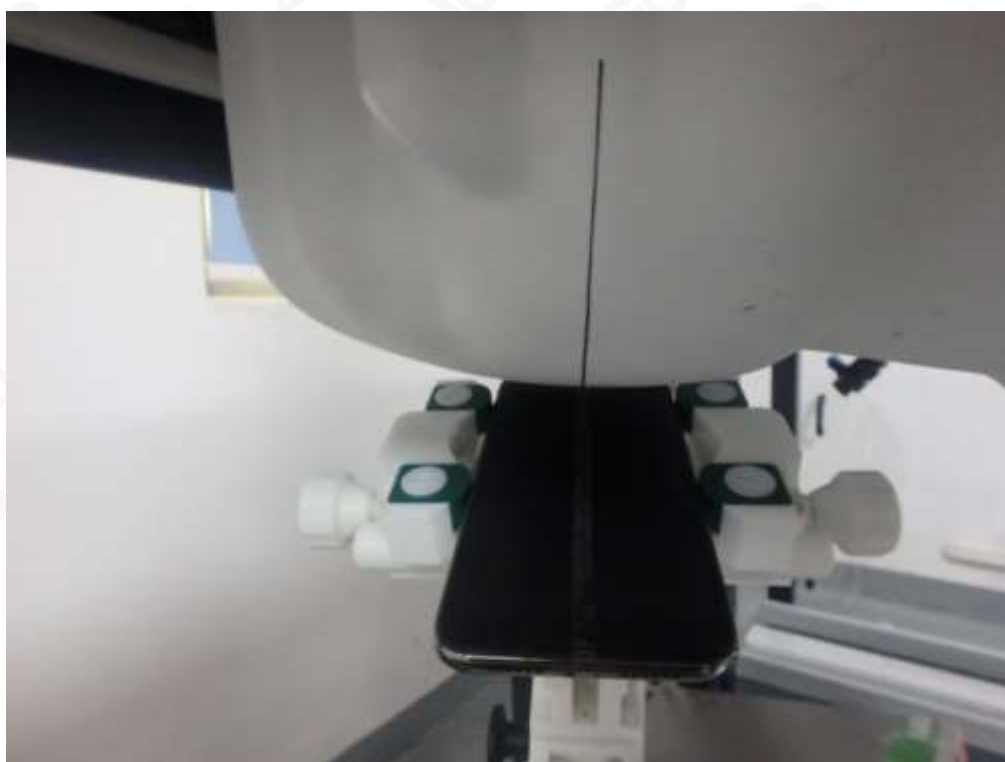


Body Back 5mm



Body Front 5mm

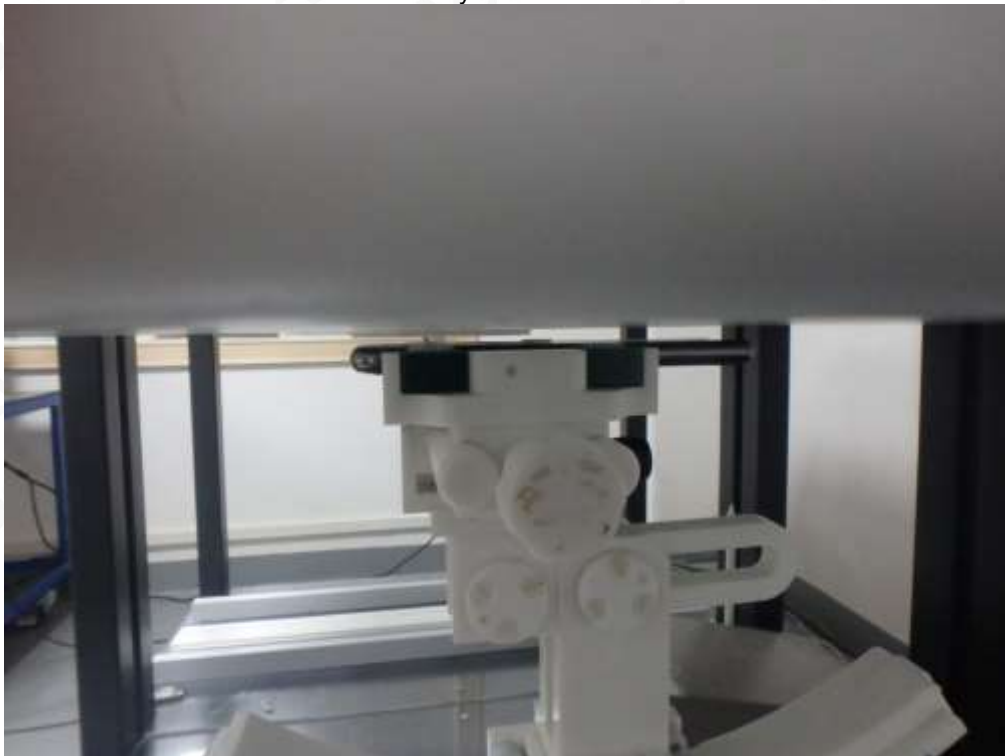


Body back with Headset 5mm

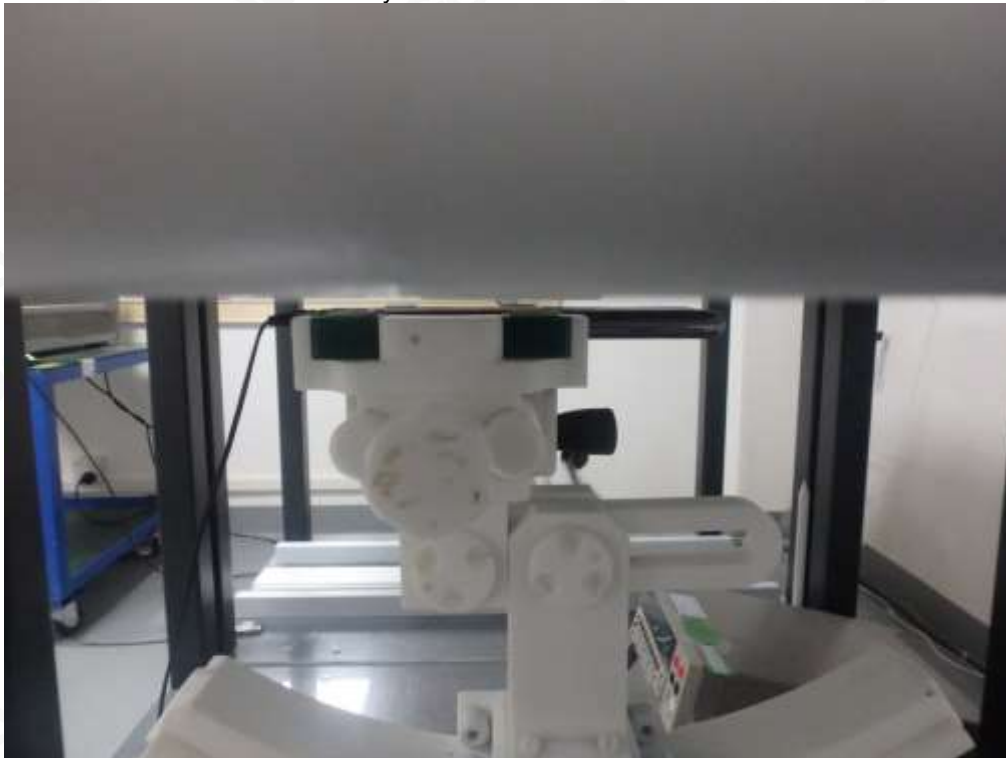

Body front with Headset 5mm





Position of the device under test in relation to the phantom

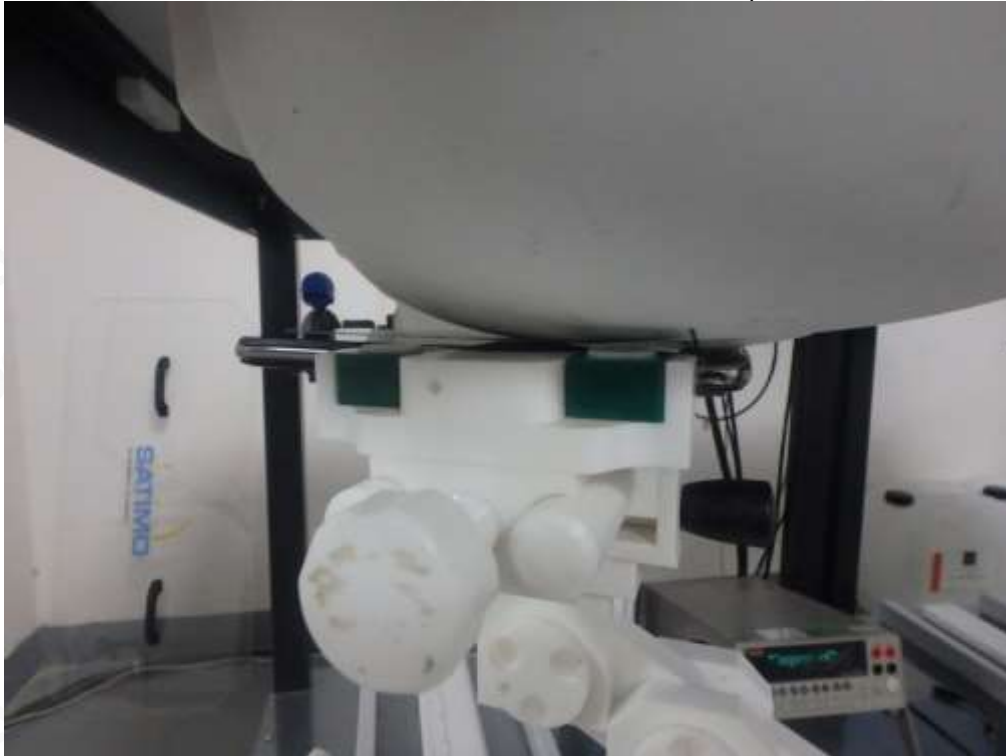

DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note : The position used in the measurement were according to EN62209-1/2

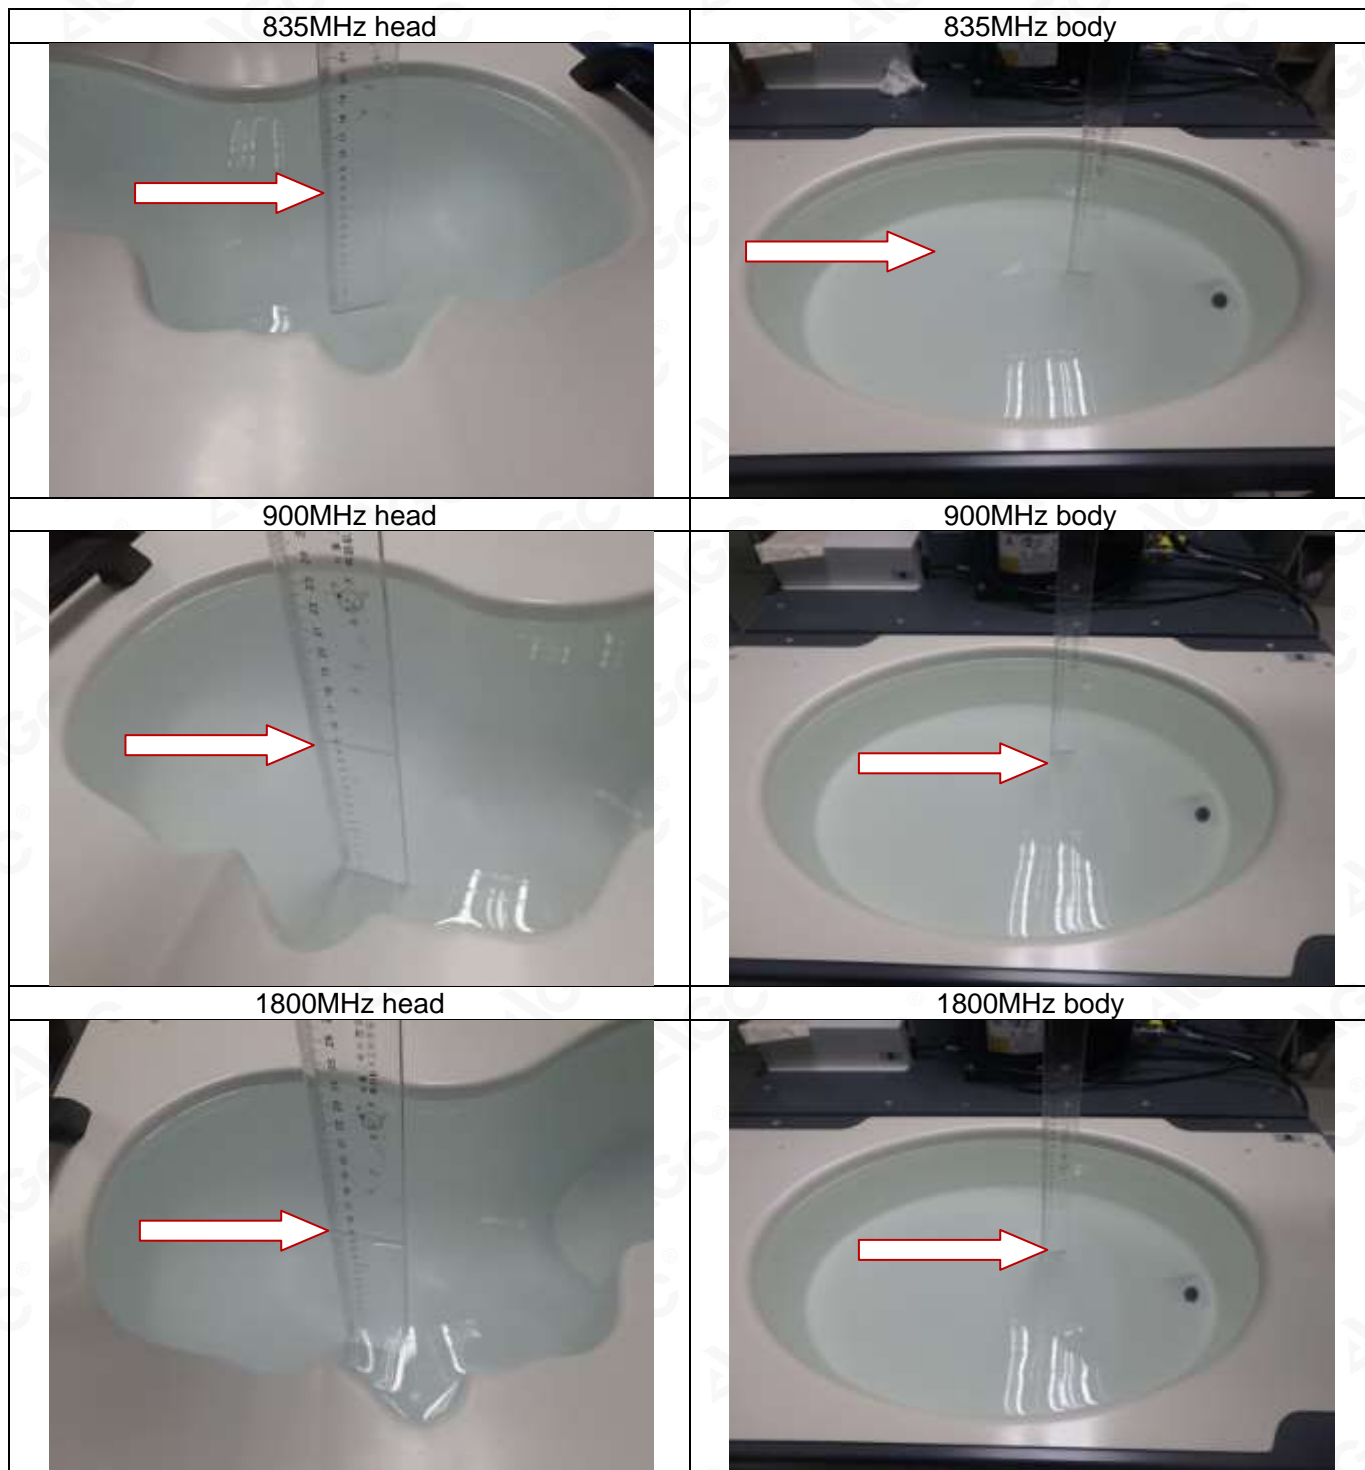

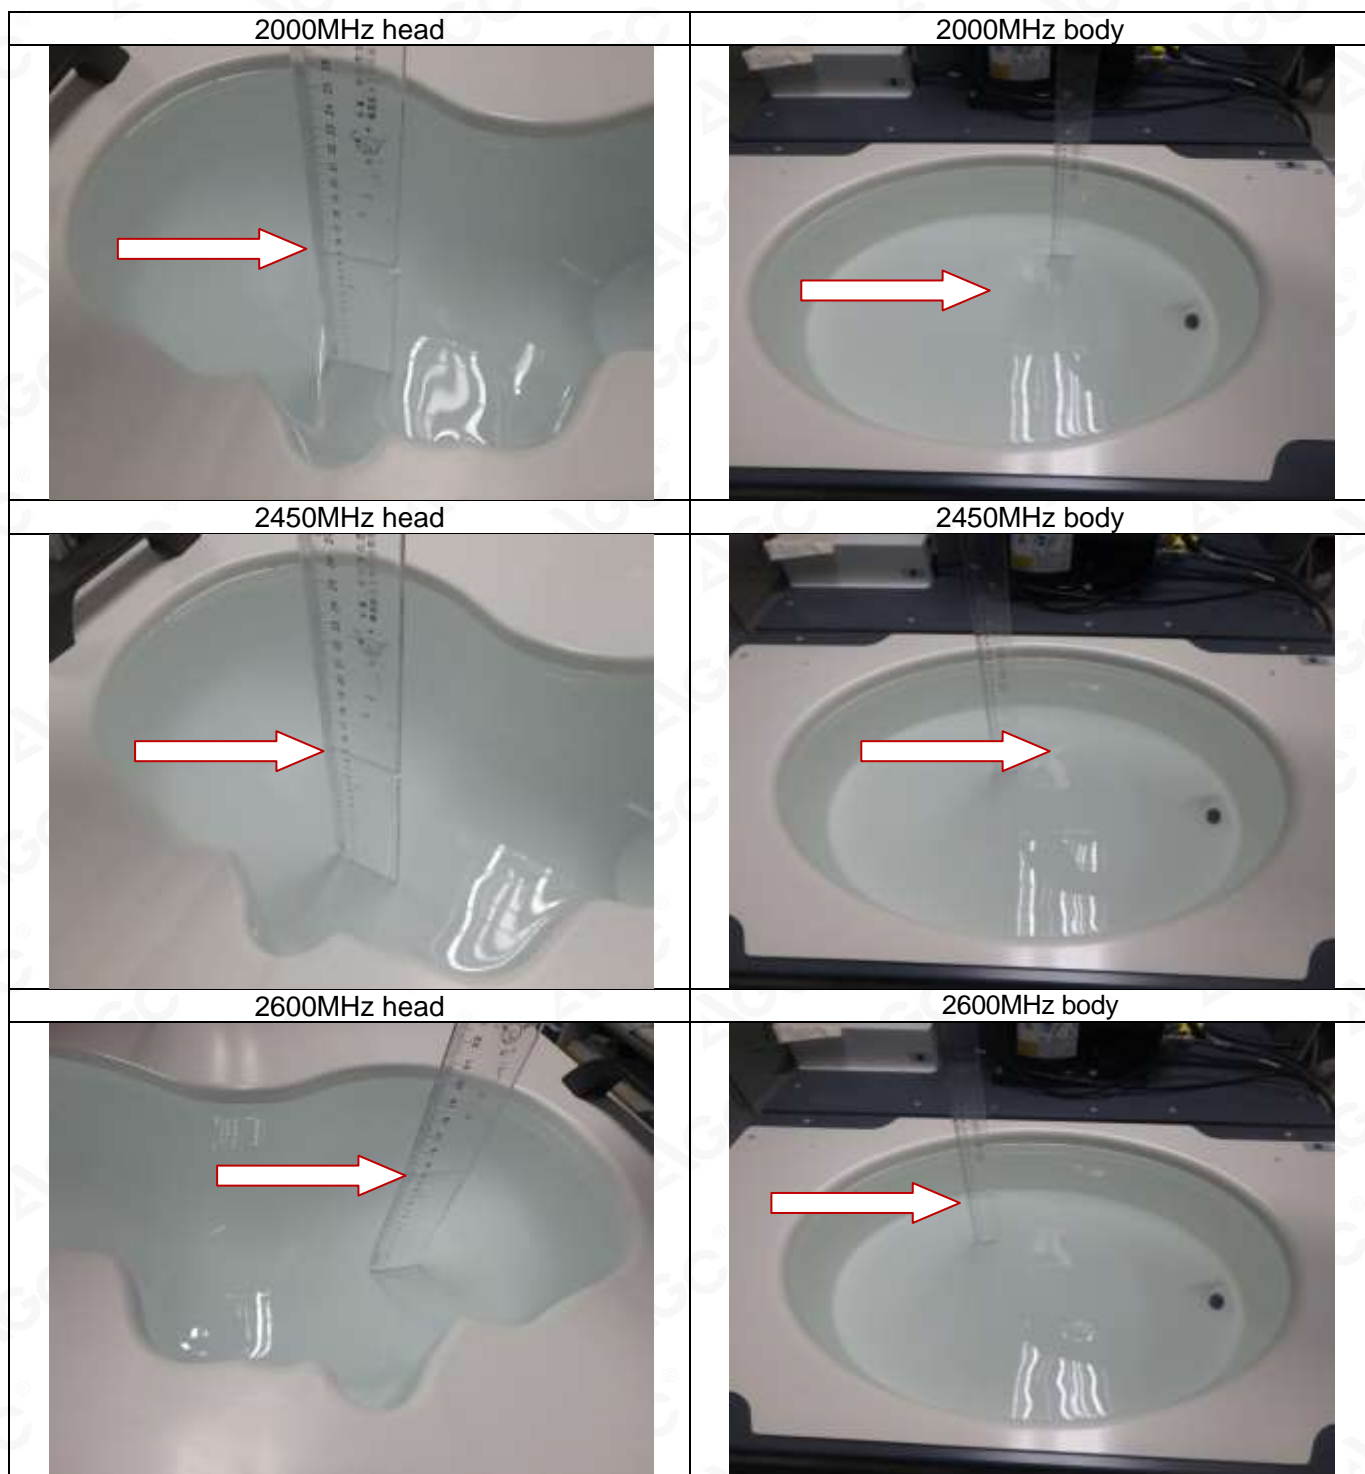

APPENDIX D. CALIBRATION DATA

Refer to Attached files.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1-4, Chaxi Sanwei Technial Industrial Park, Gushu,
Xixiang, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline:400 089 2118