

RF Test Report

Report No.: AGC00552181219EE14

PRODUCT DESIGNATION : Smart Phone
BRAND NAME : CUBOT
TEST MODEL : X19
APPLICANT : Shenzhen Huafurui Technology Co., Ltd
DATE OF ISSUE : Jan. 07, 2019
STANDARD(S) : Final draft ETSI EN 303 345 V1.1.7 (2017-03)
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 07, 2019	Valid	Initial release

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. TEST FACILITY	6
6. EN 303 345 REQUIREMENT	7
6.1 SENSITIVITY	7
6.2 ADJACENT CHANNEL SELECTIVITY AND BLOCKING	10
6.3 UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN	13
APPENDIX A PHOTOGRAPHS OF TEST SETUP	17

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


1. TEST RESULT CERTIFICATION

Applicant	Shenzhen Huafului Technology Co., Ltd.
Address	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Manufacturer	Shenzhen Huafului Technology Co., Ltd.
Address	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Factory Name	Shenzhen Huafului Technology Co., Ltd.
Address	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Product Designation	Smart Phone
Brand Name	CUBOT
Test Model	X19
Date of test	Dec. 25, 2018 to Jan. 07, 2019
Deviation	None
Test Result	Pass

The above equipment was tested by ATTESTATION OF GLOBAL COMPLIANCE (SHENZHEN) CO., LTD. for compliance with the requirements set forth in the European Standard ETSI EN 303 345. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

The test results of this report relate only to the tested sample identified in this report.

Tested By



Donjon Huang(Huang Dongyang)

Jan. 07, 2019

Reviewed By



Bart Xie(Xie Xiaobin)

Jan. 07, 2019

Approved By



 Forrest Lei(Lei Yonggang)
 Authorized Officer

Jan. 07, 2019

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

2. EUT DESCRIPTION

Details of technical specification refer to the description in follows:

Hardware Version	Q593_MB_V1.0
Software Version	CUBOT_X19_9021C_V01_20181211
modulation method	Frequency modulation, without RDS (FM)
frequency band	VHF band II: 87.5 MHz to 108 MHz
Antenna Type	Integral antenna Using earphone as antenna
Power Supply:	DC 3.8V

NOTE: For more information, please refer to User's Manual.

Test signal configurations are as bellow:

The generated FM signals (wanted and unwanted) and the blocking signal shall be in accordance with table
 The configuration is based on Recommendation ITU-R BS.641 [i.6].

Parameter	FM signals		AM signal
	Wanted	Unwanted	Blocking
Audio modulation	1 kHz tone	Weighted noise Recommendation ITU-R BS.559-2 [5], clause 1	1 kHz tone
	Band-limited to 15 kHz		
Other modulation parameters	±60,8 kHz peak deviation	32 kHz quasi-peak deviation (see note)	80 % depth
Pilot tone	None	None	

NOTE: This is equivalent to $19 / \sqrt{2} = 13,4$ kHz RMS deviation in the absence of pre-emphasis.

Test items and the results are as bellow:

Basic Standard	Test Type	Result
EN 303 345 Clause 4.2 Conformance requirements	4.2.4 Sensitivity	Pass
	4.2.5 Adjacent channel selectivity and blocking	Pass
	4.2.6 Unwanted emissions in the spurious domain	Pass

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

3. MEASUREMENT UNCERTAINTY

The Uncertainty Is Calculated Using The Methods Suggested In The “Guide To The Expression Of Uncertainty In Measurement” (Gum) Published By Iso.

- Uncertainty Of Sensitivity, $U_c=\pm 3.8\text{db}$
- Uncertainty Of Adjacent Channel Selectivity And Blocking, $U_c=\pm 3.8\text{db}$
- Uncertainty Of Radiated Emission, $U_c=\pm 3.2\text{db}$

4. DESCRIPTION OF TEST MODES

The EUT has been tested under Normal Operating and standby condition. No software used to control the EUT for staying in continuous receiving mode for testing.

5. TEST FACILITY

Test Site:	Attestation of Global Compliance (Shenzhen) Co., Ltd.
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao 'an District, Shenzhen, Guangdong, China

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.




6. EN 303 345 REQUIREMENT

6.1 SENSITIVITY

6.1.1 MEASUREMENT EQUIPMENT USED:

Description	Manufacturer	Model No.	Calibration Date	Calibration Due.
MXG X-Series Vector Signal Generator	Agilent	N5182B	Sep. 20,2018	Sep. 19,2019
MXG X-Series Vector Signal Generator	Agilent	N5182A	Sep. 20,2018	Sep. 19,2019
Noise Signal Generator	Beijingdaming	DM8899A	Aug. 01, 2018	July 31, 2019
Audio Analyzer	HP	8920B	June 12, 2018	June 11, 2019
Trilog Broadband Antenna VULB 9168	SCHWARZBECK	494	Mar. 01, 2018	Feb. 28, 2019
Power divider(combiner)	Mini-Circuits	SF781901412	Jul.13,2018	Jul.12,2019

6.1.2 TEST SETUP:

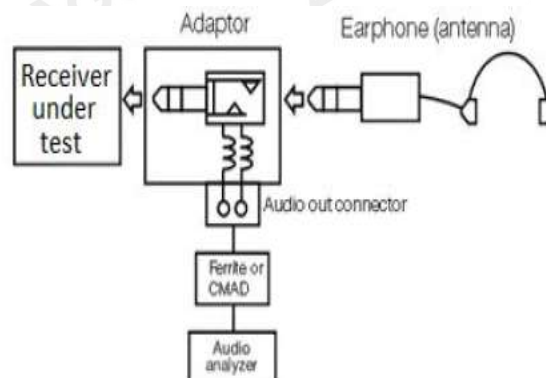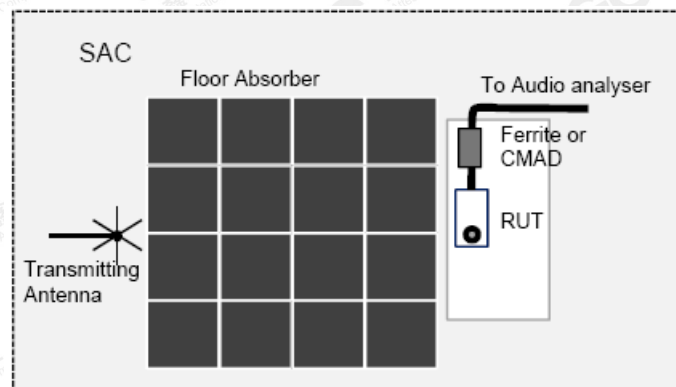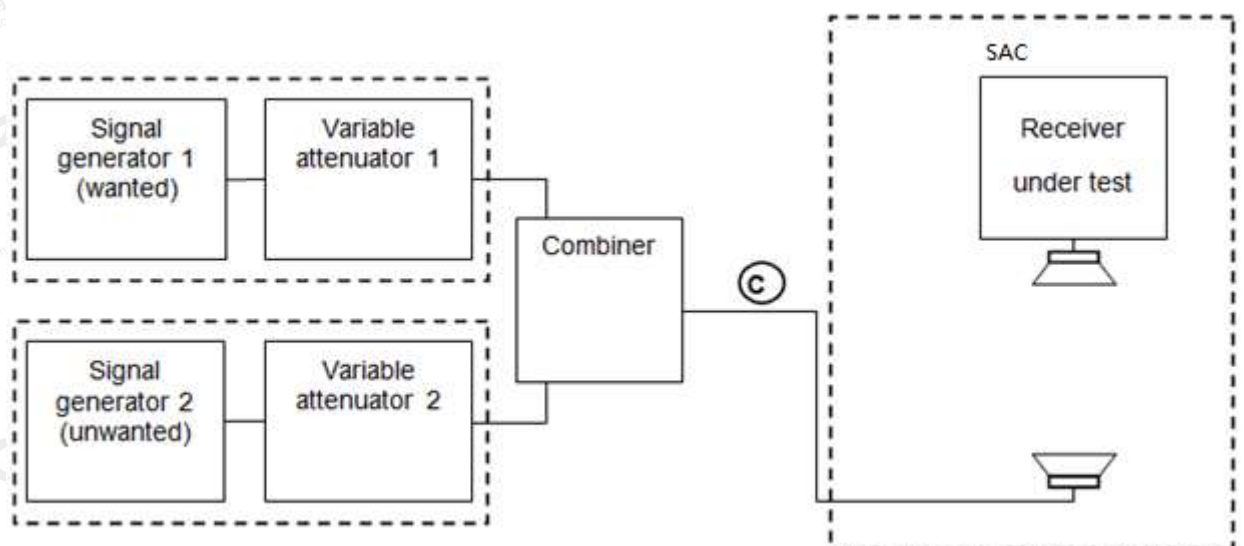

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.1.3 TEST LIMITS:

Sensitivity requirements

Test	De-modulation	Tuned frequency band	Wanted signal centre frequency (MHz)	Required sensitivity limit	
				Conducted (dBm)	Radiated (dBμV/m)
1	AM	LF	0,216	-65	74
2		MF	0,999	-65	66
3		HF	9,9	-65	60
4	FM	VHF band II	98	-90	50 (see note 1)
5	DAB	VHF band III	202,928	-94	37 (see note 2)
6	DRM	LF	0,216	-101	58
7		MF	0,999	-101	52
8		HF1	4	-101	44
9		HF2	19	-101	40
10		VHF band I	65	-102	45
11		VHF band II	100	-102	46
12		VHF band III	200	-102	51

NOTE 1: For products with an integral antenna, the requirement is relaxed to 67 dBμV/m.

NOTE 2: For products with an integral antenna, the requirement is relaxed to 50 dBμV/m.

Impairment criteria for sensitivity tests

Demodulation	Impairment criteria
AM	SNR ≥ 28 dBQ ref 40 % AM
FM	SNR ≥ 40 dBQ ref ±60,8 kHz deviation; clean audio (see note 1)
DAB	Clean audio (see note 2)
DRM	Clean audio (see note 2)
NOTE 1: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. clicks resulting from FM threshold effects).	
NOTE 2: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. muting, clicks, warbles or squeaks).	

6.1.4 TEST PROCEDURE:

- For radiated testing, the EUT is placed in semi anechoic chamber (SAC). The field strength generated by the signal generator applying to the EUT at 3 meters distance from the antenna is pre-calibrated before testing.
- The 'unwanted' signal generator remains switched off for the duration of the test.
- The 'wanted' signal generator is set to the required modulation method and test configuration as specified, and to the frequency specified. The signal level is adjusted to provide the level, as measured at ©, specified plus 30 dB.
- The receiver (EUT) is tuned to the frequency of the 'wanted' signal generator. The audio level shall be set so as to provide clean 1 kHz audio tone at the audio output (that is less than 10 % total harmonic distortion) but of sufficient level to drive the measurement device.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

5. The level of the 'wanted' signal generator is adjusted to provide the level, as measured at ©
6. The audio output, measured using the measurement device, is recorded as the signal level, S.
7. The modulating audio signal for the 'wanted' signal generator is removed. The audio output, measured using the measurement device, is recorded as the noise level, N.
8. If the impairment criteria given are met then the receiver has passed the test.

6.1.5 TEST RESULTS:

FM (integral antenna) VHF band II 98MHz			
Wanted Signal Level at © (dBμV/m)	SNR (dBQ)	Limit (dBQ)	Result
67	86	≥ 40	Pass

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.2 ADJACENT CHANNEL SELECTIVITY AND BLOCKING

6.2.1 MEASUREMENT EQUIPMENT USED:

Same as 6.1.1

6.2.2 TEST SETUP:

Same as 6.1.2

6.2.3 TEST LIMITS:

Channel spacing for adjacent channel selectivity and blocking

Demodulation	Tuned frequency band	Unwanted frequency (N = 1, 2, 3)	Unwanted frequency (blocking)
AM □	LF	$\pm N \times 9 \text{ kHz}$	$\pm 90 \text{ kHz}$
	MF	$\pm N \times 9 \text{ kHz}$	$\pm 90 \text{ kHz}$
	HF	$\pm N \times 10 \text{ kHz}$	$\pm 100 \text{ kHz}$
FM	VHF band II	$\pm(N + 1) \times 100 \text{ kHz}$	$\pm 800 \text{ kHz}$
DAB	VHF band III	$\pm N \times 1\,712 \text{ kHz}$	$\pm 12 \text{ MHz}$
DRM	LF	$\pm N \times 9 \text{ kHz}$	$\pm 90 \text{ kHz}$
	MF	$\pm N \times 9 \text{ kHz}$	$\pm 90 \text{ kHz}$
	HF	$\pm N \times 10 \text{ kHz}$	$\pm 100 \text{ kHz}$
	VHF band I	$\pm N \times 100 \text{ kHz}$	$\pm 800 \text{ kHz}$
	VHF band II	$\pm N \times 100 \text{ kHz}$	$\pm 800 \text{ kHz}$
	VHF band III	$\pm N \times 100 \text{ kHz}$	$\pm 800 \text{ kHz}$

Impairment criteria for adjacent channel selectivity and blocking tests

Demodulation	Impairment criteria
AM	SNR $\geq 28 \text{ dBQ}$ ref 40 % AM
FM	SNR $\geq 40 \text{ dBQ}$ ref $\pm 60,8 \text{ kHz}$ deviation; clean audio (see note 1)
DAB	Clean audio (see note 2)
DRM	Clean audio (see note 2)
NOTE 1: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. clicks resulting from FM threshold effects).	
NOTE 2: Clean audio is defined as 10 seconds of audio with no subjective impairments (e.g. muting, clicks, warbles or squeaks).	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Adjacent channel selectivity and blocking requirements

Test	De-modulation	Tuned frequency band	C Wanted signal centre frequency (MHz)	C Wanted signal level		Required I/C ratio (see notes 1 and 2)			
				Conducted (dBm)	Radiated (dBµV/m)	N = 1 (dB)	N = 2 (dB)	N = 3 (dB)	Blocking (dB)
1R	AM (built-in or integral antenna, see note 4)	LF	0,216	n/a	80	-30	10	20	20
2R		MF	0,999	n/a	72	-30	10	20	20
3R		HF	9,9	n/a	66	-30	10	20	20
1C	AM (external antenna)	LF	0,216	-59	n/a	-5	25	35	40
2C		MF	0,999	-59	n/a	-5	25	35	40
3C		HF	9,9	-59	n/a	-5	25	35	40
4R	FM (built-in or integral antenna, see note 4)	VHF band II	98	n/a	56 (see note 3)	-15	-3	8	20
4C	FM (external antenna)	VHF band II	98	-84	n/a	3	17	30	30
5	DAB	VHF band III	202,928	-70	61	35	40	45	40
6	DRM	LF	0,216	-91	68	25	35	45	50
7		MF	0,999	-91	62	25	35	45	50
8		HF1	4	-91	54	25	35	45	50
9		HF2	19	-91	54	25	35	45	50
10		VHF band I	65	-91	50	35	40	45	50
11		VHF band II	100	-92	55	35	40	45	50
12		VHF band III	200	-92	61	35	40	45	50

NOTE 1: The frequency of the interferer shall be calculated using the channel spacing data in table 7 for each of the 6 defined adjacent channels $N = \{-3, -2, -1, +1, +2, +3\}$ and the two blocking offsets. Each row of table 8 thus defines 8 individual tests.

NOTE 2: The minimum level of I for the relevant level of impairment is calculated by adding the I/C ratio to the wanted C level.

NOTE 3: The wanted signal level for receivers with integral antenna is 73 dBµV/m.

NOTE 4: The ACS and blocking requirements for AM and FM devices are currently separated into different limits for radiated and conducted testing methods. These limits are likely to be unified in a future revision of the present document. Users of the present document should consult frequently the latest list published in the Official Journal of the European Union.

6.2.4 TEST PROCEDURE:

- For radiated testing, the EUT is placed in semi anechoic chamber (SAC). The field strength generated by the signal generator applying to the EUT at 3 meters distance from the antenna is pre-calibrated before testing.
- The 'wanted' signal generator is set to the required modulation method and test configuration as specified, and to the frequency specified. The signal level is adjusted to provide the level, as measured at ©, specified in above table, with the 'unwanted' generator switched off
- The receiver (EUT) is tuned to the frequency of the 'wanted' signal generator. The audio level shall be set so as to provide clean 1 kHz audio tone at the audio output (that is less than 10 % total harmonic distortion) but of sufficient level to drive the measurement device.
- The 'unwanted' signal generator is set to the required modulation method and test configuration as

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

specified. and to the frequency calculated from the wanted signal centre frequency and the required offset specified in above Table. The signal level is adjusted to provide the level, as measured at ©, specified in above Table, with the 'wanted' generator switched off. For the blocking test only, the audio modulation of the 'unwanted' signal shall be removed whilst measuring the level at ©.

5. The 'wanted' signal generator is switched back on.
6. The audio output, measured using the measurement device, is recorded as the signal level, S.
7. The modulating audio signal for the 'wanted' signal generator is removed. The audio output, measured using the measurement device, is recorded as the noise level, N.
8. If the impairment criteria given are met then the receiver has passed the test.

6.2.5 TEST RESULTS:

FM (integral antenna) VHF band II 98MHz						
Adjacency	C Wanted signal level at © (dBµV/m)	I Unwanted Signal Level at © (dBµV/m)	Required I/C ratio (dB)	SNR (dBQ)	SNR Limit (dBQ)	Result
N = -1 97.9MHz	73	58	-15	86	≥ 40	Pass
N = +1 98.1 MHz	73	58	-15	86	≥ 40	Pass
N = -2 97.8 MHz	73	70	-3	86	≥ 40	Pass
N = +2 98.2 MHz	73	70	-3	86	≥ 40	Pass
N = -3 97.7 MHz	73	81	8	86	≥ 40	Pass
N = +3 98.3 MHz	73	81	8	86	≥ 40	Pass
Blocking 97.2 MHz	73	93	20	86	≥ 40	Pass
Blocking 98.8 MHz	73	93	20	86	≥ 40	Pass

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.


6.3 UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

6.3.1 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	Calibration Date	Cal. Due
TEST RECEIVER	R&S	ESCI	Mar.01,2018	Feb.28,2019
ANTENNA	SCHWARZBECK	VULB9168	Mar.01,2018	Feb.28,2020
Signal Generator	Aglient	N5182B	Sep.20, 2018	Sep.19, 2019
Power divider(combiner)	Mini-Circults	SF781901412	Jul.13,2018	Jul.12,2019

Remark: Each piece of equipment is scheduled for calibration once a year.

6.3.2 TEST SETUP:

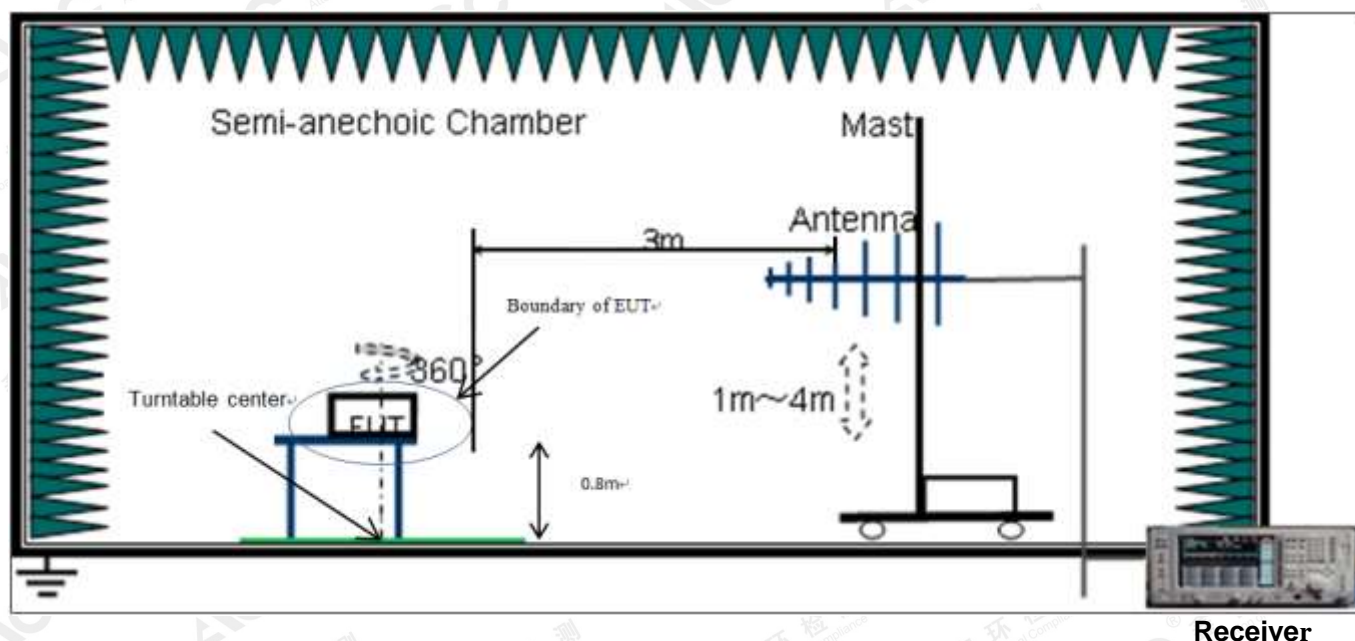

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.3.3 TEST LIMITS:

Requirements for radiated emissions from FM receivers

Frequency range MHz	Measurement		Class B limit dB(μV/m)	
	Distance m	Detector type/ bandwidth	Fundamental	Harmonics
			OATS/SAC (see Table A.1)	OATS/SAC (see Table A.1)
30 – 230	10	Quasi peak/ 120 kHz	50	42
230 – 300				42
300 – 1 000				46
30 – 230	3		60	52
230 – 300				52
300 – 1 000				56

Note: These relaxed limits apply only to emissions at the fundamental and harmonic frequencies of the local oscillator. Signals at all other frequencies shall be compliant with the limits given in the below table.

Requirements for radiated emissions at frequencies up to 1 GHz for Class B equipment

Frequency range MHz	Measurement		Class B limits dB(μV/m)
	Distance m	Detector type/ bandwidth	OATS/SAC (see Table A.1)
30 – 230	10	Quasi Peak / 120 kHz	30
230 – 1 000			37
30 – 230	3		40
230 – 1 000			47

Note: The above limit values refer to EN55032 Subclasses table A.4, table A.6

6.3.4 TEST PROCEDURE:


- (1). The EUT was placed on the top of an insulating table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2). The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3). The antenna is a broadband antenna, and its height is varied from 1 to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- (4). For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5). The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10dB margin would be retested one by one using the quasi-peak method.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

6.3.5 TEST RESULT

FM 98MHz


RADIATED EMISSION BELOW 1GHZ- HORIZONTAL

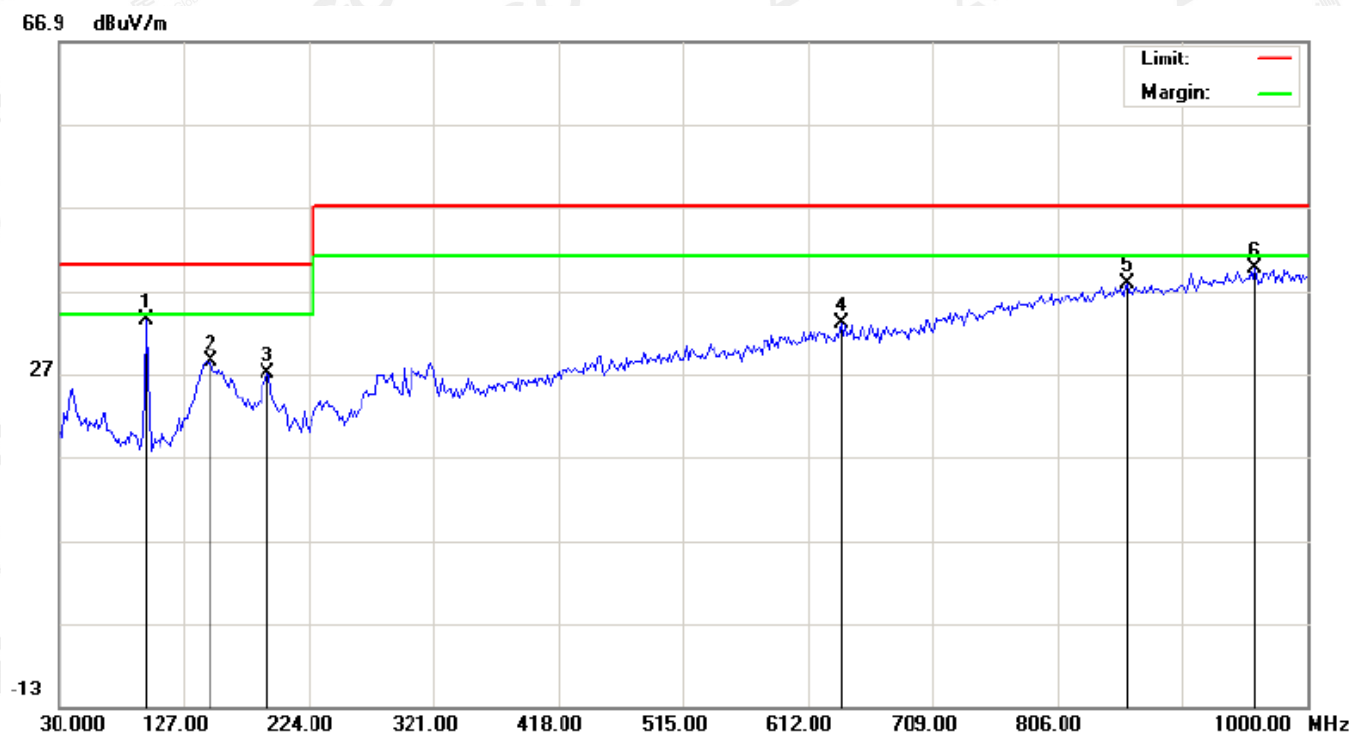

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	97.9000	16.48	16.84	33.32	40.00	-6.68	peak			
2		148.0167	8.12	20.37	28.49	40.00	-11.51	peak			
3		191.6667	9.00	17.96	26.96	40.00	-13.04	peak			
4		637.8667	2.52	30.41	32.93	47.00	-14.07	peak			
5		860.9667	2.63	35.22	37.85	47.00	-9.15	peak			
6		959.5833	2.91	36.65	39.56	47.00	-7.44	peak			

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

RADIATED EMISSION BELOW 1GHZ- VERTICAL

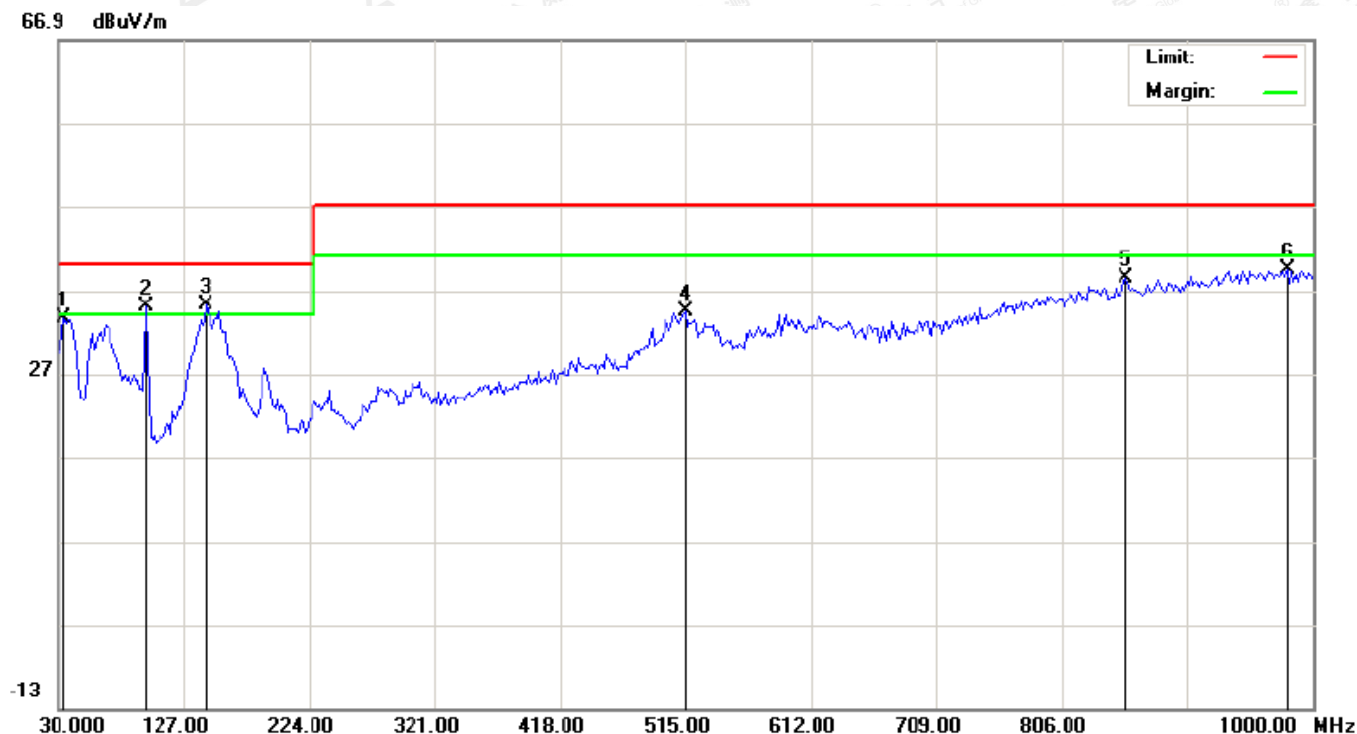

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		34.8500	14.02	19.54	33.56	40.00	-6.44	peak			
2	!	97.9000	18.16	16.84	35.00	40.00	-5.00	peak			
3	*	144.7833	14.85	20.38	35.23	40.00	-4.77	peak			
4		515.0000	6.51	27.84	34.35	47.00	-12.65	peak			
5		856.1167	3.28	35.13	38.41	47.00	-8.59	peak			
6		980.6000	2.45	36.91	39.36	47.00	-7.64	peak			


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

APPENDIX A PHOTOGRAPHS OF TEST SETUP

Sensitivity, Adjacent channel selectivity and blocking



Unwanted emission

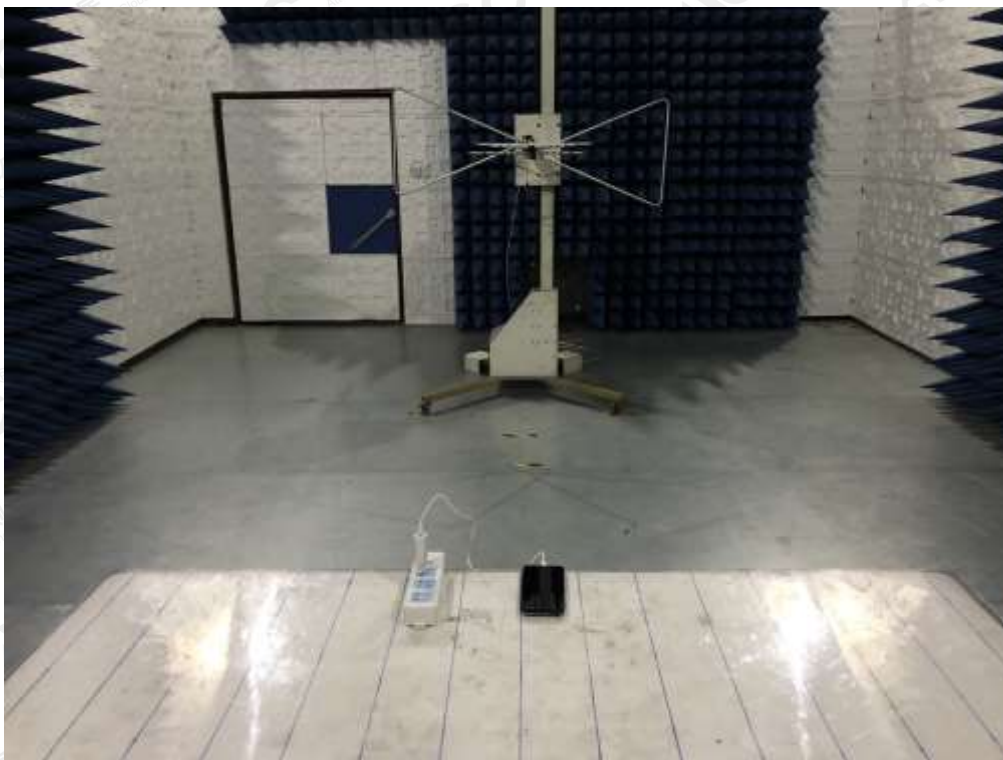

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.

Sample label



----END OF REPORT----

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.agc-cert.com>.